



Appendix C

RF Test Data for 2.4GWIFI(Conducted Measurement)

Product Name: AX3000 Dual Band XPON ONT

Trade Mark: N/A

Test Model: X302

Environmental Conditions

Temperature:	25.6° C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Emiya lin
Supervised by:	Simba Haung



Contents

	Page
COVER PAGE	
1 Duty Cycle.....	3
1.1 Test Result.....	3
1.2 Test Graphs.....	4
2 Maximum Conducted Output Power.....	19
2.1 Test Result.....	19
3 -6dB Bandwidth.....	21
3.1 Test Result.....	21
3.2 Test Graphs.....	22
4 Maximum Power Spectral Density Level.....	40
4.1 Test Result.....	40
4.2 Test Graphs.....	42
5 Band Edge.....	60
5.1 Test Result.....	60
5.2 Test Graphs.....	61
6 Conducted RF Spurious Emission.....	85
6.1 Test Result.....	85
6.2 Test Graphs.....	87





1 Duty Cycle

1.1 Test Result


Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor	1/T (kHz)
b	2412	Ant0	99.61	0.02	0.12
b	2437	Ant0	99.59	0.02	0.12
b	2462	Ant0	99.58	0.02	0.12
g	2412	Ant0	99.61	0.02	0.12
g	2437	Ant0	99.59	0.02	0.12
g	2462	Ant0	99.58	0.02	0.12
n20	2412	Ant0	92.95	0.32	2.22
n20	2437	Ant0	93.02	0.31	2.22
n20	2462	Ant0	92.89	0.32	2.22
n40	2422	Ant0	92.94	0.32	2.22
n40	2437	Ant0	92.92	0.32	2.22
n40	2452	Ant0	92.91	0.32	2.27
ax20	2412	Ant0	87	0.6	4.35
ax20	2437	Ant0	87.04	0.6	4.55
ax20	2462	Ant0	87.03	0.6	4.35
ax40	2422	Ant0	92.92	0.32	2.27
ax40	2437	Ant0	92.9	0.32	2.22
ax40	2452	Ant0	92.9	0.32	2.27
b	2412	Ant1	99.6	0.02	0.12
b	2437	Ant1	99.6	0.02	0.12
b	2462	Ant1	99.59	0.02	0.12
g	2412	Ant1	99.6	0.02	0.12
g	2437	Ant1	99.6	0.02	0.12
g	2462	Ant1	99.59	0.02	0.12
n20	2412	Ant1	92.86	0.32	2.22
n20	2437	Ant1	93.01	0.31	2.22
n20	2462	Ant1	93	0.32	2.27
n40	2422	Ant1	92.93	0.32	2.27
n40	2437	Ant1	92.95	0.32	2.22
n40	2452	Ant1	92.93	0.32	2.27
ax20	2412	Ant1	87.06	0.6	4.35
ax20	2437	Ant1	87.03	0.6	4.35
ax20	2462	Ant1	87.06	0.6	4.55
ax40	2422	Ant1	92.94	0.32	2.22
ax40	2437	Ant1	92.92	0.32	2.22
ax40	2452	Ant1	92.93	0.32	2.27


1.2 Test Graphs

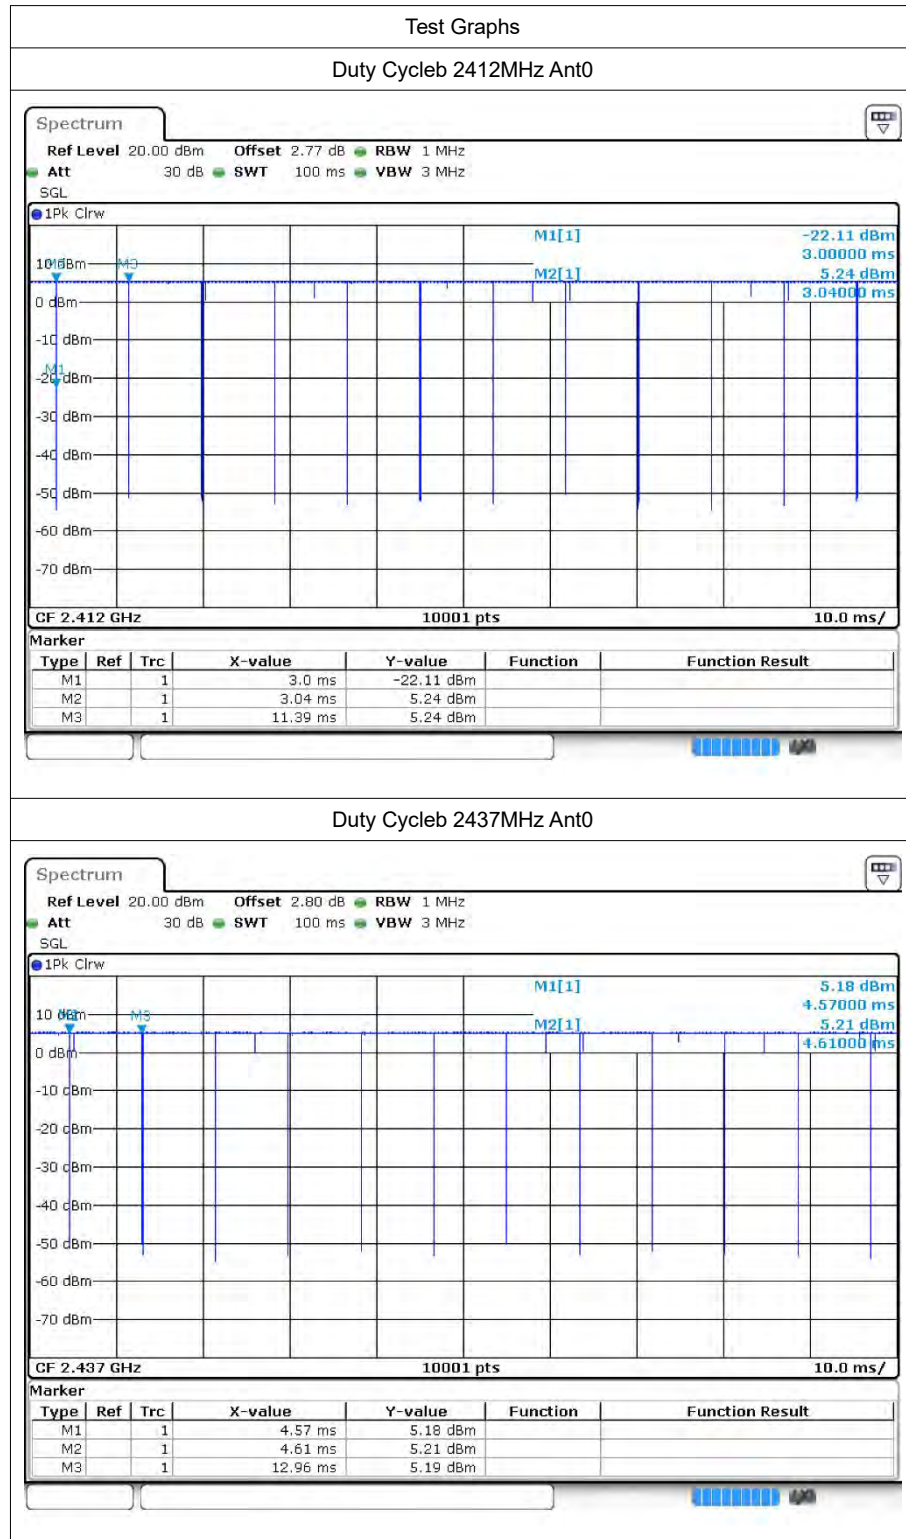


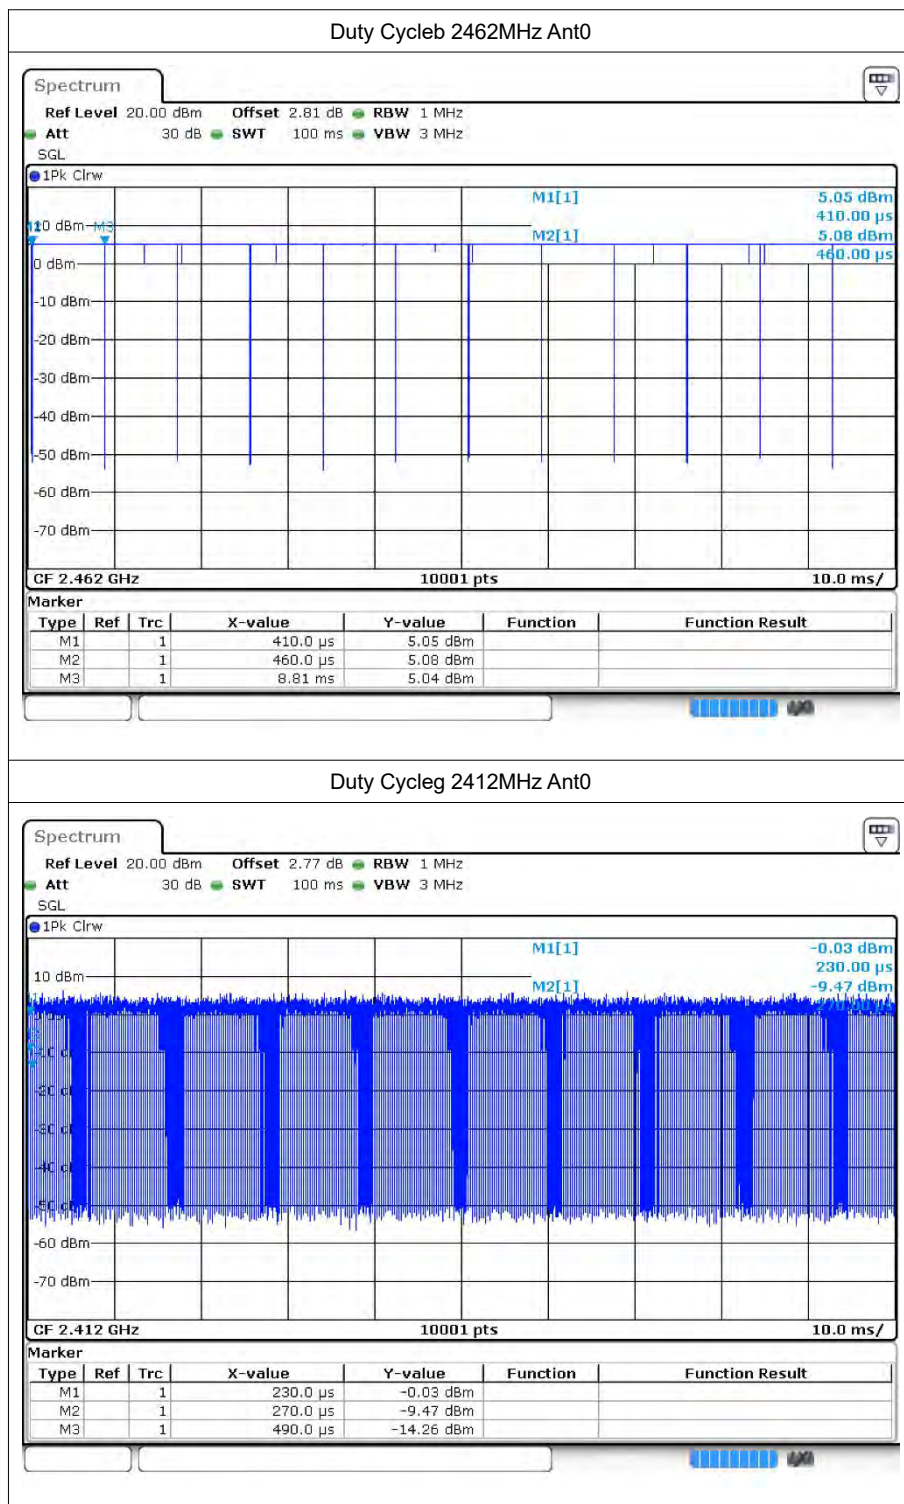



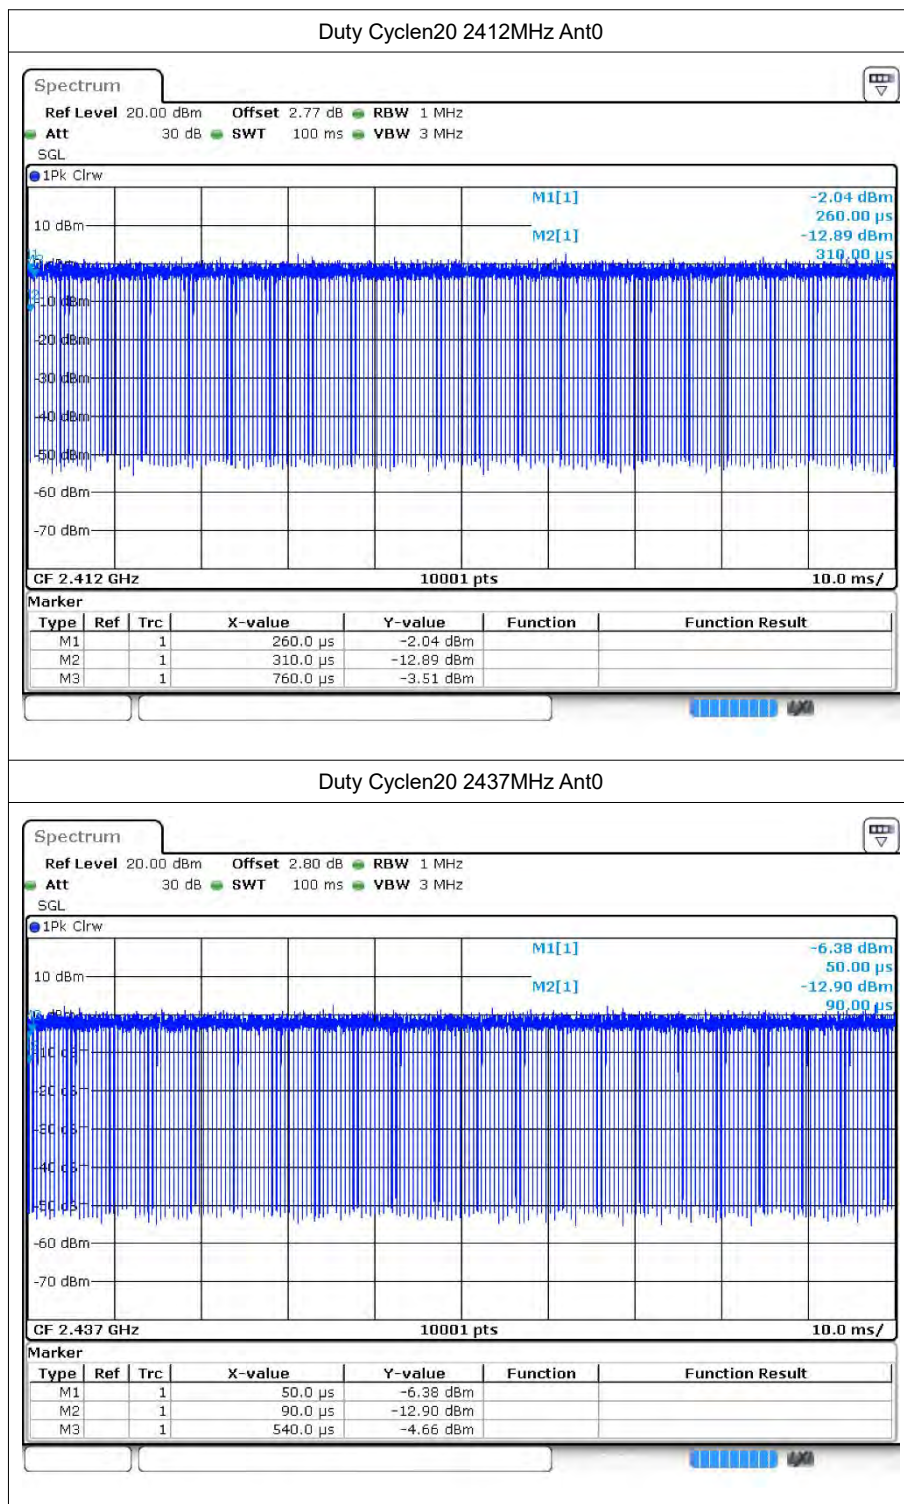


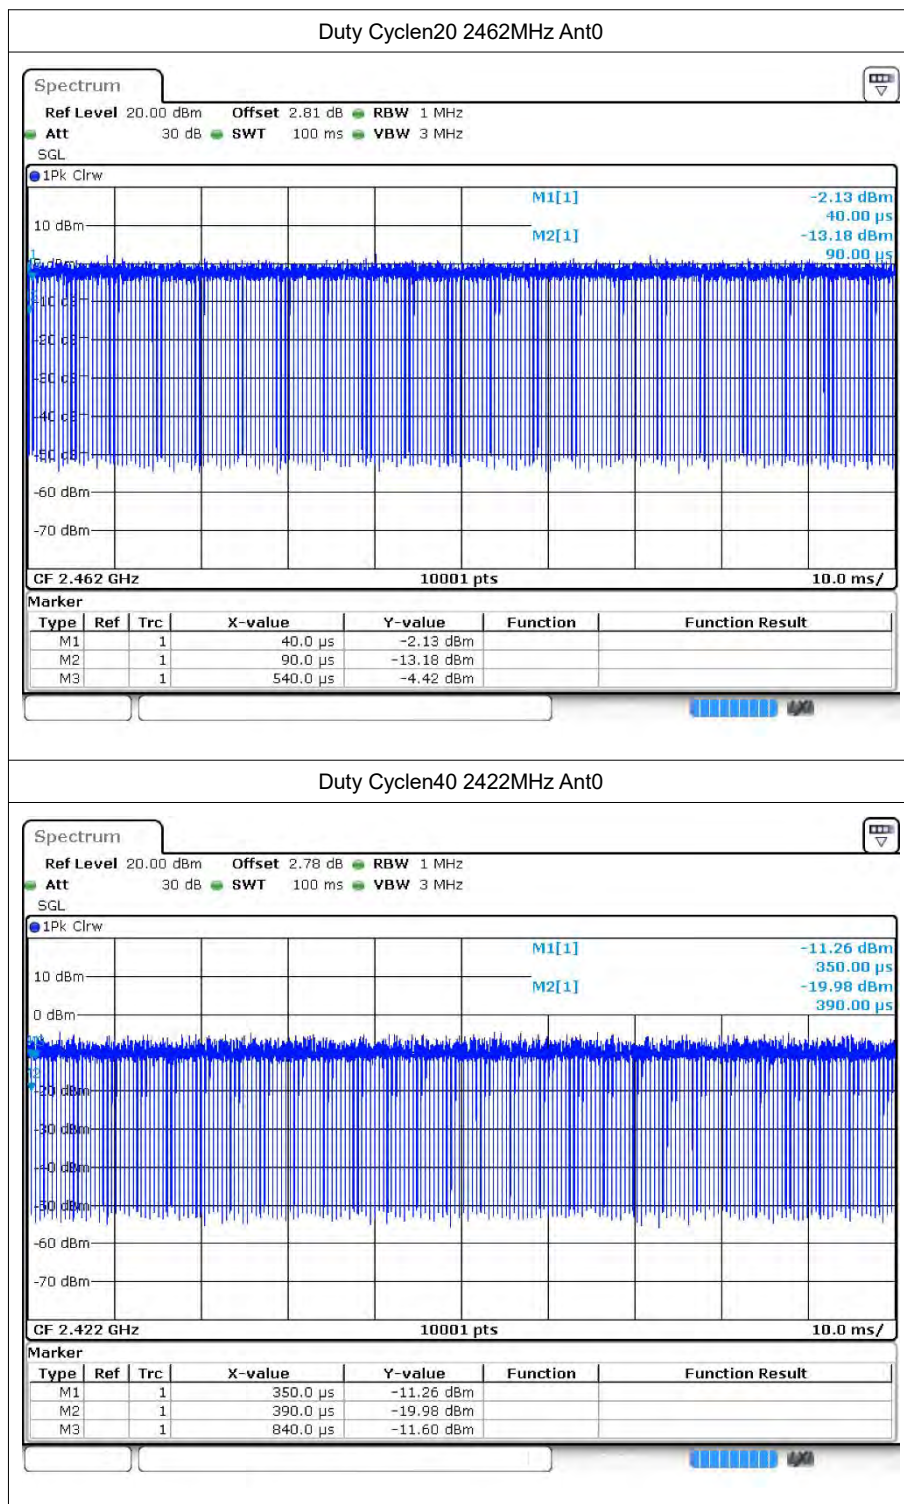

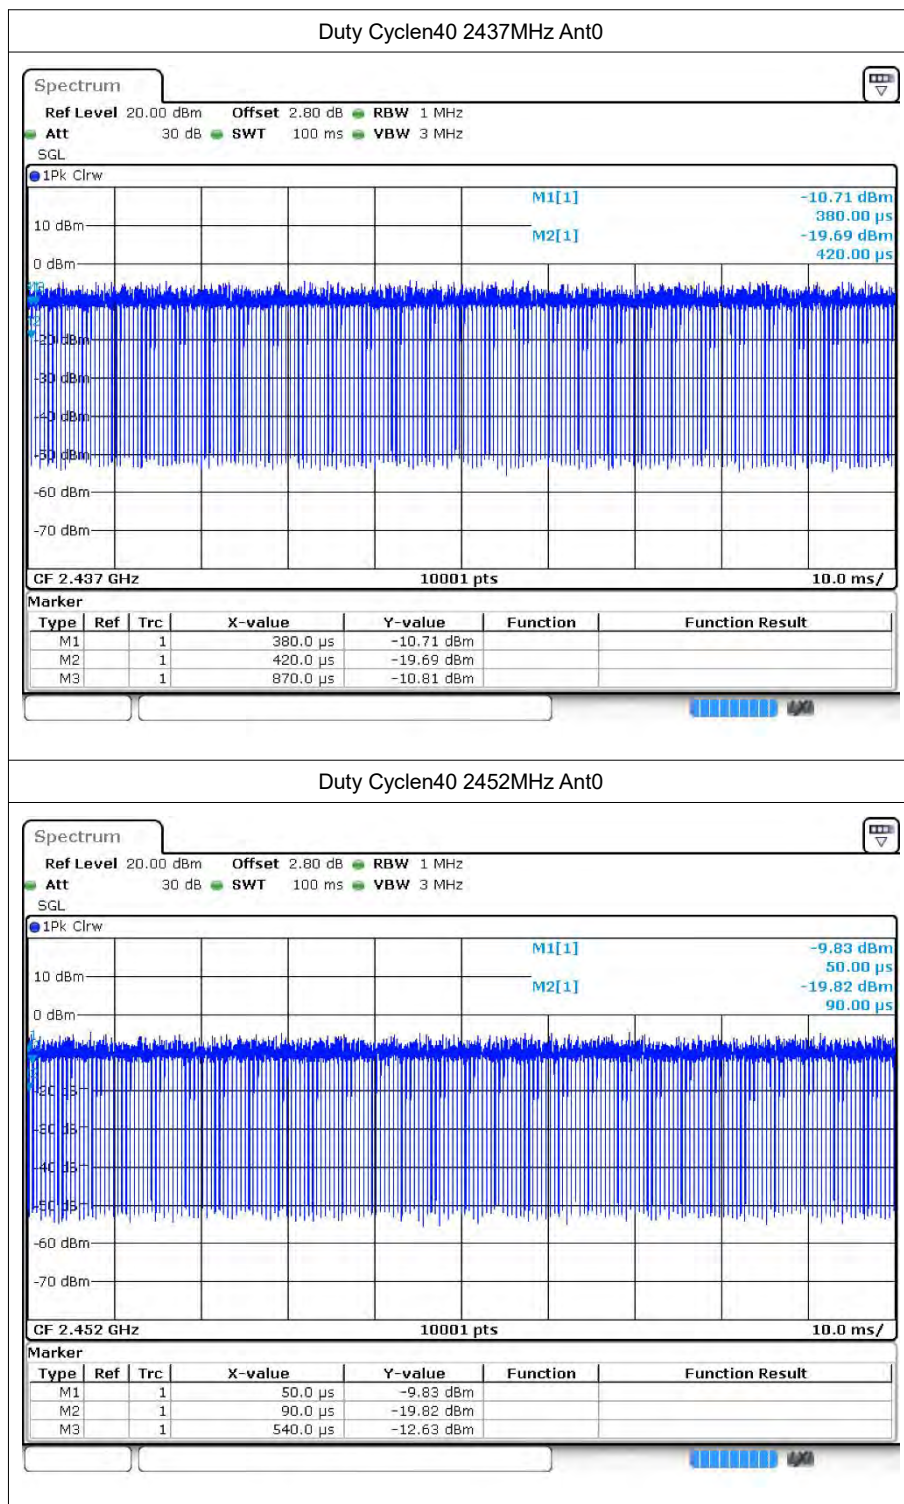



Test Graphs

Duty Cycle 2412MHz Ant1

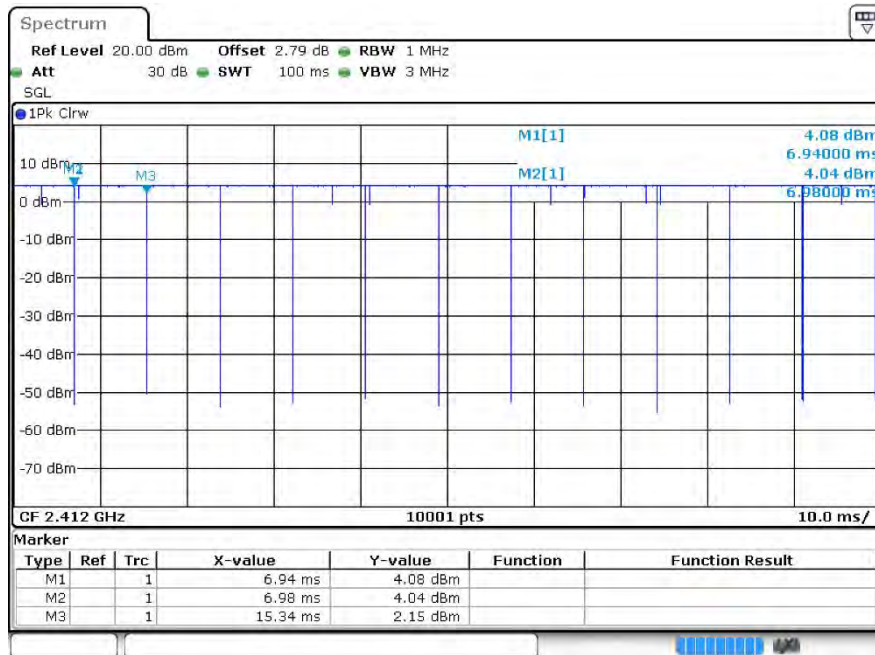



Duty Cycle 2437MHz Ant1

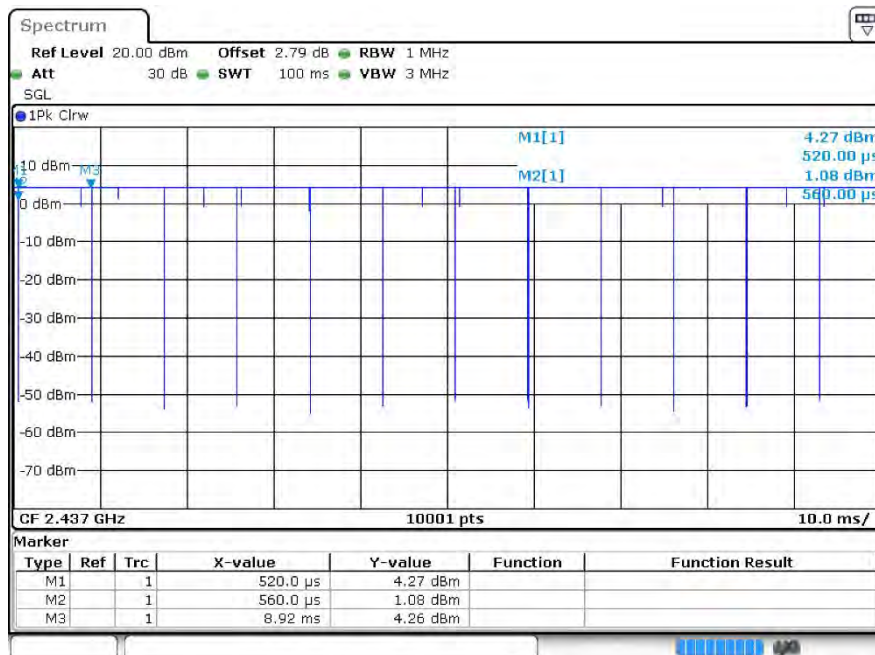


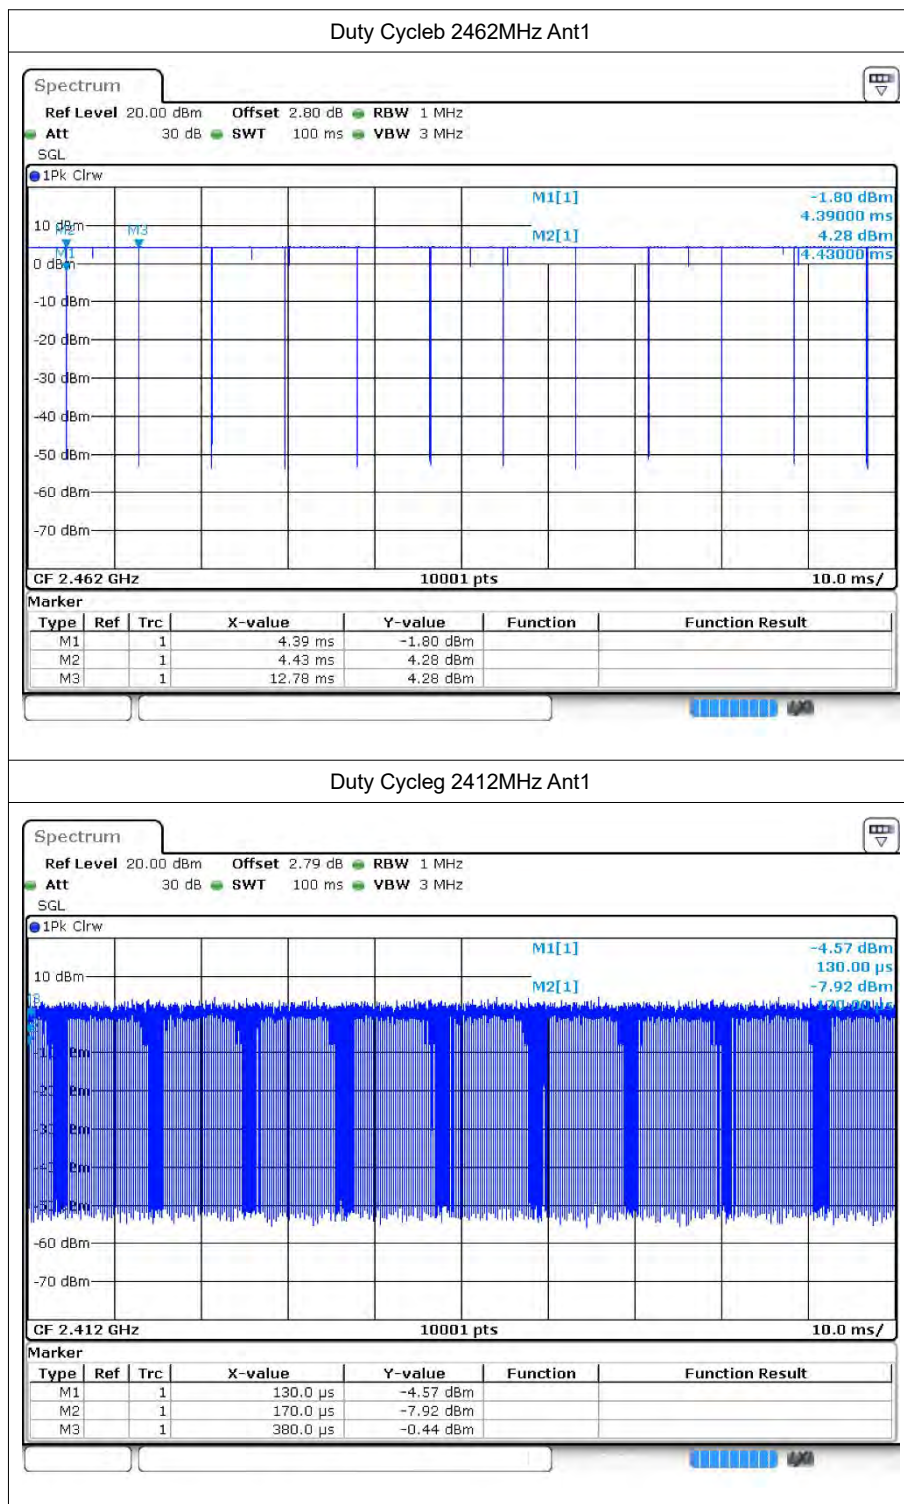





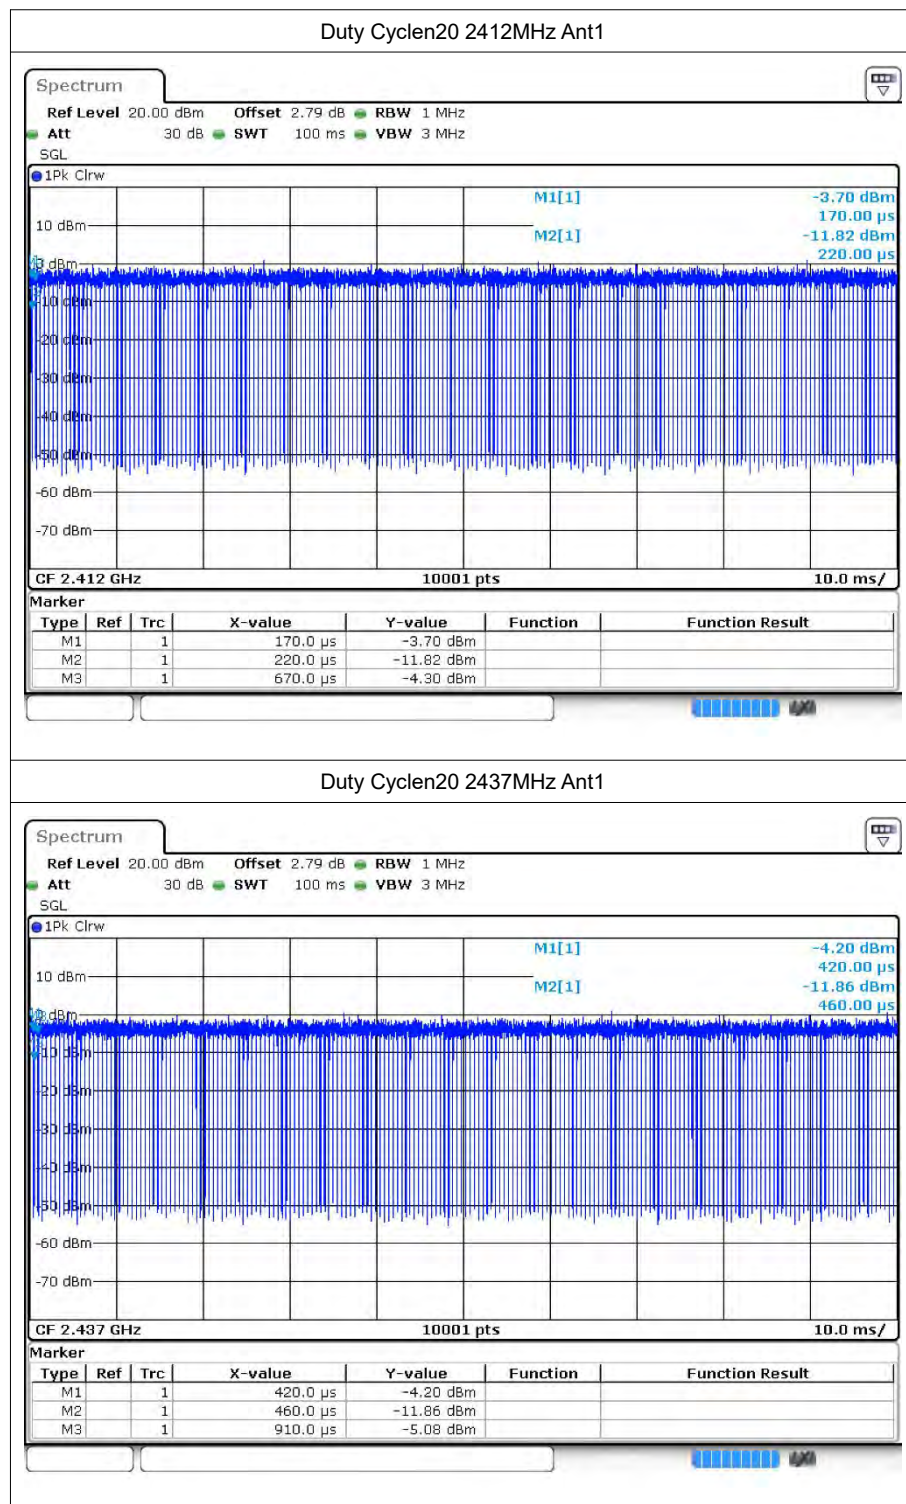


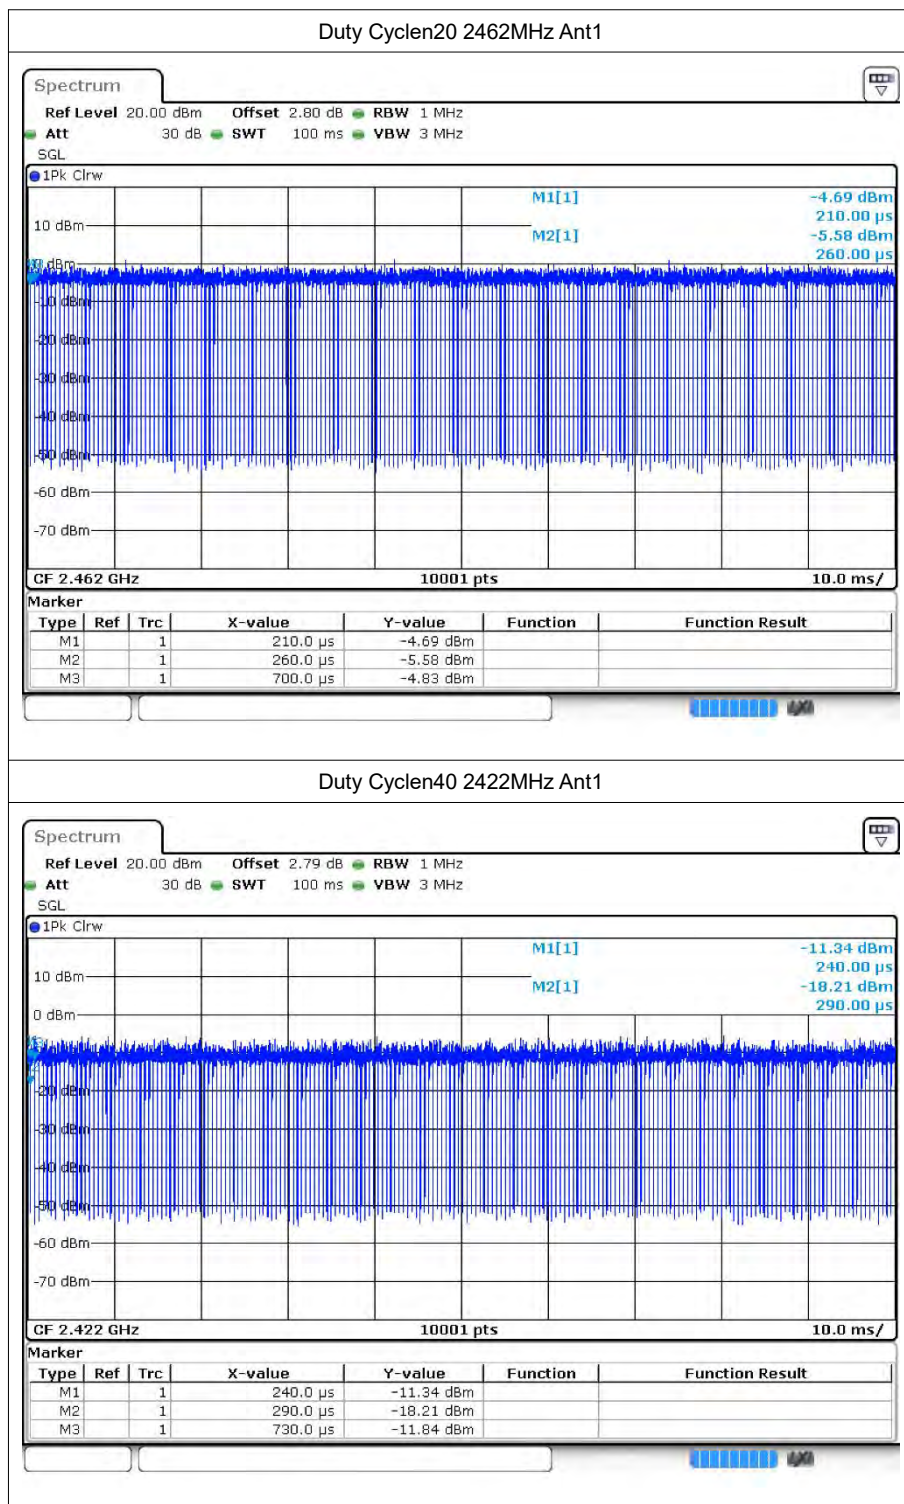

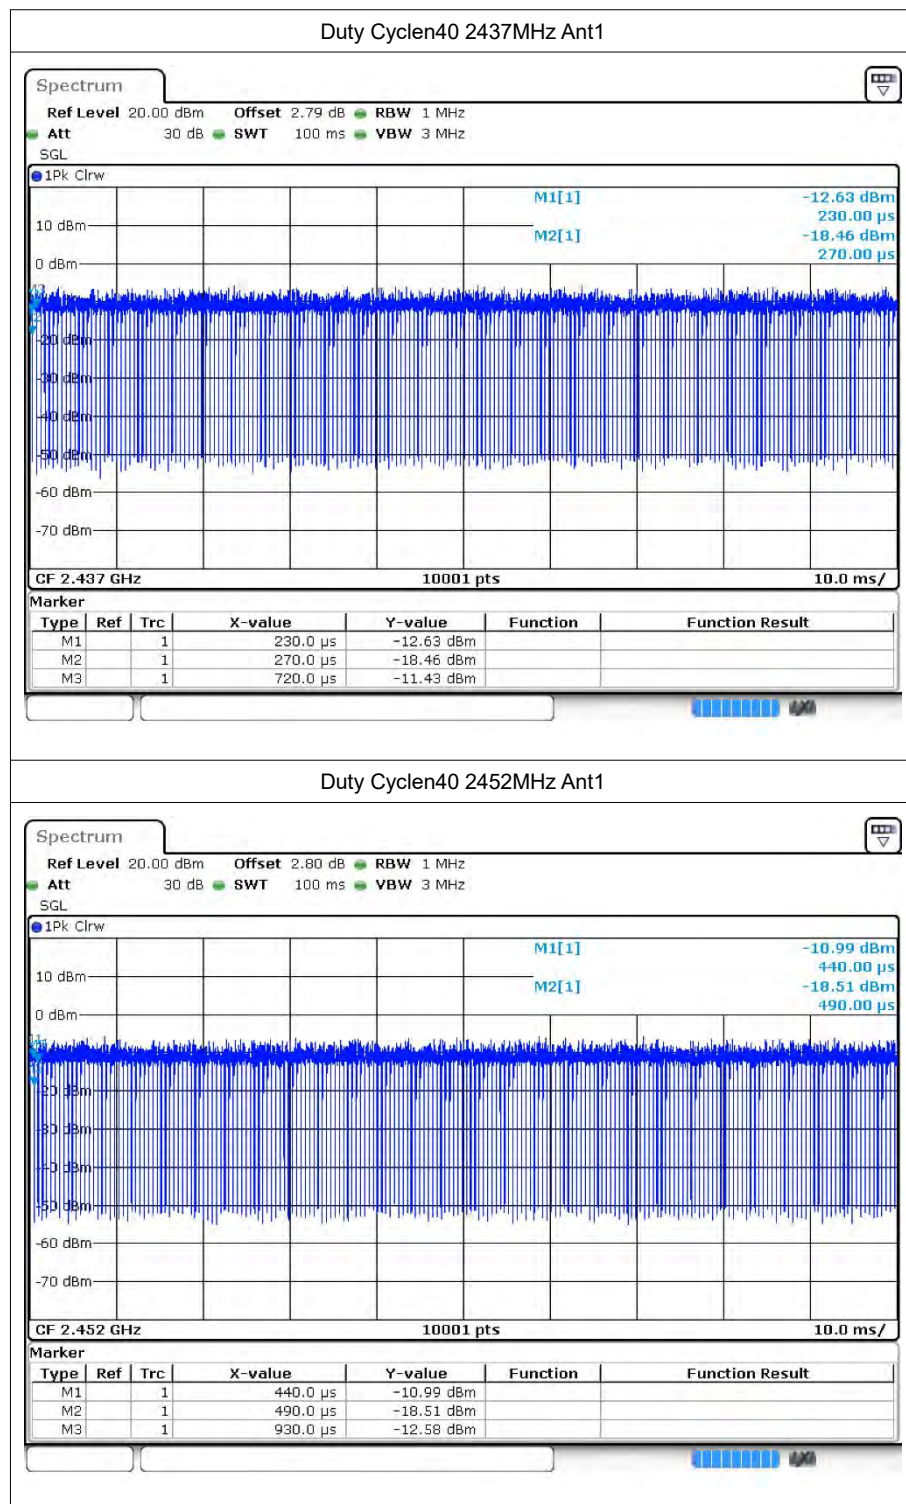

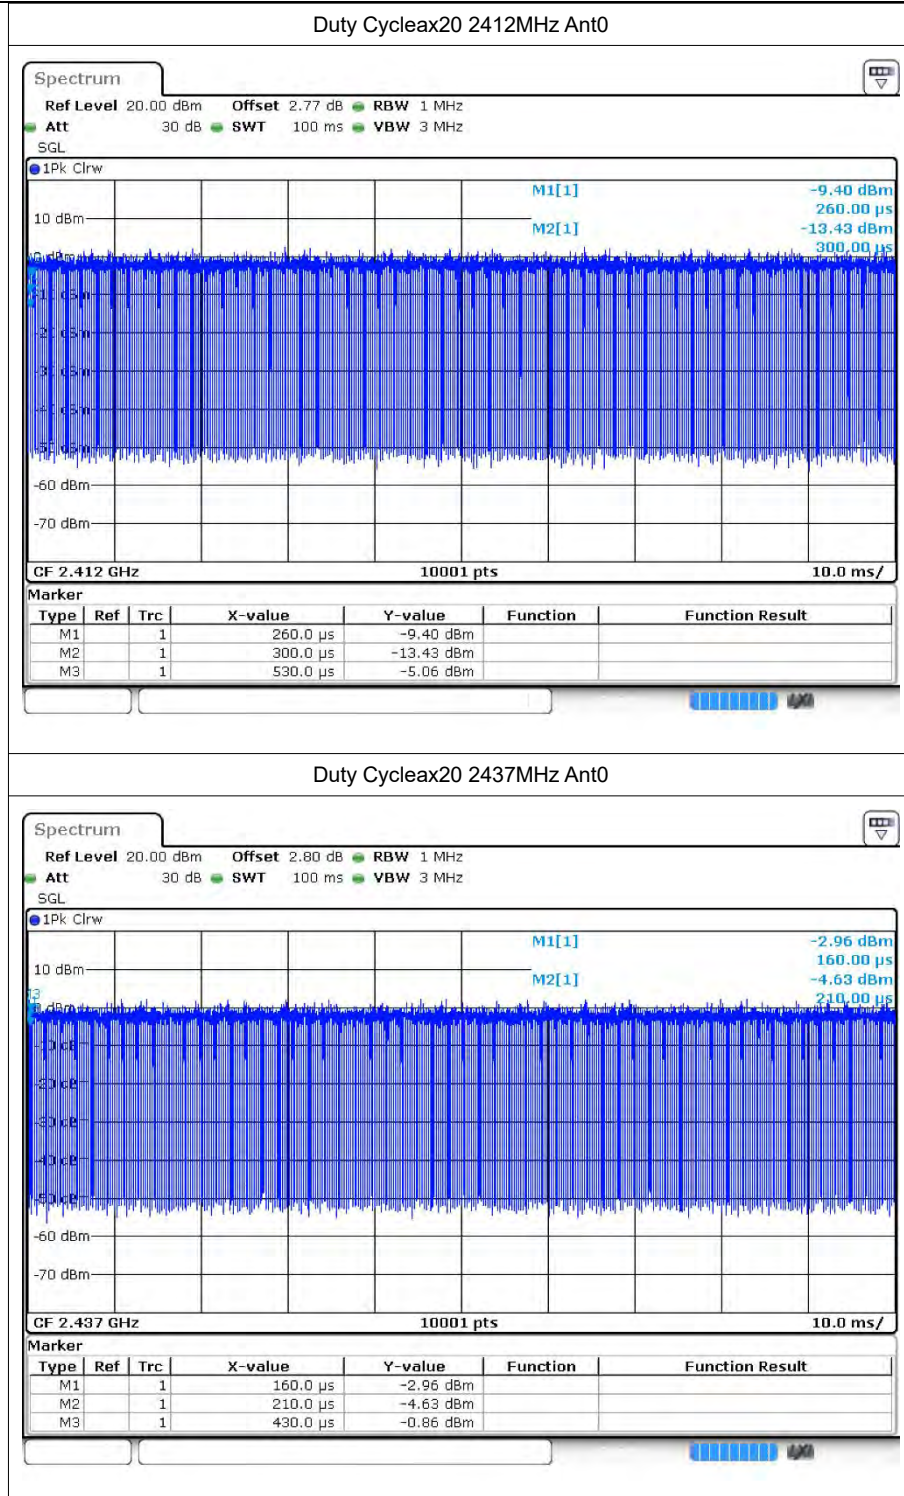

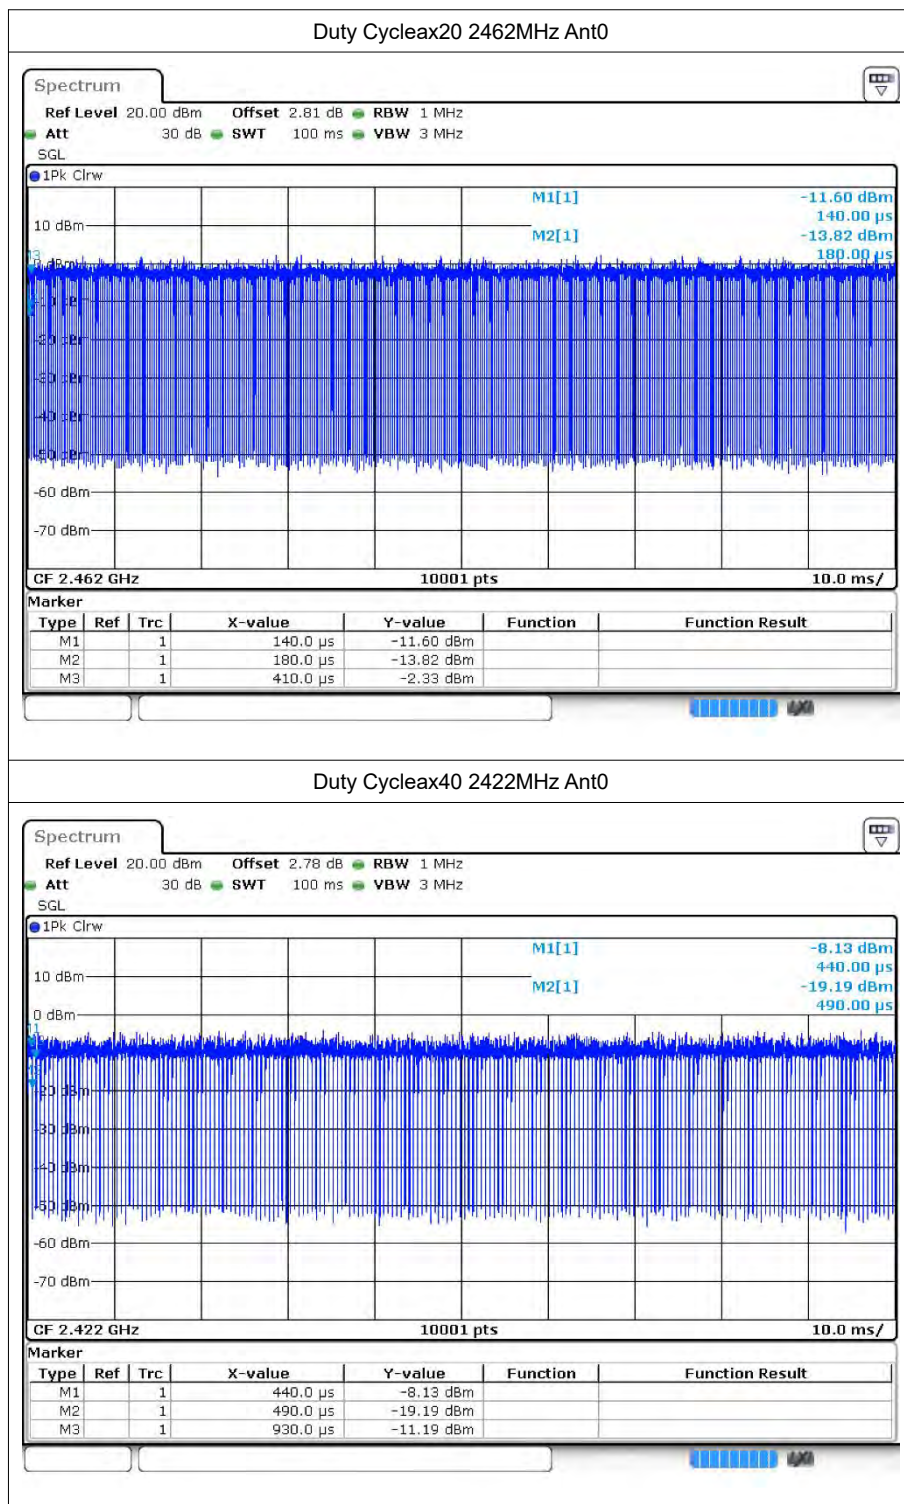

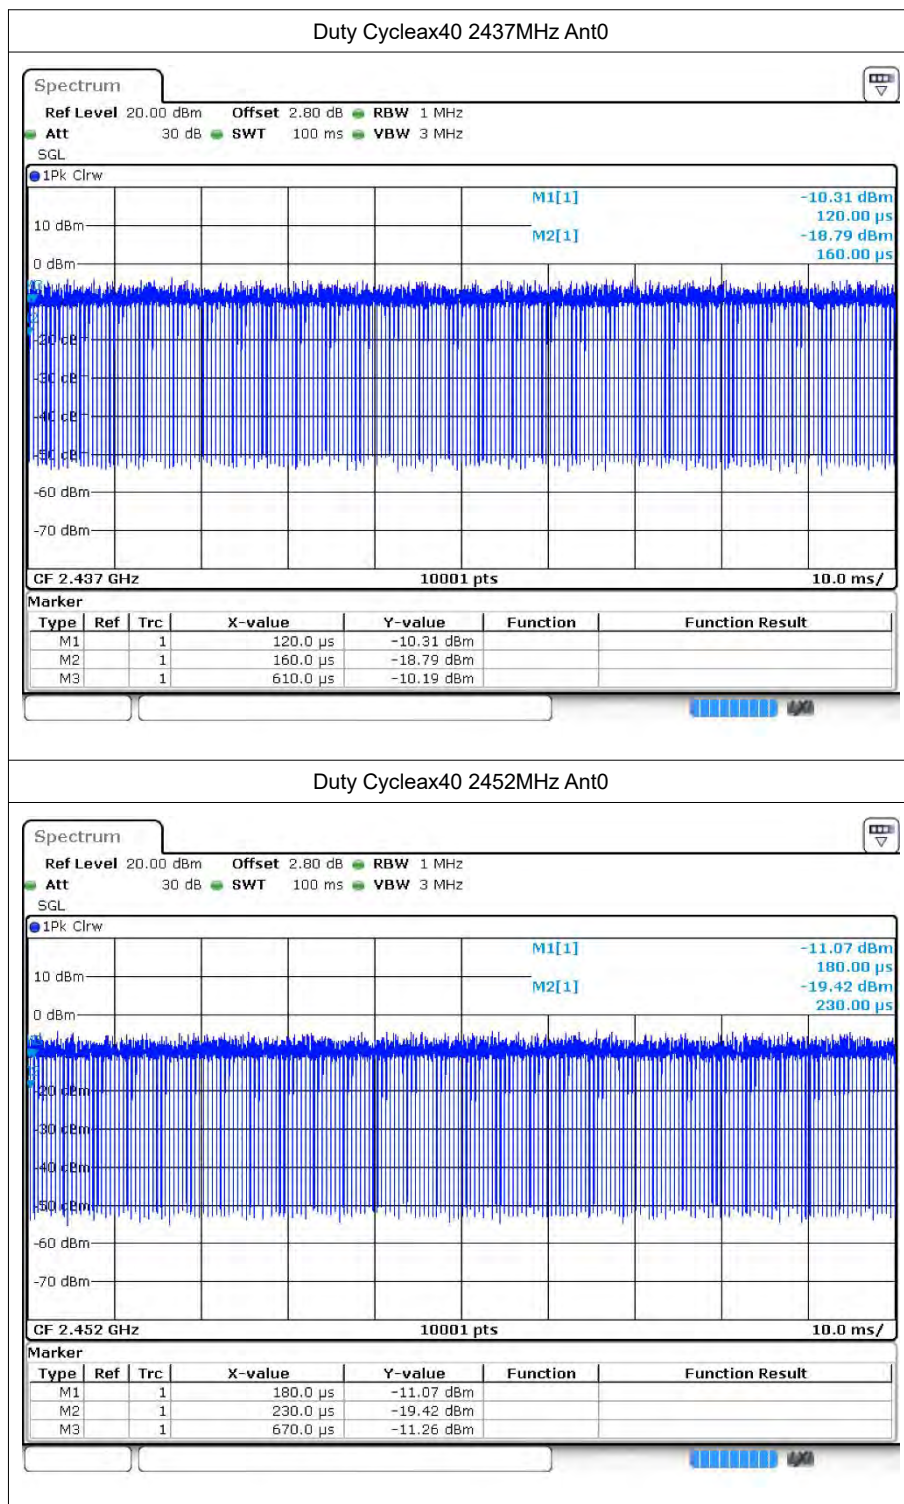

2 Maximum Conducted Output Power

2.1 Test Result

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant0	17.71	30	Pass
b	2437	Ant0	17.62	30	Pass
b	2462	Ant0	17.67	30	Pass
b	2412	Ant1	16.58	30	Pass
b	2437	Ant1	16.73	30	Pass
b	2462	Ant1	15.88	30	Pass
g	2412	Ant0	17.37	30	Pass
g	2437	Ant0	17.03	30	Pass
g	2462	Ant0	17.09	30	Pass
g	2412	Ant1	15.81	30	Pass
g	2437	Ant1	16.11	30	Pass
g	2462	Ant1	16.16	30	Pass
n20	2412	Ant0	14.55	30	Pass
n20	2437	Ant0	14.54	30	Pass
n20	2462	Ant0	14.45	30	Pass
n20	2412	Ant1	12.78	30	Pass
n20	2437	Ant1	12.9	30	Pass
n20	2462	Ant1	12.95	30	Pass
n20	2412	Sum	16.76	27.36	Pass
n20	2437	Sum	16.81	27.36	Pass
n20	2462	Sum	16.77	27.36	Pass
n40	2422	Ant0	13.74	30	Pass
n40	2437	Ant0	13.82	30	Pass
n40	2452	Ant0	13.71	30	Pass
n40	2422	Ant1	12.51	30	Pass
n40	2437	Ant1	12.62	30	Pass
n40	2452	Ant1	12.65	30	Pass
n40	2422	Sum	16.18	27.36	Pass
n40	2437	Sum	16.27	27.36	Pass
n40	2452	Sum	16.22	27.36	Pass
ax20	2412	Ant0	14.6	30	Pass
ax20	2437	Ant0	14.41	30	Pass
ax20	2462	Ant0	14.42	30	Pass
ax20	2412	Ant1	12.67	30	Pass



ax20	2437	Ant1	12.64	30	Pass
ax20	2462	Ant1	12.89	30	Pass
ax20	2412	Sum	16.75	27.36	Pass
ax20	2437	Sum	16.62	27.36	Pass
ax20	2462	Sum	16.73	27.36	Pass
ax40	2422	Ant0	14.16	30	Pass
ax40	2437	Ant0	14.34	30	Pass
ax40	2452	Ant0	14.13	30	Pass
ax40	2422	Ant1	12.47	30	Pass
ax40	2437	Ant1	12.55	30	Pass
ax40	2452	Ant1	12.54	30	Pass
ax40	2422	Sum	16.41	27.36	Pass
ax40	2437	Sum	16.55	27.36	Pass
ax40	2452	Sum	16.42	27.36	Pass

Note:

For MIMO mode:

Directional gain= $10\log[(10^{G1/20}+10^{G2/20})^2/2]$ dBi=8.64dBi

Limit = $30-(8.64-6)=27.36$ dBm for POWER




3 -6dB Bandwidth


3.1 Test Result

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant0	10.083	0.5	Pass
b	2437	Ant0	10.098	0.5	Pass
b	2462	Ant0	10.119	0.5	Pass
g	2412	Ant0	15.114	0.5	Pass
g	2437	Ant0	15.111	0.5	Pass
g	2462	Ant0	15.09	0.5	Pass
n20	2412	Ant0	15.117	0.5	Pass
n20	2437	Ant0	15.105	0.5	Pass
n20	2462	Ant0	15.108	0.5	Pass
n40	2422	Ant0	31.332	0.5	Pass
n40	2437	Ant0	31.326	0.5	Pass
n40	2452	Ant0	35.004	0.5	Pass
ax20	2412	Ant0	16.089	0.5	Pass
ax20	2437	Ant0	16.356	0.5	Pass
ax20	2462	Ant0	15.099	0.5	Pass
ax40	2422	Ant0	35.052	0.5	Pass
ax40	2437	Ant0	31.32	0.5	Pass
ax40	2452	Ant0	27.87	0.5	Pass
b	2412	Ant1	10.098	0.5	Pass
b	2437	Ant1	10.059	0.5	Pass
b	2462	Ant1	10.086	0.5	Pass
g	2412	Ant1	15.09	0.5	Pass
g	2437	Ant1	15.03	0.5	Pass
g	2462	Ant1	15.111	0.5	Pass
n20	2412	Ant1	13.86	0.5	Pass
n20	2437	Ant1	12.612	0.5	Pass
n20	2462	Ant1	15.087	0.5	Pass
n40	2422	Ant1	31.338	0.5	Pass
n40	2437	Ant1	30.672	0.5	Pass
n40	2452	Ant1	33.846	0.5	Pass
ax20	2412	Ant1	15.138	0.5	Pass
ax20	2437	Ant1	15.105	0.5	Pass
ax20	2462	Ant1	15.165	0.5	Pass
ax40	2422	Ant1	30.396	0.5	Pass
ax40	2437	Ant1	35.064	0.5	Pass
ax40	2452	Ant1	35.094	0.5	Pass


3.2 Test Graphs

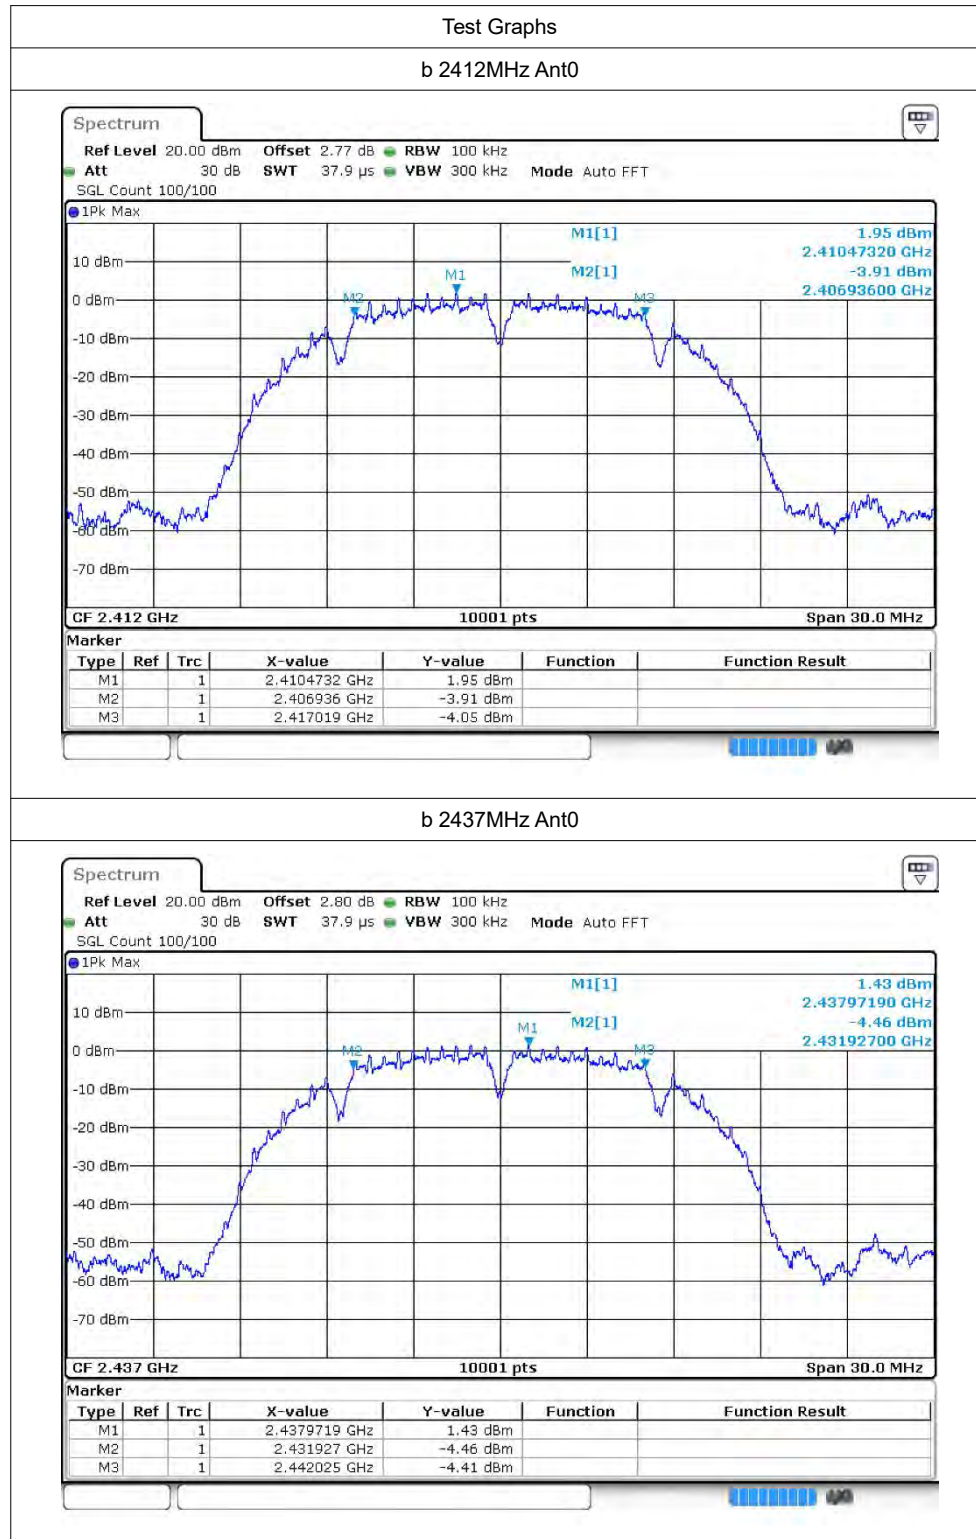


b 2462MHz Ant0

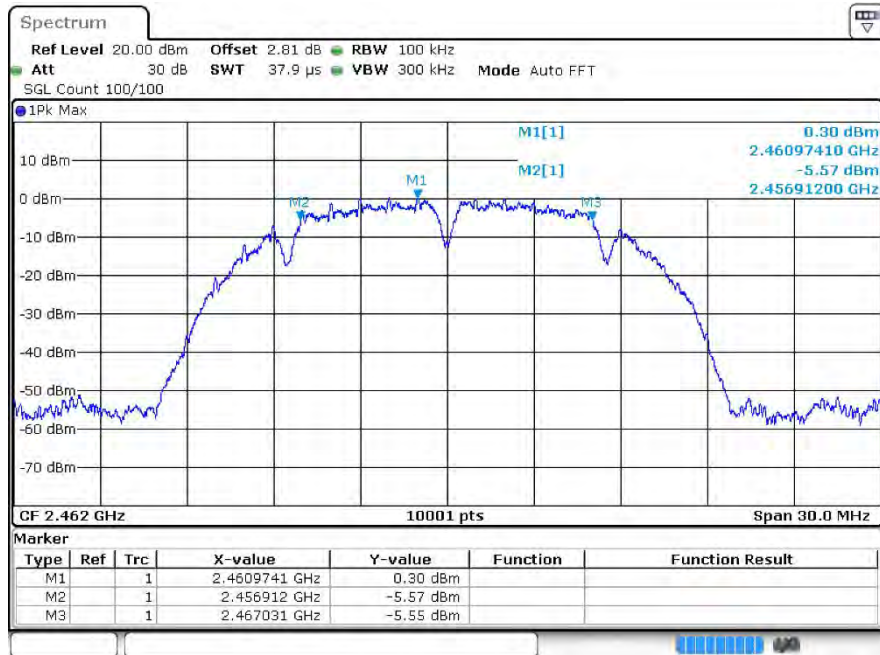


g 2412MHz Ant0

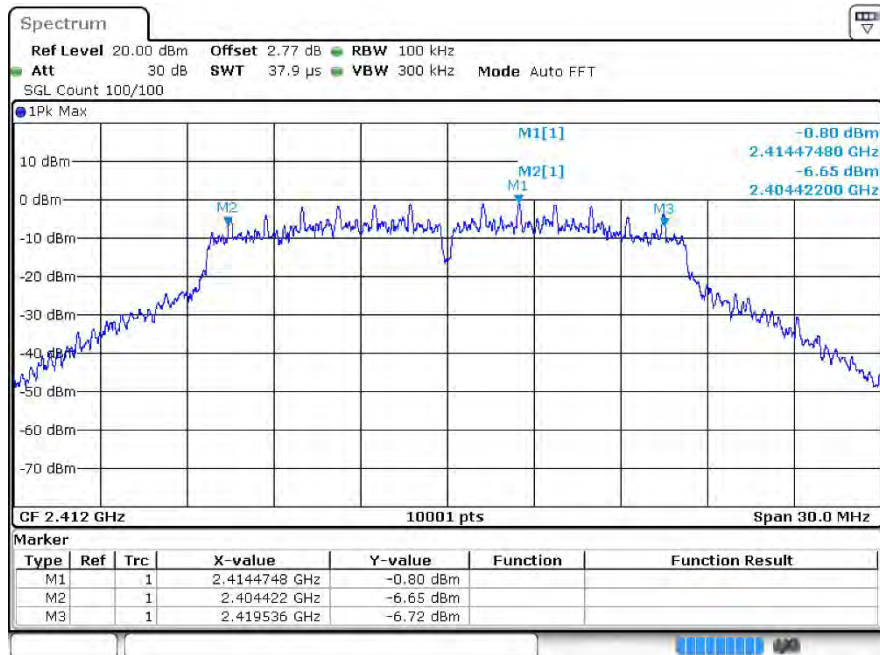


g 2437MHz Ant0

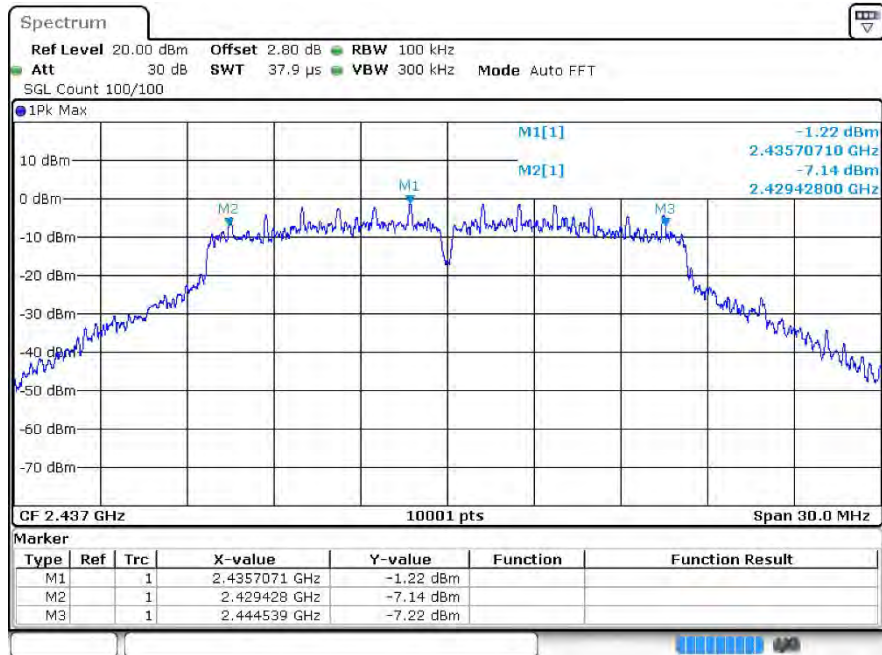


g 2462MHz Ant0

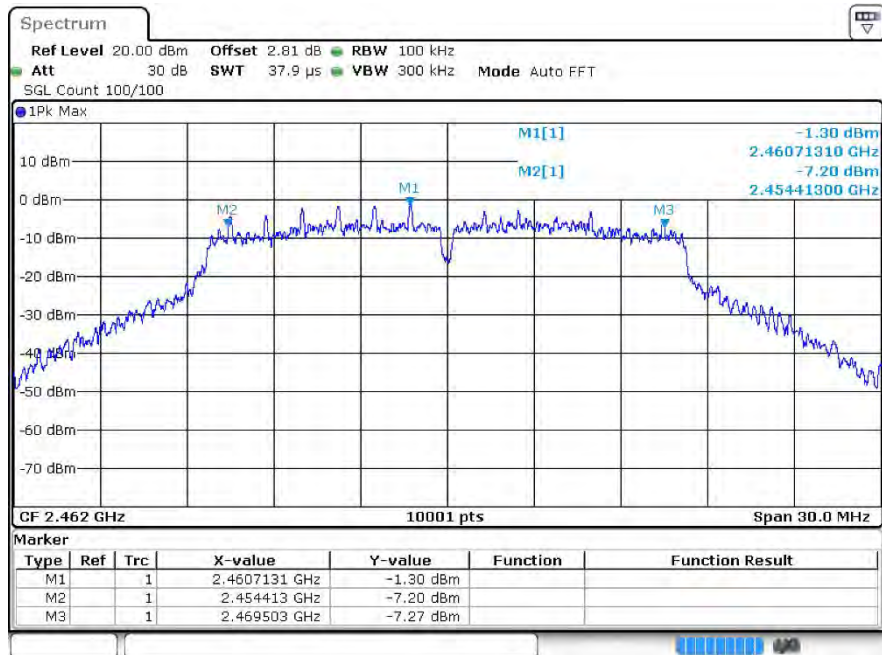


n20 2412MHz Ant0

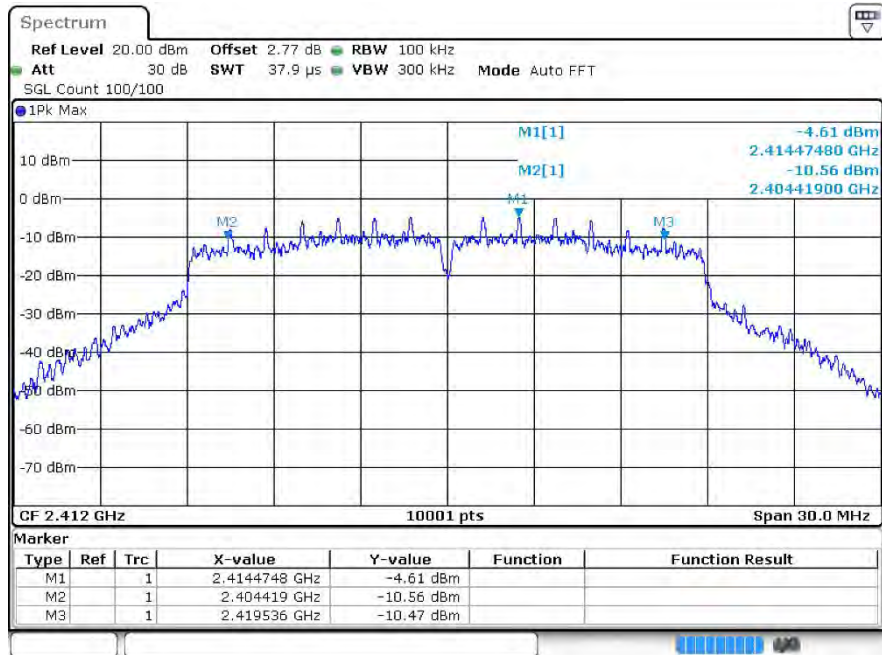


n20 2437MHz Ant0

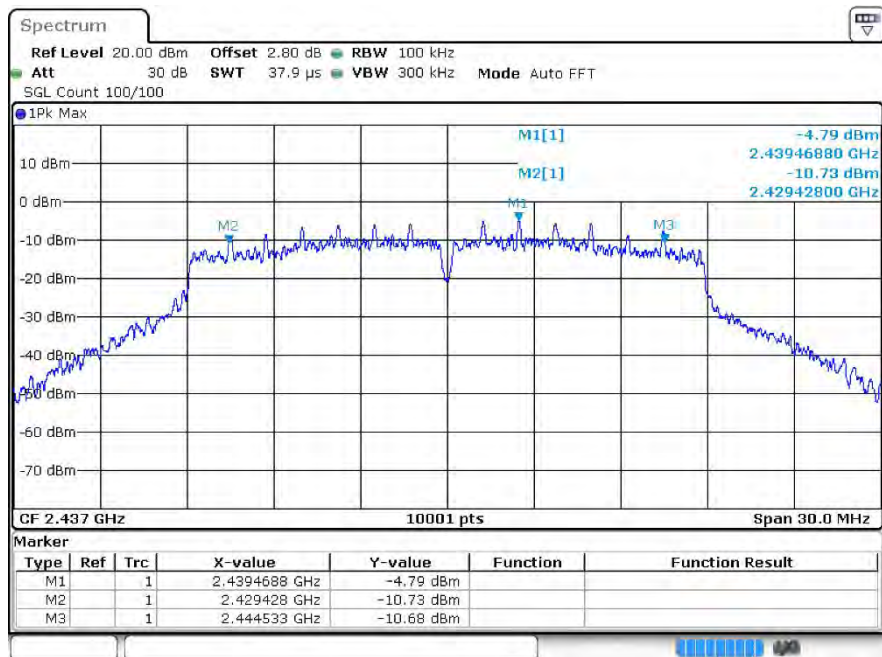


n20 2462MHz Ant0

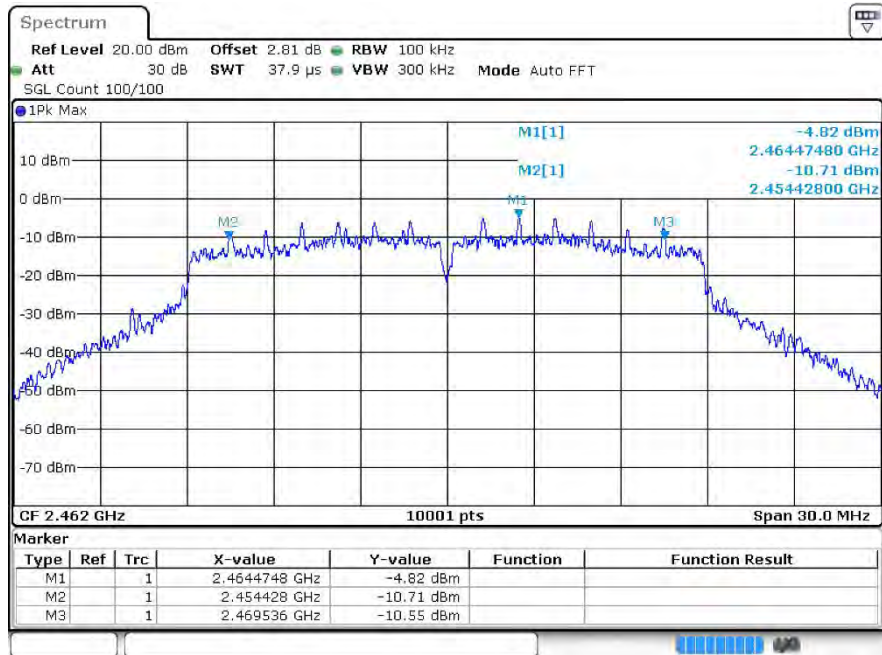


n40 2422MHz Ant0

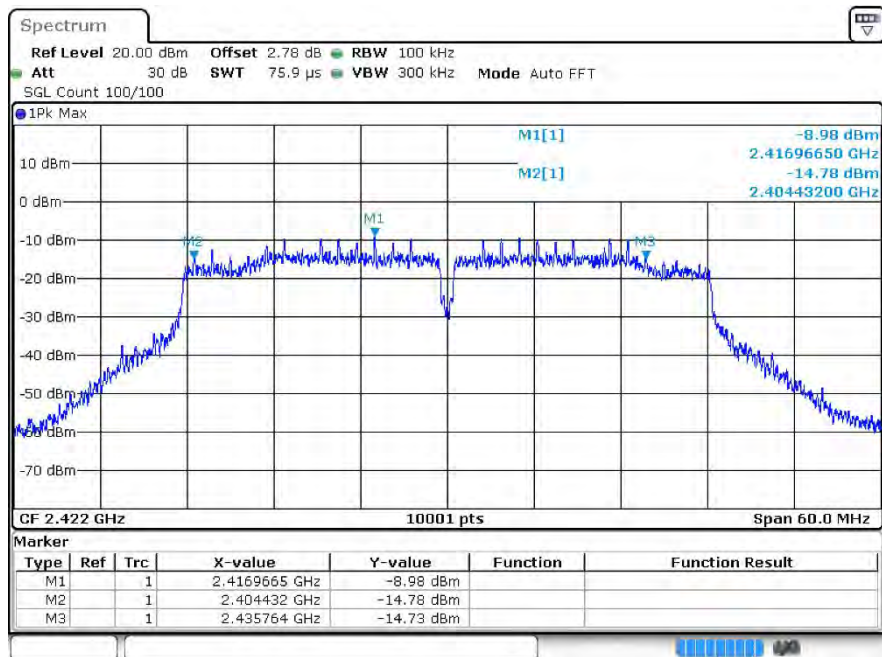


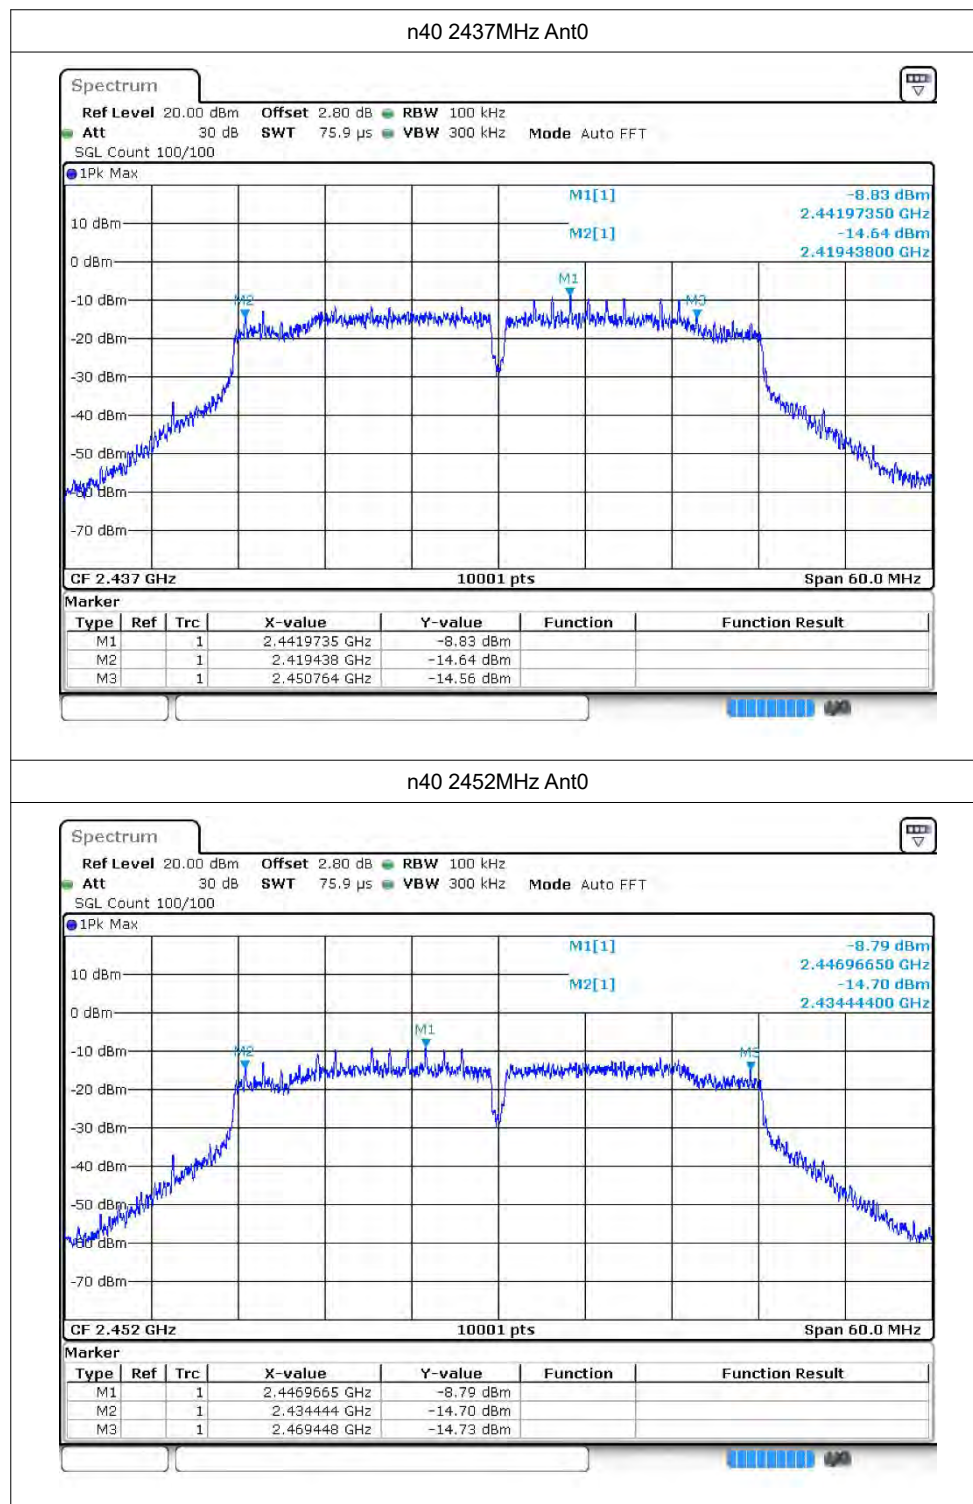


ax20 2412MHz Ant0

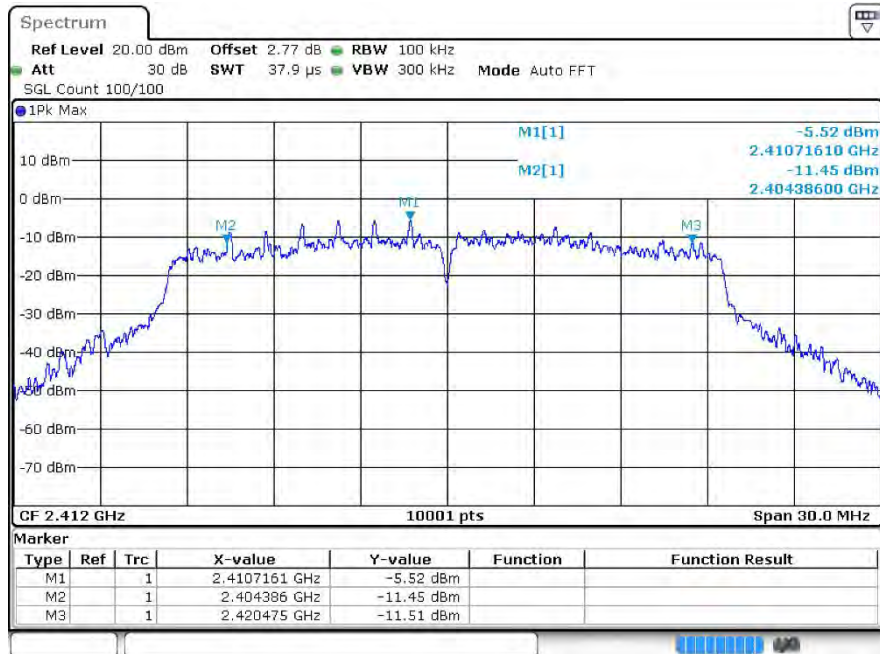


ax20 2437MHz Ant0

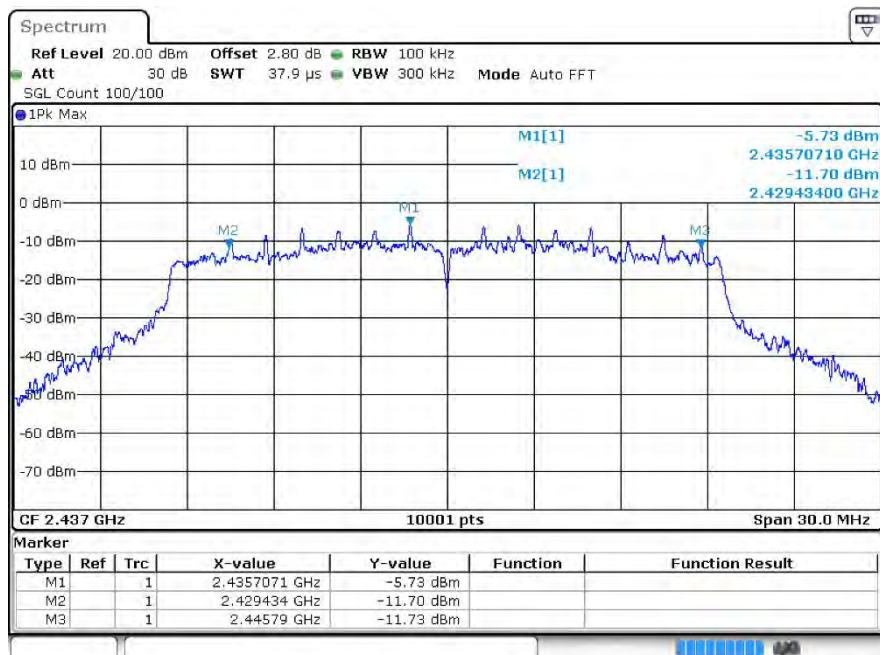


ax20 2462MHz Ant0

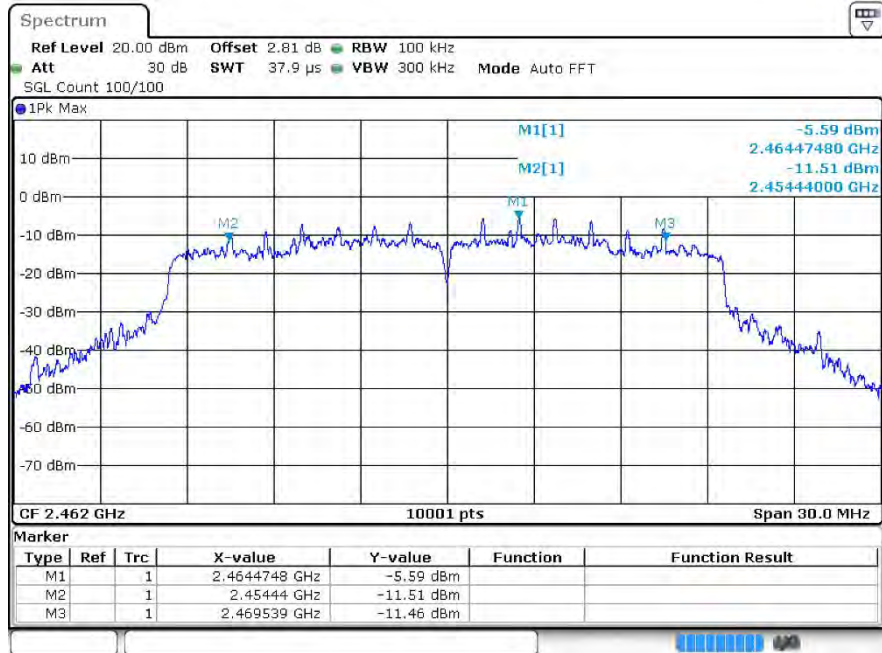


ax40 2422MHz Ant0

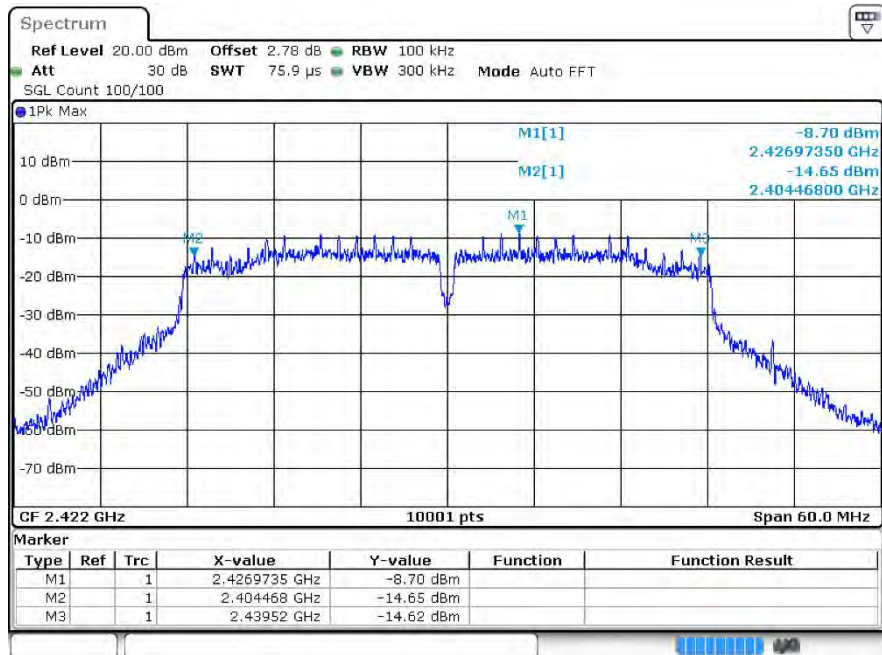


ax40 2437MHz Ant0

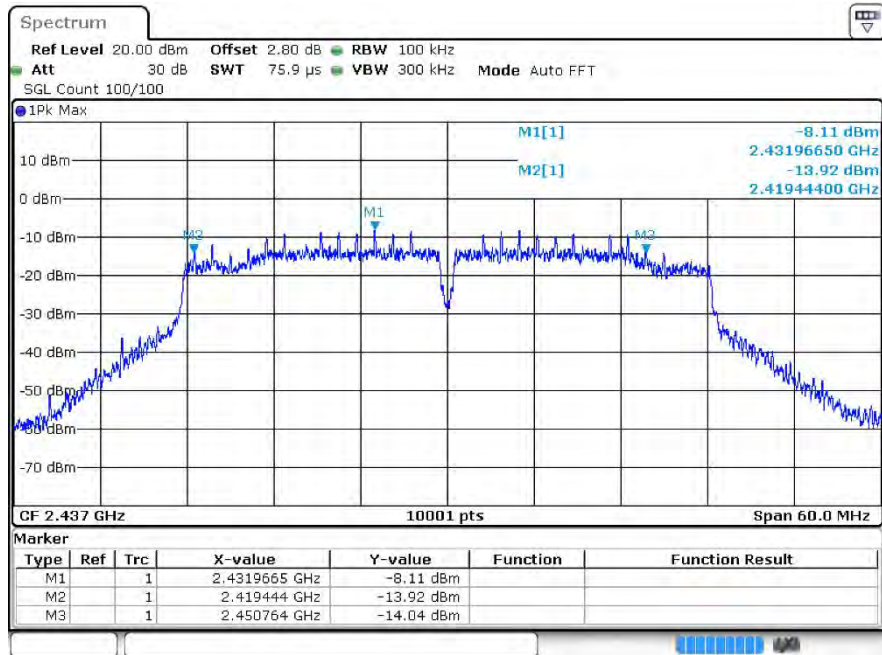


ax40 2452MHz Ant0

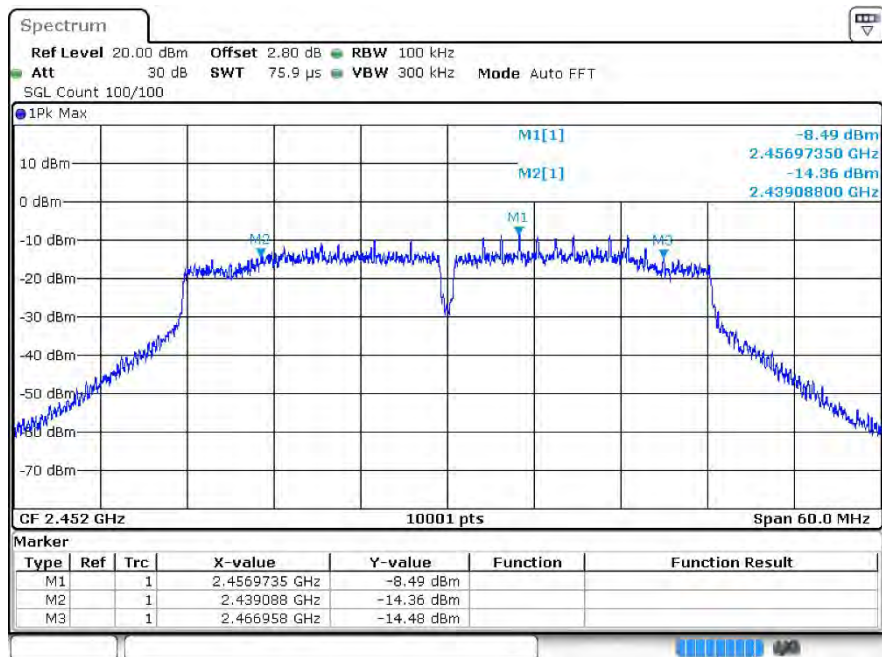


b 2412MHz Ant1

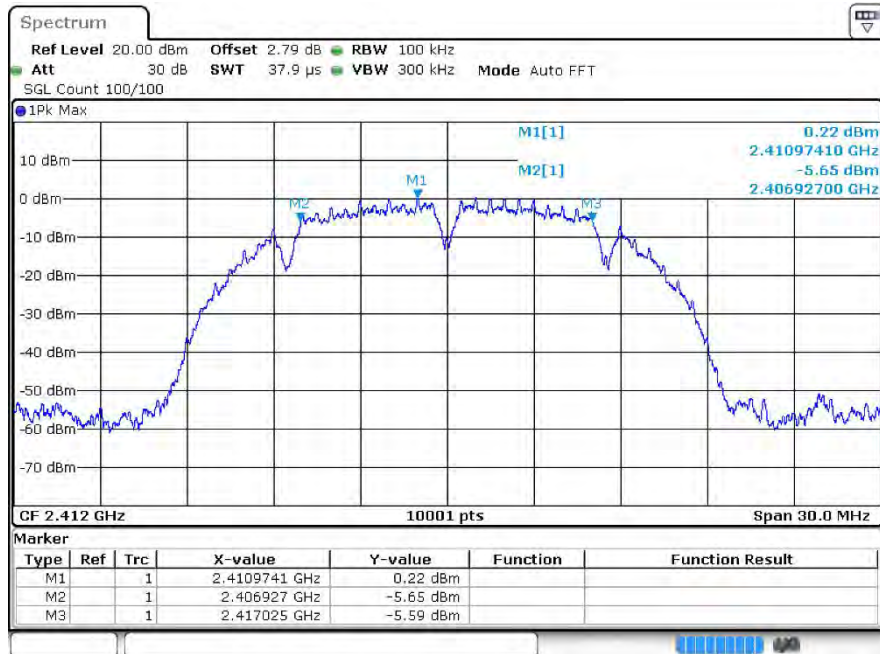


b 2437MHz Ant1

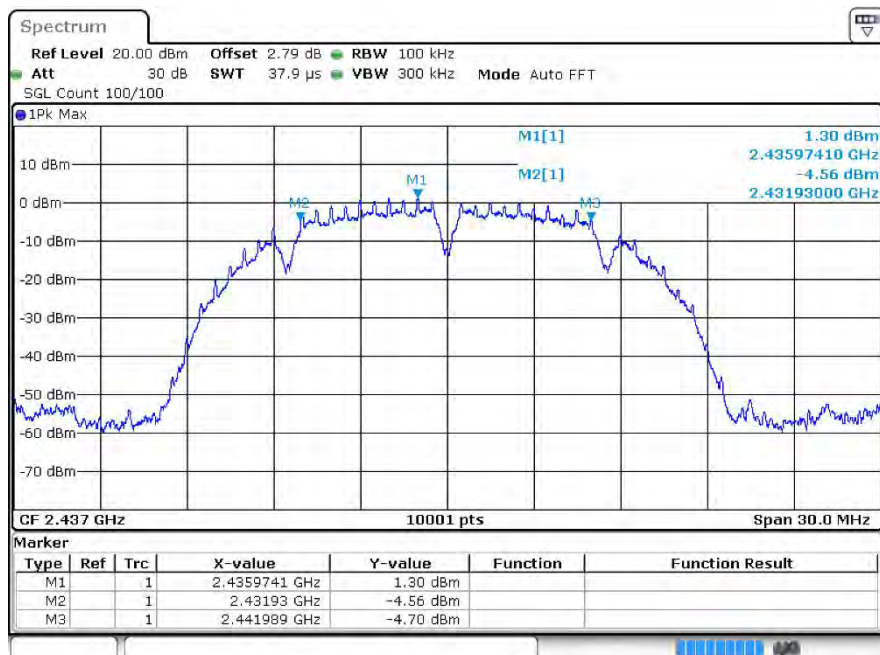


b 2462MHz Ant1

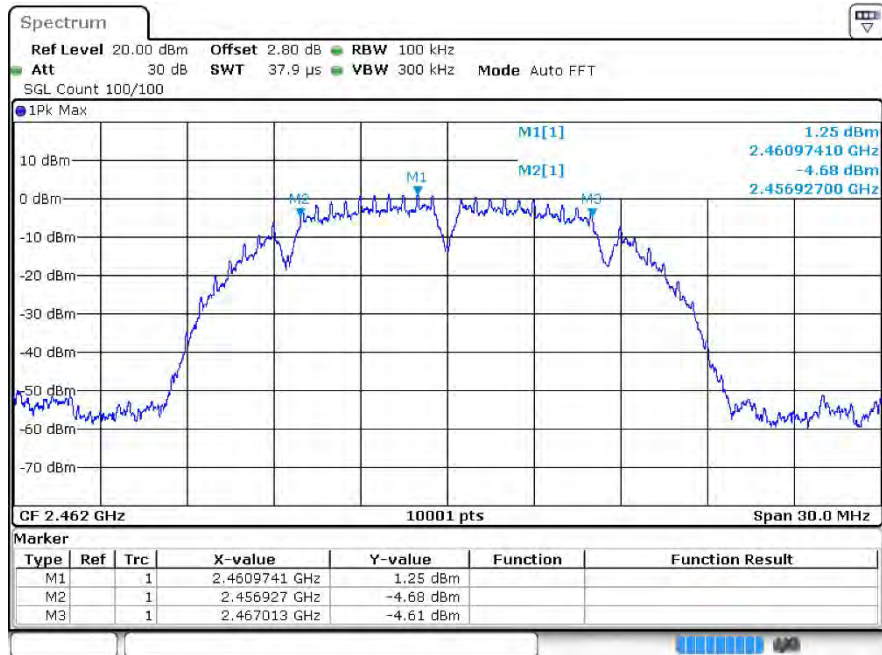


g 2412MHz Ant1

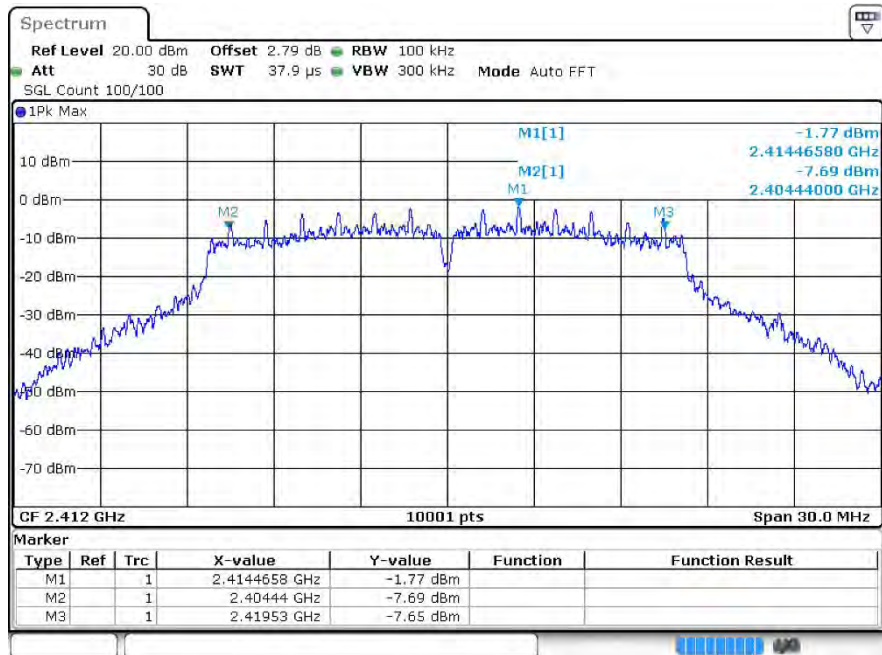


g 2437MHz Ant1

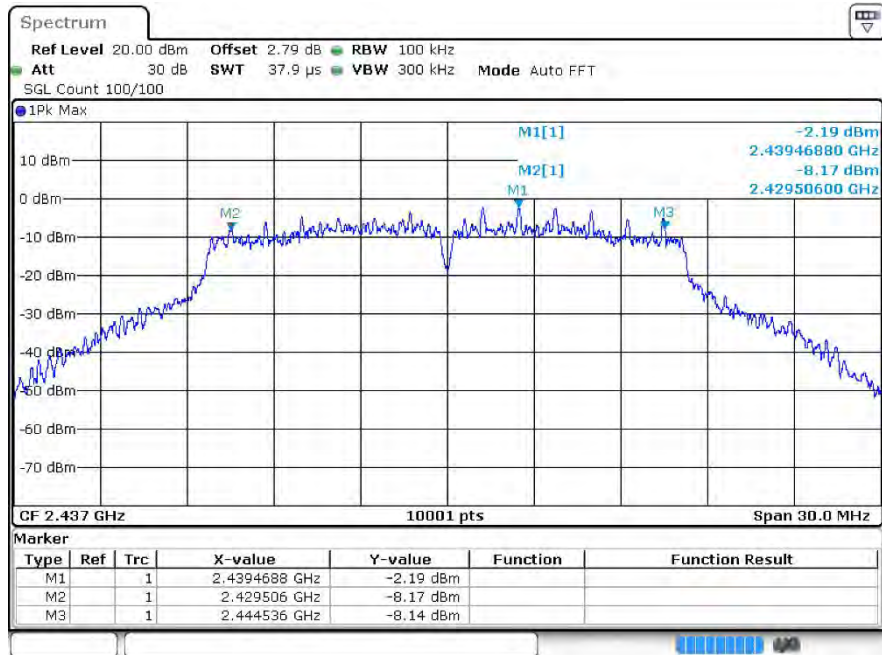


g 2462MHz Ant1

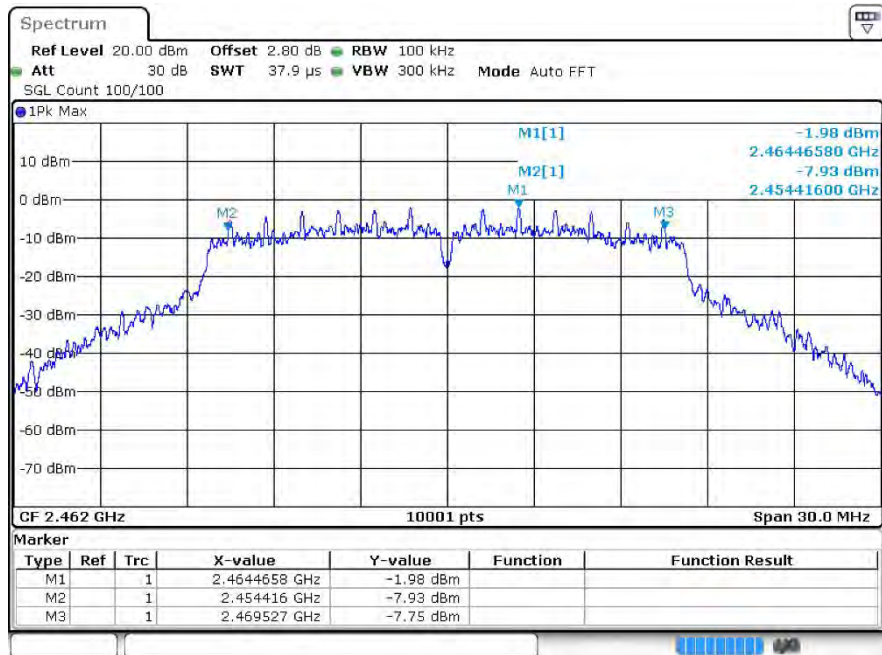


n20 2412MHz Ant1

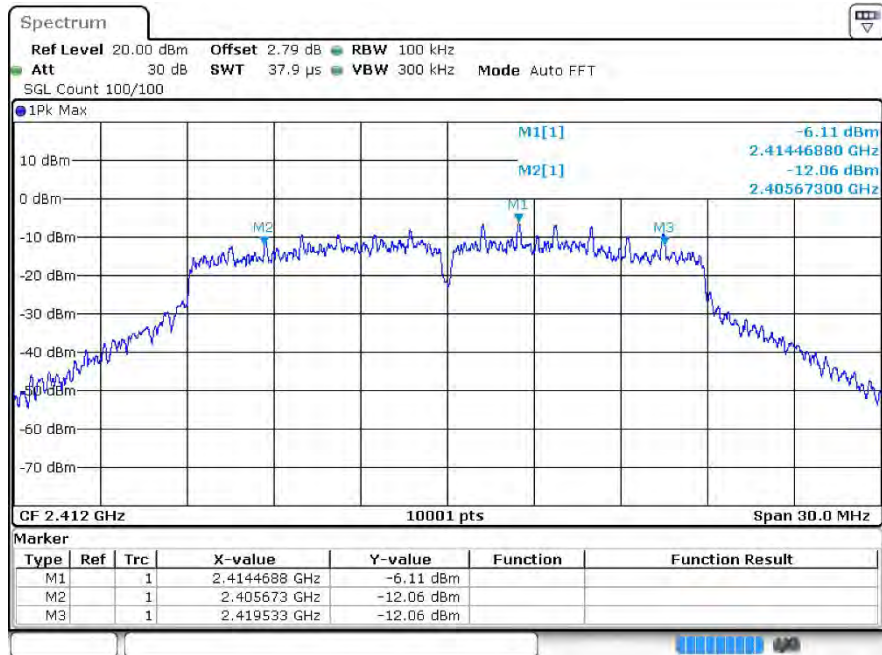


n20 2437MHz Ant1

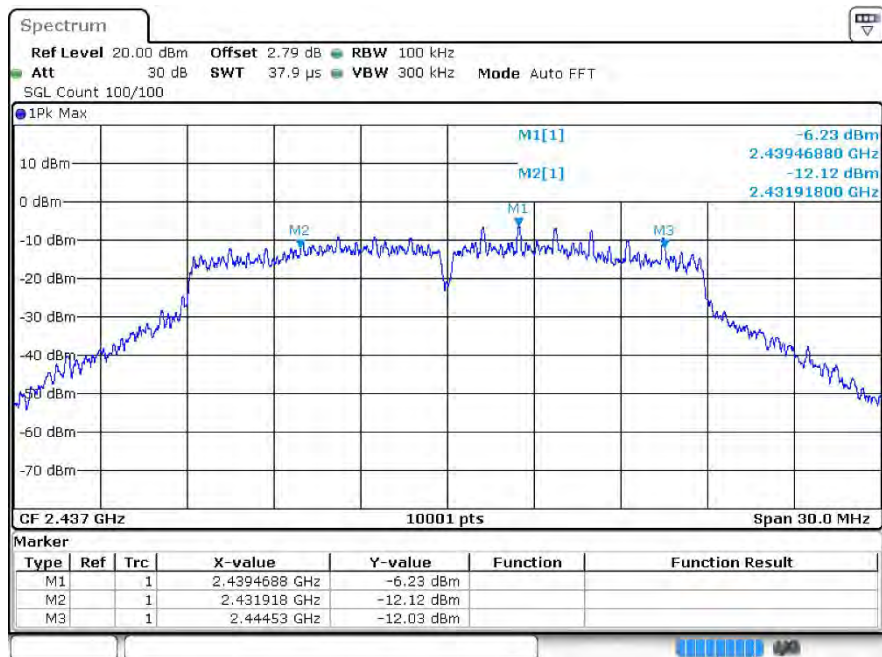


n20 2462MHz Ant1

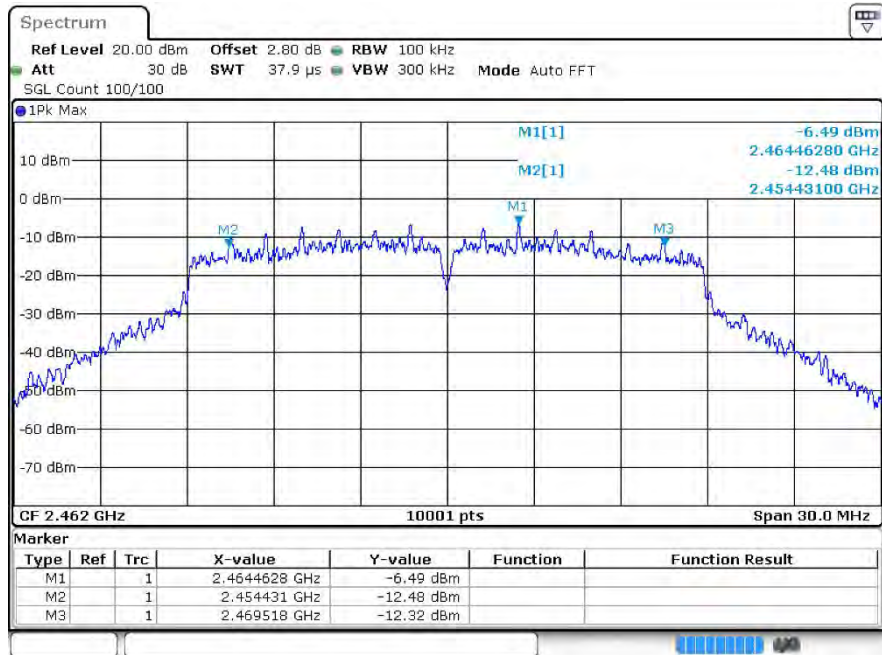


n40 2422MHz Ant1

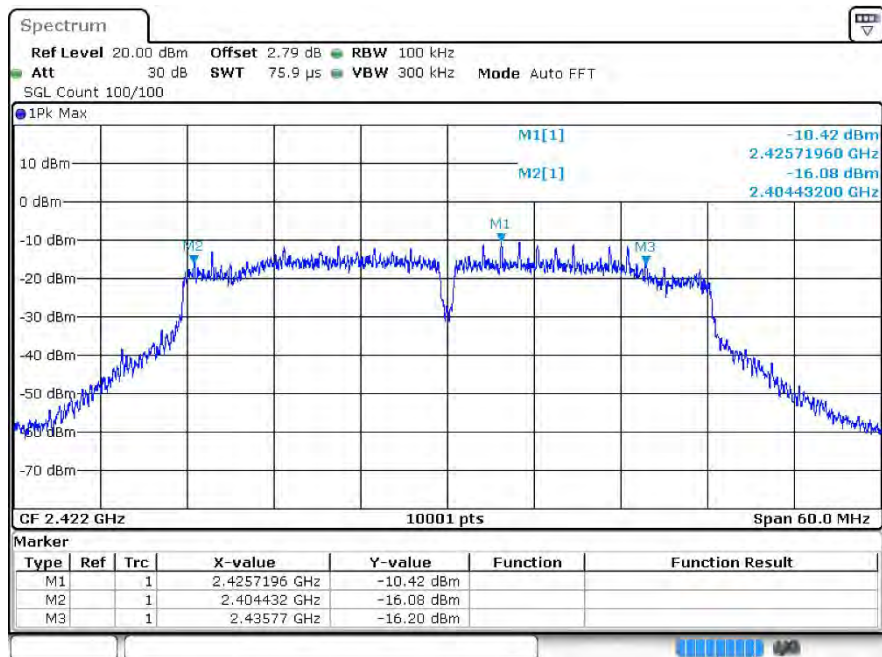


n40 2437MHz Ant1

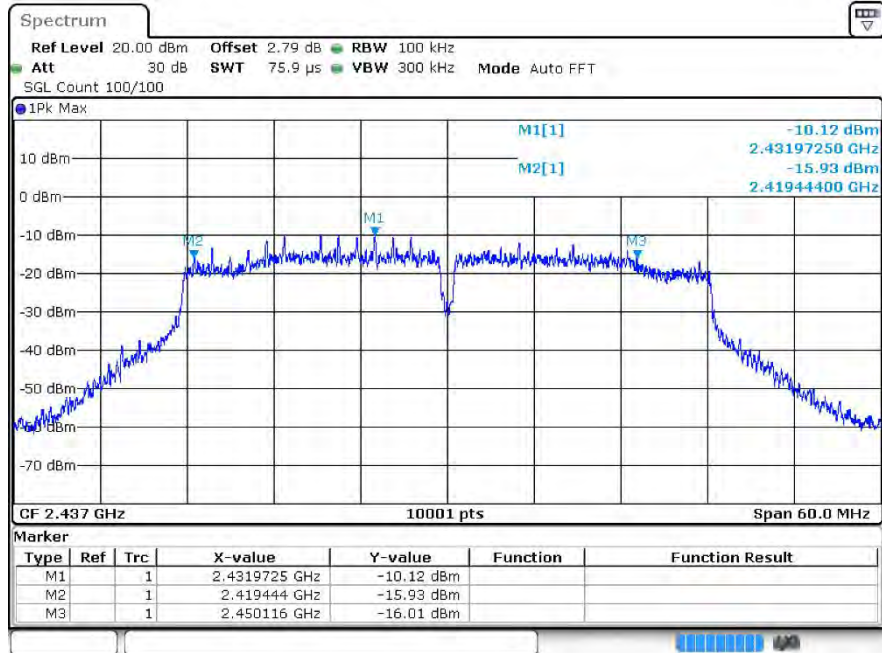


n40 2452MHz Ant1

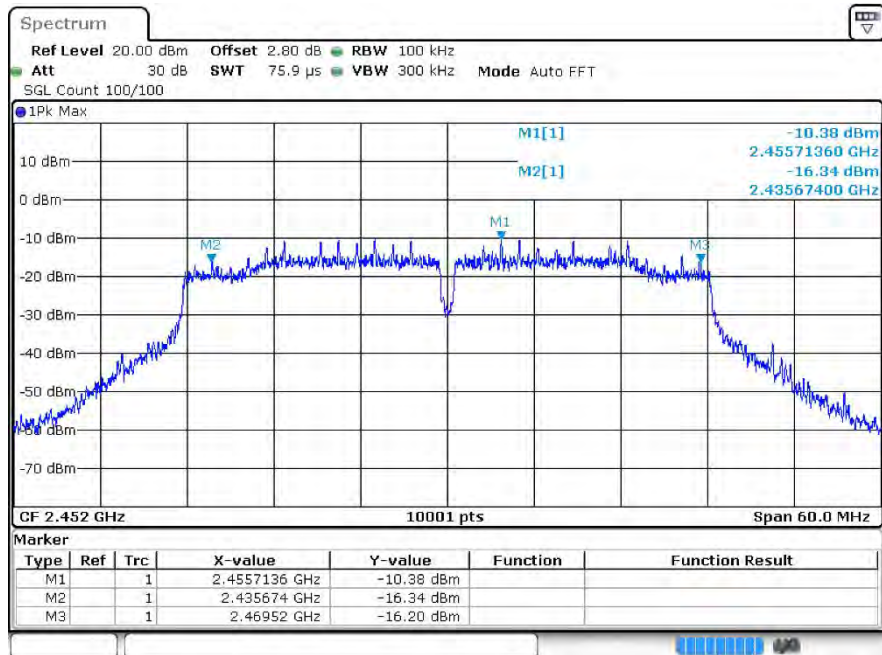


ax20 2412MHz Ant1

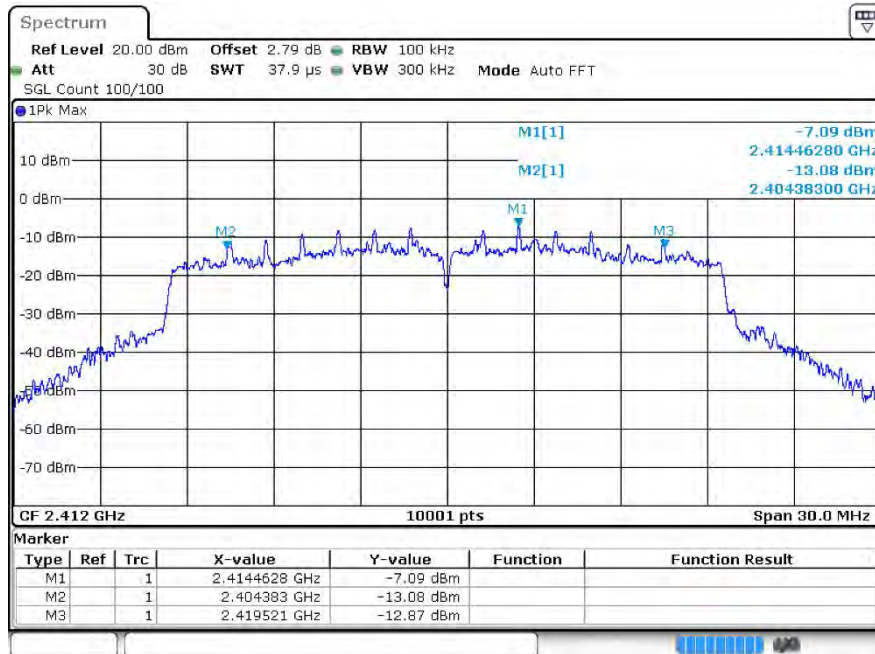


ax20 2437MHz Ant1

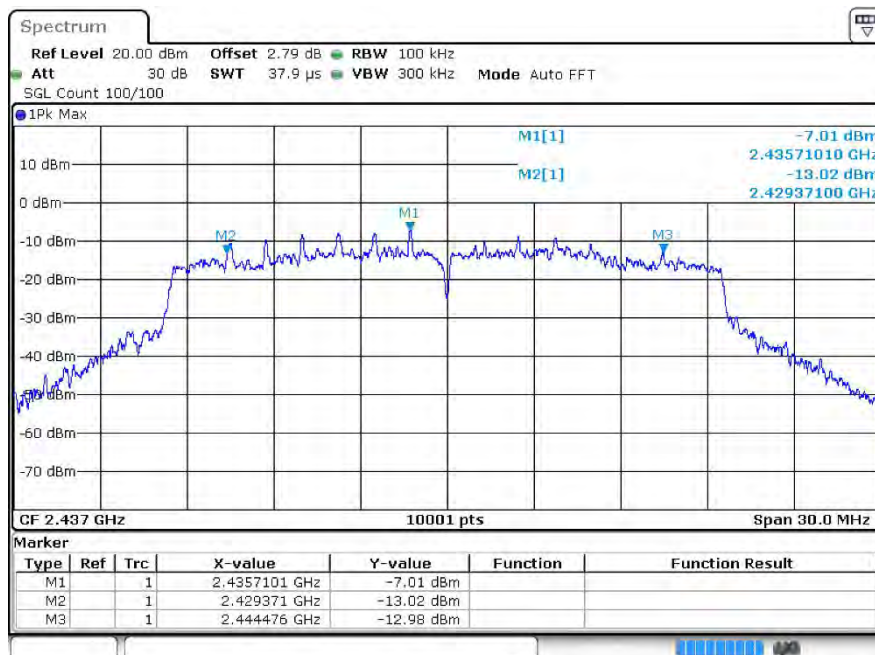


ax20 2462MHz Ant1

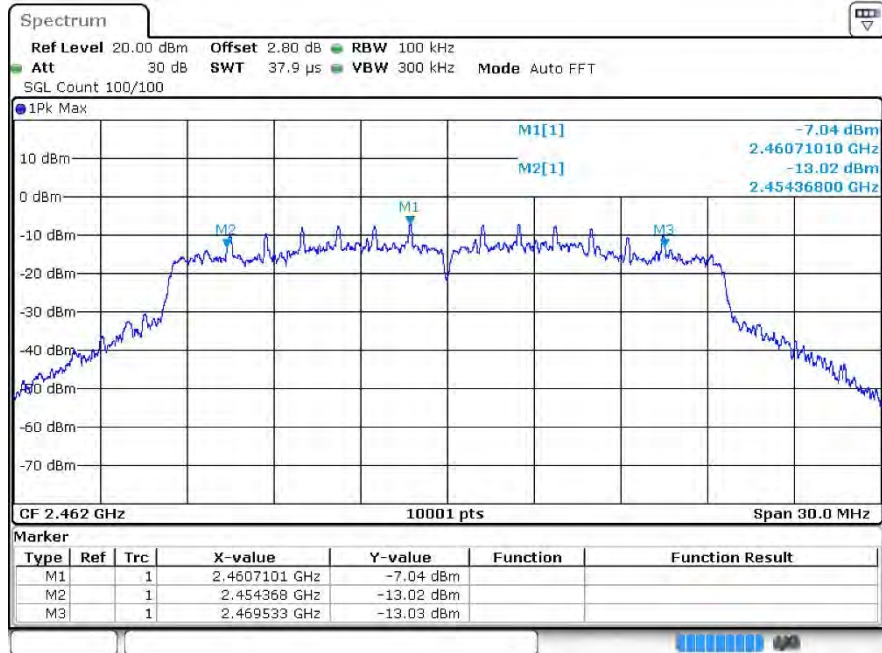


ax40 2422MHz Ant1

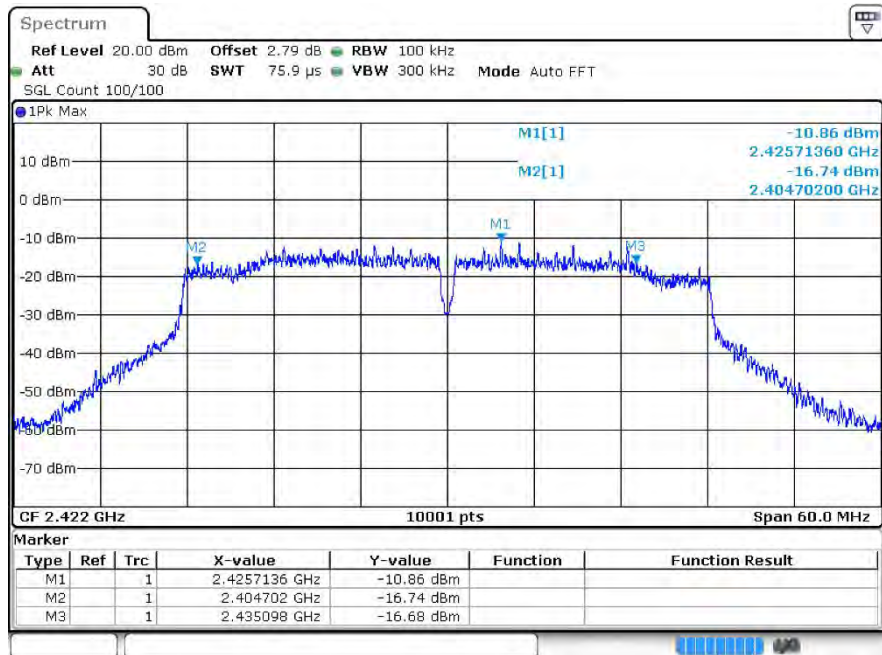

ax40 2437MHz Ant1

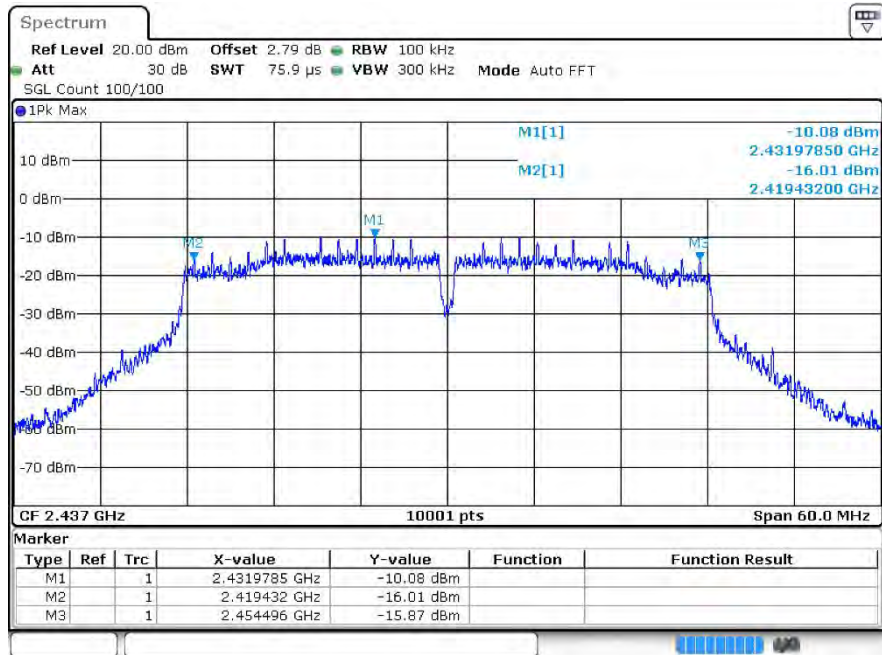

ax40 2452MHz Ant1

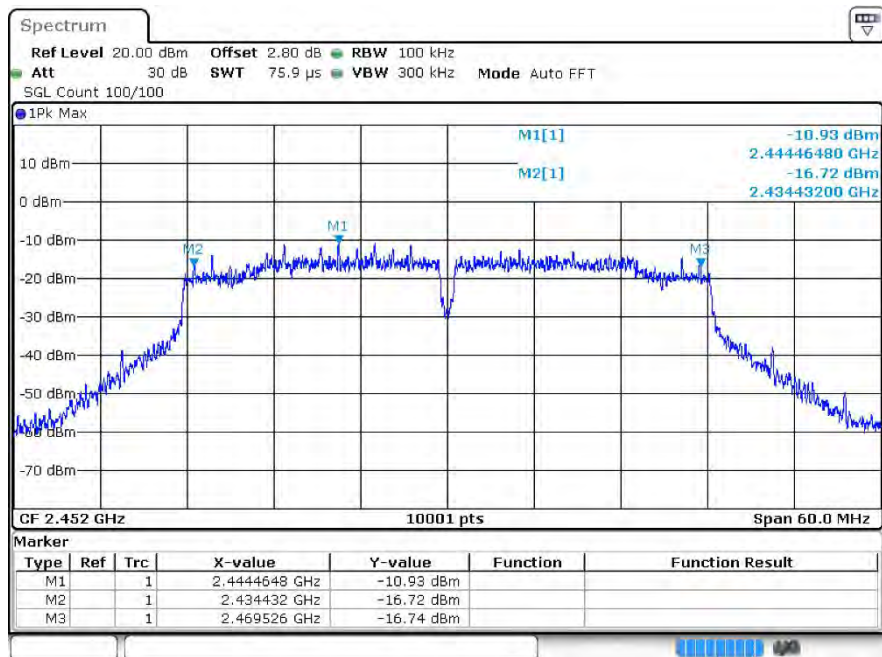

4 Maximum Power Spectral Density Level

4.1 Test Result

Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3-100kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant0	-11.56	≤8	Pass
b	2437	Ant0	-11.65	≤8	Pass
b	2462	Ant0	-11.65	≤8	Pass
g	2412	Ant0	-15.95	≤8	Pass
g	2437	Ant0	-15.07	≤8	Pass
g	2462	Ant0	-15.7	≤8	Pass
n20	2412	Ant0	-17.79	≤8	Pass
n20	2437	Ant0	-18.5	≤8	Pass
n20	2462	Ant0	-18.05	≤8	Pass
n40	2422	Ant0	-23.25	≤8	Pass
n40	2437	Ant0	-21.51	≤8	Pass
n40	2452	Ant0	-22.08	≤8	Pass
ax20	2412	Ant0	-5.41	≤8	Pass
ax20	2437	Ant0	-5.44	≤8	Pass
ax20	2462	Ant0	-5.49	≤8	Pass
ax40	2422	Ant0	-8.82	≤8	Pass
ax40	2437	Ant0	-9.04	≤8	Pass
ax40	2452	Ant0	-8.66	≤8	Pass
b	2412	Ant1	-12.67	≤8	Pass
b	2437	Ant1	-12.63	≤8	Pass
b	2462	Ant1	-12.46	≤8	Pass
g	2412	Ant1	-16.69	≤8	Pass
g	2437	Ant1	-17.4	≤8	Pass
g	2462	Ant1	-16.19	≤8	Pass
n20	2412	Ant1	-20.47	≤8	Pass
n20	2437	Ant1	-20.75	≤8	Pass
n20	2462	Ant1	-20.8	≤8	Pass
n40	2422	Ant1	-23.65	≤8	Pass
n40	2437	Ant1	-23.87	≤8	Pass
n40	2452	Ant1	-24.74	≤8	Pass
ax20	2412	Ant1	-7.33	≤8	Pass
ax20	2437	Ant1	-8.12	≤8	Pass
ax20	2462	Ant1	-7.08	≤8	Pass



ax40	2422	Ant1	-9.79	≤ 8	Pass
ax40	2437	Ant1	-10.21	≤ 8	Pass
ax40	2452	Ant1	-10.39	≤ 8	Pass
n20	2412	Sum	-2.38	≤ 5.36	Pass
n20	2437	Sum	-2.48	≤ 5.36	Pass
n20	2462	Sum	-2.64	≤ 5.36	Pass
n40	2422	Sum	-6.61	≤ 5.36	Pass
n40	2437	Sum	-6.41	≤ 5.36	Pass
n40	2452	Sum	-7.31	≤ 5.36	Pass
ax20	2412	Sum	-3.17	≤ 5.36	Pass
ax20	2437	Sum	-3.79	≤ 5.36	Pass
ax20	2462	Sum	-3.36	≤ 5.36	Pass
ax40	2422	Sum	-5.99	≤ 5.36	Pass
ax40	2437	Sum	-5.99	≤ 5.36	Pass
ax40	2452	Sum	-6.39	≤ 5.36	Pass


Note:


For MIMO mode:


Directional gain= $10\log[(10^{G1/20}+10^{G2/20})^2/2]$ dBi=8.64dBi


Limit = $8-(8.64-6)=5.36$ dBm for PSD


4.2 Test Graphs

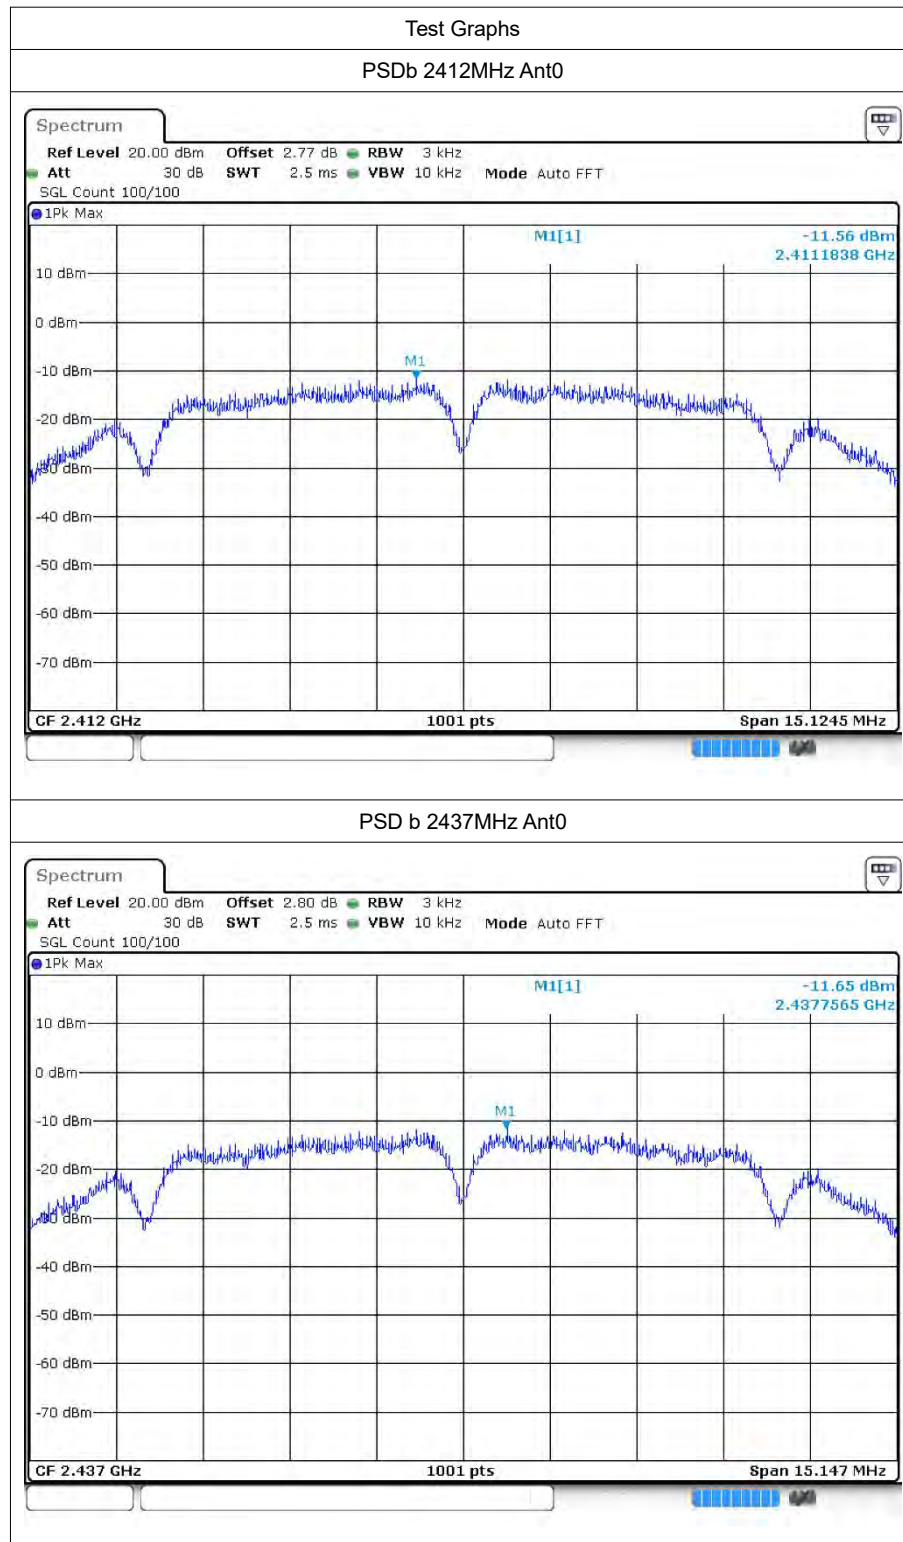


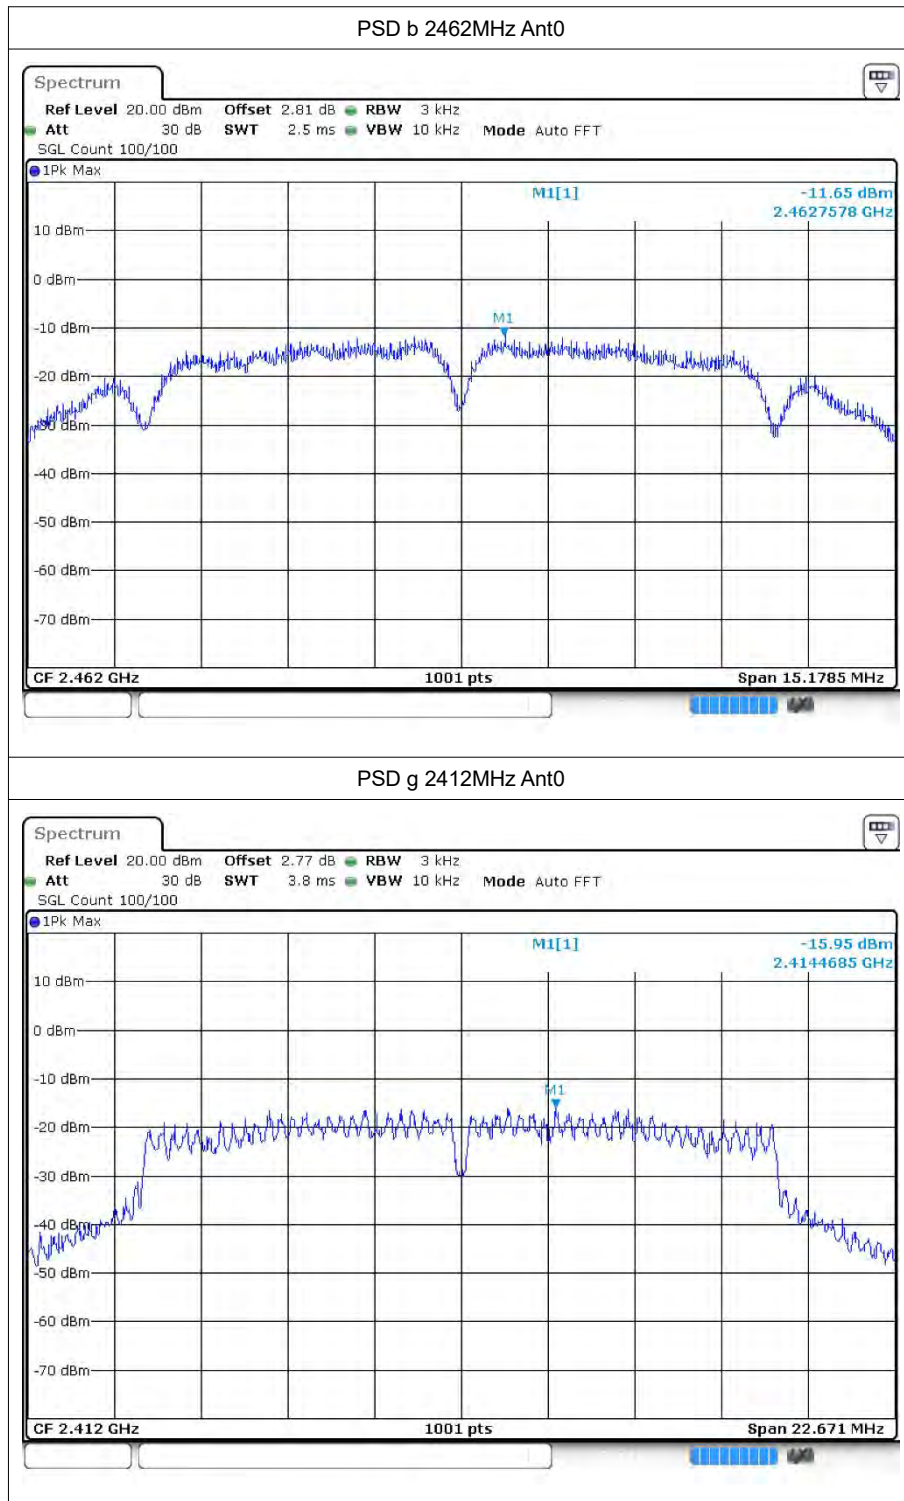

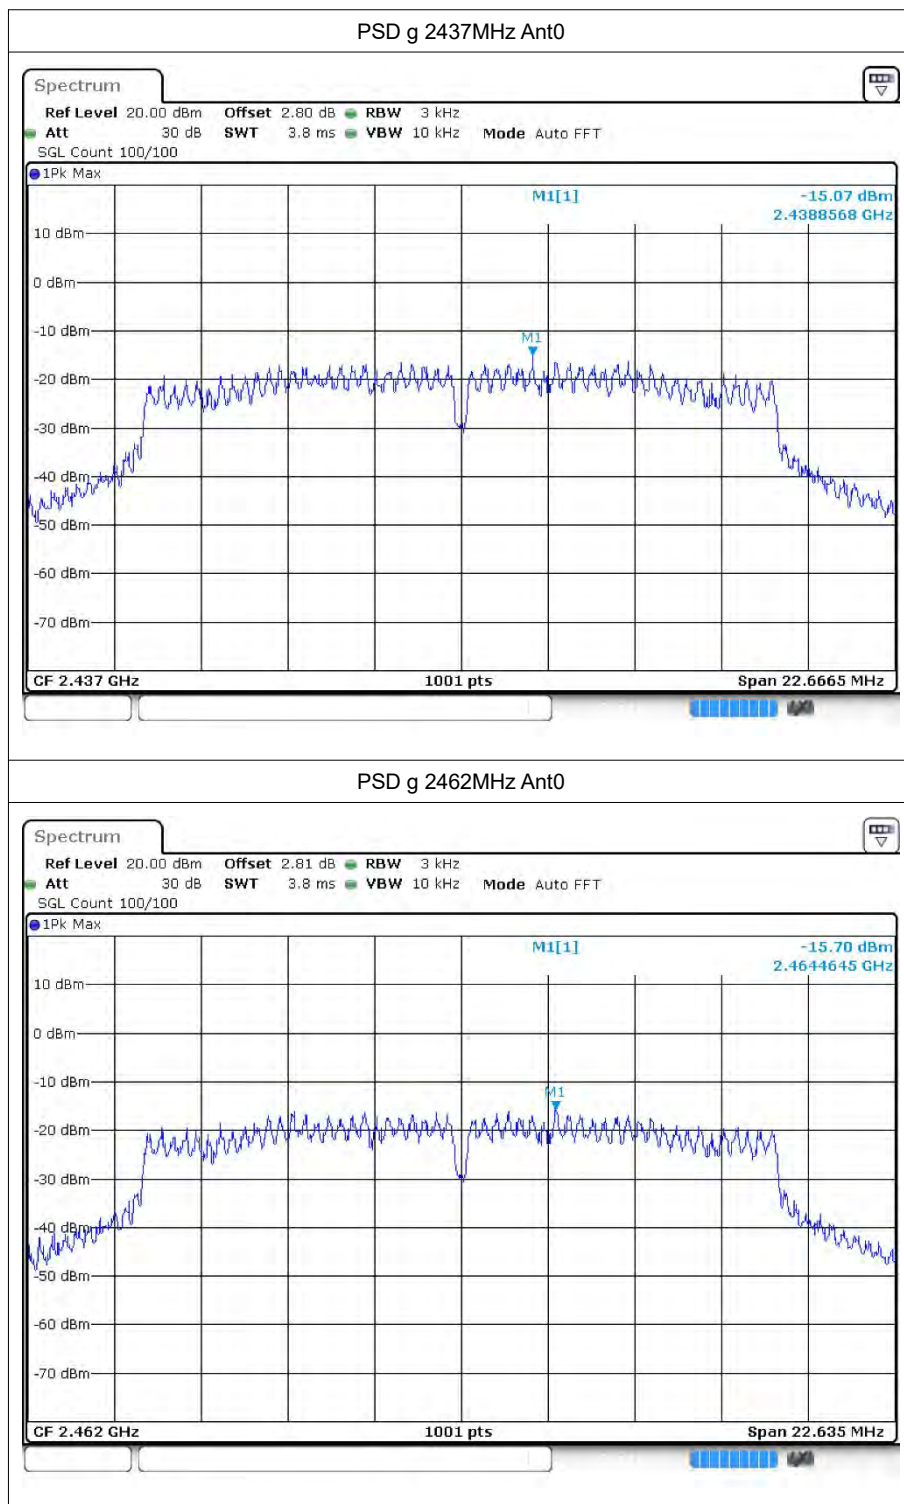


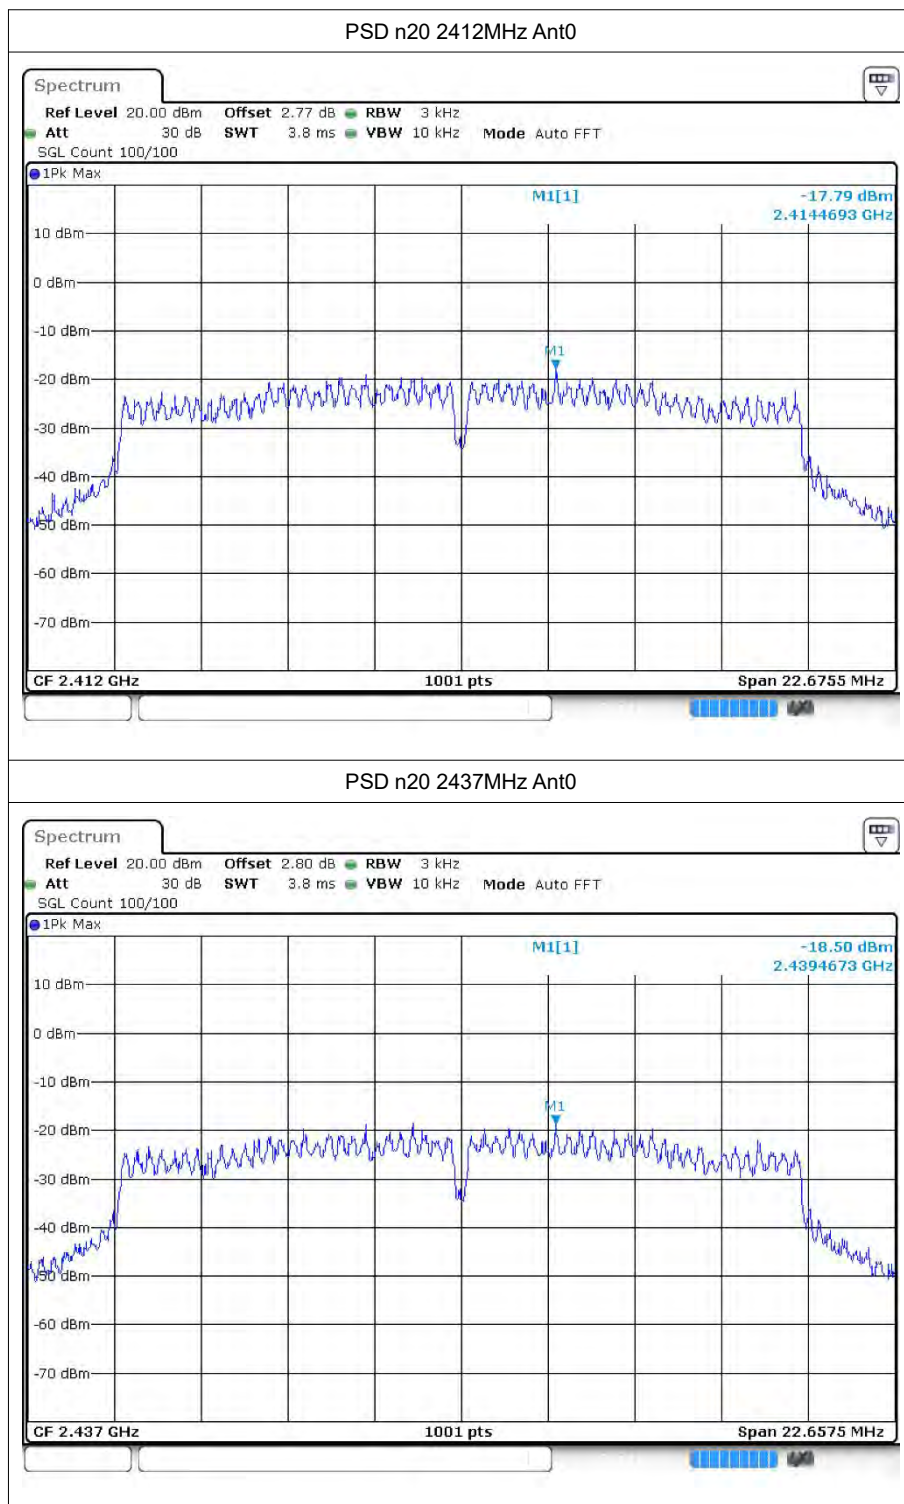

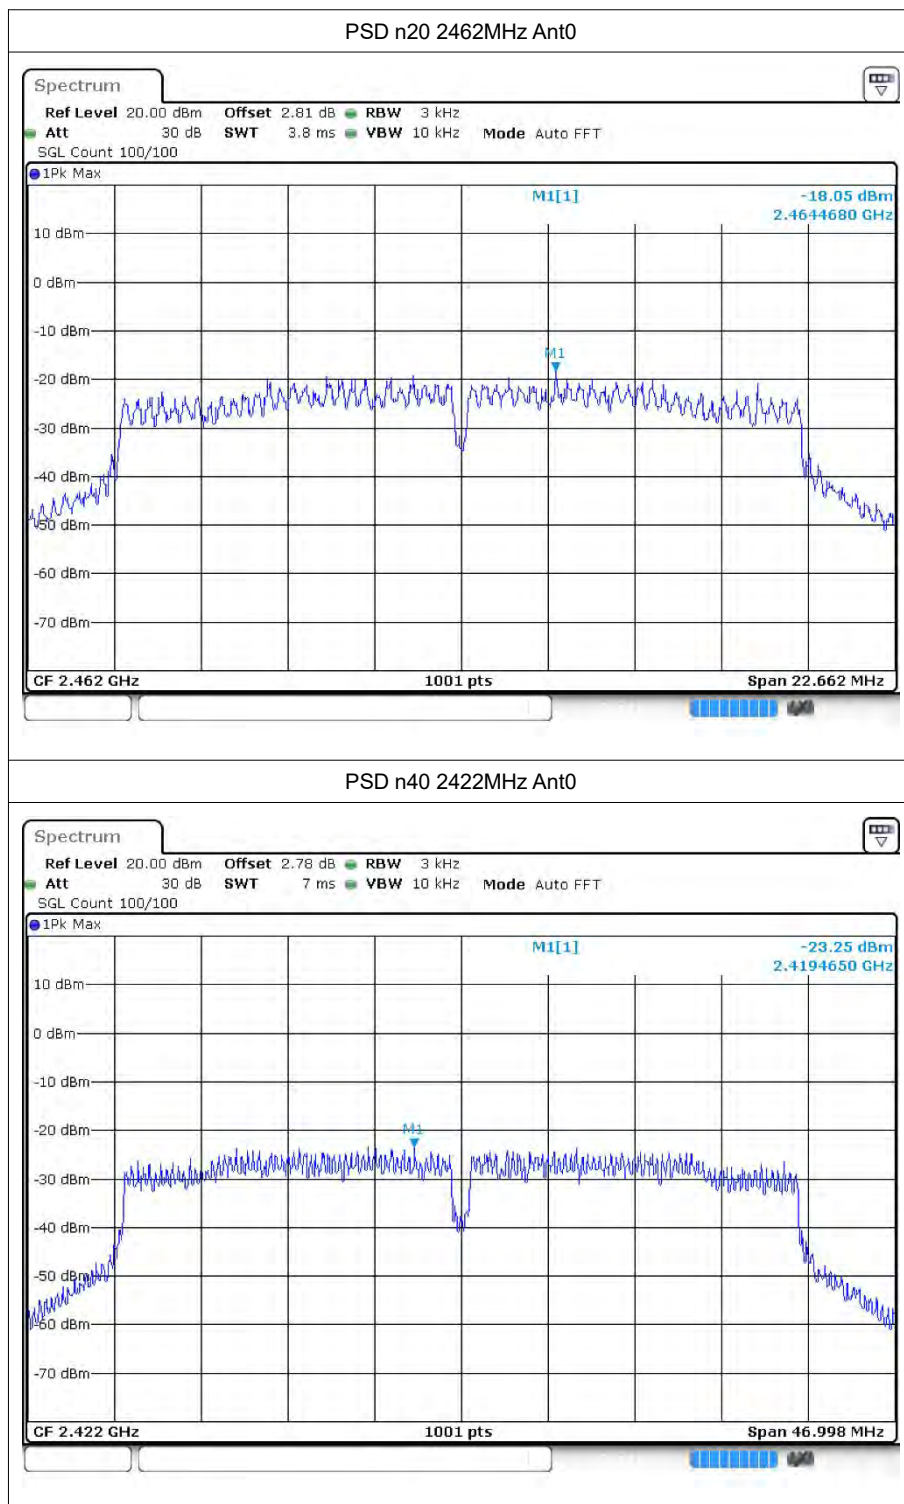


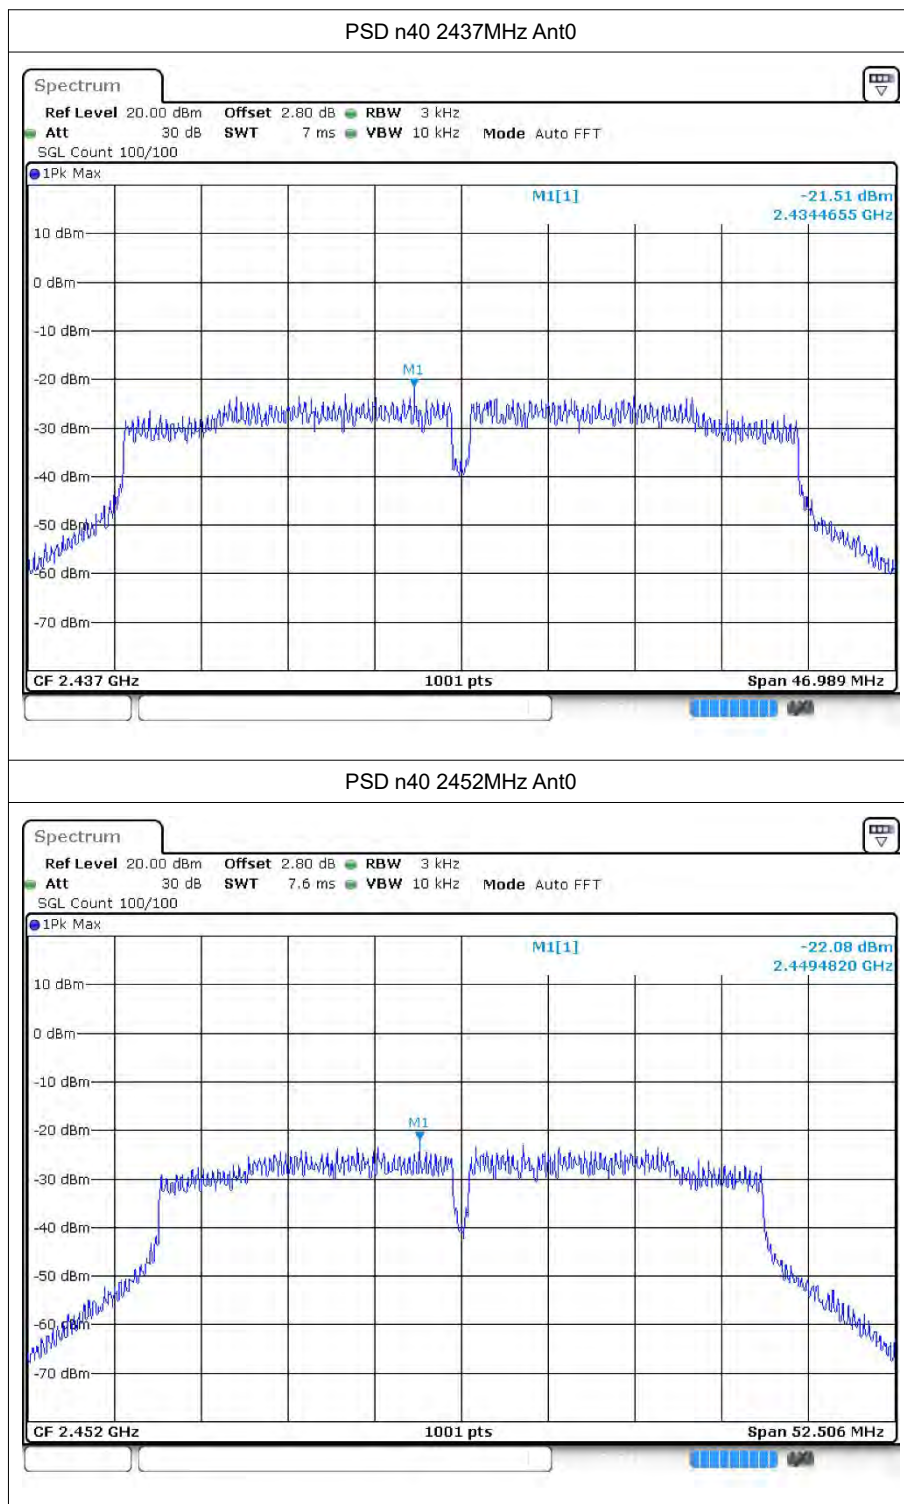



PSD ax20 2412MHz Ant0

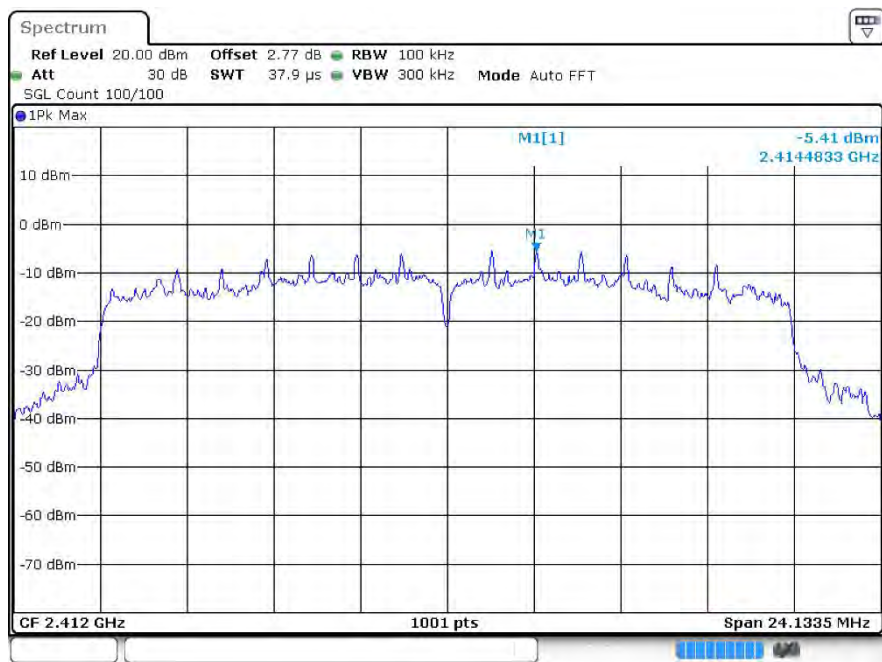



PSD ax20 2437MHz Ant0

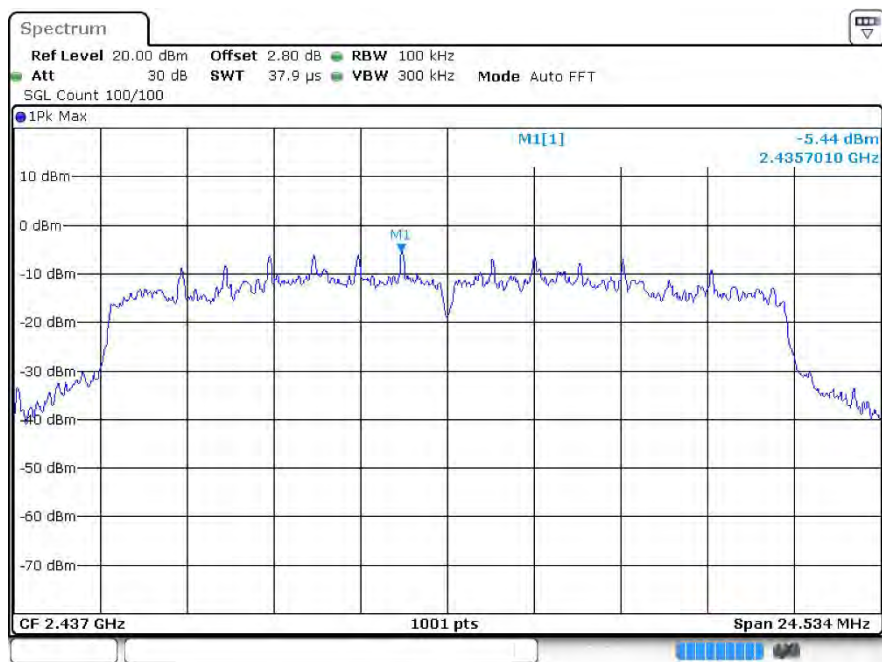


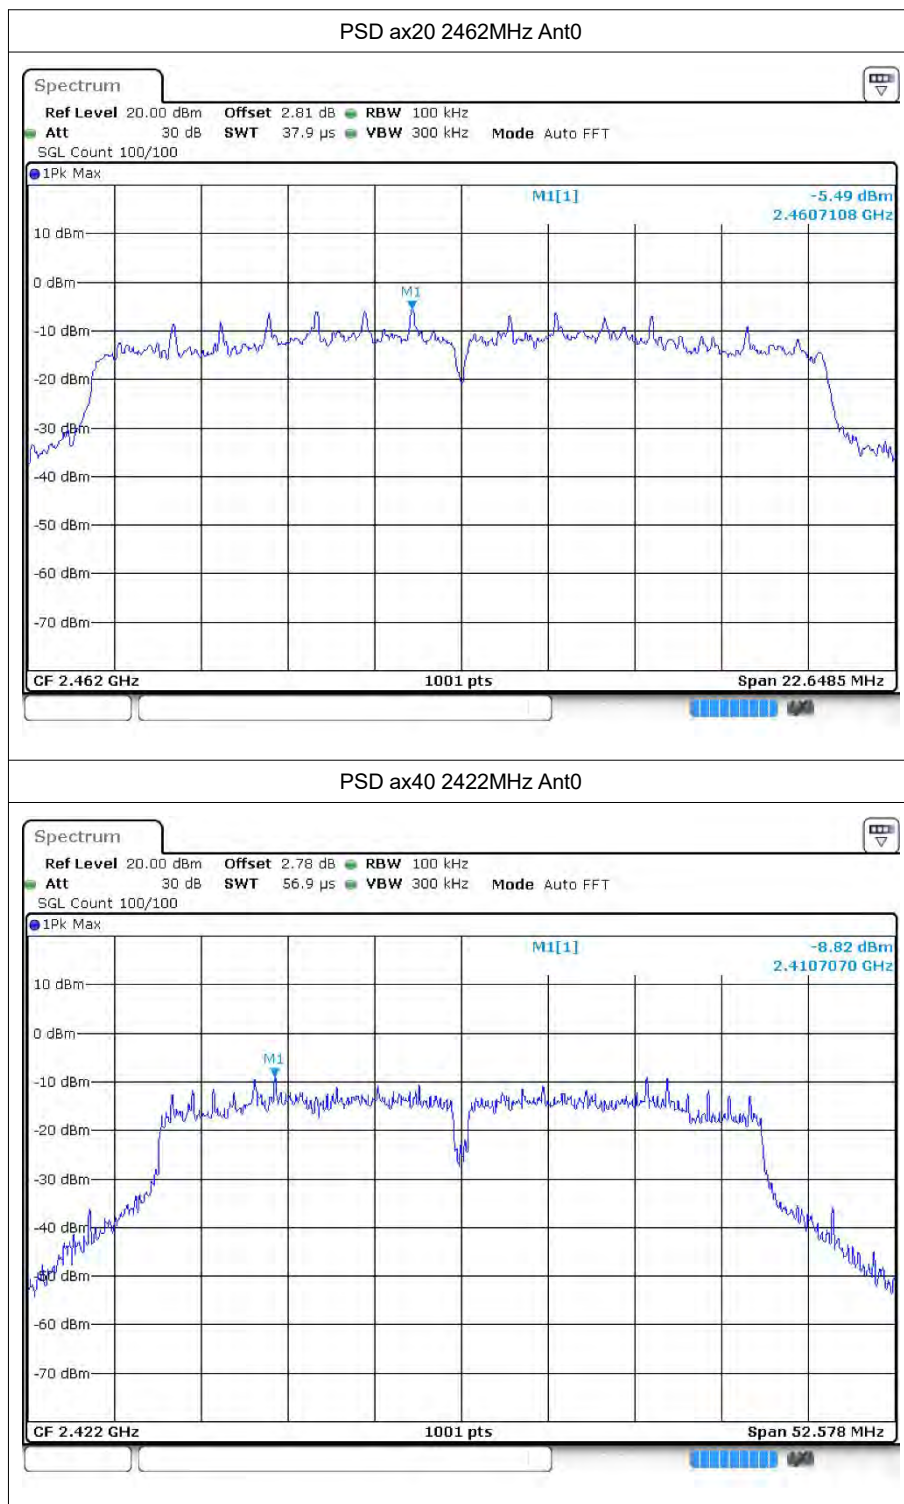


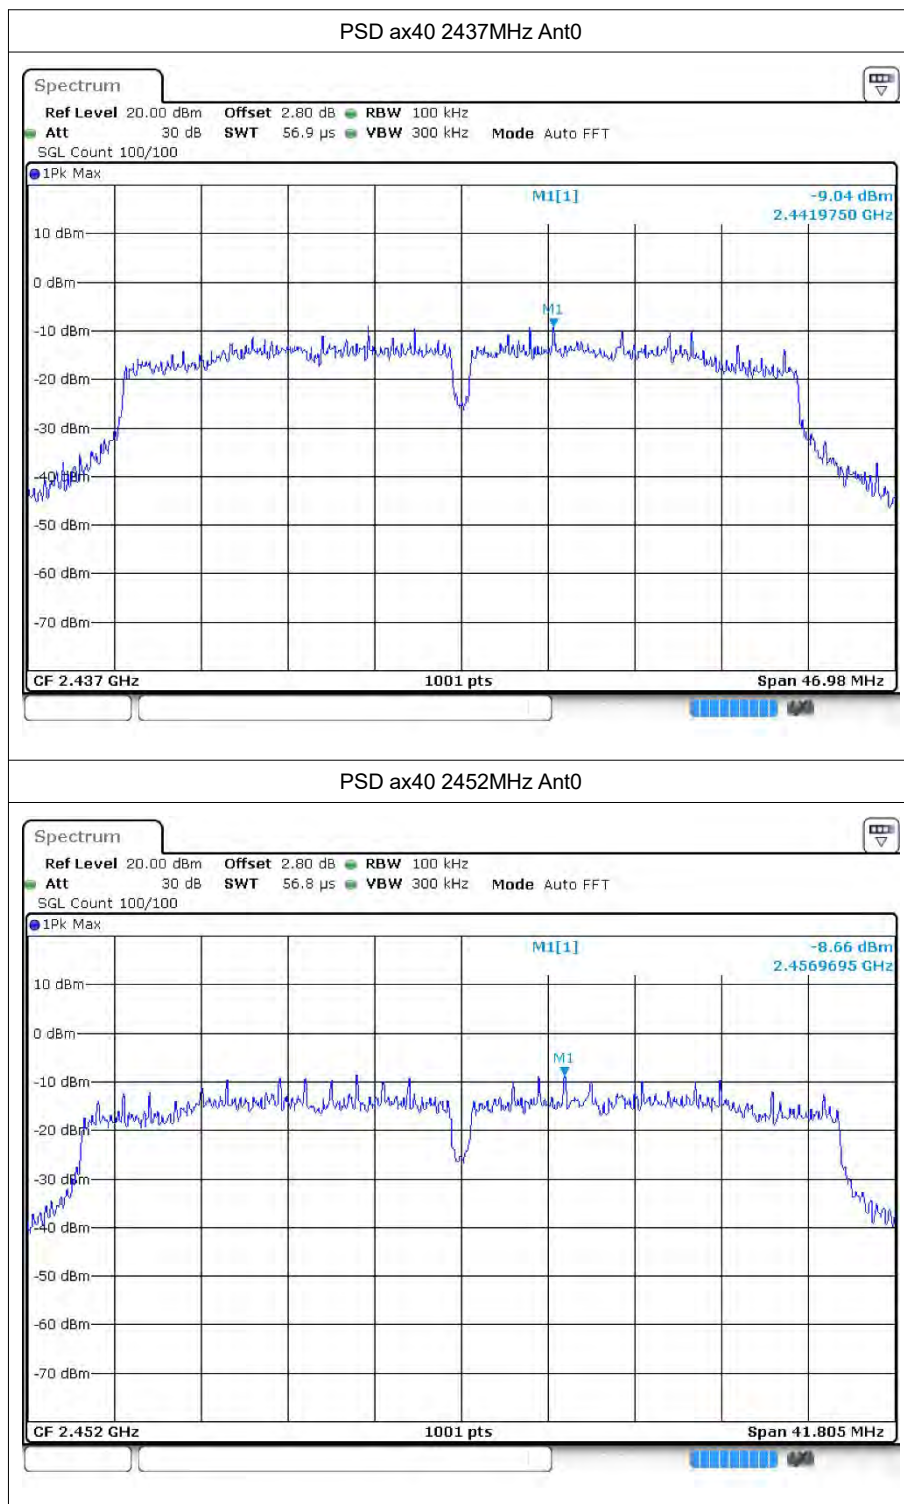


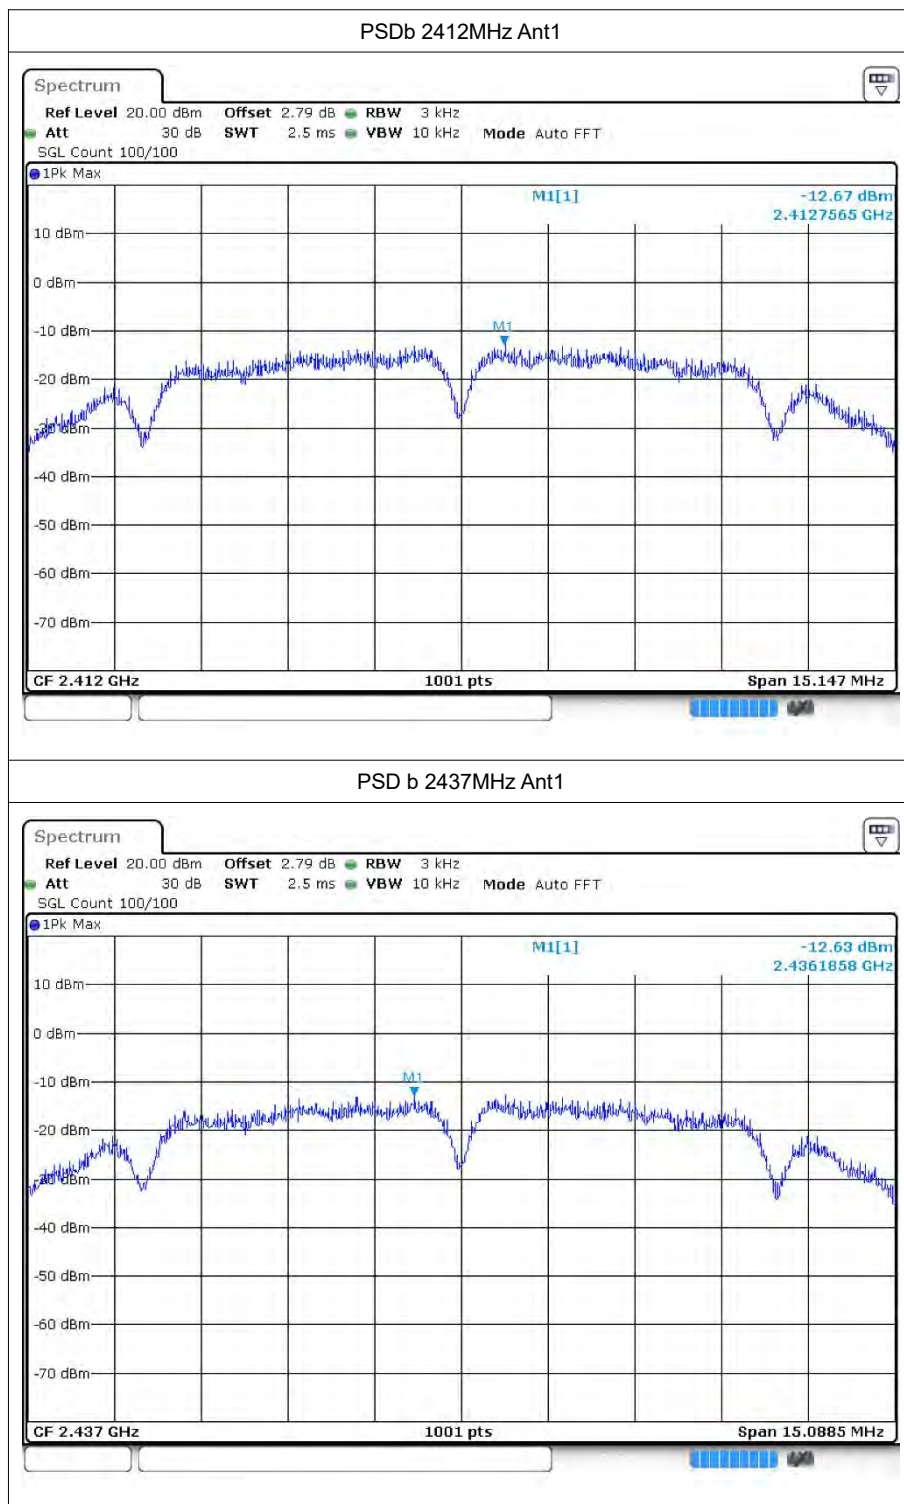


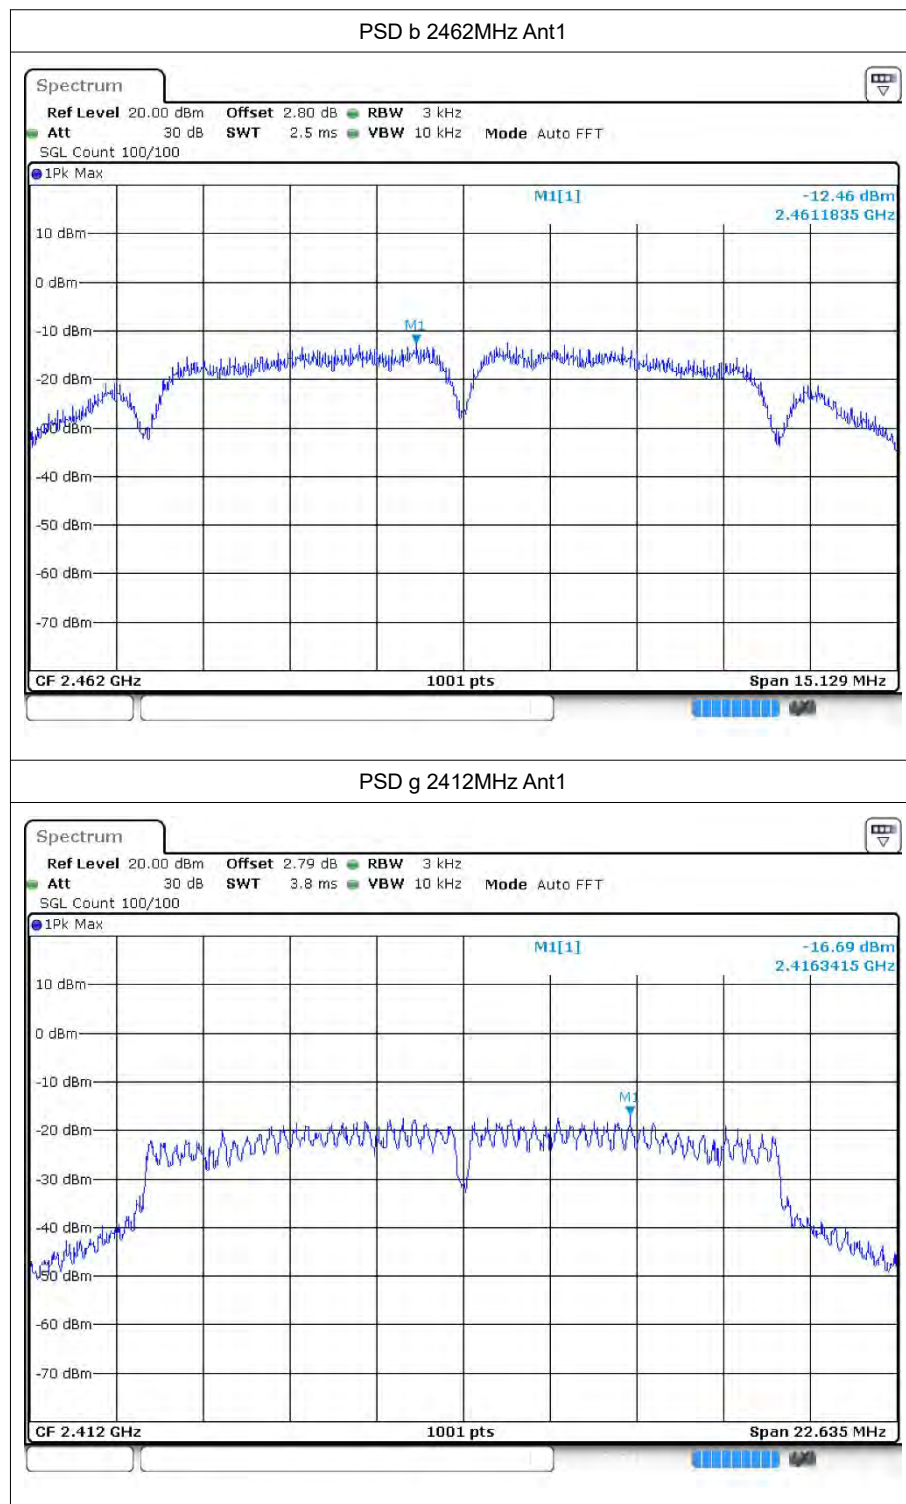

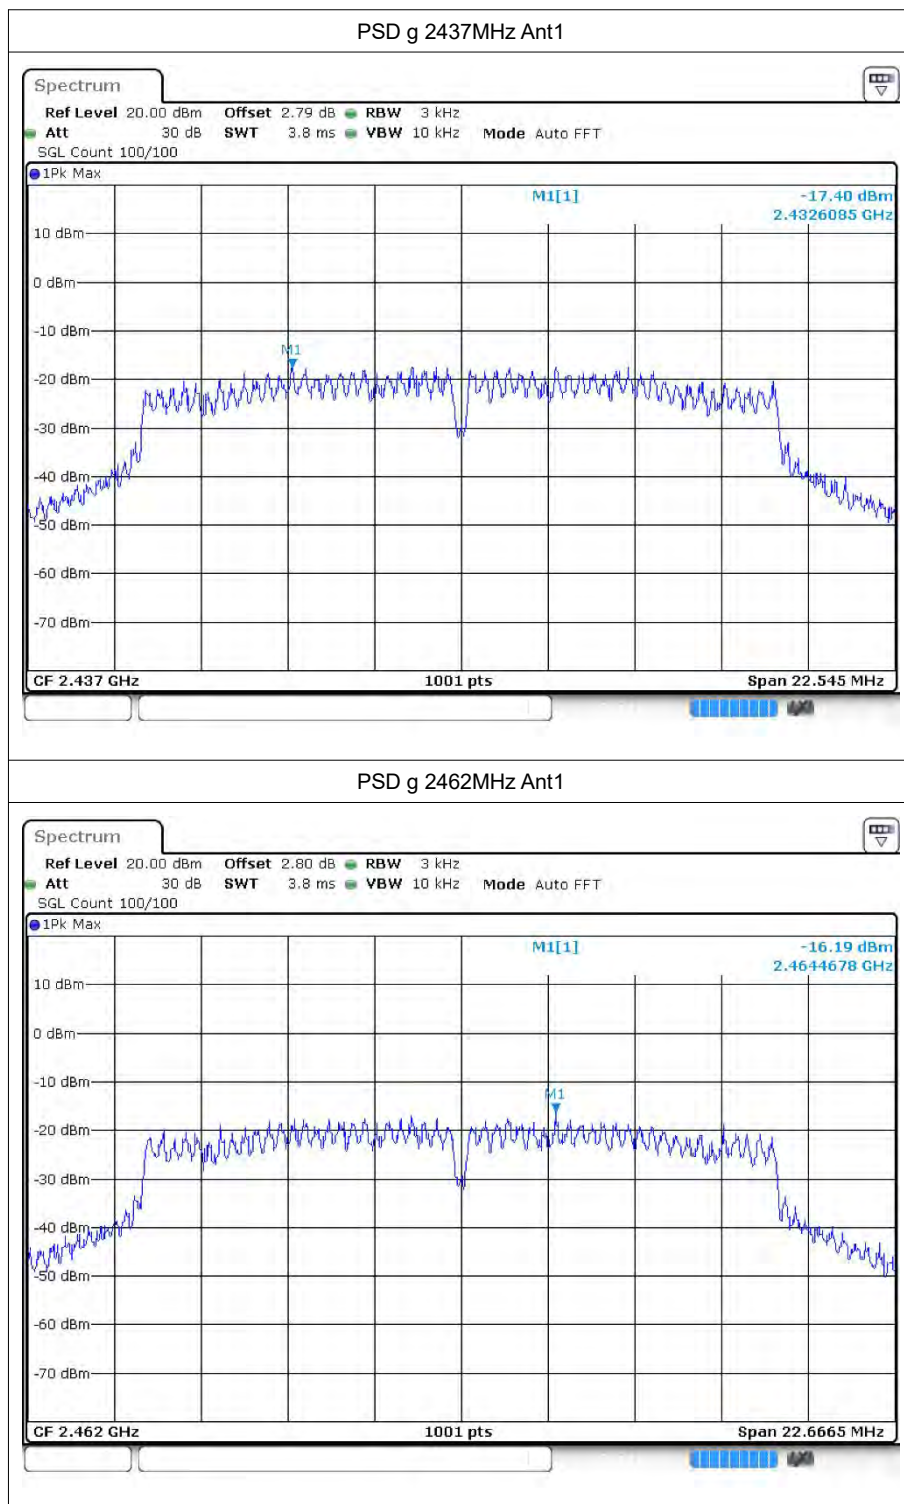


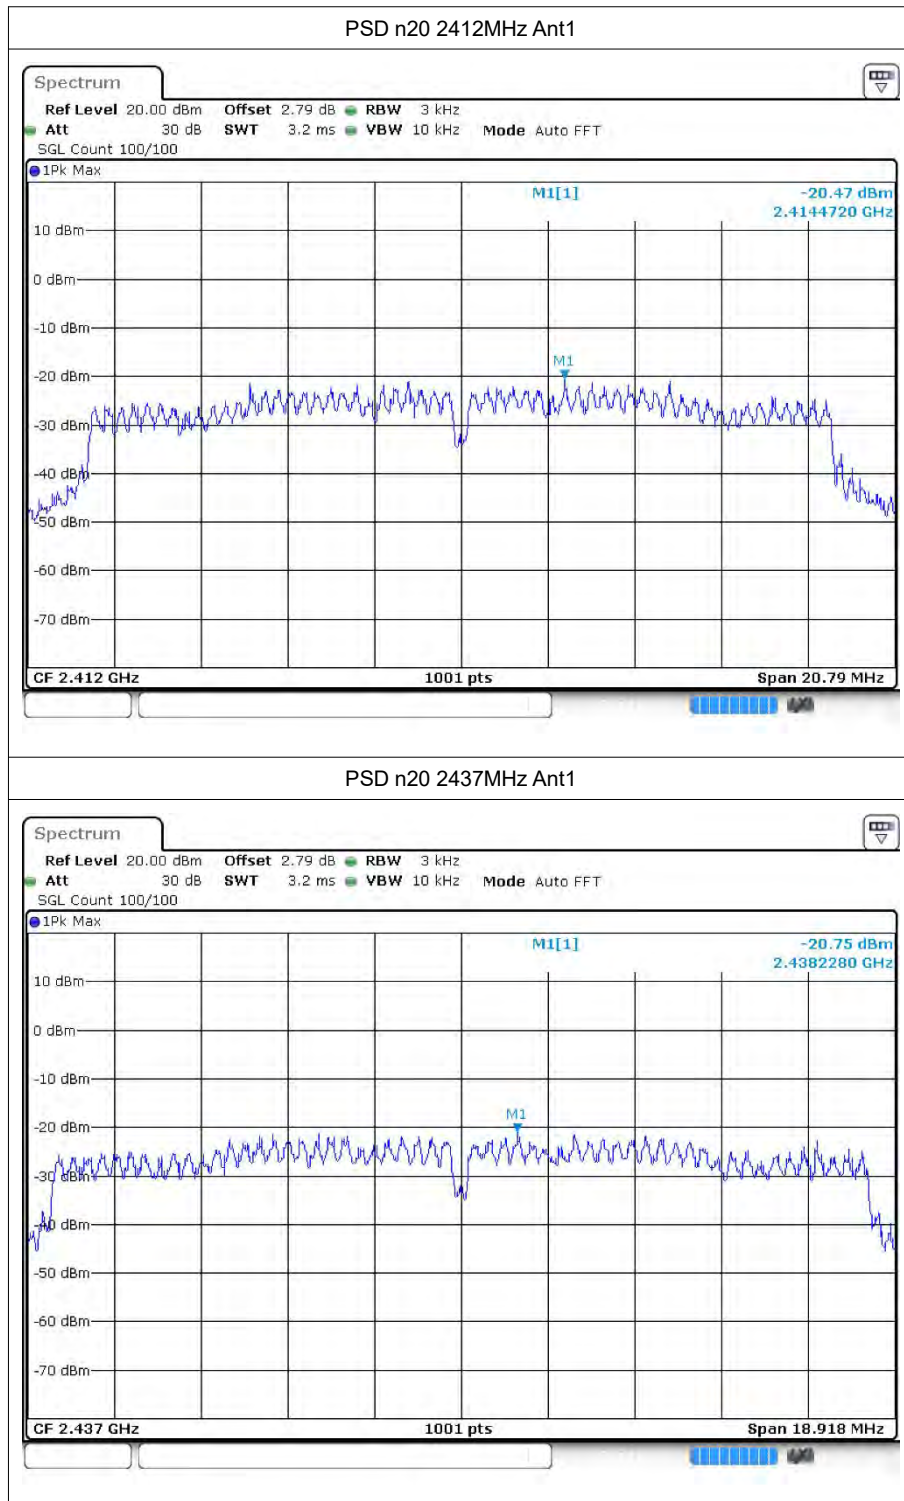

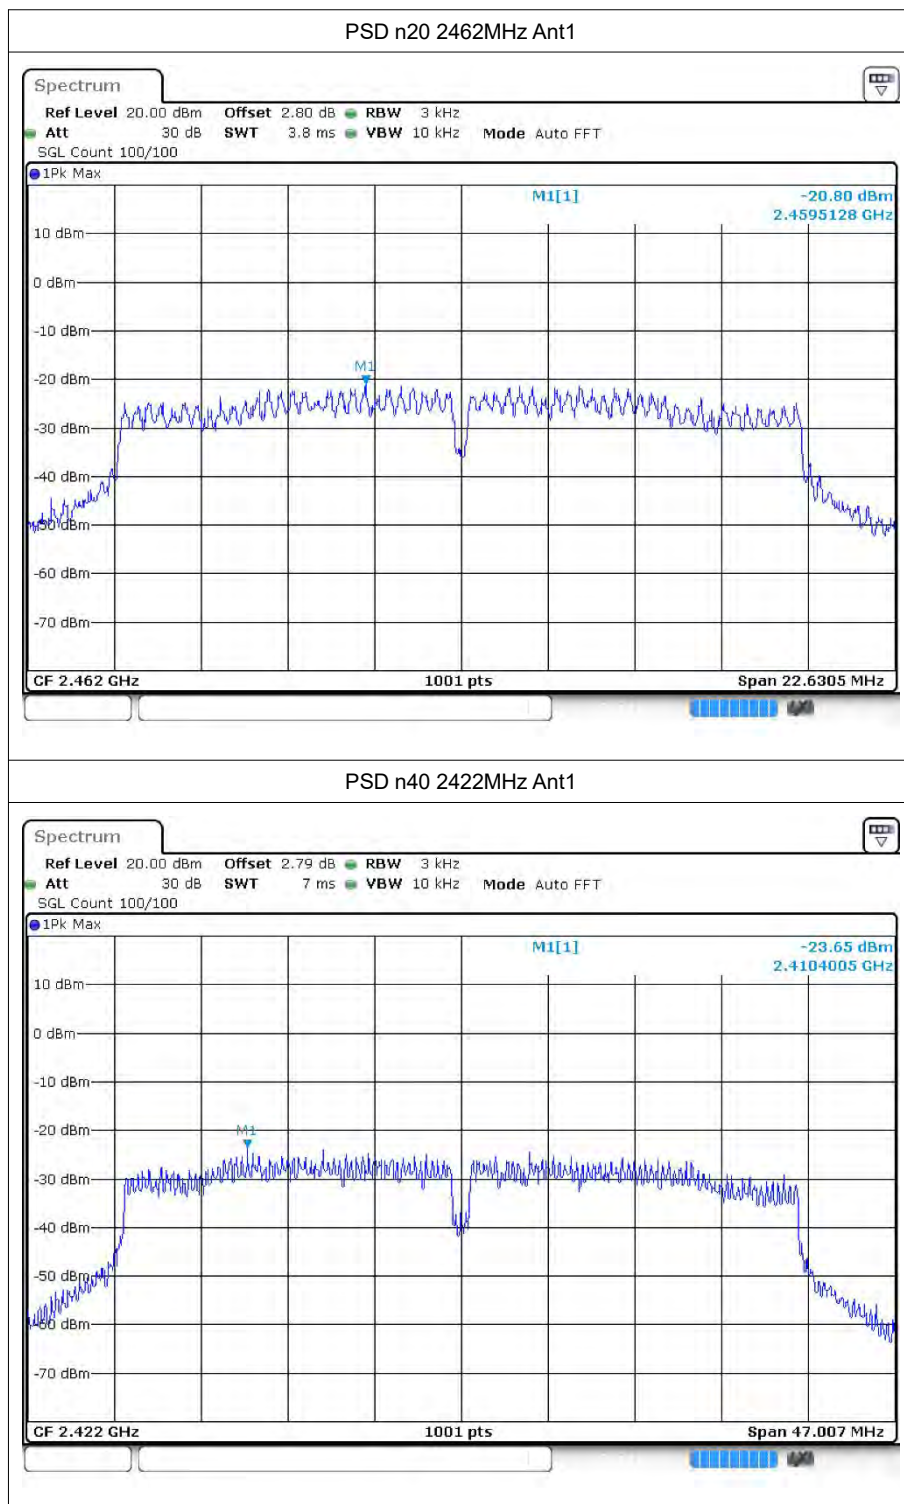


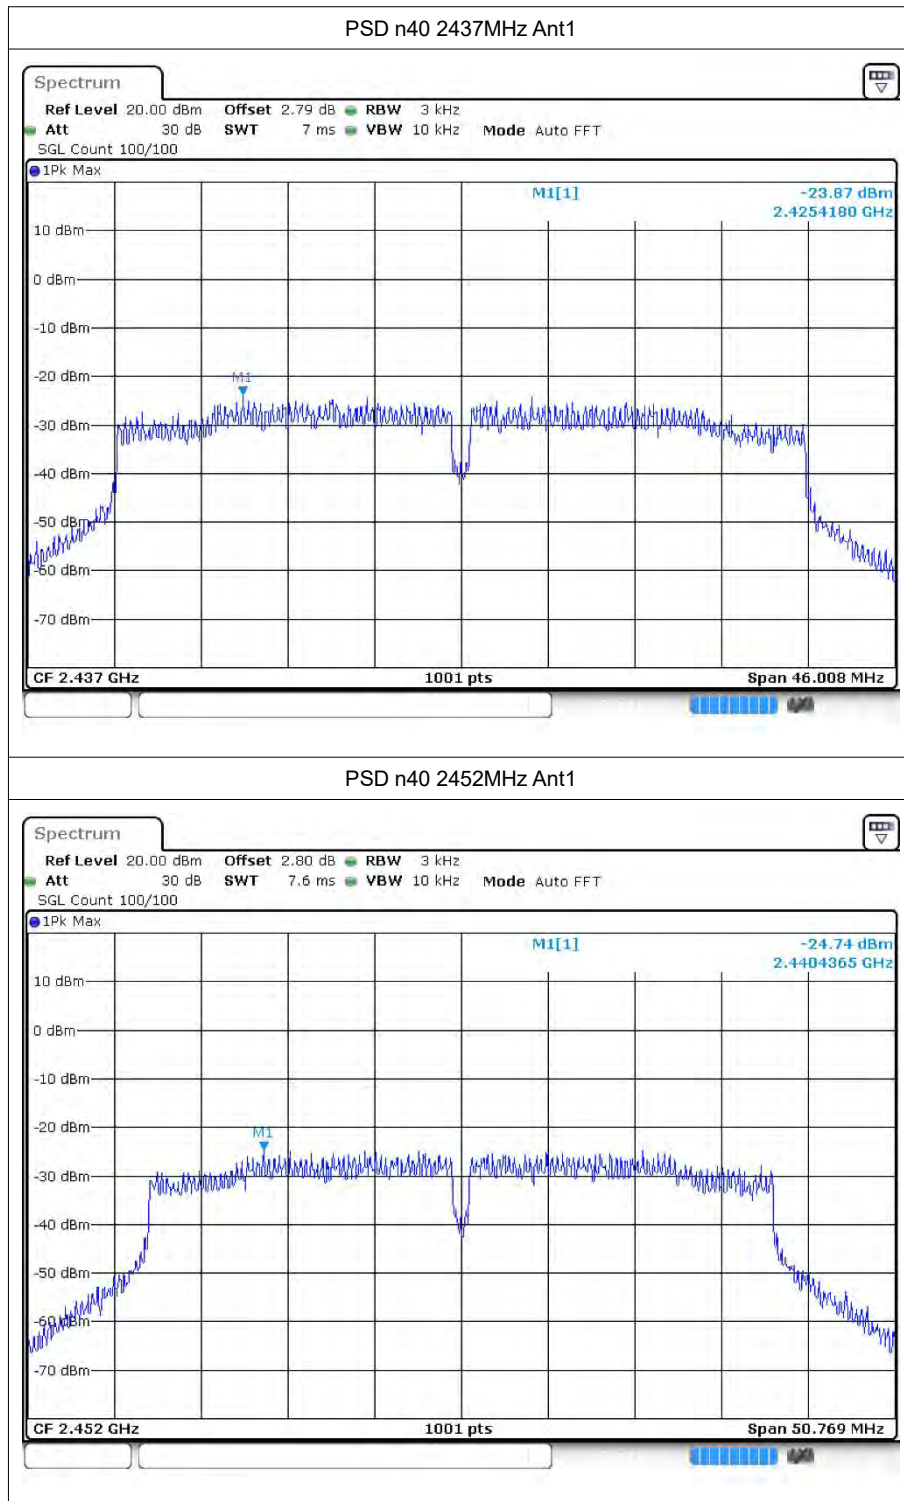



PSD ax20 2412MHz Ant1

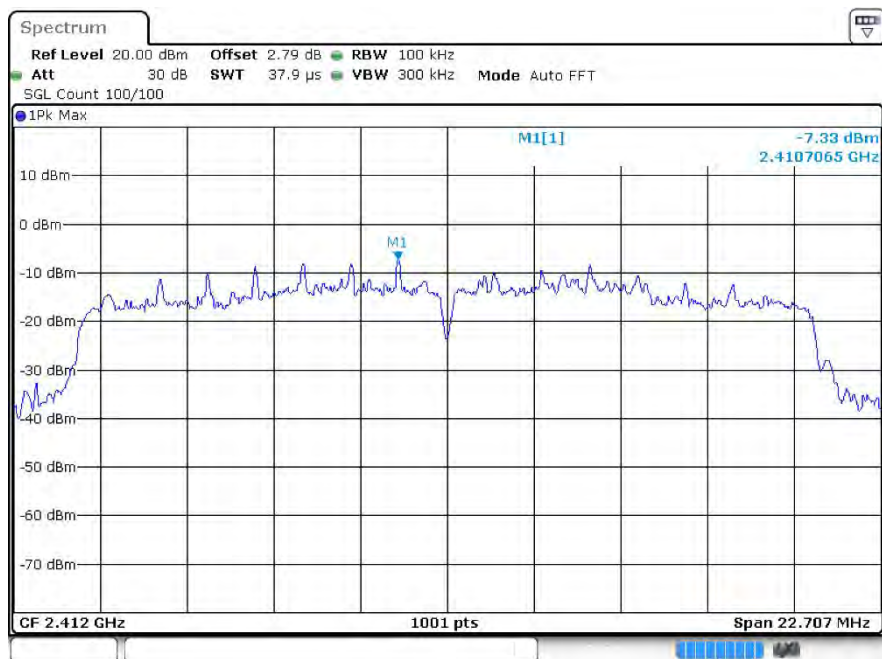

PSD ax20 2437MHz Ant1

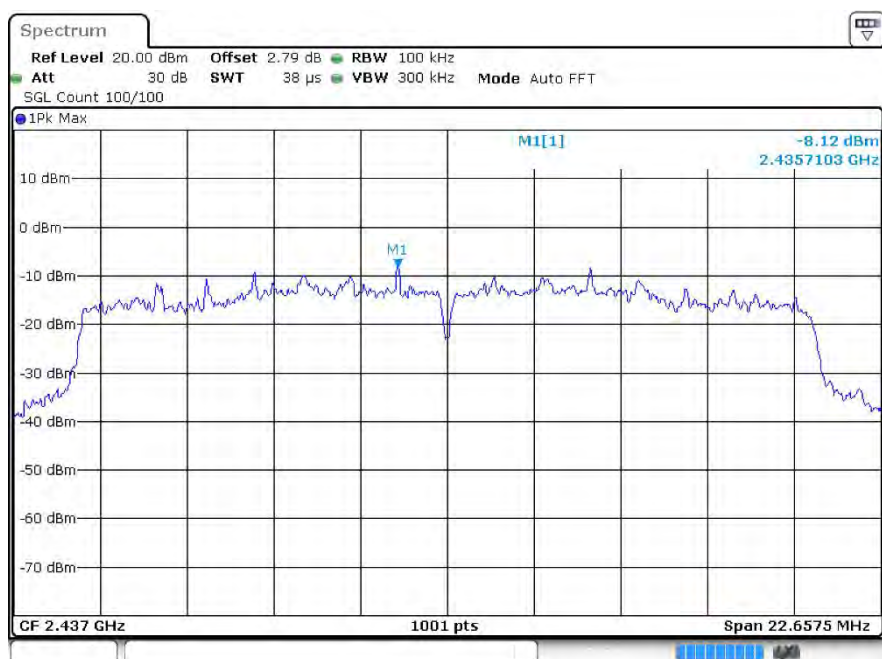

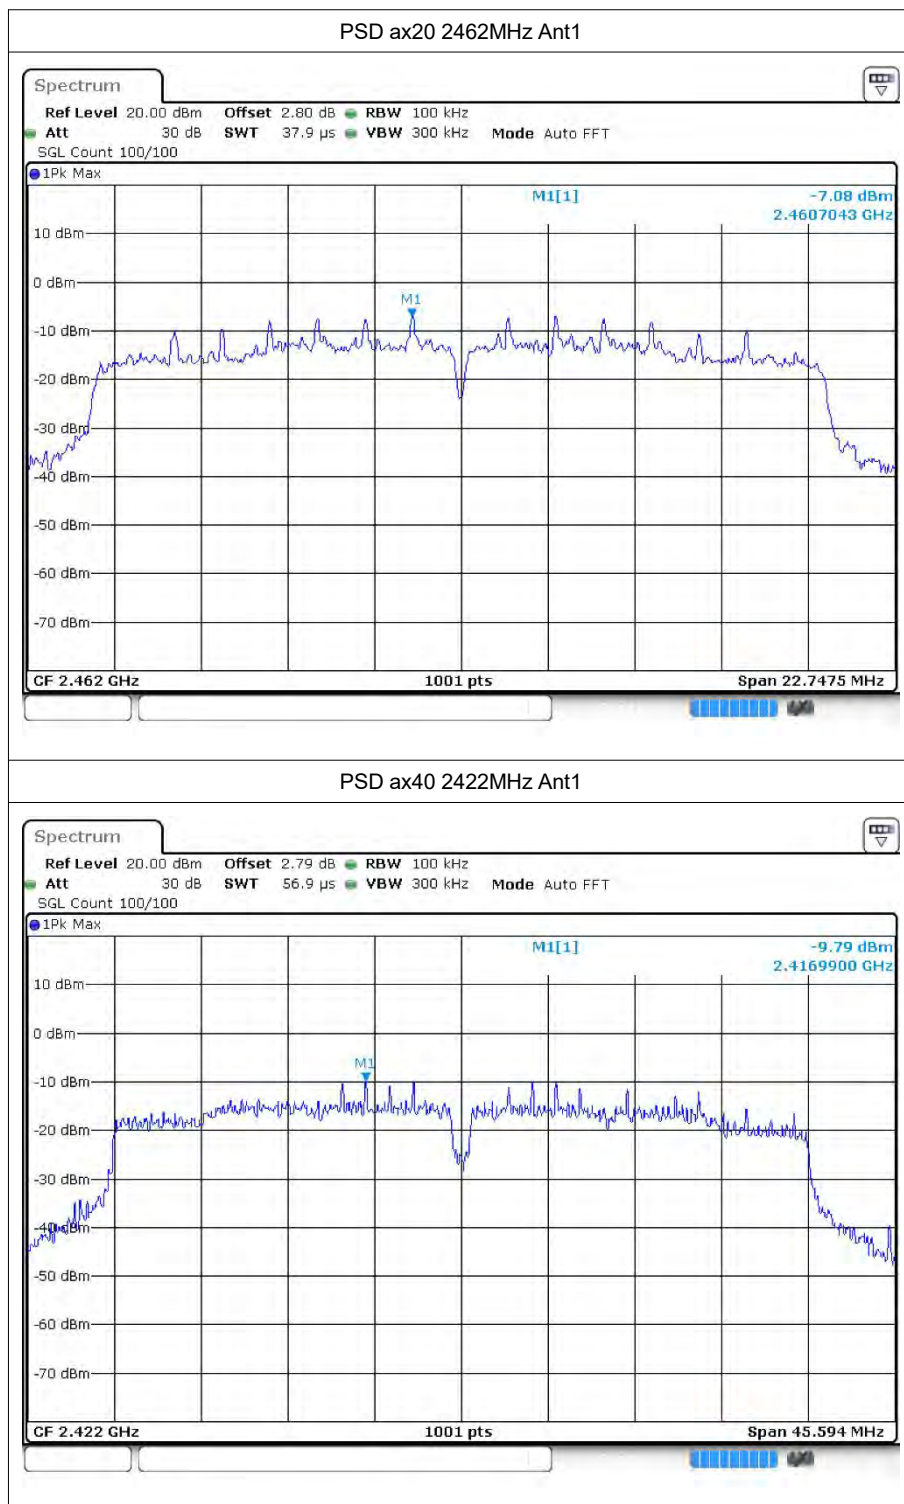

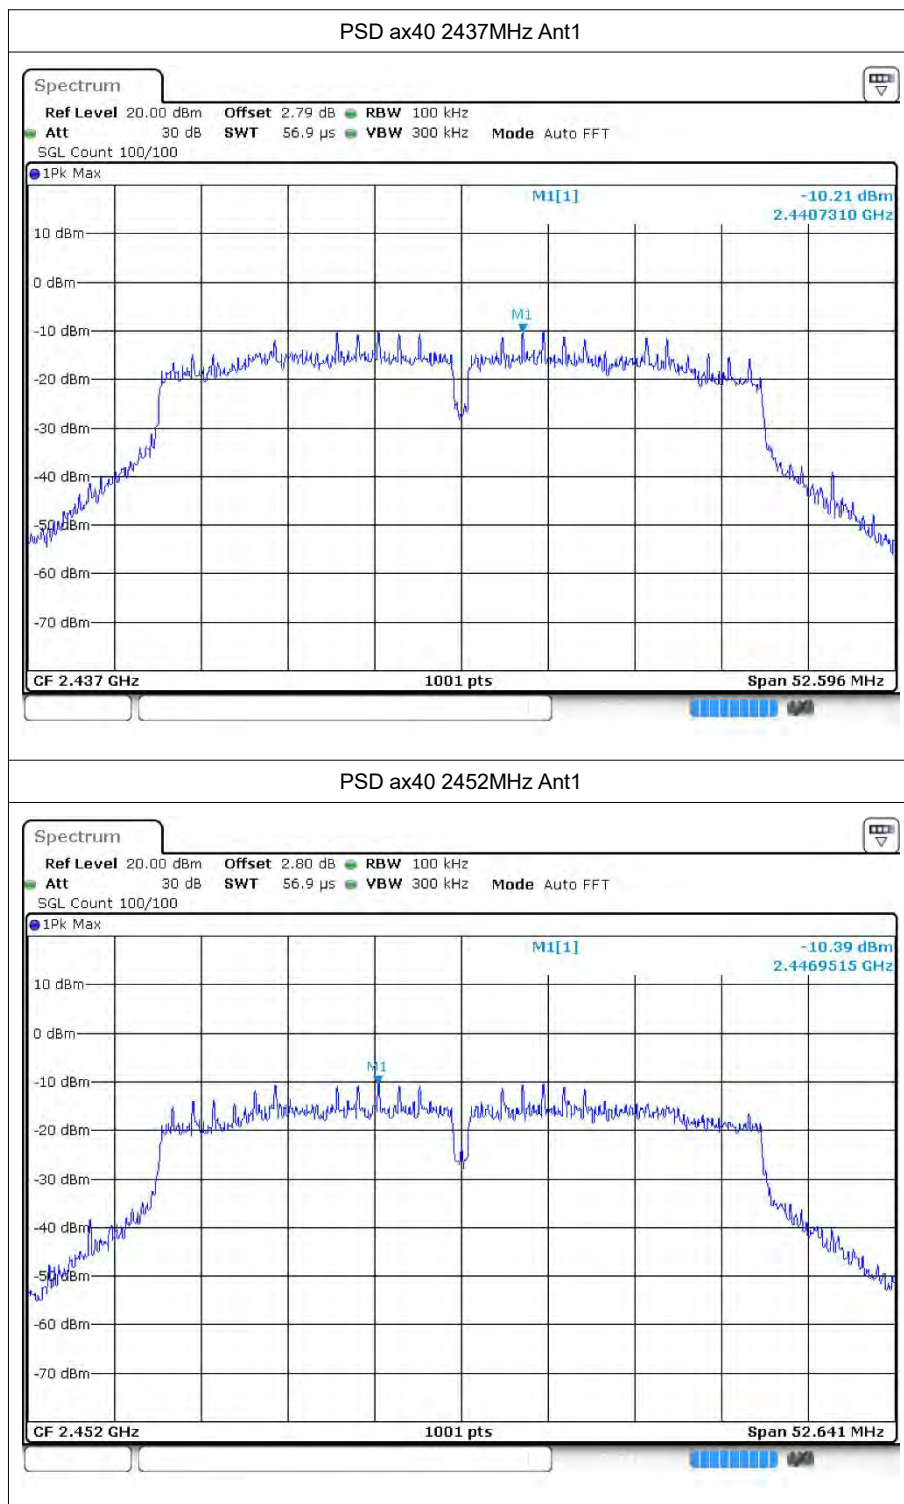



5 Band Edge

5.1 Test Result

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant0	-57.73	-20	Pass
b	2462	Ant0	-54.82	-20	Pass
g	2412	Ant0	-54.41	-20	Pass
g	2462	Ant0	-54.28	-20	Pass
n20	2412	Ant0	-49.88	-20	Pass
n20	2462	Ant0	-49.19	-20	Pass
n40	2422	Ant0	-46.14	-20	Pass
n40	2452	Ant0	-46.89	-20	Pass
ax20	2412	Ant0	-49.49	-20	Pass
ax20	2462	Ant0	-51.11	-20	Pass
ax40	2422	Ant0	-45.42	-20	Pass
ax40	2452	Ant0	-47.68	-20	Pass
b	2412	Ant1	-55.49	-20	-55.49
b	2462	Ant1	-55.87	-20	Pass
g	2412	Ant1	-50.32	-20	Pass
g	2462	Ant1	-54.27	-20	Pass
n20	2412	Ant1	-48.5	-20	Pass
n20	2462	Ant1	-49.38	-20	Pass
n40	2422	Ant1	-45.64	-20	Pass
n40	2452	Ant1	-45.55	-20	Pass
ax20	2412	Ant1	-48.49	-20	Pass
ax20	2462	Ant1	-48.72	-20	Pass
ax40	2422	Ant1	-45.84	-20	Pass
ax40	2452	Ant1	-44.88	-20	Pass

5.2 Test Graphs

