


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_10.11.32

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11a CH44 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

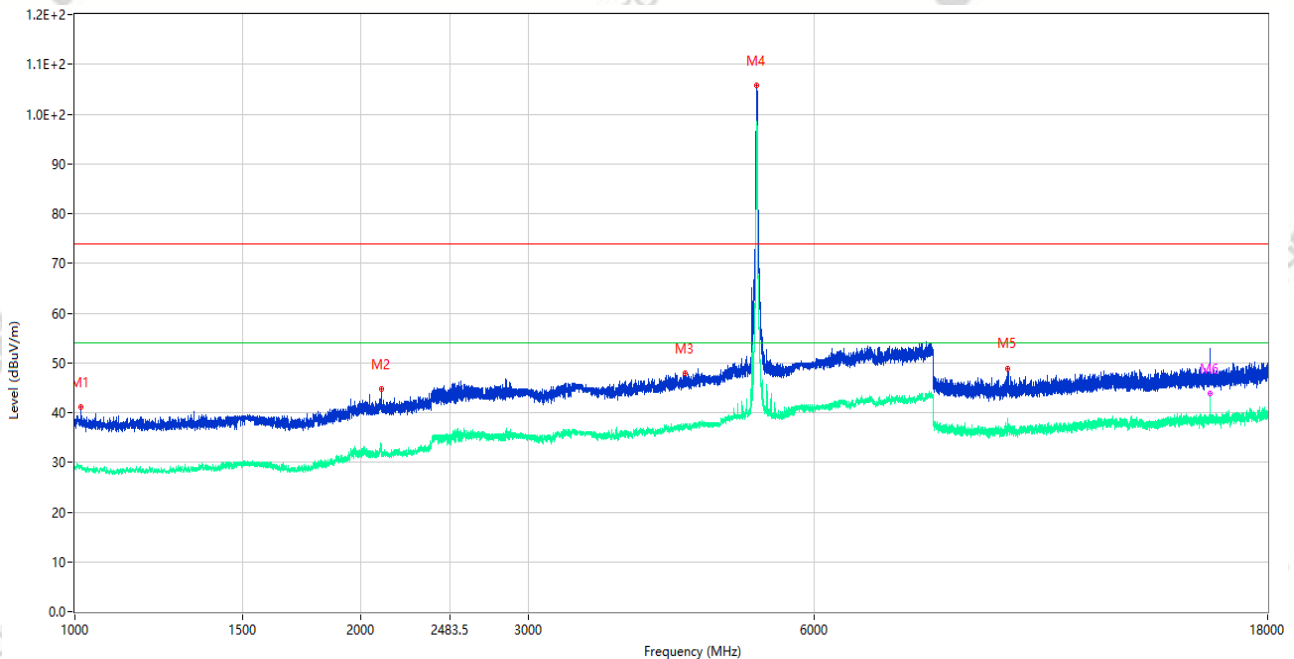


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1014.250	41.09	-14.55	74.0	32.91	Peak	339.00	150	Vertical	Pass
1**	1014.250	29.19	-14.55	54.0	24.81	AV	339.00	150	Vertical	Pass
2	2100.500	44.82	-13.53	74.0	29.18	Peak	30.00	150	Vertical	Pass
2**	2100.500	33.37	-13.53	54.0	20.63	AV	30.00	150	Vertical	Pass
3	4389.000	47.92	-3.60	74.0	26.08	Peak	279.00	150	Vertical	Pass
3**	4389.000	36.81	-3.60	54.0	17.19	AV	279.00	150	Vertical	Pass
4	5218.500	105.69	-2.37	74.0	-31.69	Peak	47.00	150	Vertical	N/A
4**	5218.500	98.08	-2.37	54.0	-44.08	AV	47.00	150	Vertical	N/A
5	9590.000	48.91	-3.53	74.0	25.09	Peak	264.00	150	Vertical	Pass
5**	9590.000	38.71	-3.53	54.0	15.29	AV	264.00	150	Vertical	Pass
6	15656.500	50.59	-1.50	74.0	23.41	Peak	67.00	150	Vertical	Pass
6**	15656.500	43.85	-1.50	54.0	10.15	AV	67.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_10.25.26

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11a CH44 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

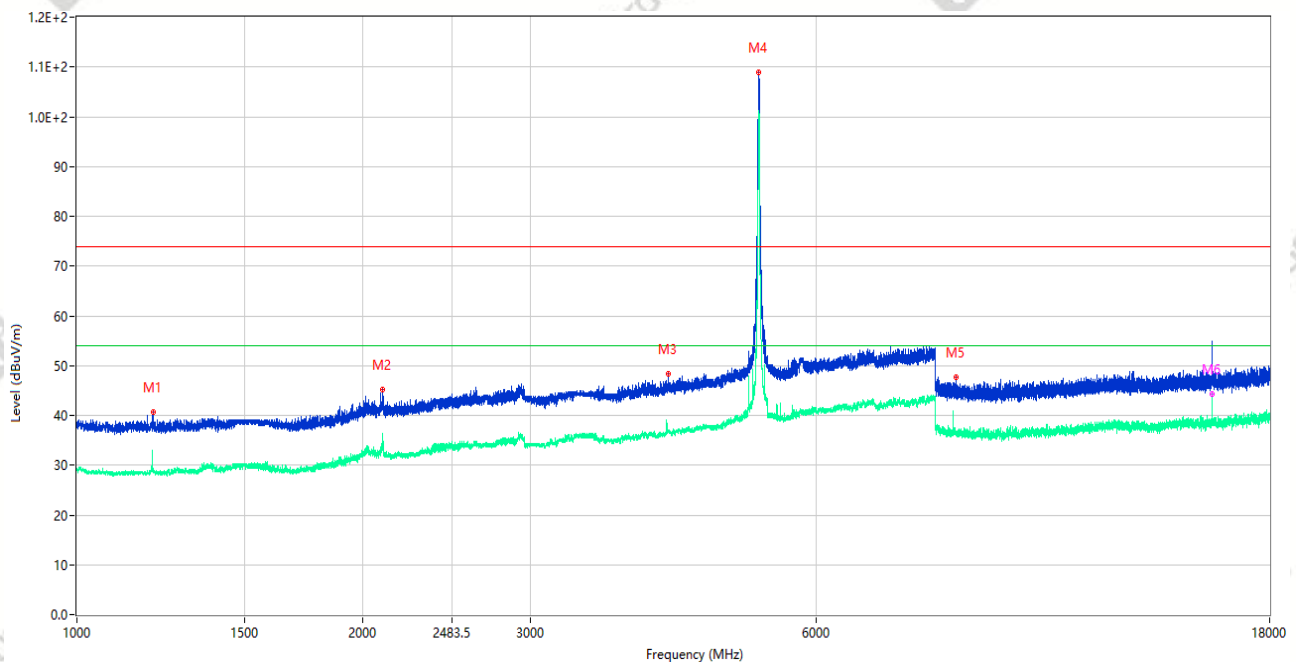


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1203.500	40.74	-15.76	74.0	33.26	Peak	37.00	150	Horizontal	Pass
1**	1203.500	28.88	-15.76	54.0	25.12	AV	37.00	150	Horizontal	Pass
2	2096.500	45.22	-13.58	74.0	28.78	Peak	187.00	150	Horizontal	Pass
2**	2096.500	36.29	-13.58	54.0	17.71	AV	187.00	150	Horizontal	Pass
3	4194.500	48.29	-3.58	74.0	25.71	Peak	6.00	150	Horizontal	Pass
3**	4194.500	36.98	-3.58	54.0	17.02	AV	6.00	150	Horizontal	Pass
4	5215.500	108.90	-2.32	74.0	-34.90	Peak	104.00	150	Horizontal	N/A
4**	5215.500	99.91	-2.32	54.0	-45.91	AV	104.00	150	Horizontal	N/A
5	8417.000	47.59	-5.23	74.0	26.41	Peak	140.00	150	Horizontal	Pass
5**	8417.000	36.42	-5.23	54.0	17.58	AV	140.00	150	Horizontal	Pass
6	15659.000	51.33	-1.38	74.0	22.67	Peak	0.00	150	Horizontal	Pass
6**	15659.000	44.29	-1.38	54.0	9.71	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_10.36.06

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH44 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

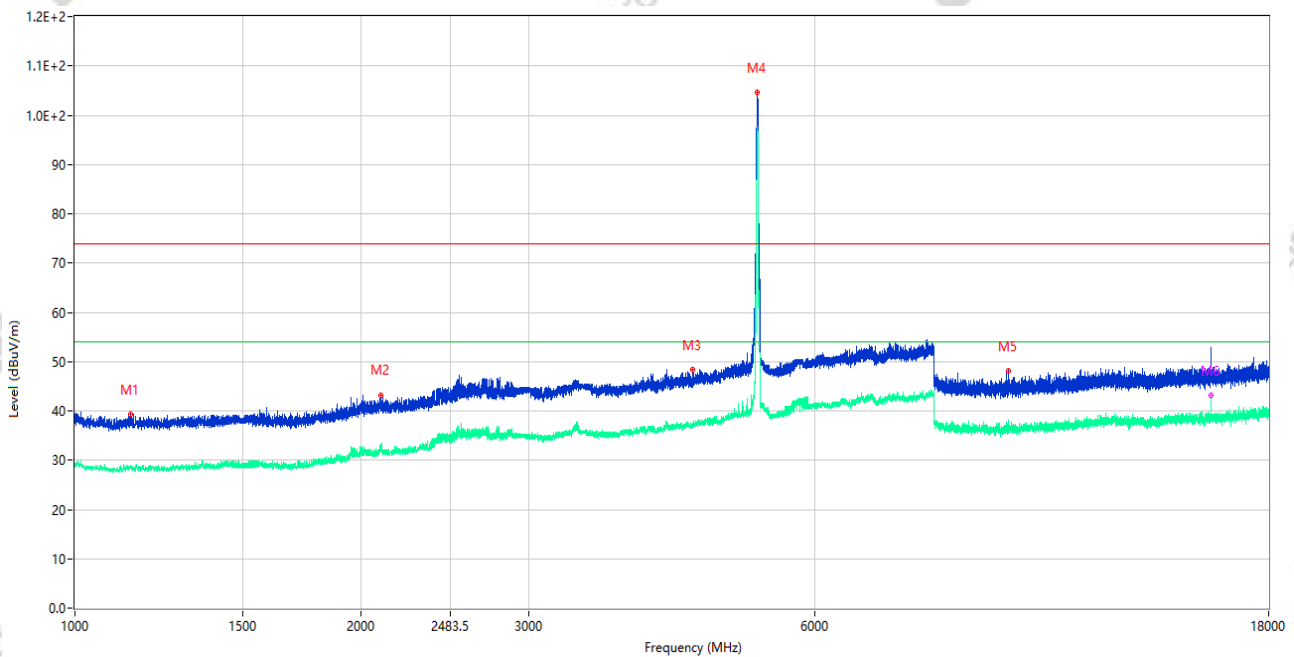


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1144.000	39.40	-15.61	74.0	34.60	Peak	0.00	150	Vertical	Pass
1**	1144.000	29.00	-15.61	54.0	25.00	AV	0.00	150	Vertical	Pass
2	2099.500	43.25	-13.53	74.0	30.75	Peak	44.00	150	Vertical	Pass
2**	2099.500	32.50	-13.53	54.0	21.50	AV	44.00	150	Vertical	Pass
3	4461.500	48.36	-3.58	74.0	25.64	Peak	276.00	150	Vertical	Pass
3**	4461.500	37.33	-3.58	54.0	16.67	AV	276.00	150	Vertical	Pass
4	5218.500	104.69	-2.37	74.0	-30.69	Peak	46.00	150	Vertical	N/A
4**	5218.500	97.35	-2.37	54.0	-43.35	AV	46.00	150	Vertical	N/A
5	9589.500	48.09	-3.53	74.0	25.91	Peak	119.00	150	Vertical	Pass
5**	9589.500	36.56	-3.53	54.0	17.44	AV	119.00	150	Vertical	Pass
6	15661.500	49.52	-1.49	74.0	24.48	Peak	119.00	150	Vertical	Pass
6**	15661.500	43.25	-1.49	54.0	10.75	AV	119.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_10.31.28

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH44 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

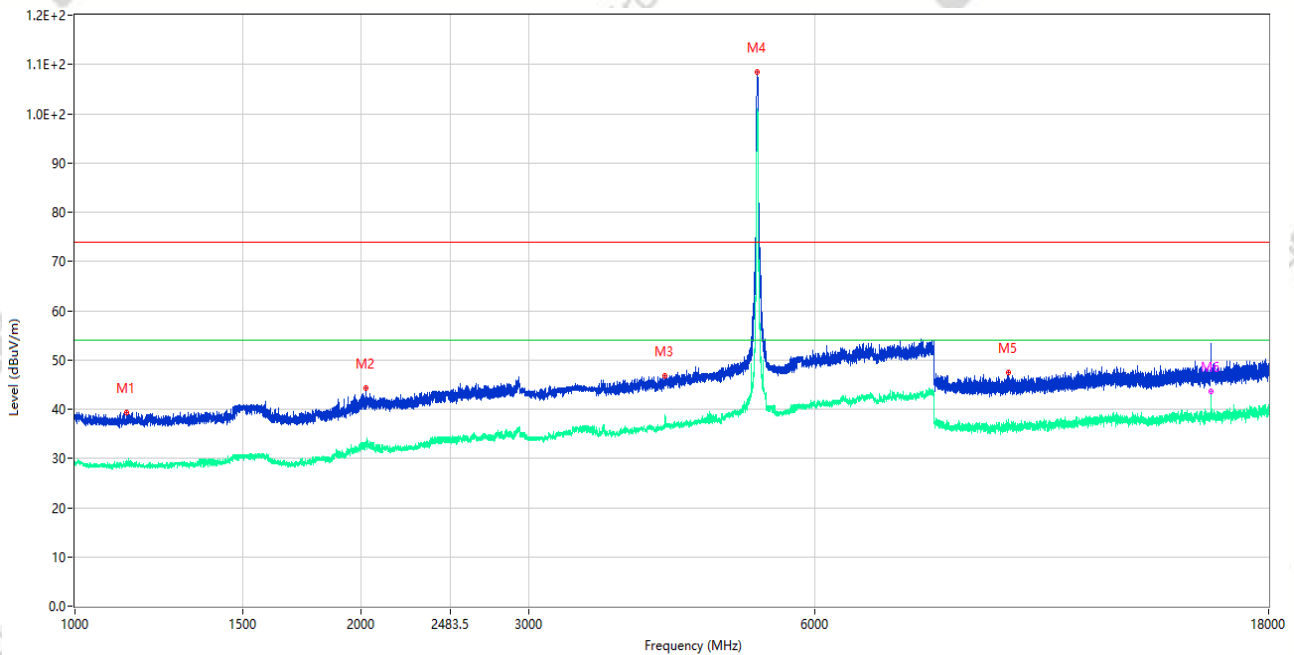


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1134.250	39.37	-15.55	74.0	34.63	Peak	202.00	150	Horizontal	Pass
1**	1134.250	29.50	-15.55	54.0	24.50	AV	202.00	150	Horizontal	Pass
2	2023.000	44.39	-14.08	74.0	29.61	Peak	211.00	150	Horizontal	Pass
2**	2023.000	33.09	-14.08	54.0	20.91	AV	211.00	150	Horizontal	Pass
3	4172.500	46.77	-4.25	74.0	27.23	Peak	195.00	150	Horizontal	Pass
3**	4172.500	36.72	-4.25	54.0	17.28	AV	195.00	150	Horizontal	Pass
4	5219.500	108.39	-2.36	74.0	-34.39	Peak	105.00	150	Horizontal	N/A
4**	5219.500	100.97	-2.36	54.0	-46.97	AV	105.00	150	Horizontal	N/A
5	9580.000	47.42	-3.45	74.0	26.58	Peak	360.00	150	Horizontal	Pass
5**	9580.000	36.65	-3.45	54.0	17.35	AV	360.00	150	Horizontal	Pass
6	15659.500	50.76	-1.43	74.0	23.24	Peak	350.00	150	Horizontal	Pass
6**	15659.500	43.65	-1.43	54.0	10.35	AV	350.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_10.57.53

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n40 CH46 P=18.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

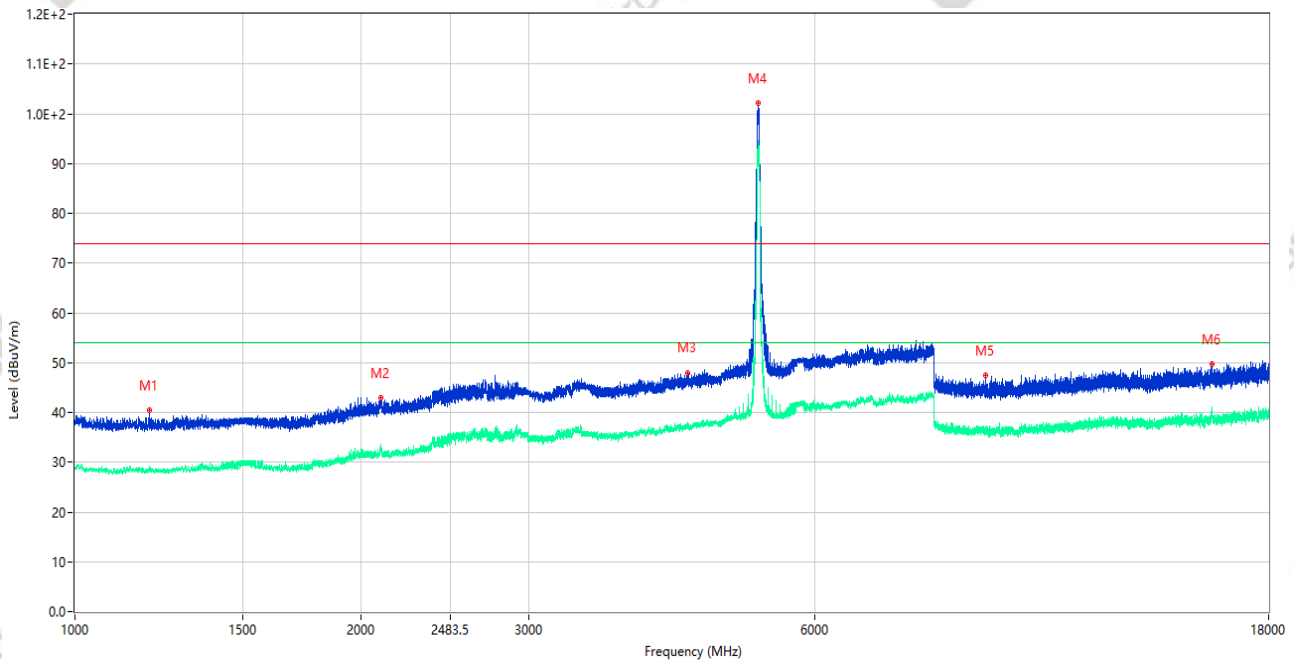

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.500	40.36	-15.72	74.0	33.64	Peak	261.00	150	Vertical	Pass
1**	1197.500	28.70	-15.72	54.0	25.30	AV	261.00	150	Vertical	Pass
2	2096.750	42.94	-13.58	74.0	31.06	Peak	40.00	150	Vertical	Pass
2**	2096.750	32.39	-13.58	54.0	21.61	AV	40.00	150	Vertical	Pass
3	4405.500	48.01	-3.02	74.0	25.99	Peak	4.00	150	Vertical	Pass
3**	4405.500	38.06	-3.02	54.0	15.94	AV	4.00	150	Vertical	Pass
4	5228.000	102.16	-2.30	74.0	-28.16	Peak	41.00	150	Vertical	N/A
4**	5228.000	94.43	-2.30	54.0	-40.43	AV	41.00	150	Vertical	N/A
5	9069.500	47.54	-4.57	74.0	26.46	Peak	0.00	150	Vertical	Pass
5**	9069.500	37.10	-4.57	54.0	16.90	AV	0.00	150	Vertical	Pass
6	15694.500	49.79	-1.87	74.0	24.21	Peak	69.00	150	Vertical	Pass
6**	15694.500	40.65	-1.87	54.0	13.35	AV	69.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_10.51.40

EUT Name: A6Go Smart Payment Terminal

Temp.(°C): 23.2

Model Number: K1152

Humidity (%RH): 51

Sample Number: CC26080004-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: 5.2G WIFI 11n40 CH46 P=18.5

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: S05+数据线: S05

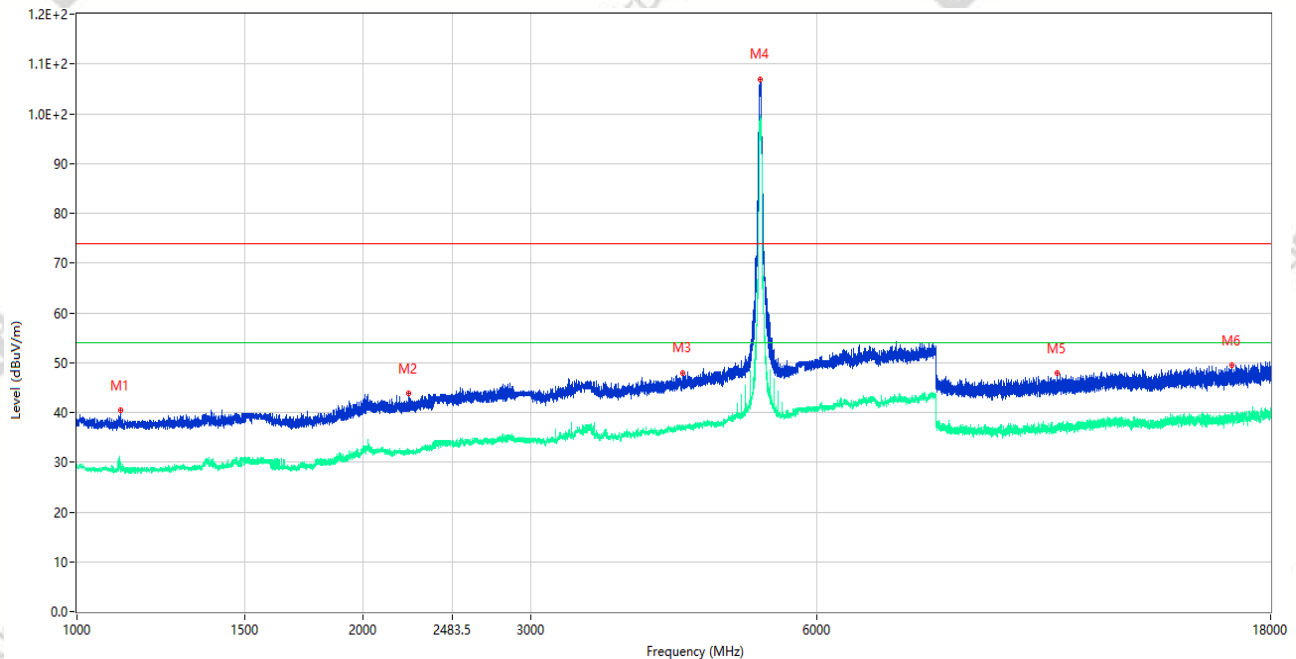


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1112.250	40.35	-15.78	74.0	33.65	Peak	174.00	150	Horizontal	Pass
1**	1112.250	29.44	-15.78	54.0	24.56	AV	174.00	150	Horizontal	Pass
2	2234.750	43.92	-13.10	74.0	30.08	Peak	281.00	150	Horizontal	Pass
2**	2234.750	31.74	-13.10	54.0	22.26	AV	281.00	150	Horizontal	Pass
3	4340.000	47.85	-3.08	74.0	26.15	Peak	356.00	150	Horizontal	Pass
3**	4340.000	37.09	-3.08	54.0	16.91	AV	356.00	150	Horizontal	Pass
4	5232.000	106.99	-2.35	74.0	-32.99	Peak	99.00	150	Horizontal	N/A
4**	5232.000	99.40	-2.35	54.0	-45.40	AV	99.00	150	Horizontal	N/A
5	10740.000	47.86	-3.73	74.0	26.14	Peak	313.00	150	Horizontal	Pass
5**	10740.000	37.41	-3.73	54.0	16.59	AV	313.00	150	Horizontal	Pass
6	16377.000	49.51	-1.62	74.0	24.49	Peak	10.00	150	Horizontal	Pass
6**	16377.000	38.86	-1.62	54.0	15.14	AV	10.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_11.26.46

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ac80 CH42 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

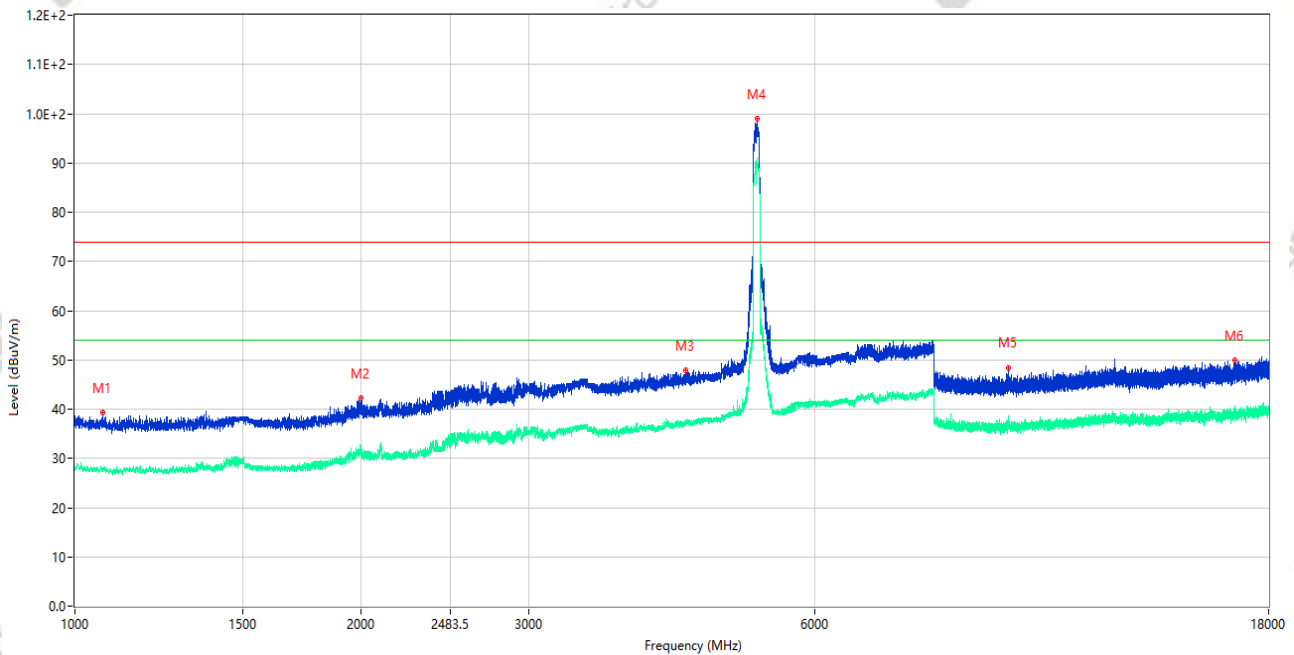


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1069.250	39.24	-15.19	74.0	34.76	Peak	350.00	150	Vertical	Pass
1**	1069.250	27.38	-15.19	54.0	26.62	AV	350.00	150	Vertical	Pass
2	1997.500	42.30	-14.41	74.0	31.70	Peak	63.00	150	Vertical	Pass
2**	1997.500	32.13	-14.41	54.0	21.87	AV	63.00	150	Vertical	Pass
3	4384.000	47.99	-3.74	74.0	26.01	Peak	331.00	150	Vertical	Pass
3**	4384.000	36.99	-3.74	54.0	17.01	AV	331.00	150	Vertical	Pass
4	5216.500	98.93	-2.33	74.0	-24.93	Peak	39.00	150	Vertical	N/A
4**	5216.500	90.74	-2.33	54.0	-36.74	AV	39.00	150	Vertical	N/A
5	9584.125	48.46	-3.49	74.0	25.54	Peak	108.00	150	Vertical	Pass
5**	9584.125	36.26	-3.49	54.0	17.74	AV	108.00	150	Vertical	Pass
6	16574.099	49.86	-0.70	74.0	24.14	Peak	62.00	150	Vertical	Pass
6**	16574.099	40.69	-0.70	54.0	13.31	AV	62.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_11.33.46

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ac80 CH42 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

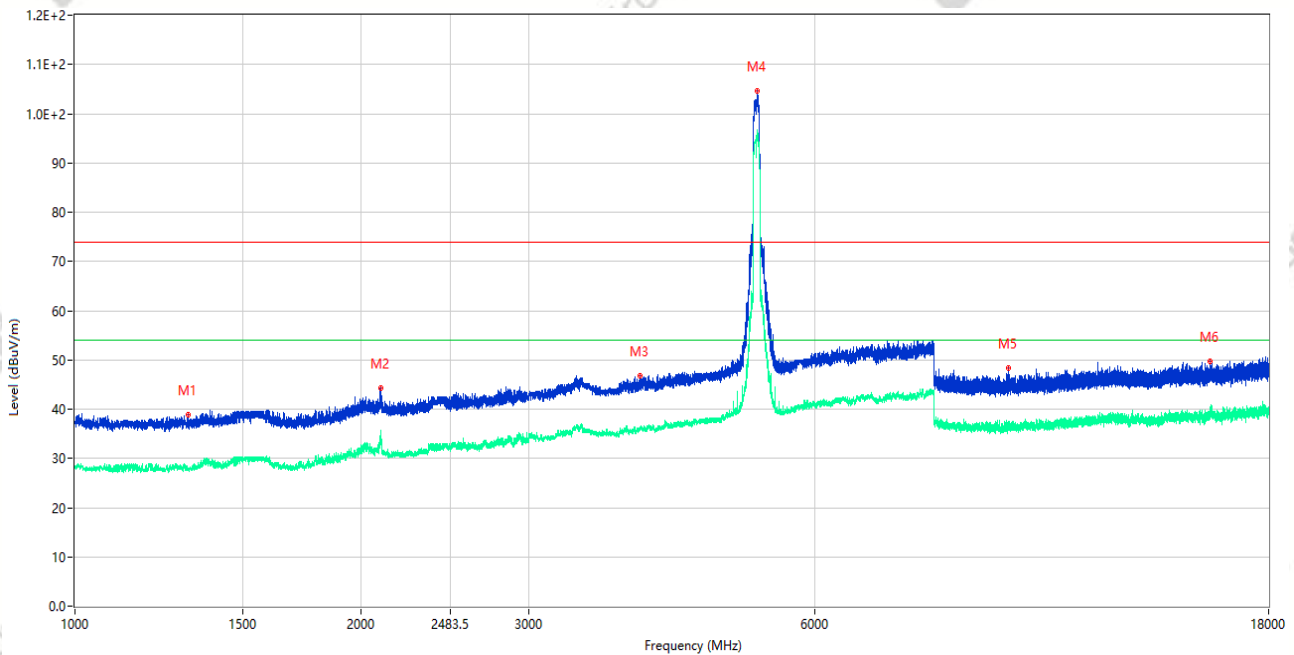

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1314.750	38.90	-15.88	74.0	35.10	Peak	144.00	150	Horizontal	Pass
1**	1314.750	27.79	-15.88	54.0	26.21	AV	144.00	150	Horizontal	Pass
2	2097.750	44.35	-13.60	74.0	29.65	Peak	189.00	150	Horizontal	Pass
2**	2097.750	34.90	-13.60	54.0	19.10	AV	189.00	150	Horizontal	Pass
3	3932.000	46.80	-3.55	74.0	27.20	Peak	294.00	150	Horizontal	Pass
3**	3932.000	36.47	-3.55	54.0	17.53	AV	294.00	150	Horizontal	Pass
4	5215.500	104.53	-2.32	74.0	-30.53	Peak	108.00	150	Horizontal	N/A
4**	5215.500	95.49	-2.32	54.0	-41.49	AV	108.00	150	Horizontal	N/A
5	9586.737	48.34	-3.48	74.0	25.66	Peak	0.00	150	Horizontal	Pass
5**	9586.737	37.15	-3.48	54.0	16.85	AV	0.00	150	Horizontal	Pass
6	15624.375	49.69	-1.57	74.0	24.31	Peak	0.00	150	Horizontal	Pass
6**	15624.375	39.75	-1.57	54.0	14.25	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_21.46.49

EUT Name: A6Go Smart Payment Terminal

Temp.(°C): 23.2

Model Number: K1152

Humidity (%RH): 51

Sample Number: CC26080004-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: S05+数据线: S05

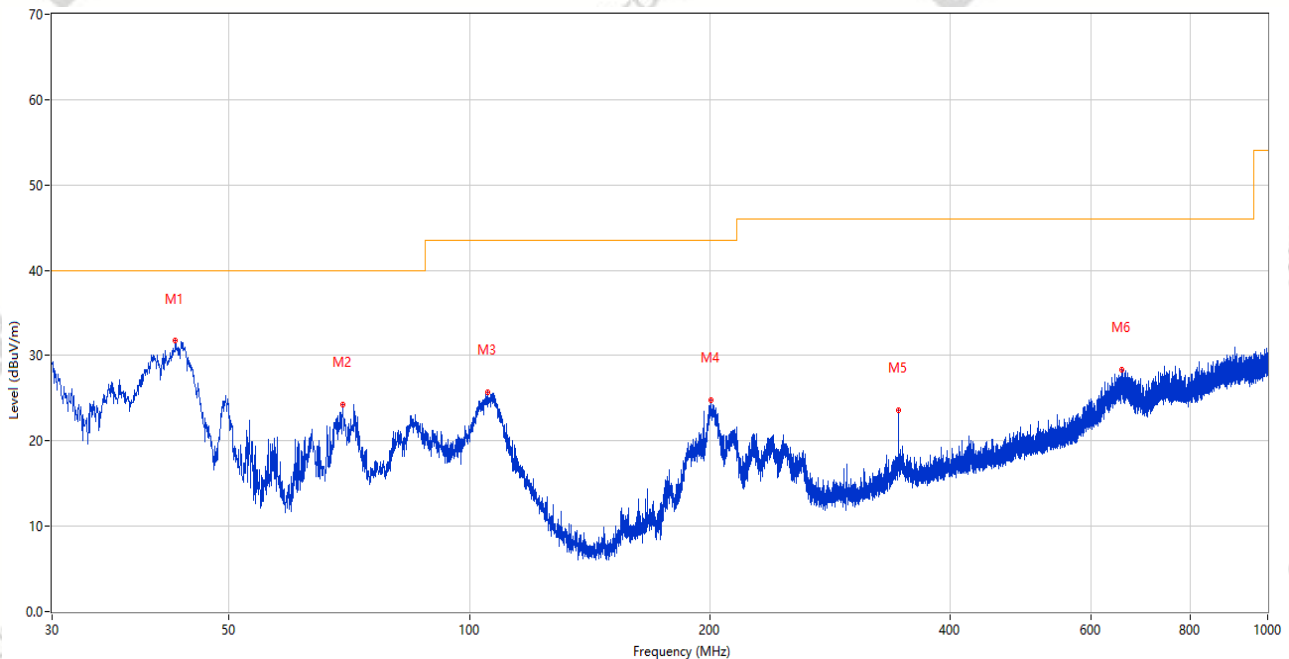


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.804	31.71	-25.11	40.0	8.29	Peak	186.00	100	Vertical	Pass
2	69.334	24.24	-28.73	40.0	15.76	Peak	196.00	100	Vertical	Pass
3	105.466	25.77	-26.23	43.5	17.73	Peak	291.00	100	Vertical	Pass
4	200.817	24.83	-25.92	43.5	18.67	Peak	328.00	200	Vertical	Pass
5	345.008	23.62	-21.51	46.0	22.38	Peak	68.00	100	Vertical	Pass
6	656.281	28.38	-14.38	46.0	17.62	Peak	255.00	200	Vertical	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_21.49.40

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(5G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

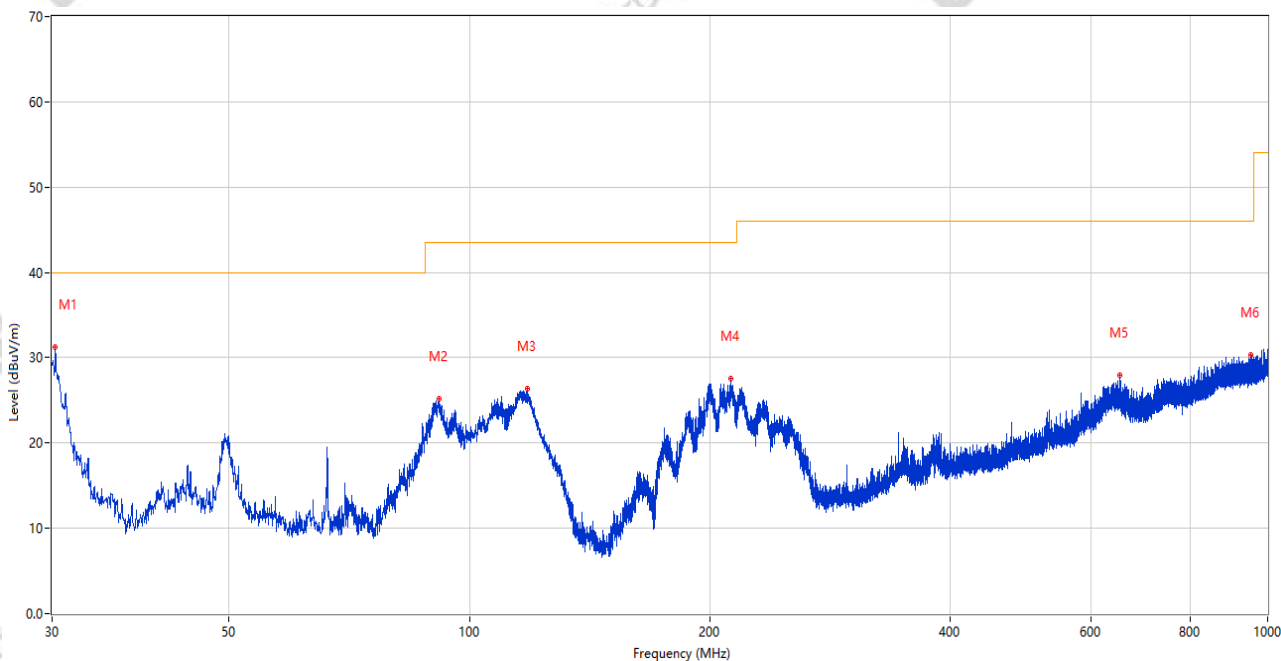

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.291	31.24	-28.94	40.0	8.76	Peak	0.00	200	Horizontal	Pass
2	91.741	25.18	-27.54	43.5	18.32	Peak	161.00	200	Horizontal	Pass
3	118.076	26.40	-27.87	43.5	17.10	Peak	1.00	200	Horizontal	Pass
4	212.699	27.52	-26.37	43.5	15.98	Peak	230.00	100	Horizontal	Pass
5	653.370	27.90	-14.39	46.0	18.10	Peak	83.00	100	Horizontal	Pass
6	951.354	30.34	-9.02	46.0	15.66	Peak	46.00	100	Horizontal	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_15.26.17

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11a CH60 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

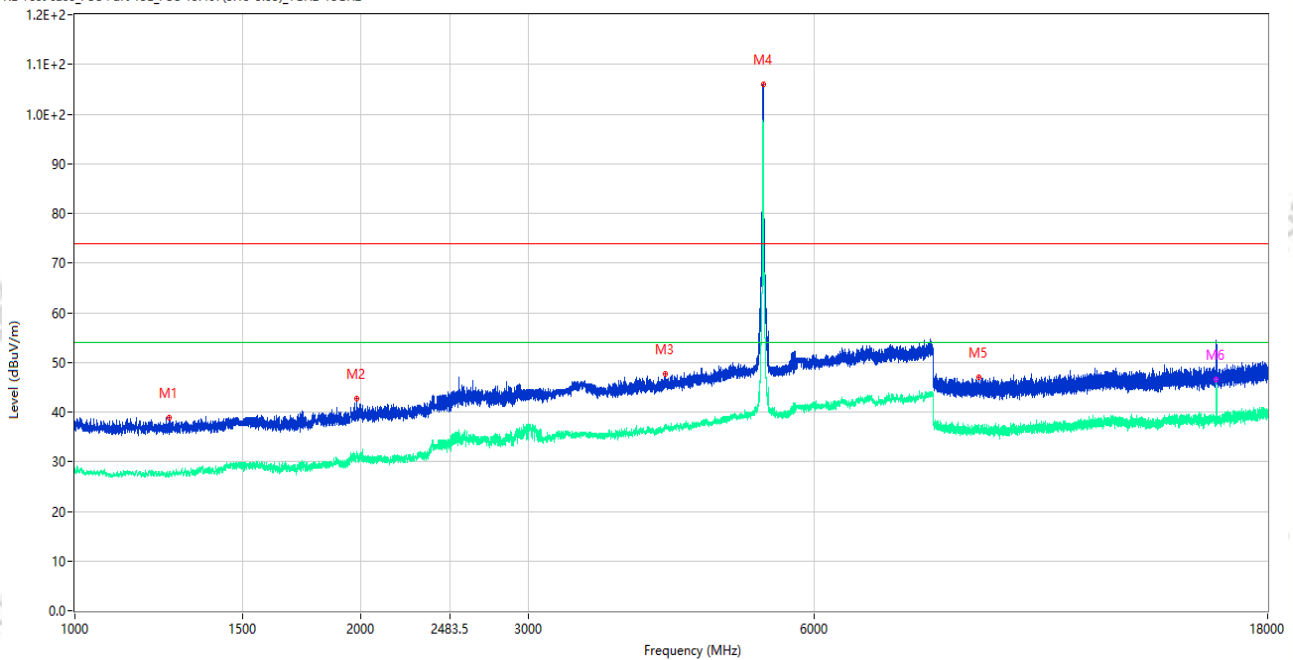

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1257.500	38.94	-16.06	74.0	35.06	Peak	0.00	150	Vertical	Pass
1**	1257.500	27.43	-16.06	54.0	26.57	AV	0.00	150	Vertical	Pass
2	1979.500	42.65	-14.81	74.0	31.35	Peak	132.00	150	Vertical	Pass
2**	1979.500	31.27	-14.81	54.0	22.73	AV	132.00	150	Vertical	Pass
3	4179.500	47.77	-4.00	74.0	26.23	Peak	214.00	150	Vertical	Pass
3**	4179.500	36.85	-4.00	54.0	17.15	AV	214.00	150	Vertical	Pass
4	5301.500	106.08	-2.07	74.0	-32.08	Peak	50.00	150	Vertical	N/A
4**	5301.500	98.32	-2.07	54.0	-44.32	AV	50.00	150	Vertical	N/A
5	8946.912	46.92	-4.49	74.0	27.08	Peak	182.00	150	Vertical	Pass
5**	8946.912	36.29	-4.49	54.0	17.71	AV	182.00	150	Vertical	Pass
6	15896.849	52.10	-1.75	74.0	21.90	Peak	67.00	150	Vertical	Pass
6**	15896.849	46.62	-1.75	54.0	7.38	AV	67.00	150	Vertical	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_15.39.56

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11a CH60 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

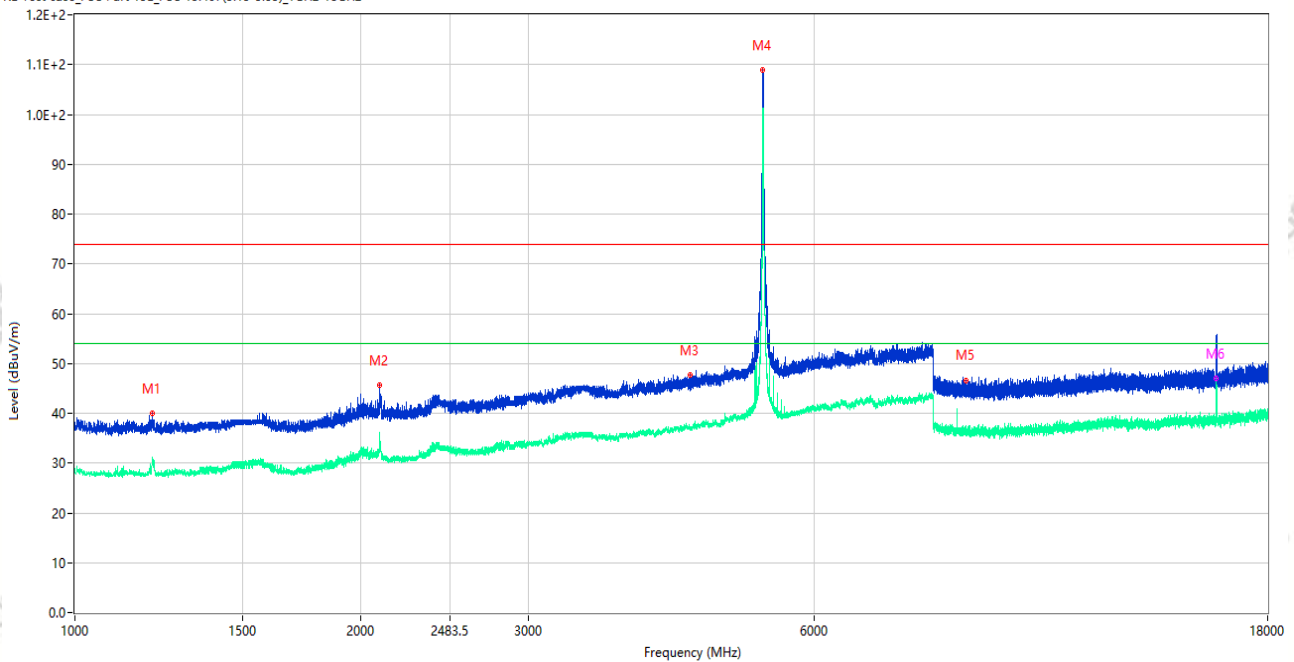

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1206.750	39.94	-15.79	74.0	34.06	Peak	170.00	150	Horizontal	Pass
1**	1206.750	31.03	-15.79	54.0	22.97	AV	170.00	150	Horizontal	Pass
2	2092.500	45.55	-13.65	74.0	28.45	Peak	214.00	150	Horizontal	Pass
2**	2092.500	34.54	-13.65	54.0	19.46	AV	214.00	150	Horizontal	Pass
3	4446.000	47.71	-3.68	74.0	26.29	Peak	343.00	150	Horizontal	Pass
3**	4446.000	36.97	-3.68	54.0	17.03	AV	343.00	150	Horizontal	Pass
4	5298.000	108.85	-2.04	74.0	-34.85	Peak	113.00	150	Horizontal	N/A
4**	5298.000	100.54	-2.04	54.0	-46.54	AV	113.00	150	Horizontal	N/A
5	8663.338	46.46	-5.69	74.0	27.54	Peak	0.00	150	Horizontal	Pass
5**	8663.338	36.18	-5.69	54.0	17.82	AV	0.00	150	Horizontal	Pass
6	15898.162	54.66	-1.79	74.0	19.34	Peak	360.00	150	Horizontal	Pass
6**	15898.162	46.96	-1.79	54.0	7.04	AV	360.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_16.00.51

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n20 CH60 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

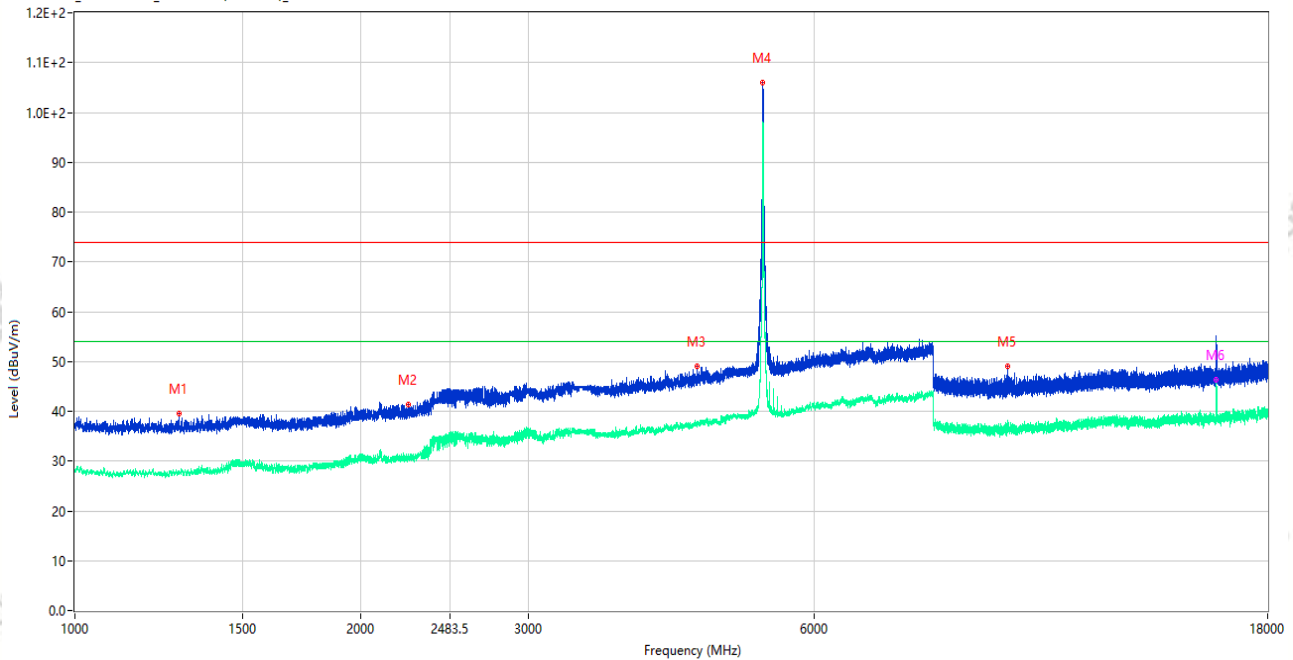

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.500	39.62	-15.92	74.0	34.38	Peak	77.00	150	Vertical	Pass
1**	1288.500	27.76	-15.92	54.0	26.24	AV	77.00	150	Vertical	Pass
2	2243.750	41.25	-12.91	74.0	32.75	Peak	359.00	150	Vertical	Pass
2**	2243.750	31.18	-12.91	54.0	22.82	AV	359.00	150	Vertical	Pass
3	4521.500	48.93	-2.67	74.0	25.07	Peak	1.00	150	Vertical	Pass
3**	4521.500	37.45	-2.67	54.0	16.55	AV	1.00	150	Vertical	Pass
4	5298.500	105.98	-2.03	74.0	-31.98	Peak	44.00	150	Vertical	N/A
4**	5298.500	97.70	-2.03	54.0	-43.70	AV	44.00	150	Vertical	N/A
5	9576.762	48.97	-3.41	74.0	25.03	Peak	129.00	150	Vertical	Pass
5**	9576.762	37.40	-3.41	54.0	16.60	AV	129.00	150	Vertical	Pass
6	15900.526	52.56	-1.91	74.0	21.44	Peak	91.00	150	Vertical	Pass
6**	15900.526	46.22	-1.91	54.0	7.78	AV	91.00	150	Vertical	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_15.54.23

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n20 CH60 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

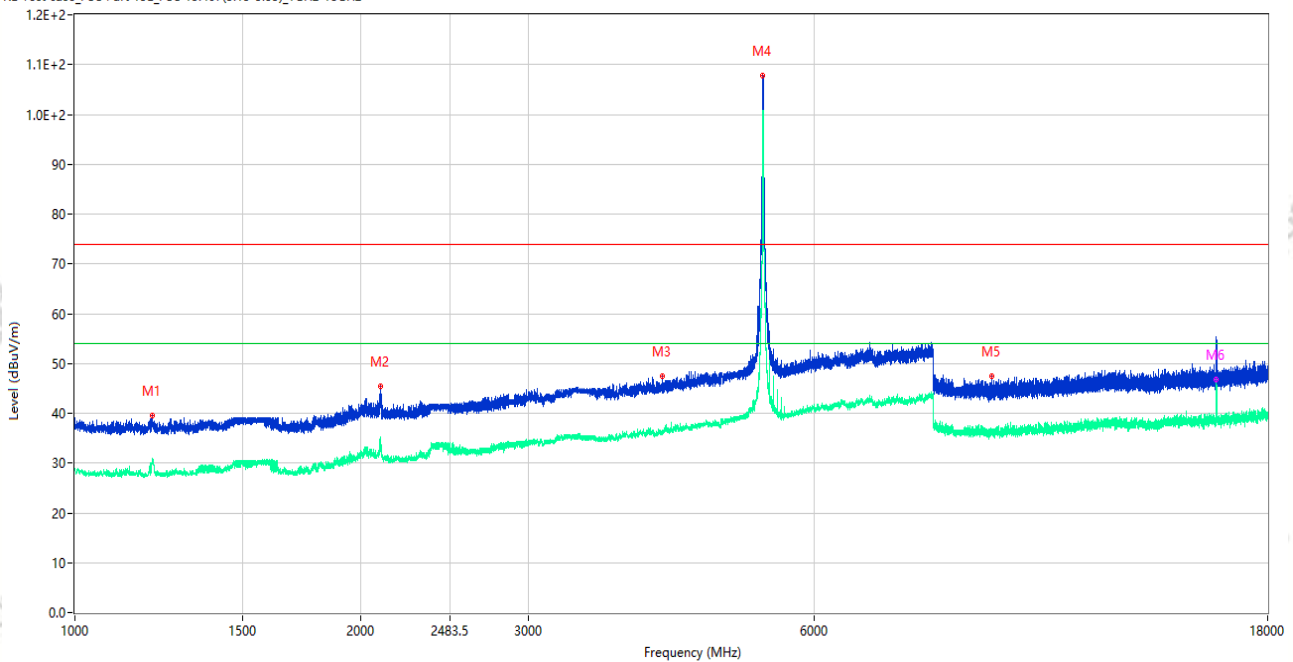

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1207.500	39.52	-15.83	74.0	34.48	Peak	68.00	150	Horizontal	Pass
1**	1207.500	31.03	-15.83	54.0	22.97	AV	68.00	150	Horizontal	Pass
2	2097.000	45.44	-13.58	74.0	28.56	Peak	190.00	150	Horizontal	Pass
2**	2097.000	35.25	-13.58	54.0	18.75	AV	190.00	150	Horizontal	Pass
3	4150.500	47.52	-4.60	74.0	26.48	Peak	187.00	150	Horizontal	Pass
3**	4150.500	36.23	-4.60	54.0	17.77	AV	187.00	150	Horizontal	Pass
4	5296.000	107.88	-2.00	74.0	-33.88	Peak	255.00	150	Horizontal	N/A
4**	5296.000	100.28	-2.00	54.0	-46.28	AV	255.00	150	Horizontal	N/A
5	9221.701	47.44	-5.67	74.0	26.56	Peak	340.00	150	Horizontal	Pass
5**	9221.701	35.63	-5.67	54.0	18.37	AV	340.00	150	Horizontal	Pass
6	15898.951	52.93	-1.82	74.0	21.07	Peak	0.00	150	Horizontal	Pass
6**	15898.951	46.75	-1.82	54.0	7.25	AV	0.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_16.09.30

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n40 CH54 P=18.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

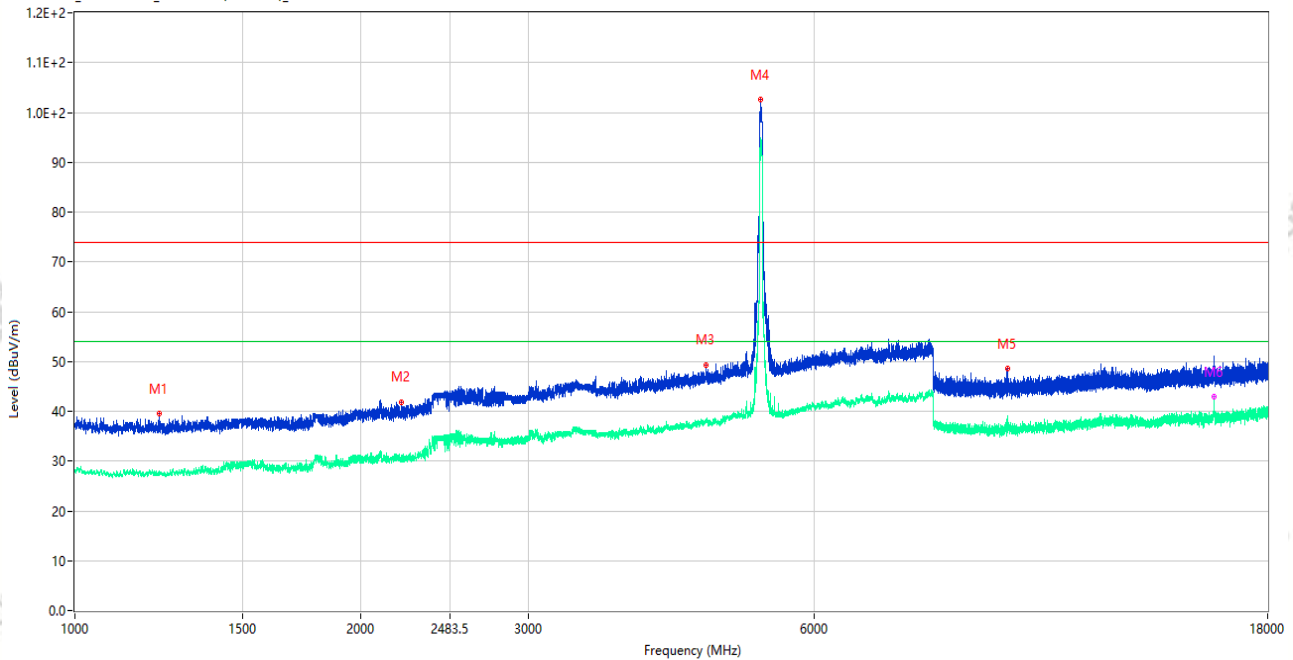

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1225.500	39.48	-15.99	74.0	34.52	Peak	101.00	150	Vertical	Pass
1**	1225.500	27.77	-15.99	54.0	26.23	AV	101.00	150	Vertical	Pass
2	2205.000	41.87	-13.32	74.0	32.13	Peak	0.00	150	Vertical	Pass
2**	2205.000	30.78	-13.32	54.0	23.22	AV	0.00	150	Vertical	Pass
3	4613.500	49.37	-3.29	74.0	24.63	Peak	210.00	150	Vertical	Pass
3**	4613.500	38.34	-3.29	54.0	15.66	AV	210.00	150	Vertical	Pass
4	5271.500	102.64	-2.43	74.0	-28.64	Peak	39.00	150	Vertical	N/A
4**	5271.500	94.65	-2.43	54.0	-40.65	AV	39.00	150	Vertical	N/A
5	9584.125	48.66	-3.49	74.0	25.34	Peak	306.00	150	Vertical	Pass
5**	9584.125	37.23	-3.49	54.0	16.77	AV	306.00	150	Vertical	Pass
6	15809.438	49.10	-1.66	74.0	24.90	Peak	60.00	150	Vertical	Pass
6**	15809.438	43.00	-1.66	54.0	11.00	AV	60.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_16.16.35

EUT Name: A6Go Smart Payment Terminal

Temp.(°C): 23.2

Model Number: K1152

Humidity (%RH): 51

Sample Number: CC26080004-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n40 CH54 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

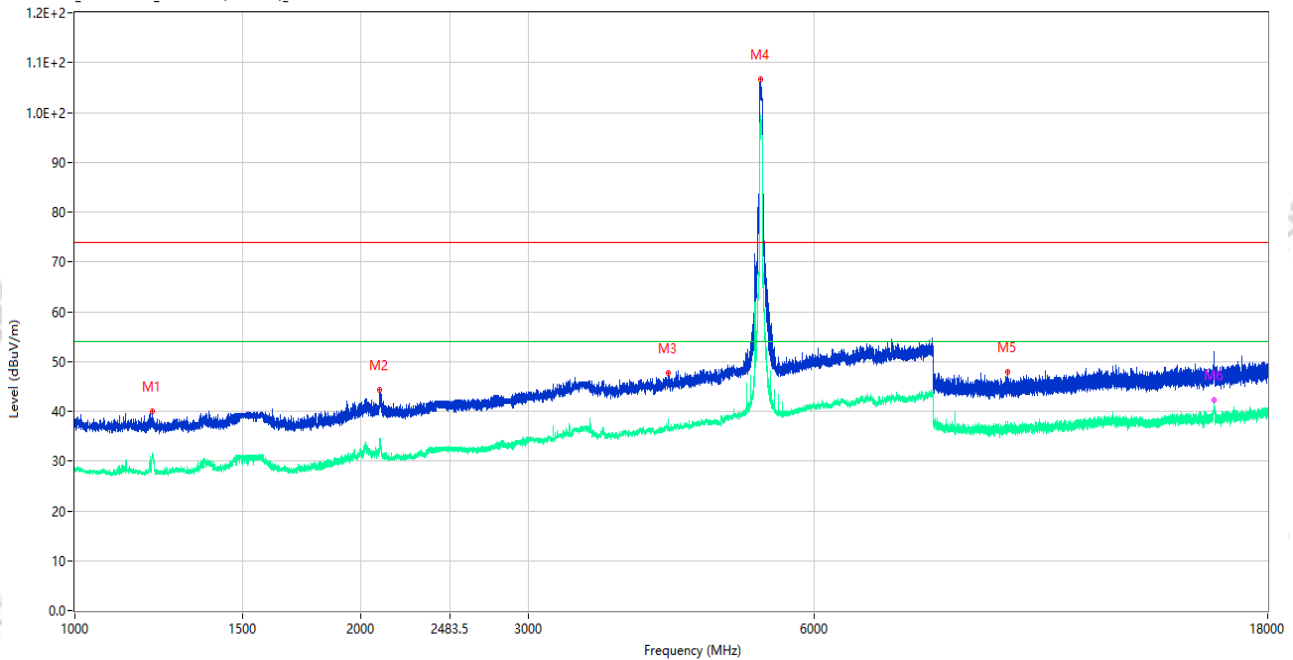

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1207.000	39.97	-15.80	74.0	34.03	Peak	257.00	150	Horizontal	Pass
1**	1207.000	31.57	-15.80	54.0	22.43	AV	257.00	150	Horizontal	Pass
2	2093.750	44.28	-13.64	74.0	29.72	Peak	76.00	150	Horizontal	Pass
2**	2093.750	32.96	-13.64	54.0	21.04	AV	76.00	150	Horizontal	Pass
3	4212.500	47.65	-3.43	74.0	26.35	Peak	162.00	150	Horizontal	Pass
3**	4212.500	36.86	-3.43	54.0	17.14	AV	162.00	150	Horizontal	Pass
4	5267.000	106.61	-2.39	74.0	-32.61	Peak	103.00	150	Horizontal	N/A
4**	5267.000	98.88	-2.39	54.0	-44.88	AV	103.00	150	Horizontal	N/A
5	9585.787	47.80	-3.45	74.0	26.20	Peak	253.00	150	Horizontal	Pass
5**	9585.787	36.51	-3.45	54.0	17.49	AV	253.00	150	Horizontal	Pass
6	15820.987	49.55	-1.69	74.0	24.45	Peak	346.00	150	Horizontal	Pass
6**	15820.987	42.28	-1.69	54.0	11.72	AV	346.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_17.35.40

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11ac80 CH58 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

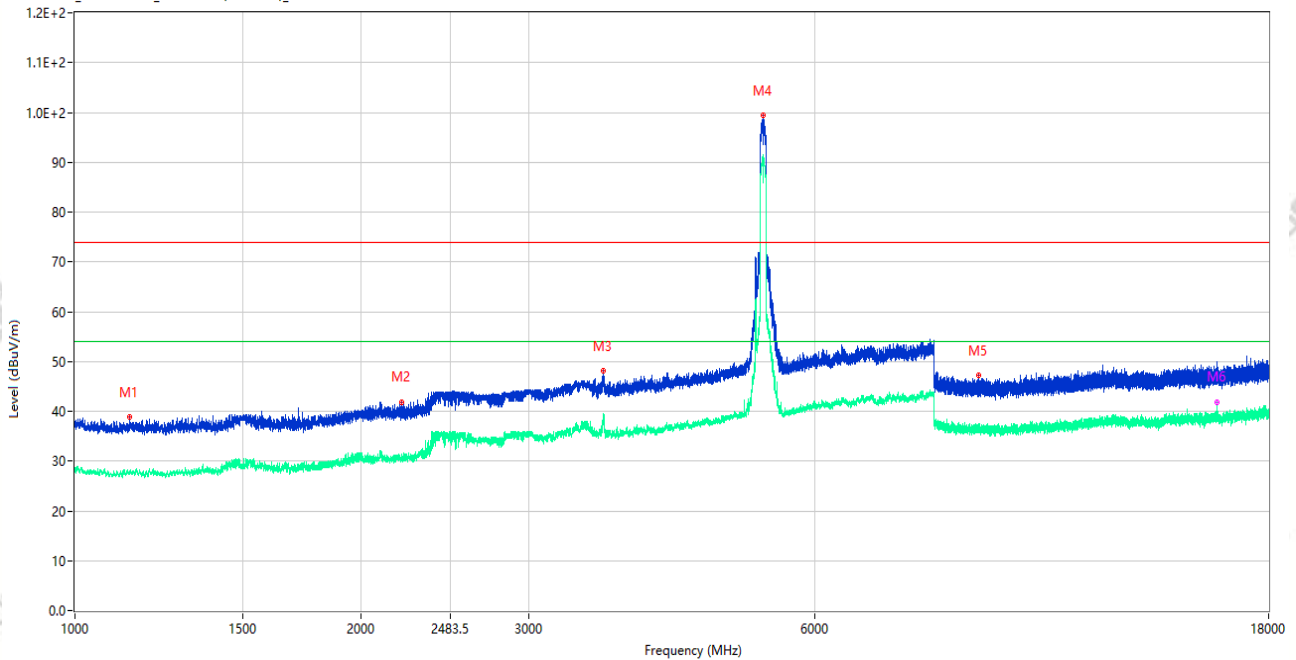

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1140.750	38.84	-15.59	74.0	35.16	Peak	164.00	150	Vertical	Pass
1**	1140.750	27.48	-15.59	54.0	26.52	AV	164.00	150	Vertical	Pass
2	2204.000	41.83	-13.32	74.0	32.17	Peak	314.00	150	Vertical	Pass
2**	2204.000	30.36	-13.32	54.0	23.64	AV	314.00	150	Vertical	Pass
3	3596.000	48.12	-5.13	74.0	25.88	Peak	110.00	150	Vertical	Pass
3**	3596.000	38.87	-5.13	54.0	15.13	AV	110.00	150	Vertical	Pass
4	5287.500	99.37	-2.07	74.0	-25.37	Peak	49.00	150	Vertical	N/A
4**	5287.500	91.59	-2.07	54.0	-37.59	AV	49.00	150	Vertical	N/A
5	8921.975	47.12	-4.71	74.0	26.88	Peak	35.00	150	Vertical	Pass
5**	8921.975	36.56	-4.71	54.0	17.44	AV	35.00	150	Vertical	Pass
6	15902.625	47.17	-2.09	74.0	26.83	Peak	293.00	150	Vertical	Pass
6**	15902.625	41.90	-2.09	54.0	12.10	AV	293.00	150	Vertical	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_17.41.14

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11ac80 CH58 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

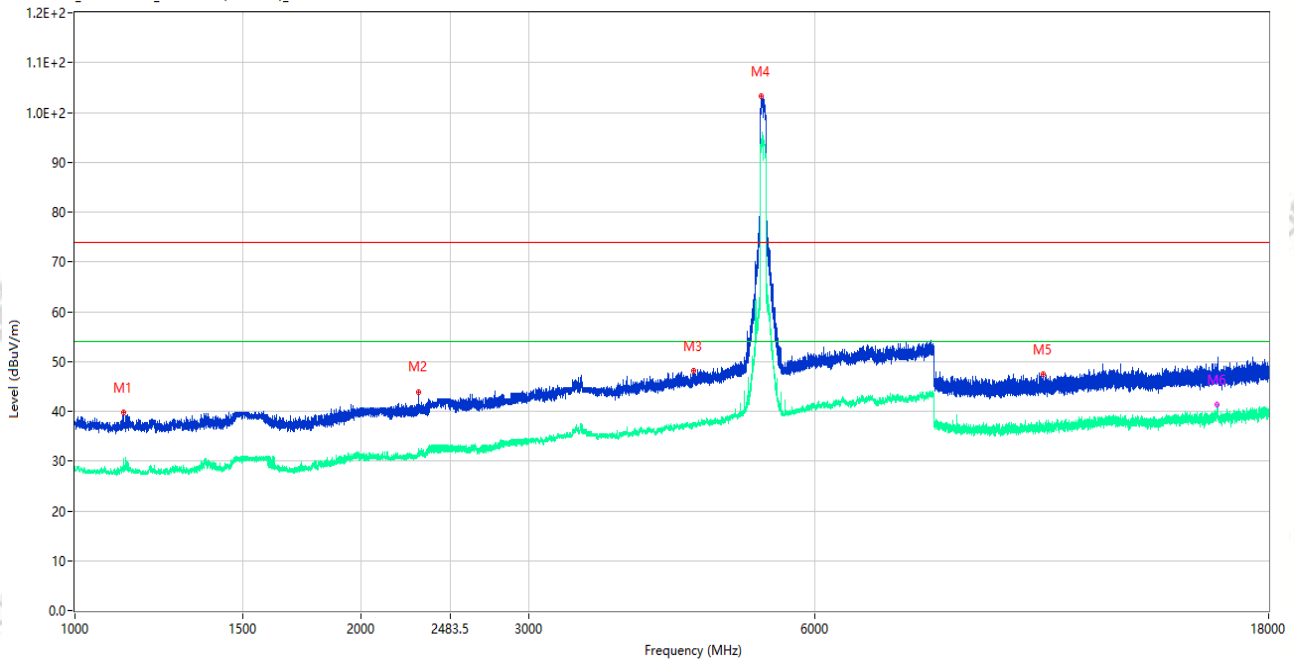

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1124.250	39.68	-15.66	74.0	34.32	Peak	175.00	150	Horizontal	Pass
1**	1124.250	28.47	-15.66	54.0	25.53	AV	175.00	150	Horizontal	Pass
2	2299.500	43.78	-13.10	74.0	30.22	Peak	226.00	150	Horizontal	Pass
2**	2299.500	31.43	-13.10	54.0	22.57	AV	226.00	150	Horizontal	Pass
3	4478.000	48.10	-3.70	74.0	25.90	Peak	150.00	150	Horizontal	Pass
3**	4478.000	37.21	-3.70	54.0	16.79	AV	150.00	150	Horizontal	Pass
4	5274.000	103.24	-2.43	74.0	-29.24	Peak	105.00	150	Horizontal	N/A
4**	5274.000	94.78	-2.43	54.0	-40.78	AV	105.00	150	Horizontal	N/A
5	10432.238	47.51	-3.45	74.0	26.49	Peak	338.00	150	Horizontal	Pass
5**	10432.238	36.34	-3.45	54.0	17.66	AV	338.00	150	Horizontal	Pass
6	15890.550	47.52	-1.60	74.0	26.48	Peak	319.00	150	Horizontal	Pass
6**	15890.550	41.40	-1.60	54.0	12.60	AV	319.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_20.44.27

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11a CH116 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

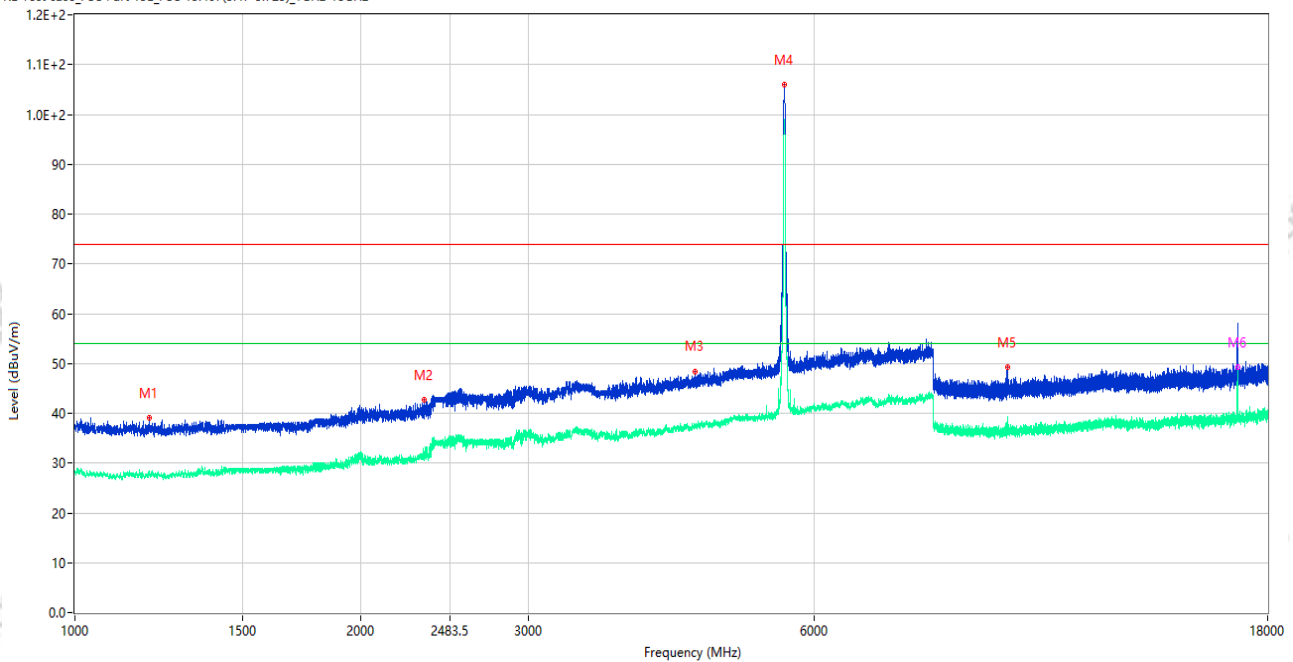

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.500	39.01	-15.71	74.0	34.99	Peak	298.00	150	Vertical	Pass
1**	1196.500	27.96	-15.71	54.0	26.04	AV	298.00	150	Vertical	Pass
2	2329.500	42.75	-12.02	74.0	31.25	Peak	122.00	150	Vertical	Pass
2**	2329.500	31.47	-12.02	54.0	22.53	AV	122.00	150	Vertical	Pass
3	4489.500	48.46	-3.35	74.0	25.54	Peak	360.00	150	Vertical	Pass
3**	4489.500	37.45	-3.35	54.0	16.55	AV	360.00	150	Vertical	Pass
4	5578.500	105.97	-2.88	74.0	-31.97	Peak	38.00	150	Vertical	N/A
4**	5578.500	98.02	-2.88	54.0	-44.02	AV	38.00	150	Vertical	N/A
5	9575.099	49.25	-3.46	74.0	24.75	Peak	288.00	150	Vertical	Pass
5**	9575.099	36.84	-3.46	54.0	17.16	AV	288.00	150	Vertical	Pass
6	16744.463	54.45	-1.80	74.0	19.55	Peak	92.00	150	Vertical	Pass
6**	16744.463	49.17	-1.80	54.0	4.83	AV	92.00	150	Vertical	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_20.49.34

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11a CH116 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

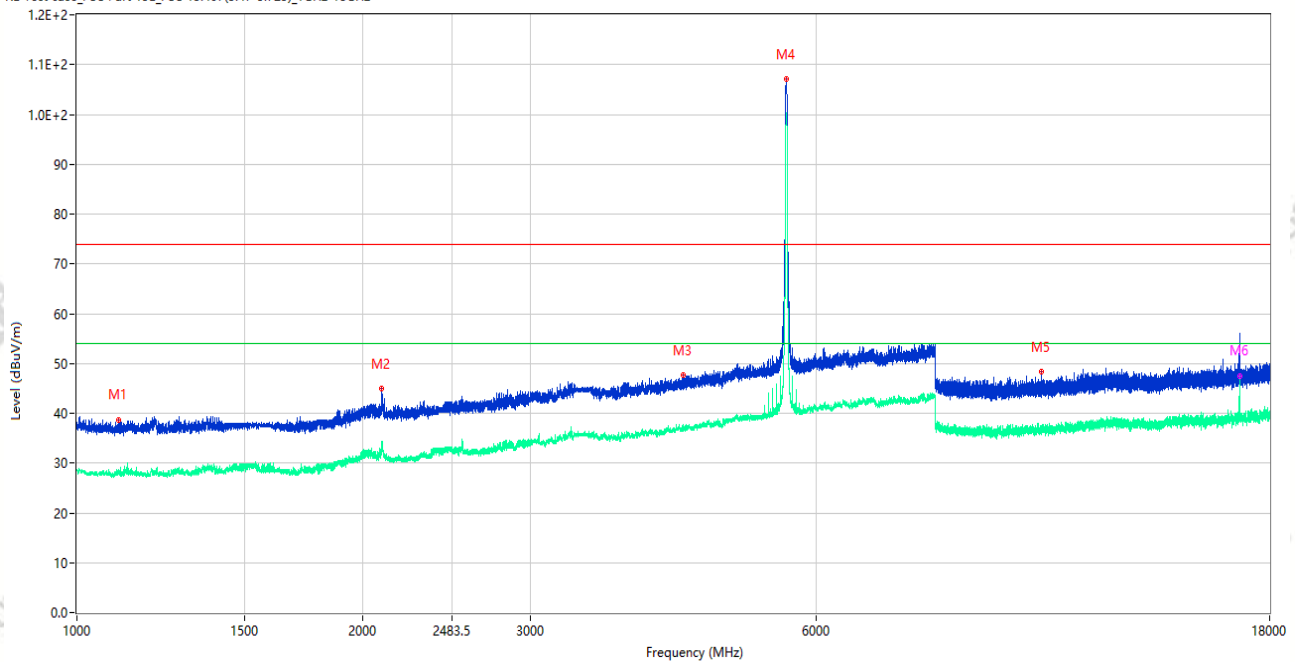


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1106.000	38.67	-15.76	74.0	35.33	Peak	139.00	150	Horizontal	Pass
1**	1106.000	28.77	-15.76	54.0	25.23	AV	139.00	150	Horizontal	Pass
2	2094.250	44.87	-13.64	74.0	29.13	Peak	103.00	150	Horizontal	Pass
2**	2094.250	33.43	-13.64	54.0	20.57	AV	103.00	150	Horizontal	Pass
3	4346.000	47.72	-3.16	74.0	26.28	Peak	267.00	150	Horizontal	Pass
3**	4346.000	36.92	-3.16	54.0	17.08	AV	267.00	150	Horizontal	Pass
4	5581.000	107.02	-2.85	74.0	-33.02	Peak	103.00	150	Horizontal	N/A
4**	5581.000	99.33	-2.85	54.0	-45.33	AV	103.00	150	Horizontal	N/A
5	10361.463	48.35	-3.11	74.0	25.65	Peak	6.00	150	Horizontal	Pass
5**	10361.463	36.61	-3.11	54.0	17.39	AV	6.00	150	Horizontal	Pass
6	16740.262	53.09	-1.66	74.0	20.91	Peak	220.00	150	Horizontal	Pass
6**	16740.262	47.55	-1.66	54.0	6.45	AV	220.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_20.37.58

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ac20 CH116
		P=18.5	
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

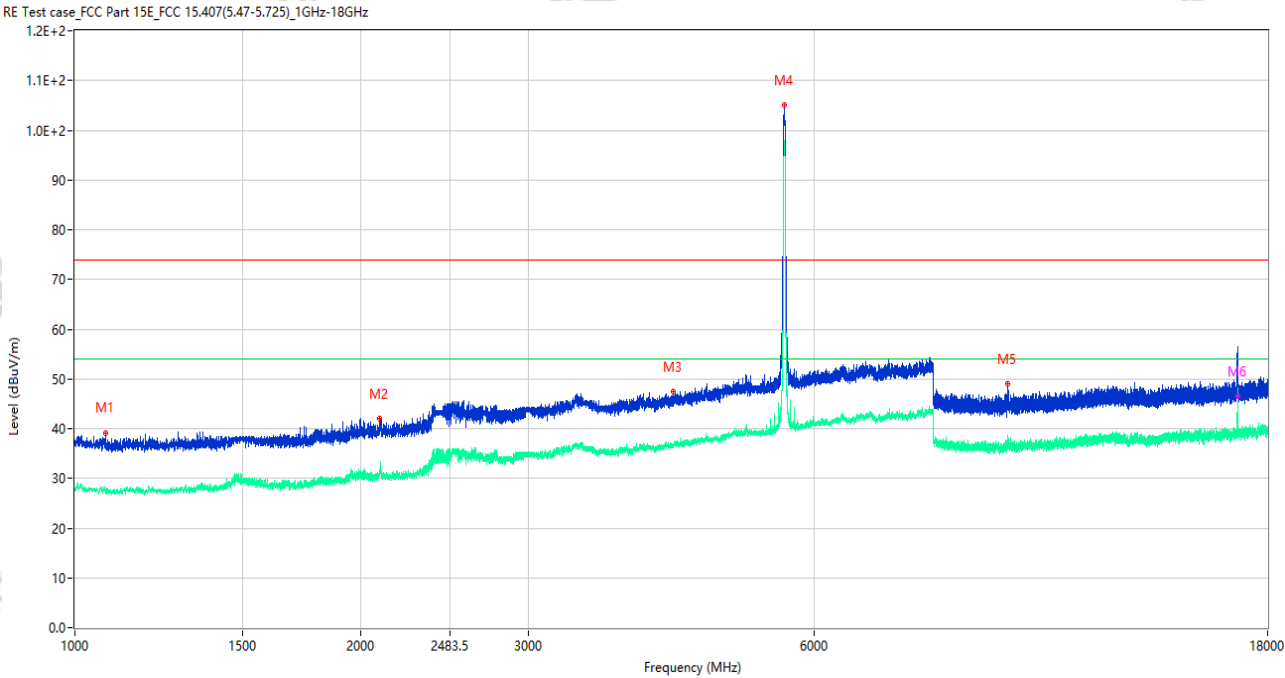


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1076.250	39.20	-15.43	74.0	34.80	Peak	20.00	150	Vertical	Pass
1**	1076.250	27.47	-15.43	54.0	26.53	AV	20.00	150	Vertical	Pass
2	2094.500	42.11	-13.64	74.0	31.89	Peak	301.00	150	Vertical	Pass
2**	2094.500	31.48	-13.64	54.0	22.52	AV	301.00	150	Vertical	Pass
3	4263.000	47.51	-3.88	74.0	26.49	Peak	50.00	150	Vertical	Pass
3**	4263.000	36.60	-3.88	54.0	17.40	AV	50.00	150	Vertical	Pass
4	5581.500	105.11	-2.85	74.0	-31.11	Peak	43.00	150	Vertical	N/A
4**	5581.500	97.73	-2.85	54.0	-43.73	AV	43.00	150	Vertical	N/A
5	9579.612	49.08	-3.42	74.0	24.92	Peak	110.00	150	Vertical	Pass
5**	9579.612	37.48	-3.42	54.0	16.52	AV	110.00	150	Vertical	Pass
6	16737.375	50.86	-1.64	74.0	23.14	Peak	346.00	150	Vertical	Pass
6**	16737.375	44.82	-1.64	54.0	9.18	AV	346.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080119
Test Time: 2026-08-22_20.33.02

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ac20 CH116
			P=18.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

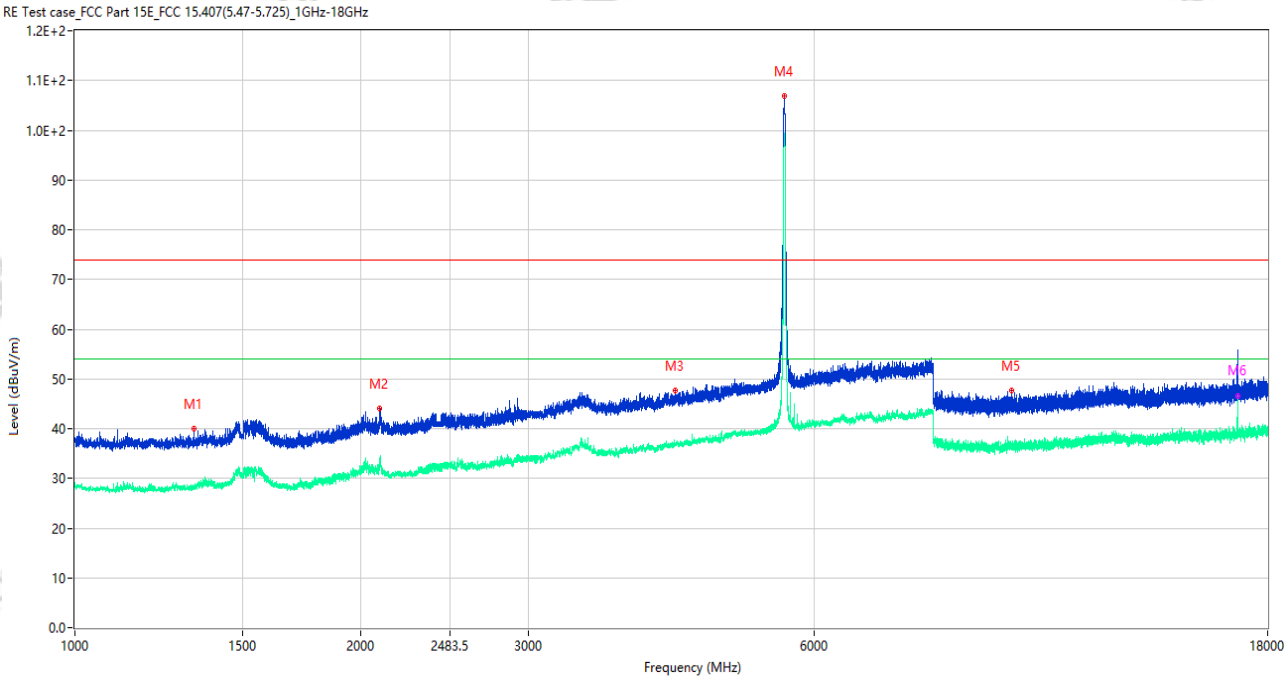

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1335.250	39.93	-16.04	74.0	34.07	Peak	130.00	150	Horizontal	Pass
1**	1335.250	28.16	-16.04	54.0	25.84	AV	130.00	150	Horizontal	Pass
2	2093.500	44.11	-13.64	74.0	29.89	Peak	183.00	150	Horizontal	Pass
2**	2093.500	32.90	-13.64	54.0	21.10	AV	183.00	150	Horizontal	Pass
3	4288.500	47.60	-3.99	74.0	26.40	Peak	2.00	150	Horizontal	Pass
3**	4288.500	37.10	-3.99	54.0	16.90	AV	2.00	150	Horizontal	Pass
4	5578.000	106.90	-2.89	74.0	-32.90	Peak	260.00	150	Horizontal	N/A
4**	5578.000	98.65	-2.89	54.0	-44.65	AV	260.00	150	Horizontal	N/A
5	9674.138	47.62	-3.58	74.0	26.38	Peak	305.00	150	Horizontal	Pass
5**	9674.138	36.72	-3.58	54.0	17.28	AV	305.00	150	Horizontal	Pass
6	16736.850	51.75	-1.59	74.0	22.25	Peak	221.00	150	Horizontal	Pass
6**	16736.850	46.66	-1.59	54.0	7.34	AV	221.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_20.22.41

EUT Name: A6Go Smart Payment Terminal

Temp.(°C): 23.2

Model Number: K1152

Humidity (%RH): 51

Sample Number: CC26080004-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac40 CH118

P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: S05+数据线: S05

RE Test case FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

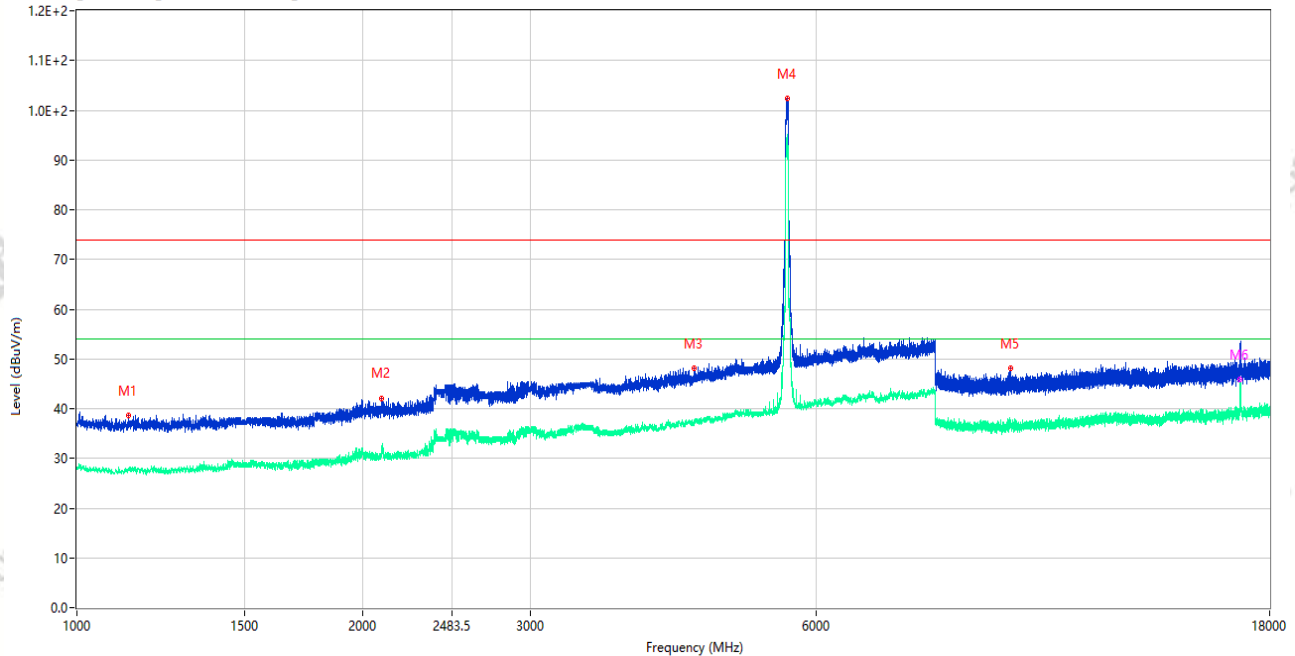

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1134.250	38.69	-15.55	74.0	35.31	Peak	308.00	150	Vertical	Pass
1**	1134.250	27.95	-15.55	54.0	26.05	AV	308.00	150	Vertical	Pass
2	2093.250	42.12	-13.64	74.0	31.88	Peak	70.00	150	Vertical	Pass
2**	2093.250	31.11	-13.64	54.0	22.89	AV	70.00	150	Vertical	Pass
3	4464.500	48.21	-3.54	74.0	25.79	Peak	66.00	150	Vertical	Pass
3**	4464.500	37.41	-3.54	54.0	16.59	AV	66.00	150	Vertical	Pass
4	5587.500	102.43	-2.84	74.0	-28.43	Peak	35.00	150	Vertical	N/A
4**	5587.500	94.63	-2.84	54.0	-40.63	AV	35.00	150	Vertical	N/A
5	9598.612	48.08	-3.43	74.0	25.92	Peak	112.00	150	Vertical	Pass
5**	9598.612	36.13	-3.43	54.0	17.87	AV	112.00	150	Vertical	Pass
6	16762.838	53.11	-1.53	74.0	20.89	Peak	94.00	150	Vertical	Pass
6**	16762.838	45.92	-1.53	54.0	8.08	AV	94.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_20.27.54

EUT Name: A6Go Smart Payment Terminal

Temp.(°C): 23.2

Model Number: K1152

Humidity (%RH): 51

Sample Number: CC26080004-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac40 CH118

P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: S05+数据线: S05

RE Test case FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

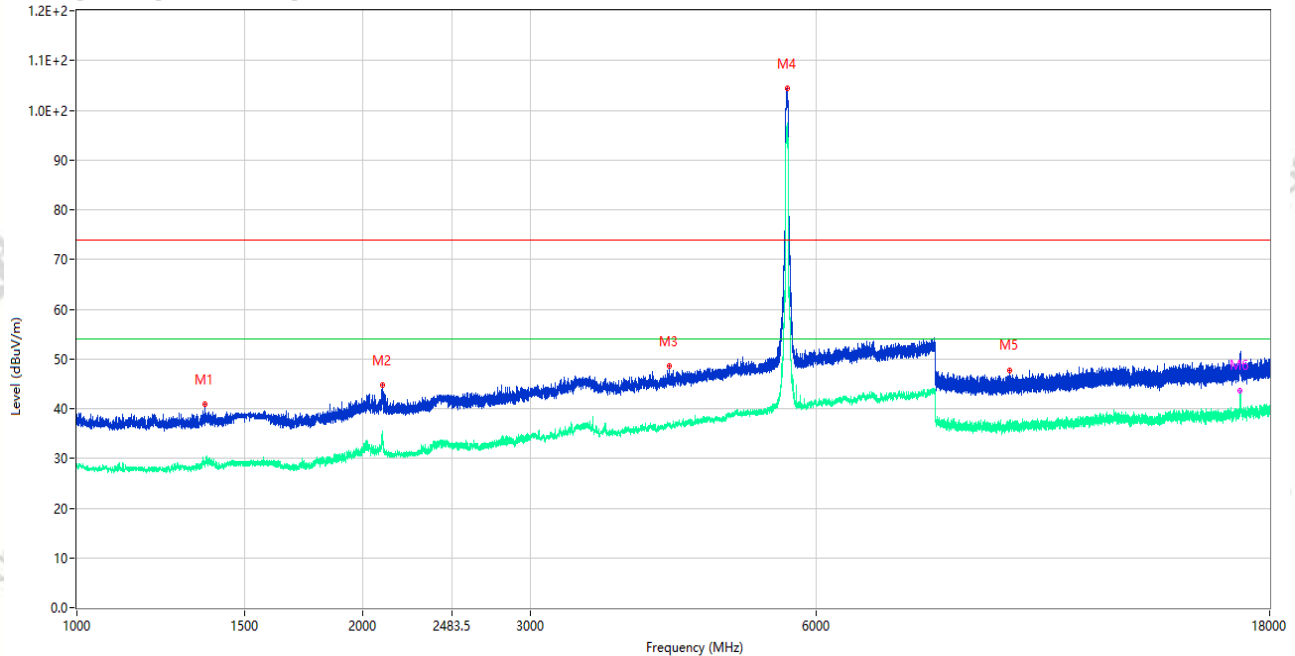


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1364.750	40.79	-15.85	74.0	33.21	Peak	130.00	150	Horizontal	Pass
1**	1364.750	28.90	-15.85	54.0	25.10	AV	130.00	150	Horizontal	Pass
2	2097.250	44.71	-13.59	74.0	29.29	Peak	182.00	150	Horizontal	Pass
2**	2097.250	33.16	-13.59	54.0	20.84	AV	182.00	150	Horizontal	Pass
3	4205.500	48.59	-3.22	74.0	25.41	Peak	217.00	150	Horizontal	Pass
3**	4205.500	36.96	-3.22	54.0	17.04	AV	217.00	150	Horizontal	Pass
4	5587.500	104.36	-2.84	74.0	-30.36	Peak	268.00	150	Horizontal	N/A
4**	5587.500	96.88	-2.84	54.0	-42.88	AV	268.00	150	Horizontal	N/A
5	9589.349	47.78	-3.54	74.0	26.22	Peak	0.00	150	Horizontal	Pass
5**	9589.349	36.69	-3.54	54.0	17.31	AV	0.00	150	Horizontal	Pass
6	16762.838	49.30	-1.53	74.0	24.70	Peak	92.00	150	Horizontal	Pass
6**	16762.838	43.70	-1.53	54.0	10.30	AV	92.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_17.54.03

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ac80 CH122 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

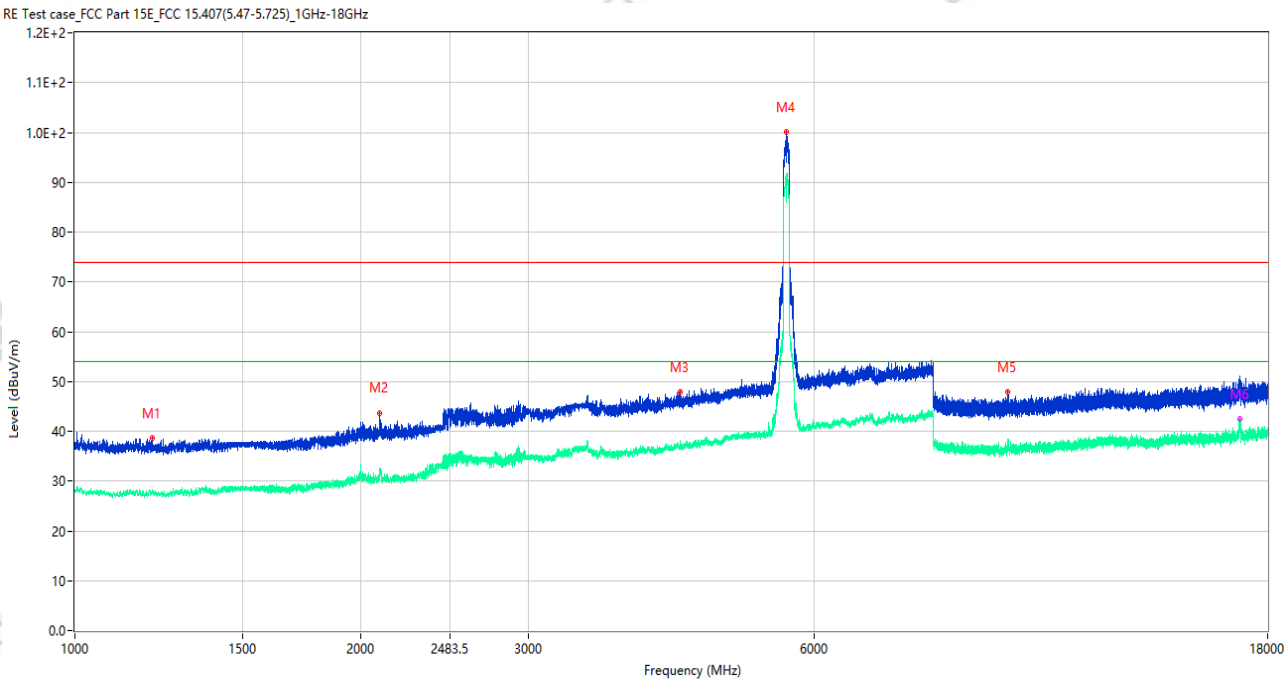

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1206.750	38.63	-15.79	74.0	35.37	Peak	77.00	150	Vertical	Pass
1**	1206.750	27.83	-15.79	54.0	26.17	AV	77.00	150	Vertical	Pass
2	2094.500	43.64	-13.64	74.0	30.36	Peak	48.00	150	Vertical	Pass
2**	2094.500	31.24	-13.64	54.0	22.76	AV	48.00	150	Vertical	Pass
3	4340.000	47.86	-3.08	74.0	26.14	Peak	0.00	150	Vertical	Pass
3**	4340.000	37.20	-3.08	54.0	16.80	AV	0.00	150	Vertical	Pass
4	5612.500	100.15	-2.40	74.0	-26.15	Peak	40.00	150	Vertical	N/A
4**	5612.500	91.52	-2.40	54.0	-37.52	AV	40.00	150	Vertical	N/A
5	9576.287	47.81	-3.43	74.0	26.19	Peak	91.00	150	Vertical	Pass
5**	9576.287	36.99	-3.43	54.0	17.01	AV	91.00	150	Vertical	Pass
6	16824.001	49.03	-1.22	74.0	24.97	Peak	116.00	150	Vertical	Pass
6**	16824.001	42.45	-1.22	54.0	11.55	AV	116.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_17.48.12

EUT Name: A6Go Smart Payment Terminal

Temp.(°C): 23.2

Model Number: K1152

Humidity (%RH): 51

Sample Number: CC26080004-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH122 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

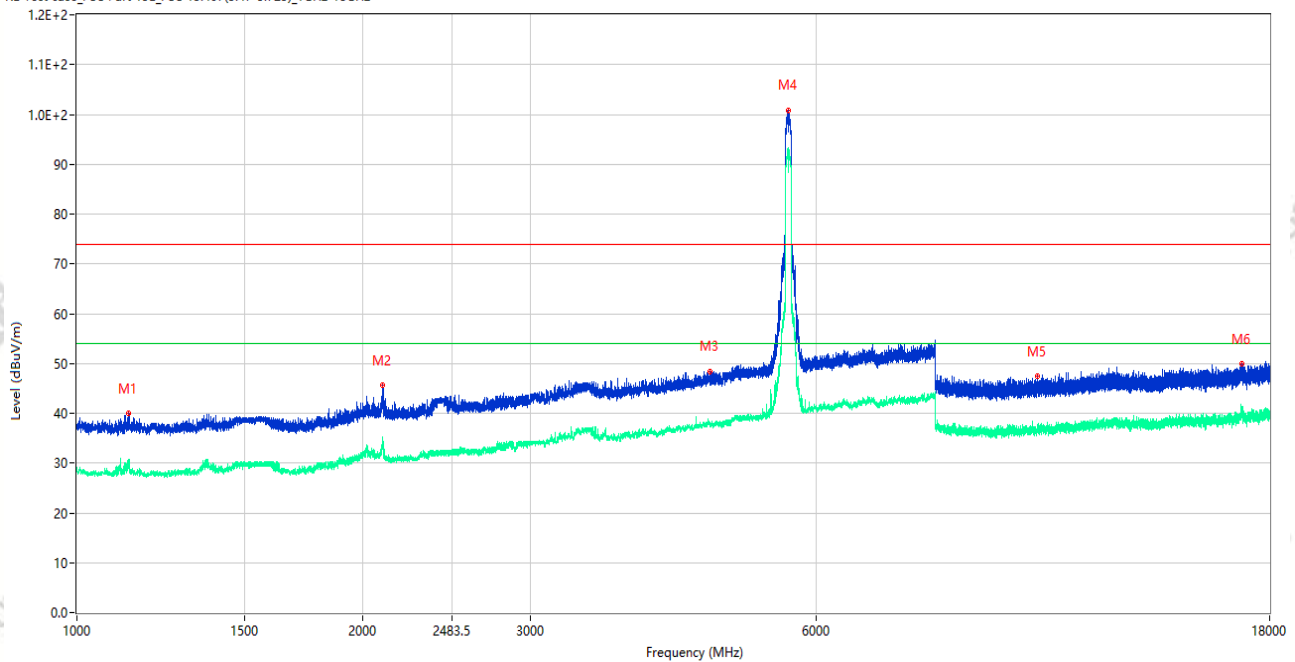

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1133.750	40.03	-15.57	74.0	33.97	Peak	170.00	150	Horizontal	Pass
1**	1133.750	30.35	-15.57	54.0	23.65	AV	170.00	150	Horizontal	Pass
2	2099.250	45.60	-13.53	74.0	28.40	Peak	178.00	150	Horizontal	Pass
2**	2099.250	33.18	-13.53	54.0	20.82	AV	178.00	150	Horizontal	Pass
3	4642.500	48.46	-3.13	74.0	25.54	Peak	77.00	150	Horizontal	Pass
3**	4642.500	37.39	-3.13	54.0	16.61	AV	77.00	150	Horizontal	Pass
4	5612.000	100.90	-2.42	74.0	-26.90	Peak	269.00	150	Horizontal	N/A
4**	5612.000	92.81	-2.42	54.0	-38.81	AV	269.00	150	Horizontal	N/A
5	10243.425	47.39	-3.30	74.0	26.61	Peak	0.00	150	Horizontal	Pass
5**	10243.425	37.00	-3.30	54.0	17.00	AV	0.00	150	Horizontal	Pass
6	16845.000	49.97	-1.08	74.0	24.03	Peak	0.00	150	Horizontal	Pass
6**	16845.000	39.94	-1.08	54.0	14.06	AV	0.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_19.08.24

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11a CH157 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

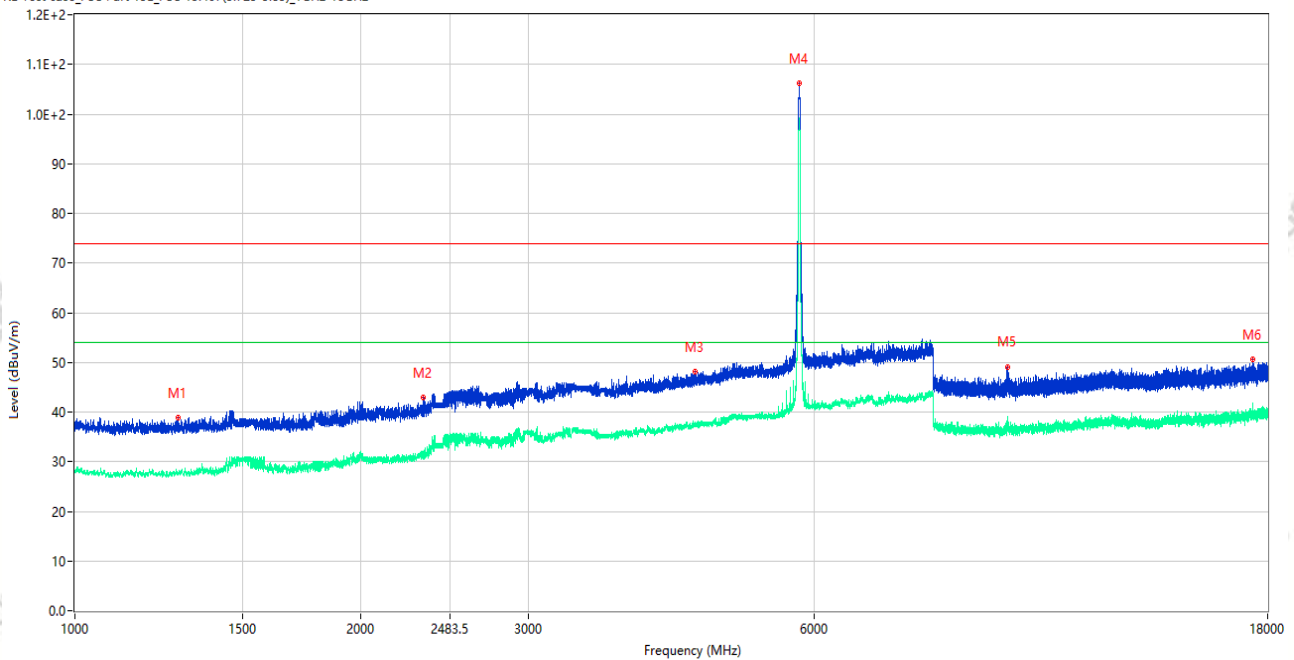

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1283.750	38.86	-15.94	74.0	35.14	Peak	23.00	150	Vertical	Pass
1**	1283.750	27.41	-15.94	54.0	26.59	AV	23.00	150	Vertical	Pass
2	2327.500	42.89	-12.09	74.0	31.11	Peak	3.00	150	Vertical	Pass
2**	2327.500	31.67	-12.09	54.0	22.33	AV	3.00	150	Vertical	Pass
3	4495.000	48.03	-3.24	74.0	25.97	Peak	265.00	150	Vertical	Pass
3**	4495.000	37.11	-3.24	54.0	16.89	AV	265.00	150	Vertical	Pass
4	5789.000	106.18	-1.53	74.0	-32.18	Peak	182.00	150	Vertical	N/A
4**	5789.000	98.64	-1.53	54.0	-44.64	AV	182.00	150	Vertical	N/A
5	9584.600	49.14	-3.48	74.0	24.86	Peak	106.00	150	Vertical	Pass
5**	9584.600	37.79	-3.48	54.0	16.21	AV	106.00	150	Vertical	Pass
6	17354.250	50.59	-0.26	74.0	23.41	Peak	140.00	150	Vertical	Pass
6**	17354.250	40.36	-0.26	54.0	13.64	AV	140.00	150	Vertical	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_19.18.42

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11a CH157 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

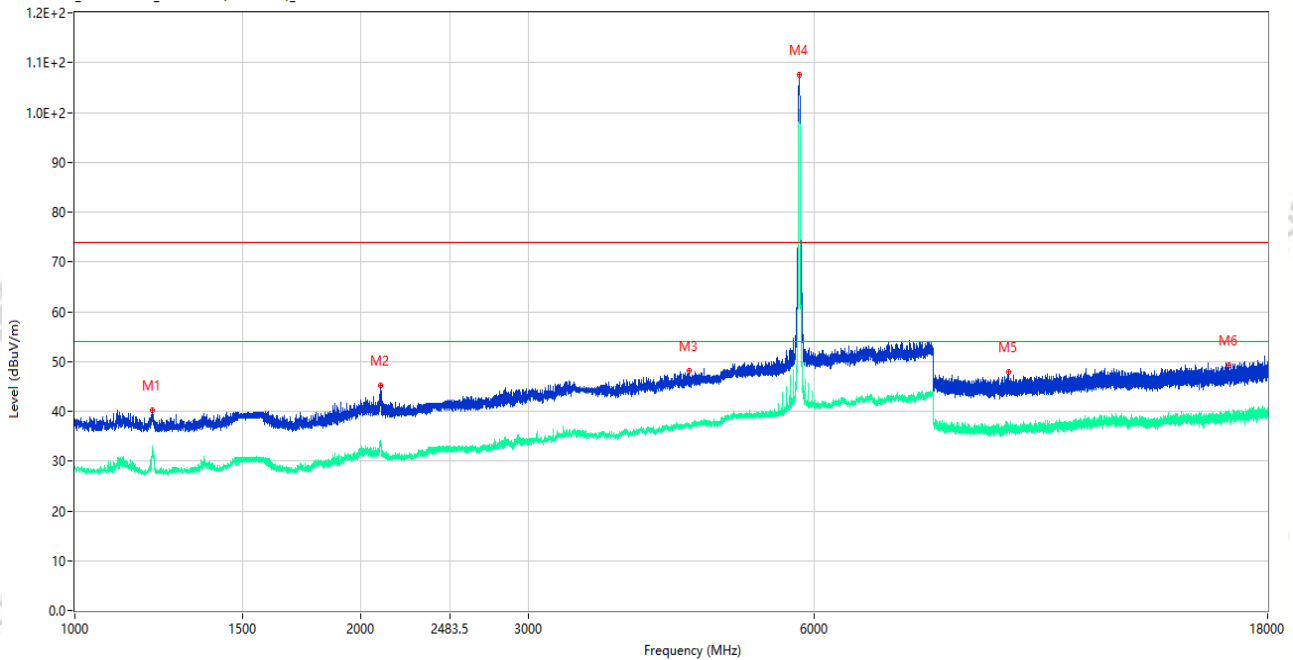

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1207.000	40.18	-15.80	74.0	33.82	Peak	2.00	150	Horizontal	Pass
1**	1207.000	32.22	-15.80	54.0	21.78	AV	2.00	150	Horizontal	Pass
2	2098.000	45.15	-13.59	74.0	28.85	Peak	214.00	150	Horizontal	Pass
2**	2098.000	33.12	-13.59	54.0	20.88	AV	214.00	150	Horizontal	Pass
3	4432.000	48.20	-3.03	74.0	25.80	Peak	120.00	150	Horizontal	Pass
3**	4432.000	36.82	-3.03	54.0	17.18	AV	120.00	150	Horizontal	Pass
4	5783.500	107.51	-1.54	74.0	-33.51	Peak	195.00	150	Horizontal	N/A
4**	5783.500	100.06	-1.54	54.0	-46.06	AV	195.00	150	Horizontal	N/A
5	9603.125	47.85	-3.42	74.0	26.15	Peak	214.00	150	Horizontal	Pass
5**	9603.125	36.11	-3.42	54.0	17.89	AV	214.00	150	Horizontal	Pass
6	16392.974	49.28	-1.17	74.0	24.72	Peak	0.00	150	Horizontal	Pass
6**	16392.974	38.97	-1.17	54.0	15.03	AV	0.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_19.28.51

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n20 CH157 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

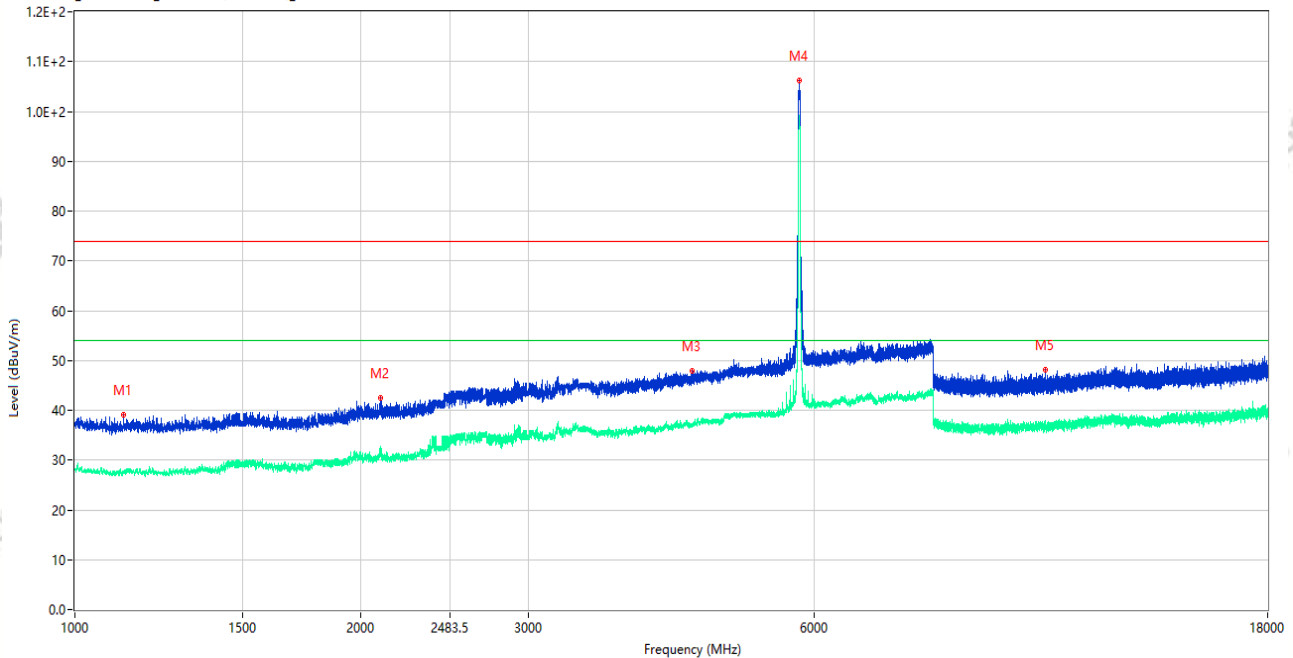

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.250	39.02	-15.64	74.0	34.98	Peak	105.00	150	Vertical	Pass
1**	1125.250	27.90	-15.64	54.0	26.10	AV	105.00	150	Vertical	Pass
2	2099.750	42.39	-13.53	74.0	31.61	Peak	36.00	150	Vertical	Pass
2**	2099.750	32.11	-13.53	54.0	21.89	AV	36.00	150	Vertical	Pass
3	4466.500	47.98	-3.62	74.0	26.02	Peak	255.00	150	Vertical	Pass
3**	4466.500	36.85	-3.62	54.0	17.15	AV	255.00	150	Vertical	Pass
4	5787.000	106.26	-1.54	74.0	-32.26	Peak	189.00	150	Vertical	N/A
4**	5787.000	98.76	-1.54	54.0	-44.76	AV	189.00	150	Vertical	N/A
5	10494.463	48.07	-3.18	74.0	25.93	Peak	72.00	150	Vertical	Pass
5**	10494.463	37.26	-3.18	54.0	16.74	AV	72.00	150	Vertical	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_19.23.52

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n20 CH157 P=19
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

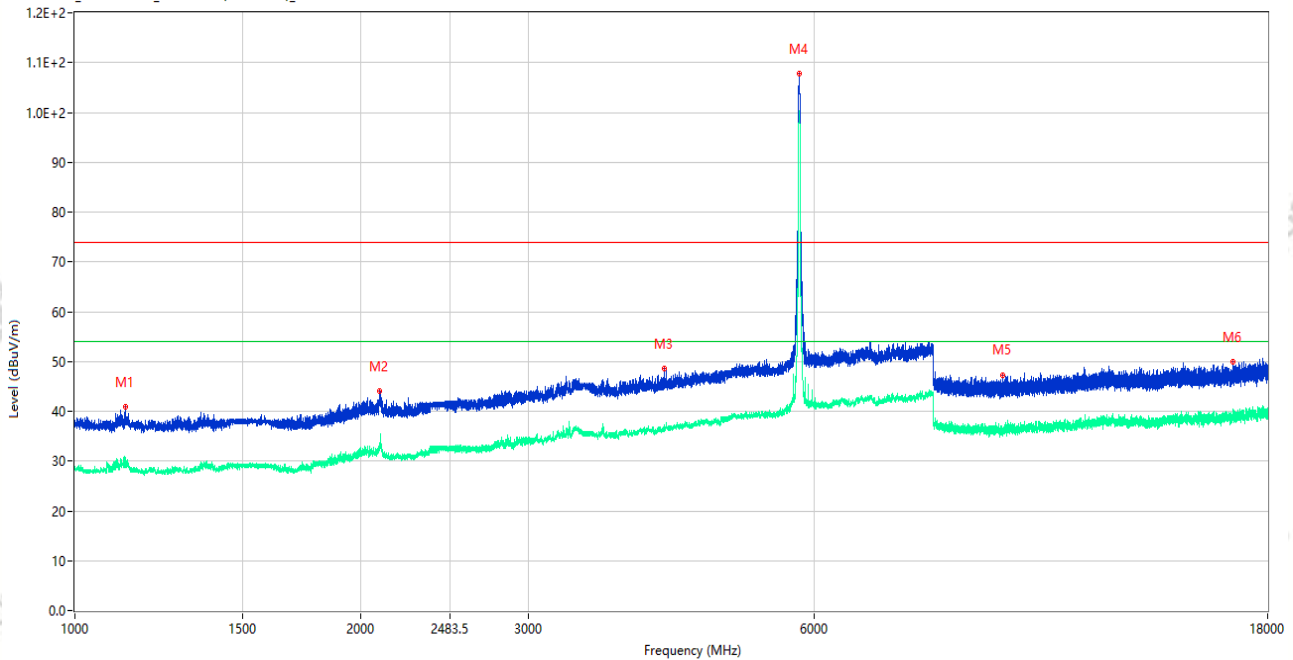

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1131.500	40.87	-15.53	74.0	33.13	Peak	138.00	150	Horizontal	Pass
1**	1131.500	30.25	-15.53	54.0	23.75	AV	138.00	150	Horizontal	Pass
2	2094.250	43.99	-13.64	74.0	30.01	Peak	183.00	150	Horizontal	Pass
2**	2094.250	33.03	-13.64	54.0	20.97	AV	183.00	150	Horizontal	Pass
3	4171.500	48.57	-4.29	74.0	25.43	Peak	165.00	150	Horizontal	Pass
3**	4171.500	36.71	-4.29	54.0	17.29	AV	165.00	150	Horizontal	Pass
4	5783.500	107.88	-1.54	74.0	-33.88	Peak	211.00	150	Horizontal	N/A
4**	5783.500	99.86	-1.54	54.0	-45.86	AV	211.00	150	Horizontal	N/A
5	9461.576	47.14	-4.22	74.0	26.86	Peak	142.00	150	Horizontal	Pass
5**	9461.576	36.19	-4.22	54.0	17.81	AV	142.00	150	Horizontal	Pass
6	16557.038	49.99	-0.90	74.0	24.01	Peak	0.00	150	Horizontal	Pass
6**	16557.038	38.92	-0.90	54.0	15.08	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_19.34.17

EUT Name: A6Go Smart Payment Terminal

Temp.(°C): 23.2

Model Number: K1152

Humidity (%RH): 51

Sample Number: CC26080004-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n40 CH151 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

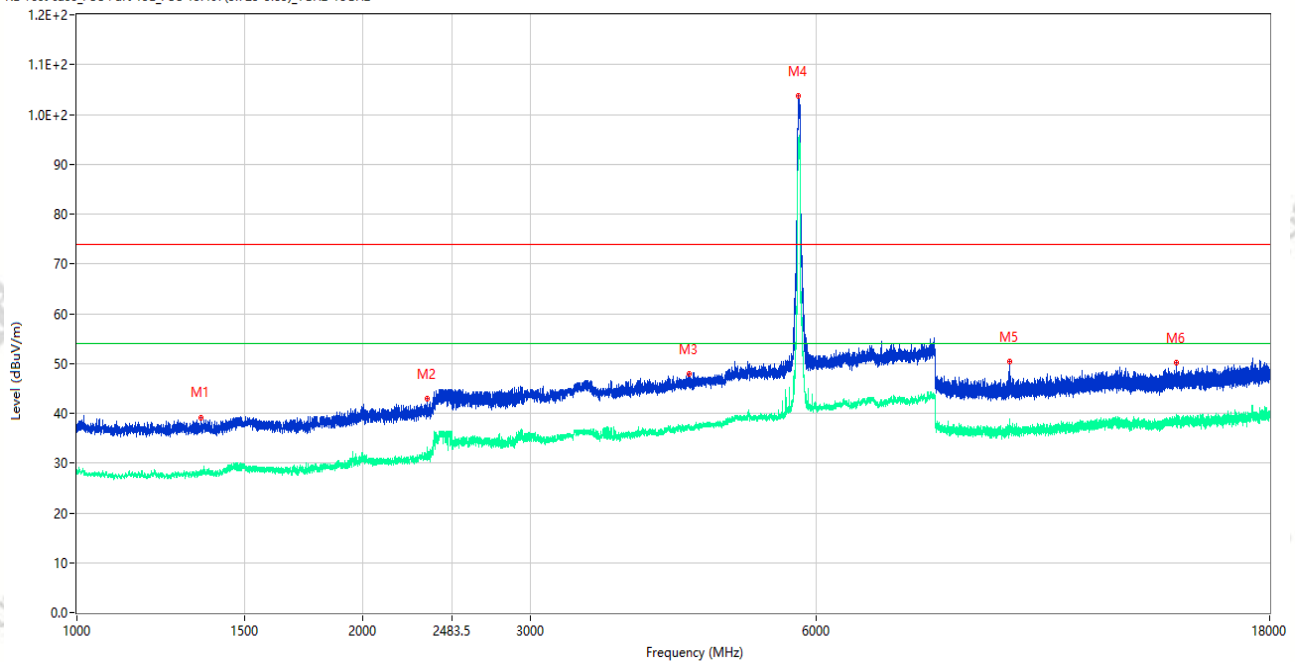


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1352.000	39.19	-15.91	74.0	34.81	Peak	125.00	150	Vertical	Pass
1**	1352.000	28.73	-15.91	54.0	25.27	AV	125.00	150	Vertical	Pass
2	2339.250	42.90	-11.92	74.0	31.10	Peak	110.00	150	Vertical	Pass
2**	2339.250	32.54	-11.92	54.0	21.46	AV	110.00	150	Vertical	Pass
3	4406.000	47.86	-3.01	74.0	26.14	Peak	144.00	150	Vertical	Pass
3**	4406.000	37.39	-3.01	54.0	16.61	AV	144.00	150	Vertical	Pass
4	5749.500	103.71	-2.12	74.0	-29.71	Peak	189.00	150	Vertical	N/A
4**	5749.500	94.93	-2.12	54.0	-40.93	AV	189.00	150	Vertical	N/A
5	9577.238	50.35	-3.39	74.0	23.65	Peak	284.00	150	Vertical	Pass
5**	9577.238	36.38	-3.39	54.0	17.62	AV	284.00	150	Vertical	Pass
6	14368.838	50.22	-1.38	74.0	23.78	Peak	242.00	150	Vertical	Pass
6**	14368.838	38.79	-1.38	54.0	15.21	AV	242.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080119
Test Time: 2026-08-22_19.40.10

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n40 CH151 P=18.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

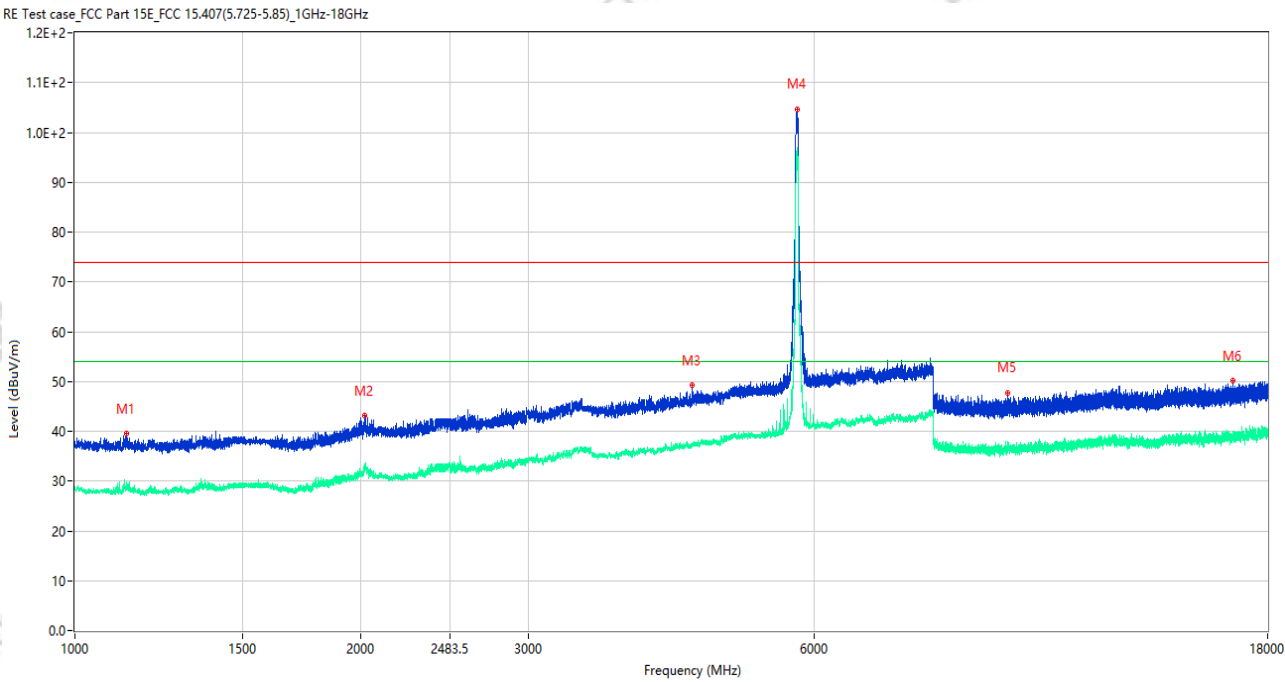

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1133.250	39.55	-15.56	74.0	34.45	Peak	158.00	150	Horizontal	Pass
1**	1133.250	29.21	-15.56	54.0	24.79	AV	158.00	150	Horizontal	Pass
2	2018.250	43.10	-14.19	74.0	30.90	Peak	214.00	150	Horizontal	Pass
2**	2018.250	32.27	-14.19	54.0	21.73	AV	214.00	150	Horizontal	Pass
3	4467.000	49.22	-3.62	74.0	24.78	Peak	358.00	150	Horizontal	Pass
3**	4467.000	37.13	-3.62	54.0	16.87	AV	358.00	150	Horizontal	Pass
4	5752.500	104.73	-2.10	74.0	-30.73	Peak	198.00	150	Horizontal	N/A
4**	5752.500	96.70	-2.10	54.0	-42.70	AV	198.00	150	Horizontal	N/A
5	9581.750	47.79	-3.46	74.0	26.21	Peak	1.00	150	Horizontal	Pass
5**	9581.750	36.79	-3.46	54.0	17.21	AV	1.00	150	Horizontal	Pass
6	16556.250	50.09	-0.86	74.0	23.91	Peak	0.00	150	Horizontal	Pass
6**	16556.250	39.89	-0.86	54.0	14.11	AV	0.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_18.19.39

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ac80 CH155 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

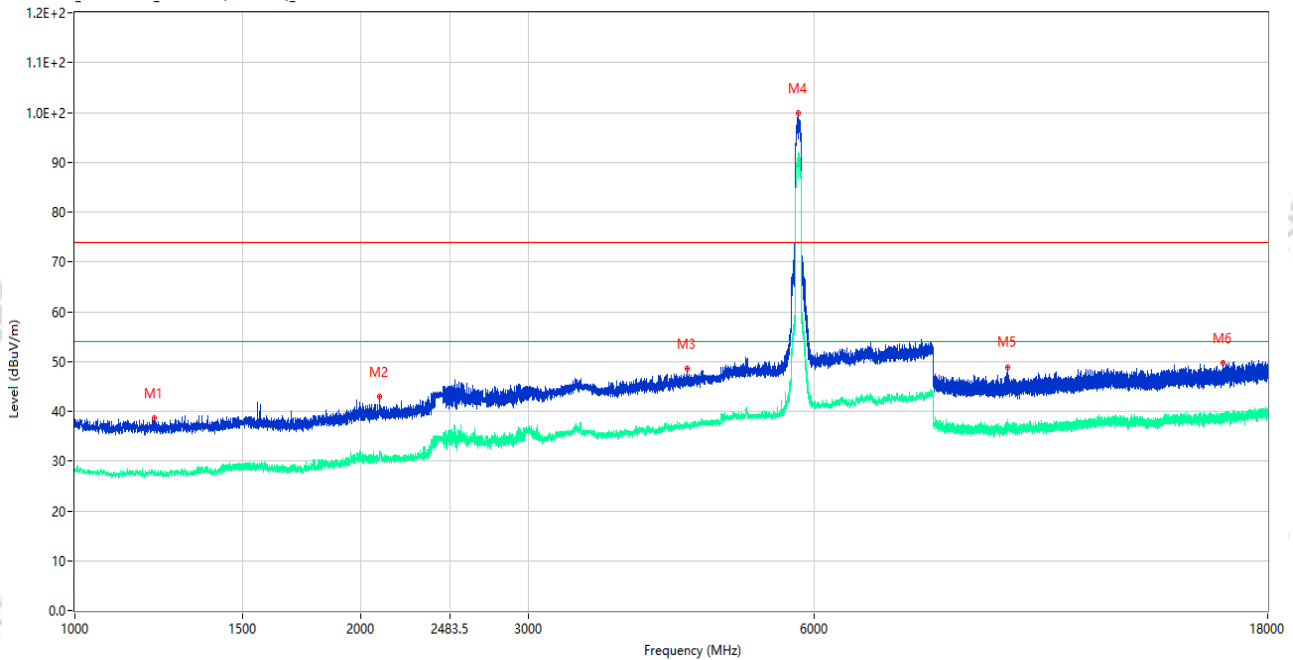

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1210.750	38.59	-15.87	74.0	35.41	Peak	6.00	150	Vertical	Pass
1**	1210.750	27.09	-15.87	54.0	26.91	AV	6.00	150	Vertical	Pass
2	2092.500	42.85	-13.65	74.0	31.15	Peak	89.00	150	Vertical	Pass
2**	2092.500	32.09	-13.65	54.0	21.91	AV	89.00	150	Vertical	Pass
3	4406.500	48.63	-3.01	74.0	25.37	Peak	182.00	150	Vertical	Pass
3**	4406.500	37.23	-3.01	54.0	16.77	AV	182.00	150	Vertical	Pass
4	5768.500	99.78	-1.70	74.0	-25.78	Peak	182.00	150	Vertical	N/A
4**	5768.500	91.39	-1.70	54.0	-37.39	AV	182.00	150	Vertical	N/A
5	9586.737	48.90	-3.48	74.0	25.10	Peak	107.00	150	Vertical	Pass
5**	9586.737	37.80	-3.48	54.0	16.20	AV	107.00	150	Vertical	Pass
6	16159.612	49.72	-1.16	74.0	24.28	Peak	293.00	150	Vertical	Pass
6**	16159.612	38.59	-1.16	54.0	15.41	AV	293.00	150	Vertical	Pass


Test Result

Project Number: P-CC26080119

Test Time: 2026-08-22_18.14.31

EUT Name:	A6Go Smart Payment Terminal	Temp.(°C):	23.2
Model Number:	K1152	Humidity (%RH):	51
Sample Number:	CC26080004-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ac80 CH155 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: S05+数据线: S05

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

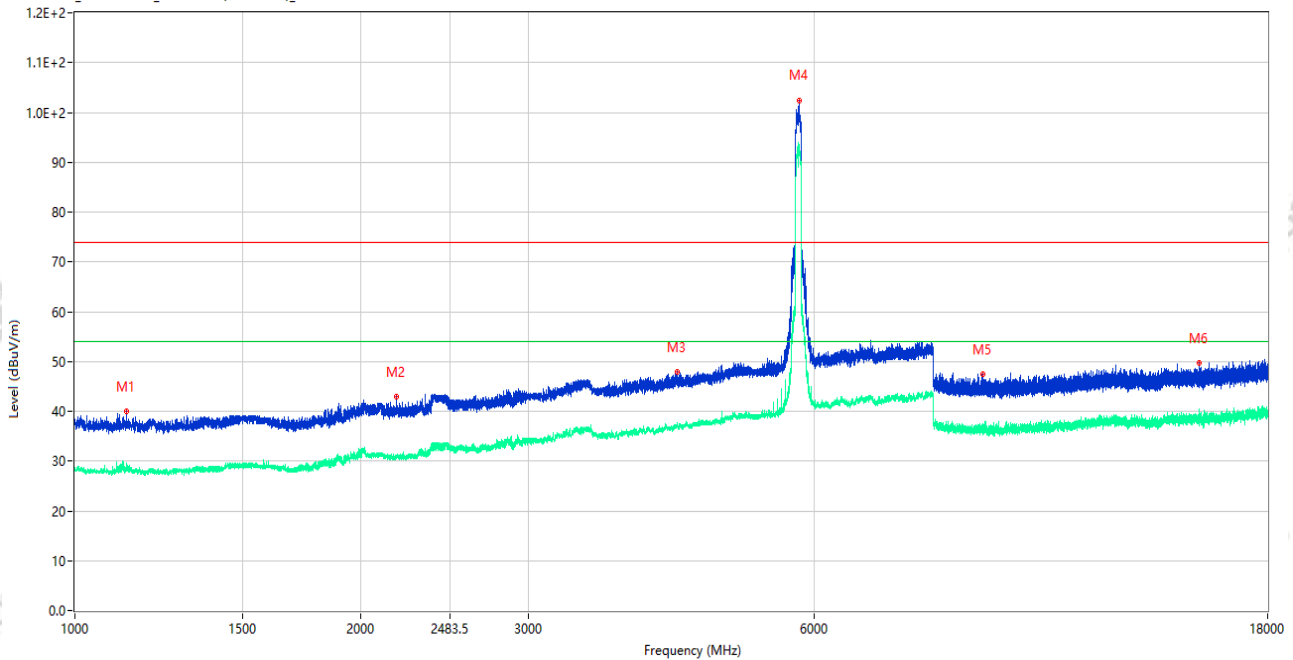

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1133.500	39.95	-15.57	74.0	34.05	Peak	179.00	150	Horizontal	Pass
1**	1133.500	29.25	-15.57	54.0	24.75	AV	179.00	150	Horizontal	Pass
2	2179.000	43.01	-12.88	74.0	30.99	Peak	176.00	150	Horizontal	Pass
2**	2179.000	31.04	-12.88	54.0	22.96	AV	176.00	150	Horizontal	Pass
3	4305.000	47.88	-3.51	74.0	26.12	Peak	339.00	150	Horizontal	Pass
3**	4305.000	37.28	-3.51	54.0	16.72	AV	339.00	150	Horizontal	Pass
4	5782.500	102.48	-1.53	74.0	-28.48	Peak	211.00	150	Horizontal	N/A
4**	5782.500	93.46	-1.53	54.0	-39.46	AV	211.00	150	Horizontal	N/A
5	9021.725	47.35	-4.41	74.0	26.65	Peak	232.00	150	Horizontal	Pass
5**	9021.725	36.63	-4.41	54.0	17.37	AV	232.00	150	Horizontal	Pass
6	15258.450	49.61	-1.01	74.0	24.39	Peak	216.00	150	Horizontal	Pass
6**	15258.450	38.62	-1.01	54.0	15.38	AV	216.00	150	Horizontal	Pass