



802.11ac-VHT20 Power Spectral Density


Channel 100 (5500 MHz)

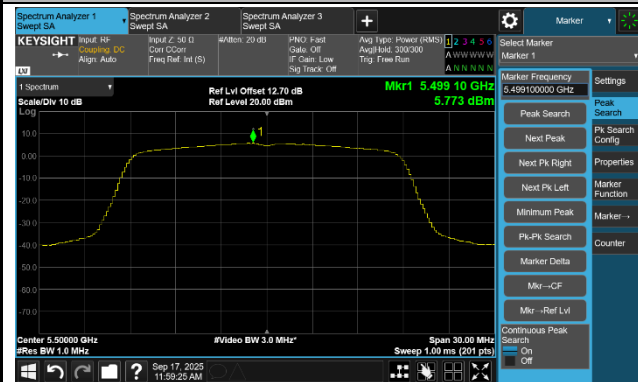


Channel 108 (5540 MHz)

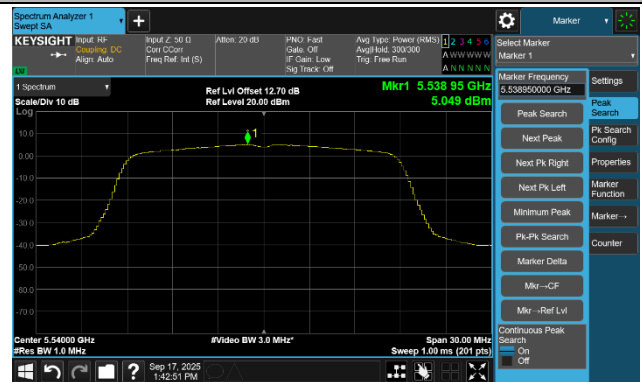


Channel 116 (5580 MHz)

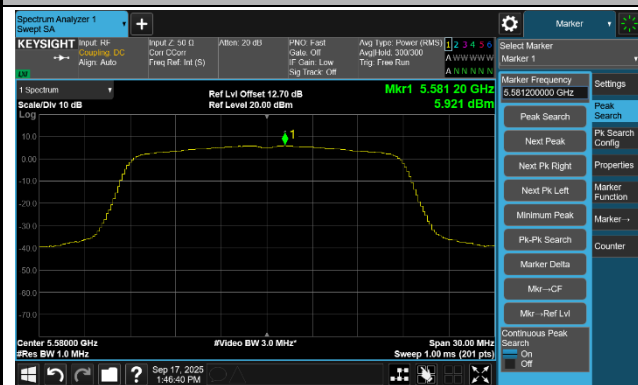


Channel 149 (5745 MHz)

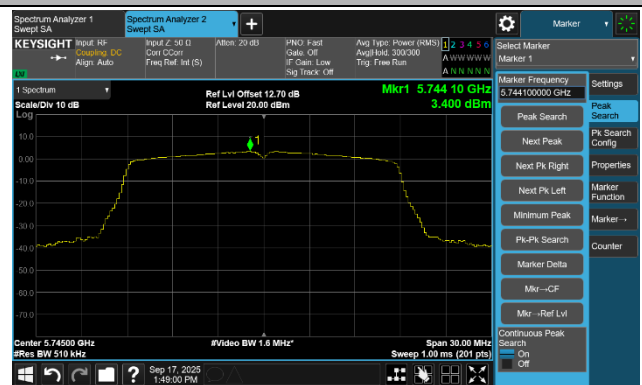

Channel 157 (5785 MHz)

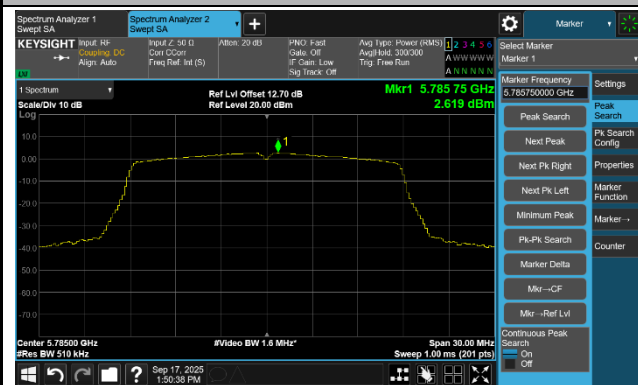


Channel 165 (5825 MHz)

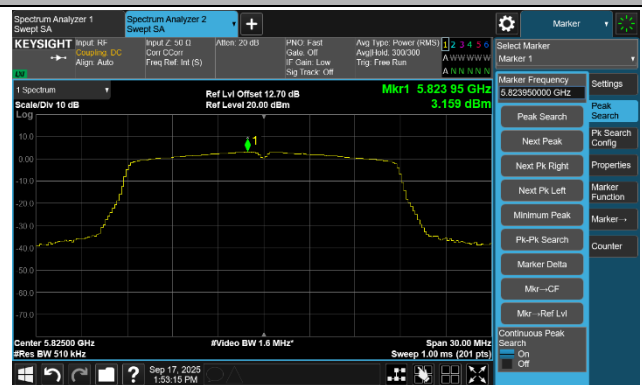


802.11ac-VHT40 Power Spectral Density


Channel 38 (5190 MHz)

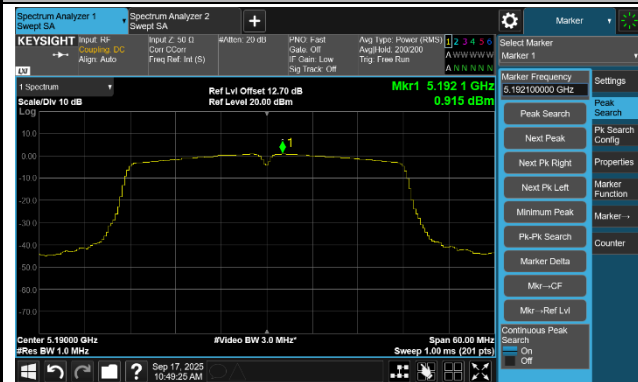

Channel 46 (5230 MHz)

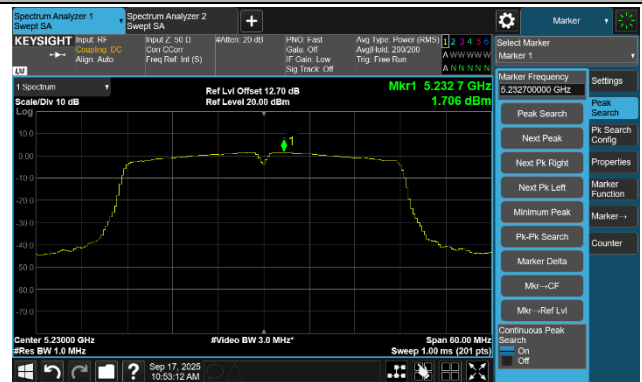


Channel 54 (5270 MHz)

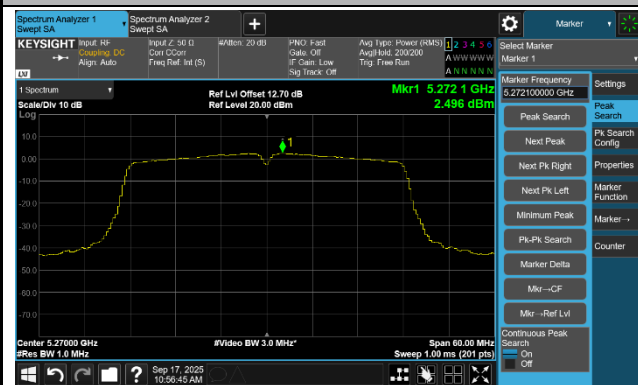


Channel 62 (5310 MHz)



Channel 102 (5510 MHz)

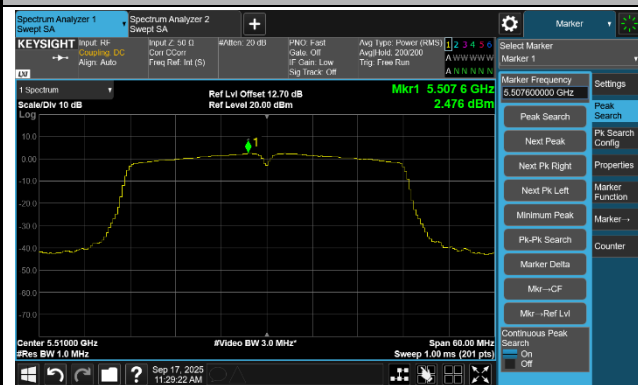


Channel 110 (5550 MHz)

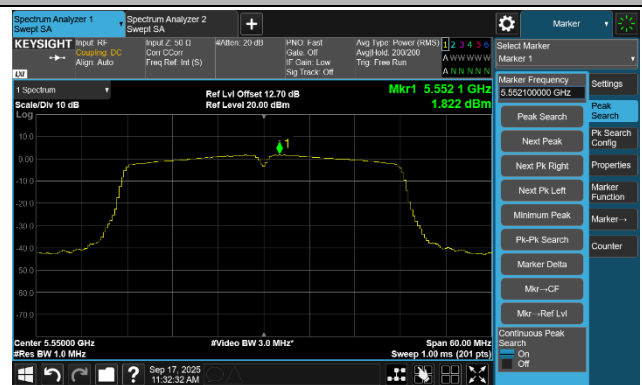


802.11ac-VHT40 Power Spectral Density

Channel 151 (5755 MHz)

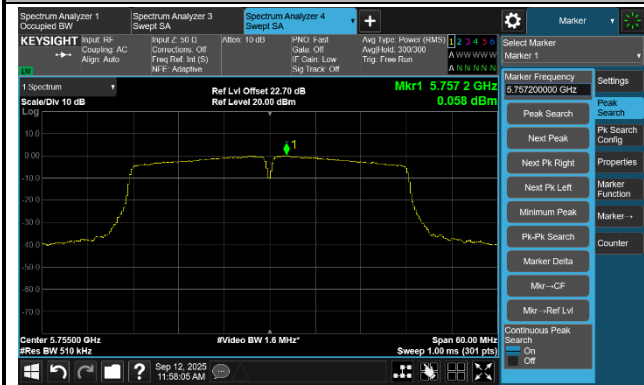


Channel 159 (5795 MHz)

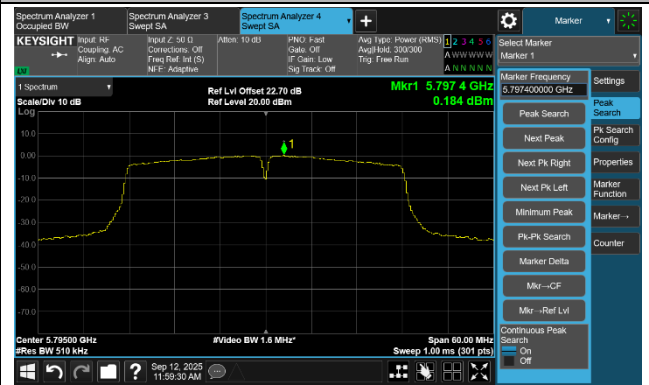


802.11ac-VHT80 Power Spectral Density


Channel 42 (5210 MHz)

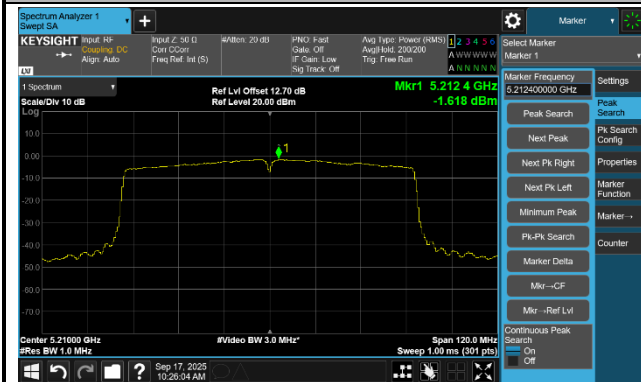


Channel 58 (5290 MHz)

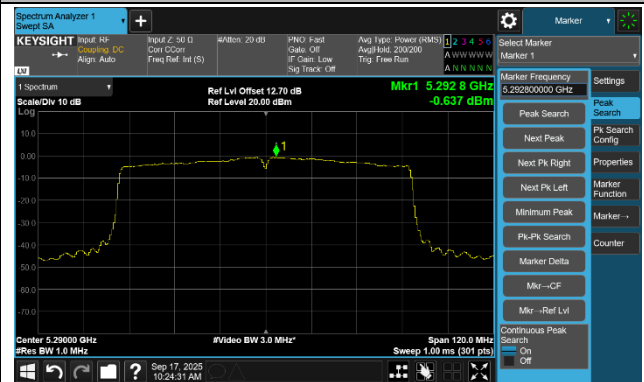

Channel 106 (5530 MHz)

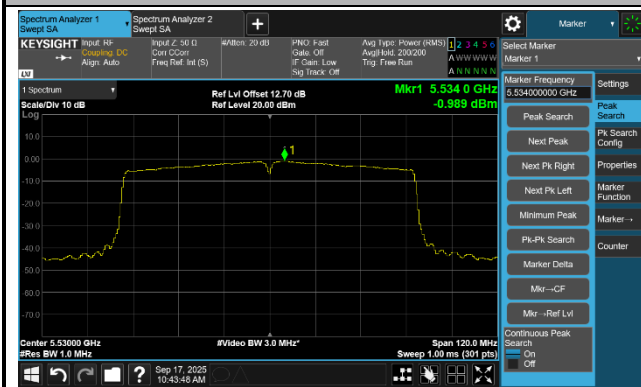

Channel 155 (5775 MHz)

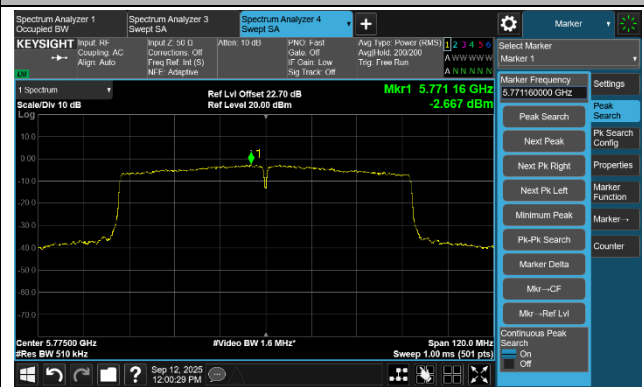

A.6 Frequency Stability Test Result

Test Site	WZ-SR6	Test Engineer	Jeff Yang
Test Date	2025-09-12	Test Mode	5180 MHz (Carrier Mode)

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	3.85	- 30	2.35	2.46	2.59	2.79
		- 20	1.24	1.53	1.85	2.14
		- 10	-0.50	0.23	0.56	0.91
		0	-1.93	-1.51	-1.04	-0.67
		+ 10	-3.07	-2.52	-2.25	-2.11
		+ 20	-3.98	-3.88	-3.69	-3.35
		+ 30	-4.16	-4.17	-4.15	-4.01
		+ 40	-3.73	-3.82	-4.04	-4.12
		+ 50	-3.11	-3.19	-3.36	-3.54
115%	4.4275	+ 20	-3.95	-3.86	-3.64	-3.33
85%	3.27	+ 20	-3.93	-3.84	-3.61	-3.31

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

A.7 Radiated Spurious Emissions Test Result

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	14849.90	38.01	15.70	53.71	68.20	-14.49	Peak	Horizontal
	15540.10	33.86	13.02	46.88	54.00	-7.12	Average	Horizontal
	15540.10	42.51	13.02	55.53	74.00	-18.47	Peak	Horizontal
*	17575.00	36.74	19.12	55.86	68.20	-12.34	Peak	Horizontal
	17991.50	22.87	24.08	46.95	54.00	-7.05	Average	Horizontal
	17991.50	36.26	24.08	60.34	74.00	-13.66	Peak	Horizontal
*	14562.60	36.36	15.86	52.22	68.20	-15.98	Peak	Vertical
	15535.00	31.03	13.05	44.08	54.00	-9.92	Average	Vertical
	15535.00	40.14	13.05	53.19	74.00	-20.81	Peak	Vertical
*	17653.20	36.90	19.36	56.26	68.20	-11.94	Peak	Vertical
	17915.00	23.74	22.87	46.61	54.00	-7.39	Average	Vertical
	17915.00	37.33	22.87	60.20	74.00	-13.80	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14416.40	36.03	15.86	51.89	68.20	-16.31	Peak	Horizontal
	15660.80	35.40	12.93	48.33	54.00	-5.67	Average	Horizontal
	15660.80	47.67	12.93	60.60	74.00	-13.40	Peak	Horizontal
*	17573.30	35.31	19.07	54.38	68.20	-13.82	Peak	Horizontal
	17955.80	22.52	23.31	45.83	54.00	-8.17	Average	Horizontal
	17955.80	35.13	23.31	58.44	74.00	-15.56	Peak	Horizontal
*	14397.70	36.16	15.99	52.15	68.20	-16.05	Peak	Vertical
	15660.80	33.59	12.93	46.52	54.00	-7.48	Average	Vertical
	15660.80	45.98	12.93	58.91	74.00	-15.09	Peak	Vertical
*	17454.30	34.59	18.25	52.84	68.20	-15.36	Peak	Vertical
	17988.10	22.21	24.05	46.26	54.00	-7.74	Average	Vertical
	17988.10	35.75	24.05	59.80	74.00	-14.20	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14549.00	36.24	15.87	52.11	68.20	-16.09	Peak	Horizontal
	15715.20	35.27	12.79	48.06	54.00	-5.94	Average	Horizontal
	15715.20	46.28	12.79	59.07	74.00	-14.93	Peak	Horizontal
*	17382.90	35.86	17.96	53.82	68.20	-14.38	Peak	Horizontal
	17989.80	22.21	24.07	46.28	54.00	-7.72	Average	Horizontal
	17989.80	35.20	24.07	59.27	74.00	-14.73	Peak	Horizontal
*	14625.50	35.95	15.84	51.79	68.20	-16.41	Peak	Vertical
	15720.30	33.85	12.79	46.64	54.00	-7.36	Average	Vertical
	15720.30	46.28	12.79	59.07	74.00	-14.93	Peak	Vertical
*	17590.30	34.91	19.27	54.18	68.20	-14.02	Peak	Vertical
	17932.00	22.97	23.06	46.03	54.00	-7.97	Average	Vertical
	17932.00	36.01	23.06	59.07	74.00	-14.93	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14690.10	36.48	16.06	52.54	68.20	-15.66	Peak	Horizontal
	15779.80	35.02	12.89	47.91	54.00	-6.09	Average	Horizontal
	15779.80	46.73	12.89	59.62	74.00	-14.38	Peak	Horizontal
*	17517.20	35.78	18.56	54.34	68.20	-13.86	Peak	Horizontal
	17984.70	20.51	24.02	44.53	54.00	-9.47	Average	Horizontal
	17984.70	33.92	24.02	57.94	74.00	-16.06	Peak	Horizontal
*	14049.20	36.42	15.33	51.75	68.20	-16.45	Peak	Vertical
	15771.30	33.62	12.85	46.47	54.00	-7.53	Average	Vertical
	15771.30	46.28	12.85	59.13	74.00	-14.87	Peak	Vertical
*	17554.60	36.02	18.82	54.84	68.20	-13.36	Peak	Vertical
	17996.60	22.19	24.13	46.32	54.00	-7.68	Average	Vertical
	17996.60	35.19	24.13	59.32	74.00	-14.68	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14180.10	35.72	15.57	51.29	68.20	-16.91	Peak	Horizontal
	15898.80	34.69	13.33	48.02	54.00	-5.98	Average	Horizontal
	15898.80	46.97	13.33	60.30	74.00	-13.70	Peak	Horizontal
*	17513.80	35.81	18.57	54.38	68.20	-13.82	Peak	Horizontal
	17976.20	20.68	23.77	44.45	54.00	-9.55	Average	Horizontal
	17976.20	34.46	23.77	58.23	74.00	-15.77	Peak	Horizontal
*	14317.80	35.97	15.91	51.88	68.20	-16.32	Peak	Vertical
	15890.30	32.96	13.25	46.21	54.00	-7.79	Average	Vertical
	15890.30	44.77	13.25	58.02	74.00	-15.98	Peak	Vertical
*	17590.30	34.56	19.27	53.83	68.20	-14.37	Peak	Vertical
	17972.80	21.89	23.65	45.54	54.00	-8.46	Average	Vertical
	17972.80	35.14	23.65	58.79	74.00	-15.21	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14283.80	35.61	15.90	51.51	68.20	-16.69	Peak	Horizontal
	15953.20	36.07	13.28	49.35	54.00	-4.65	Average	Horizontal
	15953.20	47.64	13.28	60.92	74.00	-13.08	Peak	Horizontal
*	17603.90	35.41	18.80	54.21	68.20	-13.99	Peak	Horizontal
	17989.80	20.67	24.07	44.74	54.00	-9.26	Average	Horizontal
	17989.80	34.58	24.07	58.65	74.00	-15.35	Peak	Horizontal
*	14372.20	35.14	16.09	51.23	68.20	-16.97	Peak	Vertical
	15961.70	34.50	13.28	47.78	54.00	-6.22	Average	Vertical
	15961.70	47.17	13.28	60.45	74.00	-13.55	Peak	Vertical
*	17546.10	34.41	18.74	53.15	68.20	-15.05	Peak	Vertical
	17979.60	20.53	23.88	44.41	54.00	-9.59	Average	Vertical
	17979.60	34.83	23.88	58.71	74.00	-15.29	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11128.60	35.63	14.37	50.00	74.00	-24.00	Peak	Horizontal
*	15183.10	37.06	14.65	51.71	68.20	-16.49	Peak	Horizontal
*	17362.50	35.92	17.53	53.45	68.20	-14.75	Peak	Horizontal
	17996.60	20.97	24.13	45.10	54.00	-8.90	Average	Horizontal
	17996.60	34.67	24.13	58.80	74.00	-15.20	Peak	Horizontal
	10916.10	35.20	14.96	50.16	74.00	-23.84	Peak	Vertical
*	14547.30	35.99	15.87	51.86	68.20	-16.34	Peak	Vertical
*	17571.60	34.60	19.03	53.63	68.20	-14.57	Peak	Vertical
	17989.80	20.14	24.07	44.21	54.00	-9.79	Average	Vertical
	17989.80	34.29	24.07	58.36	74.00	-15.64	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 108
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11526.40	35.46	14.03	49.49	74.00	-24.51	Peak	Horizontal
*	14362.00	35.77	16.02	51.79	68.20	-16.41	Peak	Horizontal
*	17586.90	34.79	19.34	54.13	68.20	-14.07	Peak	Horizontal
	17998.30	22.09	24.15	46.24	54.00	-7.76	Average	Horizontal
	17998.30	34.03	24.15	58.18	74.00	-15.82	Peak	Horizontal
	10786.90	34.68	14.98	49.66	74.00	-24.34	Peak	Vertical
*	14708.80	36.53	15.89	52.42	68.20	-15.78	Peak	Vertical
*	17622.60	35.48	18.98	54.46	68.20	-13.74	Peak	Vertical
	17991.50	22.26	24.08	46.34	54.00	-7.66	Average	Vertical
	17991.50	34.74	24.08	58.82	74.00	-15.18	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11057.20	35.43	14.56	49.99	74.00	-24.01	Peak	Horizontal
*	14593.20	36.26	15.98	52.24	68.20	-15.96	Peak	Horizontal
*	17651.50	36.34	19.42	55.76	68.20	-12.44	Peak	Horizontal
	17994.90	21.91	24.12	46.03	54.00	-7.97	Average	Horizontal
	17994.90	34.41	24.12	58.53	74.00	-15.47	Peak	Horizontal
	11303.70	36.23	14.19	50.42	74.00	-23.58	Peak	Vertical
*	14571.10	36.52	15.89	52.41	68.20	-15.79	Peak	Vertical
*	17583.50	34.24	19.28	53.52	68.20	-14.68	Peak	Vertical
	17988.10	22.63	24.05	46.68	54.00	-7.32	Average	Vertical
	17988.10	35.66	24.05	59.71	74.00	-14.29	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10856.60	35.88	15.01	50.89	74.00	-23.11	Peak	Horizontal
*	14431.70	36.02	15.88	51.90	68.20	-16.30	Peak	Horizontal
*	17452.60	35.39	18.23	53.62	68.20	-14.58	Peak	Horizontal
	17952.40	22.41	23.27	45.68	54.00	-8.32	Average	Horizontal
	17952.40	35.44	23.27	58.71	74.00	-15.29	Peak	Horizontal
	11211.90	35.89	14.22	50.11	74.00	-23.89	Peak	Vertical
*	14321.20	35.93	15.89	51.82	68.20	-16.38	Peak	Vertical
*	17637.90	35.95	19.63	55.58	68.20	-12.62	Peak	Vertical
	17986.40	21.96	24.03	45.99	54.00	-8.01	Average	Vertical
	17986.40	34.90	24.03	58.93	74.00	-15.07	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10904.20	35.67	14.89	50.56	74.00	-23.44	Peak	Horizontal
*	14226.00	36.41	15.39	51.80	68.20	-16.40	Peak	Horizontal
*	17592.00	35.35	19.24	54.59	68.20	-13.61	Peak	Horizontal
	17986.40	21.93	24.03	45.96	54.00	-8.04	Average	Horizontal
	17986.40	34.54	24.03	58.57	74.00	-15.43	Peak	Horizontal
	11519.60	36.07	14.05	50.12	74.00	-23.88	Peak	Vertical
*	14557.50	35.31	15.86	51.17	68.20	-17.03	Peak	Vertical
*	17537.60	35.61	18.63	54.24	68.20	-13.96	Peak	Vertical
	18000.00	20.79	24.16	44.95	54.00	-9.05	Average	Vertical
	18000.00	34.63	24.16	58.79	74.00	-15.21	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11a - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11225.50	35.94	14.24	50.18	74.00	-23.82	Peak	Horizontal
*	14418.10	36.45	15.84	52.29	68.20	-15.91	Peak	Horizontal
*	17641.30	35.30	19.73	55.03	68.20	-13.17	Peak	Horizontal
	17991.50	20.94	24.08	45.02	54.00	-8.98	Average	Horizontal
	17991.50	35.06	24.08	59.14	74.00	-14.86	Peak	Horizontal
	11378.50	36.38	14.27	50.65	74.00	-23.35	Peak	Vertical
*	14384.10	35.50	16.11	51.61	68.20	-16.59	Peak	Vertical
*	17522.30	35.71	18.54	54.25	68.20	-13.95	Peak	Vertical
	17957.50	21.34	23.33	44.67	54.00	-9.33	Average	Vertical
	17957.50	35.26	23.33	58.59	74.00	-15.41	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14596.60	35.61	15.98	51.59	68.20	-16.61	Peak	Horizontal
	15538.40	33.38	13.02	46.40	54.00	-7.60	Average	Horizontal
	15538.40	46.12	13.02	59.14	74.00	-14.86	Peak	Horizontal
*	17473.00	34.81	18.31	53.12	68.20	-15.08	Peak	Horizontal
	17993.20	21.99	24.10	46.09	54.00	-7.91	Average	Horizontal
	17993.20	35.95	24.10	60.05	74.00	-13.95	Peak	Horizontal
*	14518.40	36.11	15.79	51.90	68.20	-16.30	Peak	Vertical
	15538.40	29.92	13.02	42.94	54.00	-11.06	Average	Vertical
	15538.40	42.40	13.02	55.42	74.00	-18.58	Peak	Vertical
*	17576.70	35.44	19.15	54.59	68.20	-13.61	Peak	Vertical
	17989.80	20.27	24.07	44.34	54.00	-9.66	Average	Vertical
	17989.80	34.33	24.07	58.40	74.00	-15.60	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14710.50	35.76	15.86	51.62	68.20	-16.58	Peak	Horizontal
	15652.30	32.36	12.82	45.18	54.00	-8.82	Average	Horizontal
	15652.30	45.35	12.82	58.17	74.00	-15.83	Peak	Horizontal
*	17534.20	35.63	18.59	54.22	68.20	-13.98	Peak	Horizontal
	17955.80	21.58	23.31	44.89	54.00	-9.11	Average	Horizontal
	17955.80	35.32	23.31	58.63	74.00	-15.37	Peak	Horizontal
*	15127.00	36.78	14.81	51.59	68.20	-16.61	Peak	Vertical
	15648.90	30.82	12.78	43.60	54.00	-10.40	Average	Vertical
	15648.90	44.74	12.78	57.52	74.00	-16.48	Peak	Vertical
*	17476.40	36.39	18.32	54.71	68.20	-13.49	Peak	Vertical
	17994.90	20.37	24.12	44.49	54.00	-9.51	Average	Vertical
	17994.90	34.09	24.12	58.21	74.00	-15.79	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14384.10	35.07	16.11	51.18	68.20	-17.02	Peak	Horizontal
	15713.50	31.05	12.79	43.84	54.00	-10.16	Average	Horizontal
	15713.50	43.59	12.79	56.38	74.00	-17.62	Peak	Horizontal
*	17556.30	35.30	18.83	54.13	68.20	-14.07	Peak	Horizontal
	17994.90	20.42	24.12	44.54	54.00	-9.46	Average	Horizontal
	17994.90	34.33	24.12	58.45	74.00	-15.55	Peak	Horizontal
*	14385.80	35.68	16.10	51.78	68.20	-16.42	Peak	Vertical
	15718.60	29.90	12.78	42.68	54.00	-11.32	Average	Vertical
	15718.60	43.97	12.78	56.75	74.00	-17.25	Peak	Vertical
*	17549.50	34.79	18.77	53.56	68.20	-14.64	Peak	Vertical
	17996.60	20.74	24.13	44.87	54.00	-9.13	Average	Vertical
	17996.60	34.72	24.13	58.85	74.00	-15.15	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14452.10	35.33	16.09	51.42	68.20	-16.78	Peak	Horizontal
	15773.00	33.78	12.84	46.62	54.00	-7.38	Average	Horizontal
	15773.00	46.71	12.84	59.55	74.00	-14.45	Peak	Horizontal
*	17542.70	35.42	18.70	54.12	68.20	-14.08	Peak	Horizontal
	17996.60	21.03	24.13	45.16	54.00	-8.84	Average	Horizontal
	17996.60	34.79	24.13	58.92	74.00	-15.08	Peak	Horizontal
*	14387.50	36.05	16.09	52.14	68.20	-16.06	Peak	Vertical
	15778.10	32.05	12.88	44.93	54.00	-9.07	Average	Vertical
	15778.10	44.07	12.88	56.95	74.00	-17.05	Peak	Vertical
*	17576.70	34.82	19.15	53.97	68.20	-14.23	Peak	Vertical
	17994.90	20.45	24.12	44.57	54.00	-9.43	Average	Vertical
	17994.90	34.45	24.12	58.57	74.00	-15.43	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14404.50	35.90	15.95	51.85	68.20	-16.35	Peak	Horizontal
	15900.50	33.44	13.33	46.77	54.00	-7.23	Average	Horizontal
	15900.50	46.88	13.33	60.21	74.00	-13.79	Peak	Horizontal
*	17515.50	34.71	18.57	53.28	68.20	-14.92	Peak	Horizontal
	17998.30	20.37	24.15	44.52	54.00	-9.48	Average	Horizontal
	17998.30	34.29	24.15	58.44	74.00	-15.56	Peak	Horizontal
*	14686.70	36.11	16.04	52.15	68.20	-16.05	Peak	Vertical
	15898.80	31.64	13.33	44.97	54.00	-9.03	Average	Vertical
	15898.80	43.68	13.33	57.01	74.00	-16.99	Peak	Vertical
*	17586.90	35.14	19.34	54.48	68.20	-13.72	Peak	Vertical
	17989.80	22.07	24.07	46.14	54.00	-7.86	Average	Vertical
	17989.80	35.01	24.07	59.08	74.00	-14.92	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14608.50	36.84	15.90	52.74	68.20	-15.46	Peak	Horizontal
	15968.50	29.53	13.31	42.84	54.00	-11.16	Average	Horizontal
	15968.50	38.12	13.31	51.43	74.00	-22.57	Peak	Horizontal
*	17384.60	35.70	18.01	53.71	68.20	-14.49	Peak	Horizontal
	17996.60	20.18	24.13	44.31	54.00	-9.69	Average	Horizontal
	17996.60	34.69	24.13	58.82	74.00	-15.18	Peak	Horizontal
*	14865.20	35.83	15.68	51.51	68.20	-16.69	Peak	Vertical
	15965.10	29.46	13.29	42.75	54.00	-11.25	Average	Vertical
	15965.10	39.47	13.29	52.76	74.00	-21.24	Peak	Vertical
*	17297.90	36.06	17.08	53.14	68.20	-15.06	Peak	Vertical
	17955.80	20.36	23.31	43.67	54.00	-10.33	Average	Vertical
	17955.80	35.90	23.31	59.21	74.00	-14.79	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10802.20	35.45	14.98	50.43	74.00	-23.57	Peak	Horizontal
*	14302.50	36.13	15.84	51.97	68.20	-16.23	Peak	Horizontal
*	17258.80	36.43	16.64	53.07	68.20	-15.13	Peak	Horizontal
	17993.20	20.26	24.10	44.36	54.00	-9.64	Average	Horizontal
	17993.20	34.74	24.10	58.84	74.00	-15.16	Peak	Horizontal
	10768.20	35.60	14.94	50.54	74.00	-23.46	Peak	Vertical
*	14409.60	36.35	15.92	52.27	68.20	-15.93	Peak	Vertical
*	16920.50	35.88	16.39	52.27	68.20	-15.93	Peak	Vertical
	17989.80	19.53	24.07	43.60	54.00	-10.40	Average	Vertical
	17989.80	34.72	24.07	58.79	74.00	-15.21	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 108
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10669.60	35.62	14.97	50.59	74.00	-23.41	Peak	Horizontal
*	14363.70	35.99	16.03	52.02	68.20	-16.18	Peak	Horizontal
*	17627.70	36.28	19.19	55.47	68.20	-12.73	Peak	Horizontal
	18000.00	20.19	24.16	44.35	54.00	-9.65	Average	Horizontal
	18000.00	35.38	24.16	59.54	74.00	-14.46	Peak	Horizontal
	10907.60	35.04	14.90	49.94	74.00	-24.06	Peak	Vertical
*	14411.30	36.00	15.91	51.91	68.20	-16.29	Peak	Vertical
*	17204.40	37.10	16.49	53.59	68.20	-14.61	Peak	Vertical
	17960.90	19.49	23.36	42.85	54.00	-11.15	Average	Vertical
	17960.90	36.66	23.36	60.02	74.00	-13.98	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11543.40	36.63	14.03	50.66	74.00	-23.34	Peak	Horizontal
*	14193.70	36.10	15.62	51.72	68.20	-16.48	Peak	Horizontal
*	17427.10	36.27	17.94	54.21	68.20	-13.99	Peak	Horizontal
	17983.00	20.26	24.00	44.26	54.00	-9.74	Average	Horizontal
	17983.00	35.09	24.00	59.09	74.00	-14.91	Peak	Horizontal
	11455.00	36.70	14.17	50.87	74.00	-23.13	Peak	Vertical
*	14572.80	36.15	15.91	52.06	68.20	-16.14	Peak	Vertical
*	17644.70	36.17	19.64	55.81	68.20	-12.39	Peak	Vertical
	17971.10	20.34	23.59	43.93	54.00	-10.07	Average	Vertical
	17971.10	36.57	23.59	60.16	74.00	-13.84	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10798.80	36.33	14.99	51.32	74.00	-22.68	Peak	Horizontal
*	14501.40	36.45	15.81	52.26	68.20	-15.94	Peak	Horizontal
*	17243.50	38.21	16.98	55.19	68.20	-13.01	Peak	Horizontal
	17986.40	19.68	24.03	43.71	54.00	-10.29	Average	Horizontal
	17986.40	35.76	24.03	59.79	74.00	-14.21	Peak	Horizontal
	11011.30	35.97	14.80	50.77	74.00	-23.23	Peak	Vertical
*	14139.30	37.26	15.12	52.38	68.20	-15.82	Peak	Vertical
*	17221.40	36.23	17.02	53.25	68.20	-14.95	Peak	Vertical
	18000.00	20.17	24.16	44.33	54.00	-9.67	Average	Vertical
	18000.00	35.43	24.16	59.59	74.00	-14.41	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11453.30	36.19	14.19	50.38	74.00	-23.62	Peak	Horizontal
*	14190.30	36.90	15.62	52.52	68.20	-15.68	Peak	Horizontal
*	17517.20	35.66	18.56	54.22	68.20	-13.98	Peak	Horizontal
	17981.30	19.83	23.94	43.77	54.00	-10.23	Average	Horizontal
	17981.30	34.38	23.94	58.32	74.00	-15.68	Peak	Horizontal
	10911.00	35.63	14.92	50.55	74.00	-23.45	Peak	Vertical
*	14396.00	36.64	16.00	52.64	68.20	-15.56	Peak	Vertical
*	17639.60	36.70	19.70	56.40	68.20	-11.80	Peak	Vertical
	17994.90	20.33	24.12	44.45	54.00	-9.55	Average	Vertical
	17994.90	35.42	24.12	59.54	74.00	-14.46	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10911.00	35.35	14.92	50.27	74.00	-23.73	Peak	Horizontal
*	14362.00	35.82	16.02	51.84	68.20	-16.36	Peak	Horizontal
*	17637.90	35.90	19.63	55.53	68.20	-12.67	Peak	Horizontal
	17988.10	20.11	24.05	44.16	54.00	-9.84	Average	Horizontal
	17988.10	34.92	24.05	58.97	74.00	-15.03	Peak	Horizontal
	10880.40	35.89	14.99	50.88	74.00	-23.12	Peak	Vertical
*	14356.90	36.07	16.00	52.07	68.20	-16.13	Peak	Vertical
*	17384.60	35.96	18.01	53.97	68.20	-14.23	Peak	Vertical
	17996.60	20.64	24.13	44.77	54.00	-9.23	Average	Vertical
	17996.60	35.49	24.13	59.62	74.00	-14.38	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	12345.80	36.95	12.99	49.94	74.00	-24.06	Peak	Horizontal
*	14282.10	36.07	15.91	51.98	68.20	-16.22	Peak	Horizontal
*	17364.20	35.75	17.55	53.30	68.20	-14.90	Peak	Horizontal
	17994.90	20.37	24.12	44.49	54.00	-9.51	Average	Horizontal
	17994.90	34.88	24.12	59.00	74.00	-15.00	Peak	Horizontal
	10982.40	35.64	14.91	50.55	74.00	-23.45	Peak	Vertical
*	14571.10	36.17	15.89	52.06	68.20	-16.14	Peak	Vertical
*	17357.40	35.76	17.47	53.23	68.20	-14.97	Peak	Vertical
	17976.20	20.46	23.77	44.23	54.00	-9.77	Average	Vertical
	17976.20	35.30	23.77	59.07	74.00	-14.93	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11436.30	27.51	14.31	41.82	54.00	-12.18	Average	Horizontal
	11436.30	36.70	14.31	51.01	74.00	-22.99	Peak	Horizontal
*	14435.10	37.02	15.95	52.97	68.20	-15.23	Peak	Horizontal
*	16925.60	36.85	16.44	53.29	68.20	-14.91	Peak	Horizontal
	17993.20	20.44	24.10	44.54	54.00	-9.46	Average	Horizontal
	17993.20	35.87	24.10	59.97	74.00	-14.03	Peak	Horizontal
	10860.00	27.53	15.01	42.54	54.00	-11.46	Average	Vertical
	10860.00	36.19	15.01	51.20	74.00	-22.80	Peak	Vertical
*	14311.00	37.07	15.89	52.96	68.20	-15.24	Peak	Vertical
*	16651.90	37.37	15.43	52.80	68.20	-15.40	Peak	Vertical
	17983.00	20.51	24.00	44.51	54.00	-9.49	Average	Vertical
	17983.00	35.78	24.00	59.78	74.00	-14.22	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	14321.20	36.48	15.89	52.37	68.20	-15.83	Peak	Horizontal
	15824.00	30.18	13.00	43.18	54.00	-10.82	Average	Horizontal
	15824.00	39.28	13.00	52.28	74.00	-21.72	Peak	Horizontal
*	17377.80	36.47	17.82	54.29	68.20	-13.91	Peak	Horizontal
	17972.80	20.52	23.65	44.17	54.00	-9.83	Average	Horizontal
	17972.80	35.61	23.65	59.26	74.00	-14.74	Peak	Horizontal
*	14392.60	36.22	16.04	52.26	68.20	-15.94	Peak	Vertical
	15818.90	29.18	13.01	42.19	54.00	-11.81	Average	Vertical
	15818.90	38.82	13.01	51.83	74.00	-22.17	Peak	Vertical
*	17348.90	36.29	17.45	53.74	68.20	-14.46	Peak	Vertical
	17996.60	20.29	24.13	44.42	54.00	-9.58	Average	Vertical
	17996.60	34.82	24.13	58.95	74.00	-15.05	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11325.80	35.83	14.18	50.01	74.00	-23.99	Peak	Horizontal
*	14526.90	36.40	15.86	52.26	68.20	-15.94	Peak	Horizontal
*	17411.80	36.35	17.71	54.06	68.20	-14.14	Peak	Horizontal
	17904.80	19.84	22.92	42.76	54.00	-11.24	Average	Horizontal
	17904.80	36.66	22.92	59.58	74.00	-14.42	Peak	Horizontal
	11126.90	36.23	14.38	50.61	74.00	-23.39	Peak	Vertical
*	14537.10	36.21	15.89	52.10	68.20	-16.10	Peak	Vertical
*	16725.00	36.58	15.80	52.38	68.20	-15.82	Peak	Vertical
	18000.00	20.36	24.16	44.52	54.00	-9.48	Average	Vertical
	18000.00	34.87	24.16	59.03	74.00	-14.97	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11109.90	27.53	14.43	41.96	54.00	-12.04	Average	Horizontal
	11109.90	36.75	14.43	51.18	74.00	-22.82	Peak	Horizontal
*	14209.00	36.58	15.62	52.20	68.20	-16.00	Peak	Horizontal
*	17573.30	37.33	19.07	56.40	68.20	-11.80	Peak	Horizontal
	17979.60	20.55	23.88	44.43	54.00	-9.57	Average	Horizontal
	17979.60	35.73	23.88	59.61	74.00	-14.39	Peak	Horizontal
	10980.70	35.21	14.91	50.12	74.00	-23.88	Peak	Vertical
*	14390.90	36.08	16.06	52.14	68.20	-16.06	Peak	Vertical
*	17552.90	35.74	18.80	54.54	68.20	-13.66	Peak	Vertical
	17991.50	20.21	24.08	44.29	54.00	-9.71	Average	Vertical
	17991.50	35.37	24.08	59.45	74.00	-14.55	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11329.20	27.62	14.22	41.84	54.00	-12.16	Average	Horizontal
	11329.20	36.83	14.22	51.05	74.00	-22.95	Peak	Horizontal
*	14659.50	36.90	15.82	52.72	68.20	-15.48	Peak	Horizontal
*	17343.80	36.41	17.51	53.92	68.20	-14.28	Peak	Horizontal
	18000.00	20.27	24.16	44.43	54.00	-9.57	Average	Horizontal
	18000.00	35.75	24.16	59.91	74.00	-14.09	Peak	Horizontal
	11619.90	37.03	13.68	50.71	74.00	-23.29	Peak	Vertical
*	14311.00	36.61	15.89	52.50	68.20	-15.70	Peak	Vertical
*	16978.30	36.66	16.48	53.14	68.20	-15.06	Peak	Vertical
	17979.60	20.42	23.88	44.30	54.00	-9.70	Average	Vertical
	17979.60	35.95	23.88	59.83	74.00	-14.17	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11121.80	36.41	14.40	50.81	74.00	-23.19	Peak	Horizontal
*	14380.70	36.45	16.13	52.58	68.20	-15.62	Peak	Horizontal
*	17119.40	36.62	16.61	53.23	68.20	-14.97	Peak	Horizontal
	17950.70	20.37	23.25	43.62	54.00	-10.38	Average	Horizontal
	17950.70	36.28	23.25	59.53	74.00	-14.47	Peak	Horizontal
	11065.70	36.15	14.51	50.66	74.00	-23.34	Peak	Vertical
*	14613.60	36.05	15.86	51.91	68.20	-16.29	Peak	Vertical
*	16838.90	35.65	16.09	51.74	68.20	-16.46	Peak	Vertical
	17991.50	19.73	24.08	43.81	54.00	-10.19	Average	Vertical
	17991.50	35.54	24.08	59.62	74.00	-14.38	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11509.40	36.00	14.12	50.12	74.00	-23.88	Peak	Horizontal
*	14834.60	35.75	15.66	51.41	68.20	-16.79	Peak	Horizontal
*	17389.70	36.66	18.10	54.76	68.20	-13.44	Peak	Horizontal
	18000.00	20.41	24.16	44.57	54.00	-9.43	Average	Horizontal
	18000.00	34.53	24.16	58.69	74.00	-15.31	Peak	Horizontal
	11016.40	35.46	14.78	50.24	74.00	-23.76	Peak	Vertical
*	14183.50	36.51	15.59	52.10	68.20	-16.10	Peak	Vertical
*	17367.60	35.52	17.59	53.11	68.20	-15.09	Peak	Vertical
	17841.90	19.78	21.57	41.35	54.00	-12.65	Average	Vertical
	17841.90	35.99	21.57	57.56	74.00	-16.44	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11327.50	36.43	14.20	50.63	74.00	-23.37	Peak	Horizontal
*	14377.30	36.40	16.13	52.53	68.20	-15.67	Peak	Horizontal
*	17513.80	36.22	18.57	54.79	68.20	-13.41	Peak	Horizontal
	17984.70	20.16	24.02	44.18	54.00	-9.82	Average	Horizontal
	17984.70	34.93	24.02	58.95	74.00	-15.05	Peak	Horizontal
	10919.50	35.55	14.98	50.53	74.00	-23.47	Peak	Vertical
*	14316.10	35.97	15.91	51.88	68.20	-16.32	Peak	Vertical
*	17556.30	35.79	18.83	54.62	68.20	-13.58	Peak	Vertical
	17901.40	20.59	22.94	43.53	54.00	-10.47	Average	Vertical
	17901.40	35.88	22.94	58.82	74.00	-15.18	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11026.60	36.17	14.72	50.89	74.00	-23.11	Peak	Horizontal
*	14424.90	36.08	15.79	51.87	68.20	-16.33	Peak	Horizontal
*	17134.70	35.92	16.69	52.61	68.20	-15.59	Peak	Horizontal
	17998.30	20.38	24.15	44.53	54.00	-9.47	Average	Horizontal
	17998.30	35.77	24.15	59.92	74.00	-14.08	Peak	Horizontal
	10902.50	27.44	14.88	42.32	54.00	-11.68	Average	Vertical
	10902.50	36.69	14.88	51.57	74.00	-22.43	Peak	Vertical
*	14406.20	36.47	15.94	52.41	68.20	-15.79	Peak	Vertical
*	16974.90	36.13	16.50	52.63	68.20	-15.57	Peak	Vertical
	17986.40	20.43	24.03	44.46	54.00	-9.54	Average	Vertical
	17986.40	35.72	24.03	59.75	74.00	-14.25	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10984.10	35.20	14.91	50.11	74.00	-23.89	Peak	Horizontal
*	14382.40	35.97	16.12	52.09	68.20	-16.11	Peak	Horizontal
*	17423.70	36.16	17.87	54.03	68.20	-14.17	Peak	Horizontal
	17993.20	20.44	24.10	44.54	54.00	-9.46	Average	Horizontal
	17993.20	35.05	24.10	59.15	74.00	-14.85	Peak	Horizontal
	11509.40	36.82	14.12	50.94	74.00	-23.06	Peak	Vertical
*	14384.10	36.21	16.11	52.32	68.20	-15.88	Peak	Vertical
*	17384.60	36.27	18.01	54.28	68.20	-13.92	Peak	Vertical
	17986.40	20.49	24.03	44.52	54.00	-9.48	Average	Vertical
	17986.40	34.67	24.03	58.70	74.00	-15.30	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-09-09	Test Mode	802.11ac-VHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11128.60	35.71	14.37	50.08	74.00	-23.92	Peak	Horizontal
*	14278.70	35.81	15.94	51.75	68.20	-16.45	Peak	Horizontal
*	17371.00	35.21	17.63	52.84	68.20	-15.36	Peak	Horizontal
	17977.90	20.33	23.82	44.15	54.00	-9.85	Average	Horizontal
	17977.90	35.08	23.82	58.90	74.00	-15.10	Peak	Horizontal
	11254.40	36.53	14.11	50.64	74.00	-23.36	Peak	Vertical
*	14314.40	35.66	15.91	51.57	68.20	-16.63	Peak	Vertical
*	17632.80	35.52	19.41	54.93	68.20	-13.27	Peak	Vertical
	17962.60	20.29	23.38	43.67	54.00	-10.33	Average	Vertical
	17962.60	36.18	23.38	59.56	74.00	-14.44	Peak	Vertical


Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1 GHz:

Site	WZ-AC1	Test Date	2025-09-08
Temperature	24.2 °C	Humidity	47.1%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Lucas Wang
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

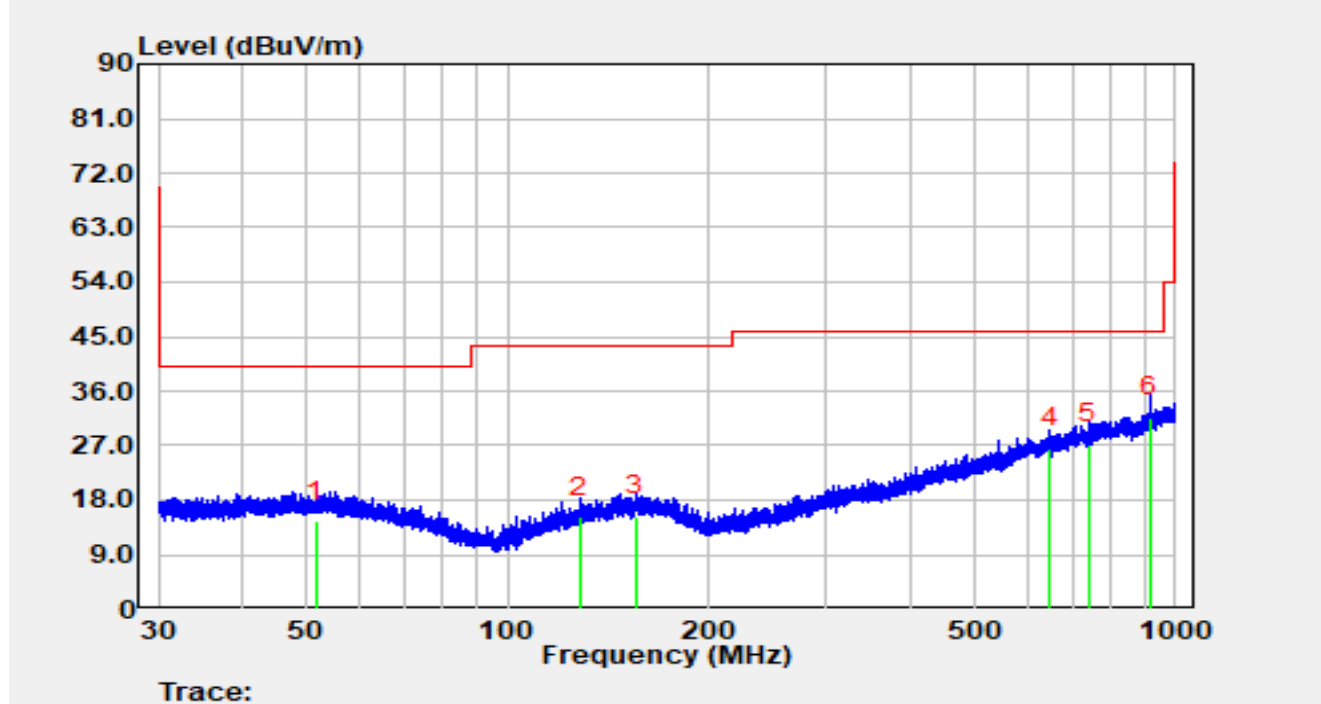


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		51.64	-3.86	18.31	14.45	-25.55	40.00	QP
2		128.47	-1.67	16.91	15.24	-28.26	43.50	QP
3		155.75	-2.91	18.36	15.45	-28.05	43.50	QP
4		649.89	0.17	26.47	26.64	-19.36	46.00	QP
5		742.00	-0.56	27.84	27.28	-18.72	46.00	QP
6	*	914.14	1.48	30.15	31.63	-14.37	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
- The amplitude of the radiated emissions in the frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

Site	WZ-AC1	Test Date	2025-09-08
Temperature	24.2 °C	Humidity	47.1%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Lucas Wang
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

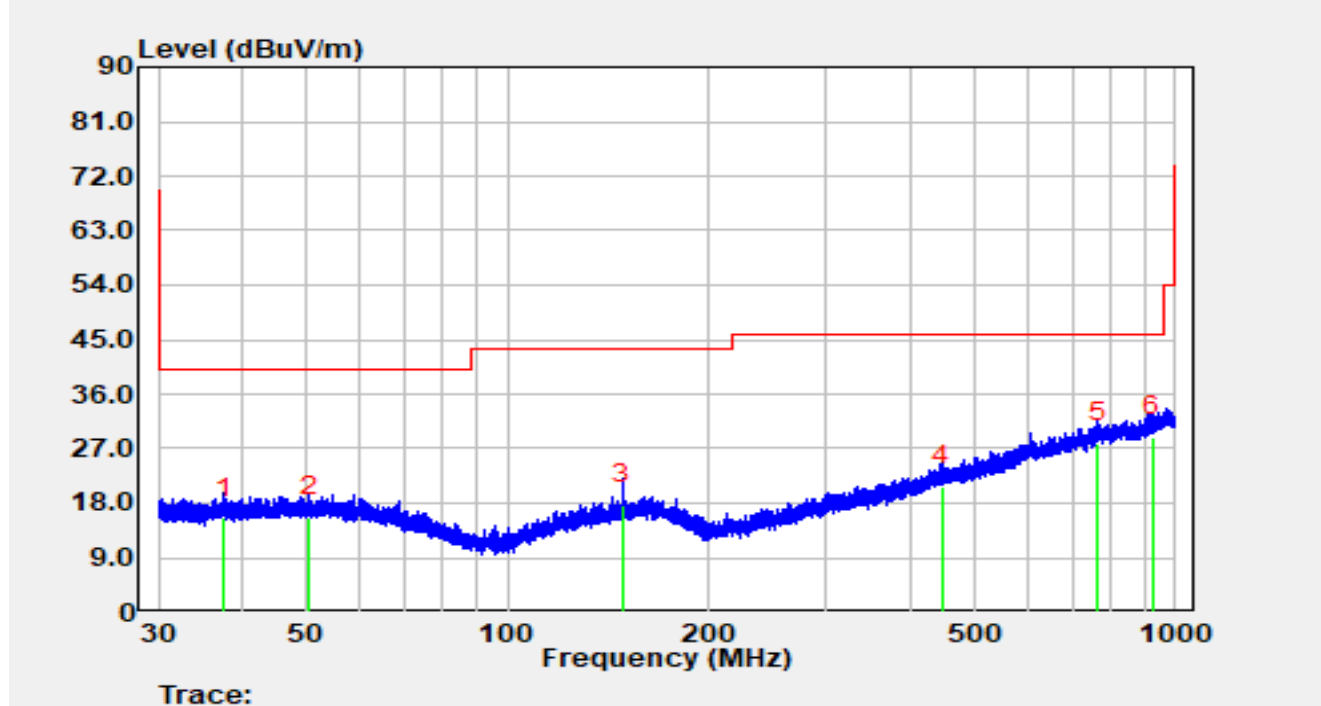


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		37.67	-2.12	17.58	15.46	-24.54	40.00	QP
2		50.37	-2.67	18.39	15.72	-24.28	40.00	QP
3		148.39	-0.32	18.14	17.82	-25.68	43.50	QP
4		446.73	-1.76	22.51	20.75	-25.25	46.00	QP
5		763.91	-0.53	28.45	27.91	-18.09	46.00	QP
6	*	925.11	-1.29	30.19	28.90	-17.10	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
- The amplitude of the radiated emissions in the frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

A.8 Radiated Restricted Band Edge Test Result

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

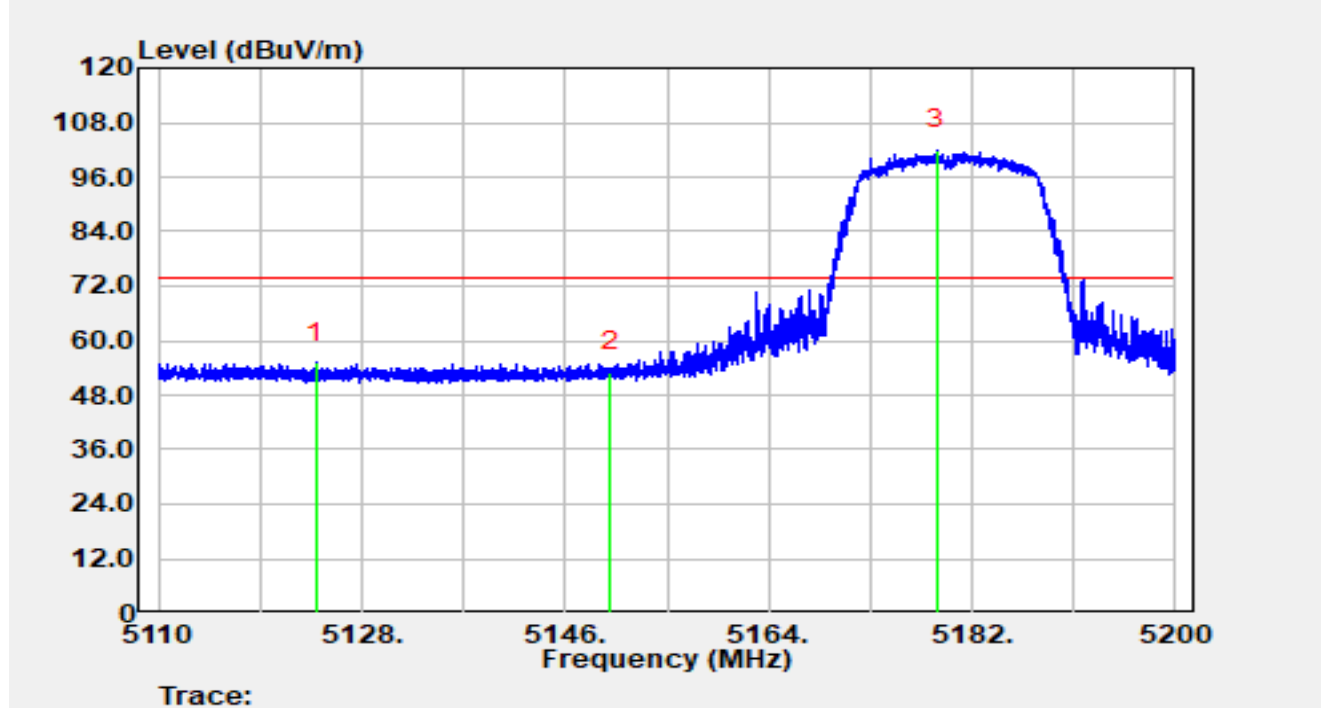


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5123.96	36.31	18.75	55.06	-18.94	74.00	Peak
2		5150.00	34.51	18.49	53.00	-21.00	74.00	Peak
3		5178.92	83.19	18.79	101.97	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

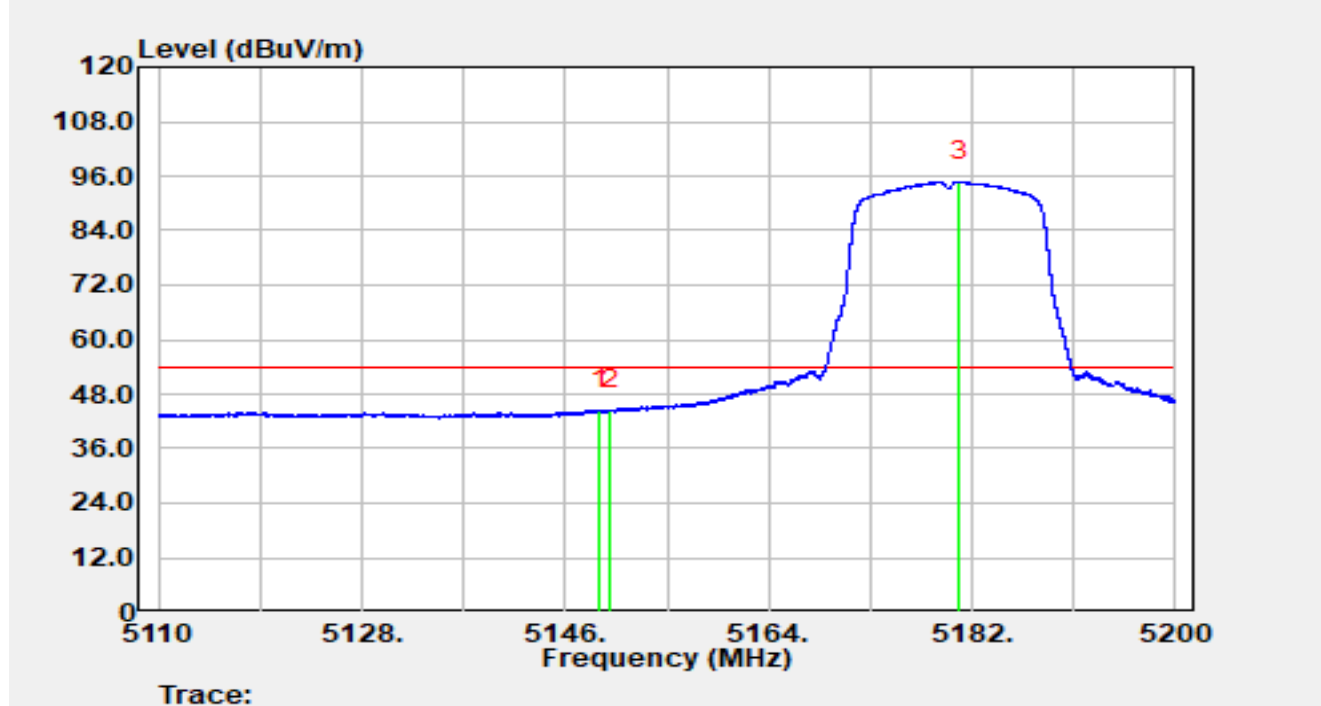


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.07	26.05	18.49	44.54	-9.46	54.00	Average
2		5150.00	25.91	18.49	44.40	-9.60	54.00	Average
3		5180.88	76.01	18.79	94.80	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

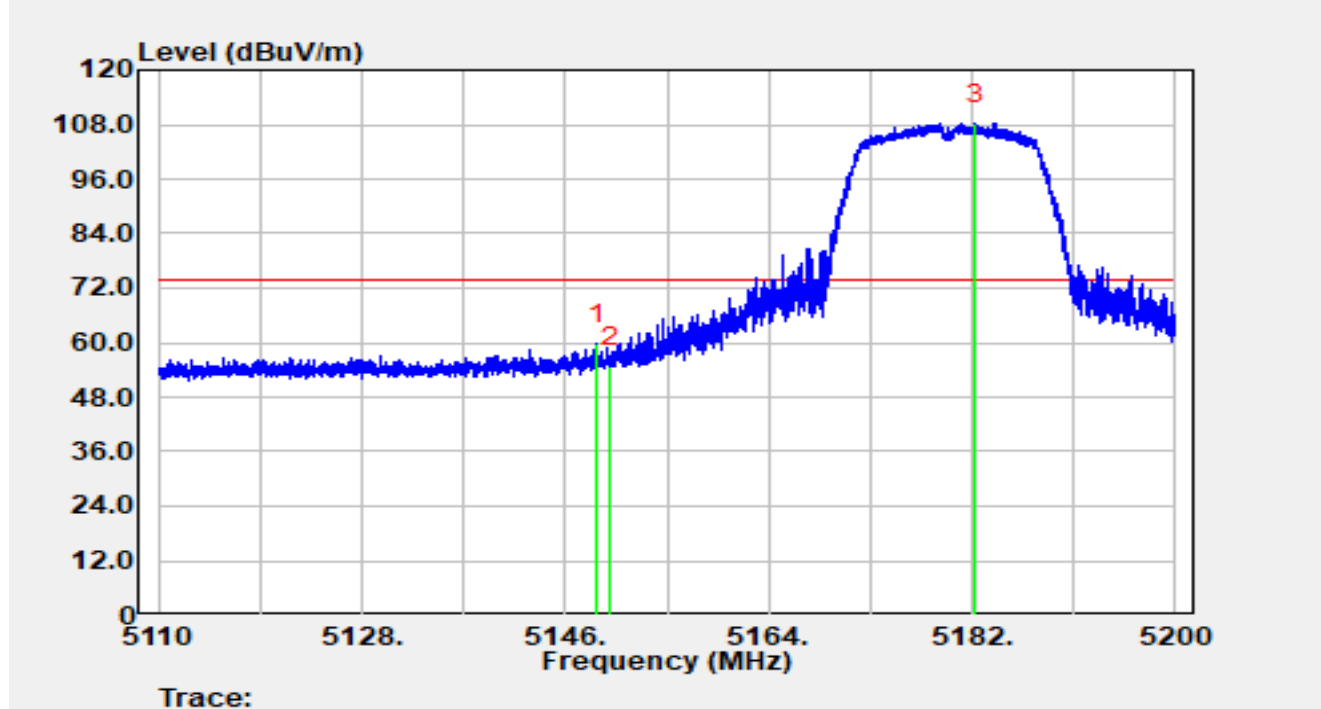


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.79	41.25	18.49	59.75	-14.25	74.00	Peak
2		5150.00	36.20	18.49	54.69	-19.31	74.00	Peak
3		5182.23	89.34	18.79	108.13	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

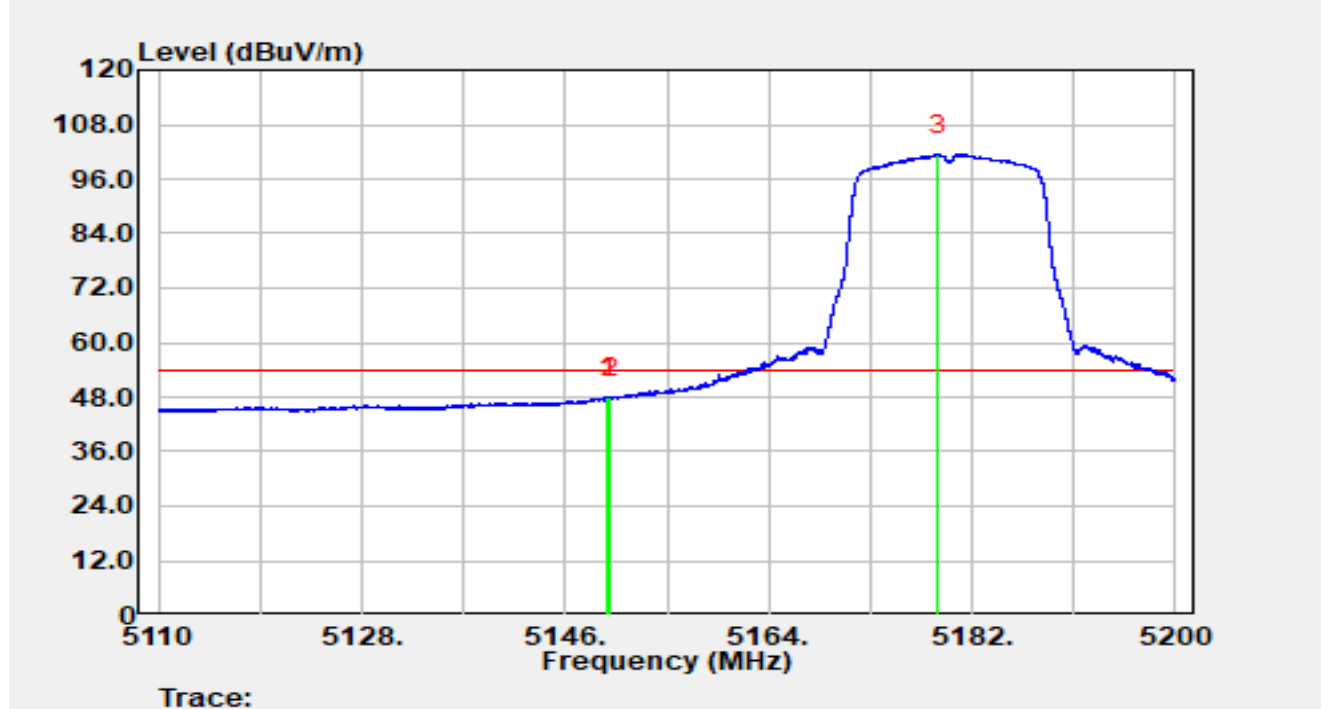


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.71	29.35	18.49	47.84	-6.16	54.00	Average
2	*	5150.00	29.42	18.49	47.90	-6.10	54.00	Average
3		5179.03	82.59	18.79	101.37	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

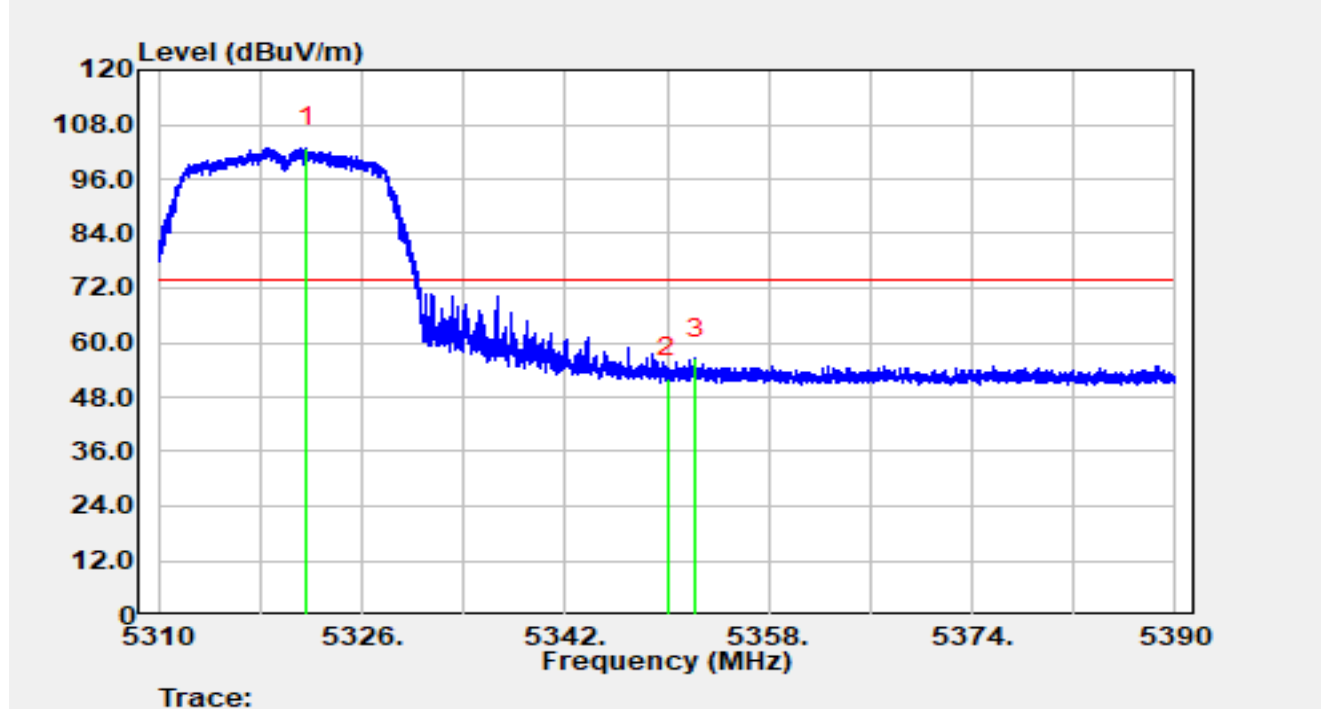


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.67	84.52	18.48	103.00	N/A	N/A	Peak
2		5350.00	33.53	18.73	52.26	-21.74	74.00	Peak
3	*	5352.28	37.81	18.76	56.57	-17.43	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

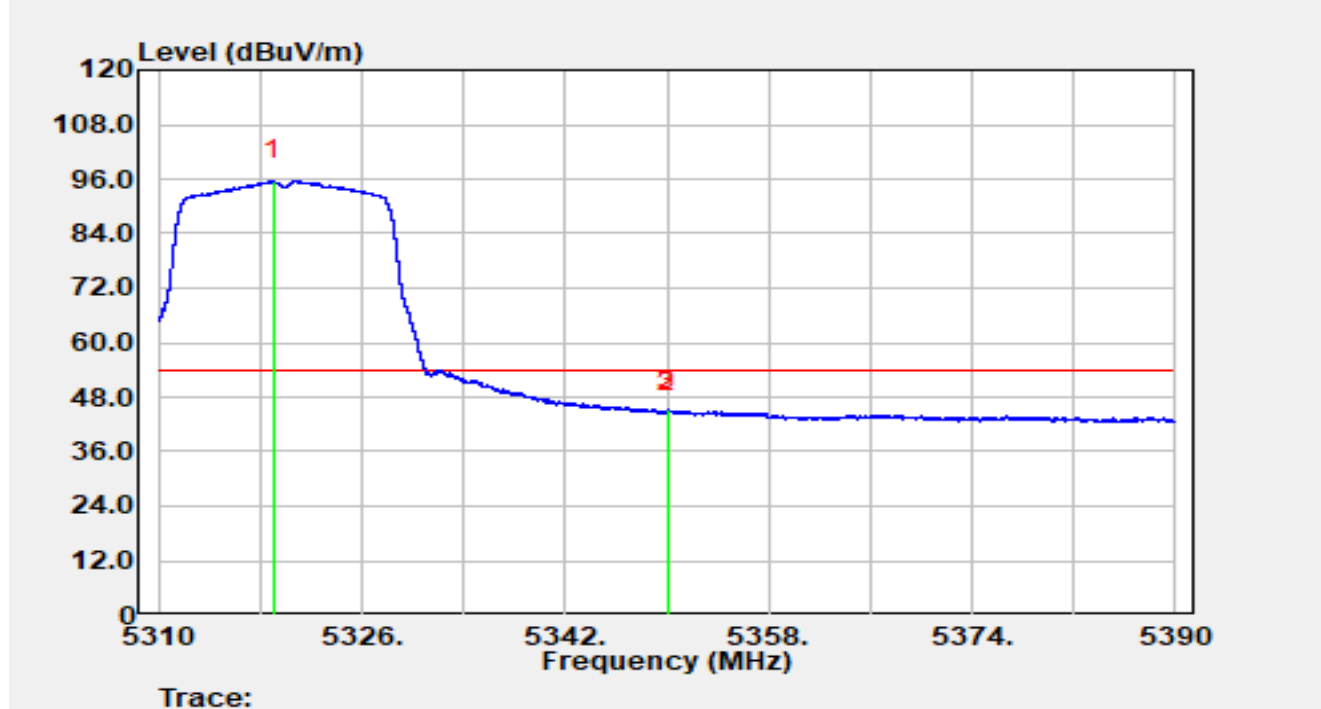


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5319.08	77.20	18.50	95.69	N/A	N/A	Average
2		5350.00	26.07	18.73	44.80	-9.20	54.00	Average
3	*	5350.06	26.42	18.73	45.15	-8.85	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

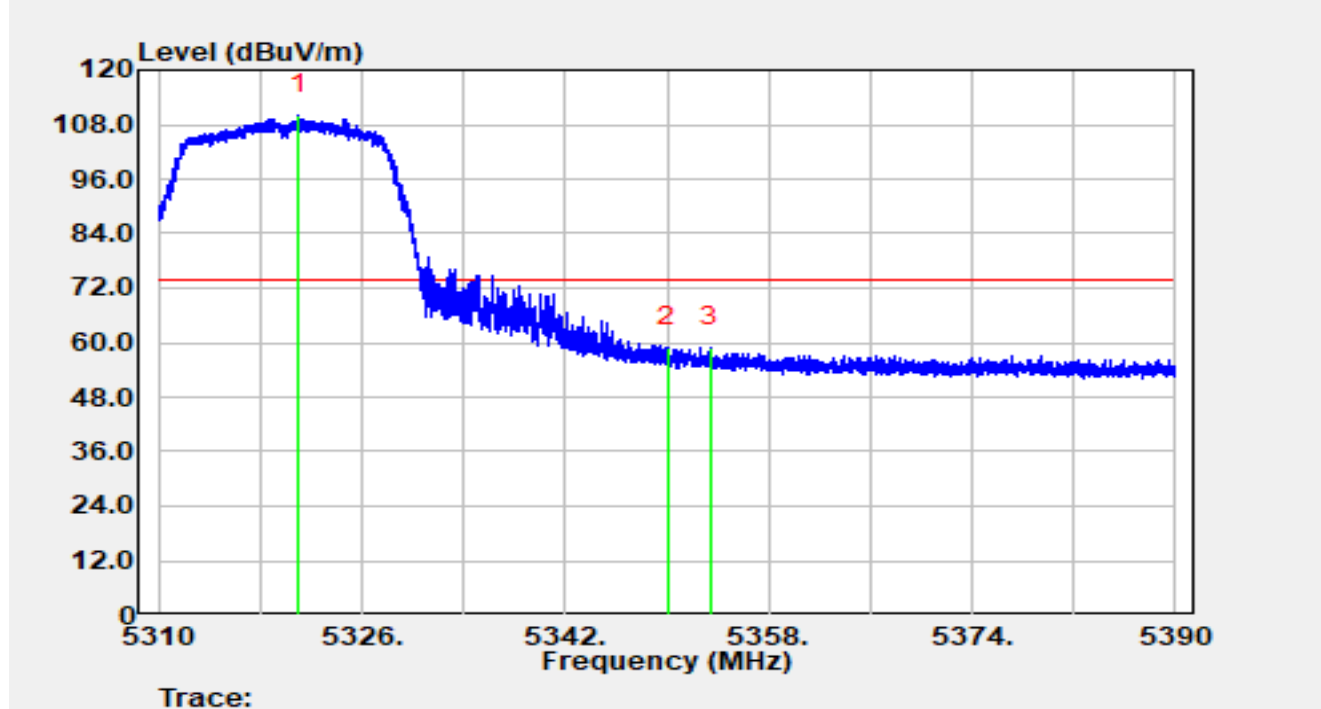


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.06	91.68	18.49	110.17	N/A	N/A	Peak
2		5350.00	40.28	18.73	59.02	-14.98	74.00	Peak
3	*	5353.38	40.28	18.78	59.05	-14.95	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

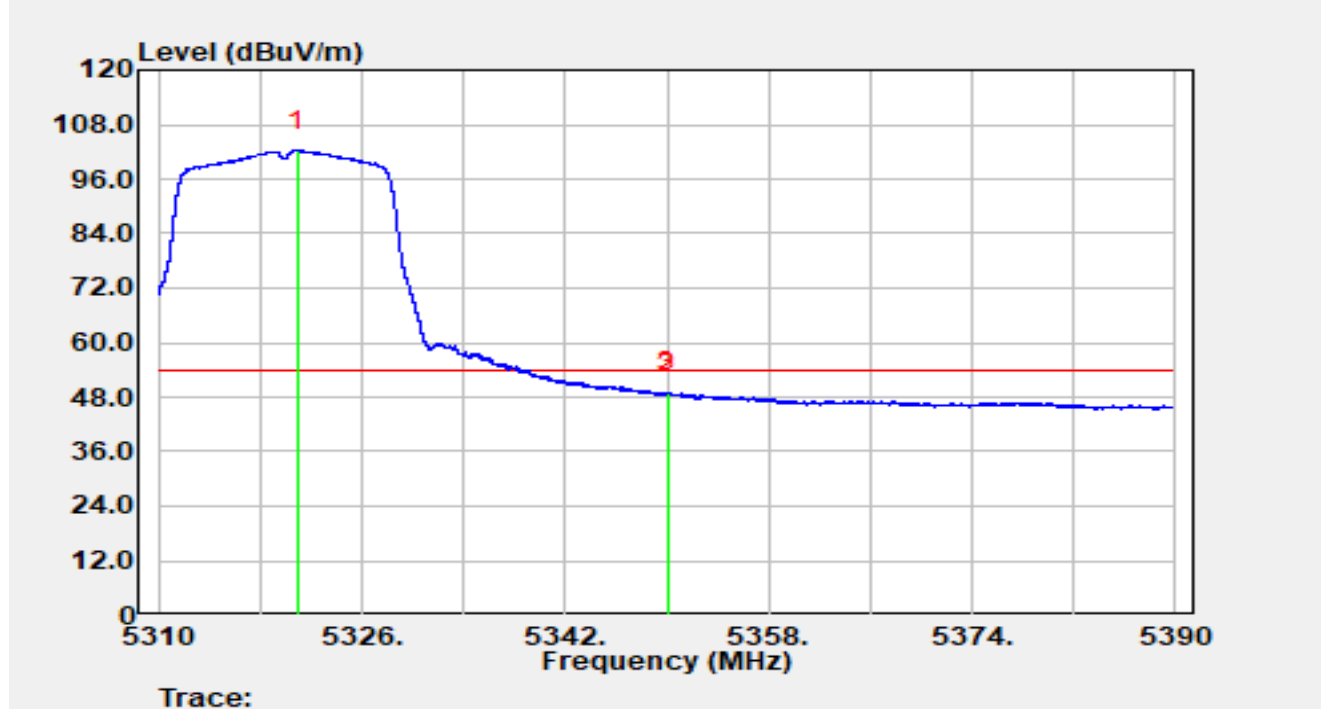


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.88	83.82	18.49	102.31	N/A	N/A	Average
2		5350.00	30.01	18.73	48.74	-5.26	54.00	Average
3	*	5350.04	30.27	18.73	49.00	-5.00	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

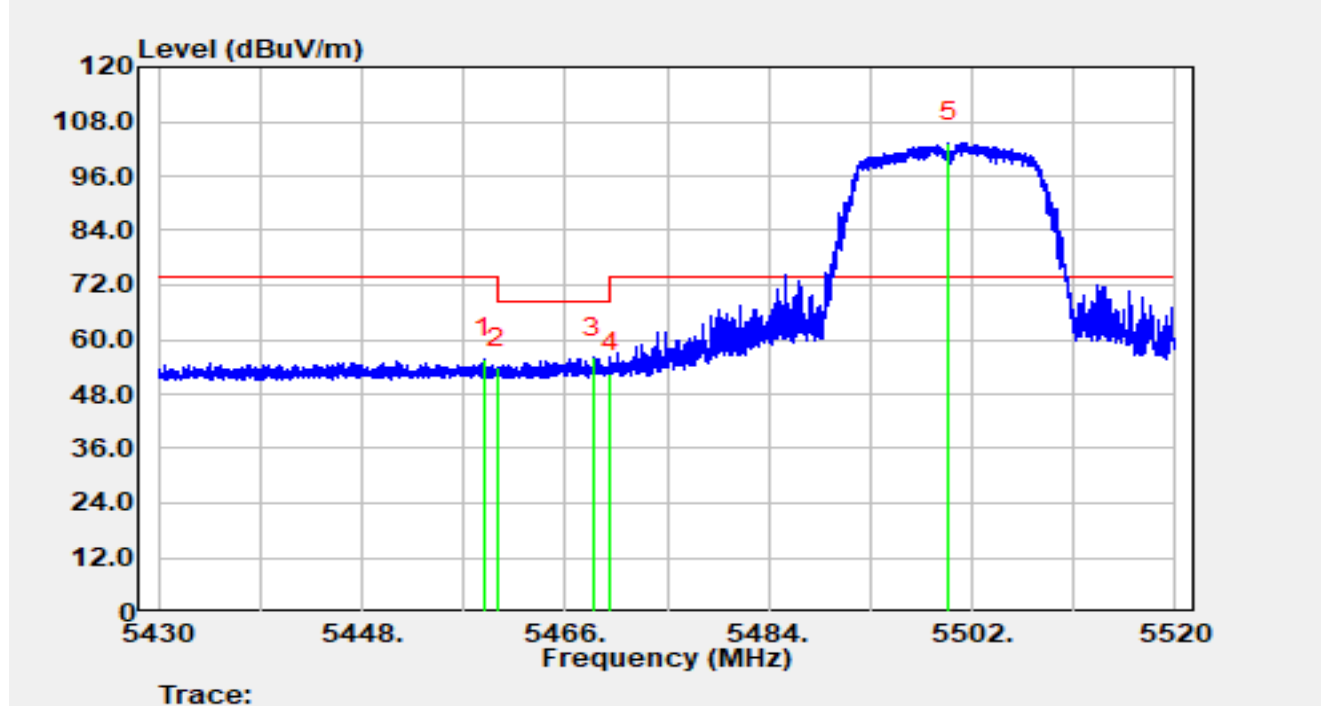


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.79	36.91	18.98	55.89	-18.11	74.00	Peak
2		5460.00	34.78	18.99	53.76	-14.44	68.20	Peak
3	*	5468.48	37.02	18.92	55.94	-12.26	68.20	Peak
4		5470.00	33.84	18.90	52.74	-15.46	68.20	Peak
5		5499.94	84.61	18.79	103.39	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

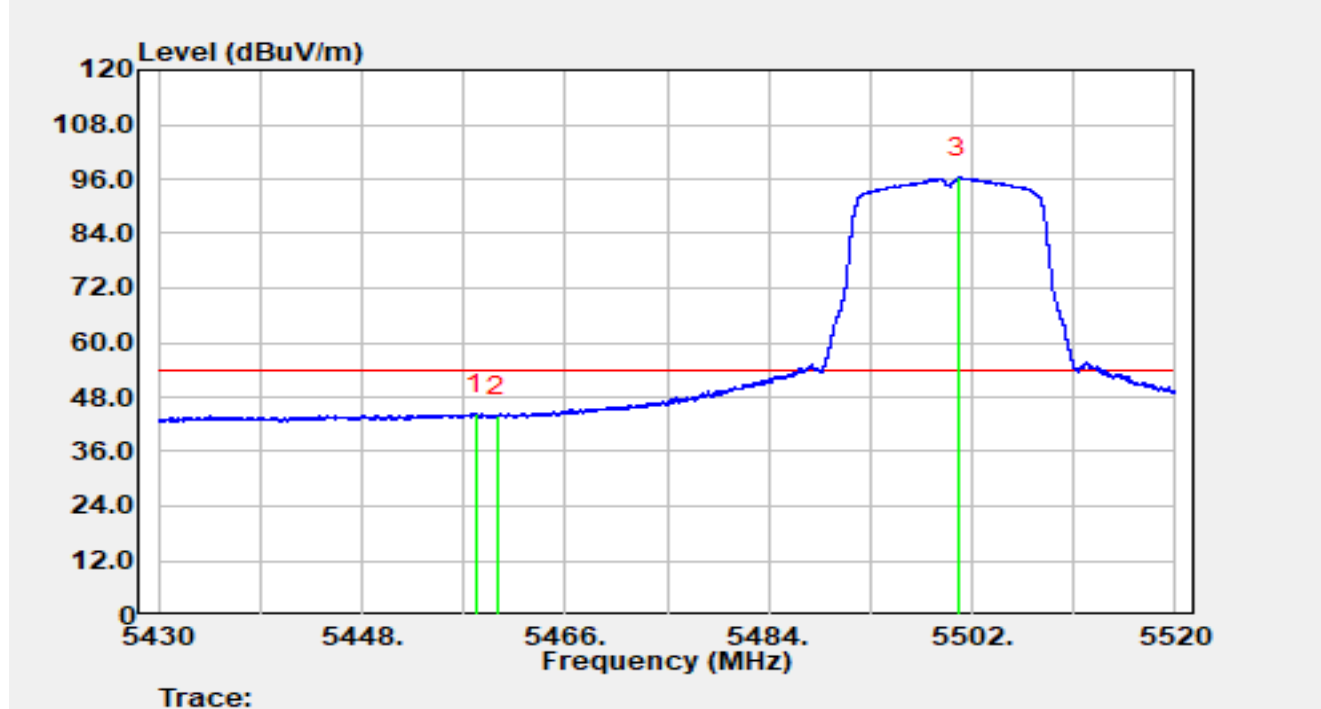


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.04	25.26	18.98	44.24	-9.76	54.00	Average
2		5460.00	24.85	18.99	43.83	-10.17	54.00	Average
3		5500.81	77.51	18.79	96.30	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

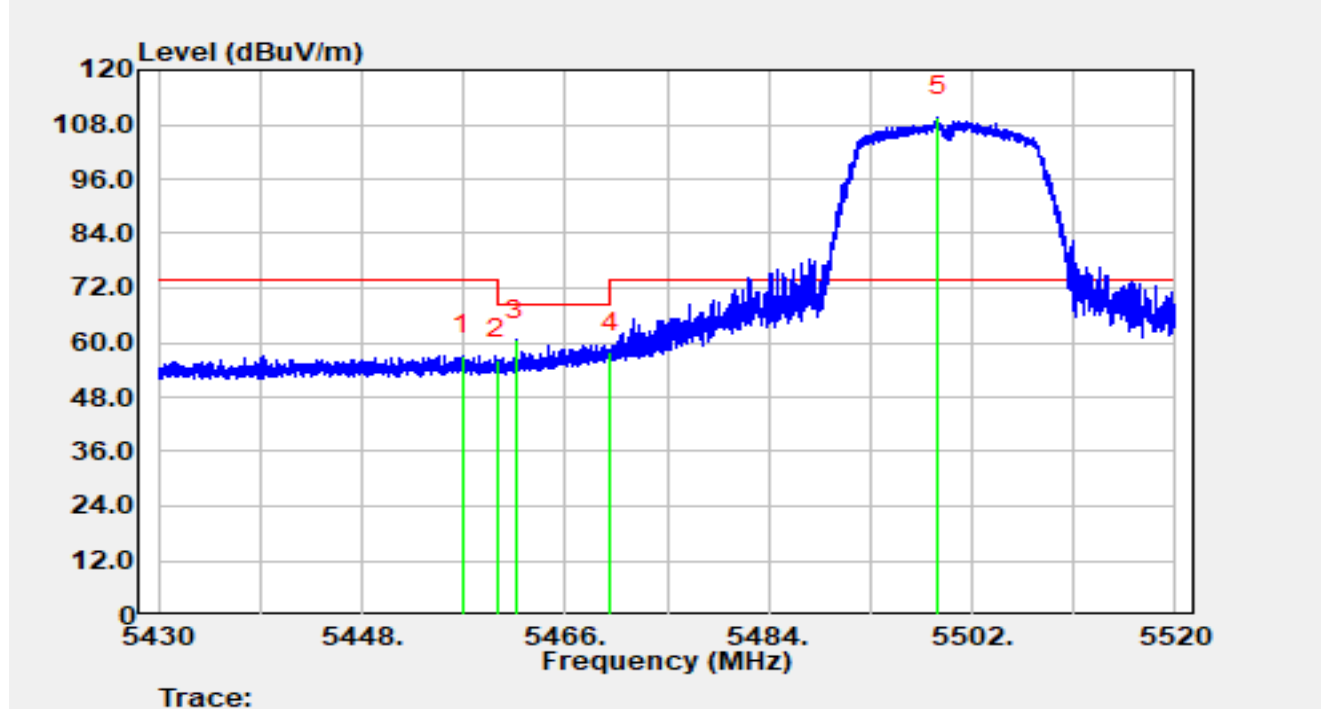


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.86	38.28	18.98	57.25	-16.75	74.00	Peak
2		5460.00	37.23	18.99	56.22	-11.98	68.20	Peak
3	*	5461.64	41.53	18.99	60.51	-7.69	68.20	Peak
4		5470.00	38.98	18.90	57.88	-10.32	68.20	Peak
5		5498.95	90.83	18.78	109.61	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

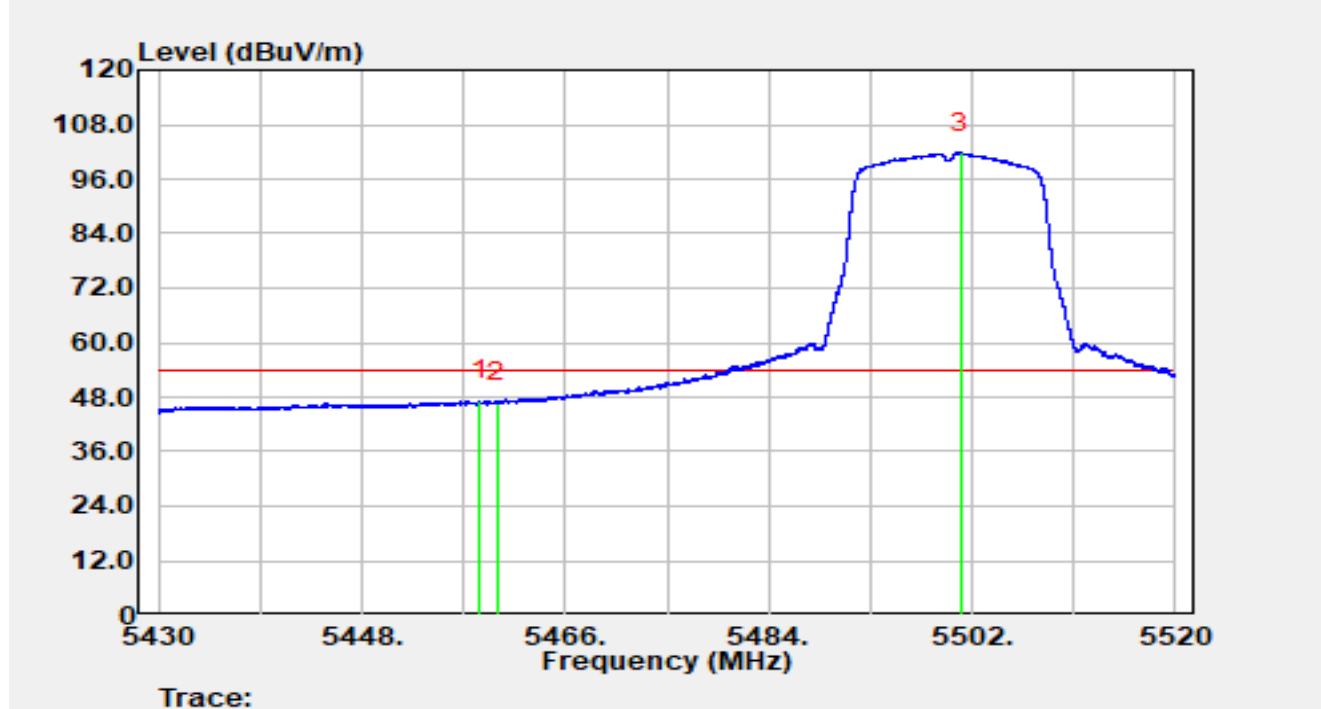


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.46	28.18	18.98	47.16	-6.84	54.00	Average
2		5460.00	27.67	18.99	46.65	-7.35	54.00	Average
3		5500.97	83.00	18.79	101.80	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5745 MHz		

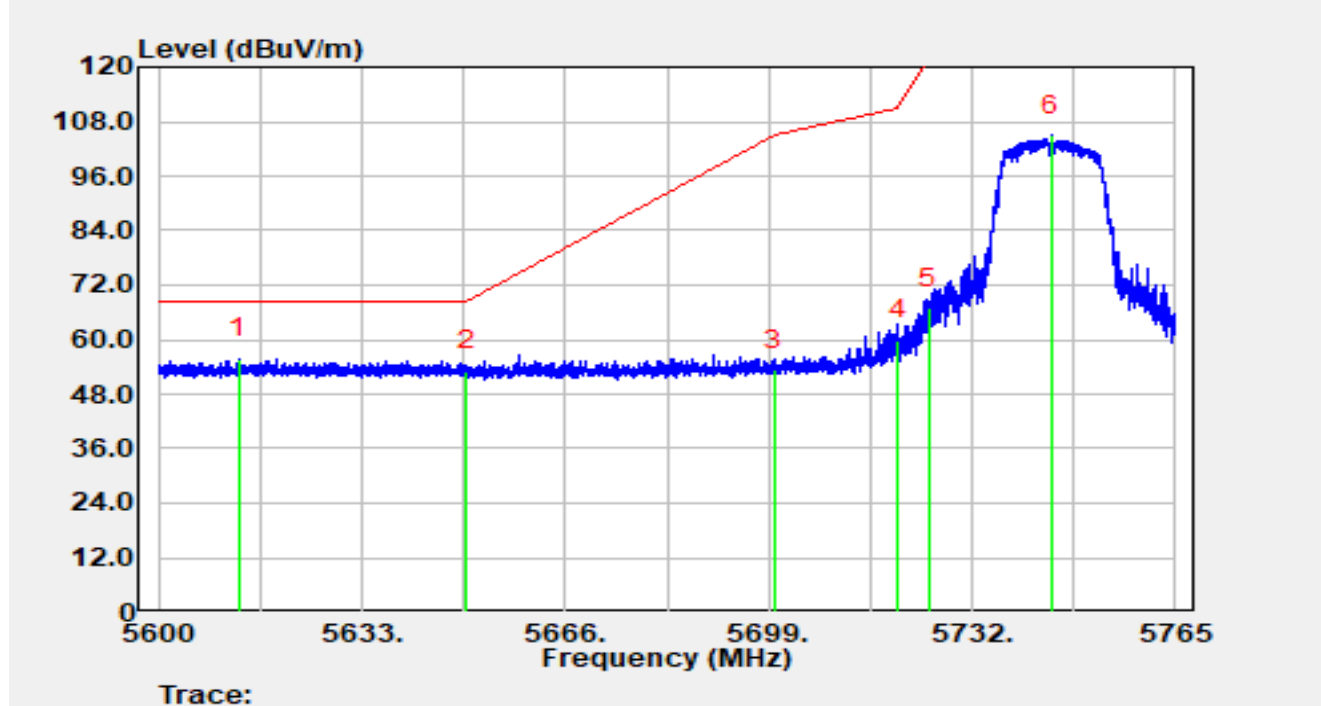


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.02	36.25	19.60	55.84	-12.36	68.20	Peak
2		5650.00	33.61	19.43	53.04	-15.16	68.20	Peak
3		5700.00	33.32	19.89	53.22	-51.98	105.20	Peak
4		5720.00	39.67	20.13	59.80	-51.00	110.80	Peak
5		5725.00	46.88	20.08	66.96	-55.24	122.20	Peak
6		5744.82	85.17	19.84	105.02	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5745 MHz		

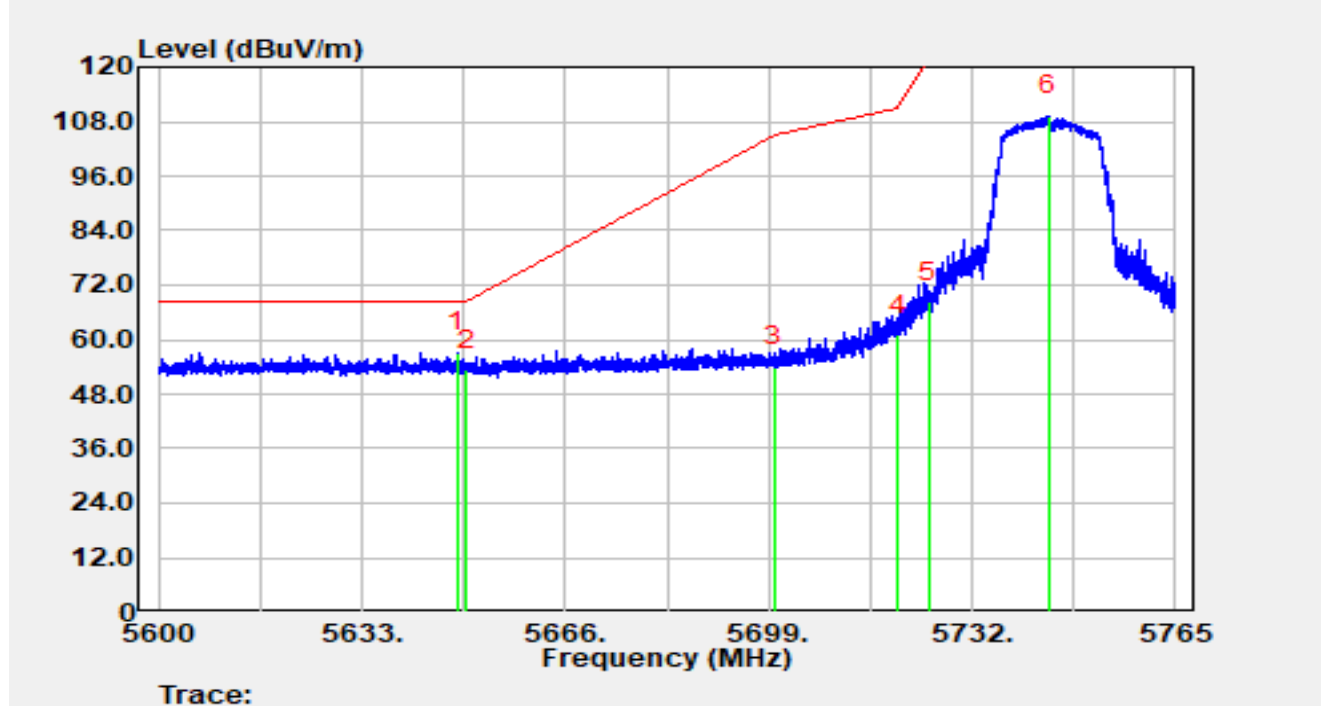


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5648.44	37.76	19.46	57.22	-10.98	68.20	Peak
2		5650.00	33.96	19.43	53.39	-14.81	68.20	Peak
3		5700.00	34.00	19.89	53.89	-51.31	105.20	Peak
4		5720.00	40.96	20.13	61.09	-49.71	110.80	Peak
5		5725.00	48.18	20.08	68.25	-53.95	122.20	Peak
6		5744.47	89.48	19.85	109.33	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

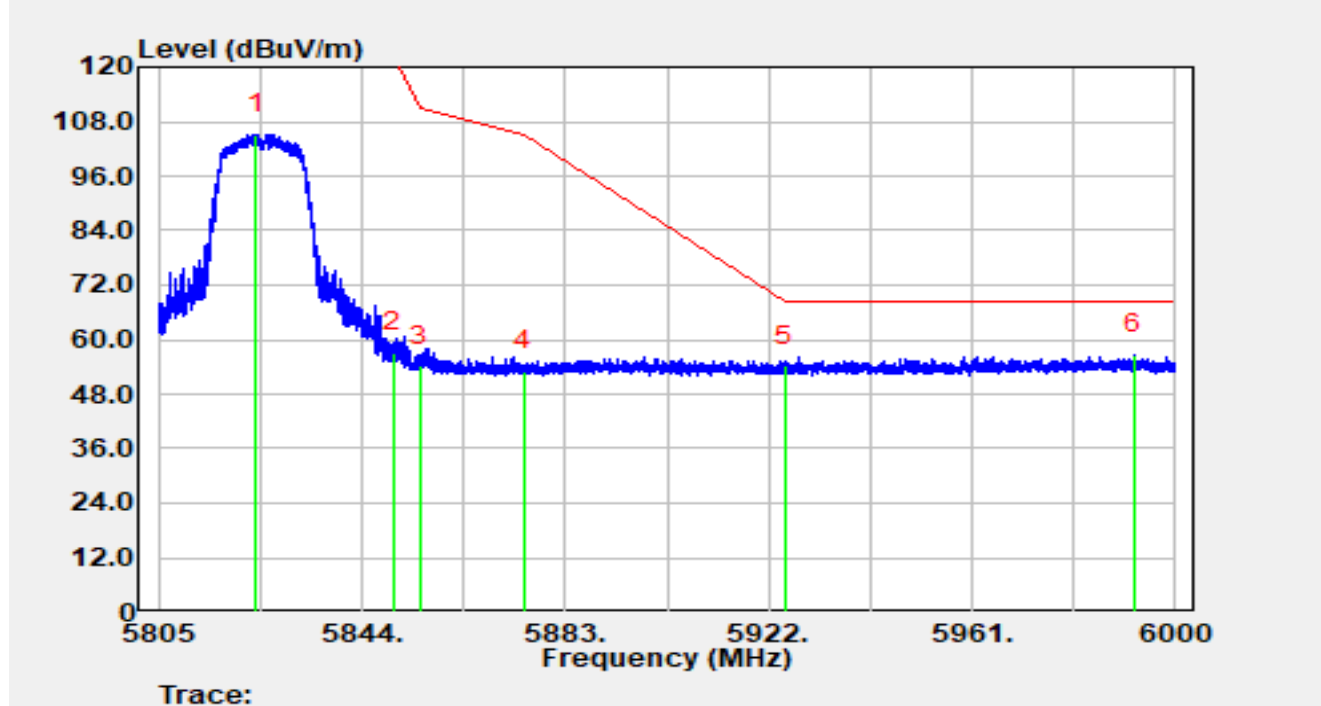


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.58	84.80	20.37	105.17	N/A	N/A	Peak
2		5850.00	37.01	20.14	57.15	-65.05	122.20	Peak
3		5855.00	33.98	20.15	54.13	-56.67	110.80	Peak
4		5875.00	32.54	20.50	53.04	-52.16	105.20	Peak
5		5925.00	33.70	20.52	54.22	-13.98	68.20	Peak
6	*	5992.06	35.66	20.96	56.62	-11.58	68.20	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

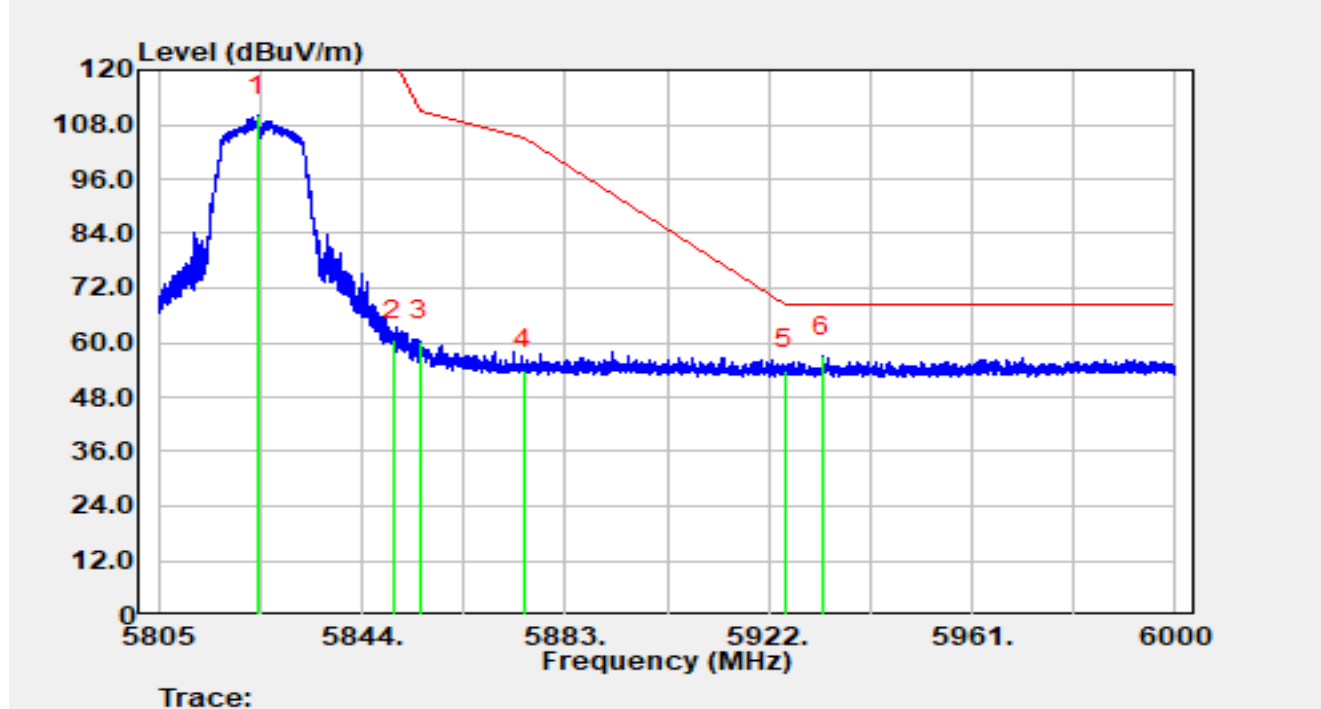


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.95	89.63	20.37	110.00	N/A	N/A	Peak
2		5850.00	40.42	20.14	60.56	-61.64	122.20	Peak
3		5855.00	40.27	20.15	60.42	-50.38	110.80	Peak
4		5875.00	33.58	20.50	54.08	-51.12	105.20	Peak
5		5925.00	33.56	20.52	54.09	-14.11	68.20	Peak
6	*	5932.35	36.36	20.56	56.92	-11.28	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

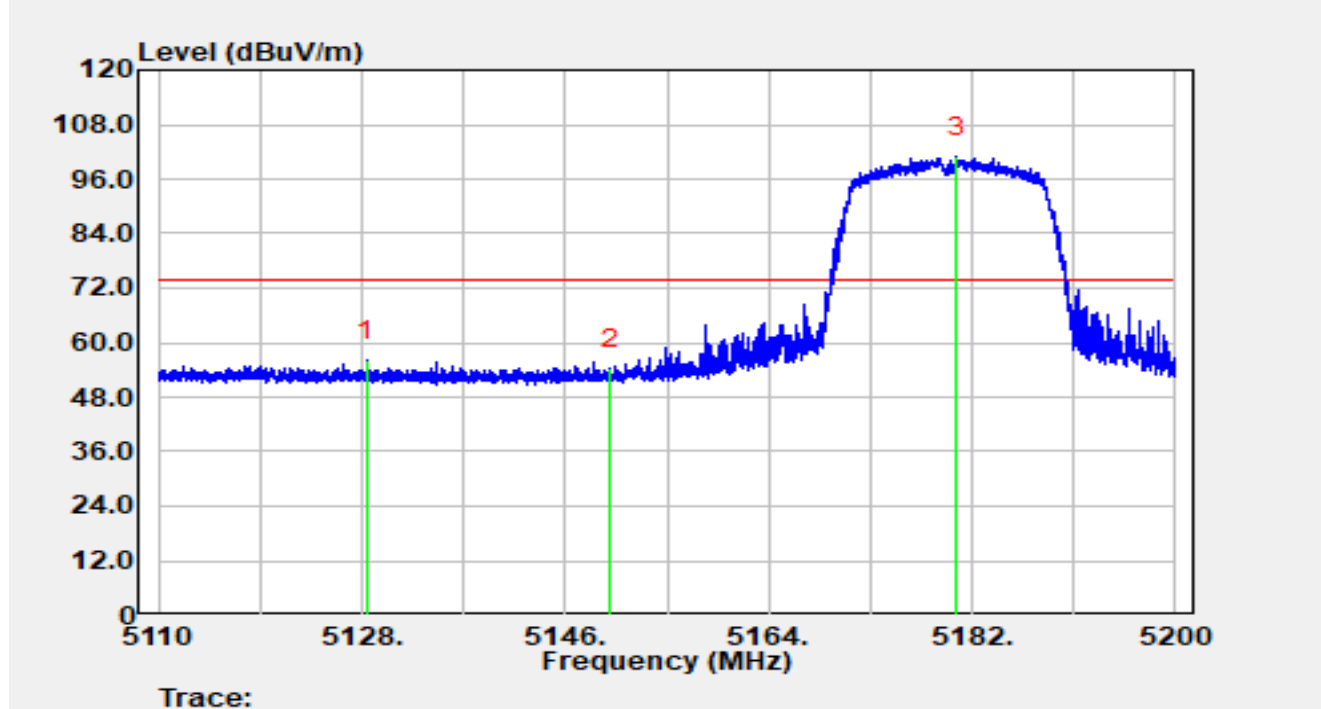


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5128.43	37.28	18.66	55.93	-18.07	74.00	Peak
2		5150.00	35.78	18.49	54.27	-19.73	74.00	Peak
3		5180.60	82.18	18.79	100.97	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

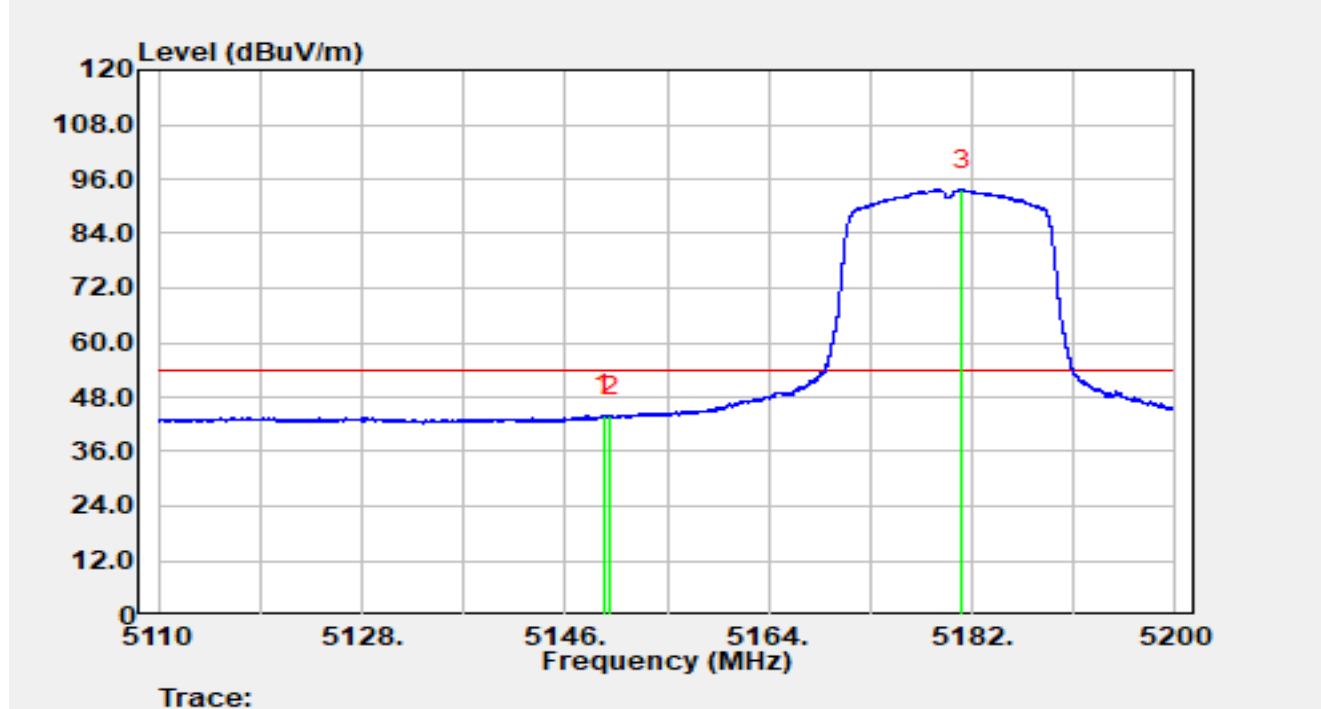


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.38	25.64	18.49	44.13	-9.87	54.00	Average
2		5150.00	25.21	18.49	43.70	-10.30	54.00	Average
3		5181.15	74.89	18.79	93.68	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

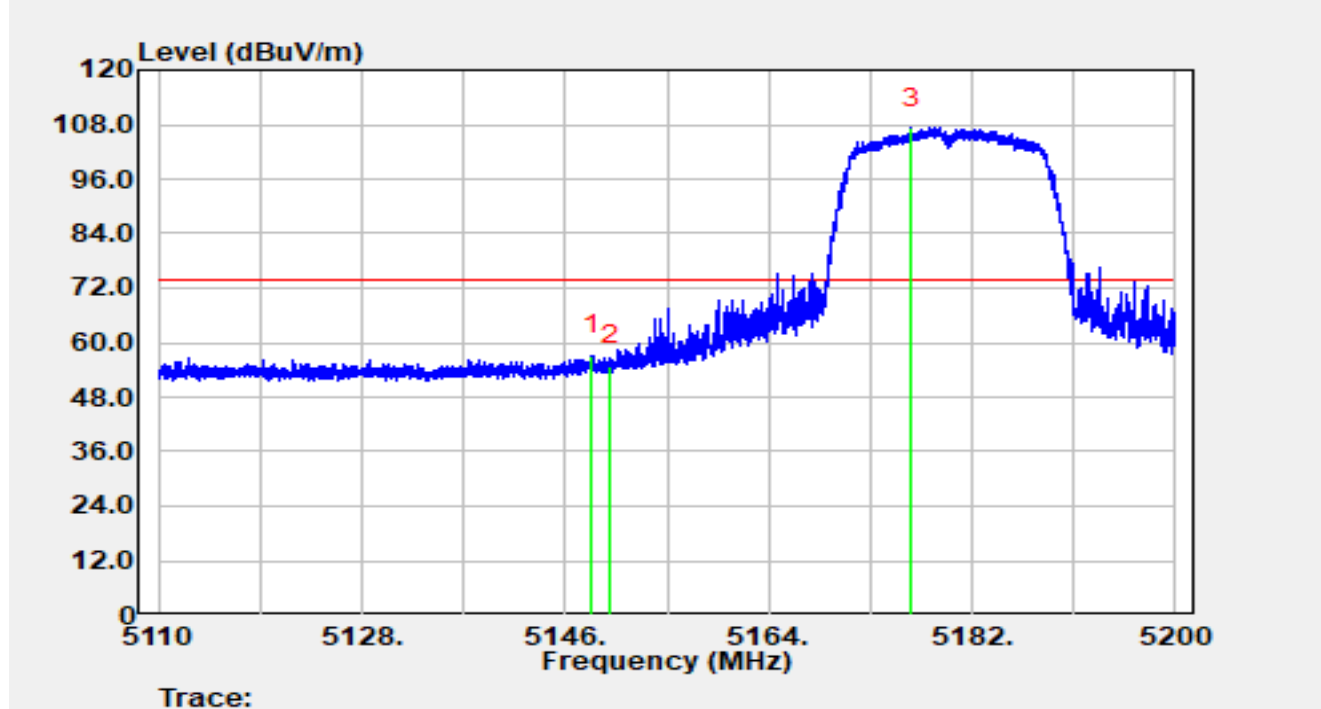


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.39	38.63	18.49	57.12	-16.88	74.00	Peak
2		5150.00	36.38	18.49	54.87	-19.13	74.00	Peak
3		5176.61	88.49	18.78	107.27	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

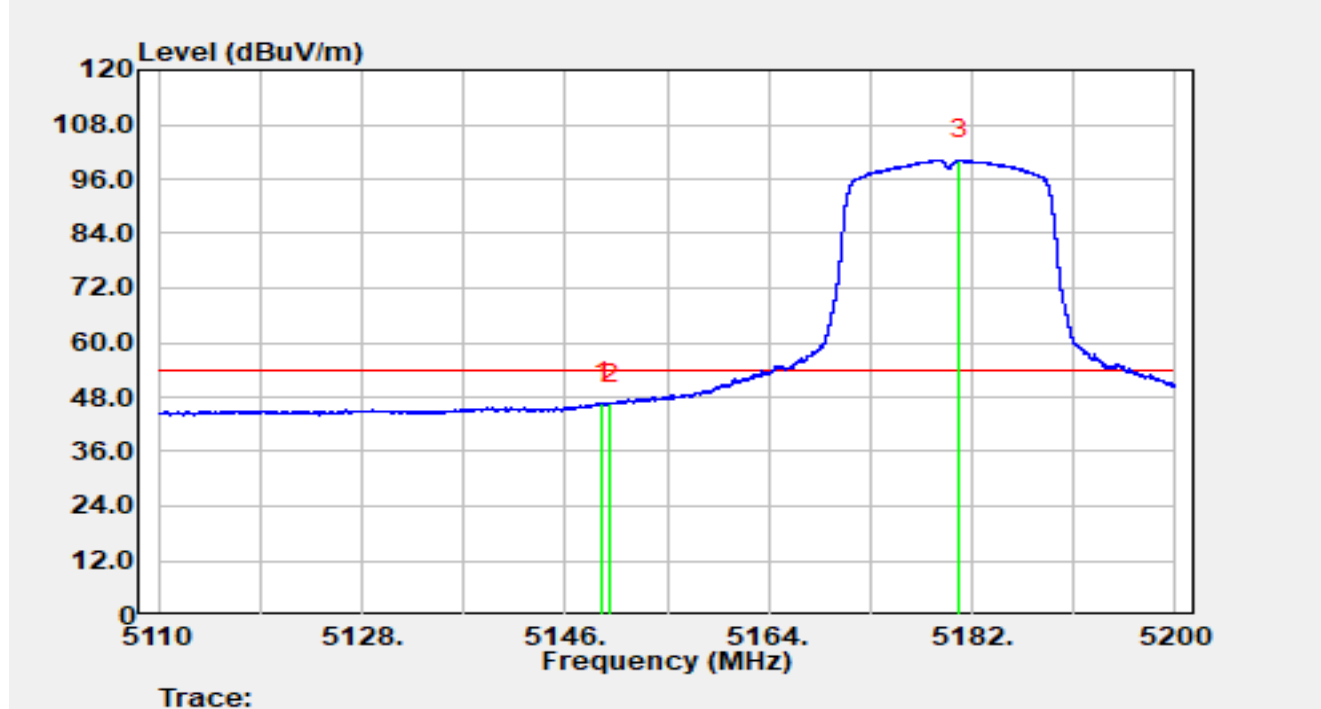


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.23	28.36	18.49	46.85	-7.15	54.00	Average
2		5150.00	28.12	18.49	46.61	-7.39	54.00	Average
3		5180.86	81.42	18.79	100.21	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

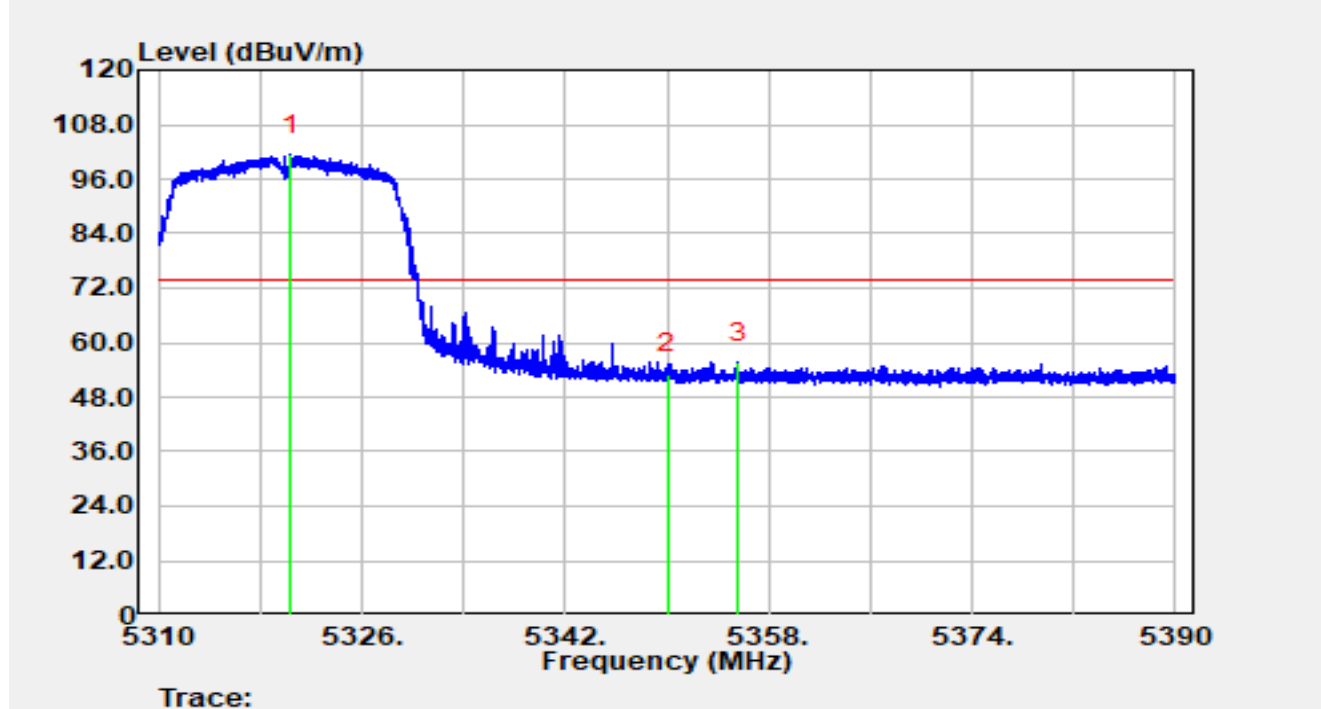


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.43	82.77	18.49	101.26	N/A	N/A	Peak
2		5350.00	34.31	18.73	53.04	-20.96	74.00	Peak
3	*	5355.57	36.80	18.80	55.60	-18.40	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

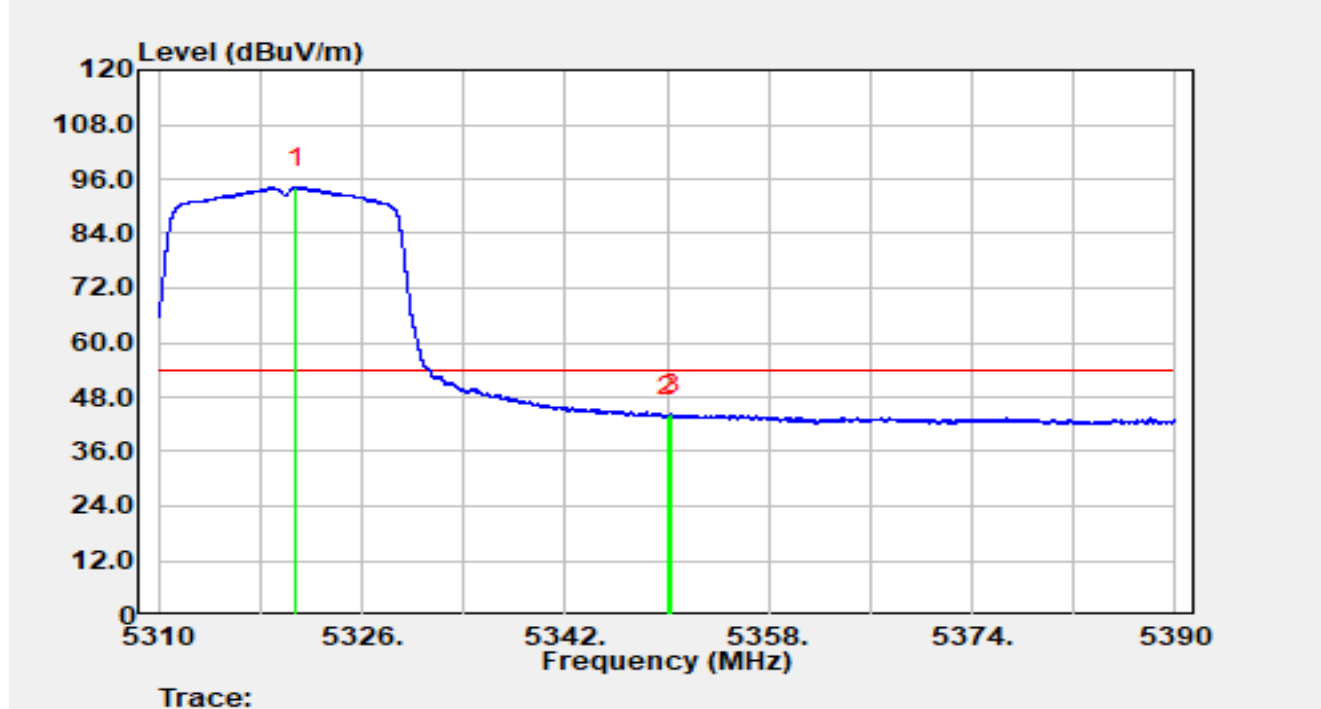


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.82	75.67	18.49	94.15	N/A	N/A	Average
2		5350.00	25.13	18.73	43.86	-10.14	54.00	Average
3	*	5350.39	25.46	18.74	44.20	-9.80	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

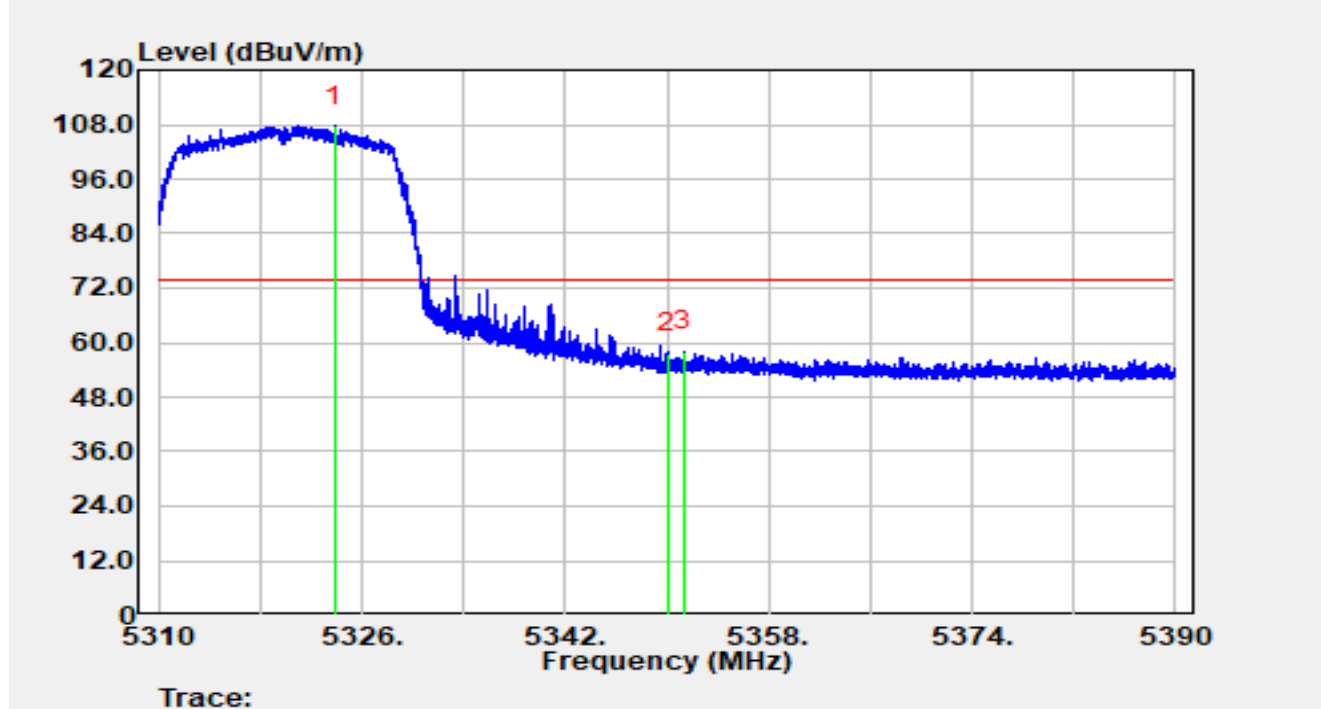


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5323.84	89.13	18.48	107.61	N/A	N/A	Peak
2		5350.00	38.97	18.73	57.70	-16.30	74.00	Peak
3	*	5351.30	39.36	18.75	58.11	-15.89	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

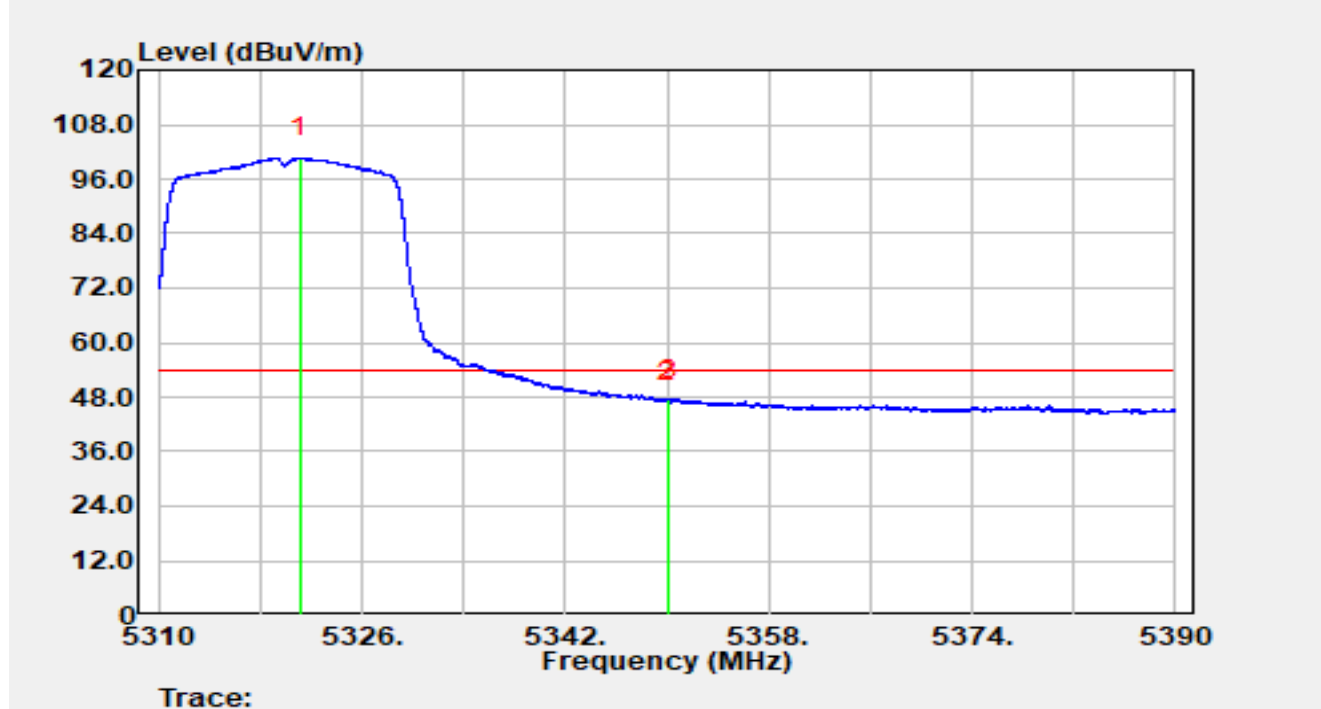


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.18	82.27	18.49	100.75	N/A	N/A	Average
2		5350.00	28.24	18.73	46.97	-7.03	54.00	Average
3	*	5350.21	28.81	18.73	47.54	-6.46	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

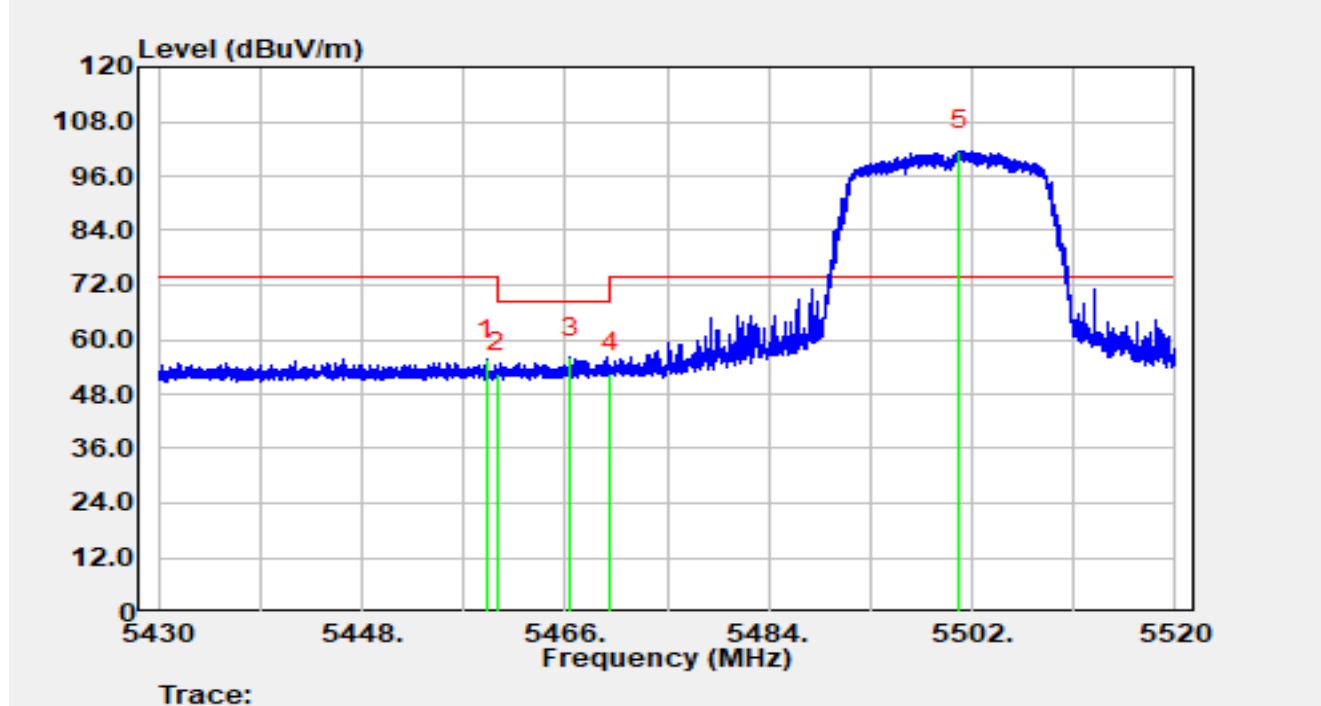


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5459.03	36.66	18.98	55.65	-18.35	74.00	Peak
2		5460.00	33.57	18.99	52.55	-15.65	68.20	Peak
3	*	5466.46	37.13	18.94	56.06	-12.14	68.20	Peak
4		5470.00	33.82	18.90	52.72	-15.48	68.20	Peak
5		5500.84	82.67	18.79	101.46	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

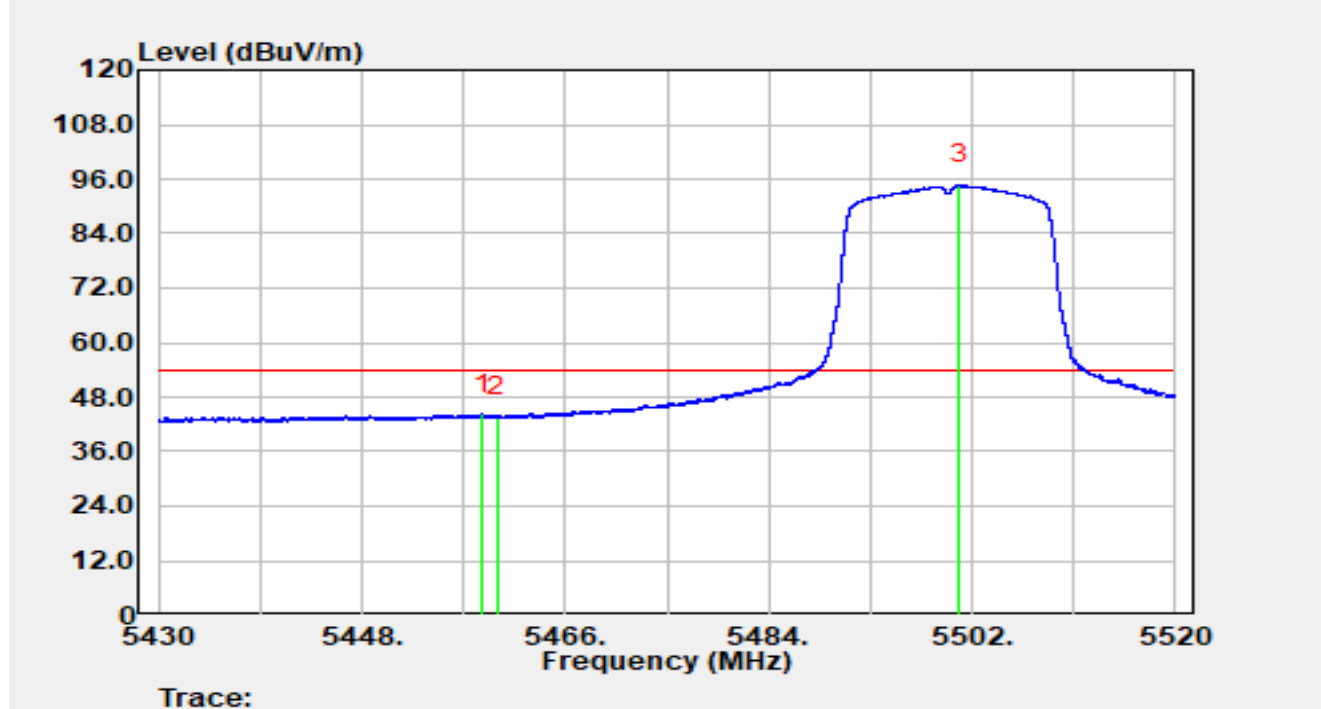


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.67	25.19	18.98	44.17	-9.83	54.00	Average
2		5460.00	24.66	18.99	43.65	-10.35	54.00	Average
3		5500.89	75.88	18.79	94.67	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

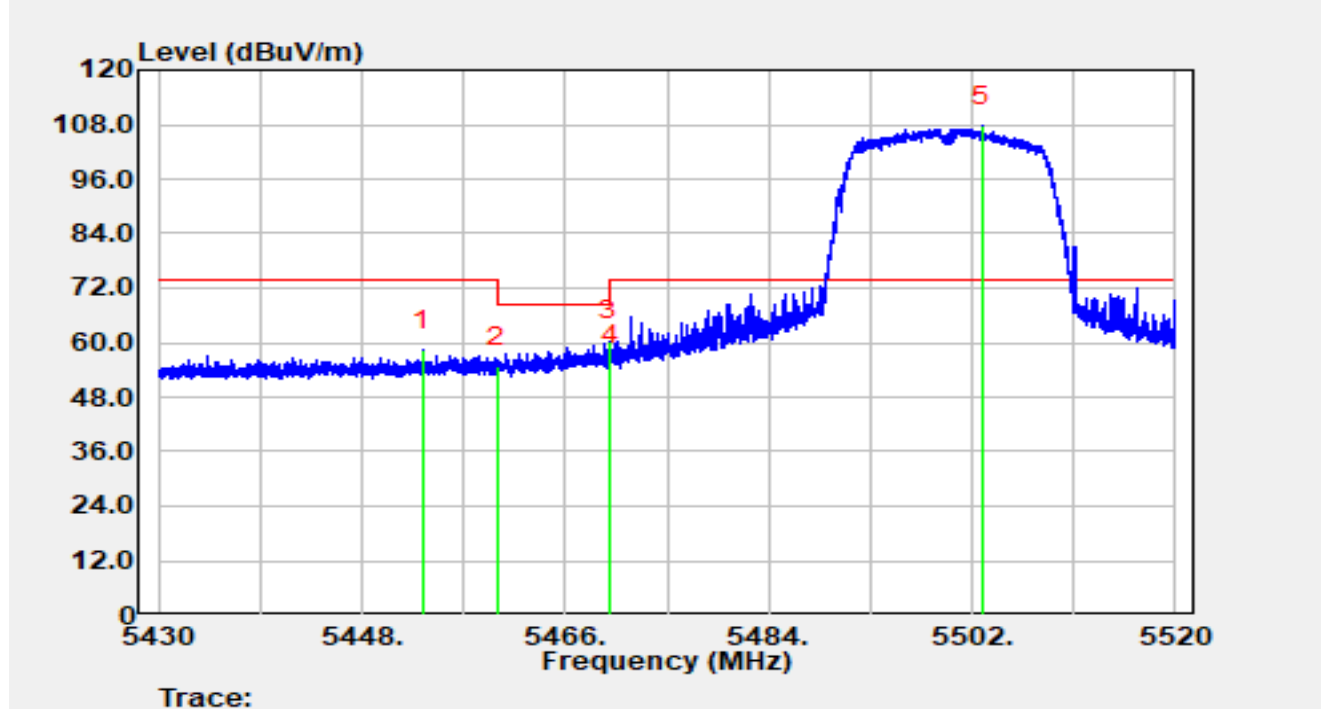


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.40	39.27	18.98	58.26	-15.74	74.00	Peak
2		5460.00	35.64	18.99	54.63	-13.57	68.20	Peak
3	*	5469.91	41.48	18.90	60.38	-7.82	68.20	Peak
4		5470.00	36.31	18.90	55.21	-12.99	68.20	Peak
5		5502.89	88.91	18.81	107.72	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

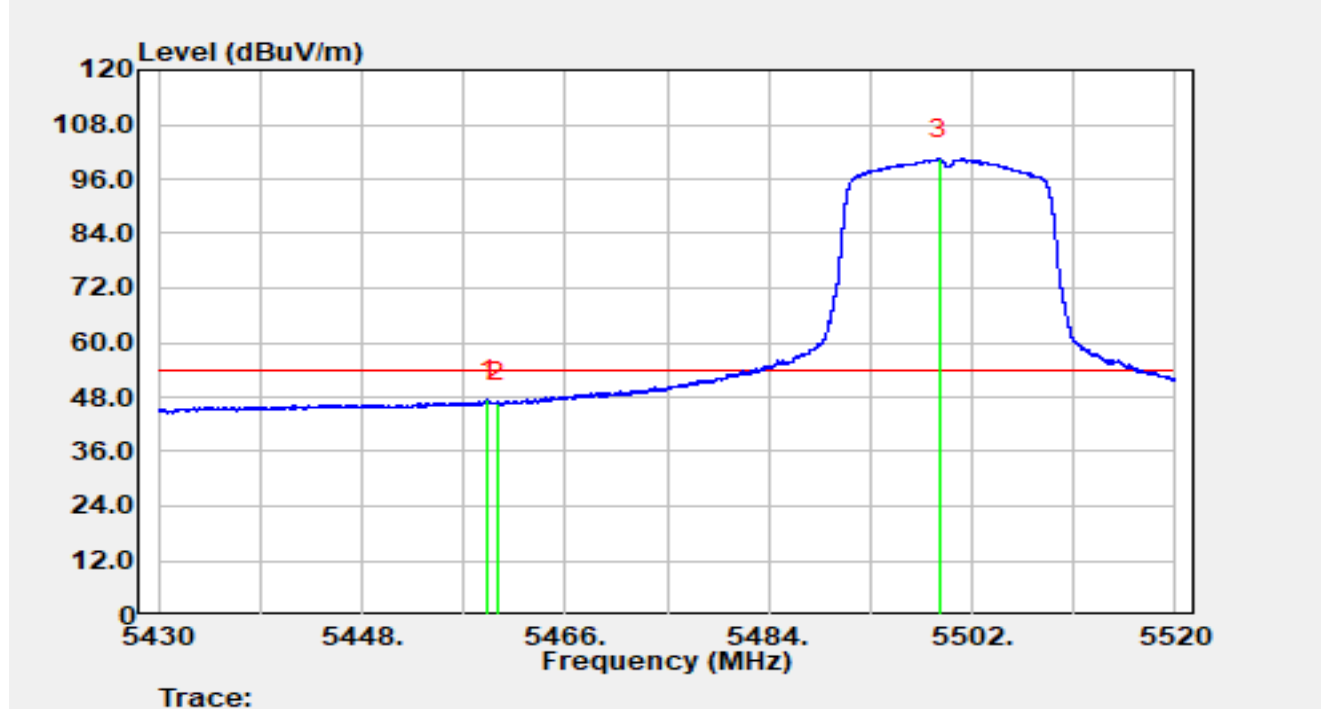


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.20	28.42	18.98	47.41	-6.59	54.00	Average
2		5460.00	27.66	18.99	46.65	-7.35	54.00	Average
3		5499.11	81.54	18.78	100.32	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

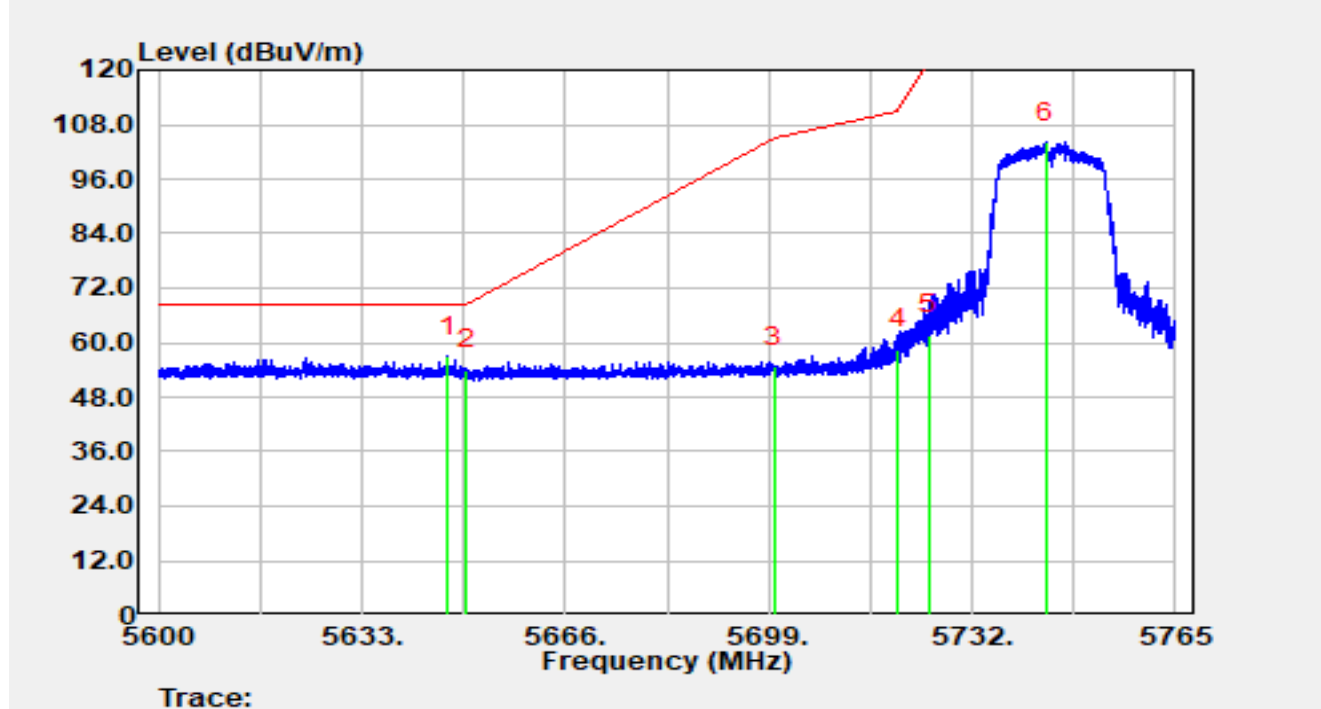


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5646.86	37.38	19.49	56.87	-11.33	68.20	Peak
2		5650.00	34.47	19.43	53.90	-14.30	68.20	Peak
3		5700.00	34.78	19.89	54.67	-50.53	105.20	Peak
4		5720.00	38.36	20.13	58.49	-52.31	110.80	Peak
5		5725.00	41.67	20.08	61.75	-60.45	122.20	Peak
6		5744.05	84.28	19.85	104.14	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

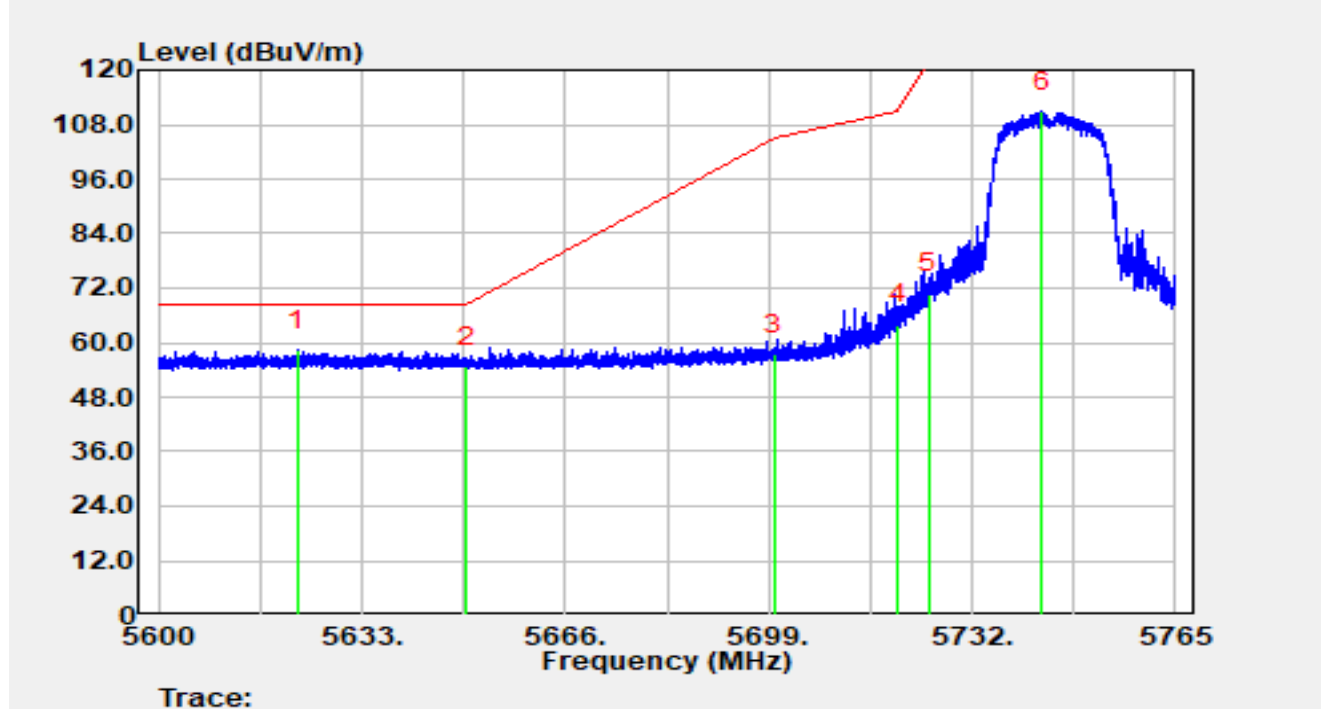


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5622.51	38.55	19.68	58.23	-9.97	68.20	Peak
2		5650.00	35.21	19.43	54.64	-13.56	68.20	Peak
3		5700.00	37.55	19.89	57.44	-47.76	105.20	Peak
4		5720.00	43.88	20.13	64.01	-46.79	110.80	Peak
5		5725.00	50.61	20.08	70.68	-51.52	122.20	Peak
6		5743.44	91.02	19.86	110.89	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

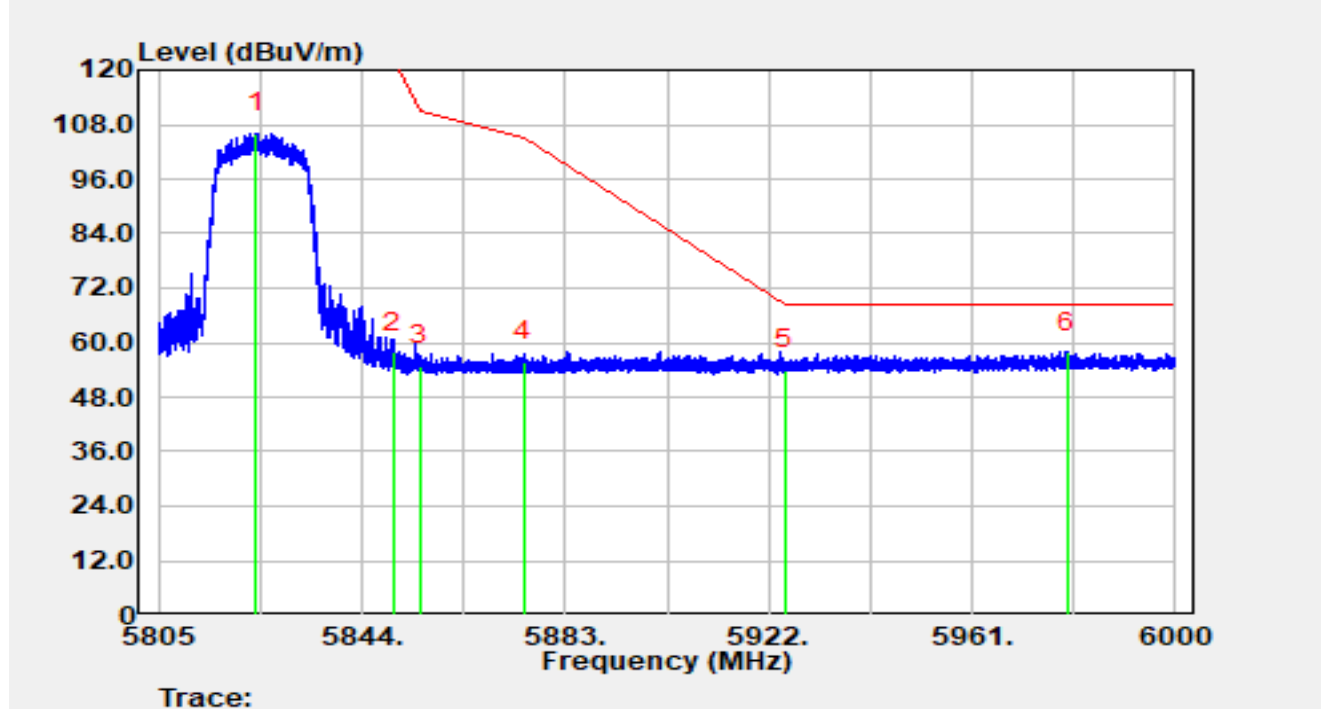


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.60	85.65	20.37	106.02	N/A	N/A	Peak
2		5850.00	37.79	20.14	57.93	-64.27	122.20	Peak
3		5855.00	34.72	20.15	54.87	-55.93	110.80	Peak
4		5875.00	35.22	20.50	55.72	-49.48	105.20	Peak
5		5925.00	33.55	20.52	54.07	-14.13	68.20	Peak
6	*	5979.14	37.00	20.94	57.94	-10.26	68.20	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

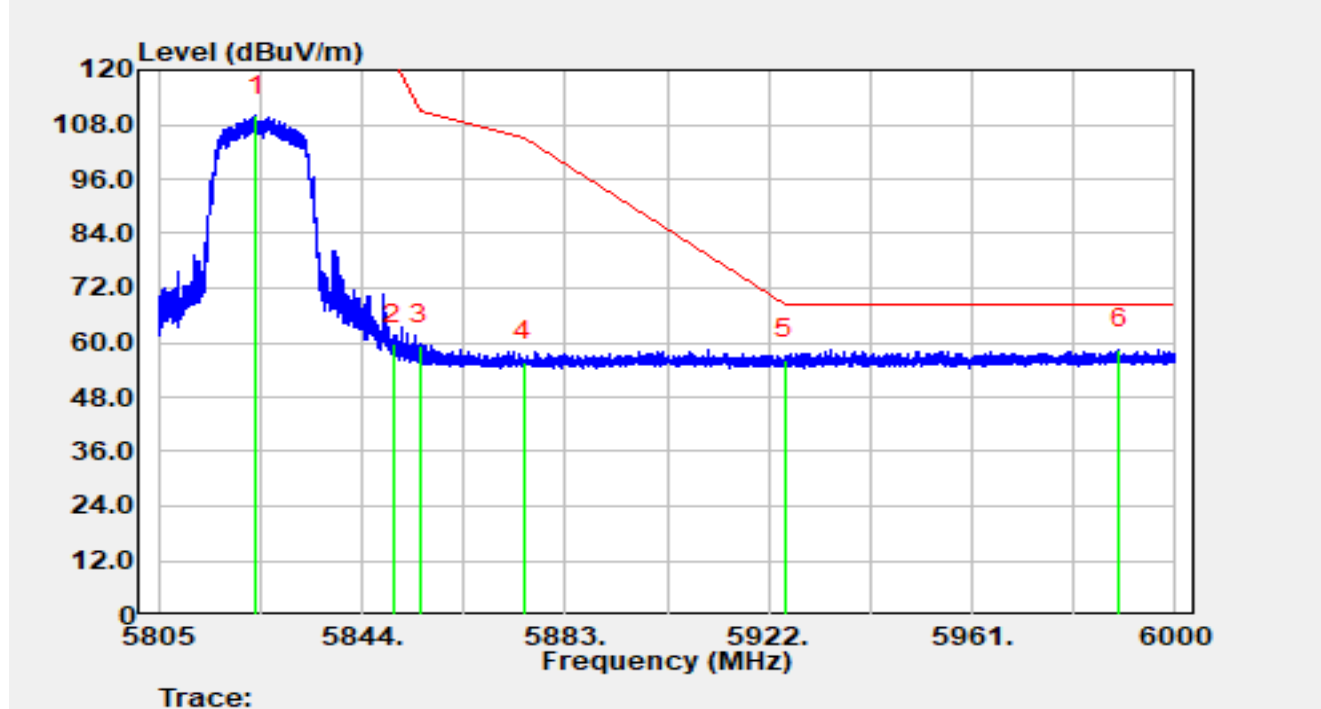


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.80	89.51	20.37	109.88	N/A	N/A	Peak
2		5850.00	39.52	20.14	59.66	-62.54	122.20	Peak
3		5855.00	39.25	20.15	59.39	-51.41	110.80	Peak
4		5875.00	35.30	20.50	55.80	-49.40	105.20	Peak
5		5925.00	35.68	20.52	56.21	-11.99	68.20	Peak
6	*	5989.26	37.65	20.96	58.61	-9.59	68.20	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

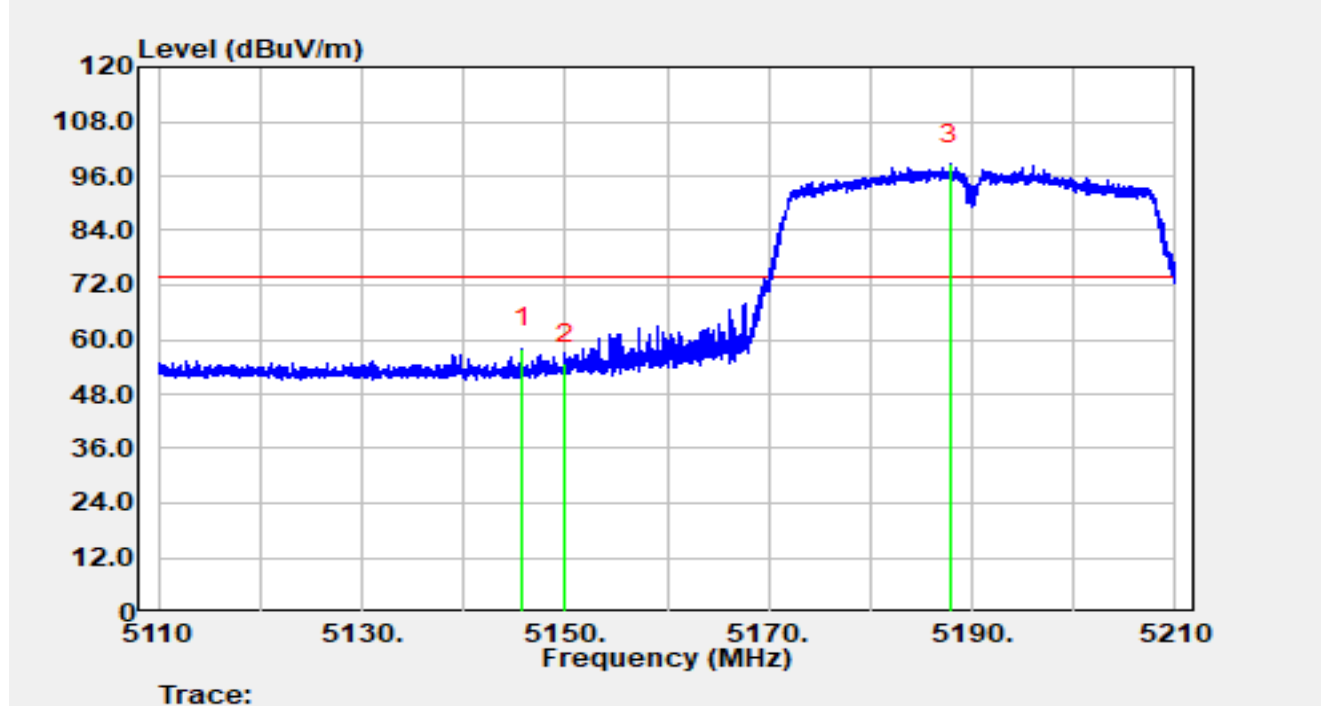


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5145.81	39.57	18.50	58.07	-15.93	74.00	Peak
2		5150.00	36.14	18.49	54.63	-19.37	74.00	Peak
3		5187.85	79.78	18.78	98.56	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

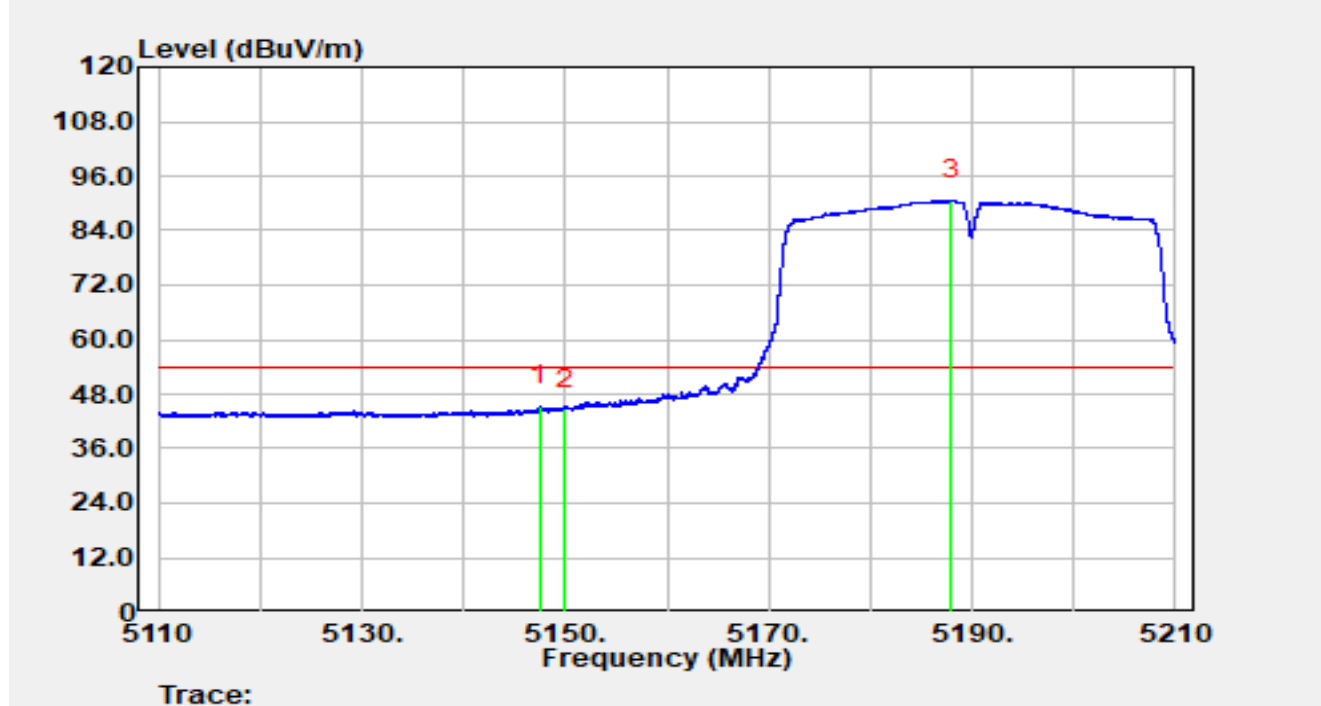


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.46	26.81	18.50	45.30	-8.70	54.00	Average
2		5150.00	26.28	18.49	44.77	-9.23	54.00	Average
3		5188.03	71.97	18.78	90.75	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

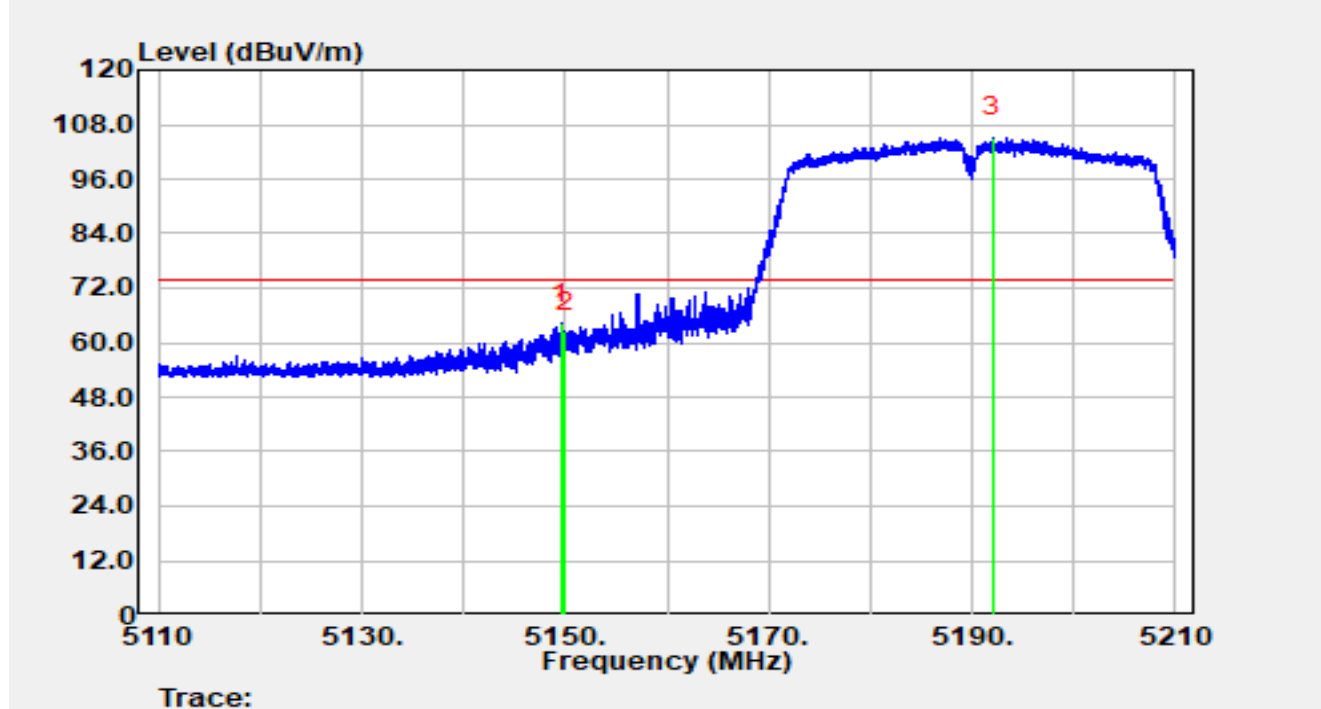


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.61	45.71	18.49	64.20	-9.80	74.00	Peak
2		5150.00	43.90	18.49	62.39	-11.61	74.00	Peak
3		5192.09	86.36	18.74	105.10	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

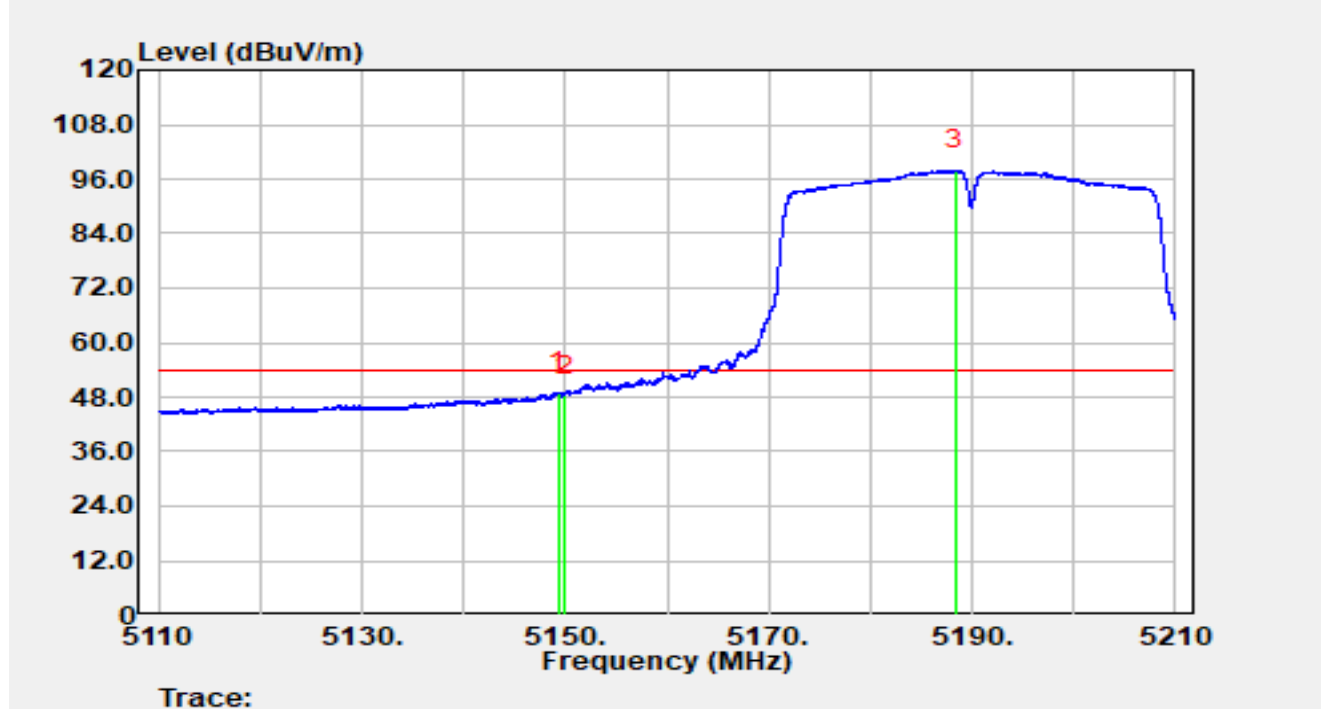


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.39	30.54	18.49	49.03	-4.97	54.00	Average
2		5150.00	29.95	18.49	48.44	-5.56	54.00	Average
3		5188.31	79.07	18.78	97.84	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

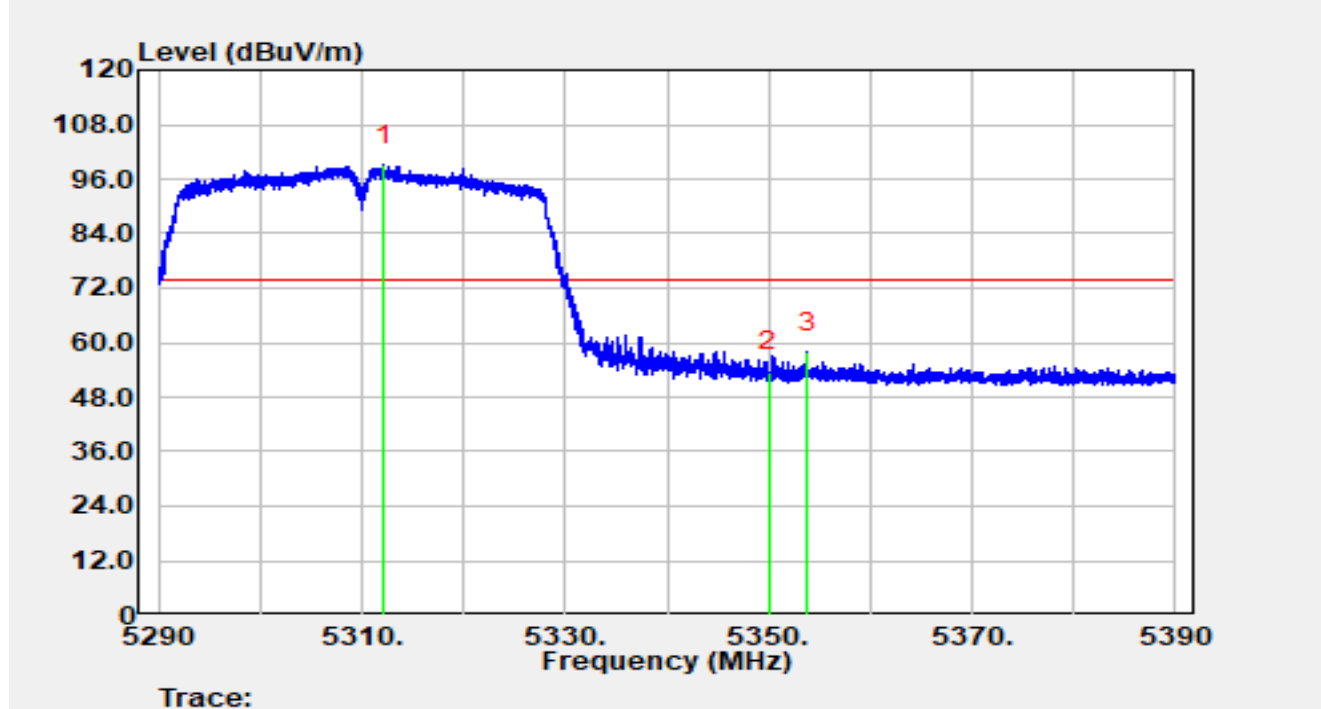


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.12	80.57	18.52	99.09	N/A	N/A	Peak
2		5350.00	34.76	18.73	53.49	-20.51	74.00	Peak
3	*	5353.79	39.06	18.78	57.84	-16.16	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

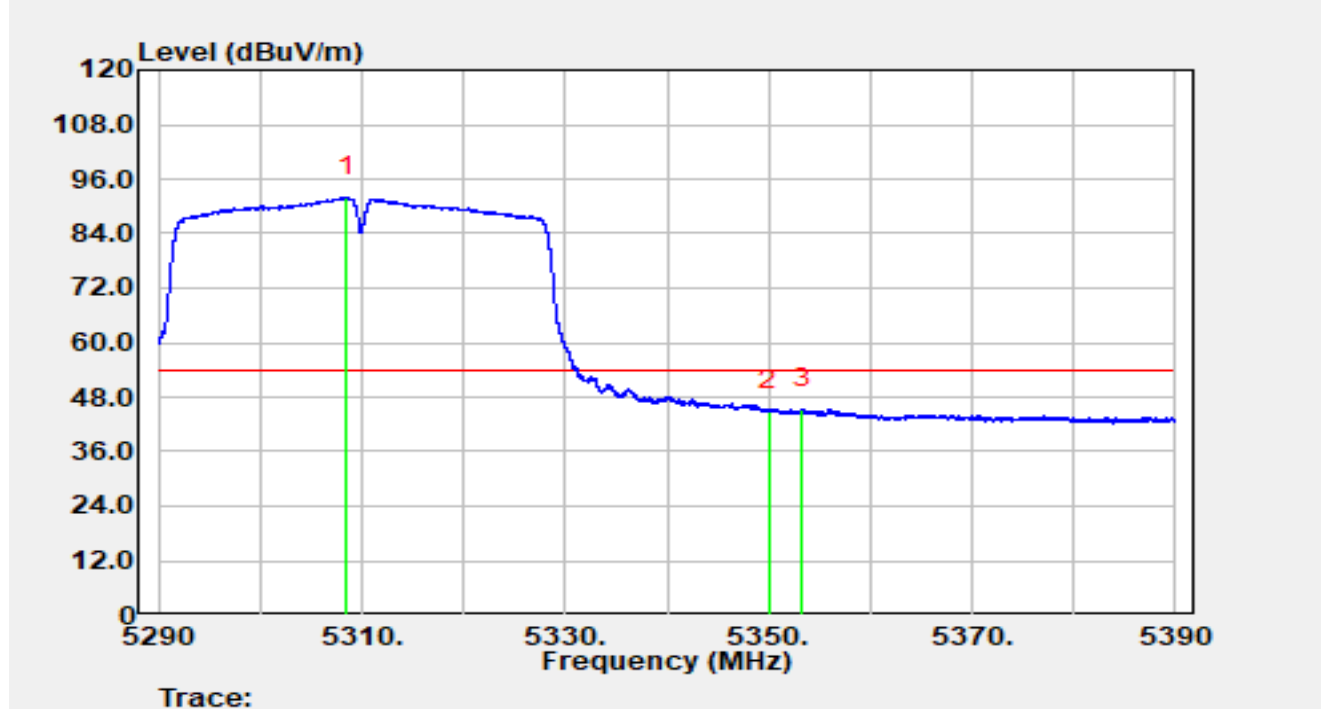


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.47	73.55	18.52	92.07	N/A	N/A	Average
2		5350.00	26.17	18.73	44.90	-9.10	54.00	Average
3	*	5353.24	26.70	18.77	45.48	-8.52	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

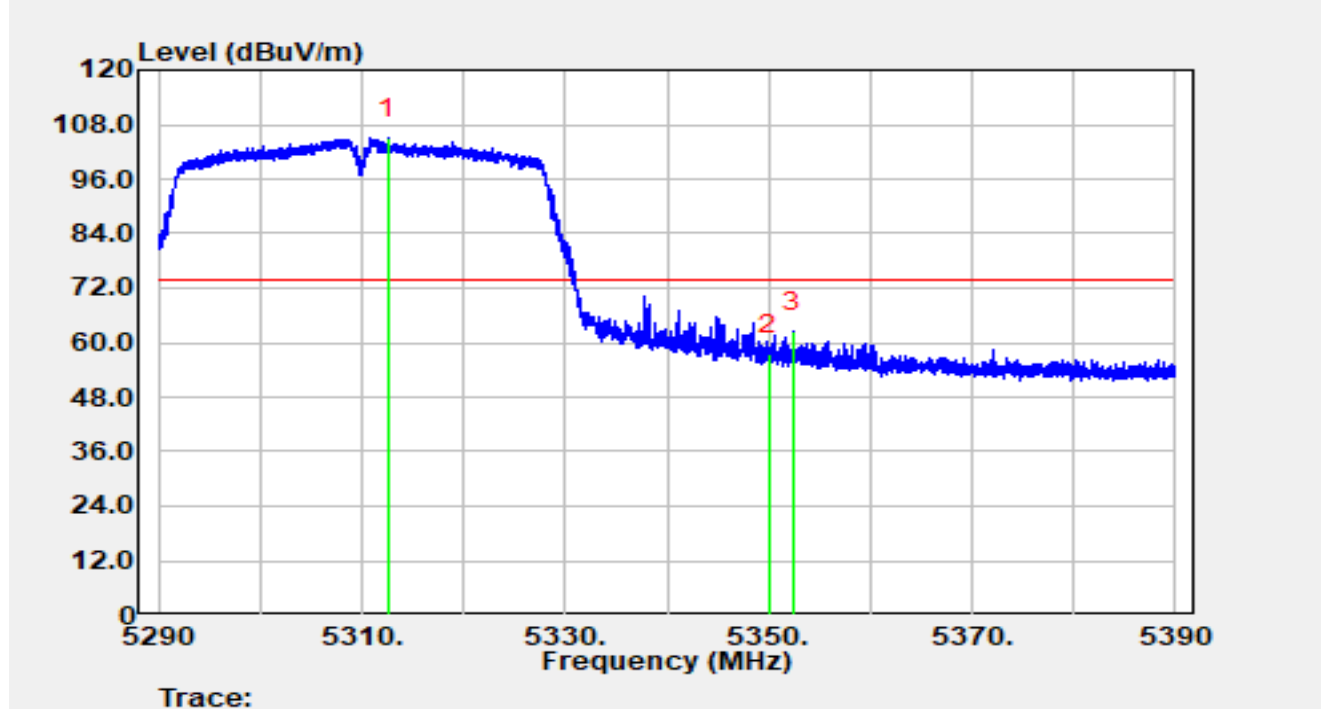


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.57	86.51	18.52	105.03	N/A	N/A	Peak
2		5350.00	38.58	18.73	57.31	-16.69	74.00	Peak
3	*	5352.41	43.56	18.76	62.33	-11.67	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

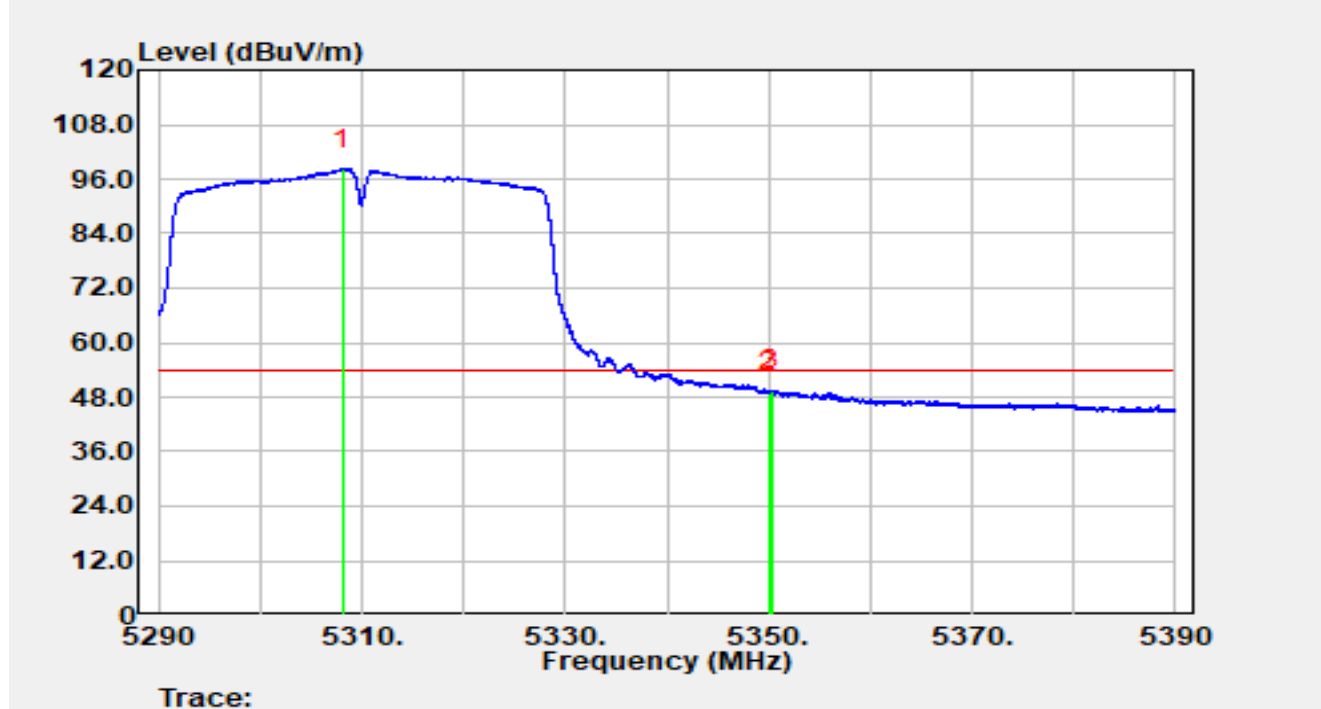


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.09	79.60	18.52	98.12	N/A	N/A	Average
2		5350.00	30.34	18.73	49.08	-4.92	54.00	Average
3	*	5350.31	30.72	18.73	49.45	-4.55	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

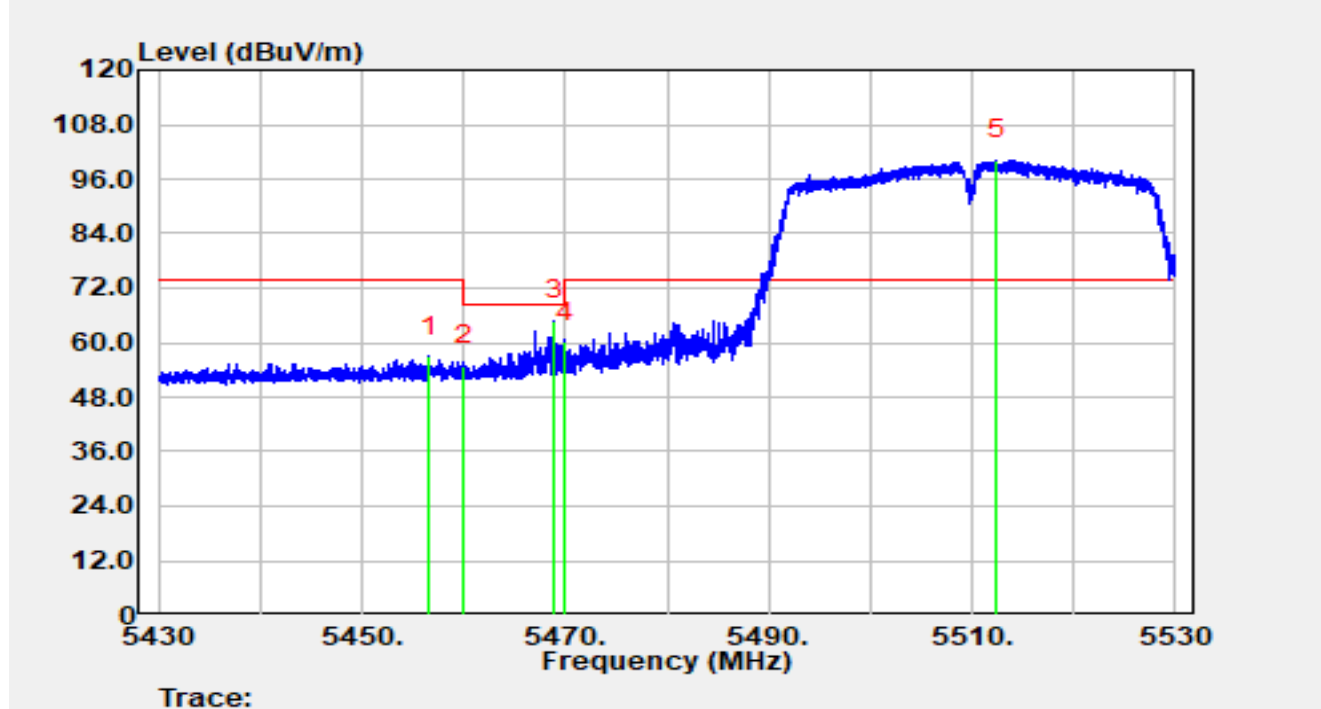


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5456.64	38.08	18.98	57.06	-16.94	74.00	Peak
2		5460.00	35.86	18.99	54.85	-13.35	68.20	Peak
3	*	5468.89	45.85	18.91	64.76	-3.44	68.20	Peak
4		5470.00	41.33	18.90	60.23	-7.97	68.20	Peak
5		5512.47	81.34	18.86	100.20	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

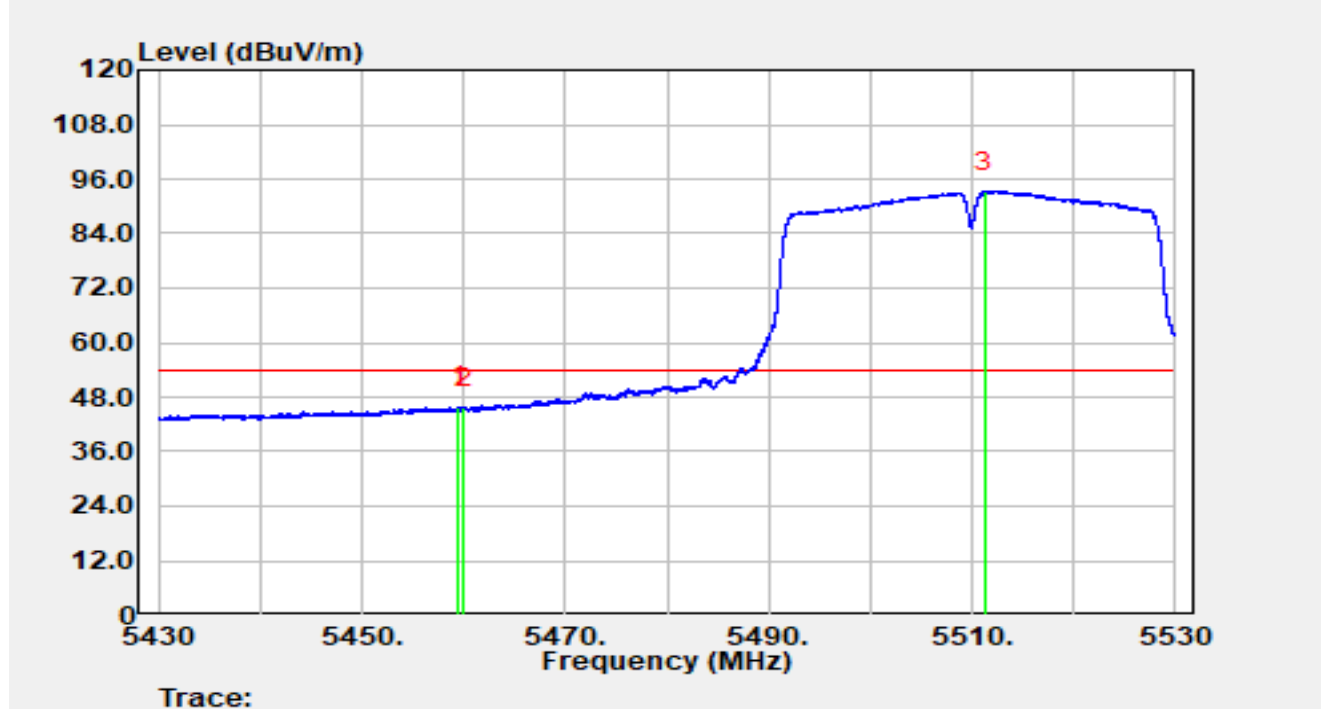


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.48	26.85	18.99	45.83	-8.17	54.00	Average
2		5460.00	26.75	18.99	45.74	-8.26	54.00	Average
3		5511.23	74.41	18.86	93.27	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

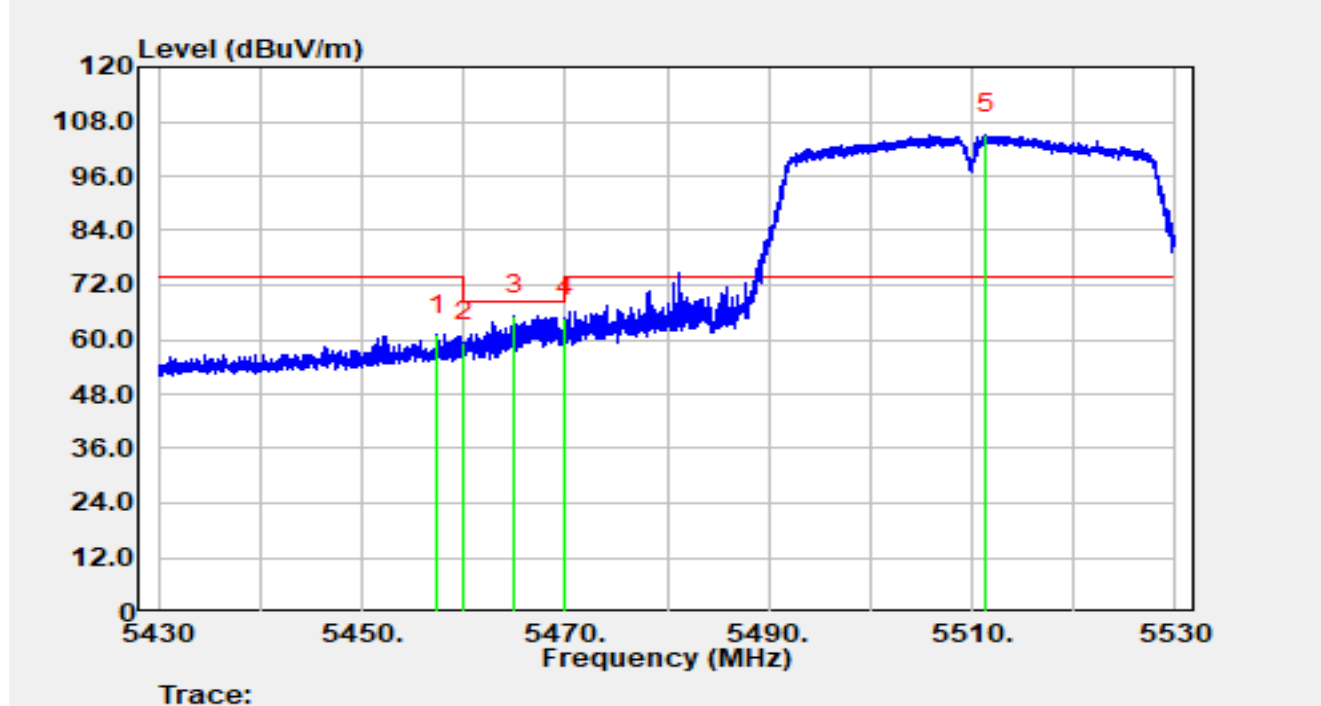


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.40	42.03	18.98	61.01	-12.99	74.00	Peak
2		5460.00	40.55	18.99	59.54	-8.66	68.20	Peak
3	*	5464.99	46.44	18.95	65.39	-2.81	68.20	Peak
4		5470.00	45.86	18.90	64.76	-3.44	68.20	Peak
5		5511.35	86.24	18.86	105.09	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

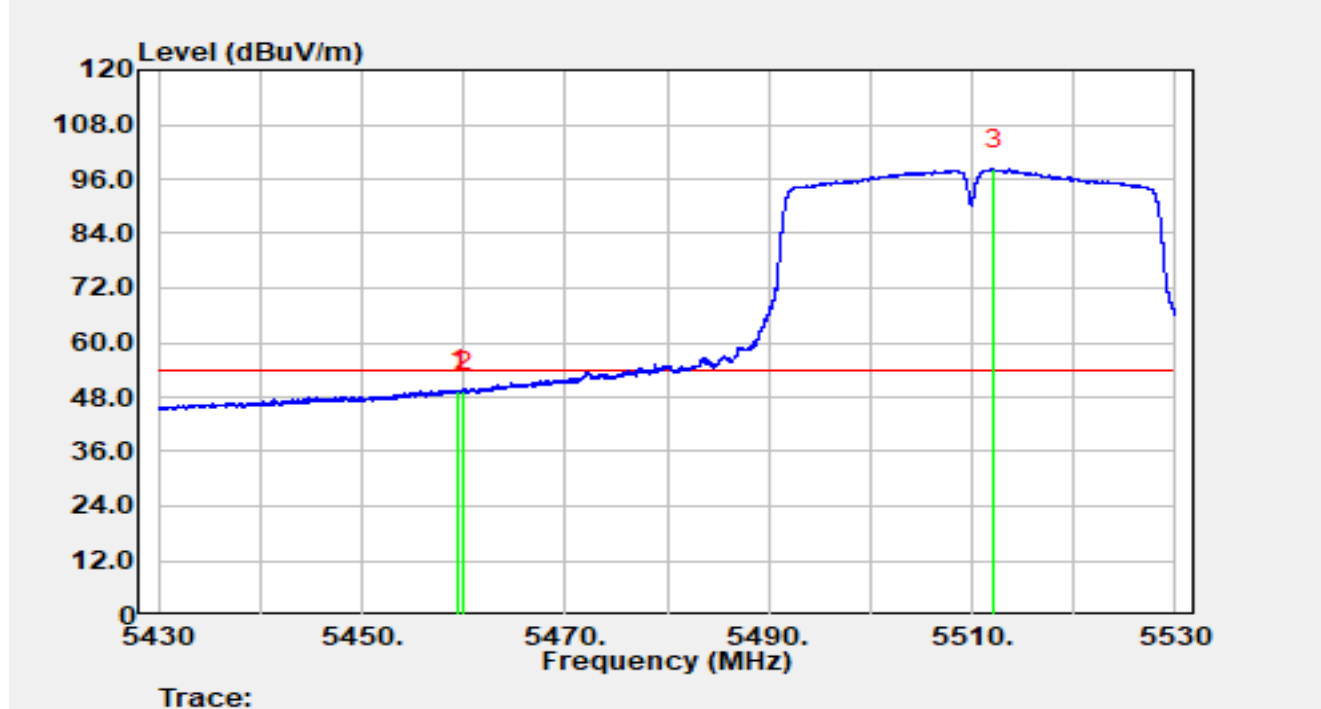


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.46	30.49	18.99	49.48	-4.52	54.00	Average
2		5460.00	30.22	18.99	49.21	-4.79	54.00	Average
3		5512.10	79.32	18.86	98.18	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

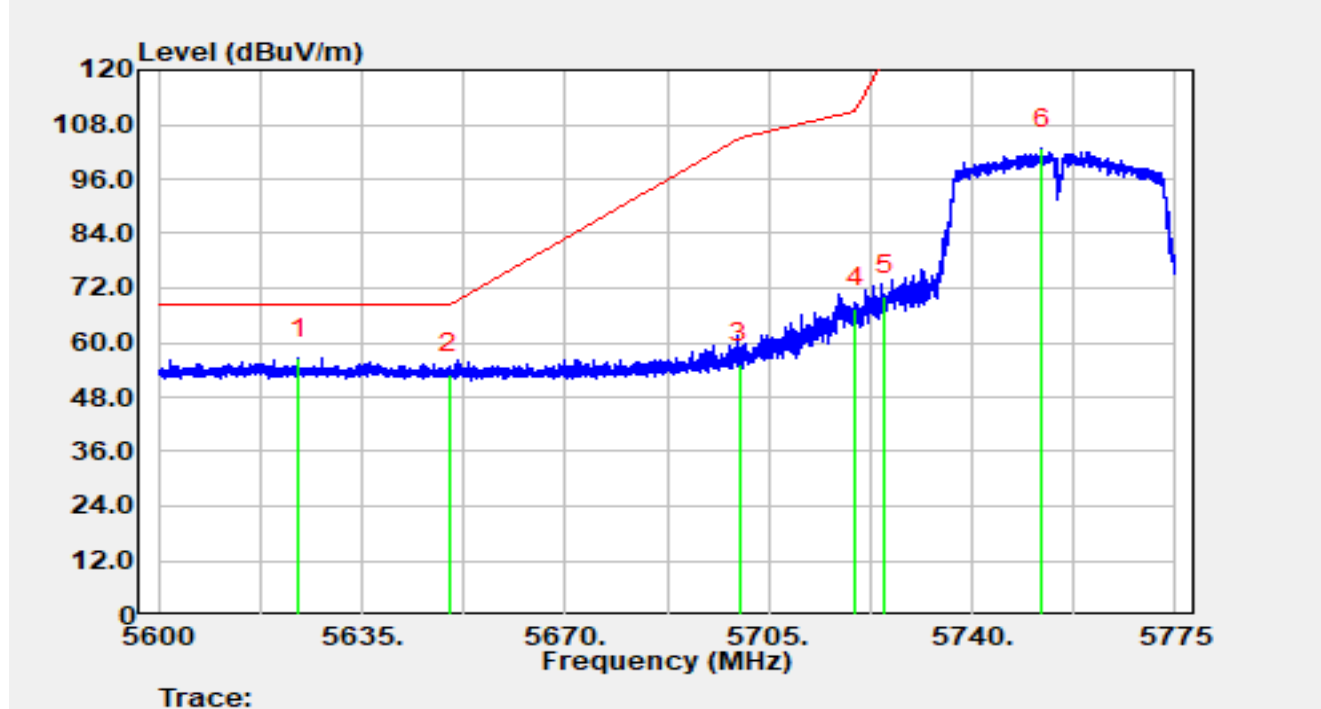


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5624.01	36.91	19.69	56.60	-11.60	68.20	Peak
2		5650.00	33.74	19.43	53.18	-15.02	68.20	Peak
3		5700.00	35.44	19.89	55.33	-49.87	105.20	Peak
4		5720.00	47.38	20.13	67.52	-43.28	110.80	Peak
5		5725.00	50.16	20.08	70.24	-51.96	122.20	Peak
6		5752.02	82.99	19.79	102.77	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

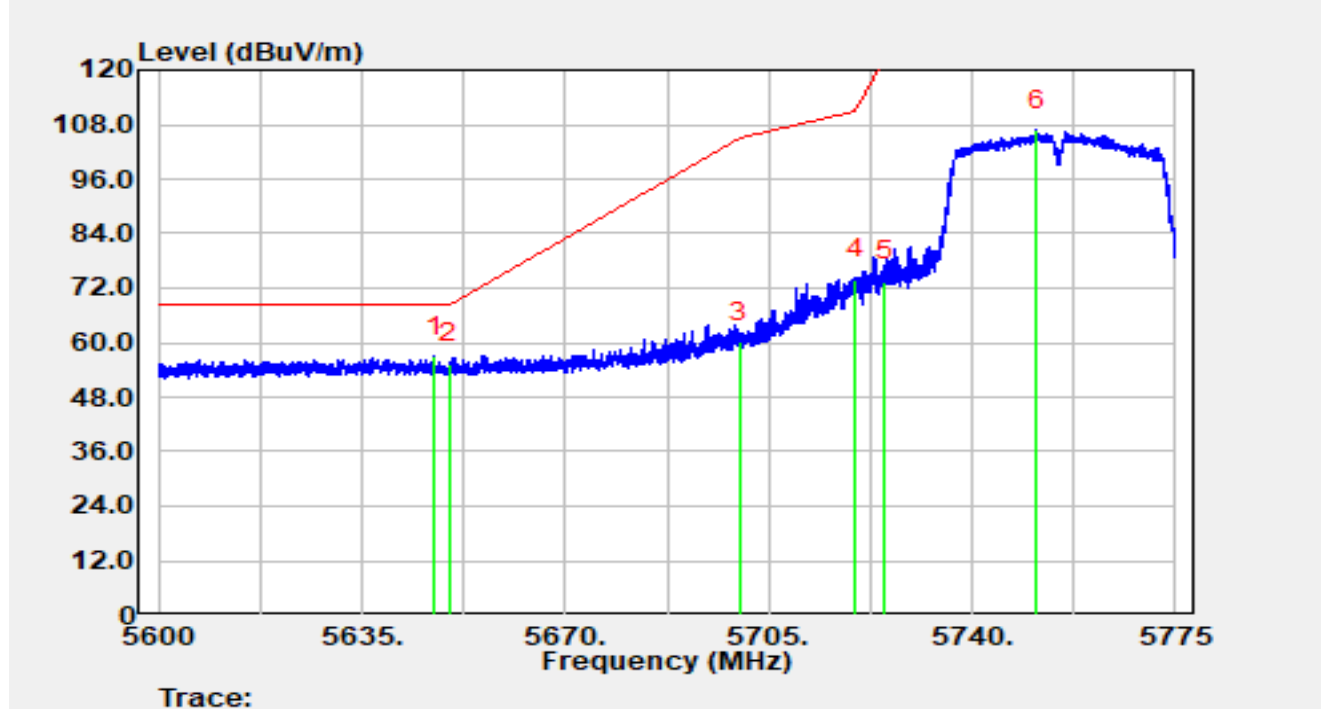


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.55	37.47	19.48	56.95	-11.25	68.20	Peak
2		5650.00	36.03	19.43	55.47	-12.73	68.20	Peak
3		5700.00	40.26	19.89	60.15	-45.05	105.20	Peak
4		5720.00	53.72	20.13	73.85	-36.95	110.80	Peak
5		5725.00	53.33	20.08	73.41	-48.79	122.20	Peak
6		5751.18	86.90	19.79	106.69	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

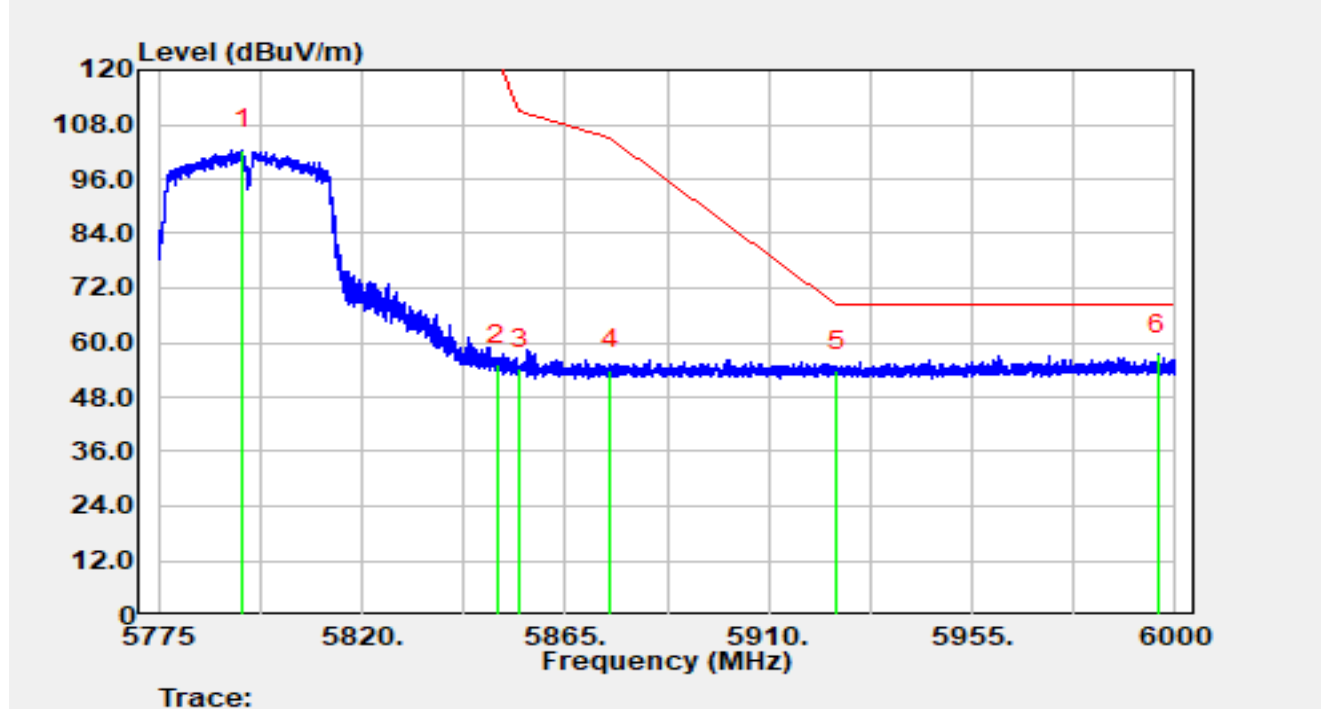


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5793.65	82.10	20.33	102.43	N/A	N/A	Peak
2		5850.00	35.05	20.14	55.18	-67.02	122.20	Peak
3		5855.00	34.02	20.15	54.17	-56.63	110.80	Peak
4		5875.00	33.45	20.50	53.95	-51.25	105.20	Peak
5		5925.00	33.36	20.52	53.89	-14.31	68.20	Peak
6	*	5996.22	36.37	20.96	57.33	-10.87	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

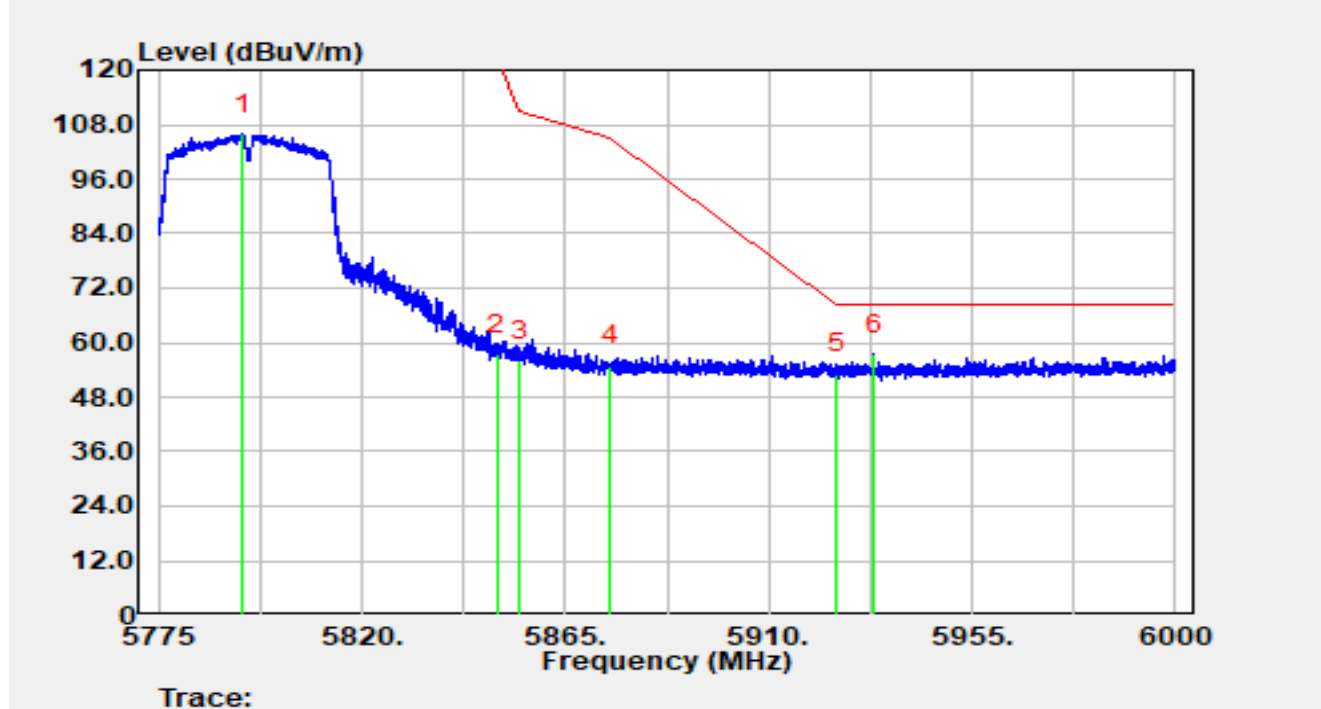


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5793.52	85.44	20.33	105.77	N/A	N/A	Peak
2		5850.00	37.15	20.14	57.29	-64.91	122.20	Peak
3		5855.00	35.79	20.15	55.93	-54.87	110.80	Peak
4		5875.00	34.37	20.50	54.87	-50.33	105.20	Peak
5		5925.00	32.68	20.52	53.20	-15.00	68.20	Peak
6	*	5933.22	36.91	20.56	57.47	-10.73	68.20	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

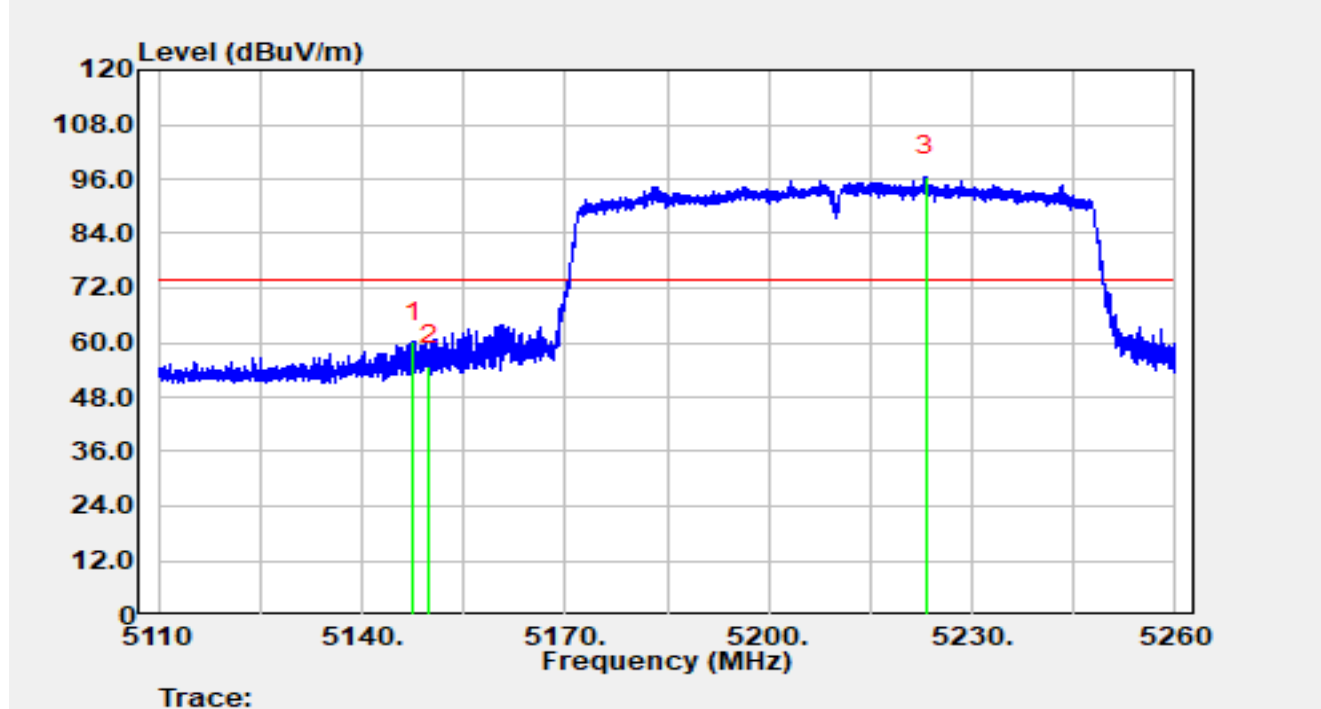


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.67	41.63	18.50	60.13	-13.87	74.00	Peak
2		5150.00	36.37	18.49	54.86	-19.14	74.00	Peak
3		5223.27	78.36	18.19	96.56	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

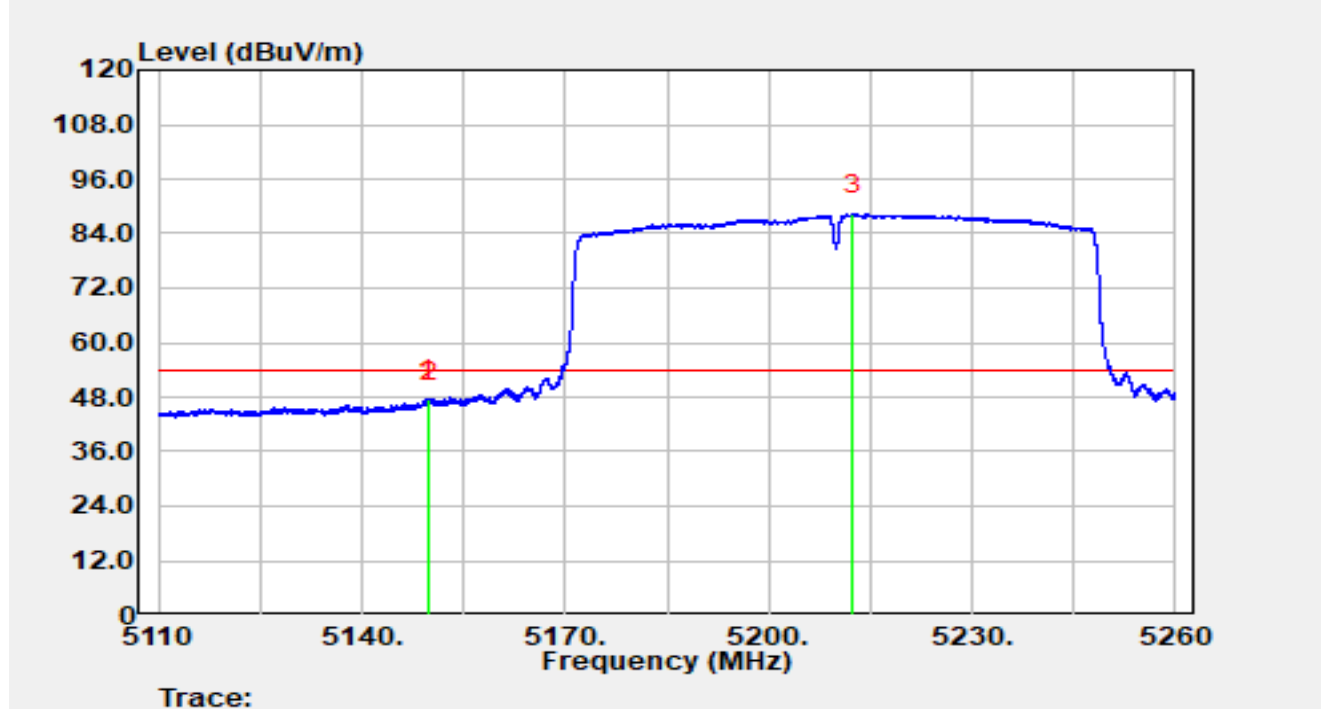


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.72	29.05	18.49	47.54	-6.46	54.00	Average
2		5150.00	28.31	18.49	46.80	-7.20	54.00	Average
3		5212.50	69.86	18.41	88.27	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

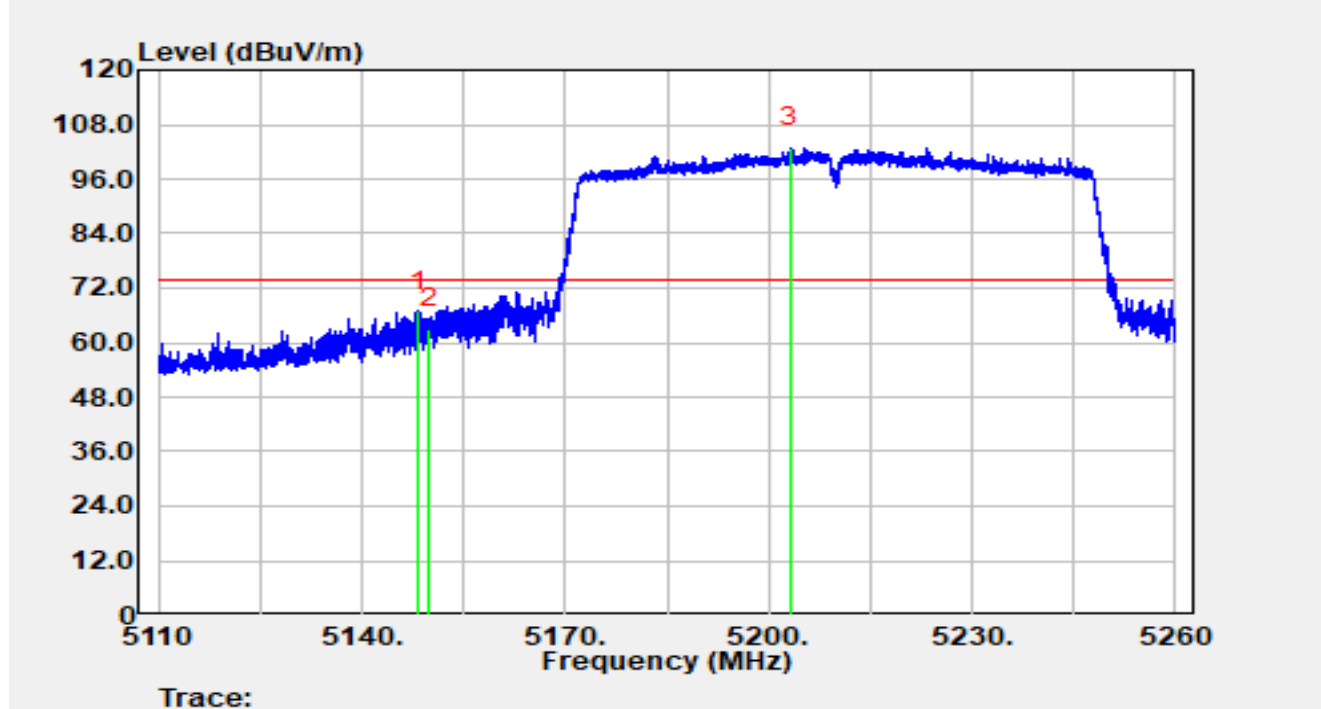


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.45	48.46	18.49	66.95	-7.05	74.00	Peak
2		5150.00	44.46	18.49	62.95	-11.05	74.00	Peak
3		5203.17	84.22	18.63	102.85	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

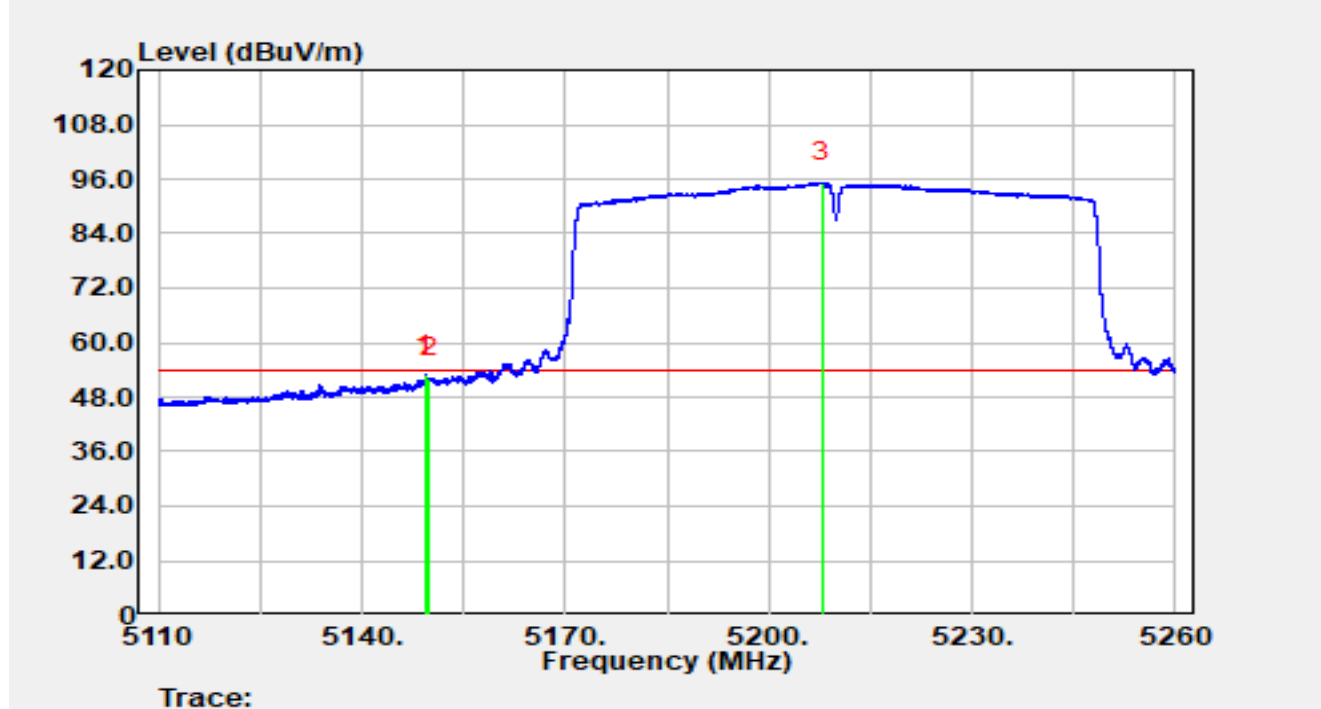


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.44	34.30	18.49	52.79	-1.21	54.00	Average
2		5150.00	33.60	18.49	52.09	-1.91	54.00	Average
3		5207.83	76.67	18.53	95.20	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

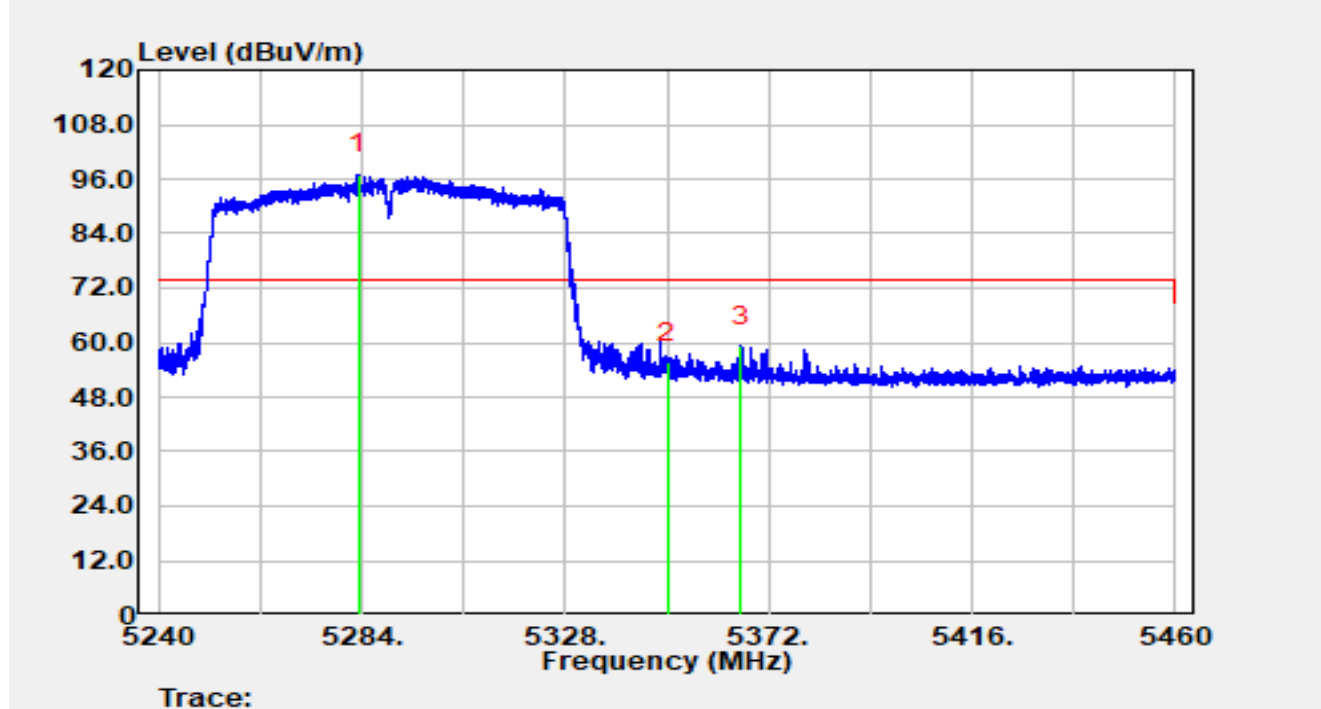


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5283.25	78.36	18.74	97.09	N/A	N/A	Peak
2		5350.00	36.77	18.73	55.50	-18.50	74.00	Peak
3	*	5366.06	40.26	18.84	59.10	-14.90	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

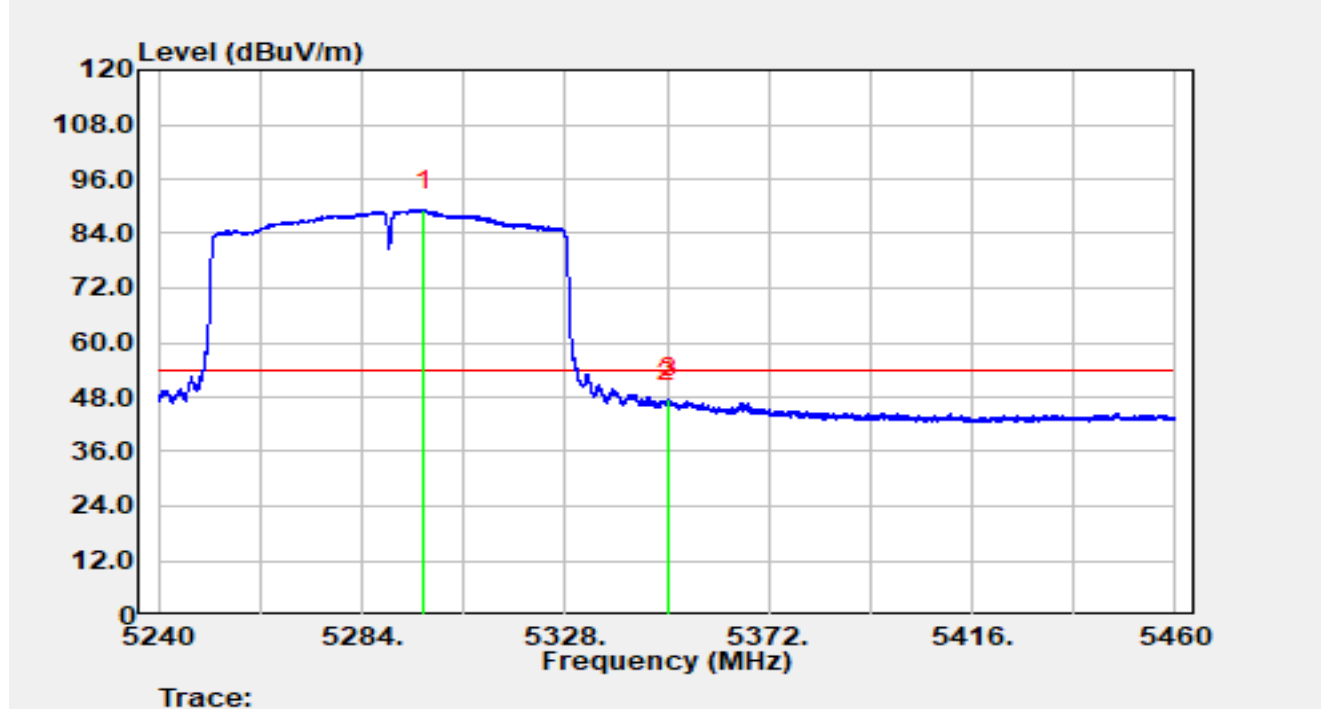


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5297.29	70.56	18.62	89.18	N/A	N/A	Average
2		5350.00	28.21	18.73	46.94	-7.06	54.00	Average
3	*	5350.33	28.89	18.74	47.62	-6.38	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

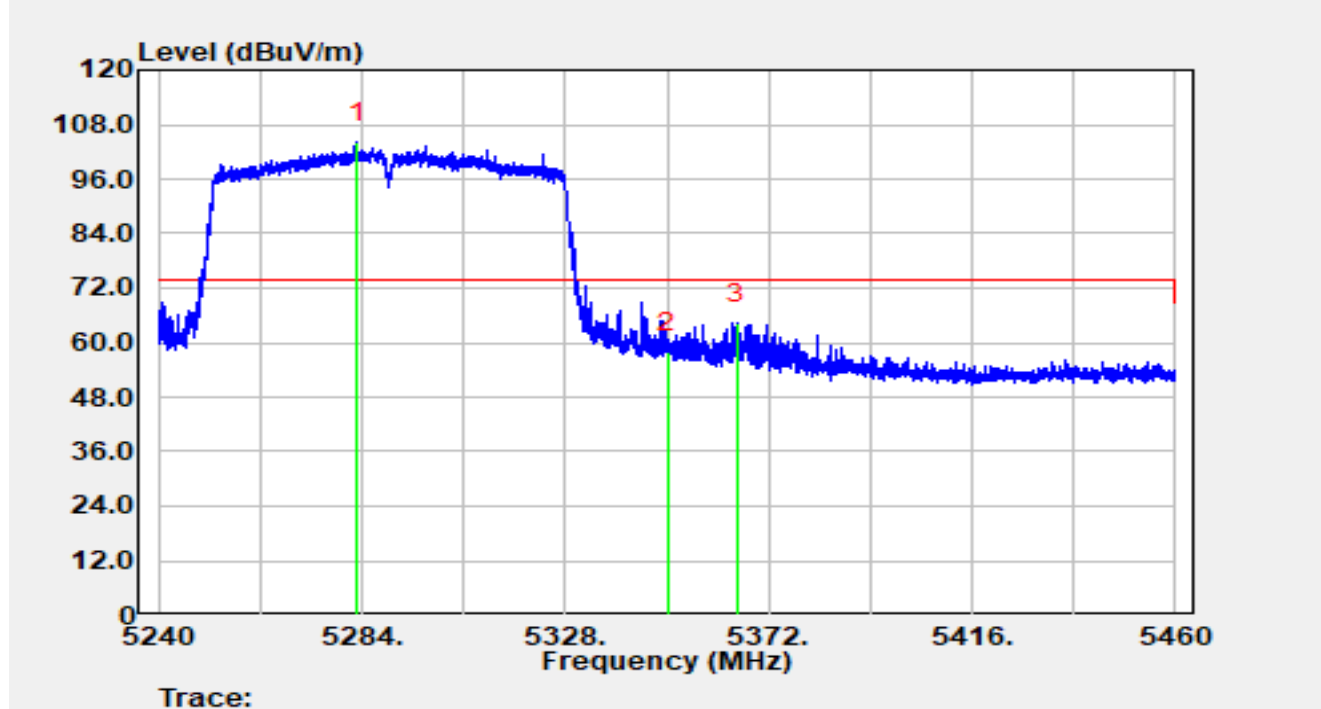


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5283.10	85.35	18.74	104.08	N/A	N/A	Peak
2		5350.00	39.07	18.73	57.80	-16.20	74.00	Peak
3	*	5365.27	45.42	18.84	64.26	-9.74	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

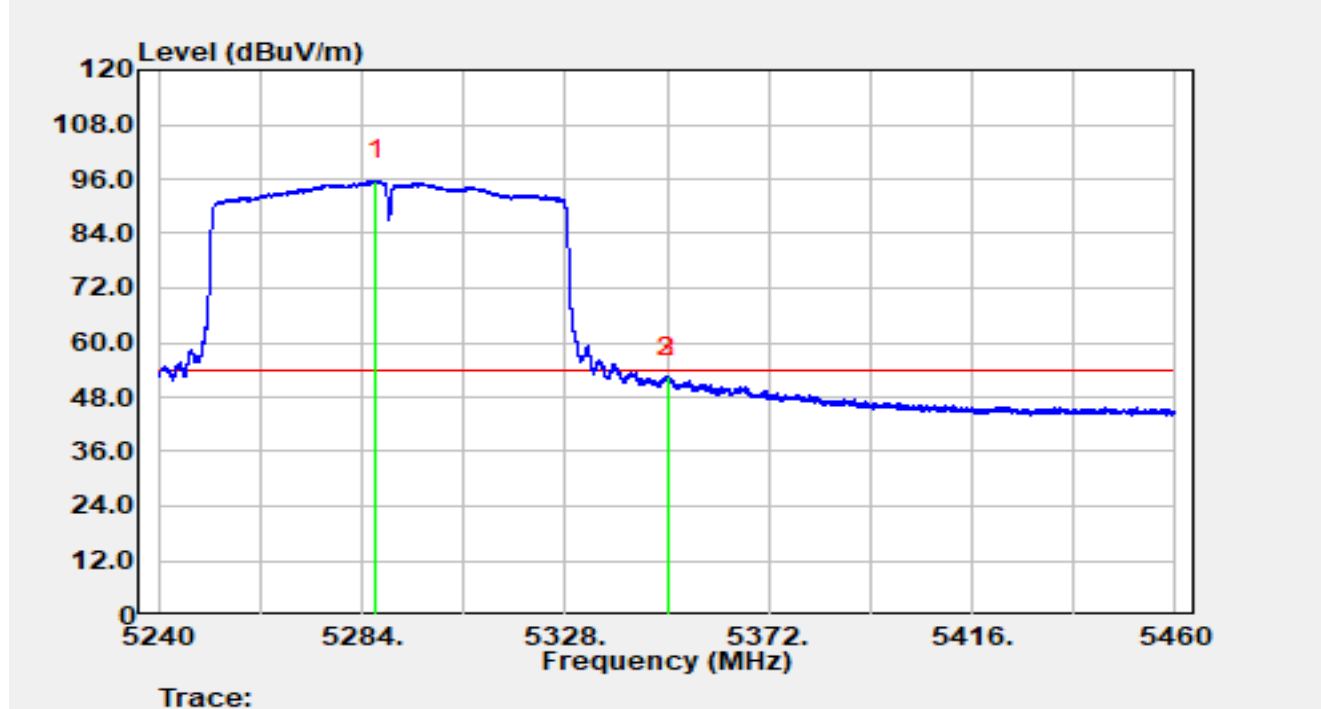


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5286.93	76.84	18.74	95.58	N/A	N/A	Average
2		5350.00	33.37	18.73	52.10	-1.90	54.00	Average
3	*	5350.09	33.59	18.73	52.32	-1.68	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

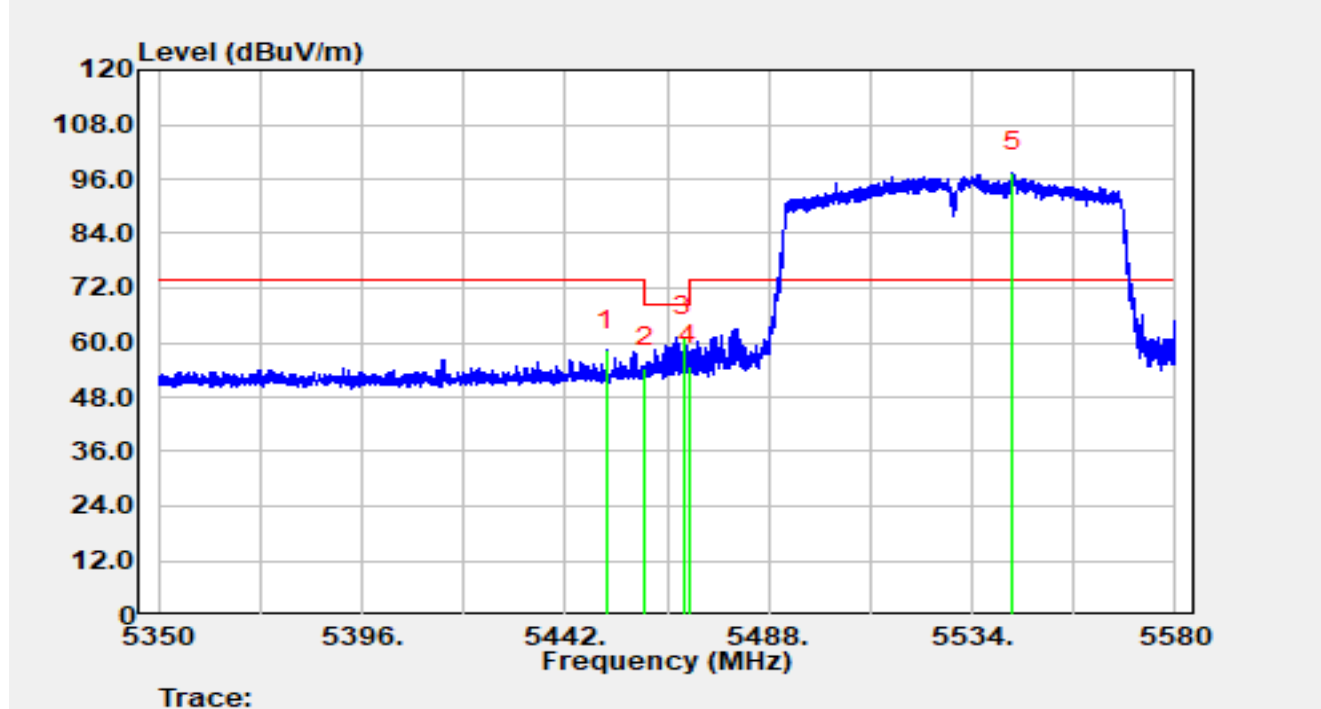


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.35	39.22	18.99	58.21	-15.79	74.00	Peak
2		5460.00	35.48	18.99	54.47	-13.73	68.20	Peak
3	*	5468.75	42.31	18.91	61.22	-6.98	68.20	Peak
4		5470.00	36.04	18.90	54.93	-13.27	68.20	Peak
5		5543.30	78.30	19.09	97.39	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

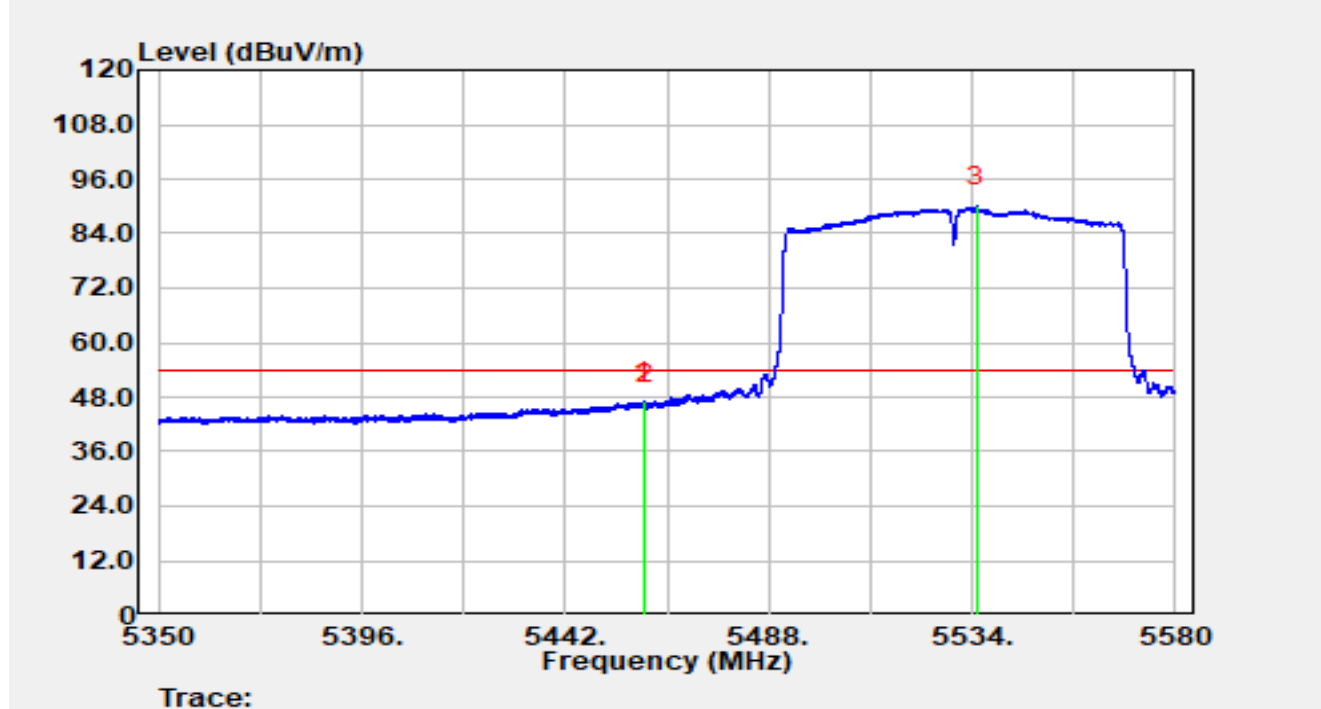


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.68	27.90	18.99	46.88	-7.12	54.00	Average
2		5460.00	27.25	18.99	46.24	-7.76	54.00	Average
3		5534.97	70.80	19.09	89.90	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

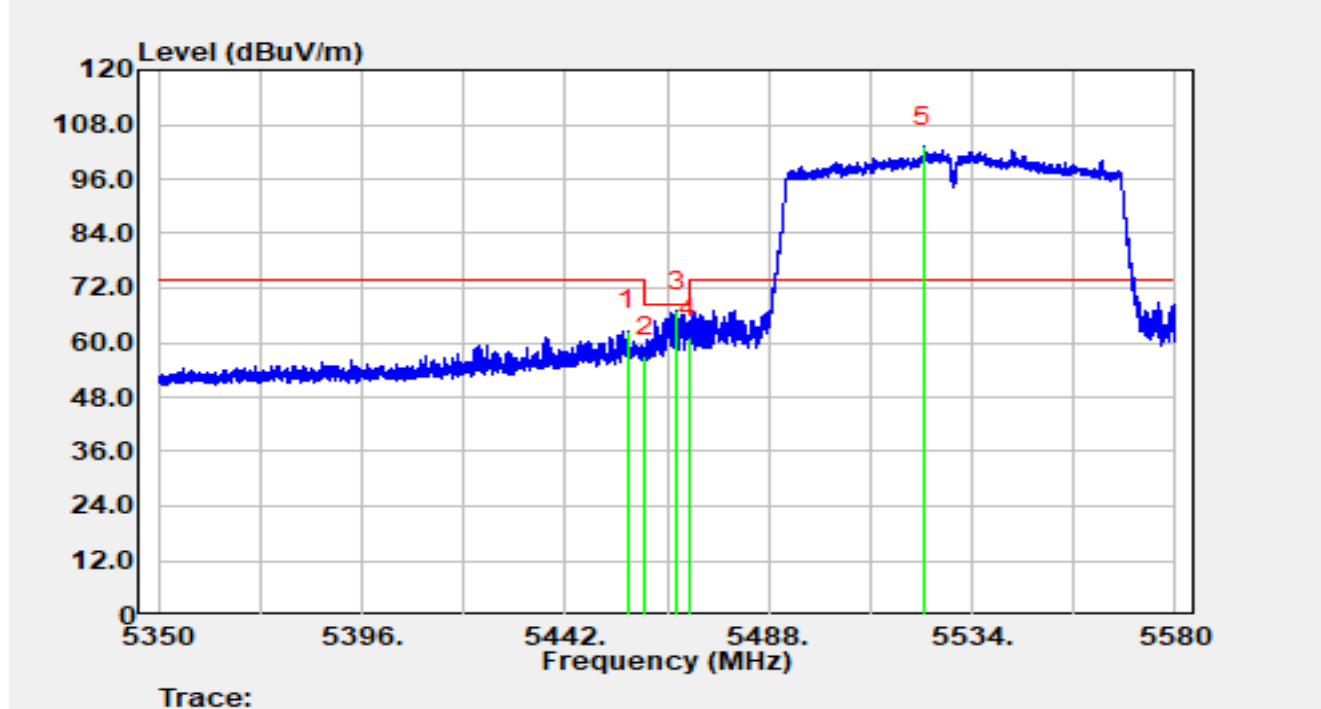


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.08	43.58	18.98	62.56	-11.44	74.00	Peak
2		5460.00	37.93	18.99	56.91	-11.29	68.20	Peak
3	*	5467.12	48.09	18.93	67.02	-1.18	68.20	Peak
4		5470.00	42.17	18.90	61.07	-7.13	68.20	Peak
5		5523.11	84.05	19.00	103.05	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

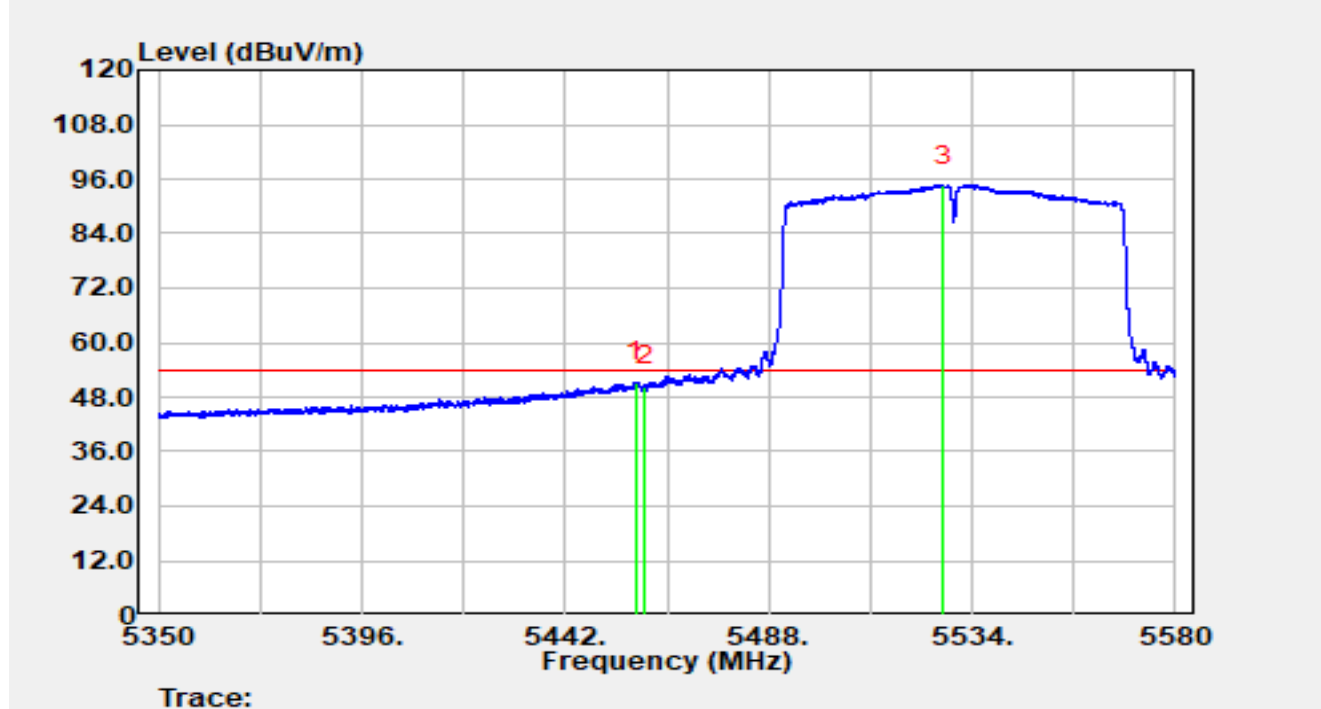


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.00	32.31	18.98	51.29	-2.71	54.00	Average
2		5460.00	31.37	18.99	50.36	-3.64	54.00	Average
3		5527.58	75.55	19.06	94.61	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

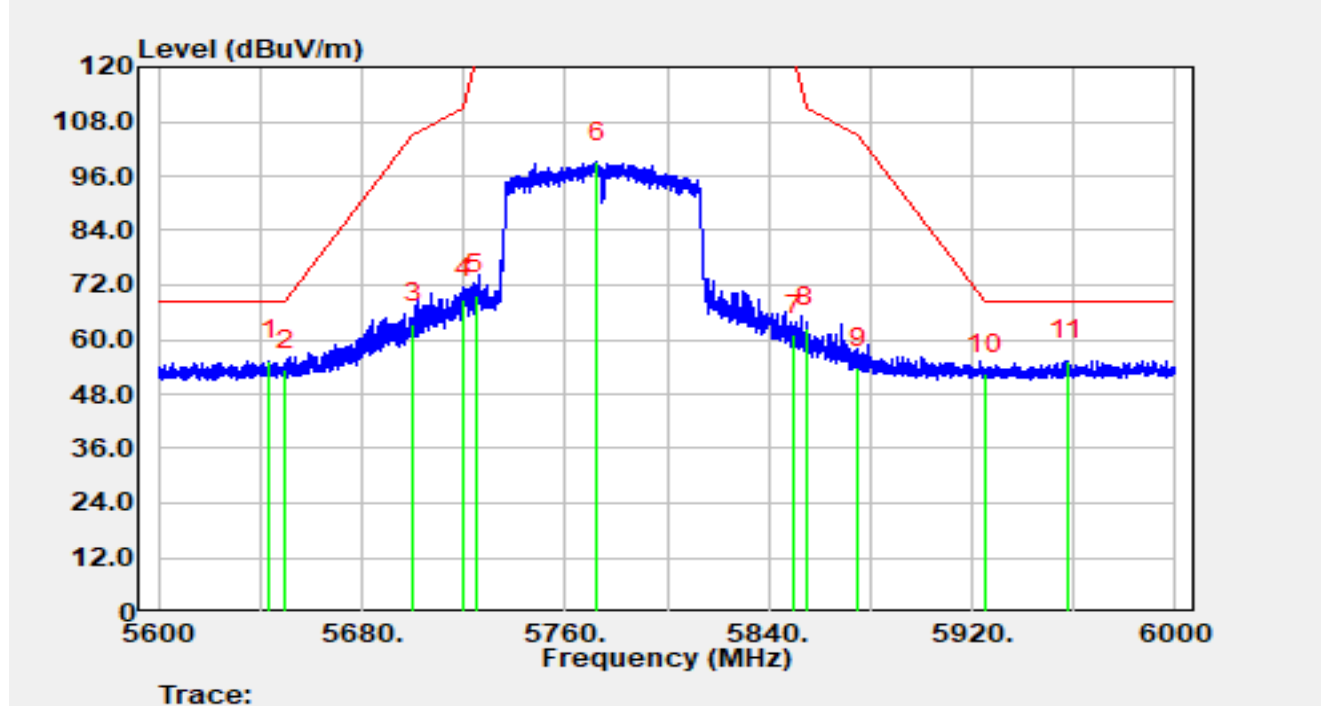


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5643.64	35.81	19.55	55.36	-12.84	68.20	Peak
2		5650.00	33.78	19.43	53.21	-14.99	68.20	Peak
3		5700.00	43.68	19.89	63.58	-41.62	105.20	Peak
4		5720.00	48.73	20.13	68.87	-41.93	110.80	Peak
5		5725.00	49.80	20.08	69.88	-52.32	122.20	Peak
6		5772.36	79.02	19.97	98.99	N/A	N/A	Peak
7		5850.00	40.78	20.14	60.92	-61.28	122.20	Peak
8		5855.00	42.49	20.15	62.64	-48.16	110.80	Peak
9		5875.00	33.22	20.50	53.72	-51.48	105.20	Peak
10		5925.00	32.00	20.52	52.52	-15.68	68.20	Peak
11	*	5957.60	34.76	20.67	55.43	-12.77	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-16
Temperature	22.2 °C	Humidity	40.4%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By Battery	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

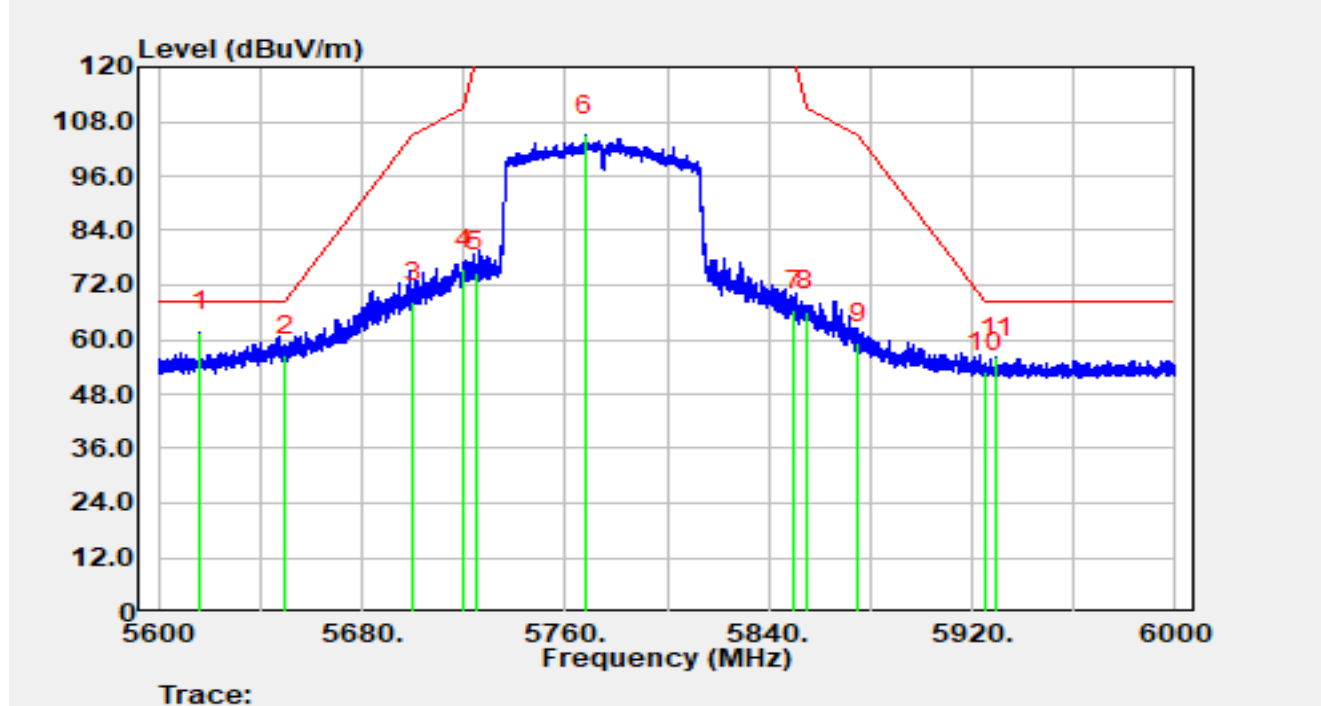


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5616.32	42.14	19.66	61.80	-6.40	68.20	Peak
2		5650.00	36.95	19.43	56.38	-11.82	68.20	Peak
3		5700.00	48.28	19.89	68.18	-37.02	105.20	Peak
4		5720.00	55.44	20.13	75.57	-35.23	110.80	Peak
5		5725.00	54.78	20.08	74.85	-47.35	122.20	Peak
6		5768.04	84.94	19.92	104.86	N/A	N/A	Peak
7		5850.00	46.22	20.14	66.36	-55.84	122.20	Peak
8		5855.00	46.01	20.15	66.15	-44.65	110.80	Peak
9		5875.00	38.76	20.50	59.26	-45.94	105.20	Peak
10		5925.00	32.38	20.52	52.90	-15.30	68.20	Peak
11		5929.48	35.48	20.54	56.03	-12.17	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-09-15
Temperature	26.4 °C	Humidity	57.9%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line1
Test Mode	Transmit by 802.11a at 5825 MHz		

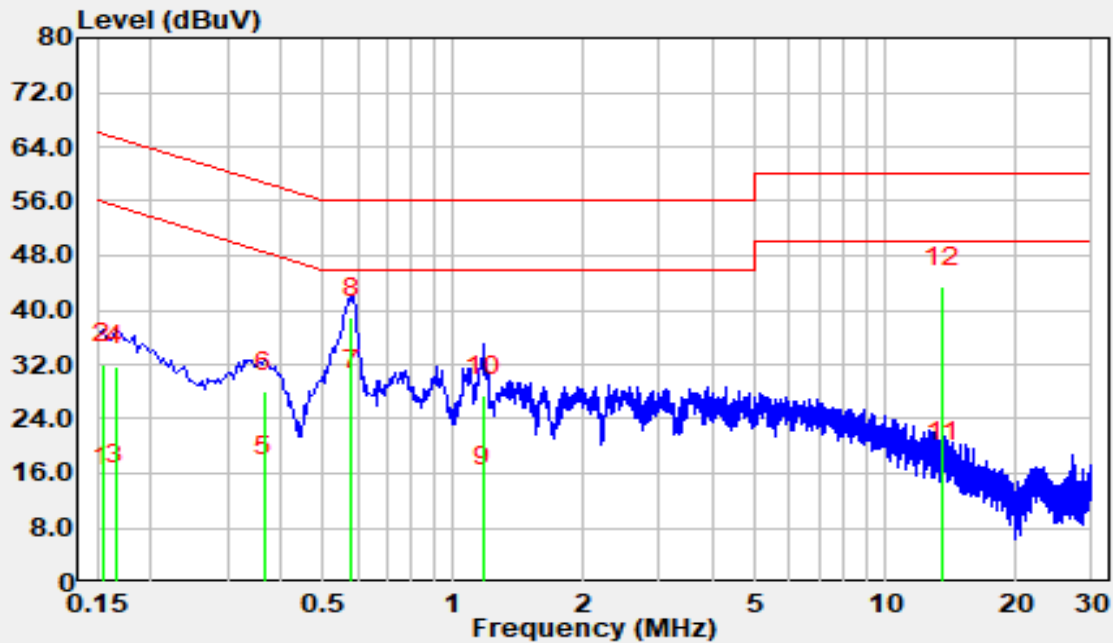


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	4.20	9.92	14.12	-41.66	55.78	Average
2		0.15	22.10	9.92	32.02	-33.76	65.78	QP
3		0.17	4.50	9.92	14.42	-40.73	55.16	Average
4		0.17	21.80	9.92	31.72	-33.43	65.16	QP
5		0.37	5.50	10.03	15.53	-33.06	48.59	Average
6		0.37	17.90	10.03	27.93	-30.66	58.59	QP
7		0.58	18.00	10.15	28.15	-17.85	46.00	Average
8		0.58	28.70	10.15	38.85	-17.15	56.00	QP
9		1.17	3.60	10.44	14.04	-31.96	46.00	Average
10		1.17	16.90	10.44	27.34	-28.66	56.00	QP
11		13.56	6.20	11.52	17.72	-32.28	50.00	Average
12	*	13.56	31.90	11.52	43.42	-16.58	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-09-15
Temperature	26.4 °C	Humidity	57.9%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11a at 5825 MHz		

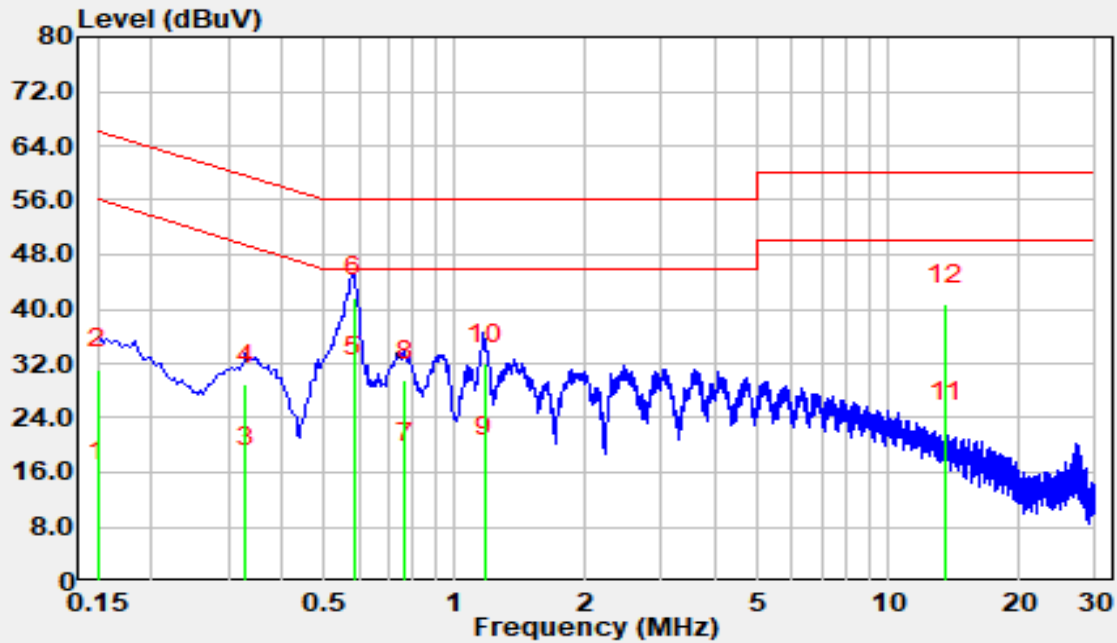

Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	4.70	9.97	14.67	-41.33	56.00	Average
2		0.15	21.20	9.97	31.17	-34.83	66.00	QP
3		0.33	6.80	10.02	16.82	-32.63	49.45	Average
4		0.33	18.90	10.02	28.92	-30.53	59.45	QP
5		0.58	19.80	10.18	29.98	-16.02	46.00	Average
6	*	0.58	31.60	10.18	41.78	-14.22	56.00	QP
7		0.77	7.10	10.28	17.38	-28.62	46.00	Average
8		0.77	19.30	10.28	29.58	-26.42	56.00	QP
9		1.17	7.90	10.47	18.37	-27.63	46.00	Average
10		1.17	21.40	10.47	31.87	-24.13	56.00	QP
11		13.56	11.80	11.48	23.28	-26.72	50.00	Average
12		13.56	29.20	11.48	40.68	-19.32	60.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1049088-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1049088-UE" file.

_____ The End _____