

Radiated Emission test (3GHz -18GHz)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2412MHz

Data: 7

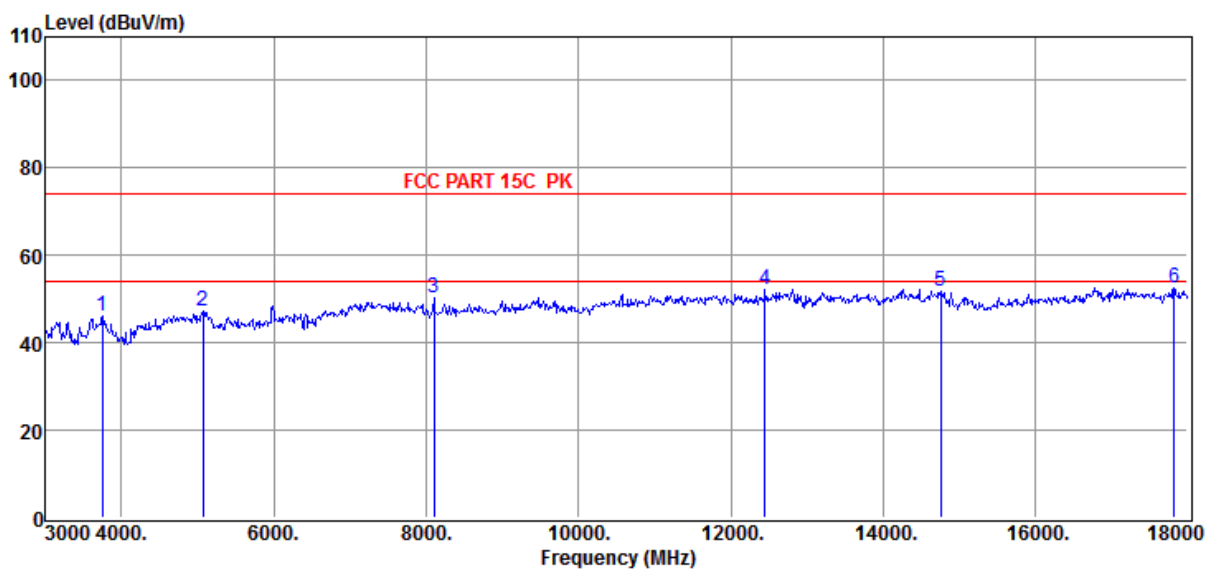

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3750.00	47.51	31.00	-32.47	46.04	74.00	-27.96	Peak	VERTICAL
2	5070.00	45.84	33.03	-31.46	47.41	74.00	-26.59	Peak	VERTICAL
3	8100.00	44.63	37.08	-31.38	50.33	74.00	-23.67	Peak	VERTICAL
4	12450.00	42.80	38.60	-29.15	52.25	74.00	-21.75	Peak	VERTICAL
5	14760.00	38.99	39.82	-27.06	51.75	74.00	-22.25	Peak	VERTICAL
6	17820.00	37.12	42.45	-27.16	52.41	74.00	-21.59	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2412MHz

Data: 8

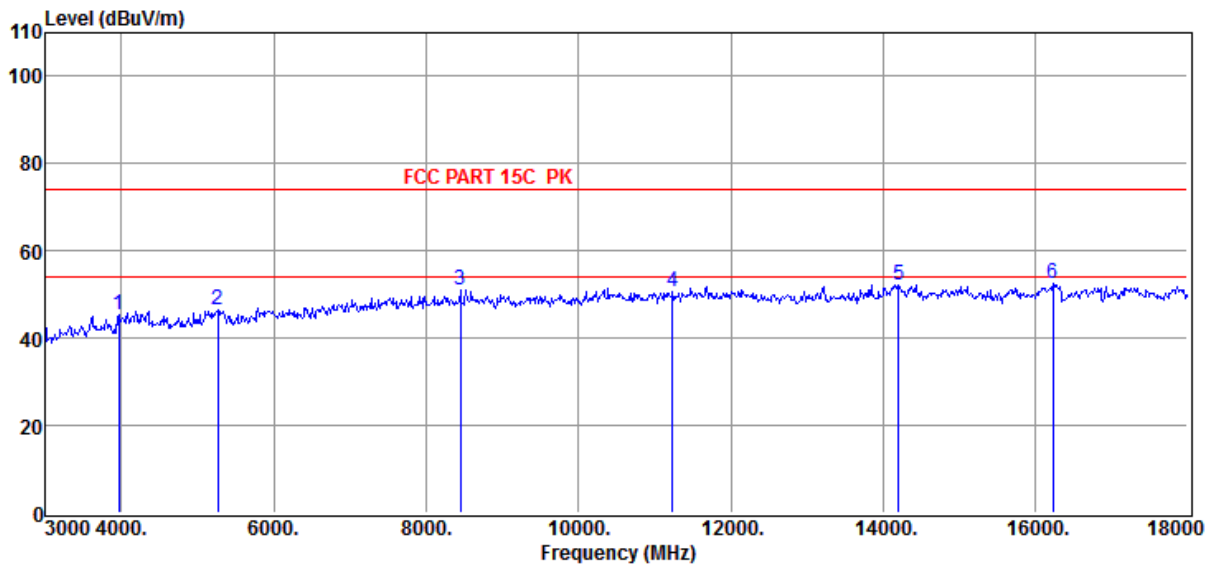

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3960.00	46.39	31.50	-32.43	45.46	74.00	-28.54	Peak	HORIZONTAL
2	5265.00	44.47	33.38	-31.38	46.47	74.00	-27.53	Peak	HORIZONTAL
3	8445.00	44.65	37.36	-31.11	50.90	74.00	-23.10	Peak	HORIZONTAL
4	11235.00	40.49	38.70	-28.41	50.78	74.00	-23.22	Peak	HORIZONTAL
5	14205.00	38.17	41.11	-27.10	52.18	74.00	-21.82	Peak	HORIZONTAL
6	16230.00	41.05	39.10	-27.59	52.56	74.00	-21.44	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2437MHz

Data: 9

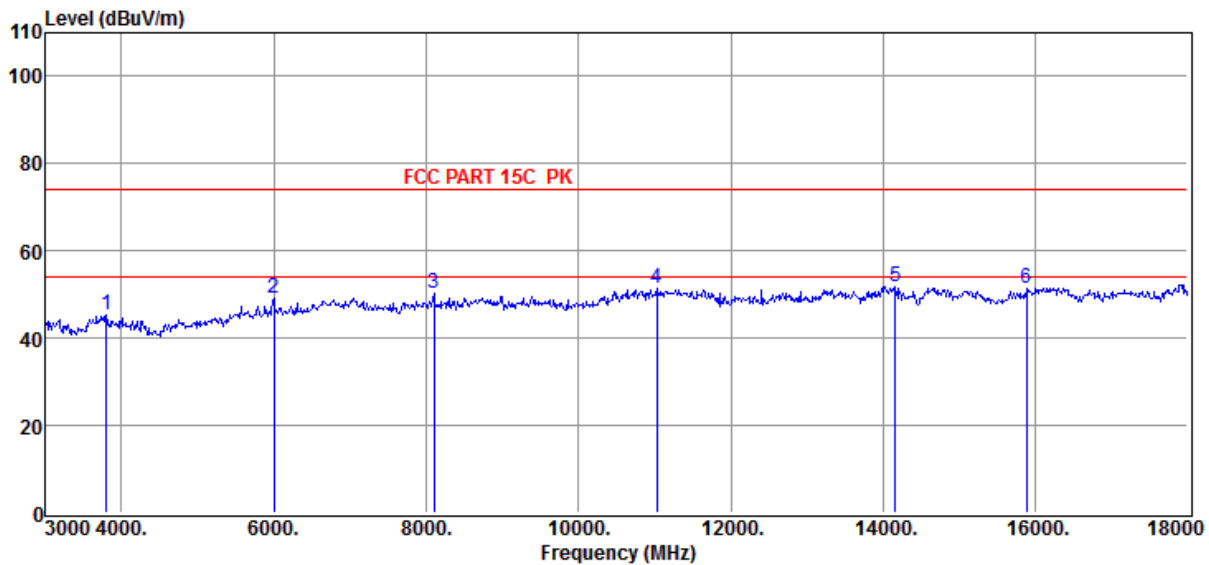

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3795.00	46.36	31.11	-32.25	45.22	74.00	-28.78	Peak	VERTICAL
2	6000.00	45.50	35.30	-31.80	49.00	74.00	-25.00	Peak	VERTICAL
3	8100.00	44.65	37.08	-31.38	50.35	74.00	-23.65	Peak	VERTICAL
4	11025.00	41.39	38.70	-28.81	51.28	74.00	-22.72	Peak	VERTICAL
5	14160.00	38.27	41.18	-27.51	51.94	74.00	-22.06	Peak	VERTICAL
6	15885.00	40.92	38.43	-27.76	51.59	74.00	-22.41	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2437MHz

Data: 10

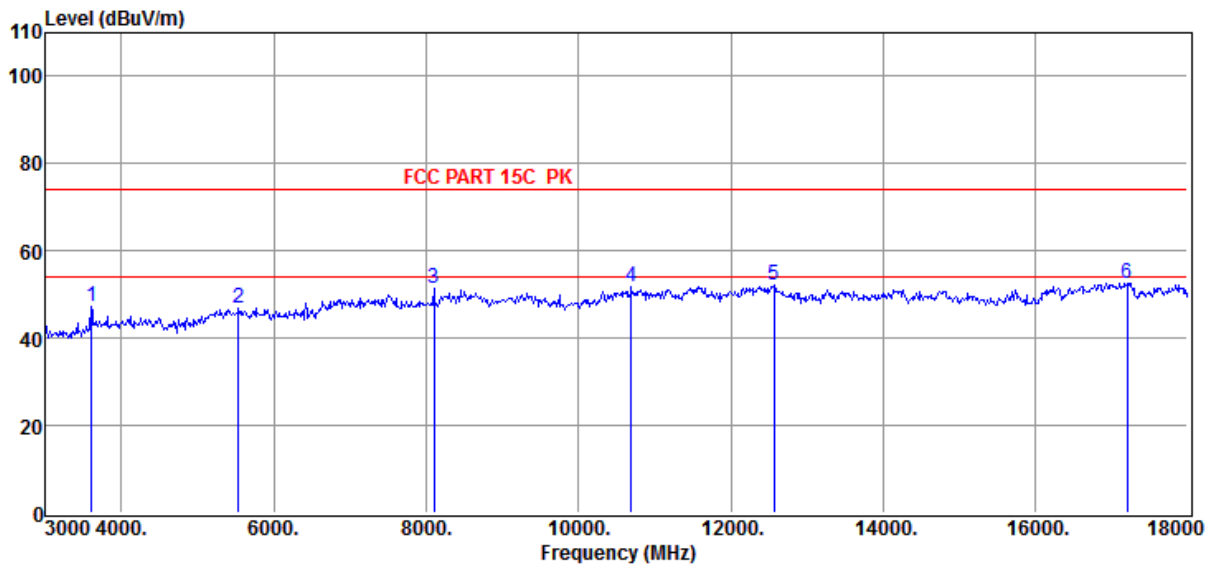

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3600.00	48.53	30.64	-32.08	47.09	74.00	-26.91	Peak	HORIZONTAL
2	5535.00	44.77	33.90	-31.76	46.91	74.00	-27.09	Peak	HORIZONTAL
3	8100.00	45.86	37.08	-31.38	51.56	74.00	-22.44	Peak	HORIZONTAL
4	10695.00	42.63	38.58	-29.48	51.73	74.00	-22.27	Peak	HORIZONTAL
5	12570.00	42.42	38.73	-29.11	52.04	74.00	-21.96	Peak	HORIZONTAL
6	17205.00	37.10	42.49	-26.92	52.67	74.00	-21.33	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2462MHz

Data: 11

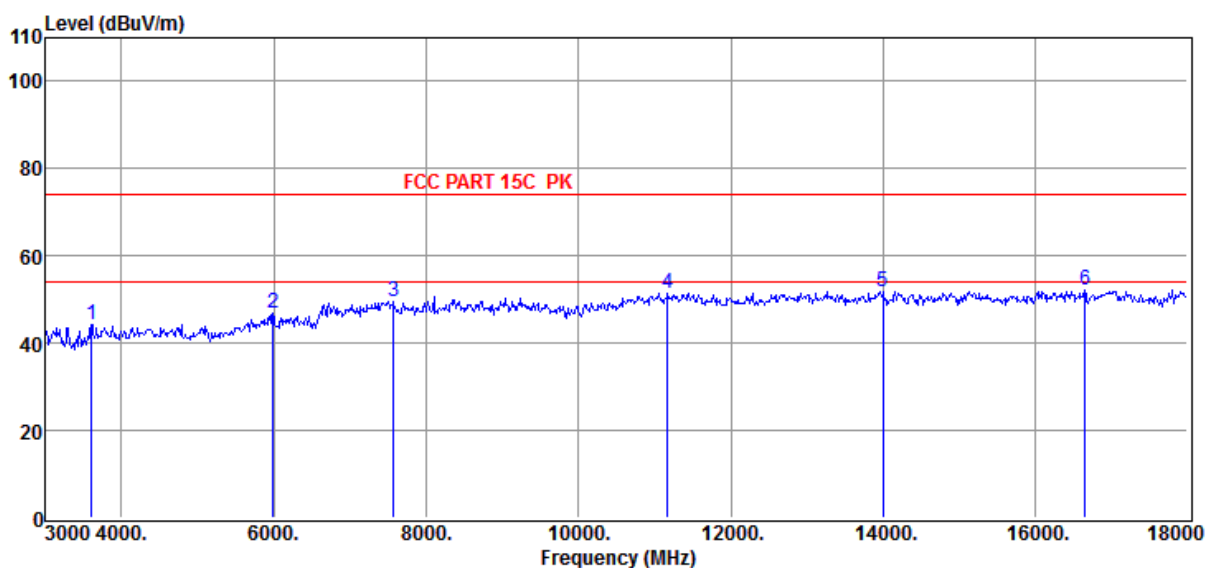

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3600.00	45.81	30.64	-32.08	44.37	74.00	-29.63	Peak	VERTICAL
2	5985.00	43.32	35.26	-31.86	46.72	74.00	-27.28	Peak	VERTICAL
3	7575.00	43.05	37.34	-30.83	49.56	74.00	-24.44	Peak	VERTICAL
4	11175.00	41.20	38.70	-28.40	51.50	74.00	-22.50	Peak	VERTICAL
5	13995.00	38.97	41.39	-28.41	51.95	74.00	-22.05	Peak	VERTICAL
6	16650.00	37.89	40.52	-26.41	52.00	74.00	-22.00	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2462MHz

Data: 12

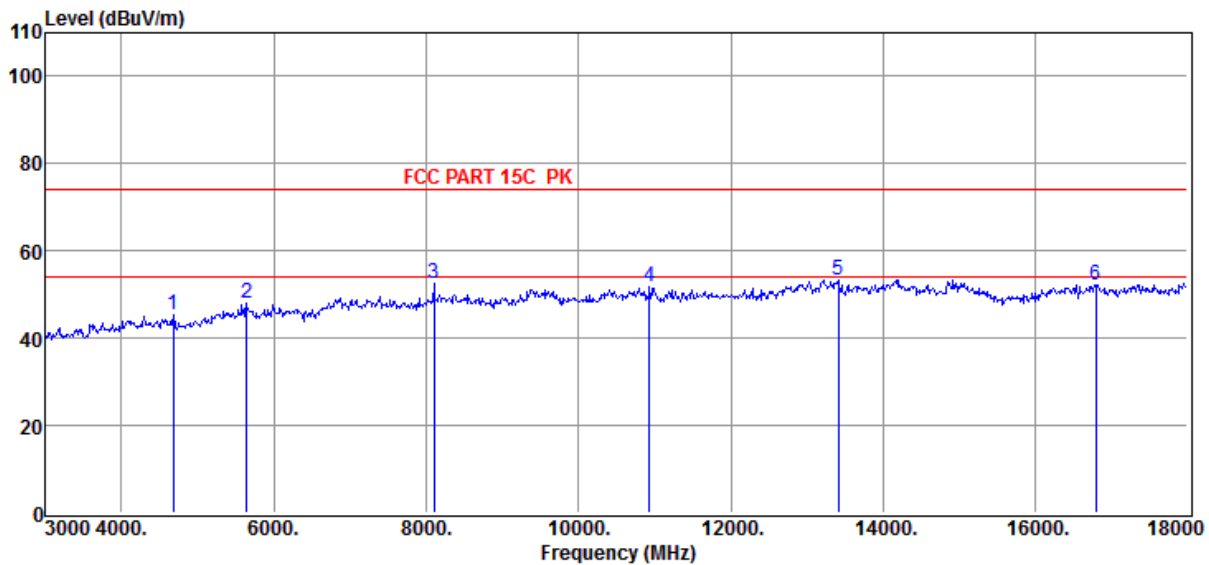

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4680.00	44.89	32.26	-31.86	45.29	74.00	-28.71	Peak	HORIZONTAL
2	5640.00	45.29	34.22	-31.67	47.84	74.00	-26.16	Peak	HORIZONTAL
3	8100.00	46.97	37.08	-31.38	52.67	74.00	-21.33	Peak	HORIZONTAL
4	10935.00	42.06	38.67	-29.05	51.68	74.00	-22.32	Peak	HORIZONTAL
5	13410.00	42.63	40.24	-29.39	53.48	74.00	-20.52	Peak	HORIZONTAL
6	16800.00	36.87	41.24	-25.80	52.31	74.00	-21.69	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2412MHz

Data: 19

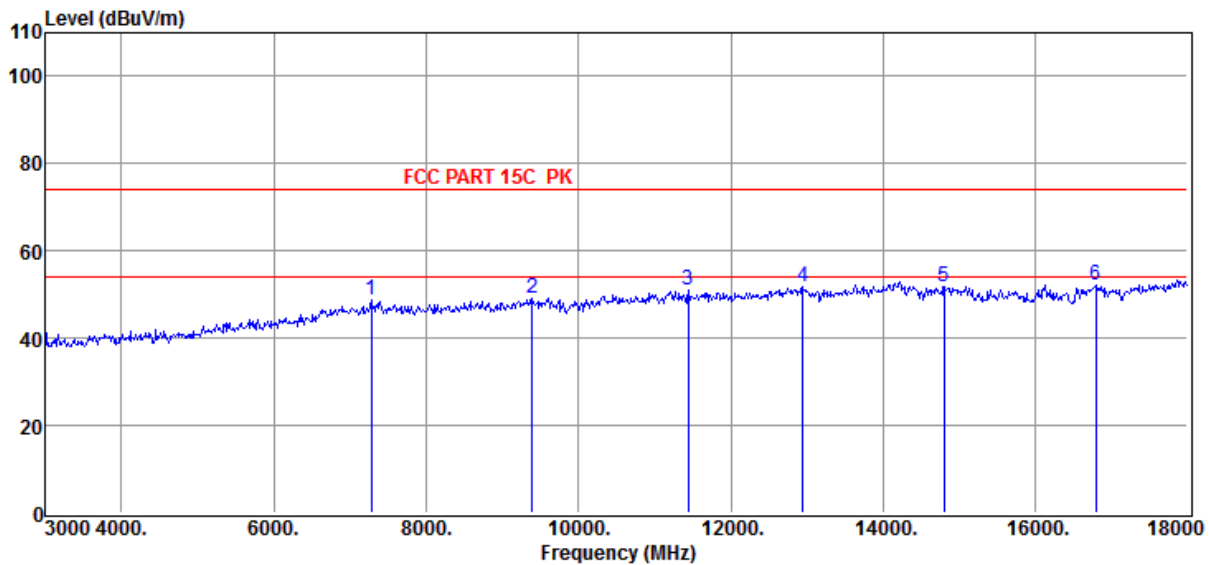

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	7275.00	42.25	37.04	-30.70	48.59	74.00	-25.41	Peak	HORIZONTAL
2	9390.00	41.11	37.93	-29.80	49.24	74.00	-24.76	Peak	HORIZONTAL
3	11445.00	40.92	38.70	-28.63	50.99	74.00	-23.01	Peak	HORIZONTAL
4	12945.00	41.69	39.40	-29.42	51.67	74.00	-22.33	Peak	HORIZONTAL
5	14805.00	38.99	39.66	-26.78	51.87	74.00	-22.13	Peak	HORIZONTAL
6	16800.00	36.80	41.24	-25.80	52.24	74.00	-21.76	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2412MHz

Data: 20

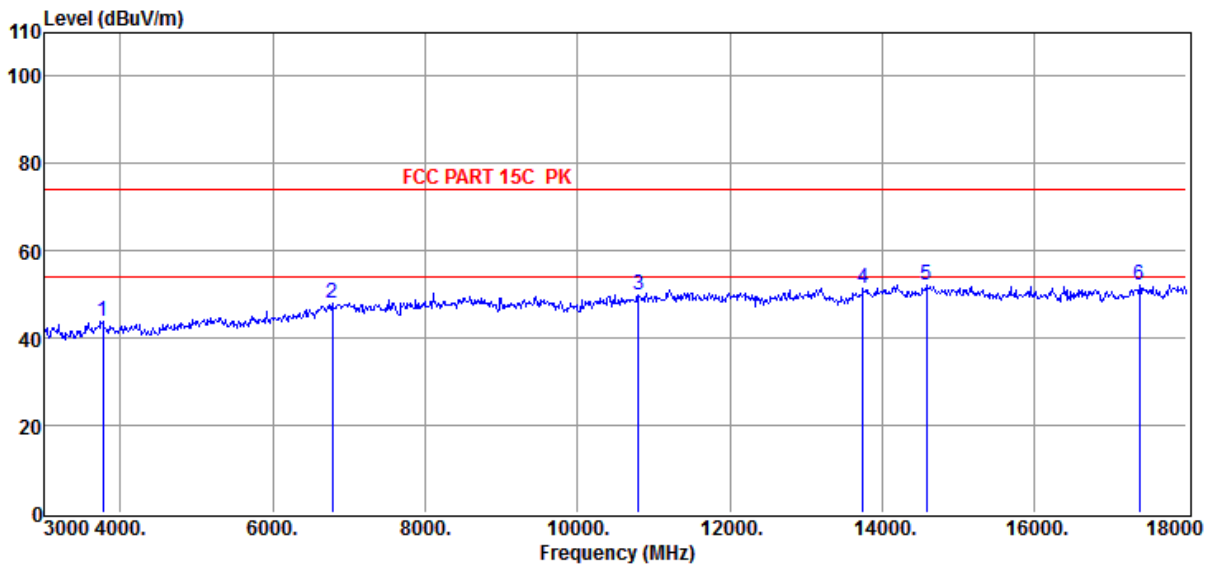

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3765.00	45.17	31.04	-32.40	43.81	74.00	-30.19	Peak	VERTICAL
2	6780.00	43.00	36.25	-31.16	48.09	74.00	-25.91	Peak	VERTICAL
3	10800.00	40.25	38.62	-28.97	49.90	74.00	-24.10	Peak	VERTICAL
4	13755.00	39.29	40.91	-28.95	51.25	74.00	-22.75	Peak	VERTICAL
5	14580.00	38.78	40.43	-27.00	52.21	74.00	-21.79	Peak	VERTICAL
6	17385.00	36.57	42.74	-27.11	52.20	74.00	-21.80	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2437MHz

Data: 21

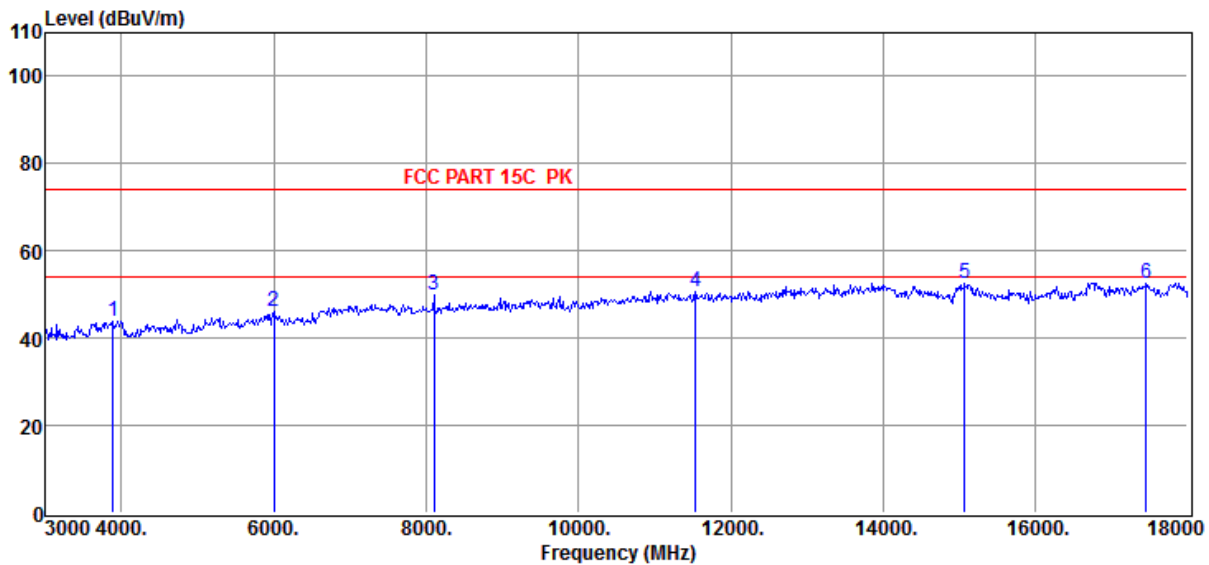

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3885.00	45.08	31.32	-32.36	44.04	74.00	-29.96	Peak	HORIZONTAL
2	6000.00	42.64	35.30	-31.80	46.14	74.00	-27.86	Peak	HORIZONTAL
3	8100.00	44.11	37.08	-31.38	49.81	74.00	-24.19	Peak	HORIZONTAL
4	11535.00	40.50	38.69	-28.61	50.58	74.00	-23.42	Peak	HORIZONTAL
5	15075.00	40.18	38.88	-26.70	52.36	74.00	-21.64	Peak	HORIZONTAL
6	17460.00	37.02	42.84	-27.25	52.61	74.00	-21.39	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2437MHz

Data: 22

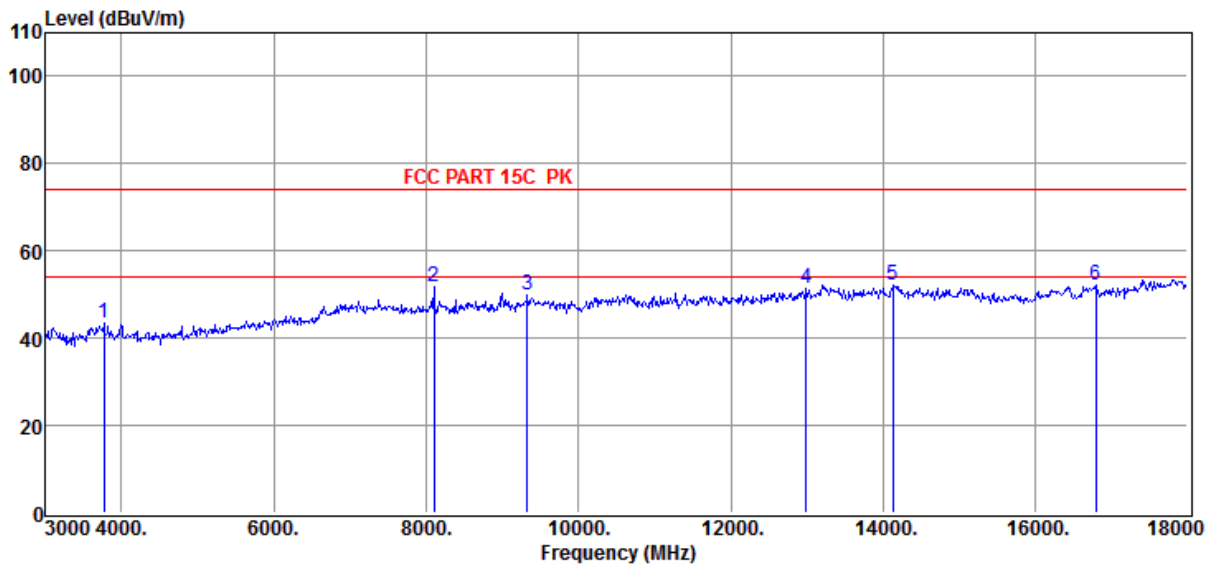

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3765.00	44.79	31.04	-32.40	43.43	74.00	-30.57	Peak	VERTICAL
2	8100.00	46.06	37.08	-31.38	51.76	74.00	-22.24	Peak	VERTICAL
3	9330.00	41.97	37.90	-30.07	49.80	74.00	-24.20	Peak	VERTICAL
4	12990.00	41.56	39.48	-29.66	51.38	74.00	-22.62	Peak	VERTICAL
5	14130.00	38.70	41.22	-27.85	52.07	74.00	-21.93	Peak	VERTICAL
6	16800.00	36.65	41.24	-25.80	52.09	74.00	-21.91	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2462MHz

Data: 23

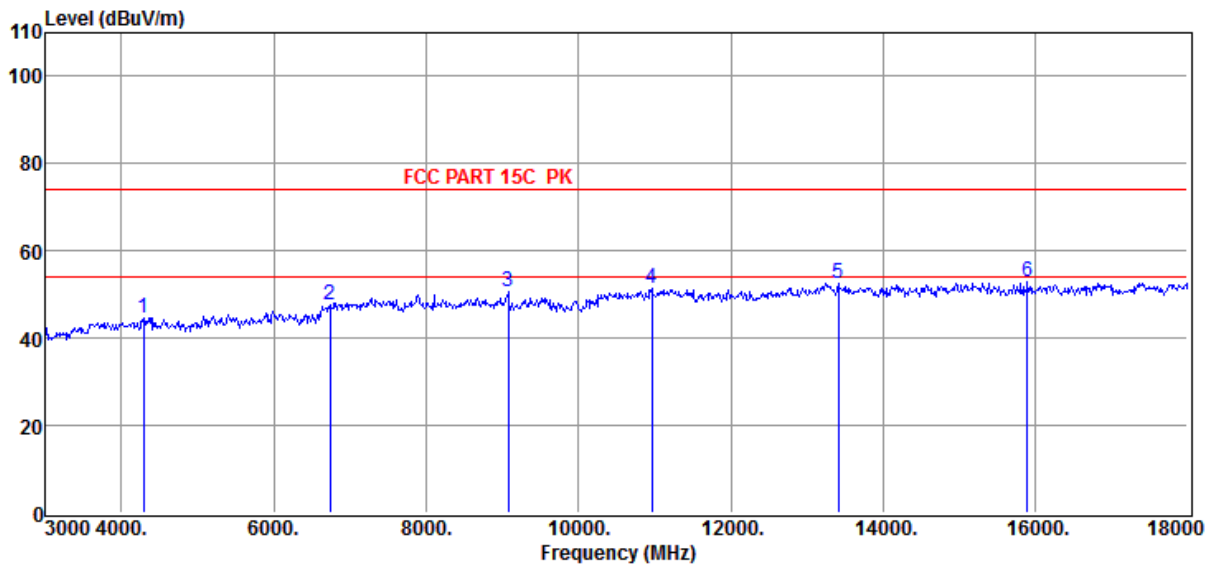

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4290.00	45.13	31.77	-32.17	44.73	74.00	-29.27	Peak	HORIZONTAL
2	6735.00	42.84	36.18	-31.40	47.62	74.00	-26.38	Peak	HORIZONTAL
3	9075.00	43.63	37.74	-30.66	50.71	74.00	-23.29	Peak	HORIZONTAL
4	10965.00	41.55	38.69	-28.95	51.29	74.00	-22.71	Peak	HORIZONTAL
5	13410.00	41.54	40.24	-29.39	52.39	74.00	-21.61	Peak	HORIZONTAL
6	15900.00	42.03	38.44	-27.71	52.76	74.00	-21.24	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2462MHz

Data: 24

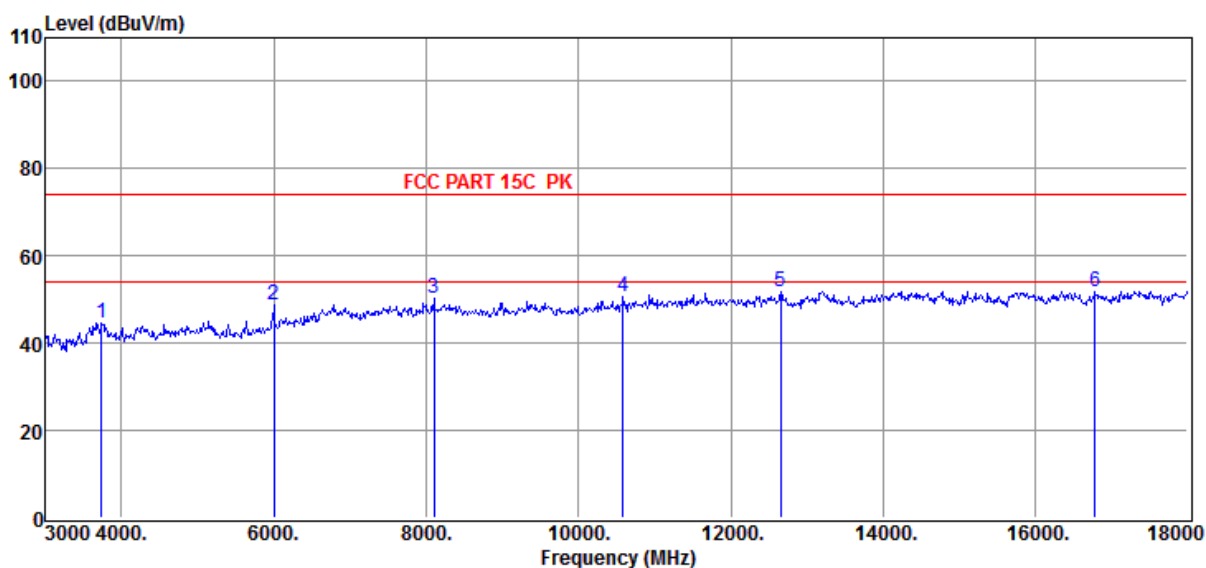

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3735.00	45.97	30.96	-32.41	44.52	74.00	-29.48	Peak	VERTICAL
2	6000.00	45.25	35.30	-31.80	48.75	74.00	-25.25	Peak	VERTICAL
3	8100.00	44.71	37.08	-31.38	50.41	74.00	-23.59	Peak	VERTICAL
4	10590.00	41.51	38.54	-29.40	50.65	74.00	-23.35	Peak	VERTICAL
5	12660.00	41.96	38.89	-29.03	51.82	74.00	-22.18	Peak	VERTICAL
6	16785.00	36.53	41.17	-25.91	51.79	74.00	-22.21	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Simultaneous mode:

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-27-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N40 2422+ESP32 11B 2412

Data: 151

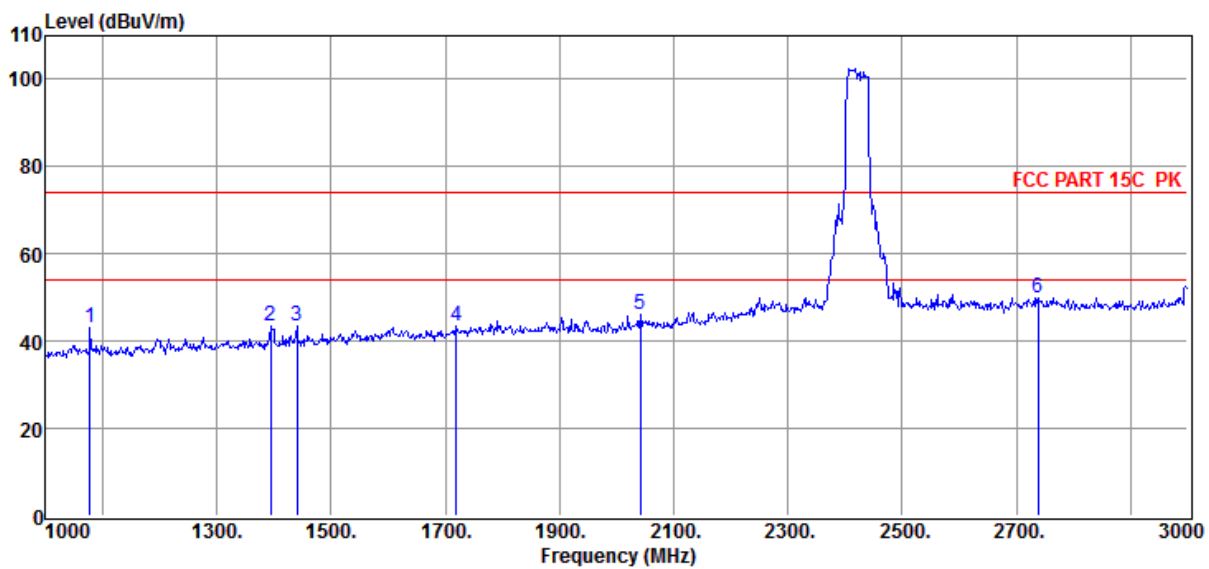

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1078.00	49.80	27.46	-34.28	42.98	74.00	-31.02	Peak	HORIZONTAL
2	1394.00	47.64	29.48	-33.61	43.51	74.00	-30.49	Peak	HORIZONTAL
3	1440.00	46.93	29.90	-33.50	43.33	74.00	-30.67	Peak	HORIZONTAL
4	1720.00	45.40	31.22	-32.98	43.64	74.00	-30.36	Peak	HORIZONTAL
5	2042.00	44.93	33.39	-32.38	45.94	74.00	-28.06	Peak	HORIZONTAL
6	2738.00	43.60	37.26	-30.78	50.08	74.00	-23.92	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : N40 2422+ESP32 11B 2412

Data: 152

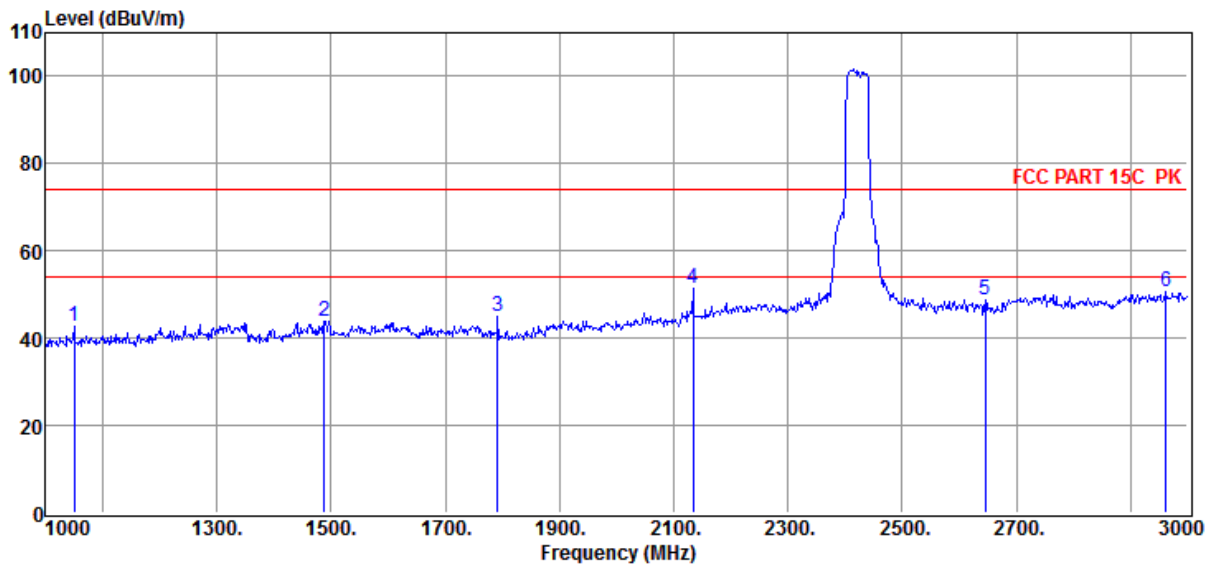

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1050.00	49.70	27.40	-34.32	42.78	74.00	-31.22	Peak	VERTICAL
2	1488.00	46.91	30.38	-33.46	43.83	74.00	-30.17	Peak	VERTICAL
3	1792.00	46.23	31.65	-32.83	45.05	74.00	-28.95	Peak	VERTICAL
4	2134.00	50.43	33.17	-32.23	51.37	74.00	-22.63	Peak	VERTICAL
5	2646.00	43.46	36.63	-31.28	48.81	74.00	-25.19	Peak	VERTICAL
6	2962.00	43.54	37.54	-30.48	50.60	74.00	-23.40	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N40 2422+ESP32 11B 2412

Data: 101

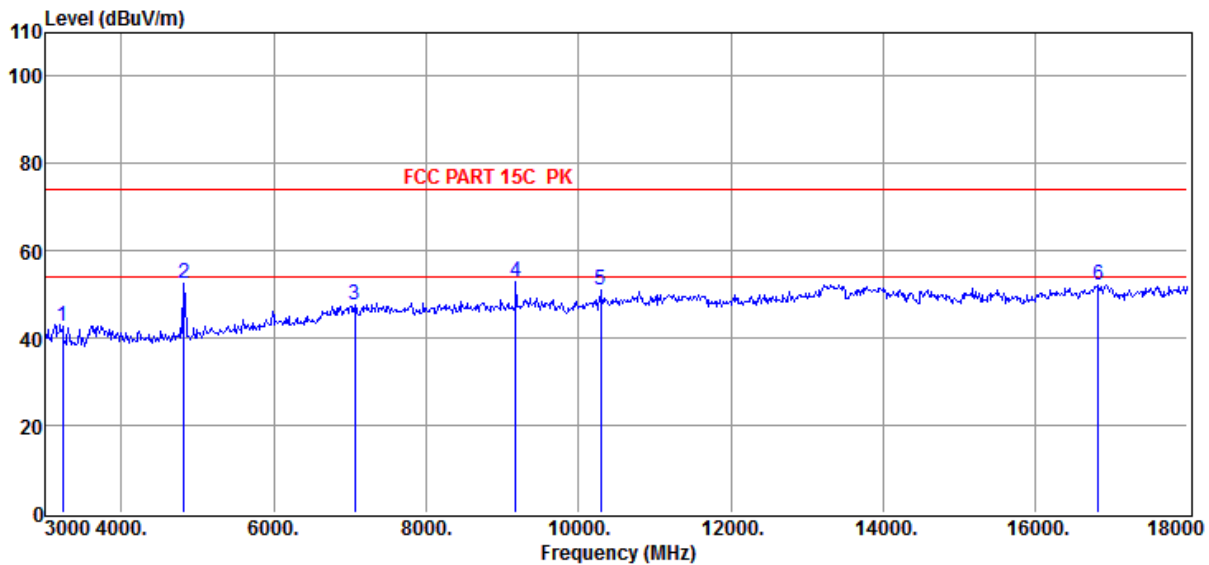

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3225.00	45.30	29.74	-32.18	42.86	74.00	-31.14	Peak	VERTICAL
2	4815.00	51.68	32.53	-31.72	52.49	74.00	-21.51	Peak	VERTICAL
3	7065.00	41.50	36.70	-30.66	47.54	74.00	-26.46	Peak	VERTICAL
4	9180.00	45.82	37.81	-30.57	53.06	74.00	-20.94	Peak	VERTICAL
5	10290.00	42.32	38.42	-29.85	50.89	74.00	-23.11	Peak	VERTICAL
6	16830.00	36.90	41.38	-26.11	52.17	74.00	-21.83	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-29-2023

Tested By : Novak

EUT : AI Delivery Robot


Model Number : OS-R-DR02-A

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N40 2422+ESP32 11B 2412

Data: 102

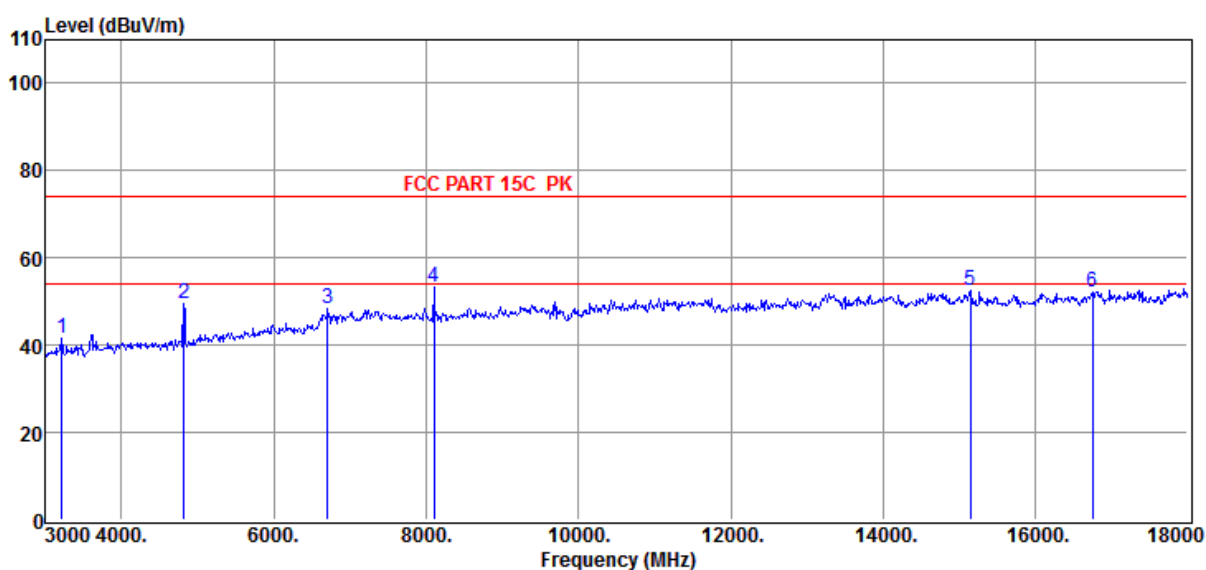

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3210.00	43.93	29.70	-32.09	41.54	74.00	-32.46	Peak	HORIZONTAL
2	4815.00	48.87	32.53	-31.72	49.68	74.00	-24.32	Peak	HORIZONTAL
3	6705.00	43.70	36.13	-31.49	48.34	74.00	-25.66	Peak	HORIZONTAL
4	8100.00	47.55	37.08	-31.38	53.25	74.00	-20.75	Peak	HORIZONTAL
5	15150.00	40.91	38.76	-27.07	52.60	74.00	-21.40	Peak	HORIZONTAL
6	16755.00	37.27	41.02	-26.14	52.15	74.00	-21.85	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test result

EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass


9.5. Original test data

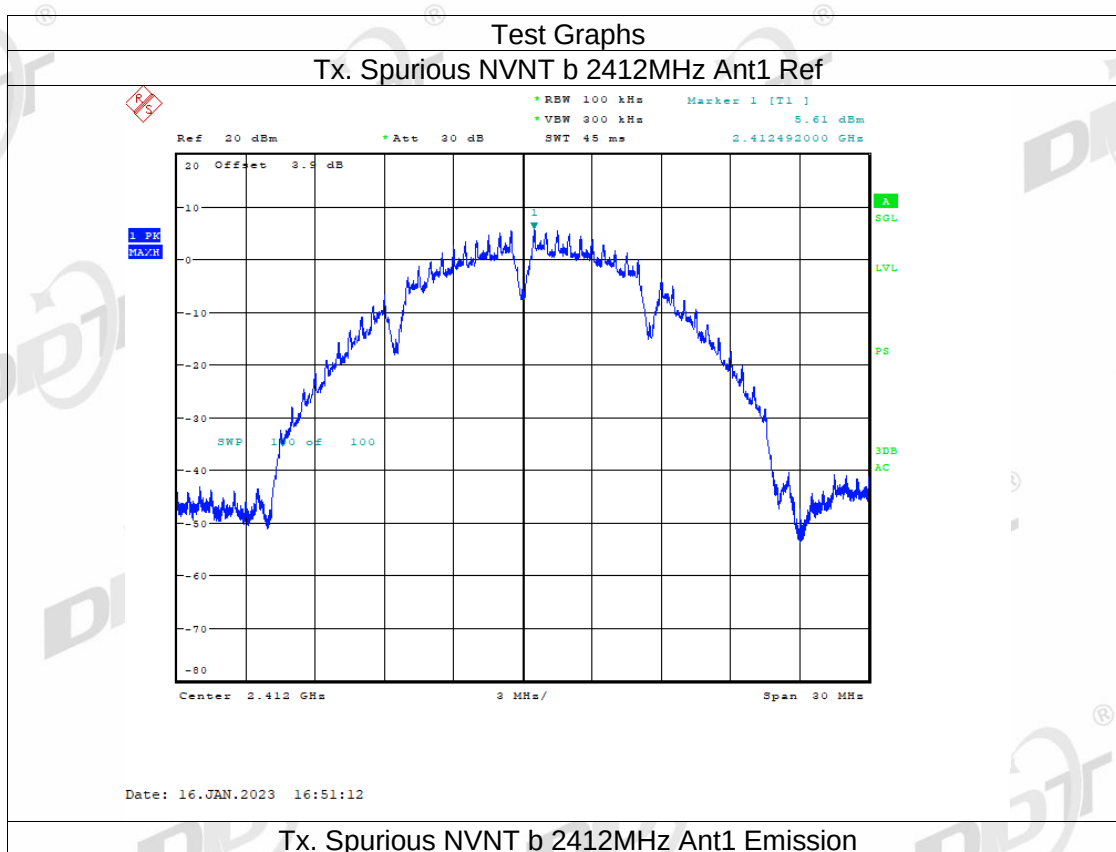

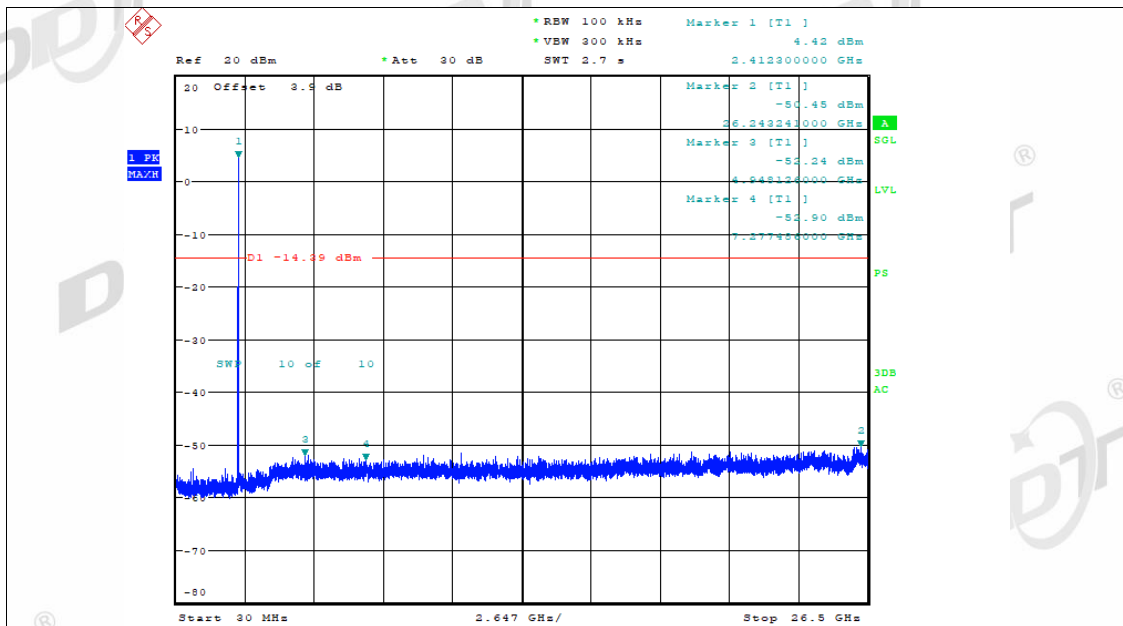


Date: 16.JAN.2023 16:51:45

Tx. Spurious NVNT b 2437MHz Ant1 Ref

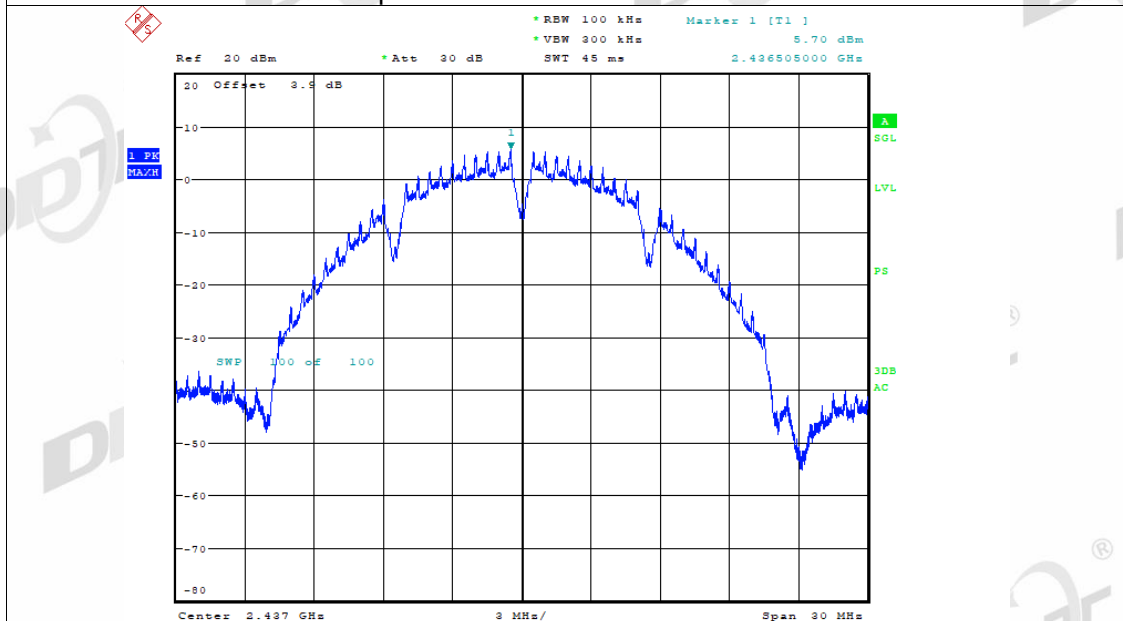


Date: 16.JAN.2023 17:35:55

Tx. Spurious NVNT b 2437MHz Ant1 Emission

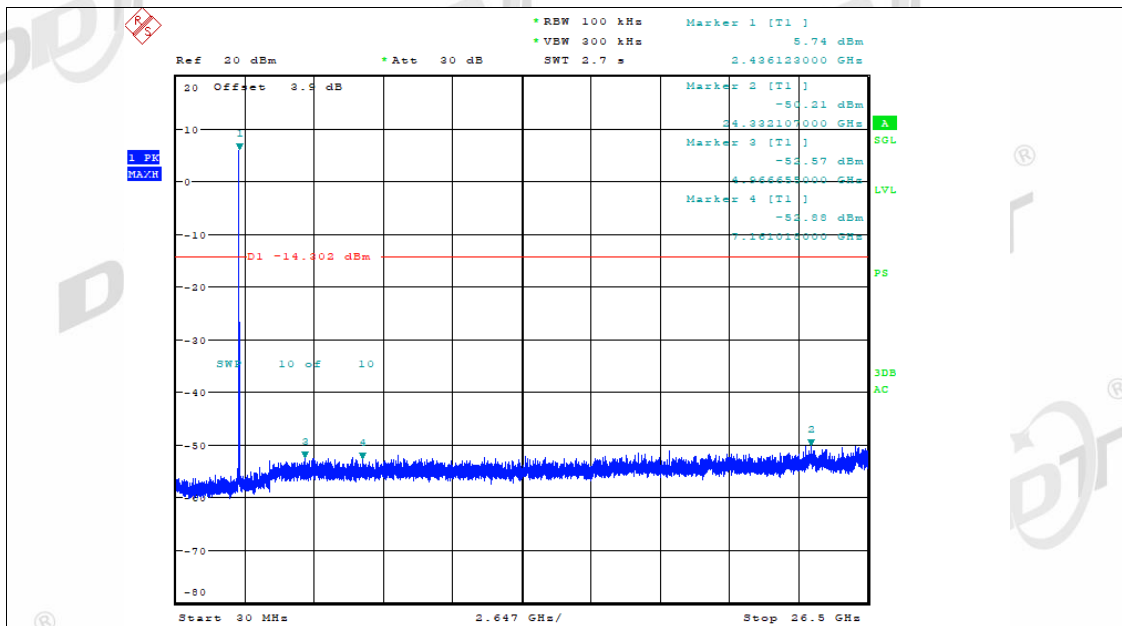


Date: 16.JAN.2023 17:36:28

Tx. Spurious NVNT b 2462MHz Ant1 Ref

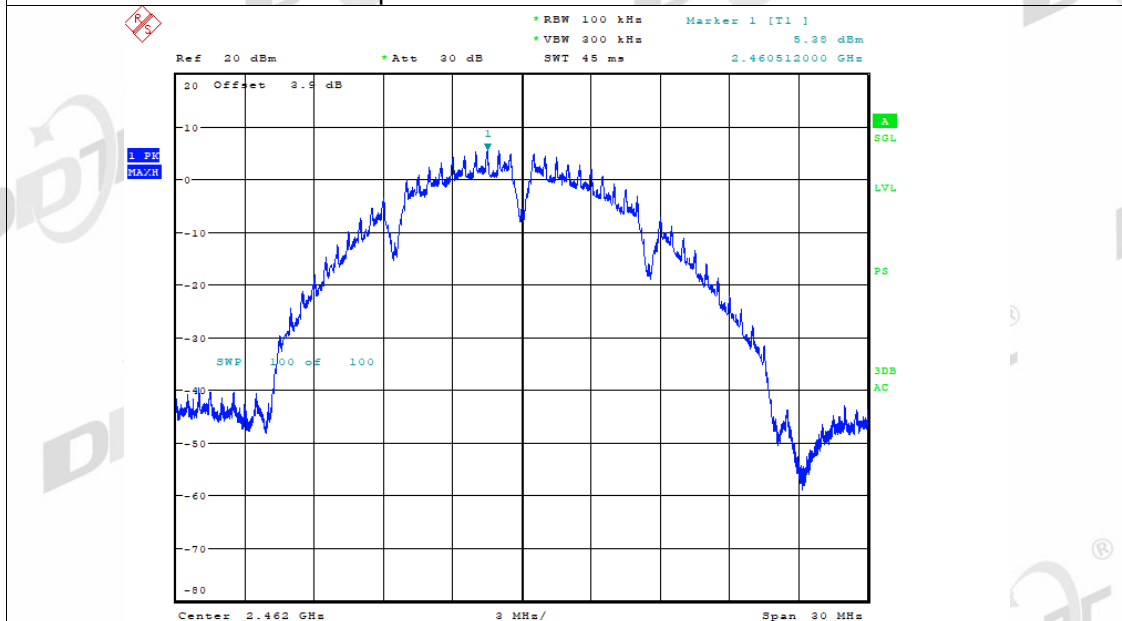


Date: 16.JAN.2023 17:43:47

Tx. Spurious NVNT b 2462MHz Ant1 Emission

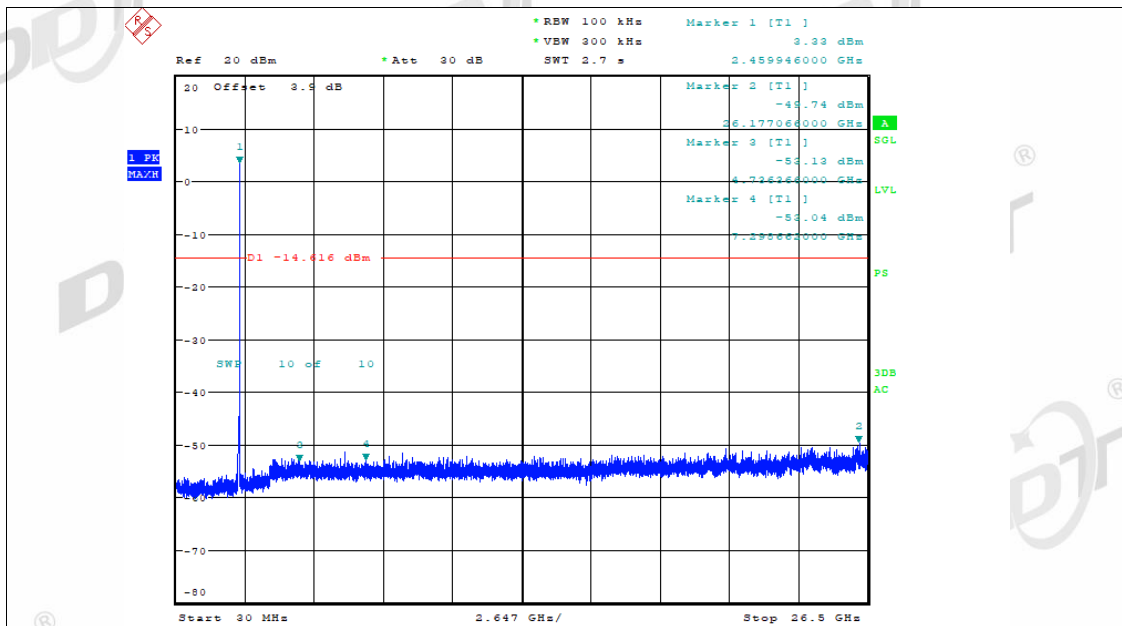


Date: 16.JAN.2023 17:44:20

Tx. Spurious NVNT b 2412MHz Ant2 Ref

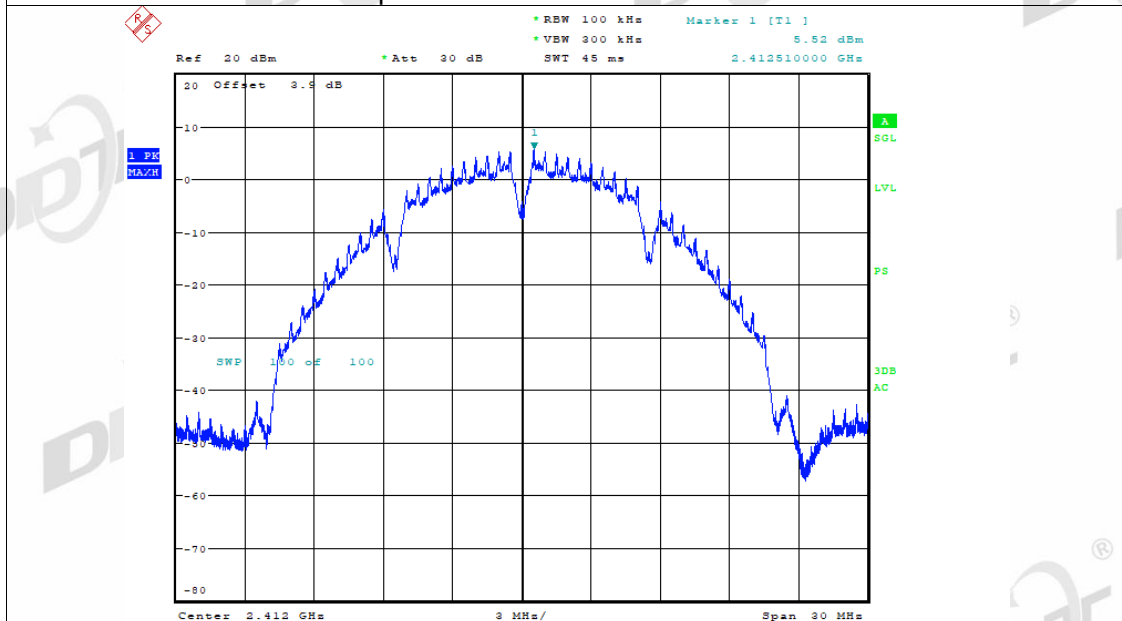


Date: 16.JAN.2023 16:54:50

Tx. Spurious NVNT b 2412MHz Ant2 Emission

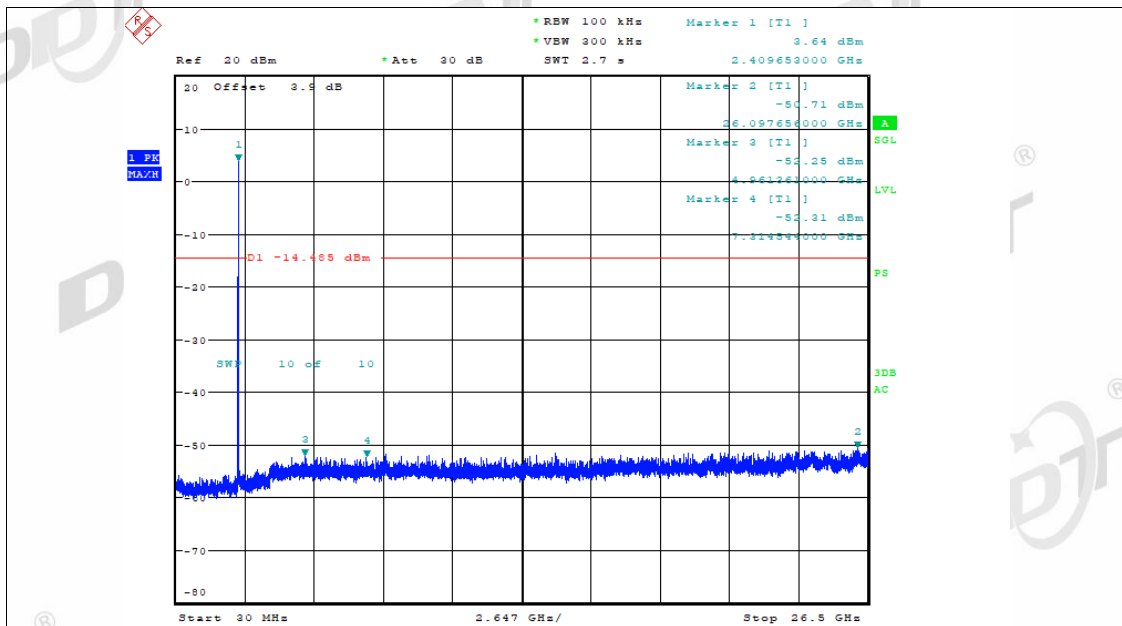


Date: 16.JAN.2023 16:55:24

Tx. Spurious NVNT b 2437MHz Ant2 Ref

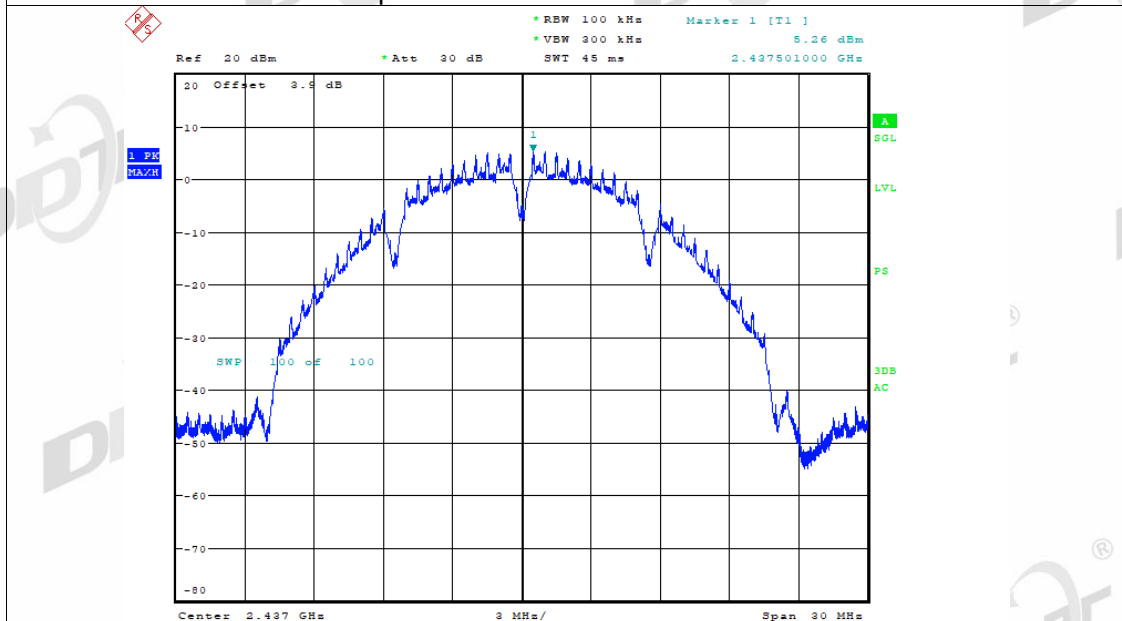


Date: 16.JAN.2023 17:39:09

Tx. Spurious NVNT b 2437MHz Ant2 Emission

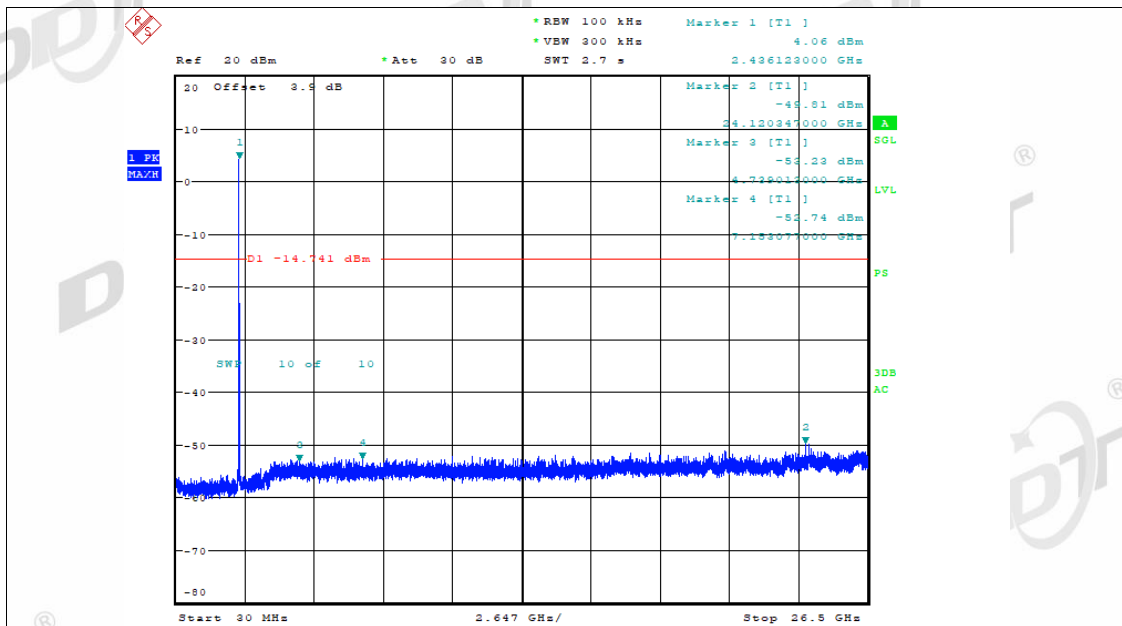


Date: 16.JAN.2023 17:39:42

Tx. Spurious NVNT b 2462MHz Ant2 Ref

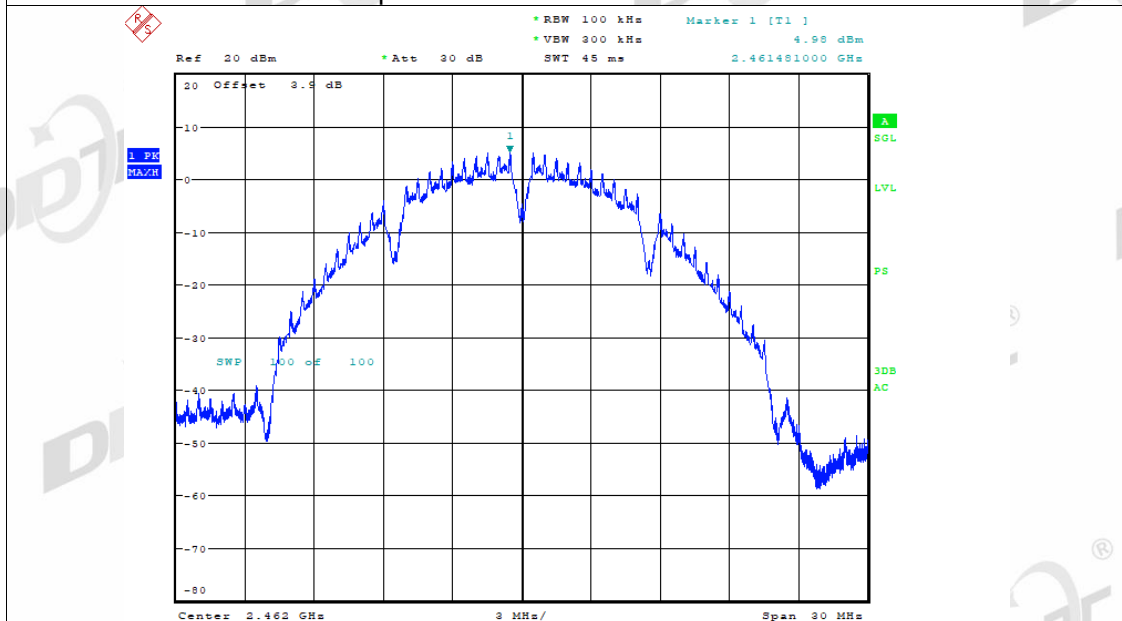


Date: 16.JAN.2023 17:47:34

Tx. Spurious NVNT b 2462MHz Ant2 Emission

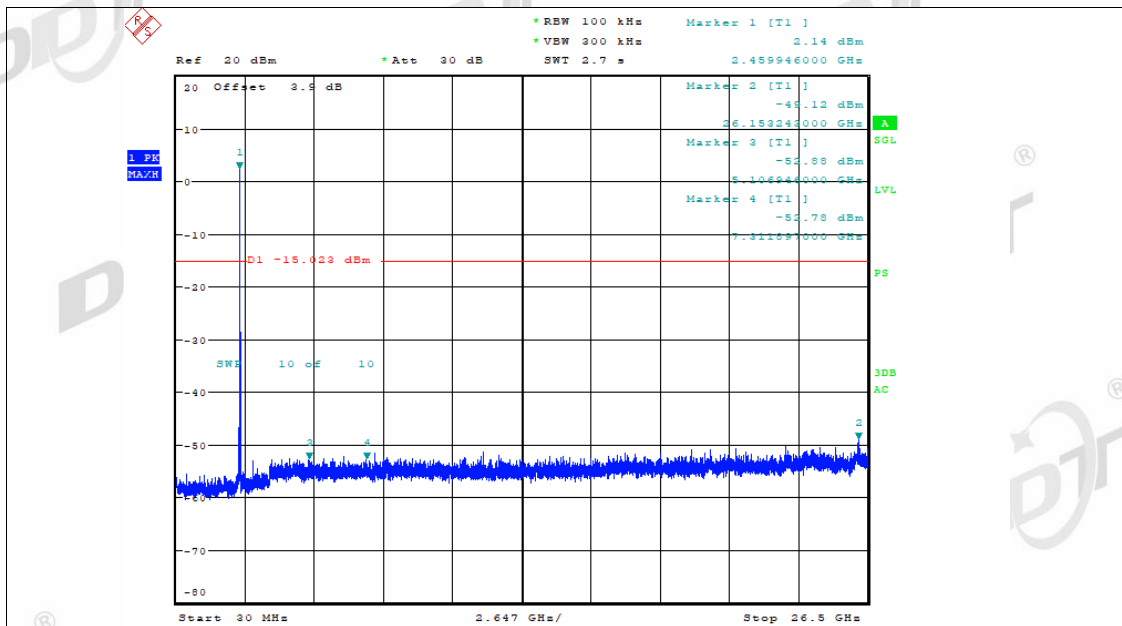


Date: 16.JAN.2023 17:48:07

Tx. Spurious NVNT g 2412MHz Ant1 Ref

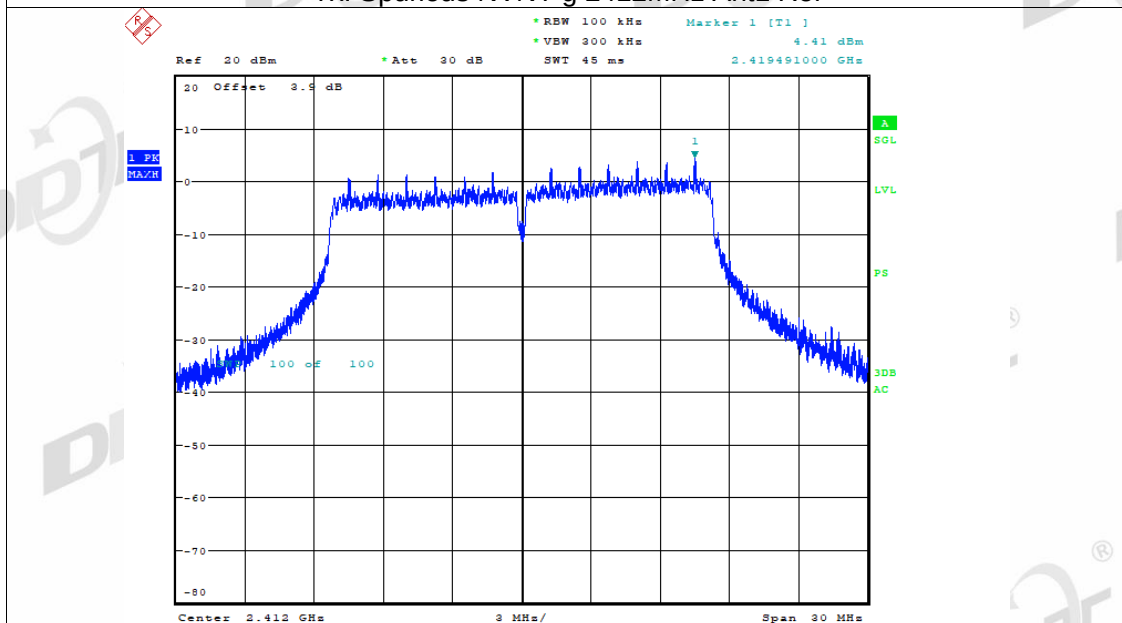


Date: 17.JAN.2023 08:49:38

Tx. Spurious NVNT g 2412MHz Ant1 Emission

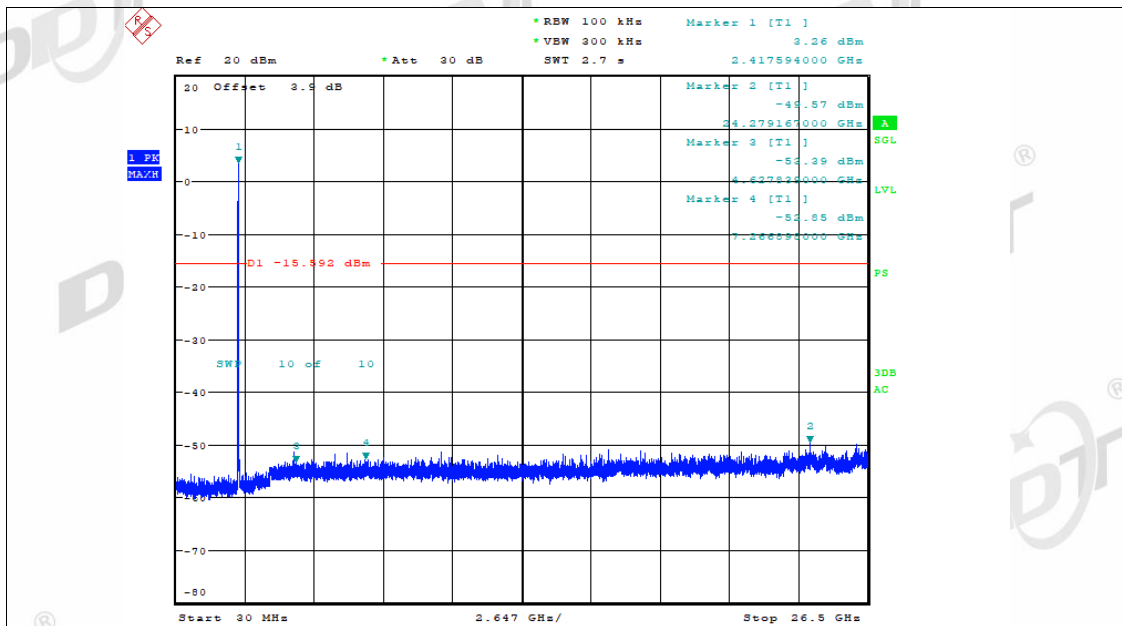


Date: 17.JAN.2023 08:50:11

Tx. Spurious NVNT g 2437MHz Ant1 Ref

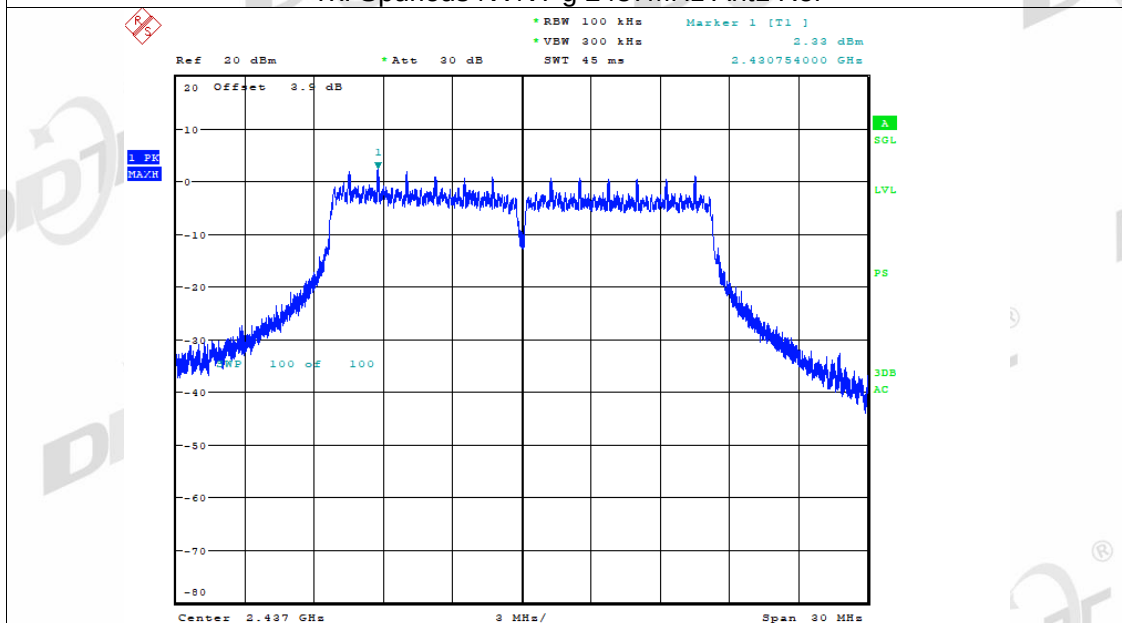


Date: 17.JAN.2023 08:59:56

Tx. Spurious NVNT g 2437MHz Ant1 Emission

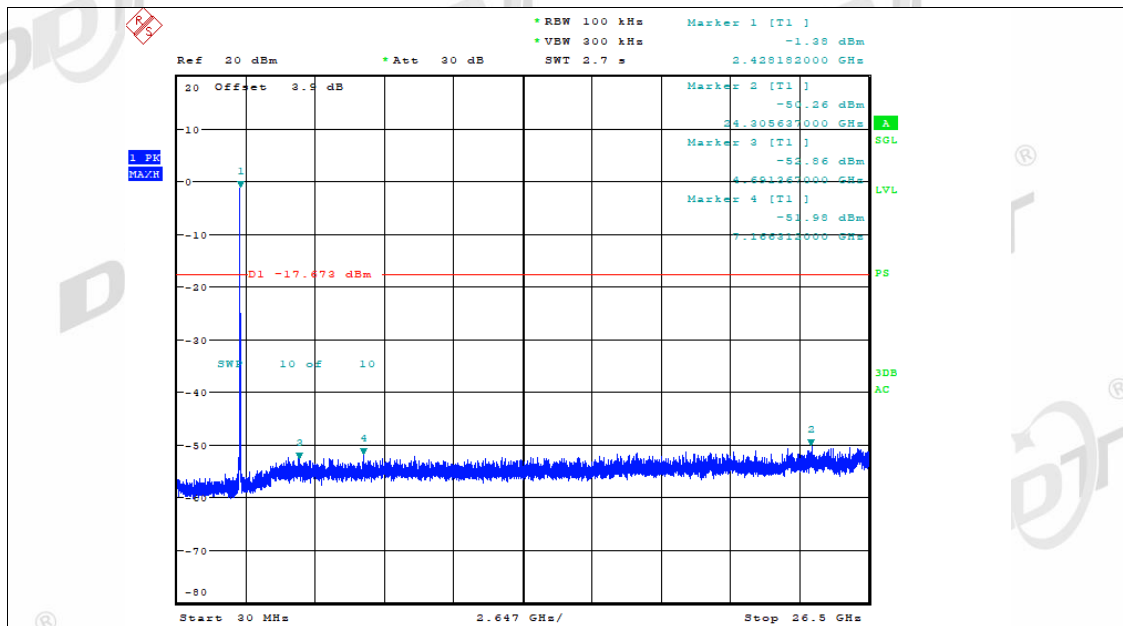


Date: 17.JAN.2023 09:00:29

Tx. Spurious NVNT g 2462MHz Ant1 Ref

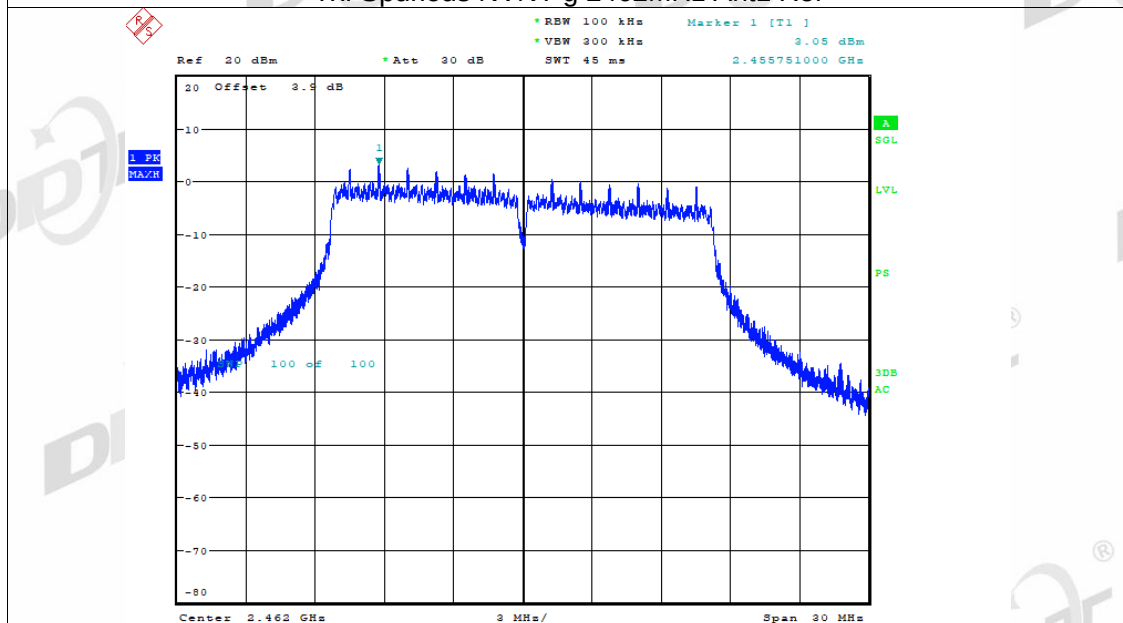


Date: 17.JAN.2023 09:13:16

Tx. Spurious NVNT g 2462MHz Ant1 Emission

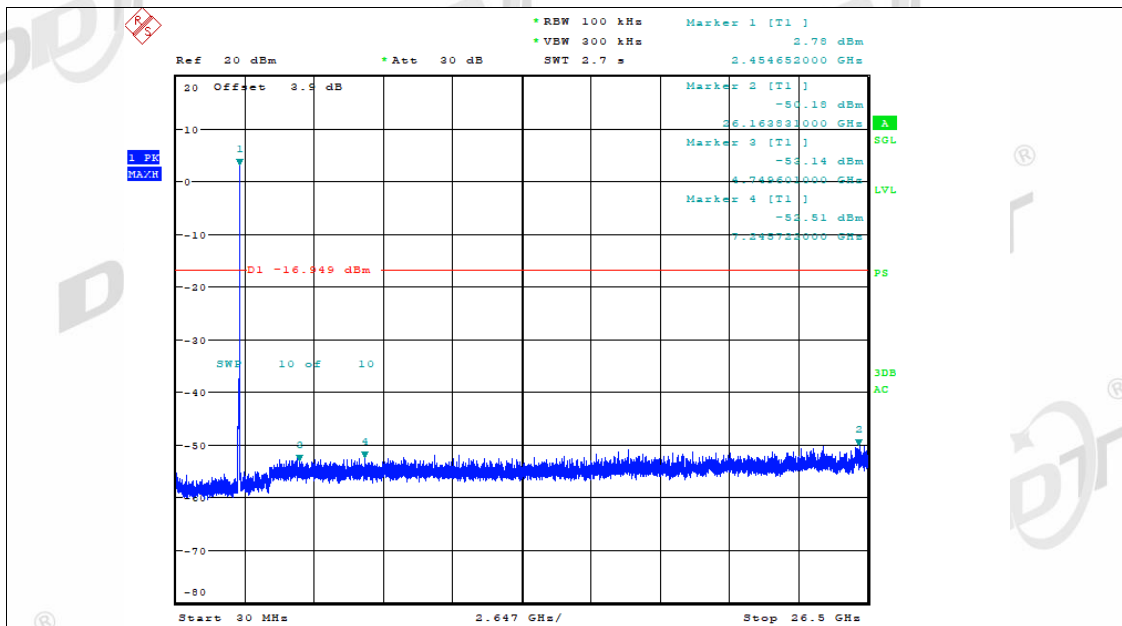


Date: 17.JAN.2023 09:13:50

Tx. Spurious NVNT g 2412MHz Ant2 Ref

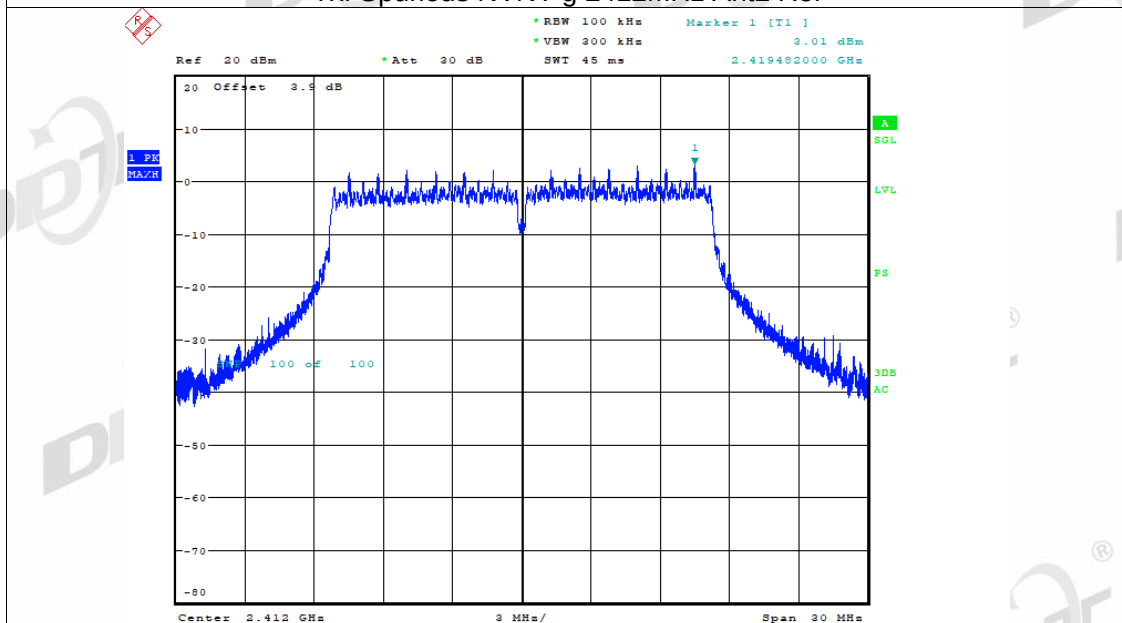


Date: 17.JAN.2023 08:54:25

Tx. Spurious NVNT g 2412MHz Ant2 Emission

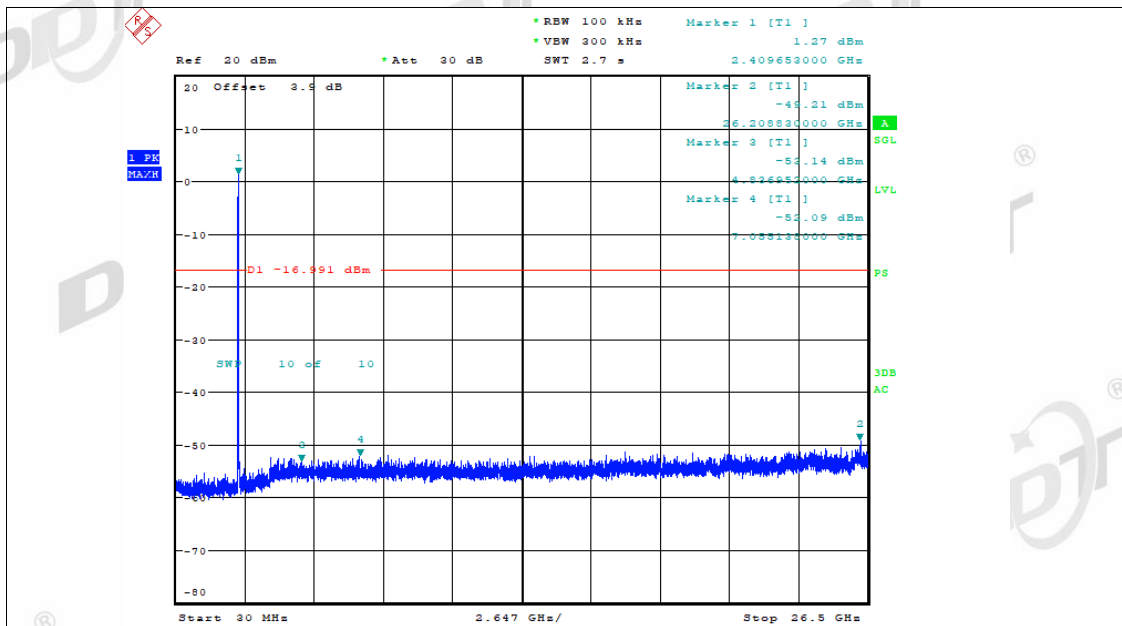


Date: 17.JAN.2023 08:54:58

Tx. Spurious NVNT g 2437MHz Ant2 Ref

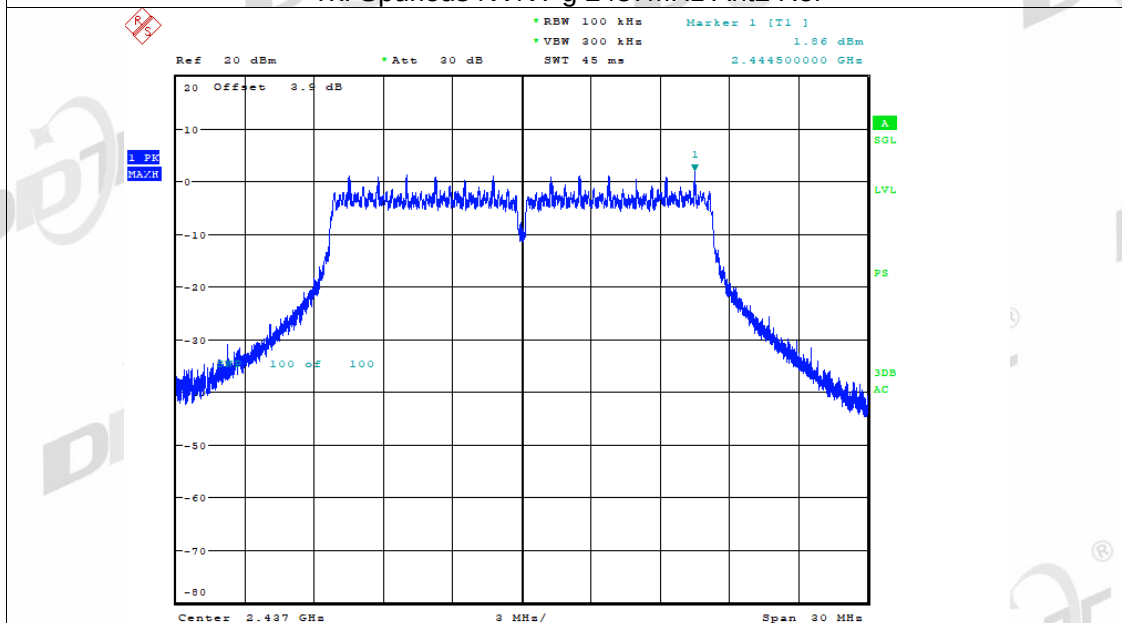


Date: 17.JAN.2023 09:08:38

Tx. Spurious NVNT g 2437MHz Ant2 Emission

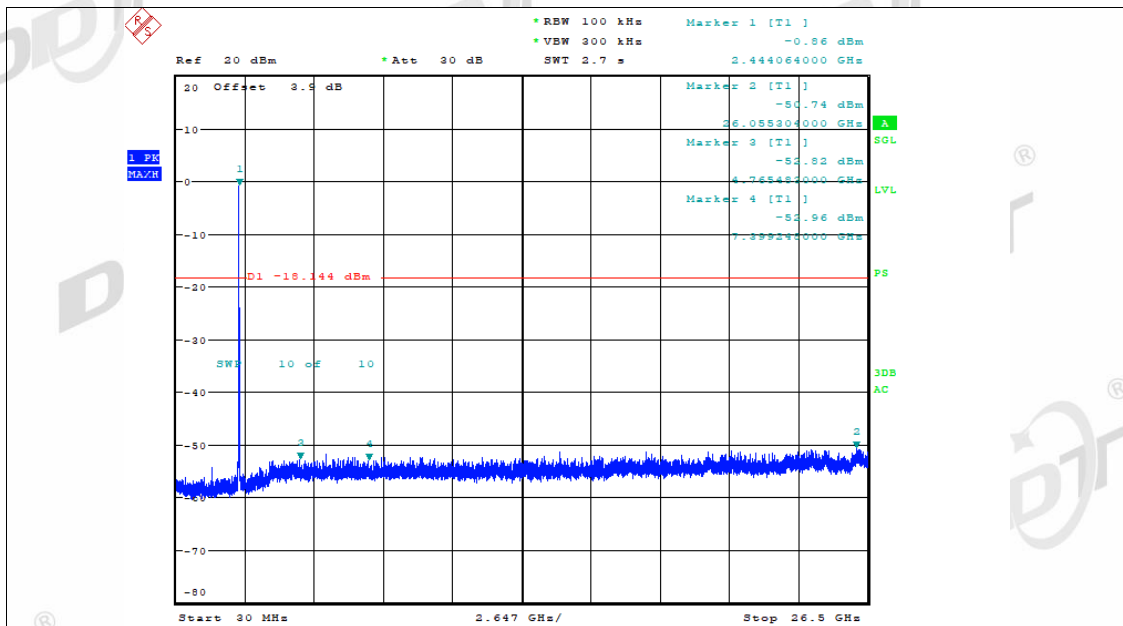


Date: 17.JAN.2023 09:09:11

Tx. Spurious NVNT g 2462MHz Ant2 Ref

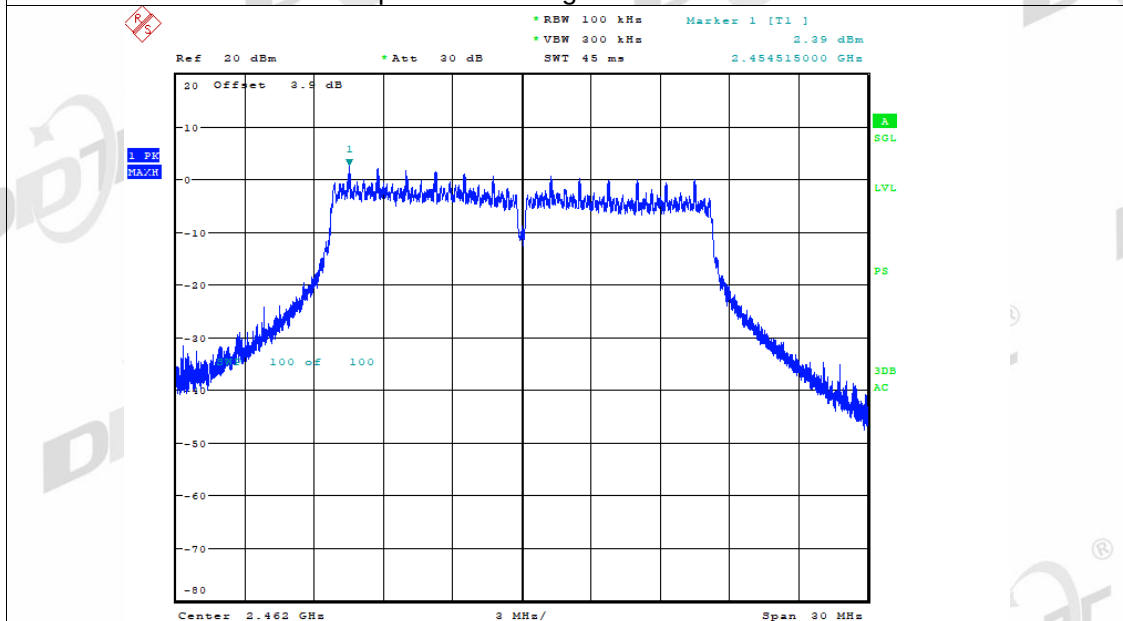


Date: 17.JAN.2023 09:17:05

Tx. Spurious NVNT g 2462MHz Ant2 Emission

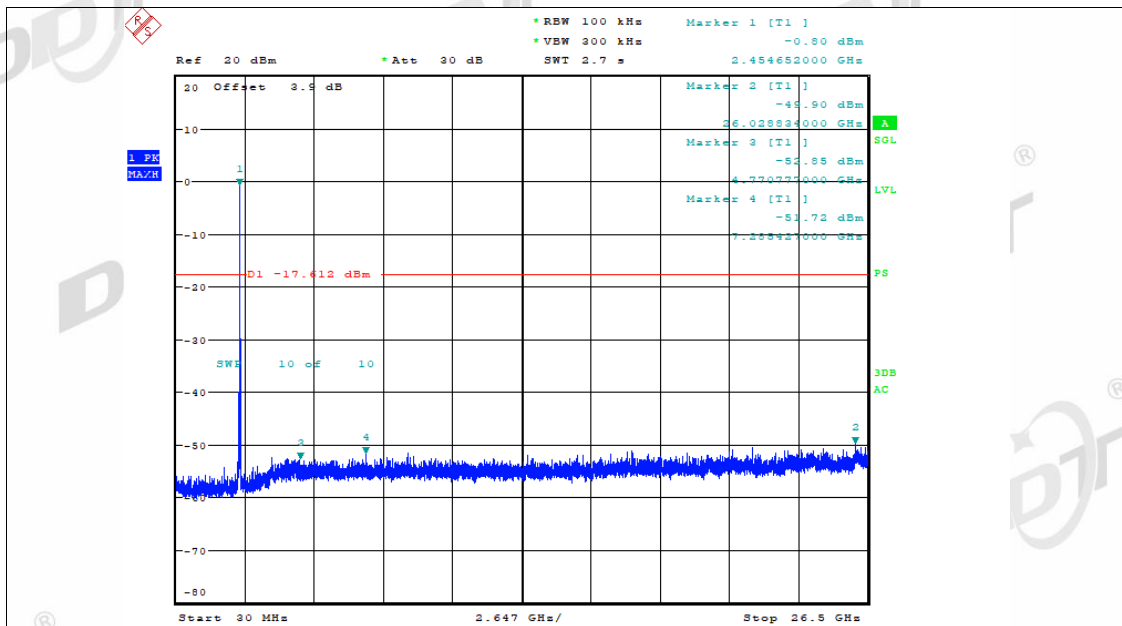


Date: 17.JAN.2023 09:17:38

Tx. Spurious NVNT n20 2412MHz Ant1 Ref

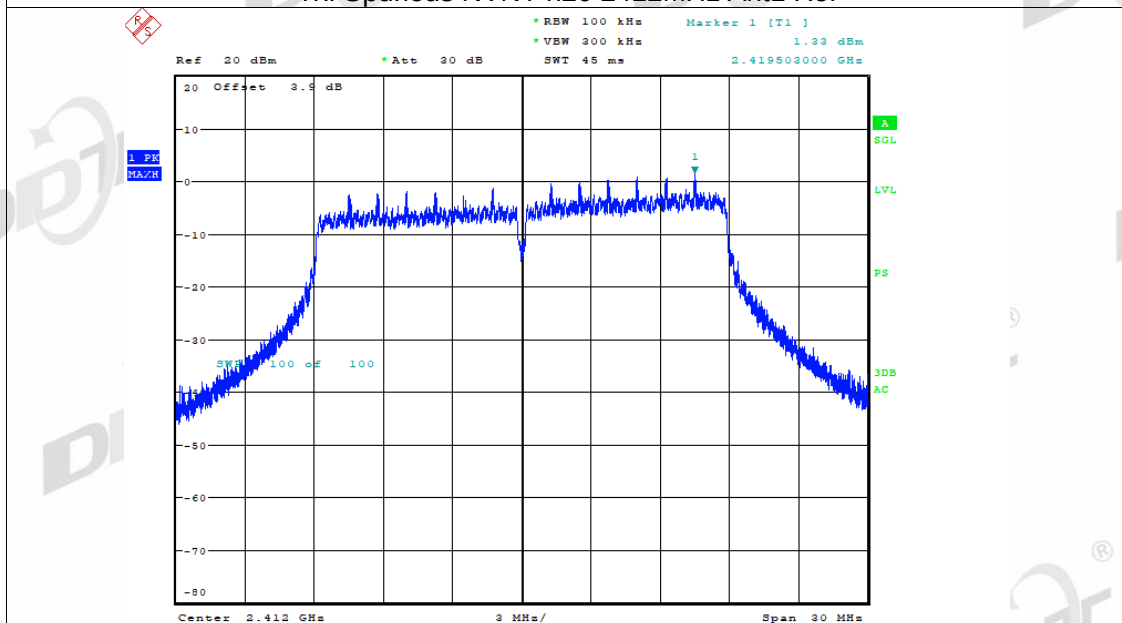


Date: 17.JAN.2023 09:28:12

Tx. Spurious NVNT n20 2412MHz Ant1 Emission

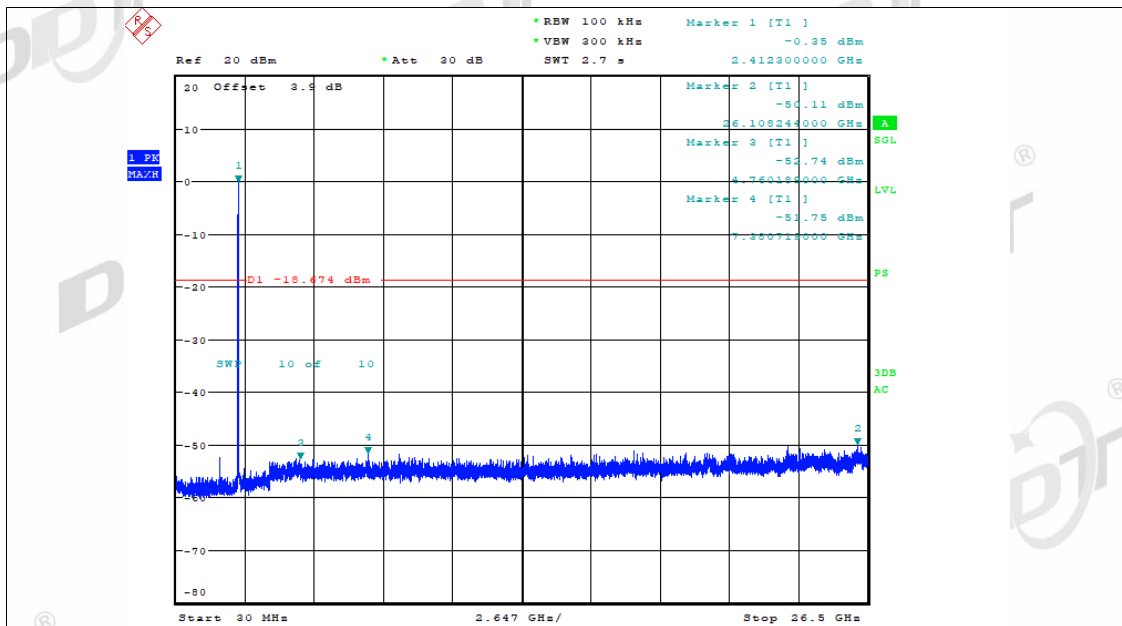


Date: 17.JAN.2023 09:28:46

Tx. Spurious NVNT n20 2412MHz Ant2 Ref

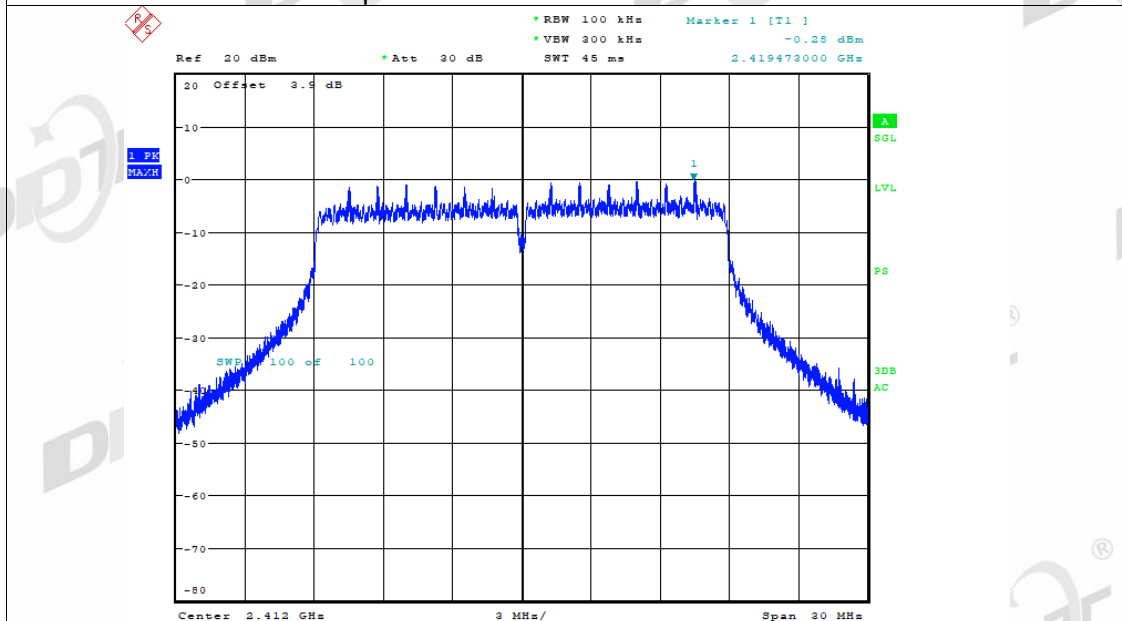


Date: 17.JAN.2023 09:29:06

Tx. Spurious NVNT n20 2412MHz Ant2 Emission

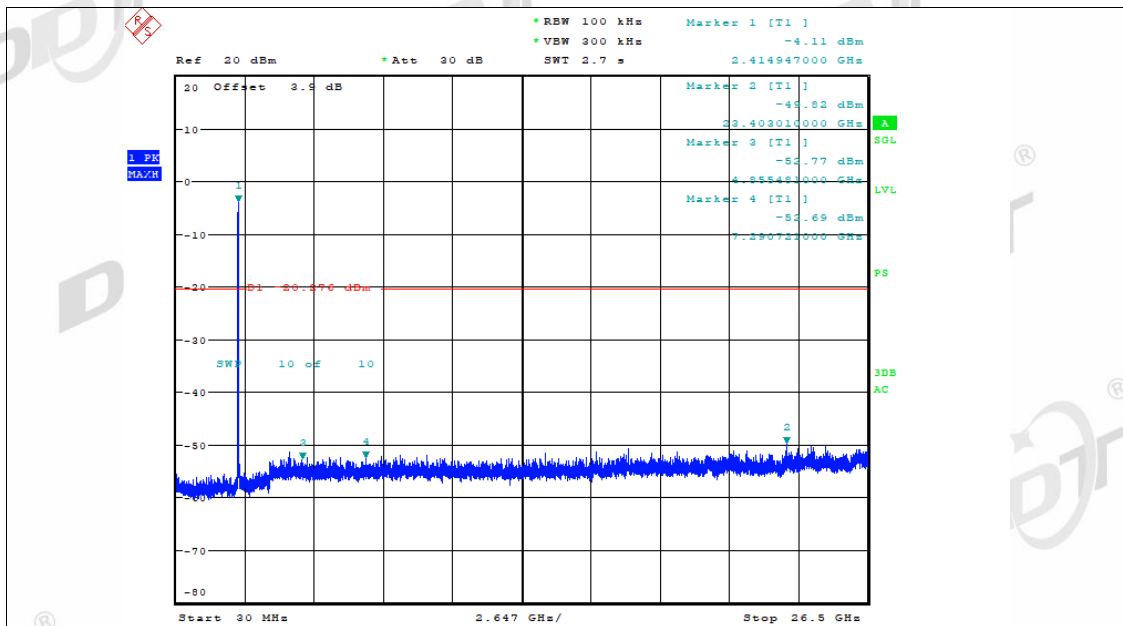


Date: 17.JAN.2023 09:29:39

Tx. Spurious NVNT n20 2437MHz Ant1 Ref

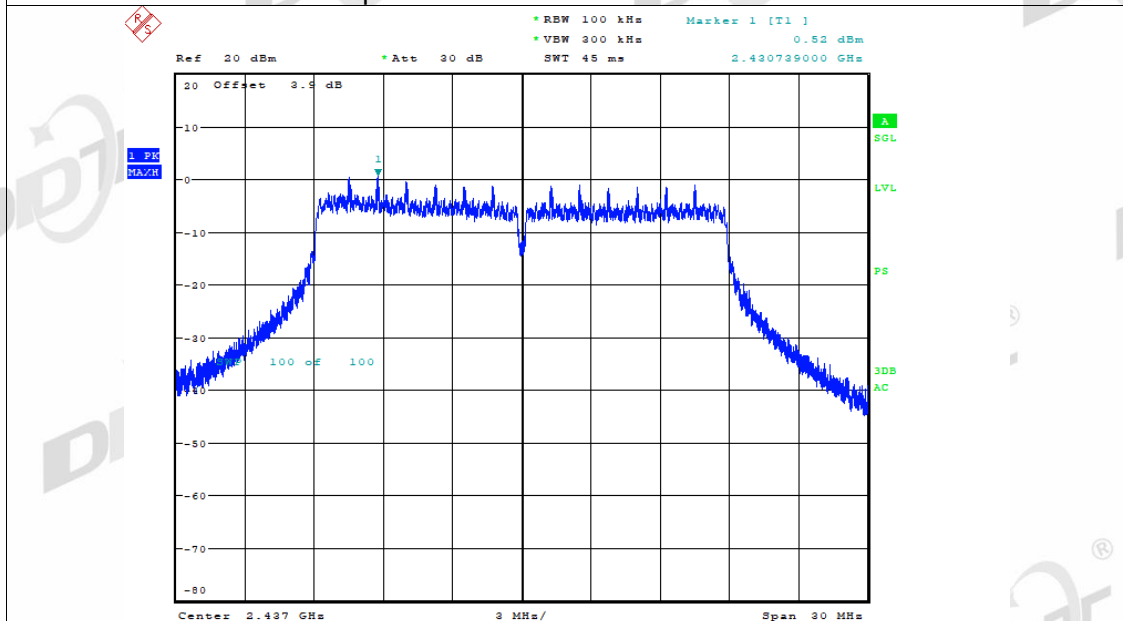


Date: 17.JAN.2023 09:35:04

Tx. Spurious NVNT n20 2437MHz Ant1 Emission

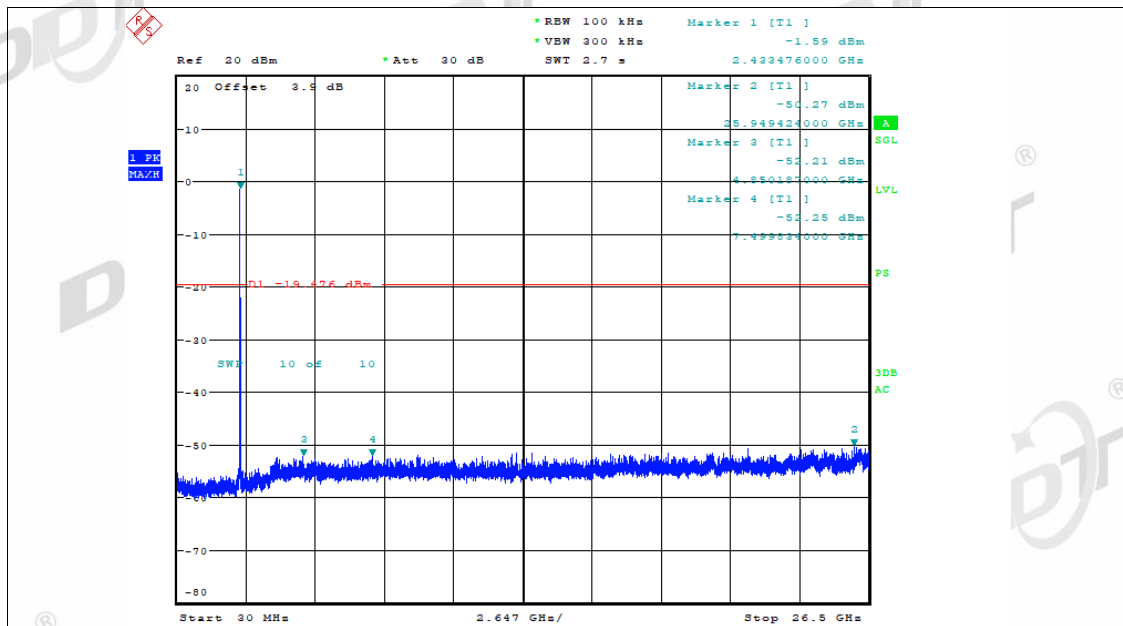


Date: 17.JAN.2023 09:35:37

Tx. Spurious NVNT n20 2437MHz Ant2 Ref

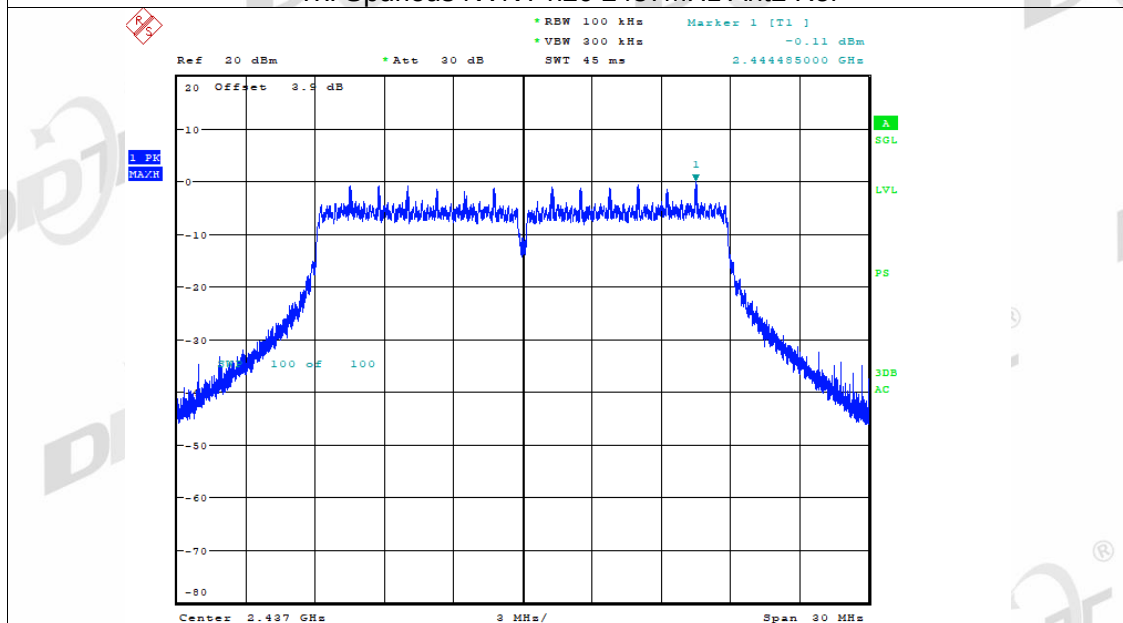


Date: 17.JAN.2023 09:35:55

Tx. Spurious NVNT n20 2437MHz Ant2 Emission

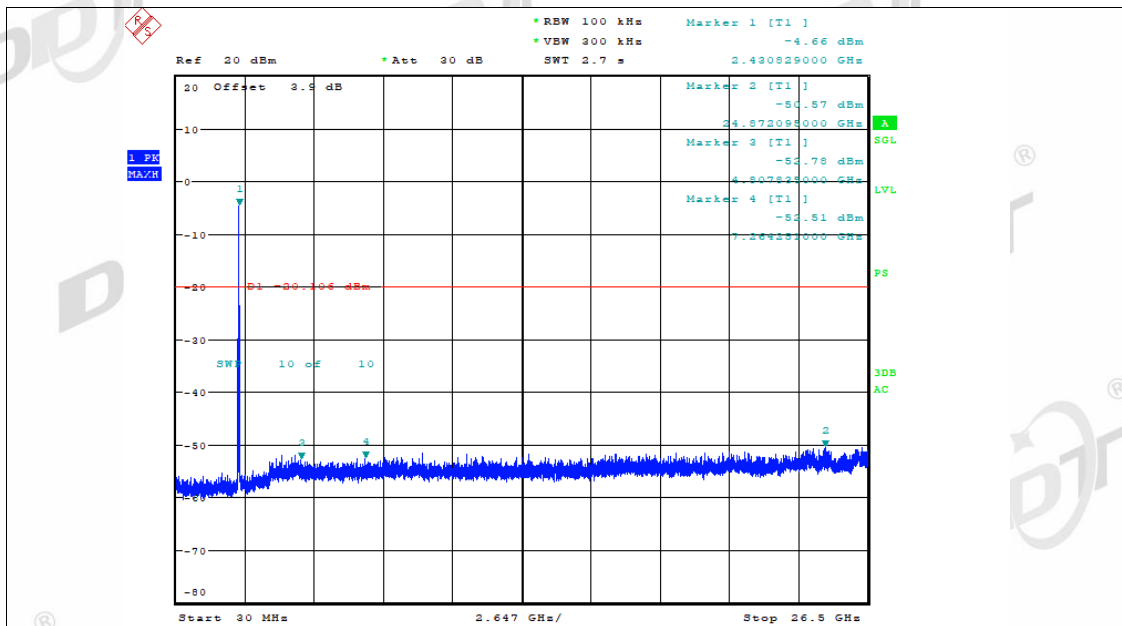


Date: 17.JAN.2023 09:36:29

Tx. Spurious NVNT n20 2462MHz Ant1 Ref

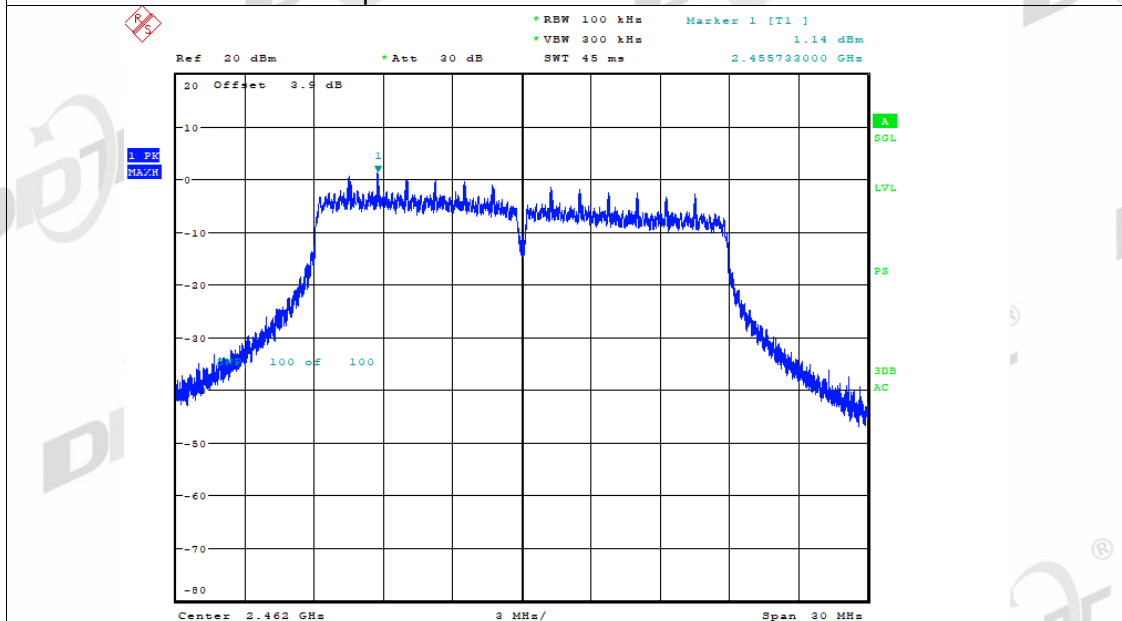


Date: 17.JAN.2023 09:51:30

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

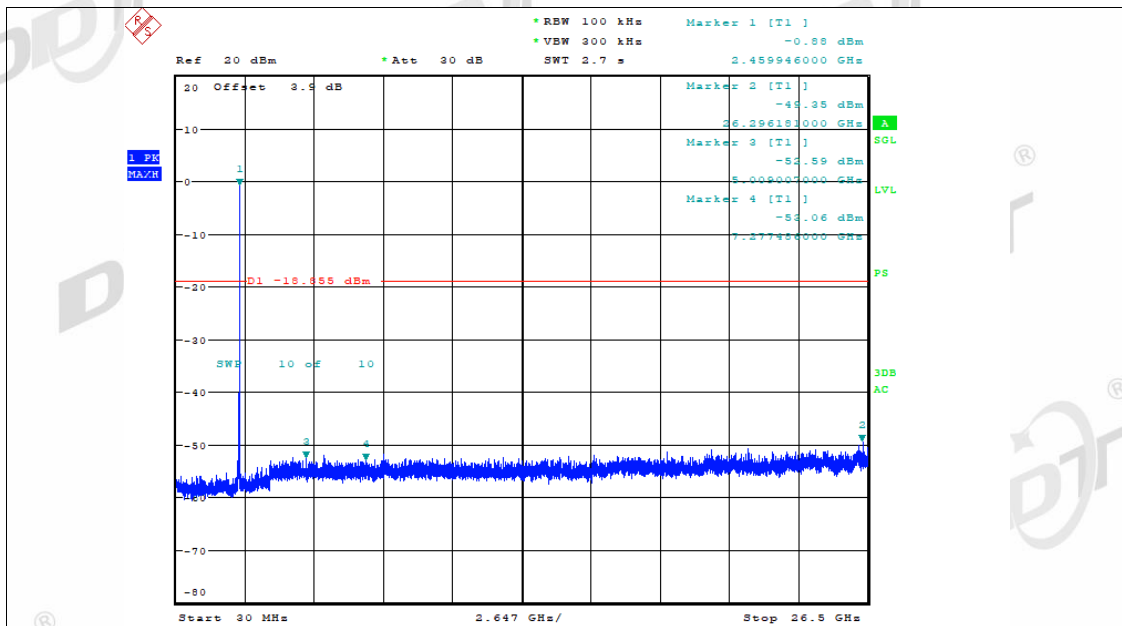


Date: 17.JAN.2023 09:52:03

Tx. Spurious NVNT n20 2462MHz Ant2 Ref

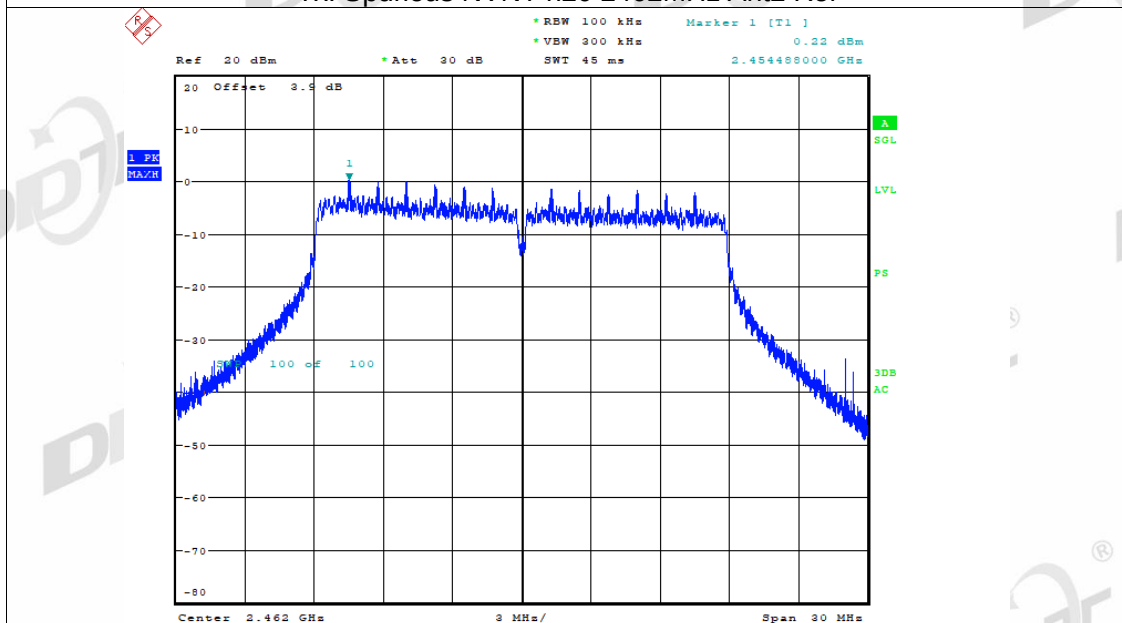


Date: 17.JAN.2023 09:52:23

Tx. Spurious NVNT n20 2462MHz Ant2 Emission

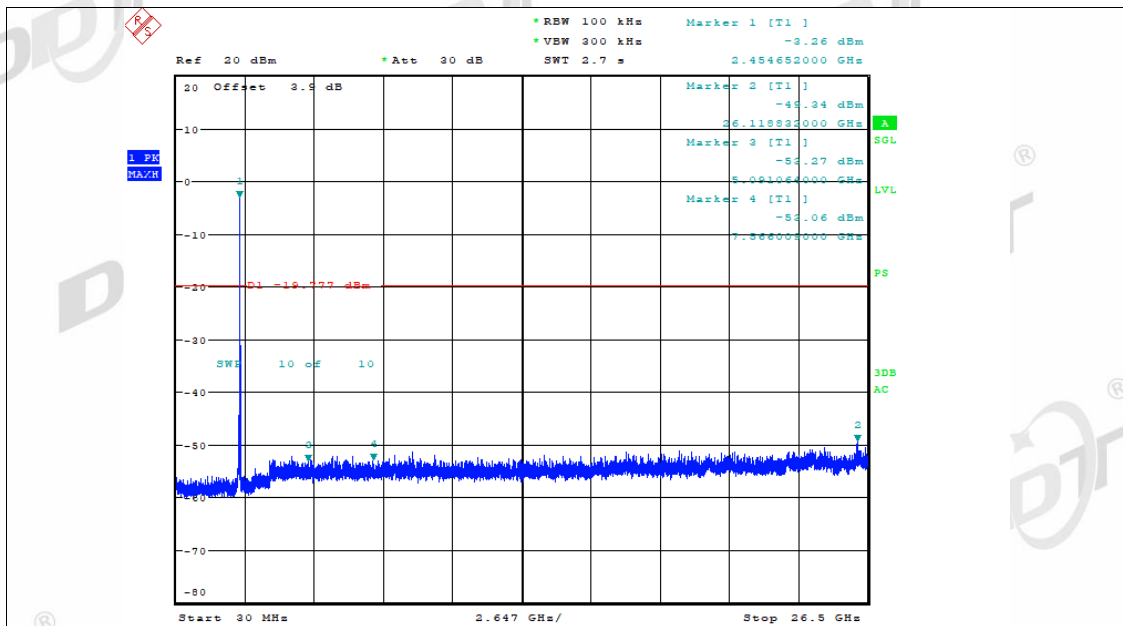


Date: 17.JAN.2023 09:52:57

Tx. Spurious NVNT n40 2422MHz Ant1 Ref

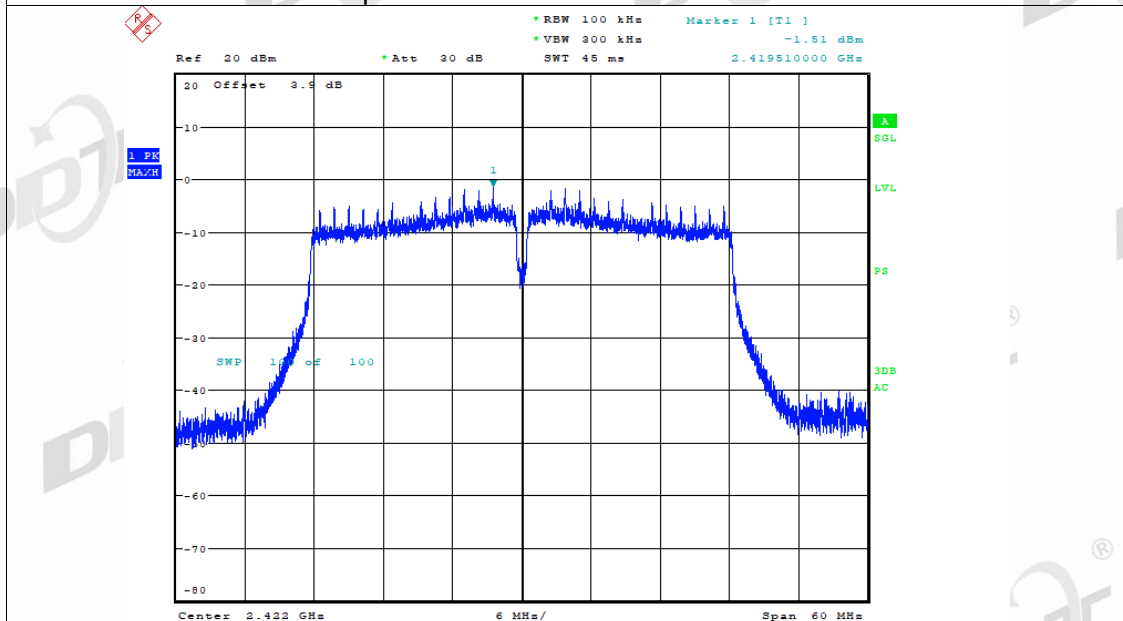


Date: 17.JAN.2023 10:02:19

Tx. Spurious NVNT n40 2422MHz Ant1 Emission

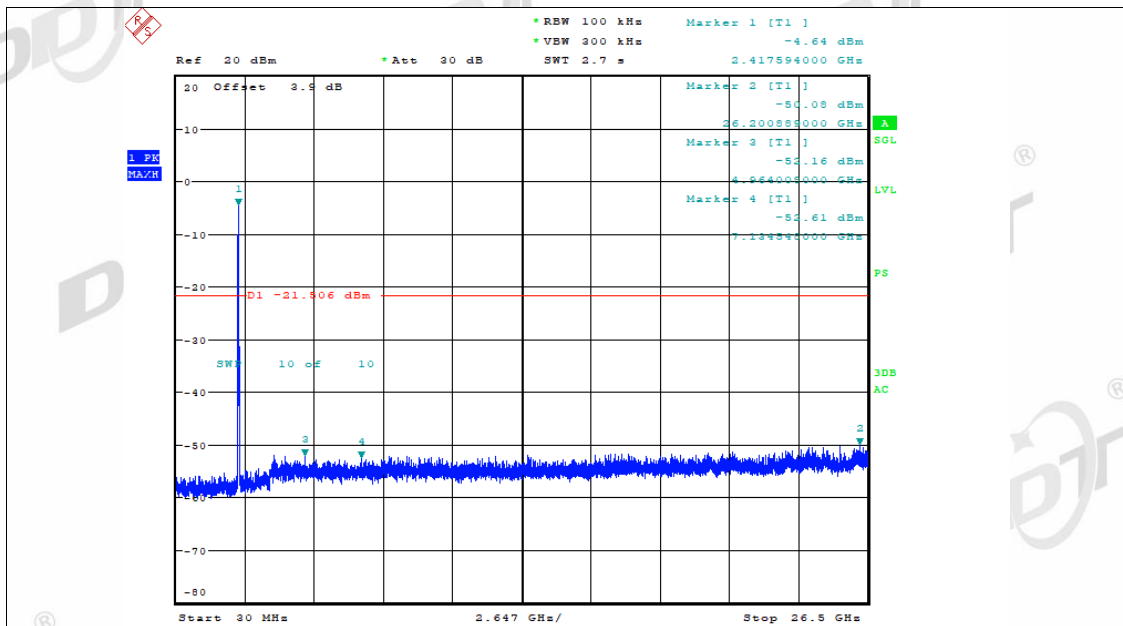


Date: 17.JAN.2023 10:02:53

Tx. Spurious NVNT n40 2422MHz Ant2 Ref

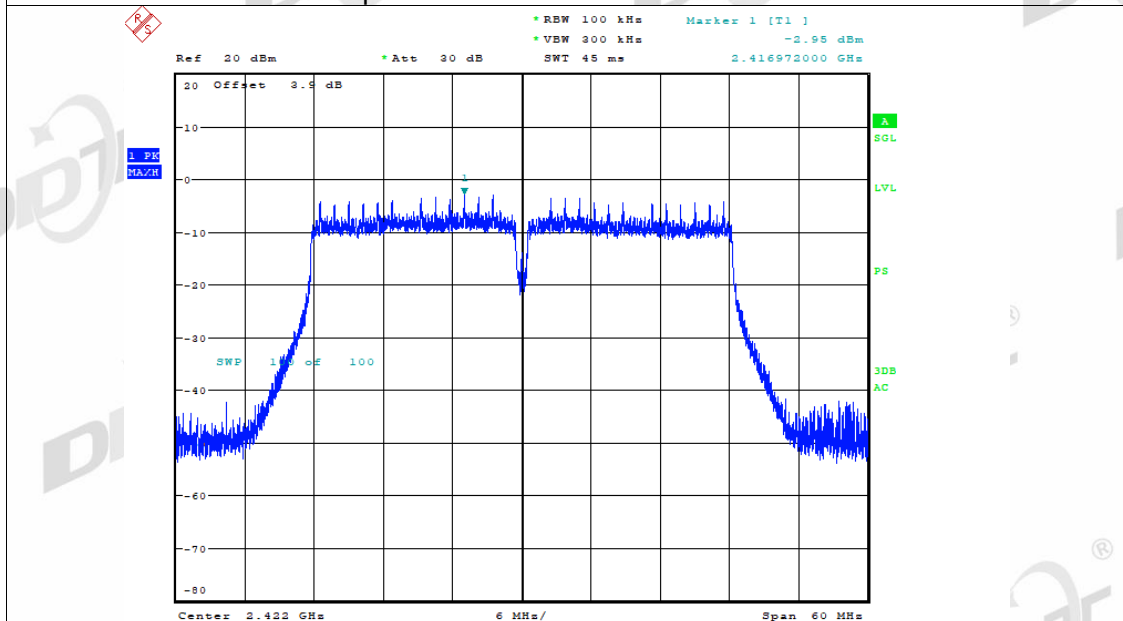


Date: 17.JAN.2023 10:03:11

Tx. Spurious NVNT n40 2422MHz Ant2 Emission

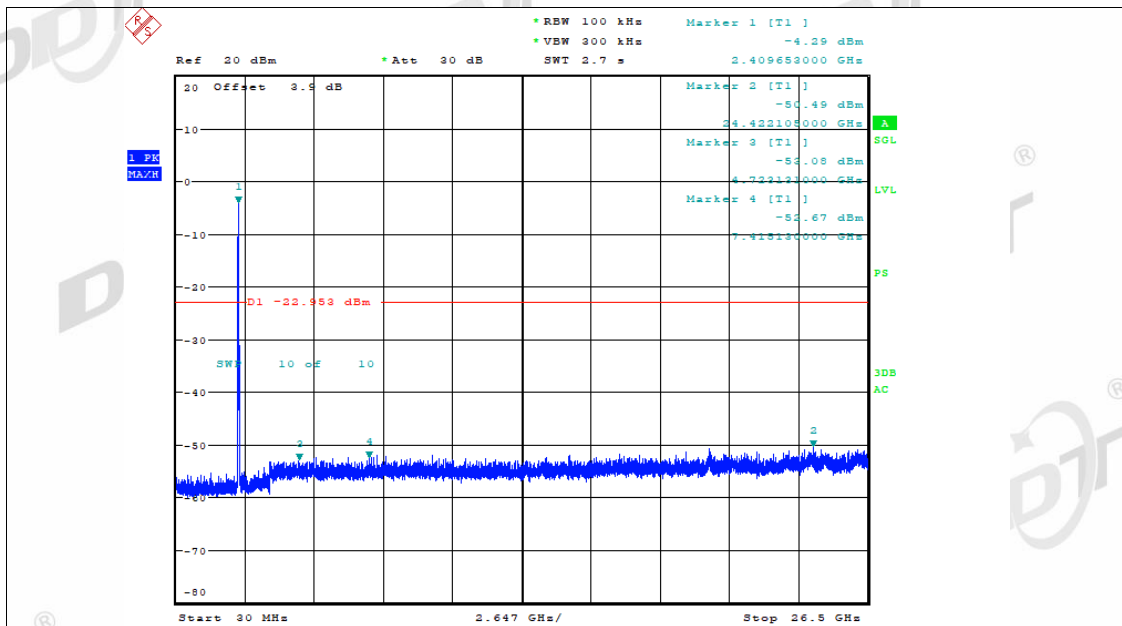


Date: 17.JAN.2023 10:03:44

Tx. Spurious NVNT n40 2437MHz Ant1 Ref

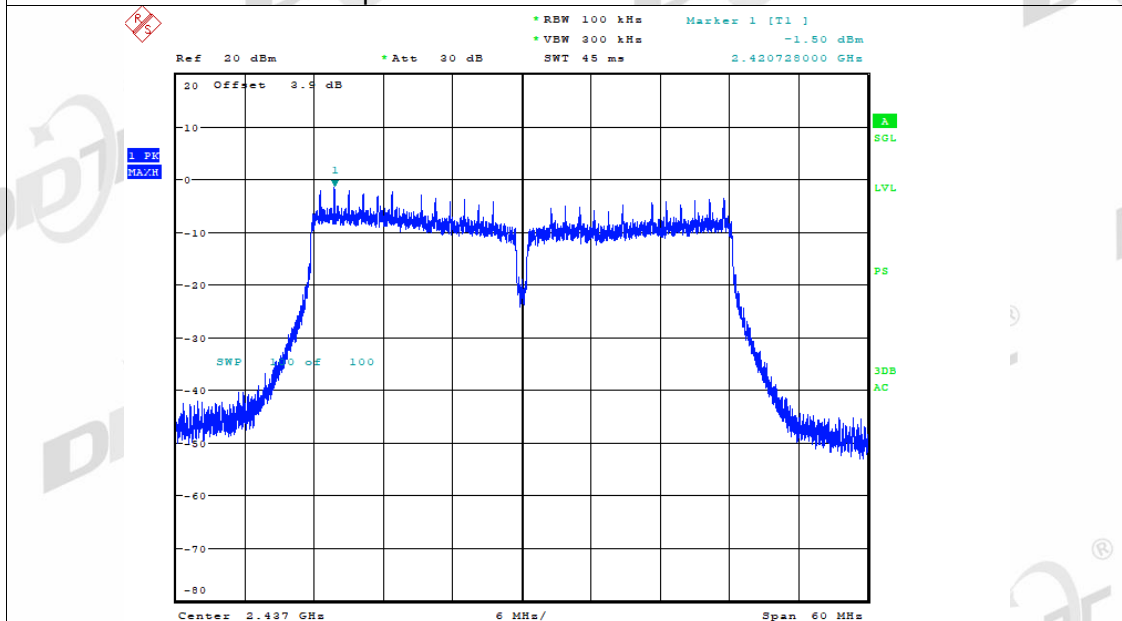


Date: 17.JAN.2023 10:12:22

Tx. Spurious NVNT n40 2437MHz Ant1 Emission

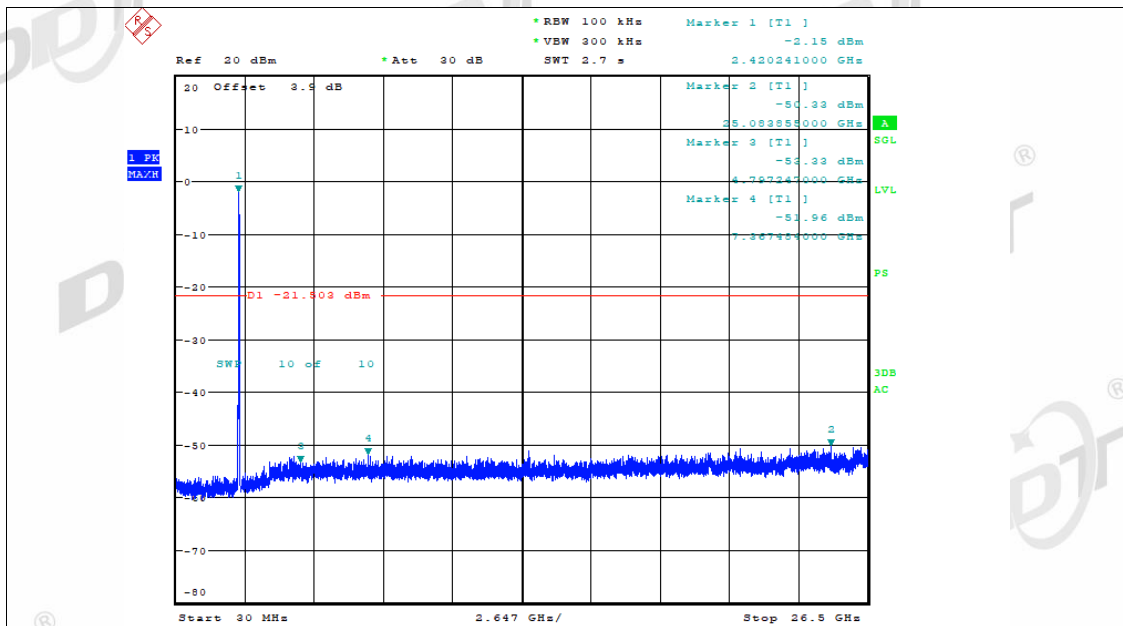


Date: 17.JAN.2023 10:12:56

Tx. Spurious NVNT n40 2437MHz Ant2 Ref

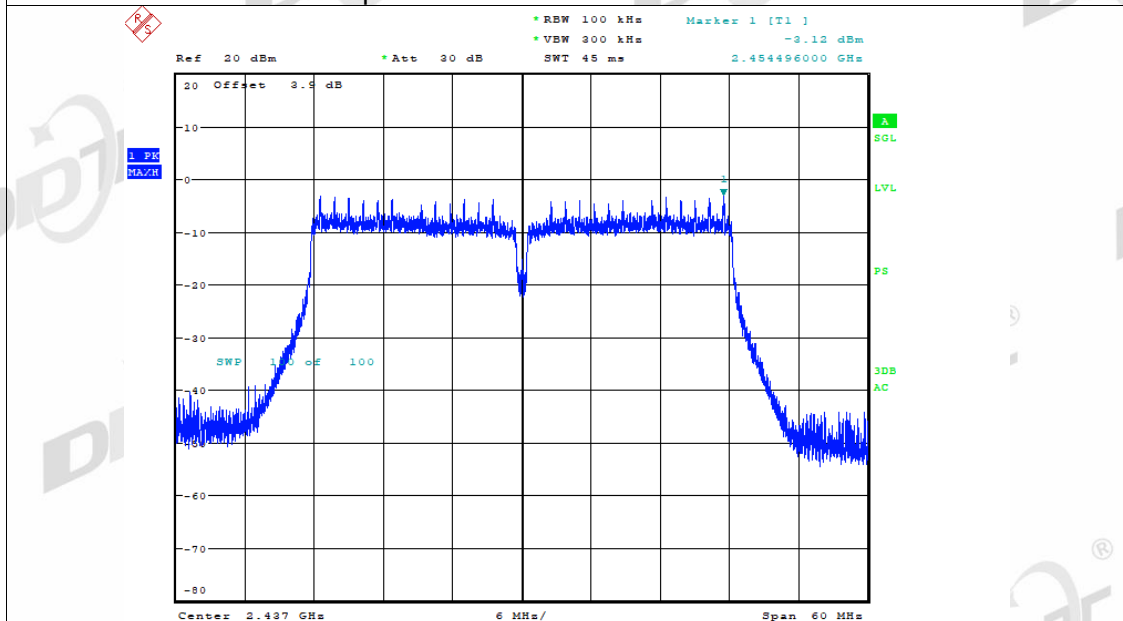


Date: 17.JAN.2023 10:13:14

Tx. Spurious NVNT n40 2437MHz Ant2 Emission

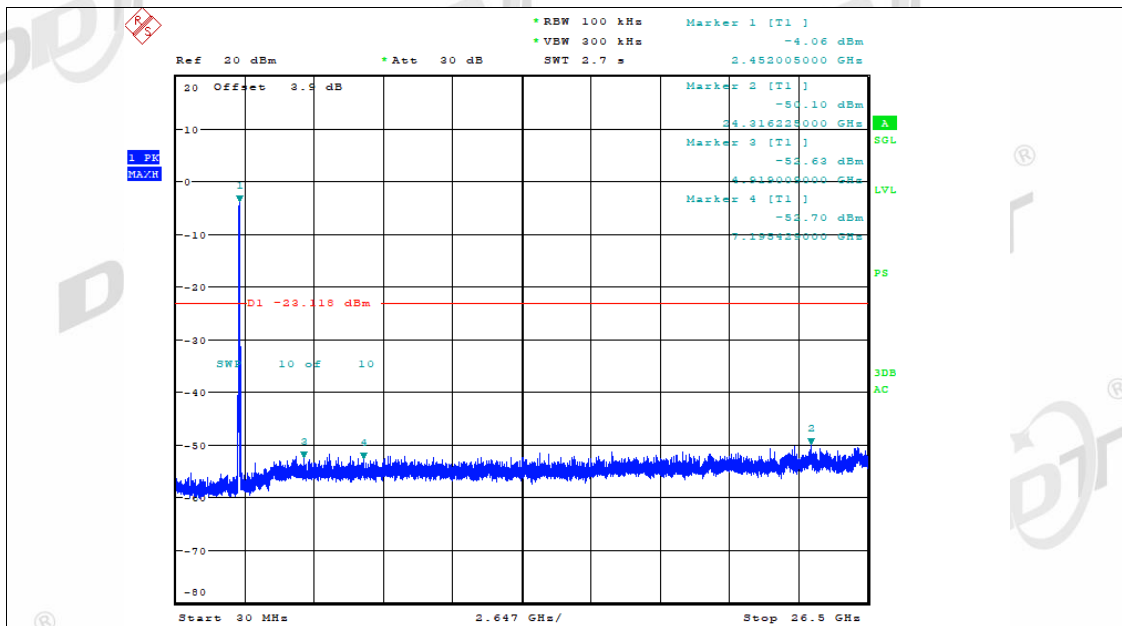


Date: 17.JAN.2023 10:13:48

Tx. Spurious NVNT n40 2452MHz Ant1 Ref

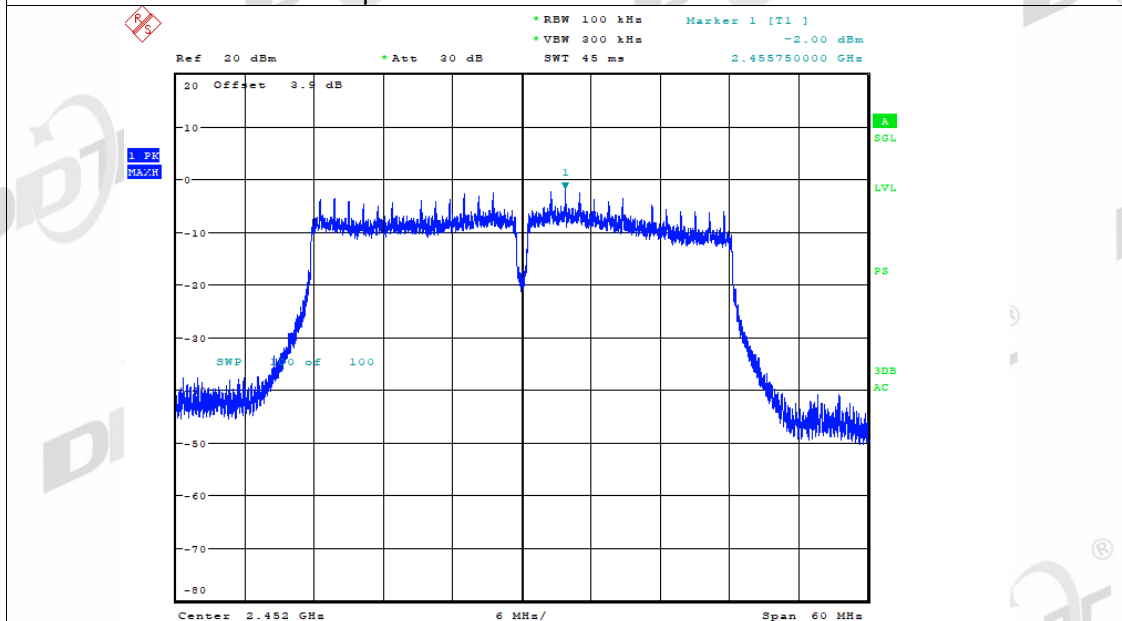


Date: 17.JAN.2023 10:21:27

Tx. Spurious NVNT n40 2452MHz Ant1 Emission

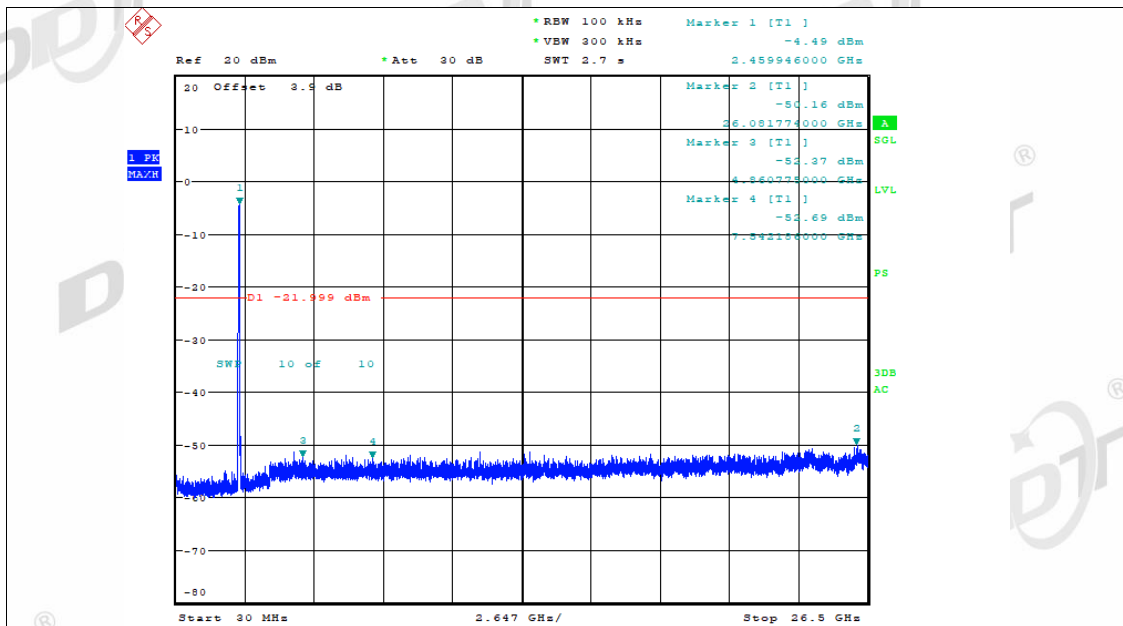


Date: 17.JAN.2023 10:22:01

Tx. Spurious NVNT n40 2452MHz Ant2 Ref

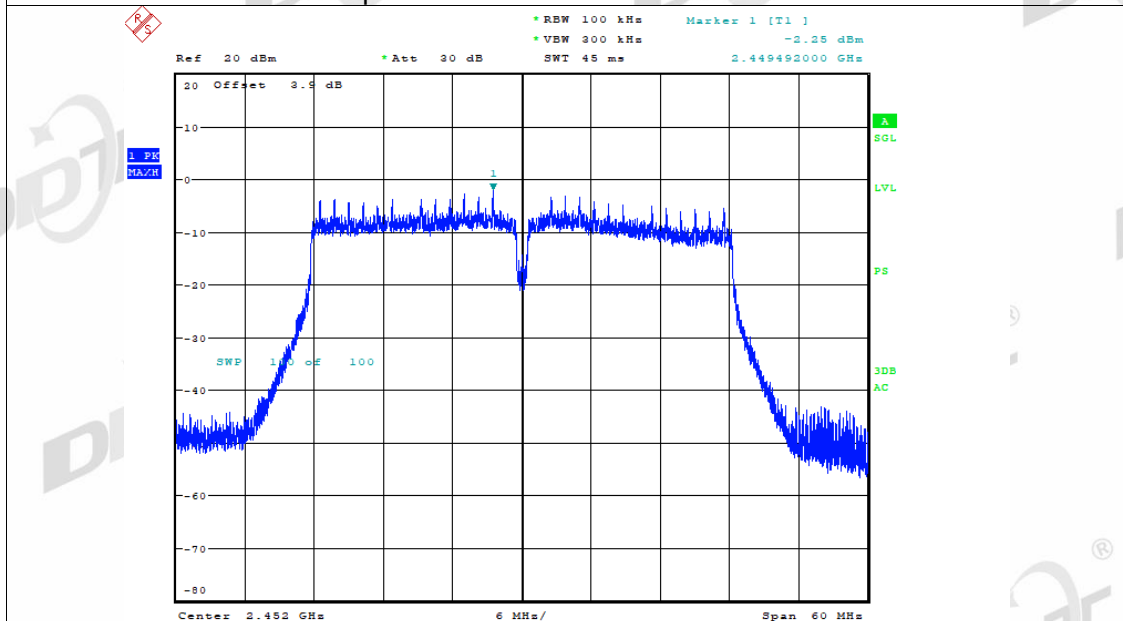


Date: 17.JAN.2023 10:22:19

Tx. Spurious NVNT n40 2452MHz Ant2 Emission

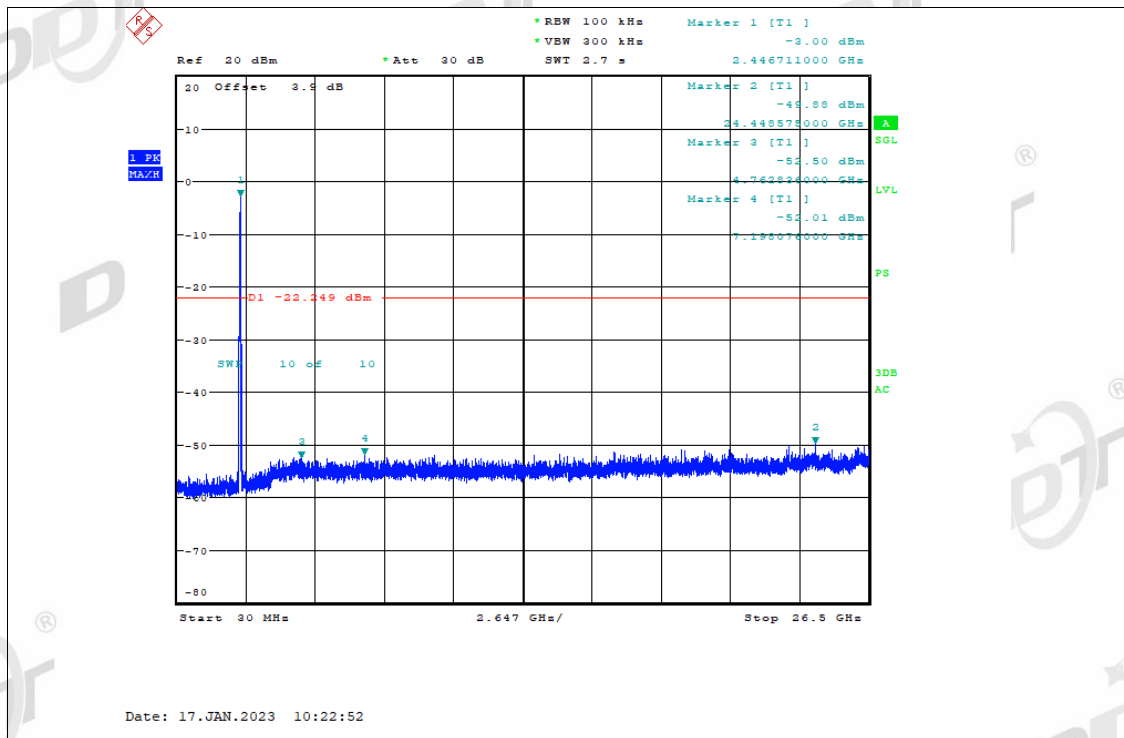

10. Radiated Band Edge Compliance

10.1. Block diagram of test setup

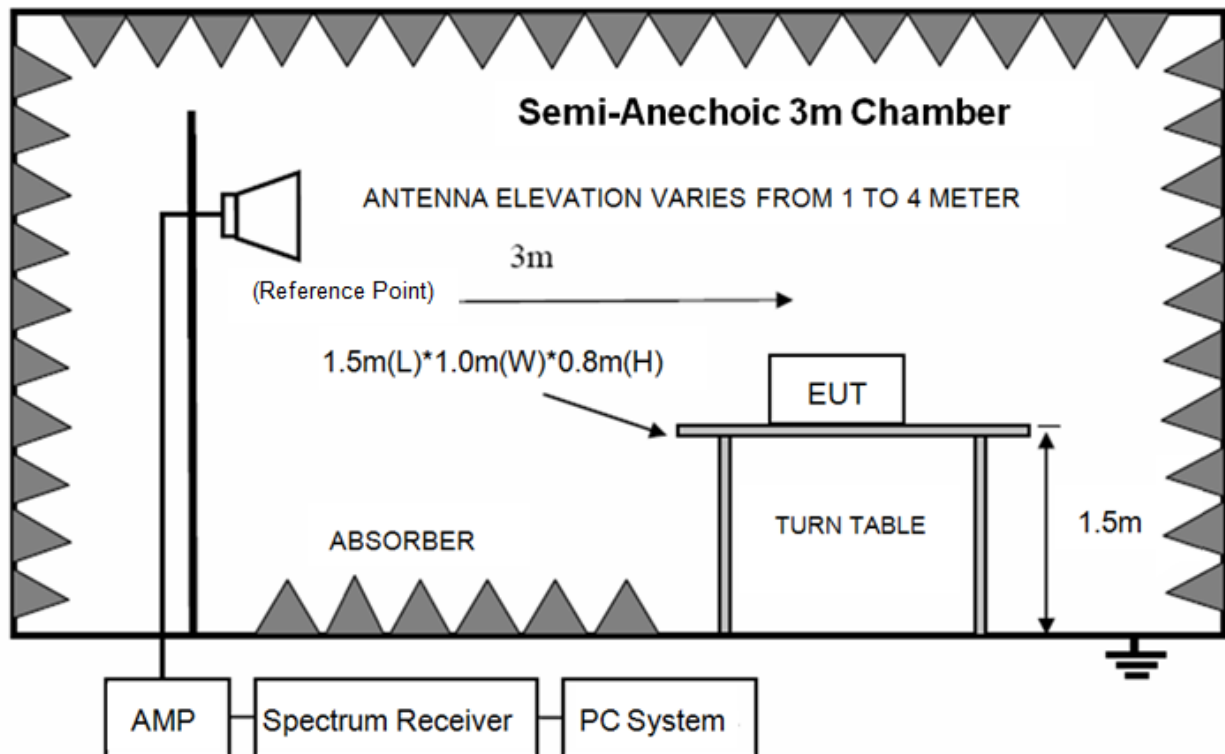

10.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

10.3. Test procedure

Same with clause 8.3 except change investigated frequency range.

Remark: All restriction band have been tested, and shown in report.

10.4. Test result

Pass. (See below detailed test result)

Note: All modes were test and the worst case was record in this report.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2412MHz

Data: 13

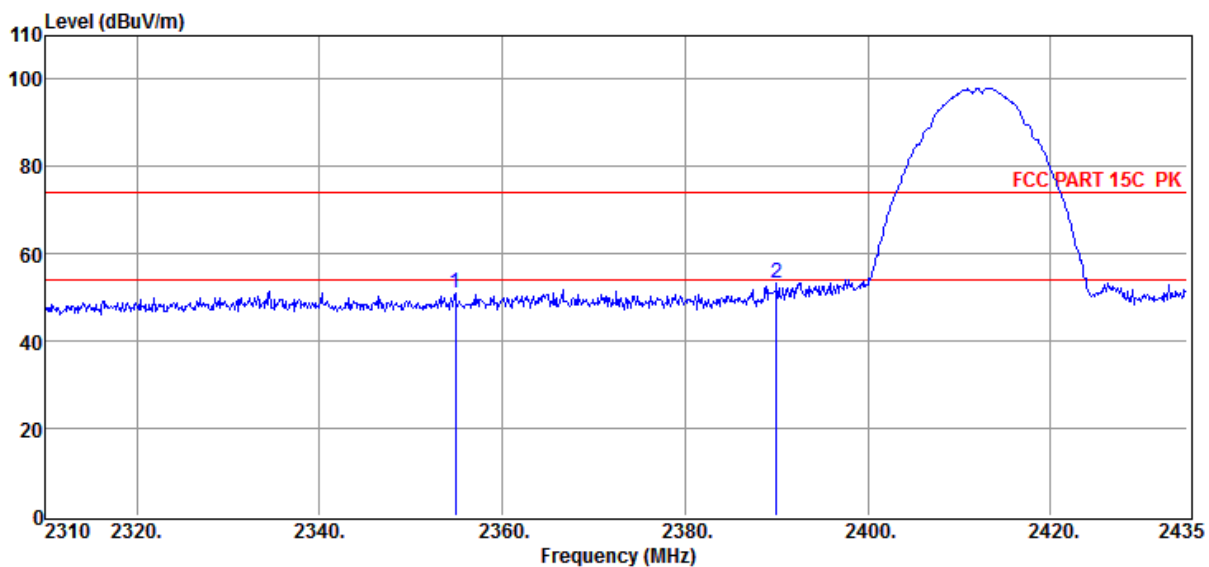

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2354.88	47.65	34.65	-31.45	50.85	74.00	-23.15	Peak	VERTICAL
2	2390.00	49.83	35.00	-31.70	53.13	74.00	-20.87	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2412MHz

Data: 14

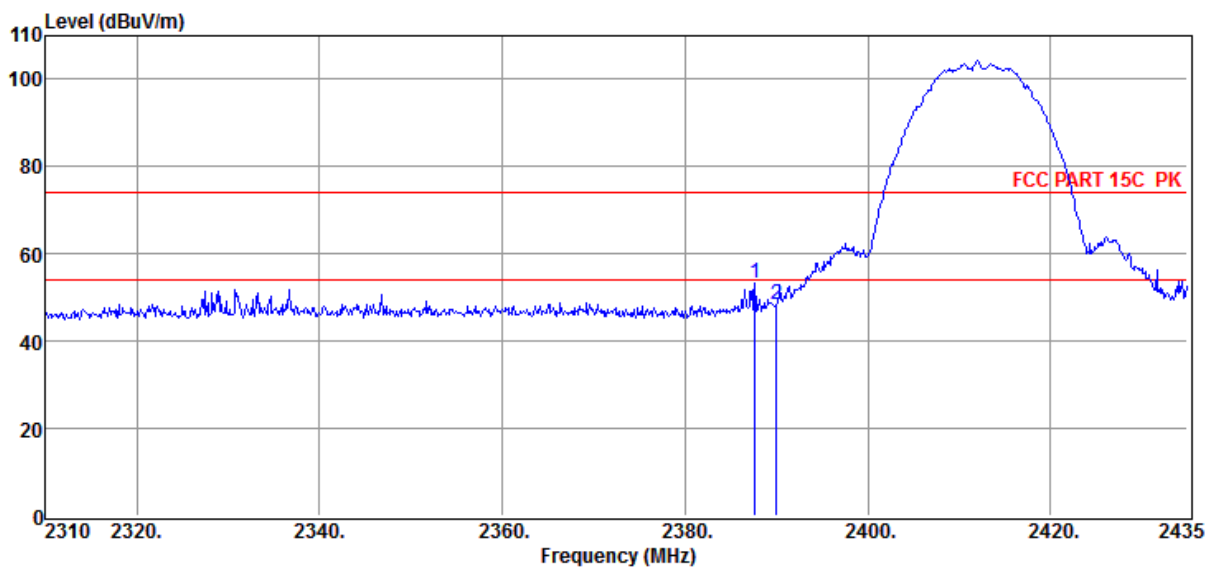

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.63	50.00	34.98	-31.68	53.30	74.00	-20.70	Peak	HORIZONTAL
2	2390.00	45.06	35.00	-31.70	48.36	74.00	-25.64	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT2 1M 2412MHz

Data: 15

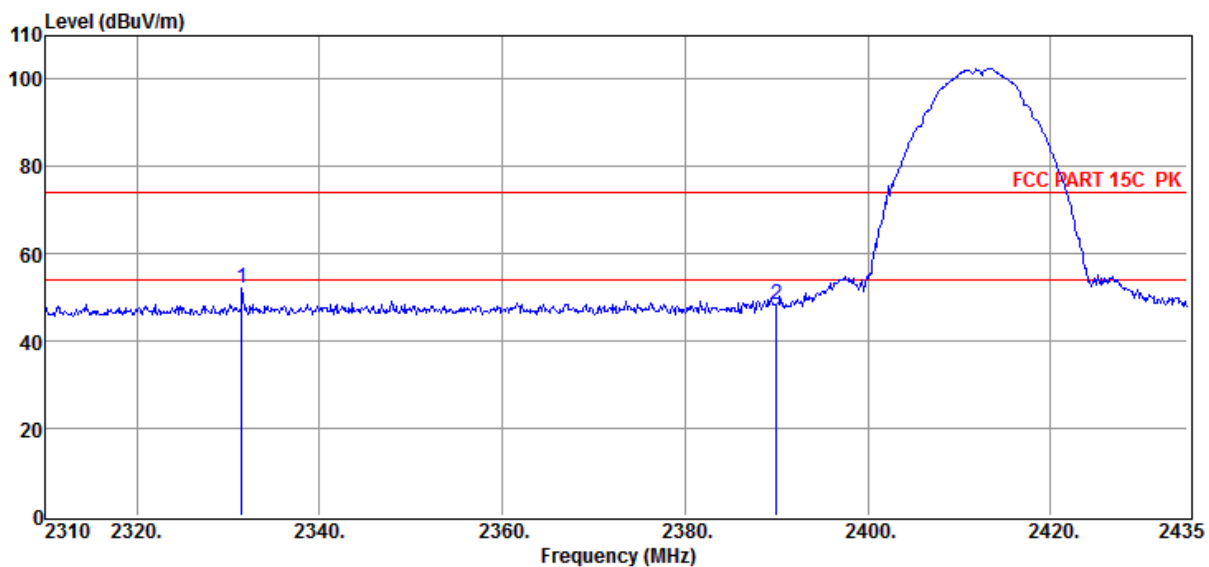

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2331.50	49.48	34.34	-31.63	52.19	74.00	-21.81	Peak	HORIZONTAL
2	2390.00	45.10	35.00	-31.70	48.40	74.00	-25.60	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT2 1M 2412MHz

Data: 16

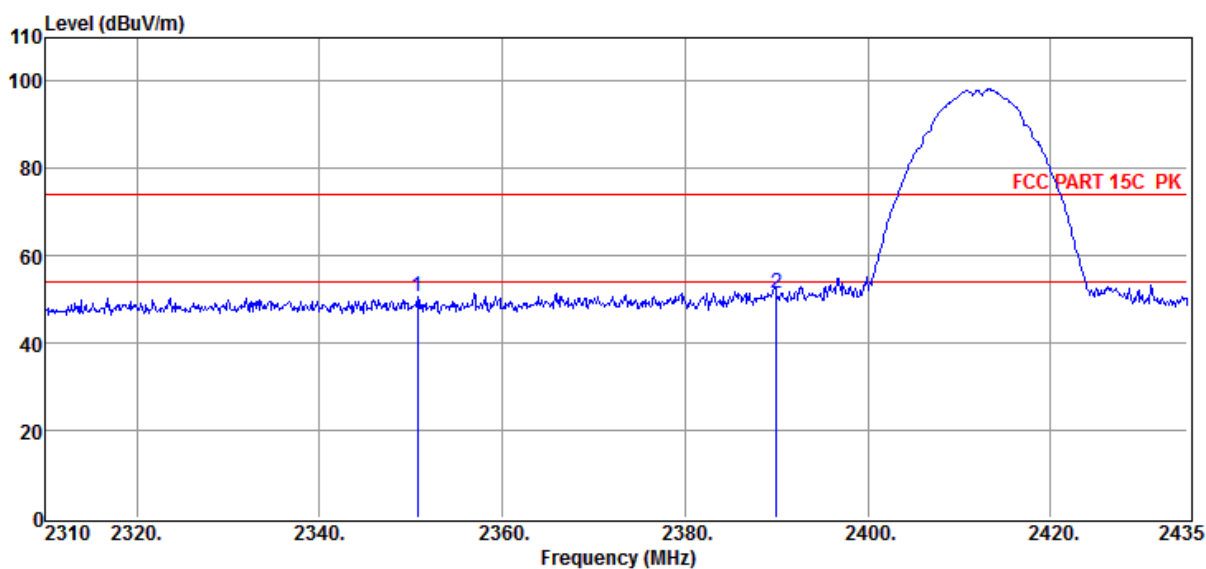

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2350.75	47.47	34.61	-31.42	50.66	74.00	-23.34	Peak	VERTICAL
2	2390.00	48.01	35.00	-31.70	51.31	74.00	-22.69	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2462MHz

Data: 17

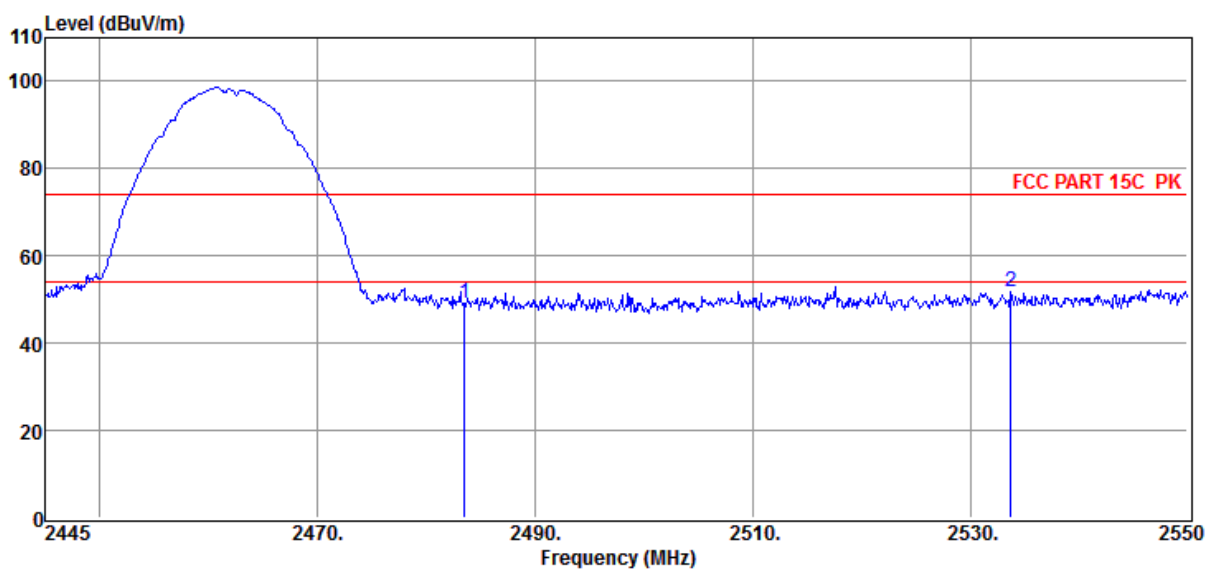

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.54	45.54	35.10	-31.58	49.06	74.00	-24.94	Peak	VERTICAL
2	2533.73	47.37	35.74	-31.32	51.79	74.00	-22.21	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT2 1M 2462MHz

Data: 18

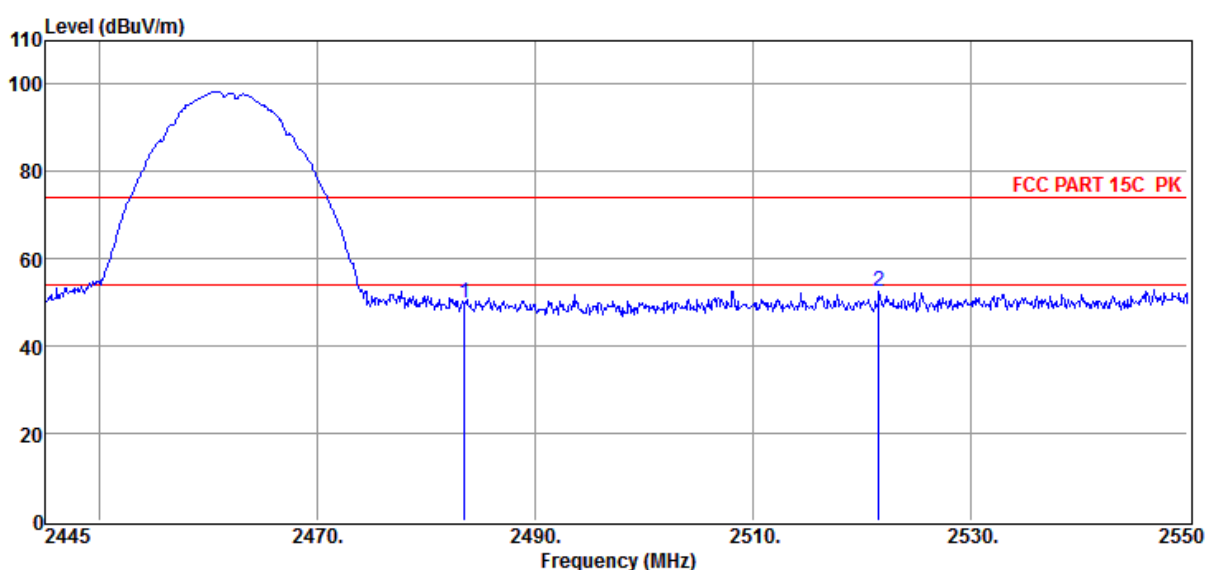

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.54	46.22	35.10	-31.58	49.74	74.00	-24.26	Peak	VERTICAL
2	2521.65	48.43	35.55	-31.41	52.57	74.00	-21.43	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT2 1M 2462MHz

Data: 19

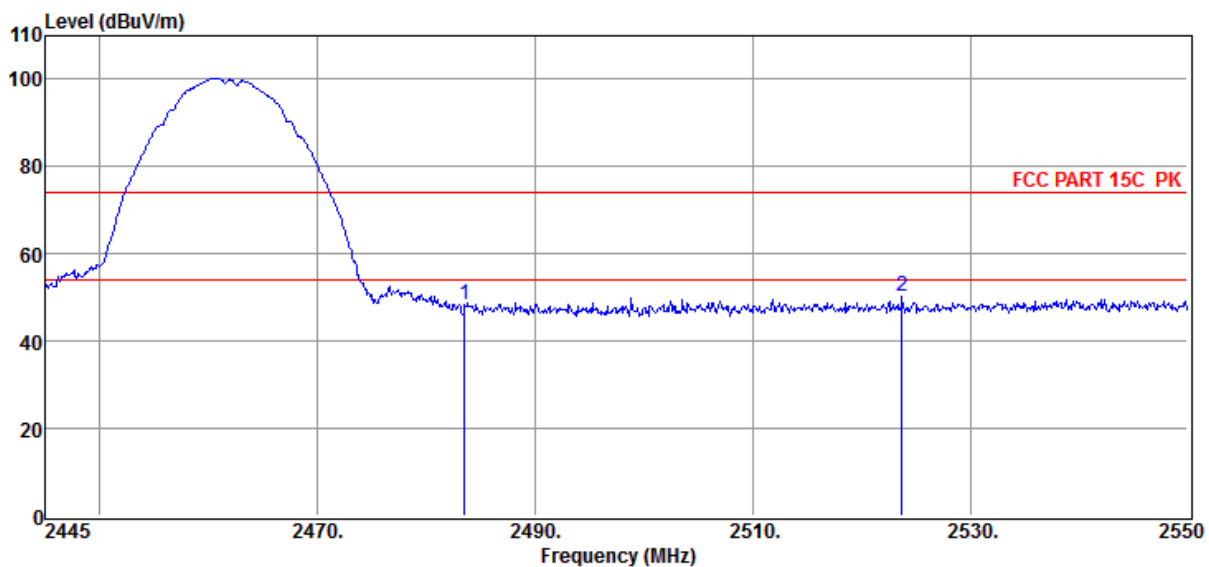

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.54	44.70	35.10	-31.58	48.22	74.00	-25.78	Peak	HORIZONTAL
2	2523.75	45.93	35.58	-31.39	50.12	74.00	-23.88	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11B ANT1 1M 2462MHz

Data: 20

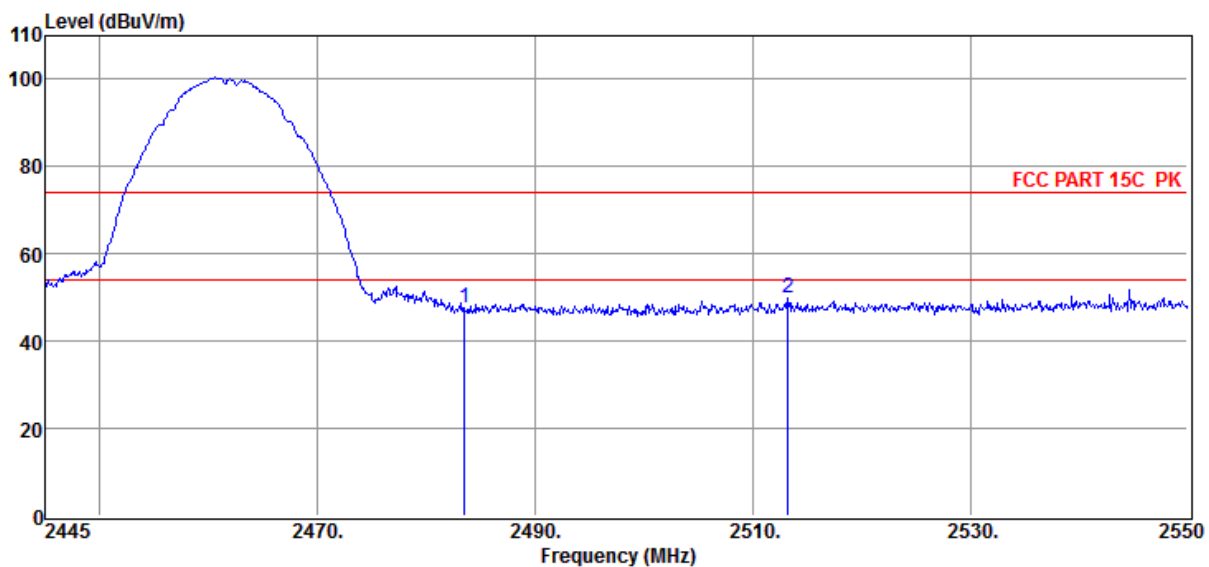

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.54	43.96	35.10	-31.58	47.48	74.00	-26.52	Peak	HORIZONTAL
2	2513.25	45.98	35.41	-31.47	49.92	74.00	-24.08	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT1 6M 2412MHz

Data: 21

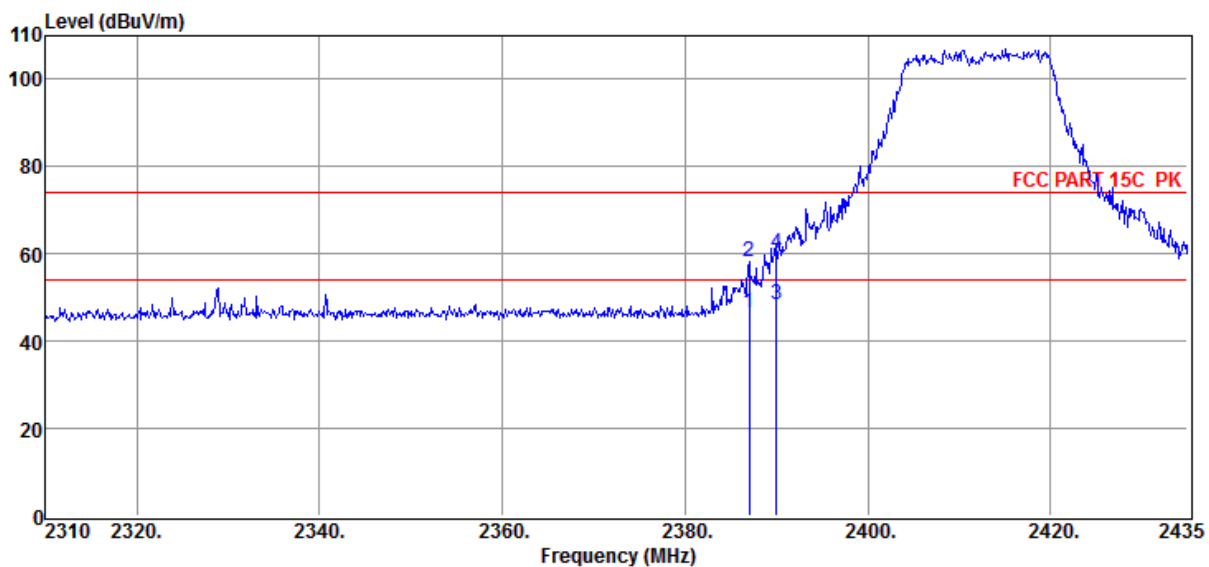

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.00	43.33	34.97	-31.68	46.62	54.00	-7.38	Average	HORIZONTAL
2	2387.00	54.87	34.97	-31.68	58.16	74.00	-15.84	Peak	HORIZONTAL
3	2390.00	45.26	35.00	-31.70	48.56	54.00	-5.44	Average	HORIZONTAL
4	2390.00	56.85	35.00	-31.70	60.15	74.00	-13.85	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT1 6M 2412MHz

Data: 22

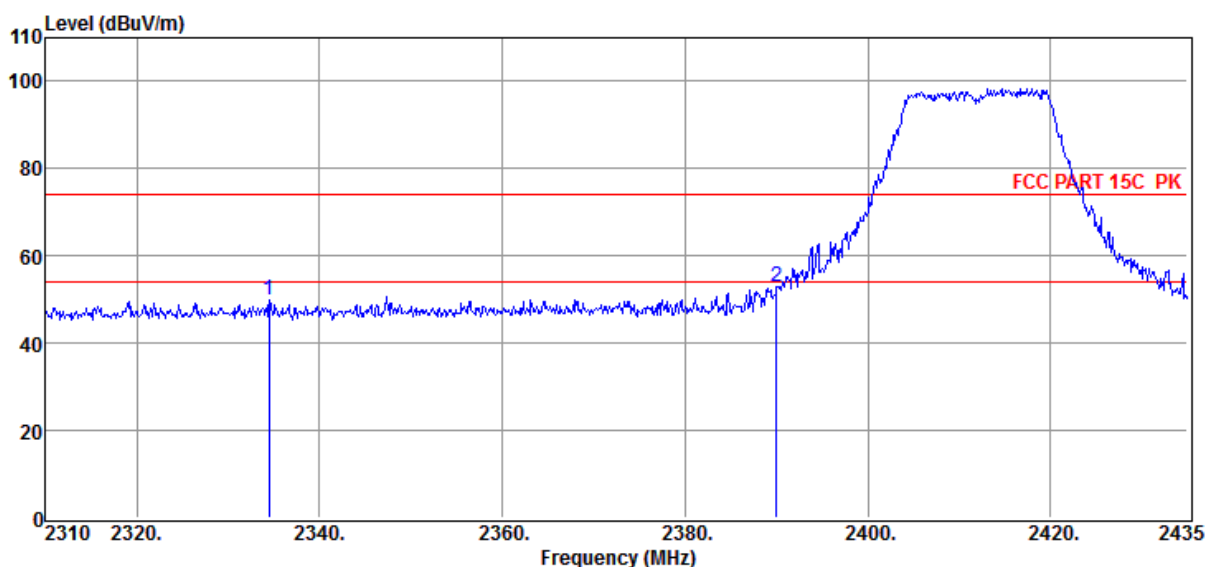

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2334.50	47.14	34.38	-31.59	49.93	74.00	-24.07	Peak	VERTICAL
2	2390.00	49.53	35.00	-31.70	52.83	74.00	-21.17	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2412MHz

Data: 23

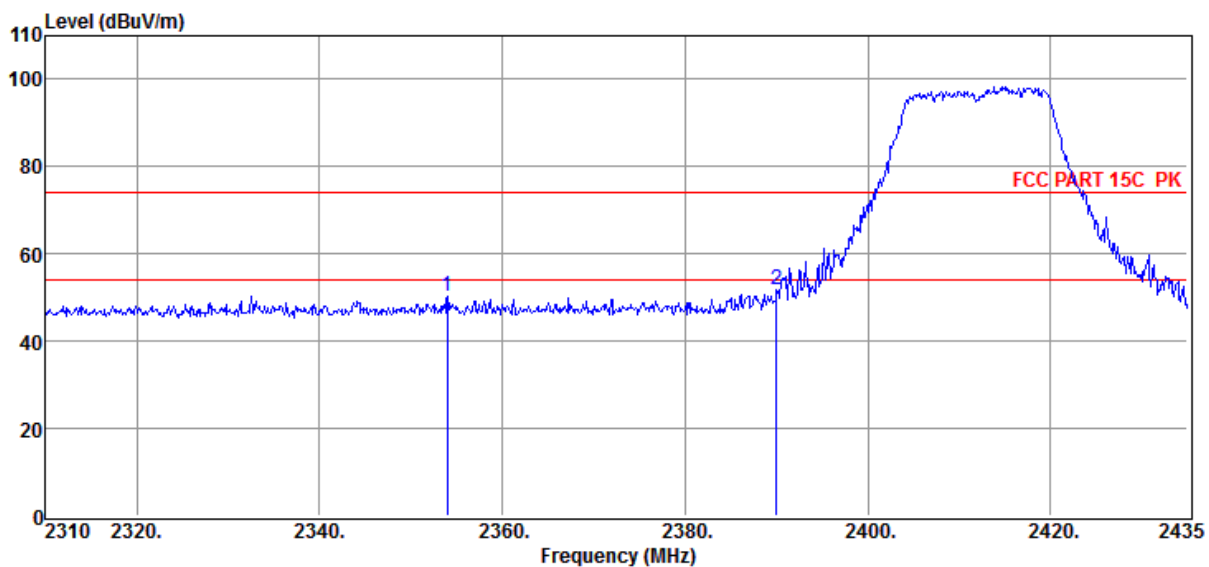

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2354.00	46.97	34.64	-31.44	50.17	74.00	-23.83	Peak	VERTICAL
2	2390.00	48.50	35.00	-31.70	51.80	74.00	-22.20	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2412MHz

Data: 24

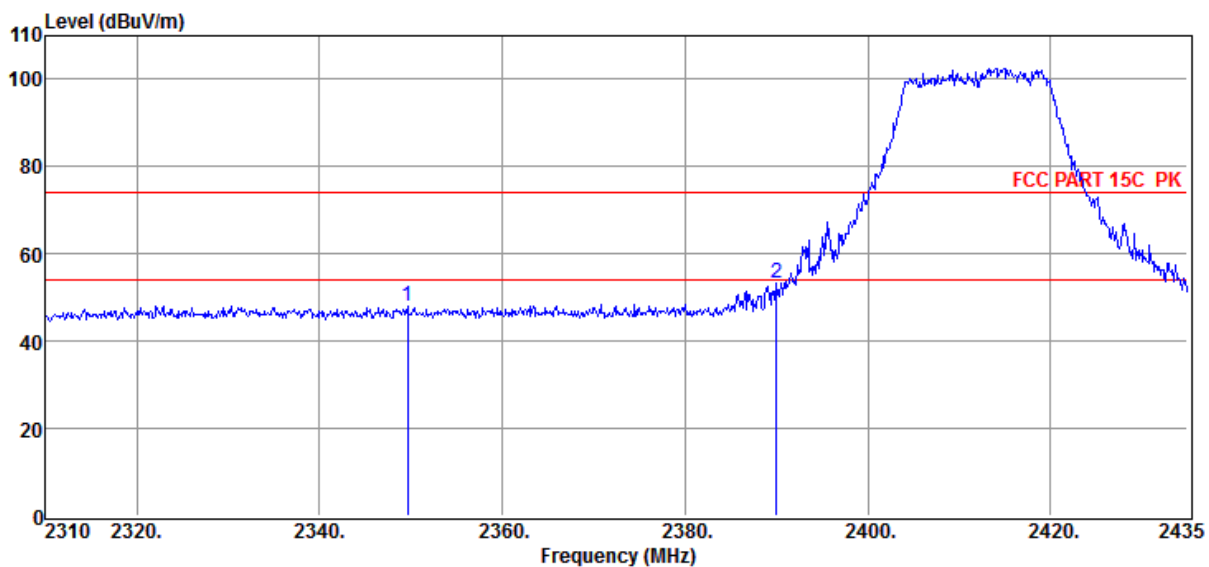

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2349.63	44.89	34.59	-31.41	48.07	74.00	-25.93	Peak	HORIZONTAL
2	2390.00	49.99	35.00	-31.70	53.29	74.00	-20.71	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT1 6M 2462MHz

Data: 25

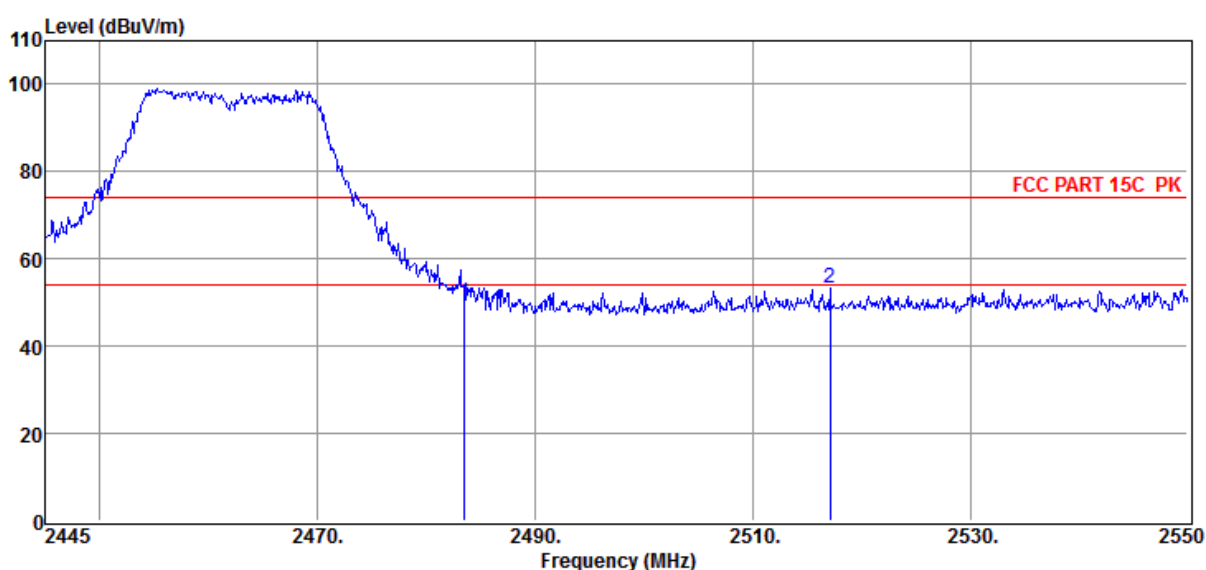

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	46.57	35.10	-31.58	50.09	74.00	-23.91	Peak	VERTICAL
2	2517.14	49.21	35.47	-31.44	53.24	74.00	-20.76	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT1 6M 2462MHz

Data: 26

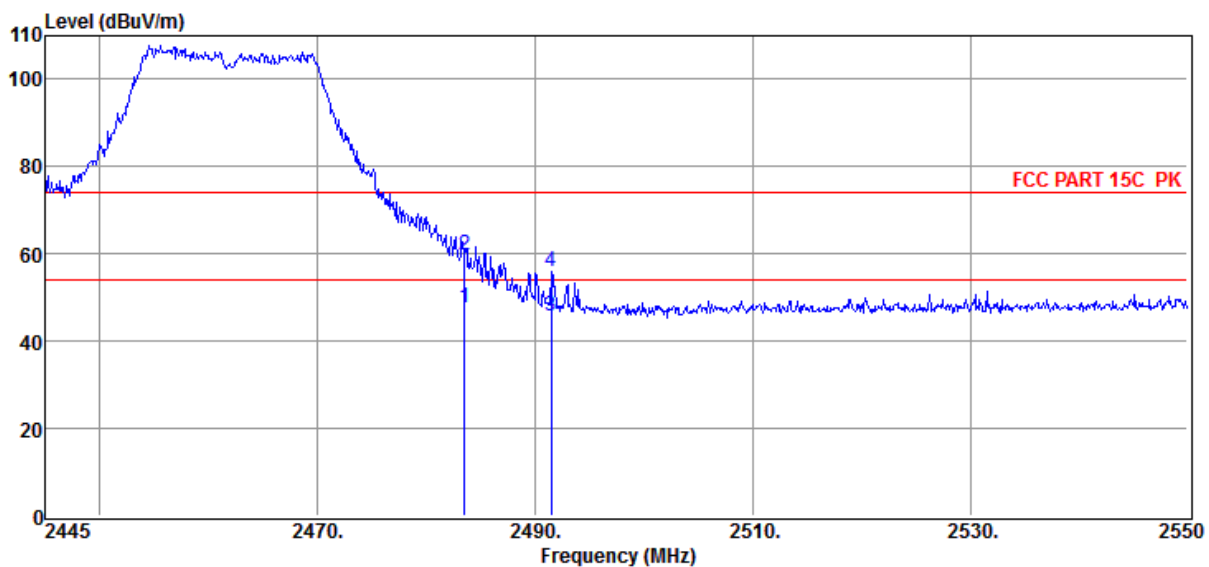

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	43.92	35.10	-31.58	47.44	54.00	-6.56	Average	HORIZONTAL
2	2483.50	56.38	35.10	-31.58	59.90	74.00	-14.10	Peak	HORIZONTAL
3	2491.52	42.15	35.15	-31.57	45.73	54.00	-8.27	Average	HORIZONTAL
4	2491.52	52.45	35.15	-31.57	56.03	74.00	-17.97	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2462MHz

Data: 27

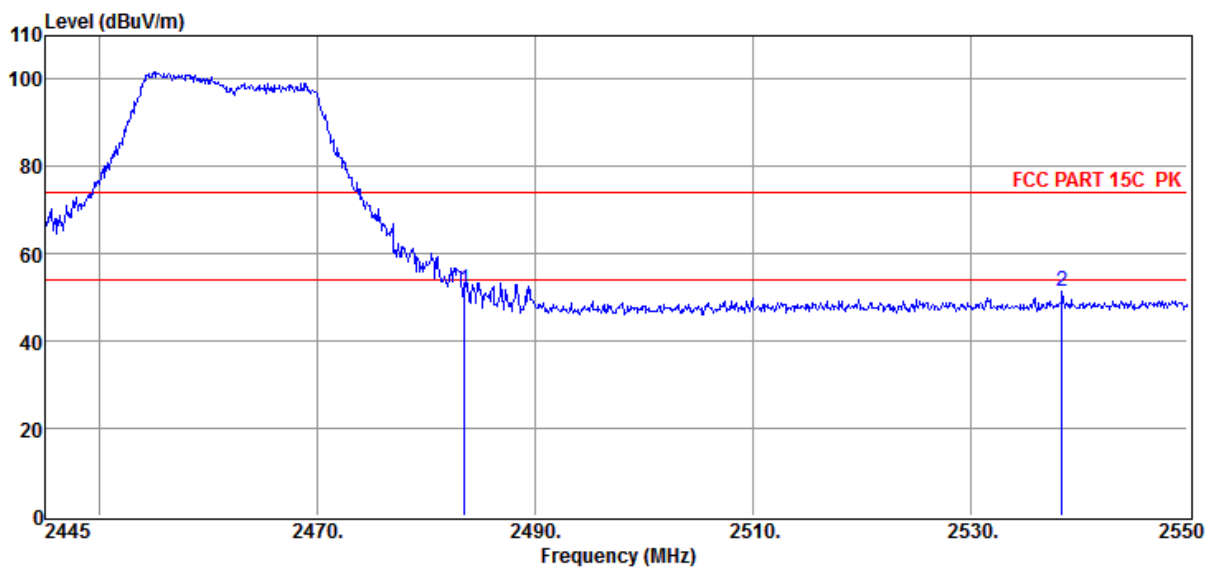

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	48.42	35.10	-31.58	51.94	74.00	-22.06	Peak	HORIZONTAL
2	2538.45	46.90	35.82	-31.29	51.43	74.00	-22.57	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11G ANT2 6M 2462MHz

Data: 28

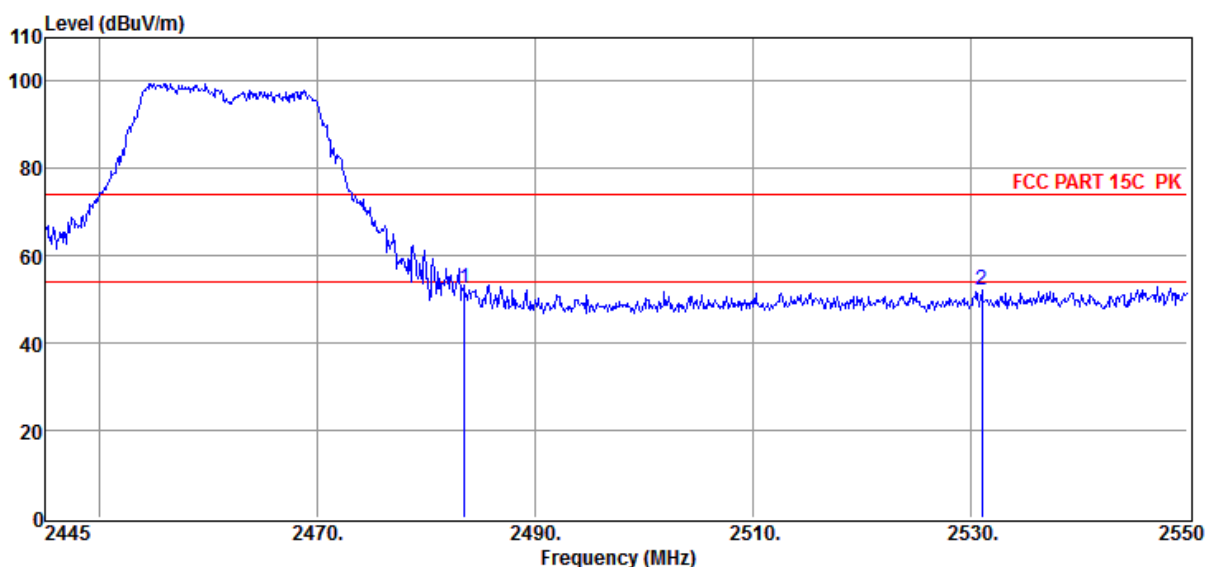

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	48.97	35.10	-31.58	52.49	74.00	-21.51	Peak	VERTICAL
2	2531.10	47.69	35.70	-31.34	52.05	74.00	-21.95	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N20 ANT1+ANT2 MCS0 2412MHz

Data: 29

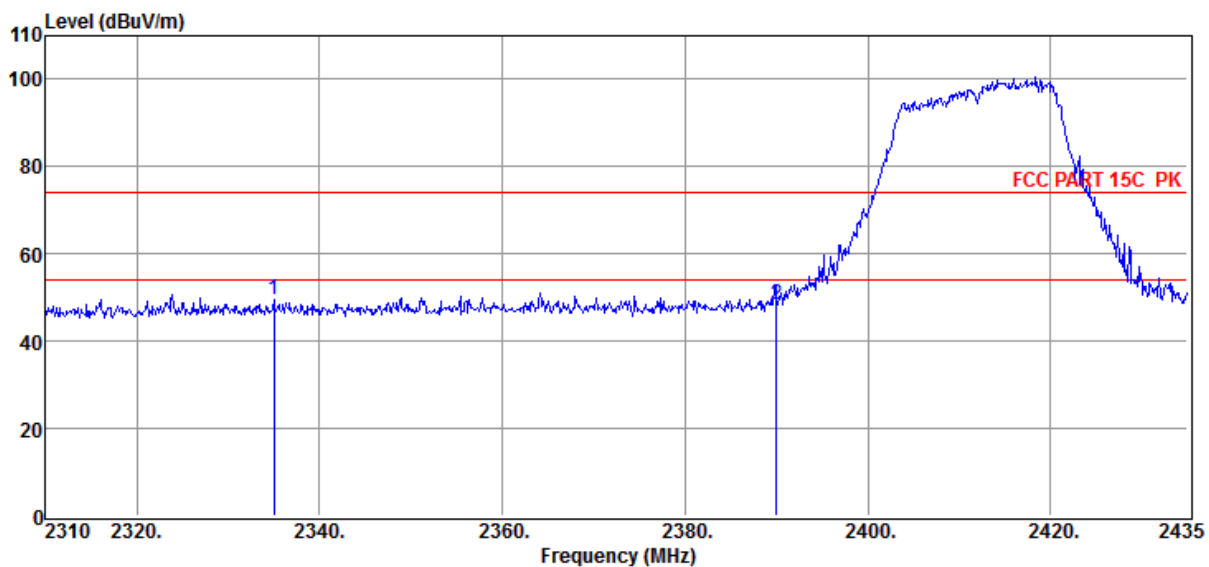

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2335.00	46.79	34.39	-31.59	49.59	74.00	-24.41	Peak	VERTICAL
2	2390.00	45.17	35.00	-31.70	48.47	74.00	-25.53	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N20 ANT1+ANT2 MCS0 2412MHz

Data: 30

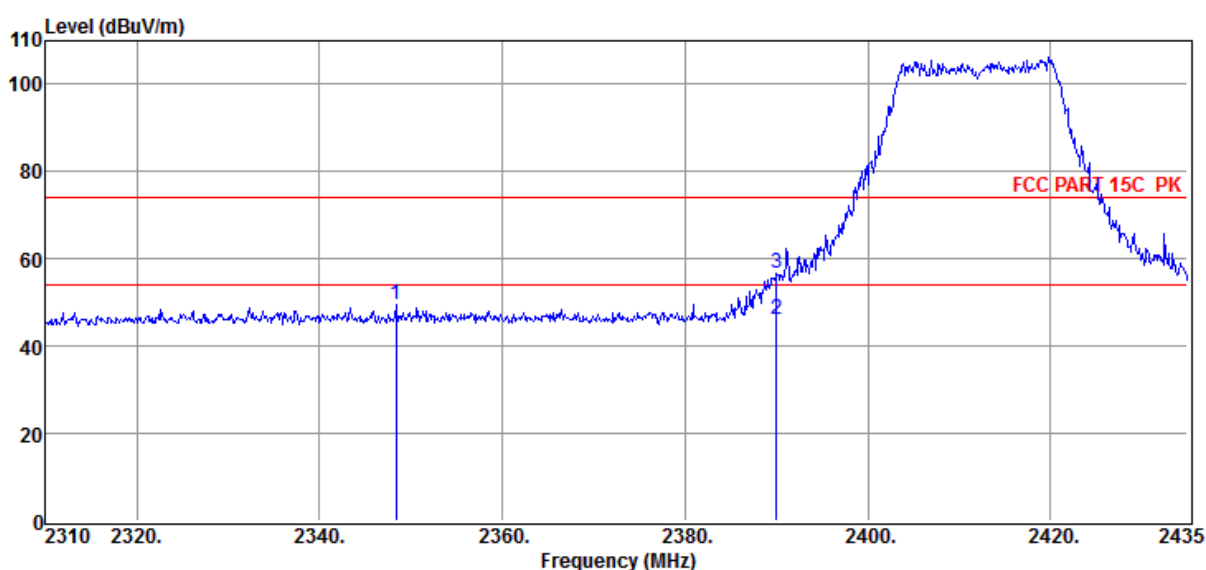

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2348.38	46.21	34.58	-31.43	49.36	74.00	-24.64	Peak	HORIZONTAL
2	2390.00	42.70	35.00	-31.70	46.00	54.00	-8.00	Average	HORIZONTAL
3	2390.00	53.36	35.00	-31.70	56.66	74.00	-17.34	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N20 ANT1+ANT2 MCS0 2462MHz

Data: 31

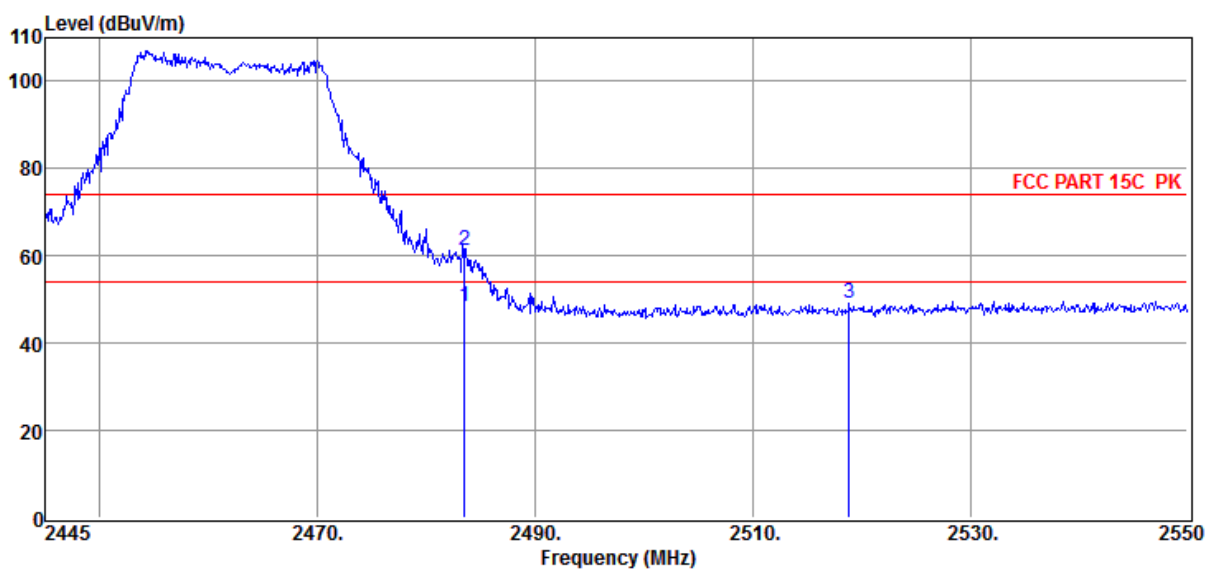

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	44.71	35.10	-31.58	48.23	54.00	-5.77	Average	HORIZONTAL
2	2483.50	57.53	35.10	-31.58	61.05	74.00	-12.95	Peak	HORIZONTAL
3	2518.92	45.12	35.50	-31.43	49.19	74.00	-24.81	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N20 ANT1+ANT2 MCS0 2462MHz

Data: 32

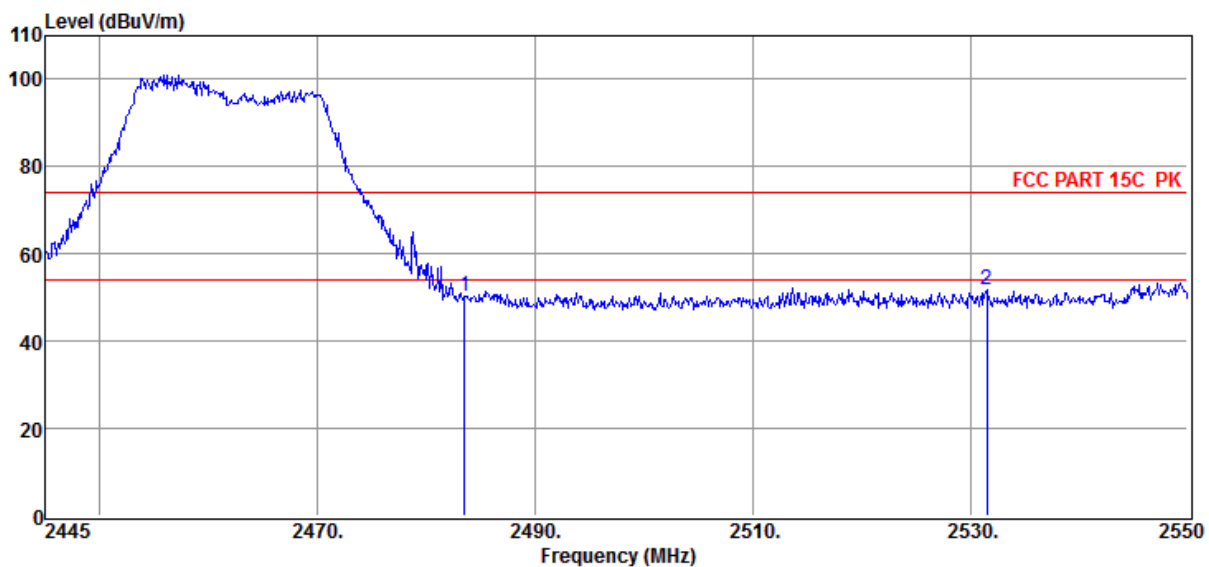

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	46.60	35.10	-31.58	50.12	74.00	-23.88	Peak	VERTICAL
2	2531.52	47.50	35.70	-31.34	51.86	74.00	-22.14	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N40 ANT1+ANT2 MCS0 2422MHz

Data: 33

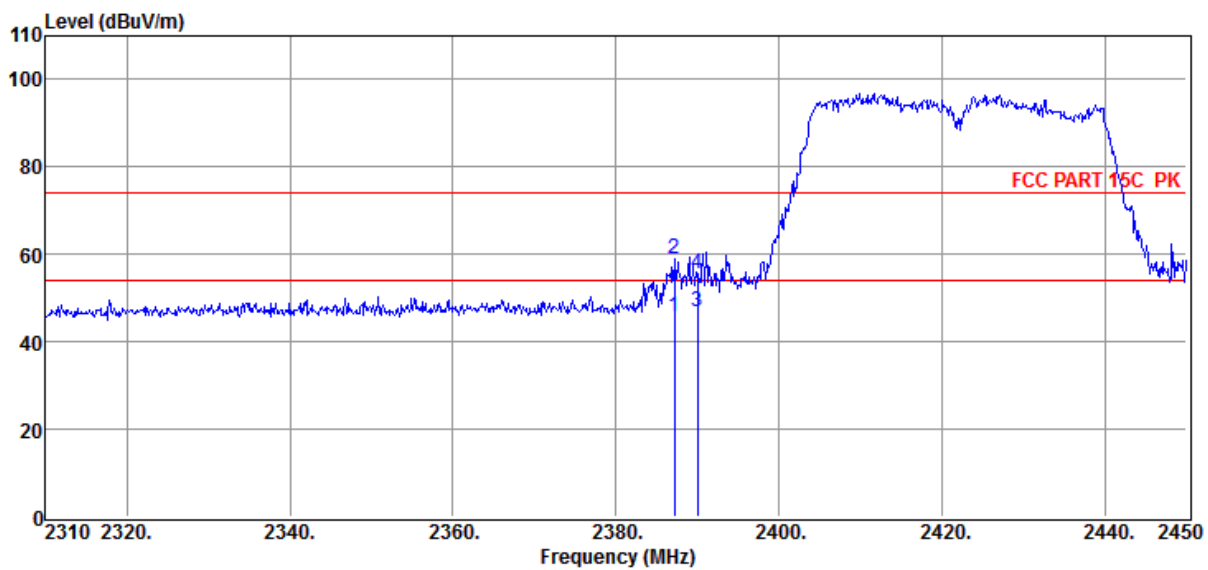

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.14	42.51	34.97	-31.68	45.80	54.00	-8.20	Average	VERTICAL
2	2387.14	55.61	34.97	-31.68	58.90	74.00	-15.10	Peak	VERTICAL
3	2390.00	43.68	35.00	-31.70	46.98	54.00	-7.02	Average	VERTICAL
4	2390.00	52.43	35.00	-31.70	55.73	74.00	-18.27	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N40 ANT1+ANT2 MCS0 2422MHz

Data: 34

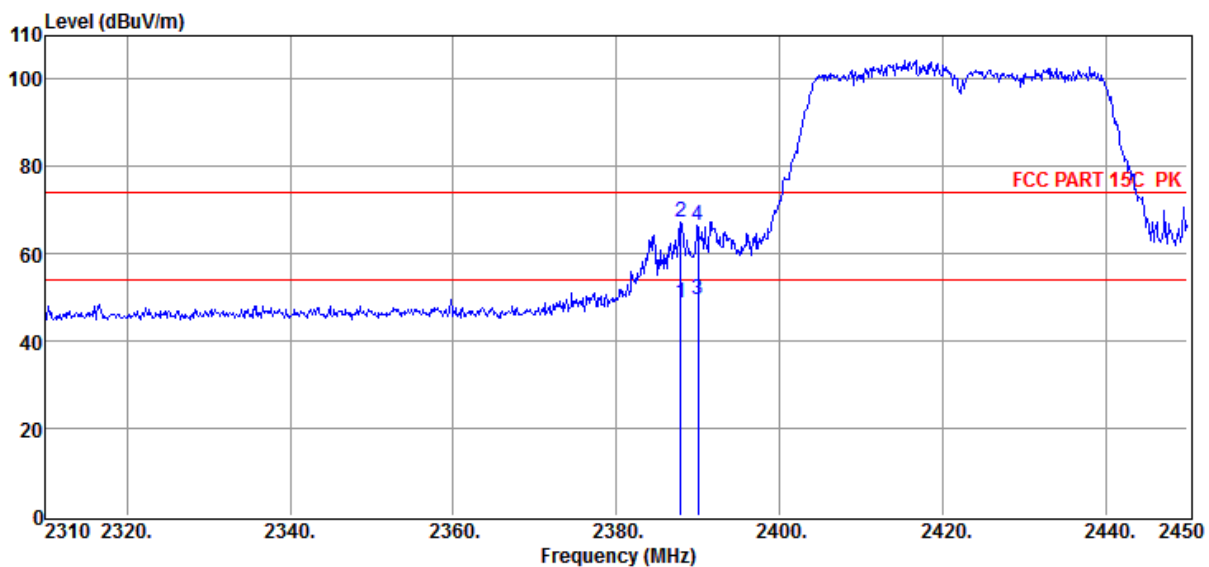

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.84	45.28	34.98	-31.68	48.58	54.00	-5.42	Average	HORIZONTAL
2	2387.84	64.11	34.98	-31.68	67.41	74.00	-6.59	Peak	HORIZONTAL
3	2390.00	46.39	35.00	-31.70	49.69	54.00	-4.31	Average	HORIZONTAL
4	2390.00	63.18	35.00	-31.70	66.48	74.00	-7.52	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N40 ANT1+ANT2 MCS0 2452MHz

Data: 35

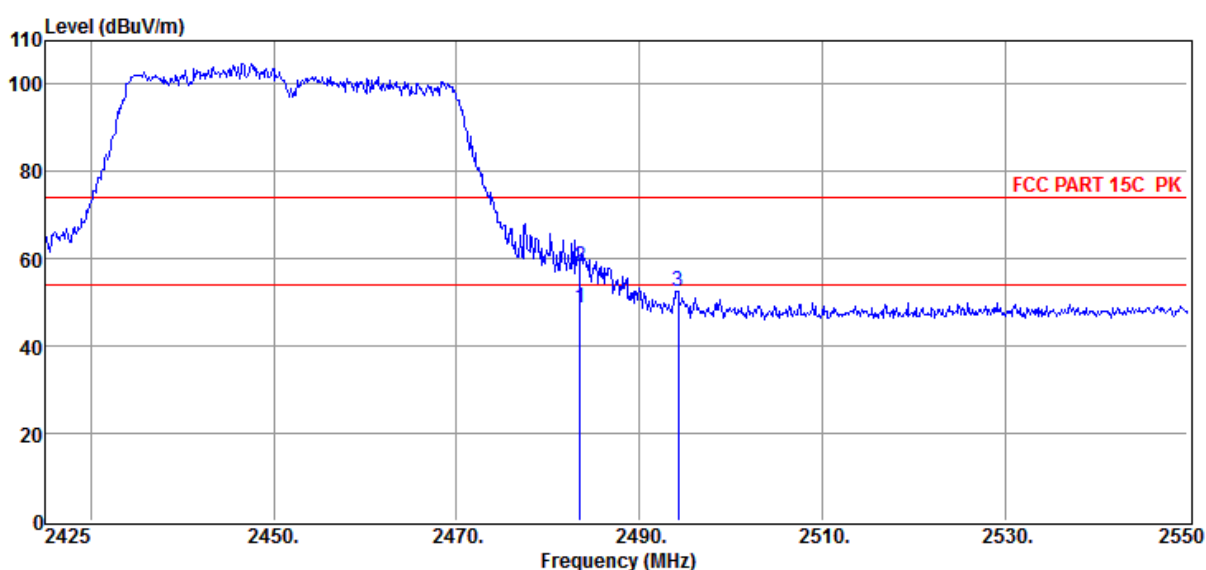

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	45.36	35.10	-31.58	48.88	54.00	-5.12	Average	HORIZONTAL
2	2483.50	54.71	35.10	-31.58	58.23	74.00	-15.77	Peak	HORIZONTAL
3	2494.25	48.93	35.17	-31.57	52.53	74.00	-21.47	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-24-2023

Tested By : Sunny

EUT : AI Delivery Robot


Model Number : OS-R-DR02

Power Supply : Battery

Test Mode : Tx mode

Memo : 11N40 ANT1+ANT2 MCS0 2452MHz

Data: 36

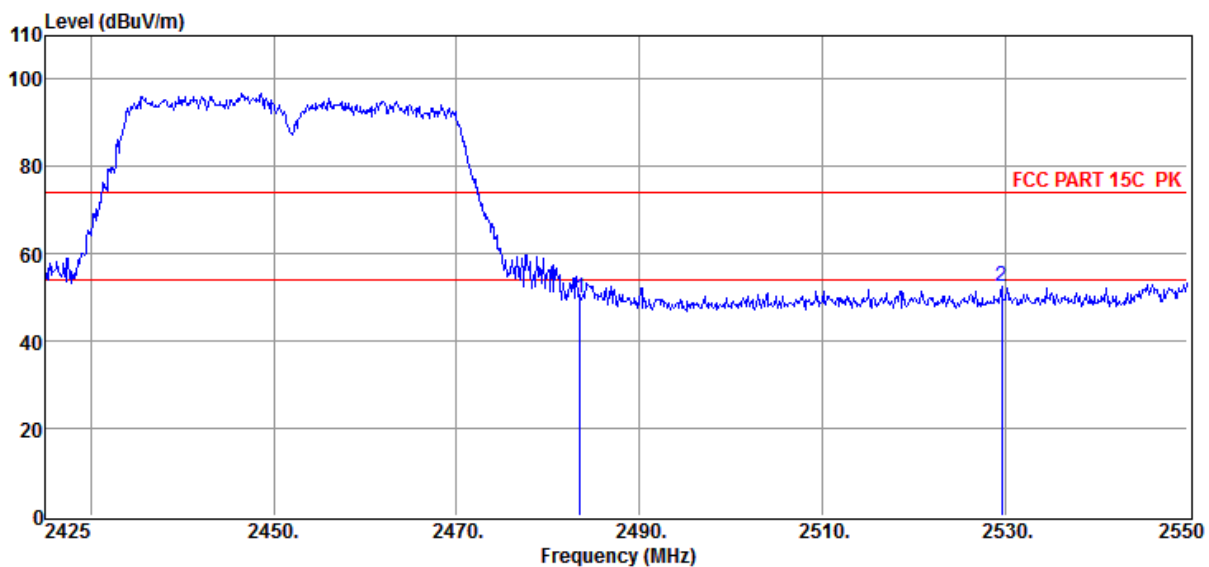

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	46.49	35.10	-31.58	50.01	74.00	-23.99	Peak	VERTICAL
2	2529.63	48.04	35.67	-31.35	52.36	74.00	-21.64	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

11. Power Line Conducted Emission

11.1. Block diagram of test setup

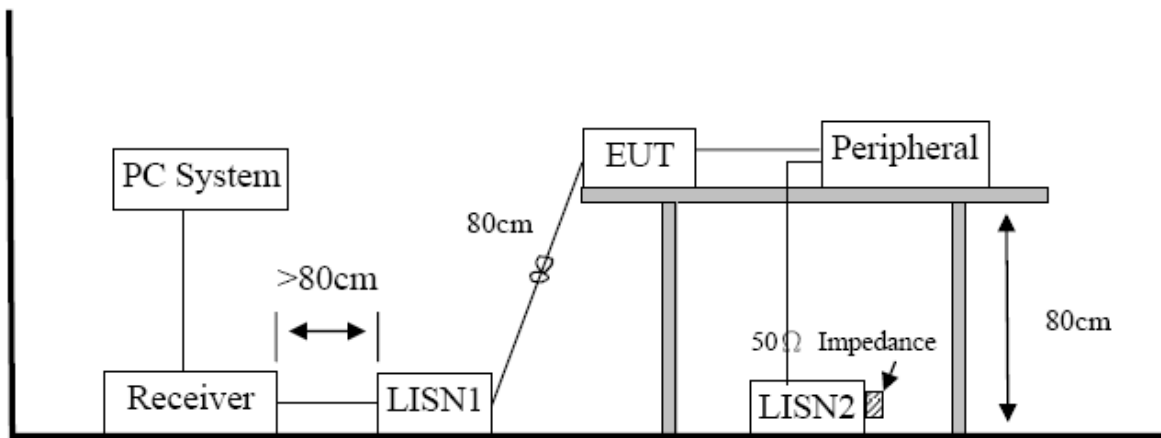

11.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.


11.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: Pre-test AC conducted emission at all mode, only the worst case was recorded in this report.

Test Data:

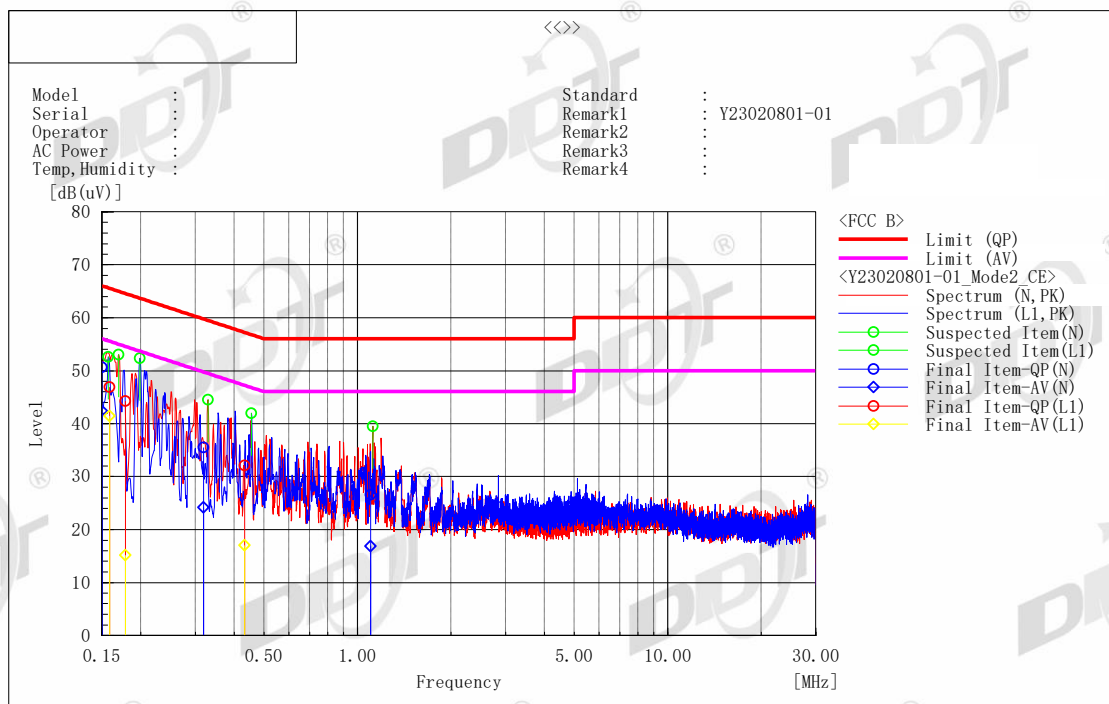

Final Result

--- N Phase ---											
No.	Frequency	Reading QP	Reading CAV	c. f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV	Remark
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]	
1	0.1502	40.9	32.7	9.7	50.6	42.4	66.0	56.0	15.4	13.6	
2	0.31847	25.8	14.5	9.7	35.5	24.2	59.7	49.7	24.2	25.5	
3	1.10251	16.8	7.2	9.7	26.5	16.9	56.0	46.0	29.5	29.1	

--- L1 Phase ---											
No.	Frequency	Reading QP	Reading CAV	c. f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV	Remark
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]	
1	0.17838	34.5	5.3	9.8	44.3	15.1	64.6	54.6	20.3	39.5	
2	0.43215	22.3	7.3	9.8	32.1	17.1	57.2	47.2	25.1	30.1	
3	0.15906	37.1	31.6	9.8	46.9	41.4	65.5	55.5	18.6	14.1	

Note1) Level (Quasi-Peak and/or C/Average) = Meter Reading + Factor

Note2) Line = Polarity of input power (Live or Neutral)

N : Abbreviation of Neutral Polarity, L1 : Abbreviation of Live Polarity,

Note3) Factor = LISN Insertion Loss + Cable Loss

Note4) Margin = Limit – Level (Quasi-Peak and/or C/Average)

Note5) C/Average : Abbreviation of CISPR Average

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Result

The device support 2T2R MIMO, the antennas both used for this product are dedicated FPC antennas and other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 3.77 dBi for antenna 1, 3.68 dBi for antenna 2.

13. Photos of the EUT

Please find the photos of EUT in APPENDIXES.

END OF REPORT