


## 5.2G WIFI

### Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5180            | Ant1    | 94.42          | 0.25                   | 0.49      |
| NVNT      | a    | 5200            | Ant1    | 94.95          | 0.23                   | 0.49      |
| NVNT      | a    | 5240            | Ant1    | 92.54          | 0.34                   | 0.49      |
| NVNT      | n20  | 5180            | Ant1    | 92.52          | 0.34                   | 0.53      |
| NVNT      | n20  | 5200            | Ant1    | 92.38          | 0.34                   | 0.53      |
| NVNT      | n20  | 5240            | Ant1    | 91.46          | 0.39                   | 0.53      |
| NVNT      | n40  | 5190            | Ant1    | 89.43          | 0.49                   | 1.06      |
| NVNT      | n40  | 5230            | Ant1    | 87.53          | 0.58                   | 1.06      |
| NVNT      | ac20 | 5180            | Ant1    | 93.42          | 0.3                    | 0.52      |
| NVNT      | ac20 | 5200            | Ant1    | 91.89          | 0.37                   | 0.52      |
| NVNT      | ac20 | 5240            | Ant1    | 91.97          | 0.36                   | 0.53      |
| NVNT      | ac40 | 5190            | Ant1    | 88.64          | 0.52                   | 1.08      |
| NVNT      | ac40 | 5230            | Ant1    | 90.04          | 0.46                   | 1.08      |
| NVNT      | ax20 | 5180            | Ant1    | 92.38          | 0.34                   | 0.68      |
| NVNT      | ax20 | 5200            | Ant1    | 90.43          | 0.44                   | 0.68      |
| NVNT      | ax20 | 5240            | Ant1    | 91.05          | 0.41                   | 0.68      |
| NVNT      | ax40 | 5190            | Ant1    | 87.07          | 0.6                    | 1.32      |
| NVNT      | ax40 | 5230            | Ant1    | 85.87          | 0.66                   | 1.32      |

Test Graphs


Duty Cycle NVNT a 5180MHz Ant1

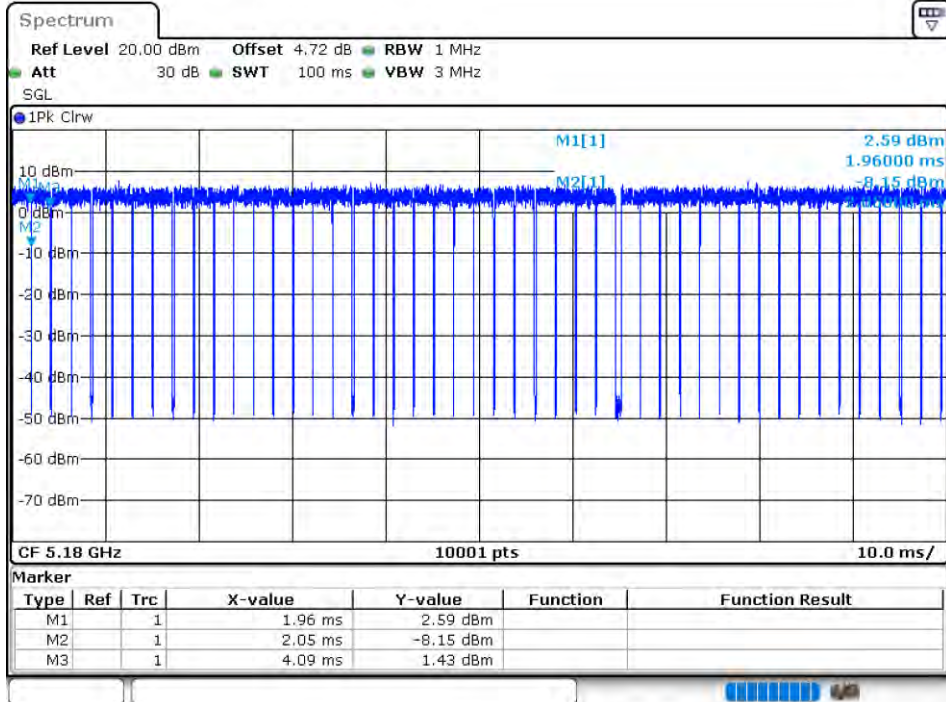


Duty Cycle NVNT a 5200MHz Ant1

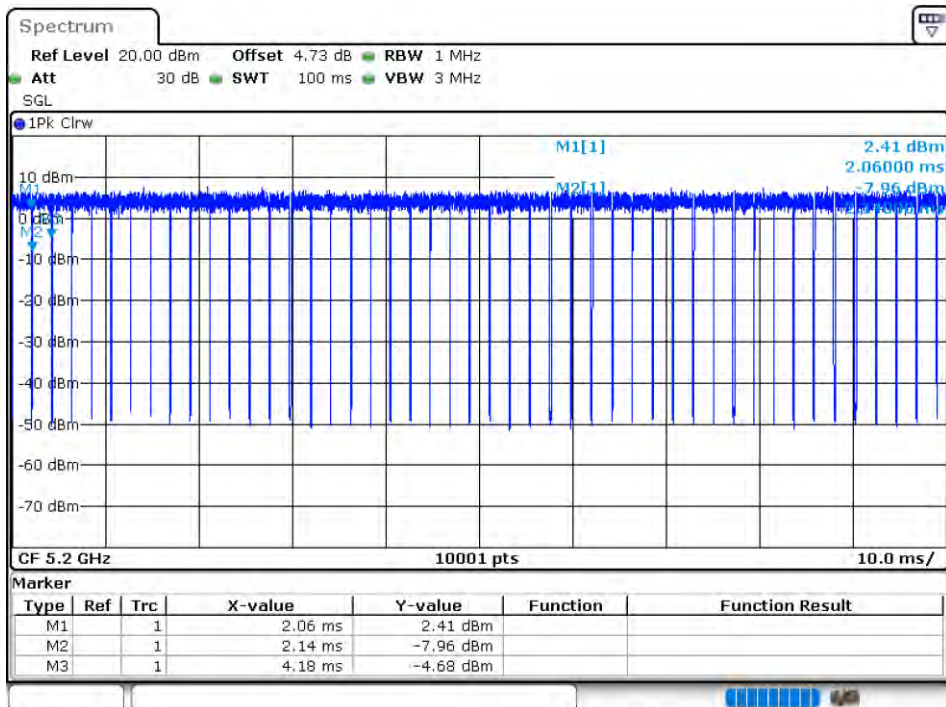


Duty Cycle NVNT a 5240MHz Ant1

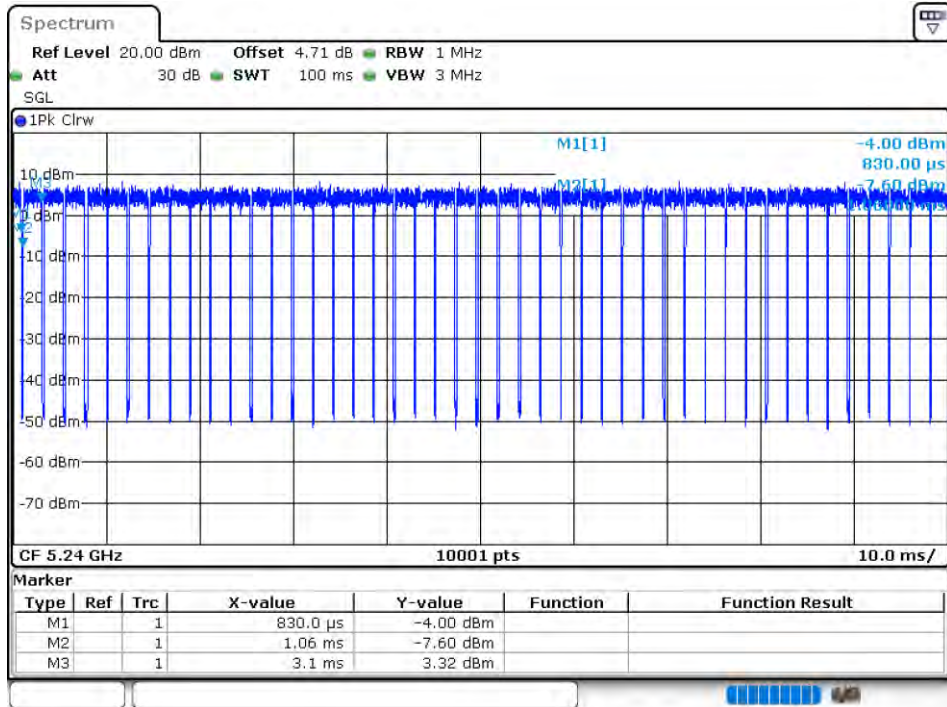


Duty Cycle NVNT n20 5180MHz Ant1

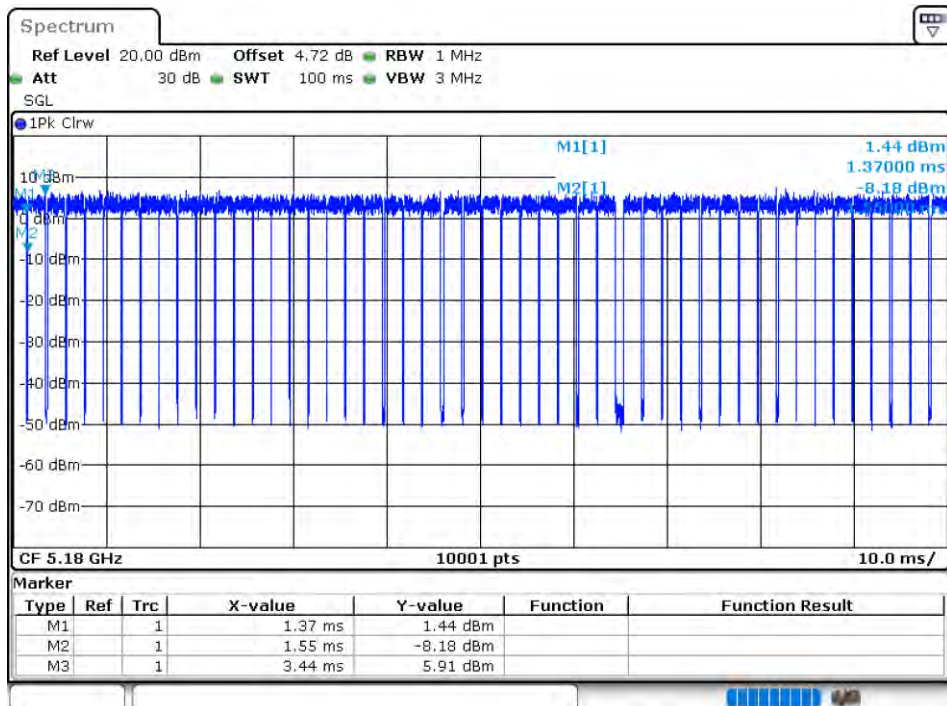


Duty Cycle NVNT n20 5200MHz Ant1

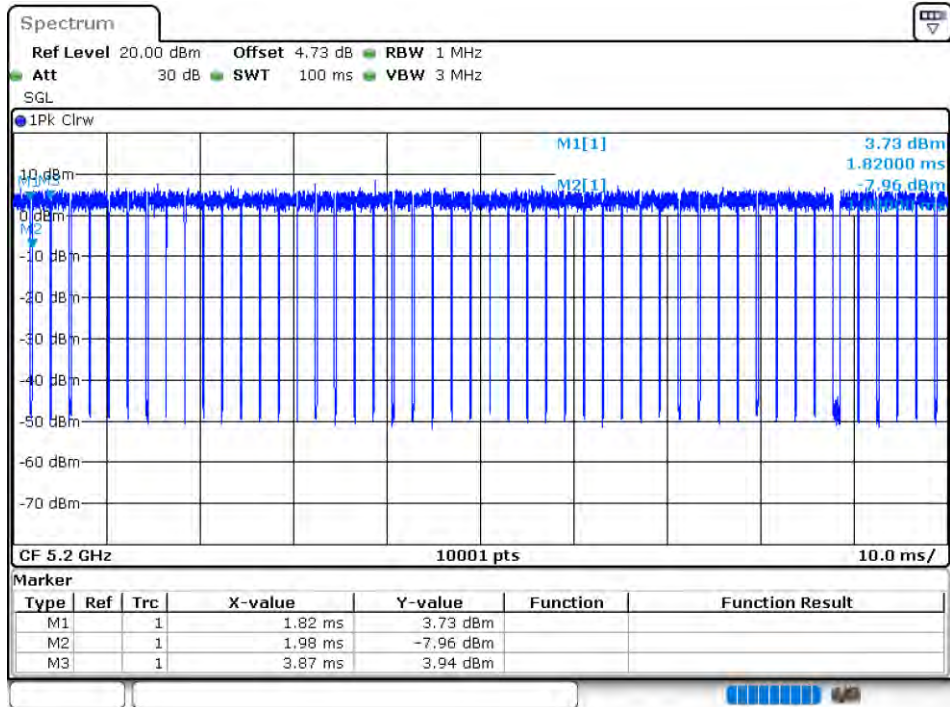


Duty Cycle NVNT n20 5240MHz Ant1

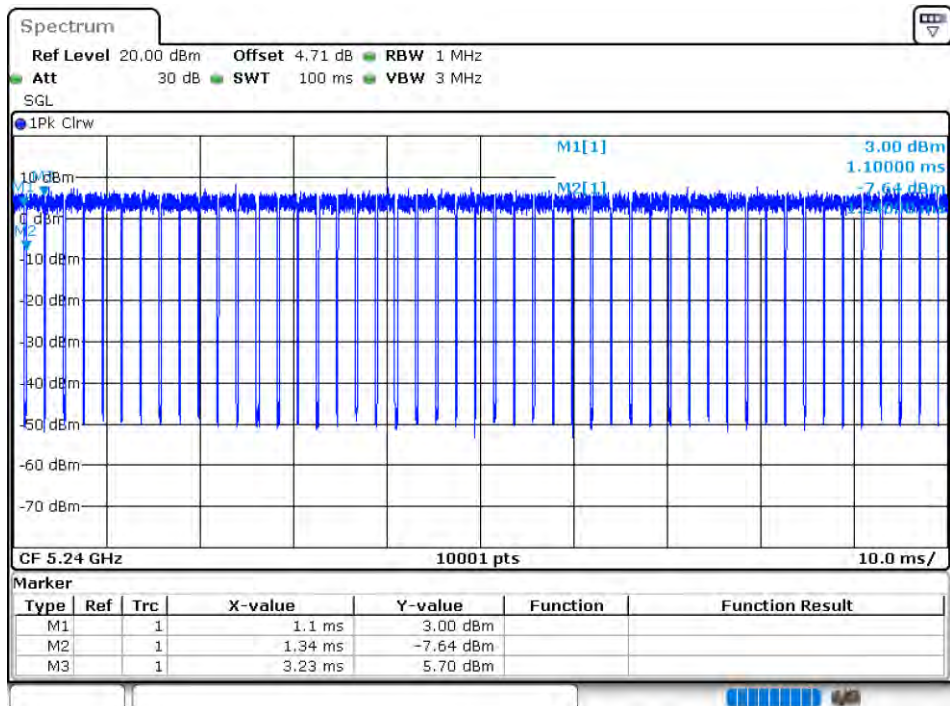


Duty Cycle NVNT n40 5190MHz Ant1

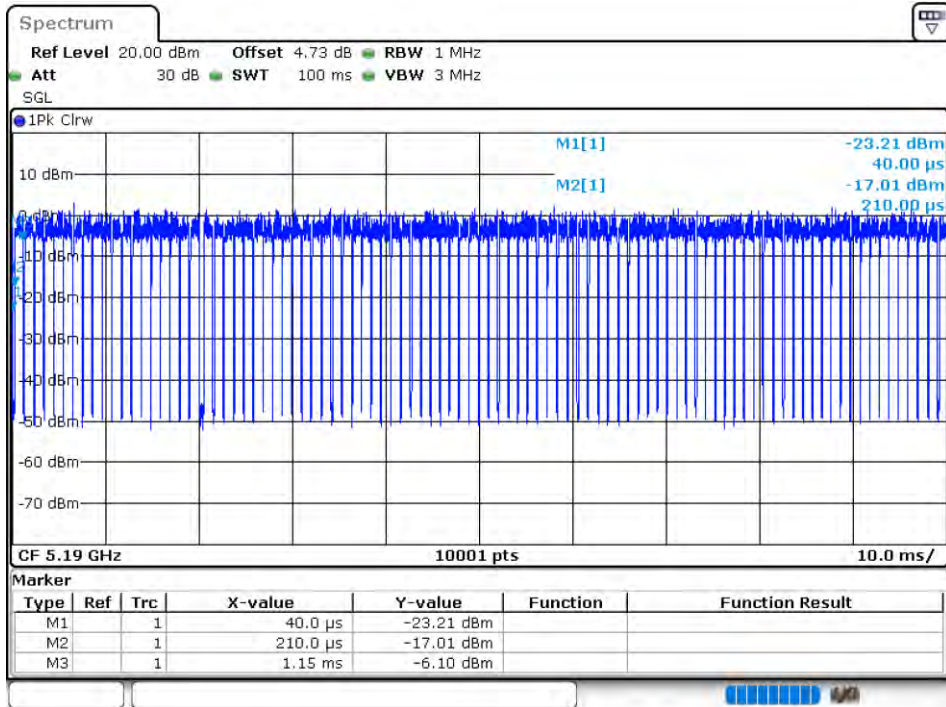


Duty Cycle NVNT n40 5230MHz Ant1

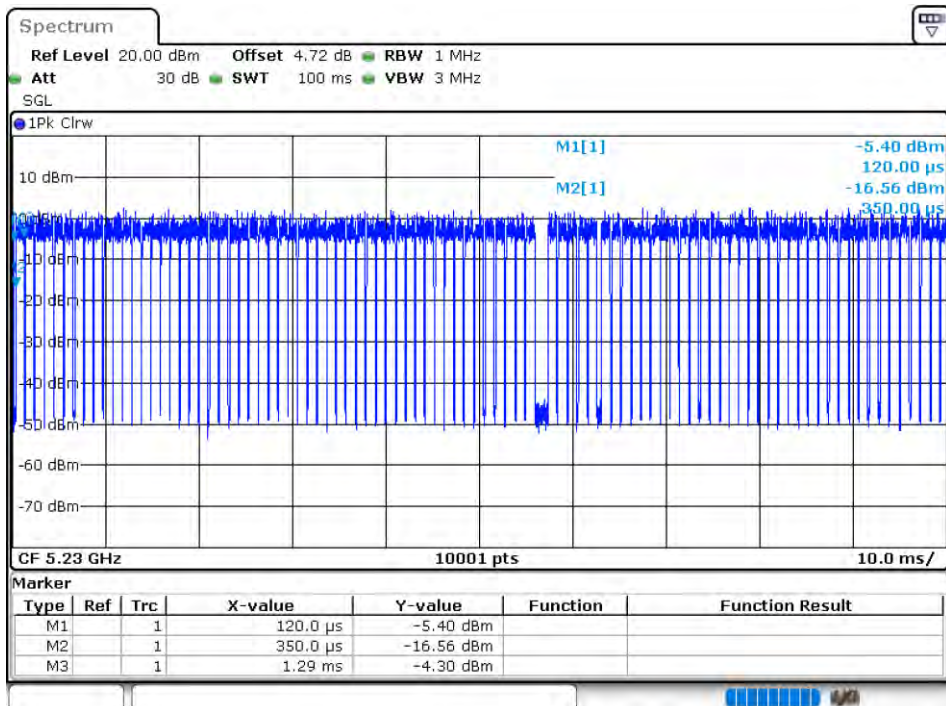


Duty Cycle NVNT ac20 5180MHz Ant1

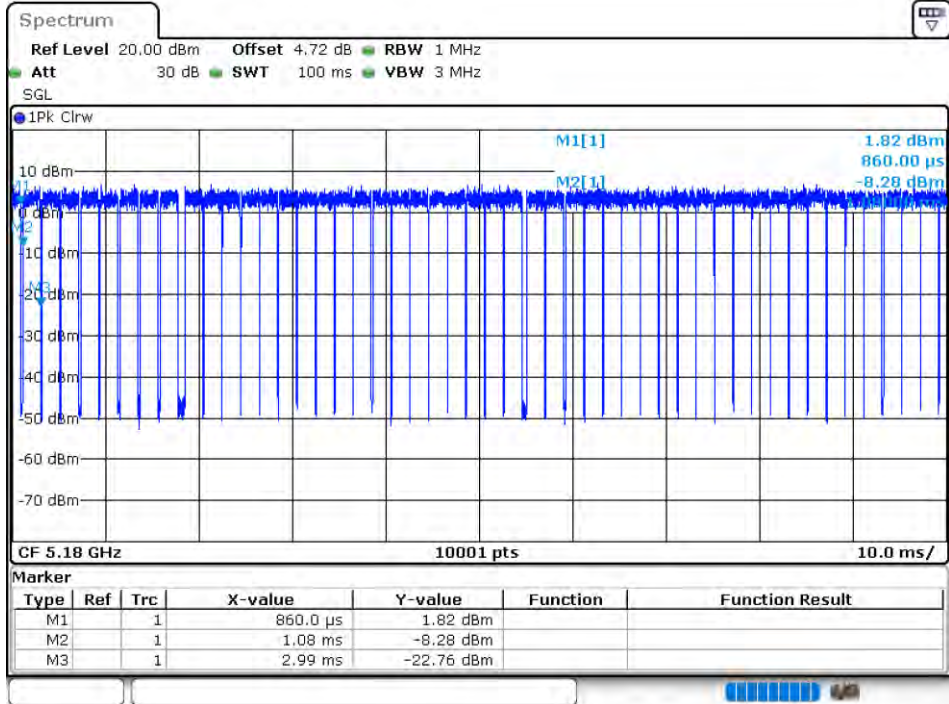


Duty Cycle NVNT ac20 5200MHz Ant1

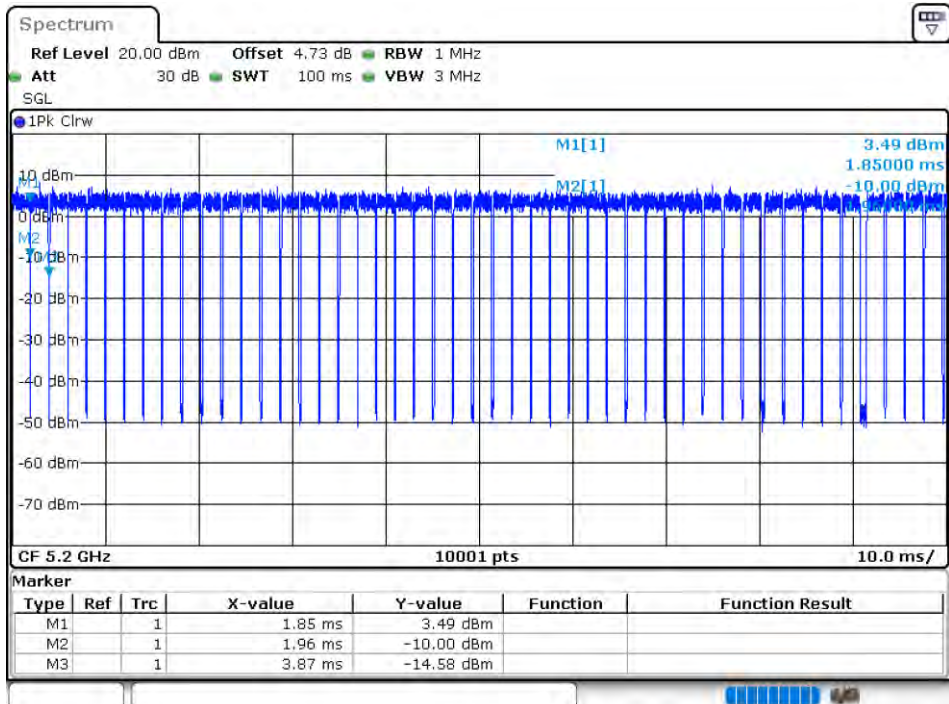


Duty Cycle NVNT ac20 5240MHz Ant1

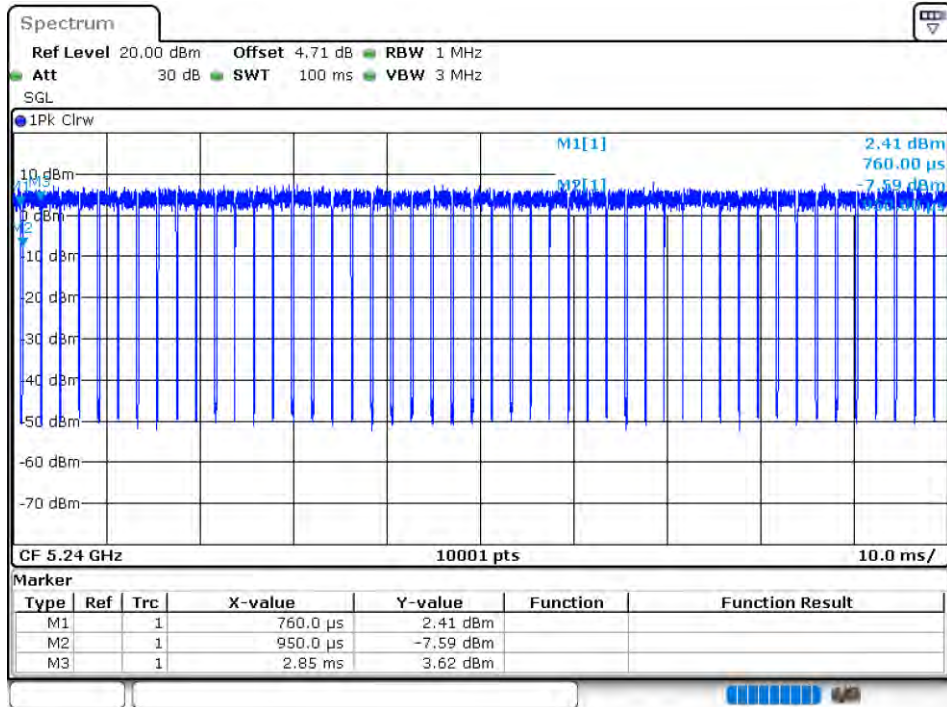


Duty Cycle NVNT ac40 5190MHz Ant1

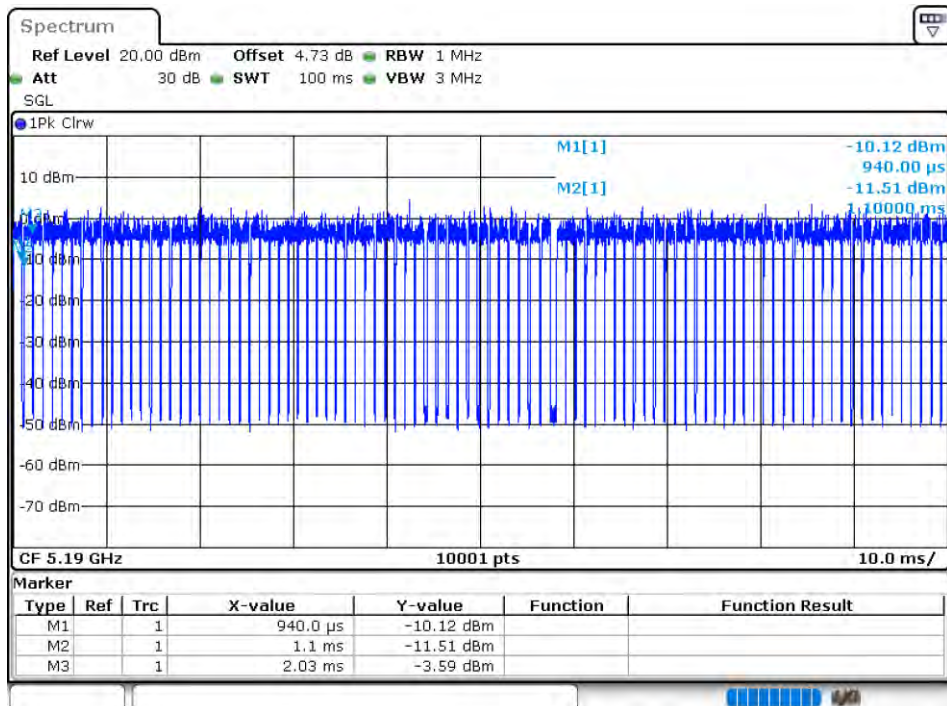


Duty Cycle NVNT ac40 5230MHz Ant1

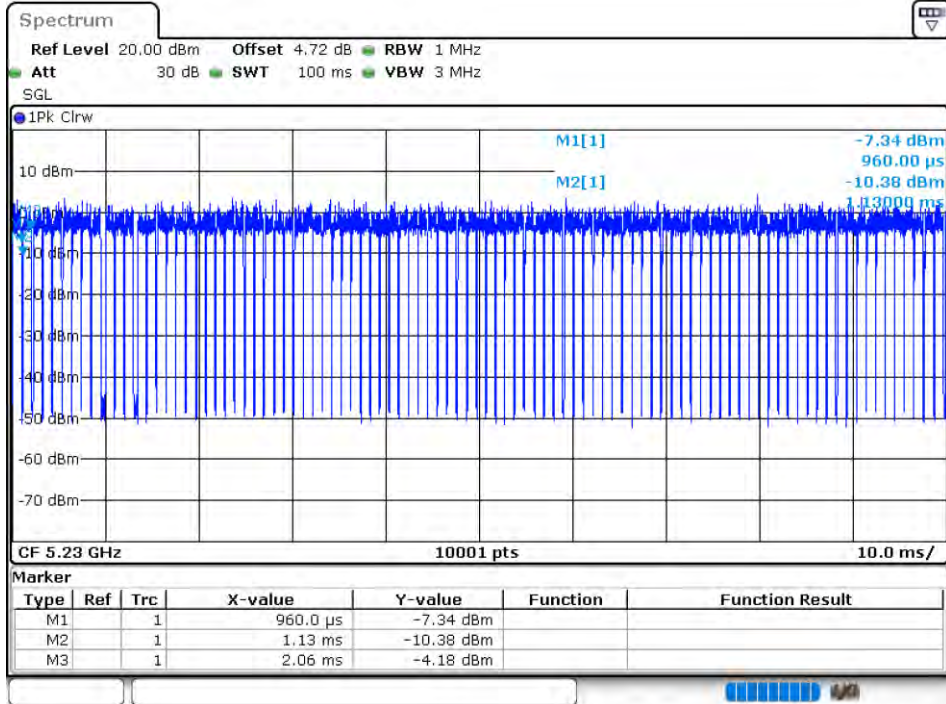


Duty Cycle NVNT ax20 5180MHz Ant1

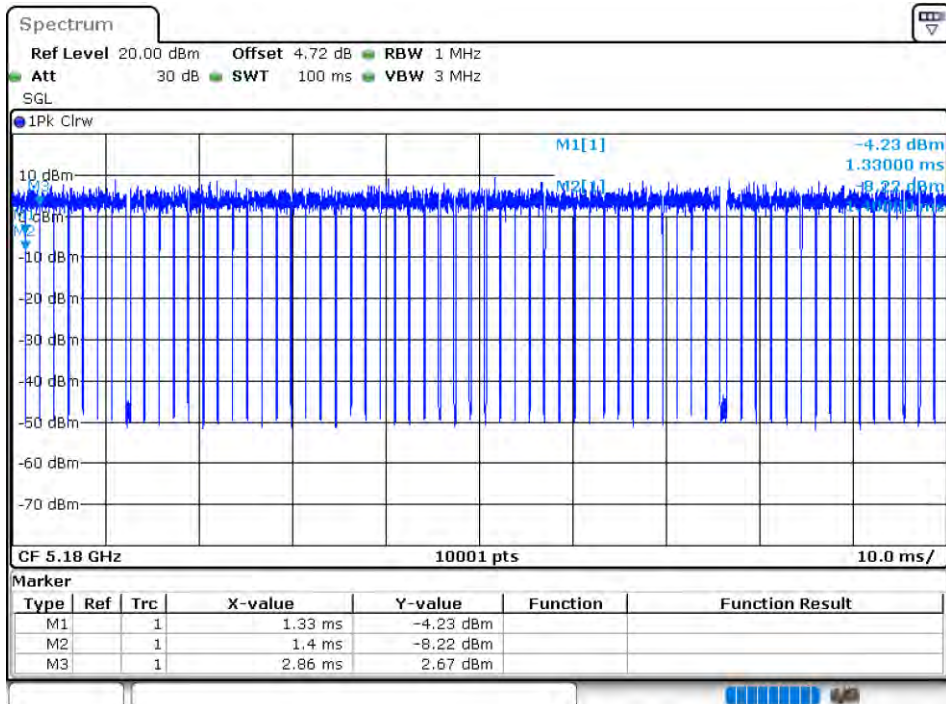


Duty Cycle NVNT ax20 5200MHz Ant1

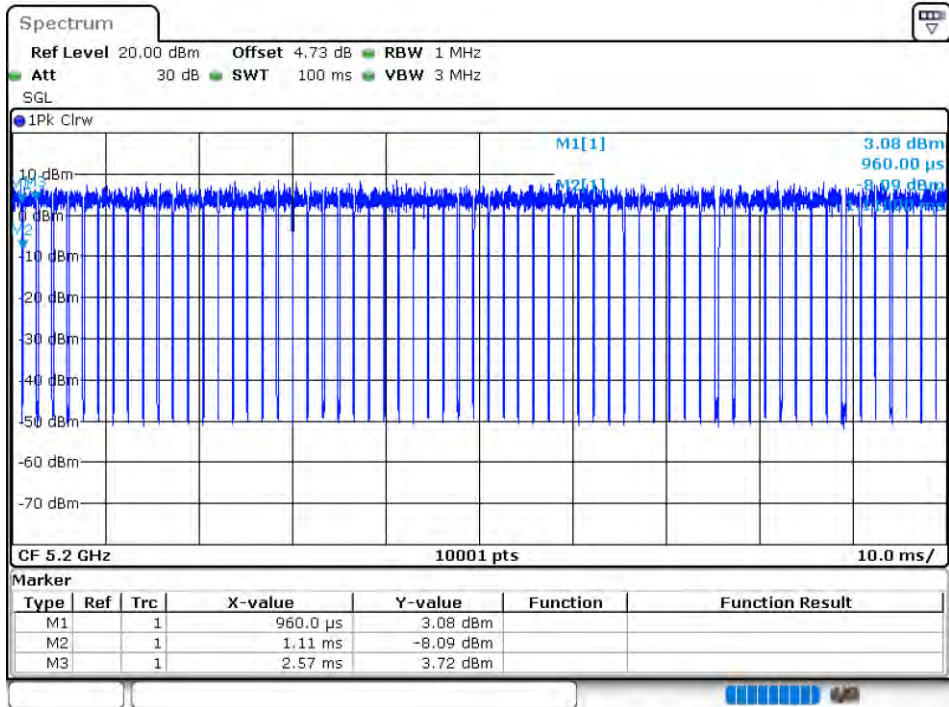


Duty Cycle NVNT ax20 5240MHz Ant1

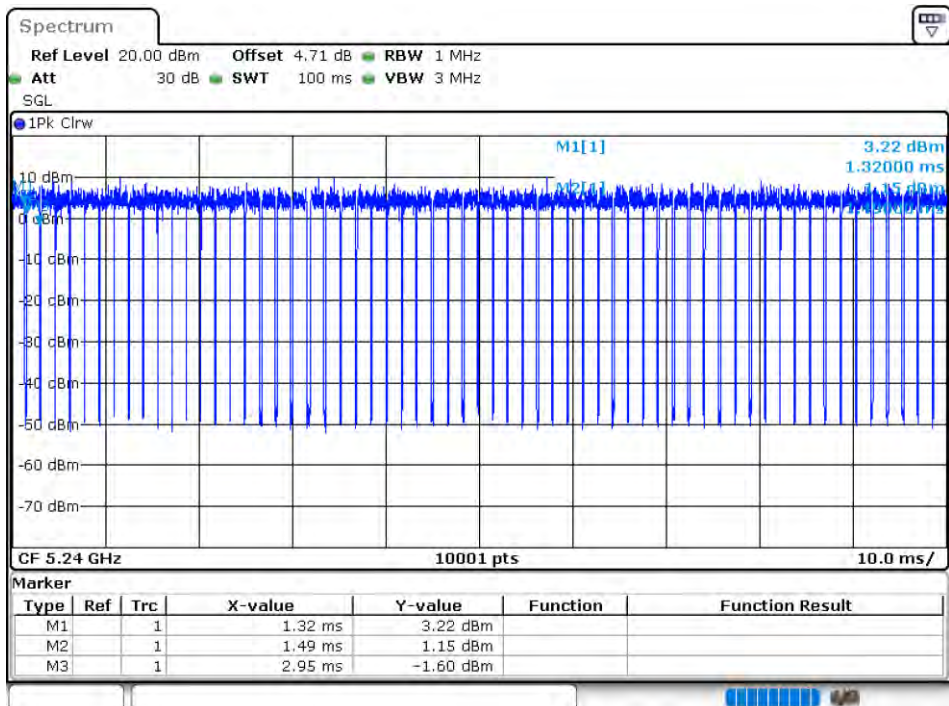

Duty Cycle NVNT ax40 5190MHz Ant1

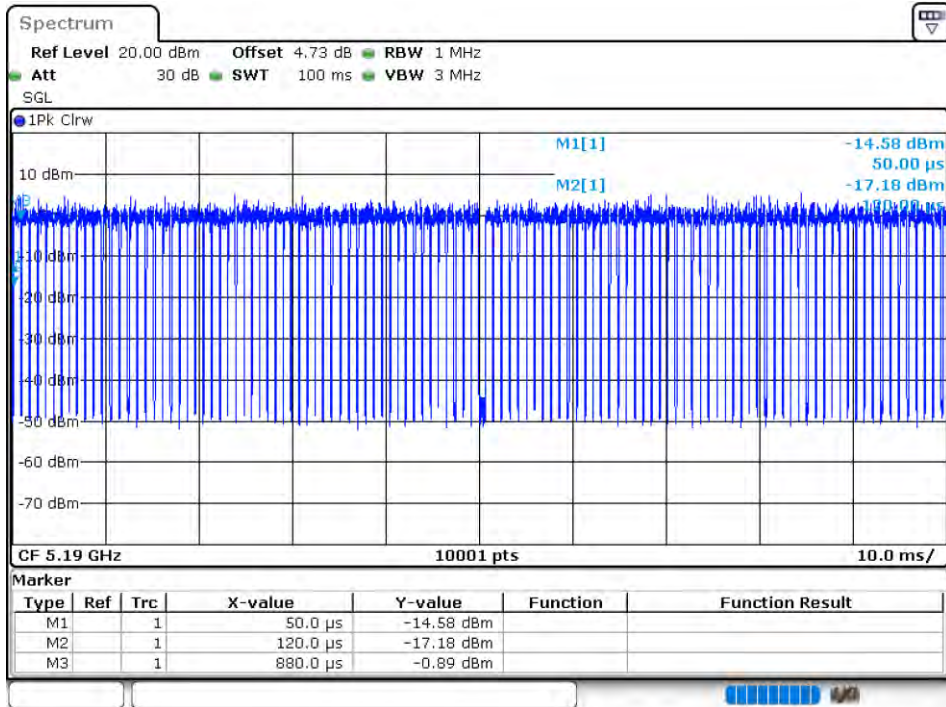

Duty Cycle NVNT ax40 5230MHz Ant1

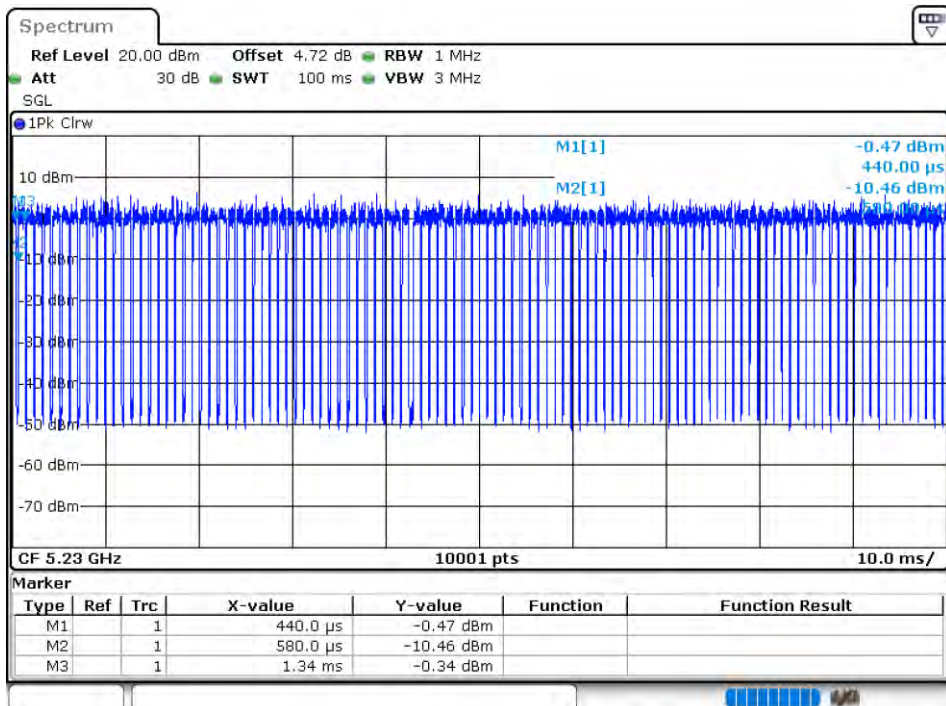

## Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | 11.96                 | 24          | Pass    |
| NVNT      | a    | 5200            | Ant1    | 11.88                 | 24          | Pass    |
| NVNT      | a    | 5240            | Ant1    | 11.04                 | 24          | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 11.89                 | 24          | Pass    |
| NVNT      | n20  | 5200            | Ant1    | 11.62                 | 24          | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 11.24                 | 24          | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 11.65                 | 24          | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 11.07                 | 24          | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | 11.88                 | 24          | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | 11.69                 | 24          | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | 11.03                 | 24          | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | 11.92                 | 24          | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | 11.41                 | 24          | Pass    |
| NVNT      | ax20 | 5180            | Ant1    | 12.02                 | 24          | Pass    |
| NVNT      | ax20 | 5200            | Ant1    | 11.55                 | 24          | Pass    |
| NVNT      | ax20 | 5240            | Ant1    | 11.09                 | 24          | Pass    |
| NVNT      | ax40 | 5190            | Ant1    | 11.79                 | 24          | Pass    |
| NVNT      | ax40 | 5230            | Ant1    | 11.09                 | 24          | Pass    |


Note: The average contains duty cycle factor

## -26dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -26 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|---------|
| NVNT      | a    | 5180            | Ant1    | 22.854                 | Pass    |
| NVNT      | a    | 5200            | Ant1    | 23.241                 | Pass    |
| NVNT      | a    | 5240            | Ant1    | 22.614                 | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 25.839                 | Pass    |
| NVNT      | n20  | 5200            | Ant1    | 24.279                 | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 24.669                 | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 48.318                 | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 46.89                  | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | 26.271                 | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | 26.841                 | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | 24.462                 | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | 47.862                 | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | 47.544                 | Pass    |
| NVNT      | ax20 | 5180            | Ant1    | 26.736                 | Pass    |
| NVNT      | ax20 | 5200            | Ant1    | 22.389                 | Pass    |
| NVNT      | ax20 | 5240            | Ant1    | 22.515                 | Pass    |
| NVNT      | ax40 | 5190            | Ant1    | 46.368                 | Pass    |
| NVNT      | ax40 | 5230            | Ant1    | 45.186                 | Pass    |

Test Graphs


-26dB Bandwidth NVNT a 5180MHz Ant1

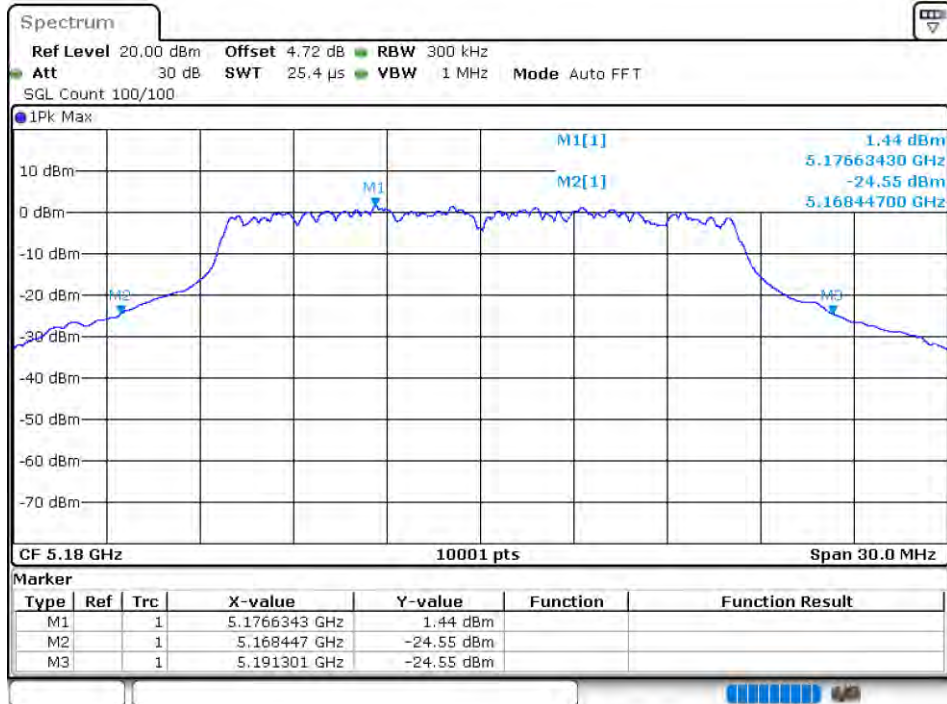


-26dB Bandwidth NVNT a 5200MHz Ant1

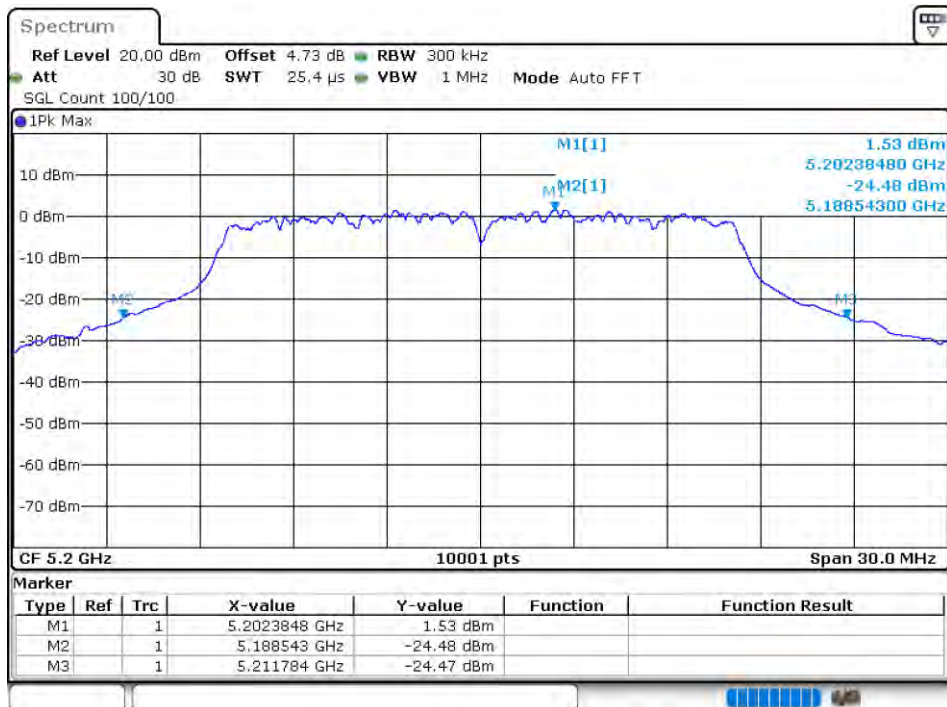


-26dB Bandwidth NVNT a 5240MHz Ant1

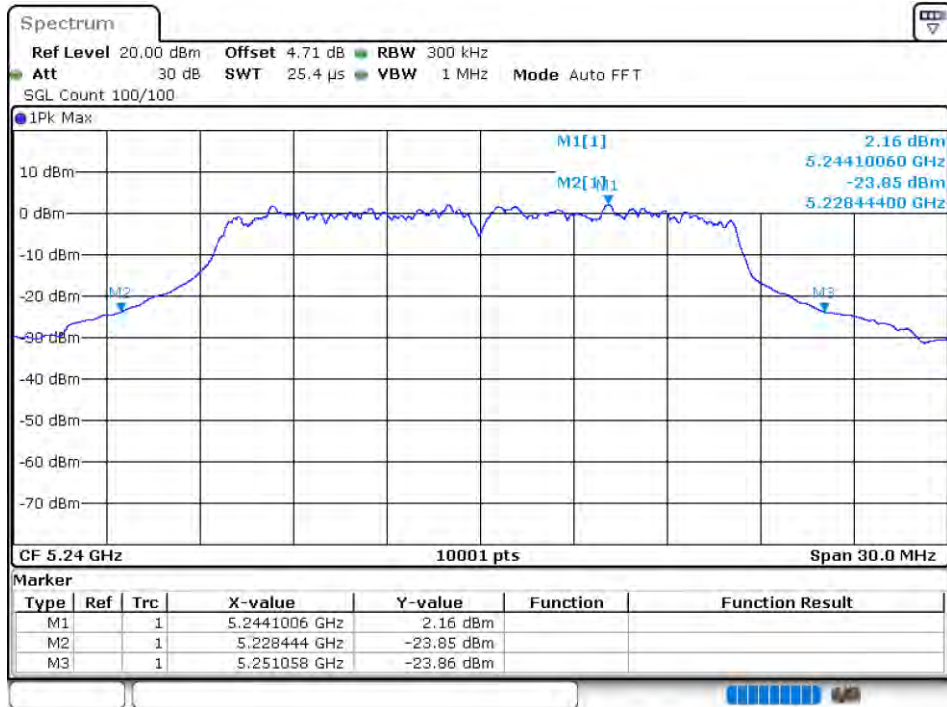


-26dB Bandwidth NVNT n20 5180MHz Ant1

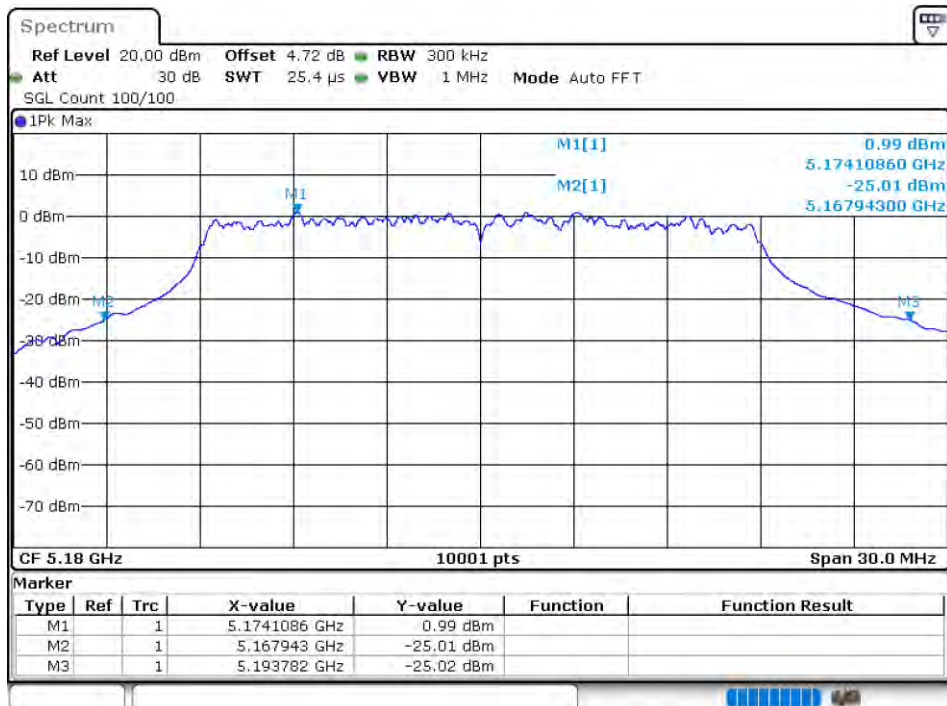


-26dB Bandwidth NVNT n20 5200MHz Ant1

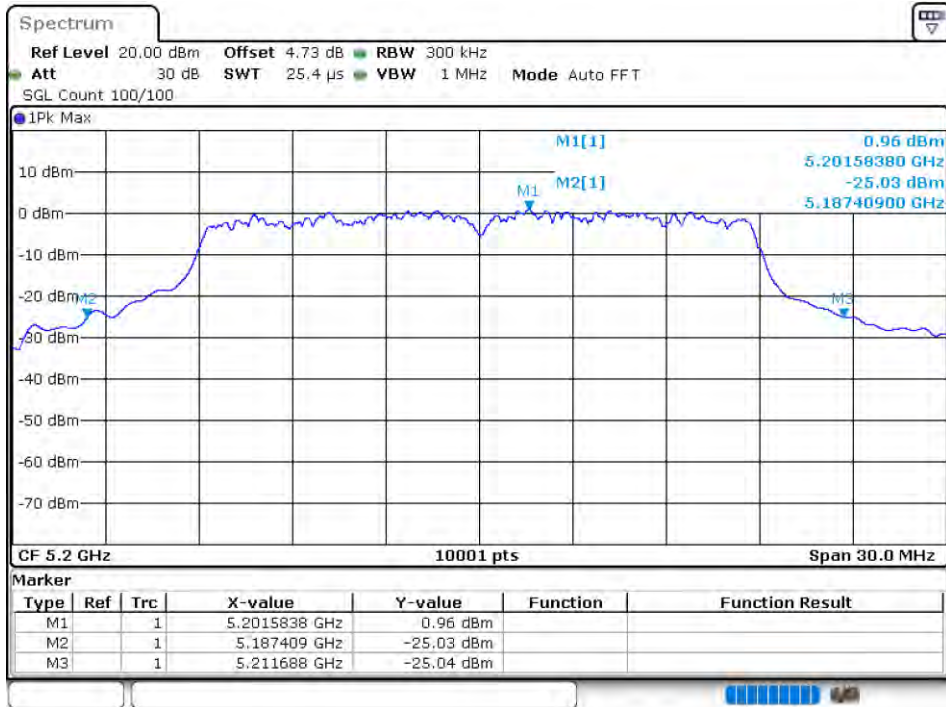


-26dB Bandwidth NVNT n20 5240MHz Ant1

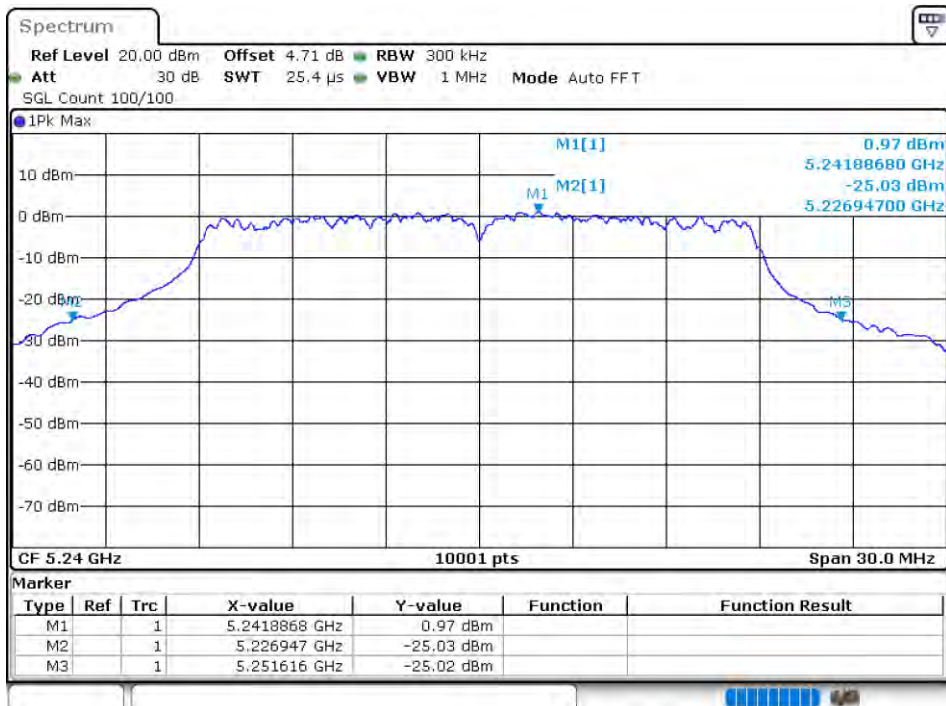


-26dB Bandwidth NVNT n40 5190MHz Ant1

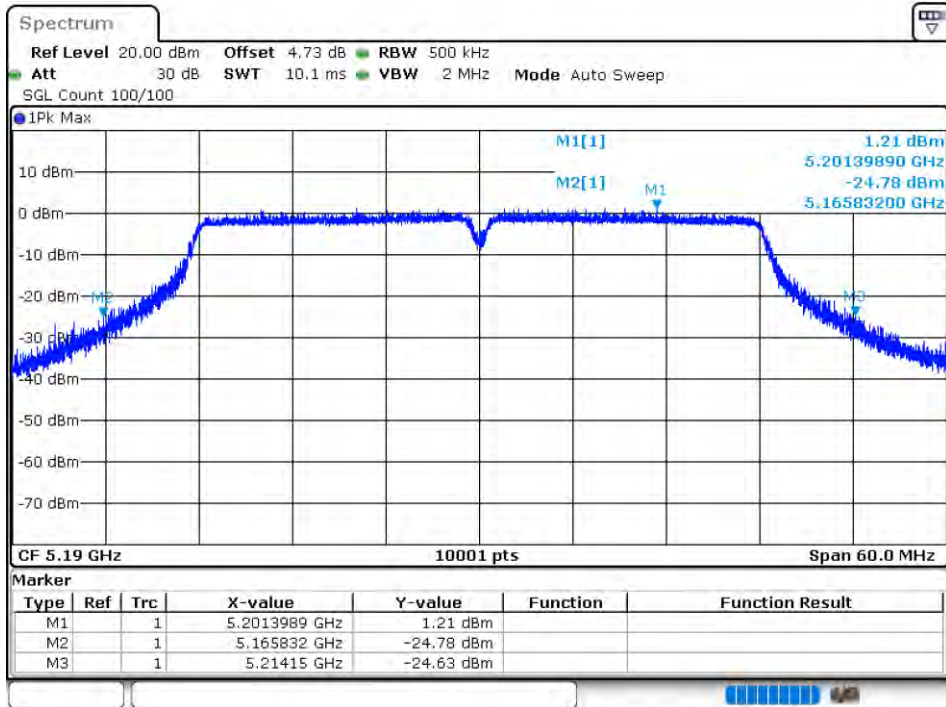


-26dB Bandwidth NVNT n40 5230MHz Ant1

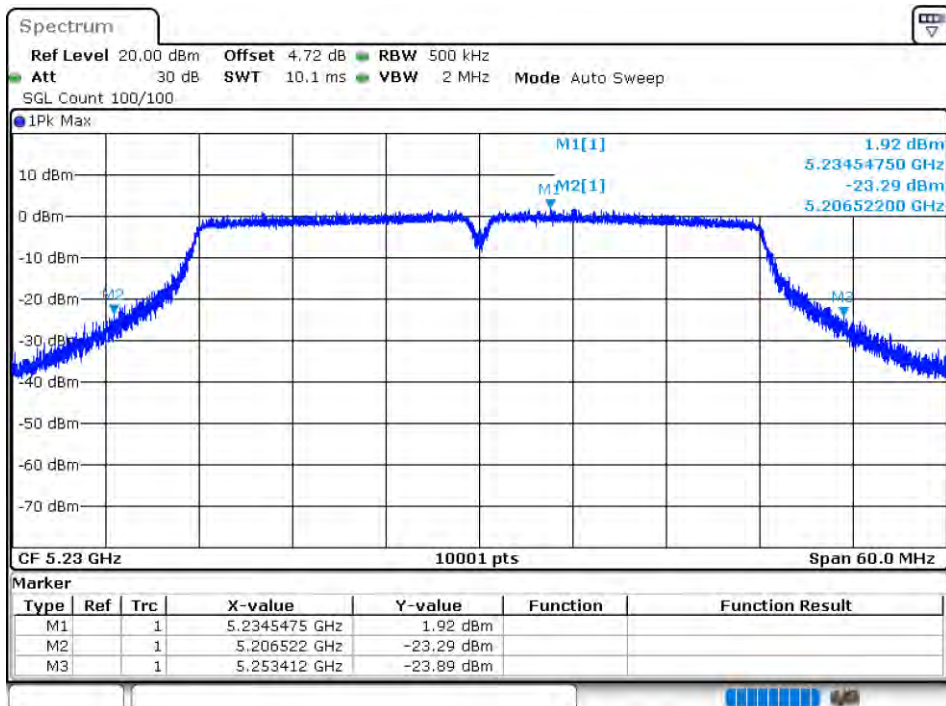


-26dB Bandwidth NVNT ac20 5180MHz Ant1

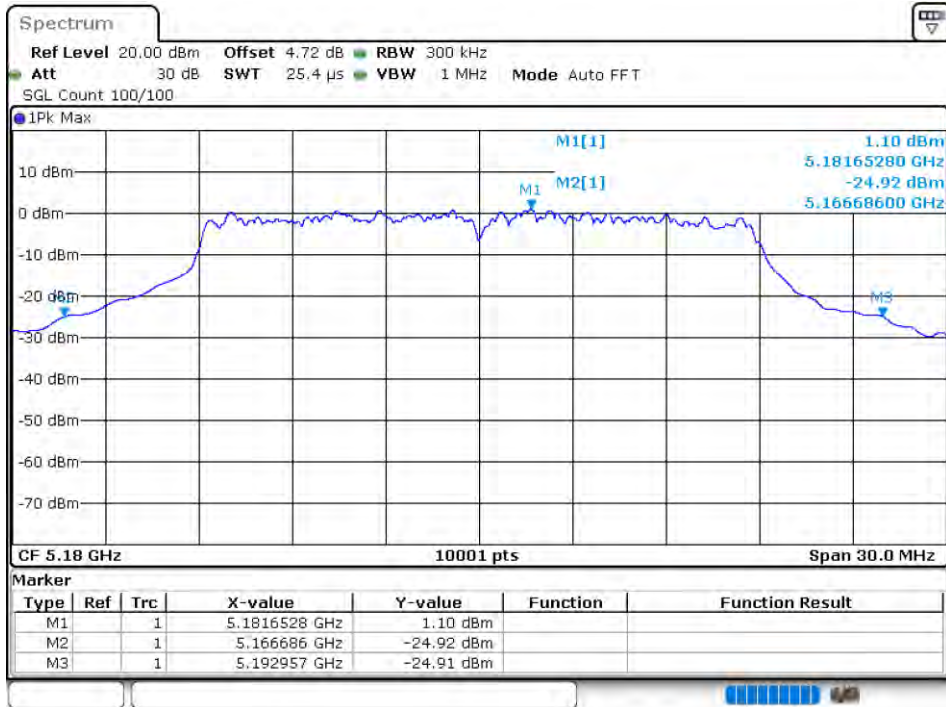


-26dB Bandwidth NVNT ac20 5200MHz Ant1

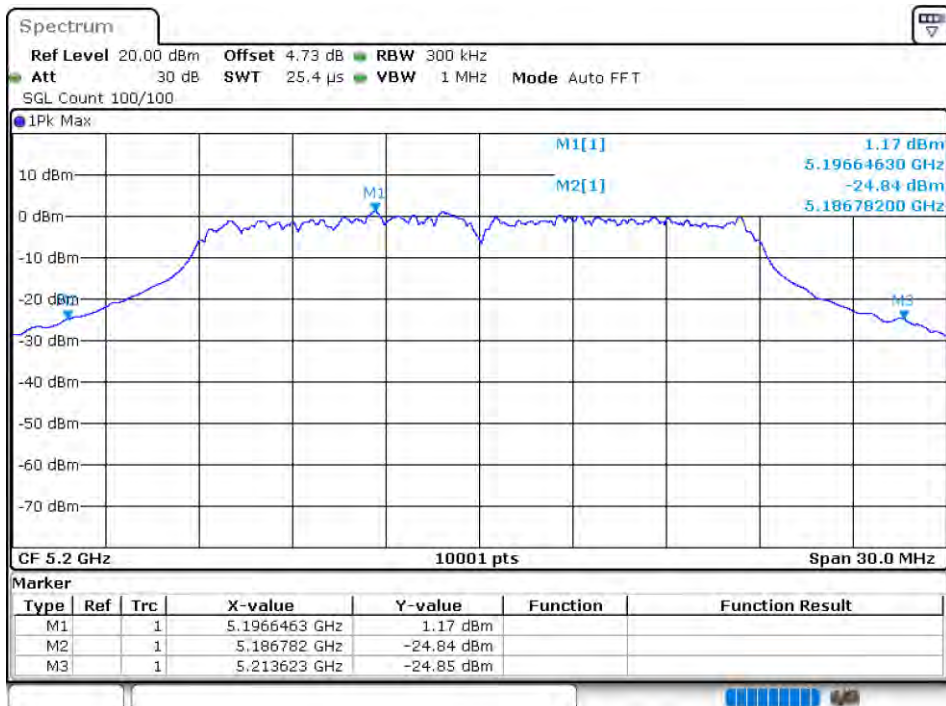


-26dB Bandwidth NVNT ac20 5240MHz Ant1

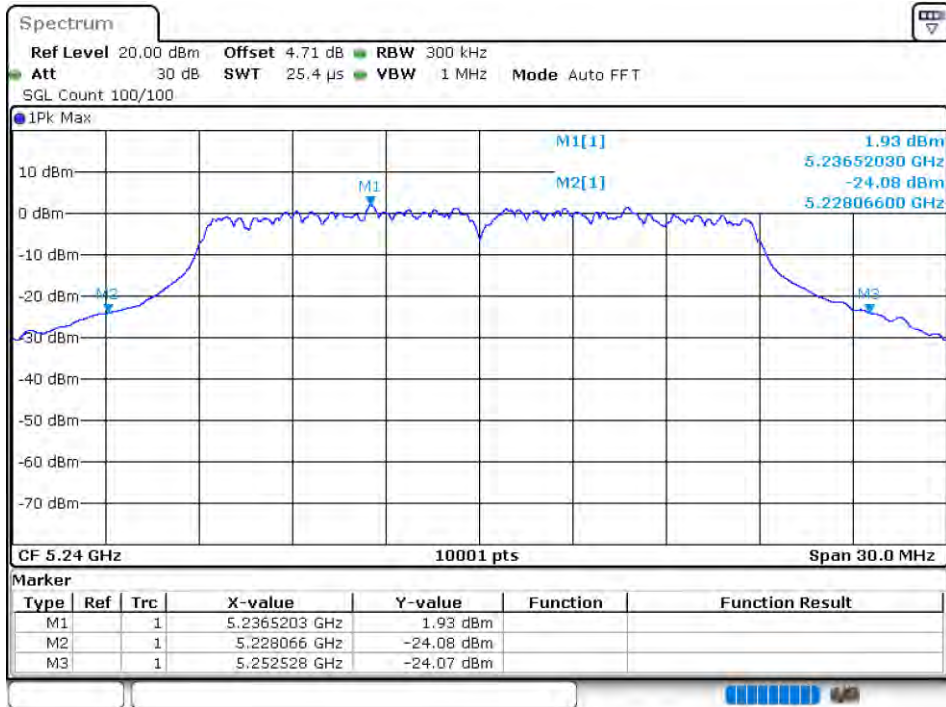


-26dB Bandwidth NVNT ac40 5190MHz Ant1

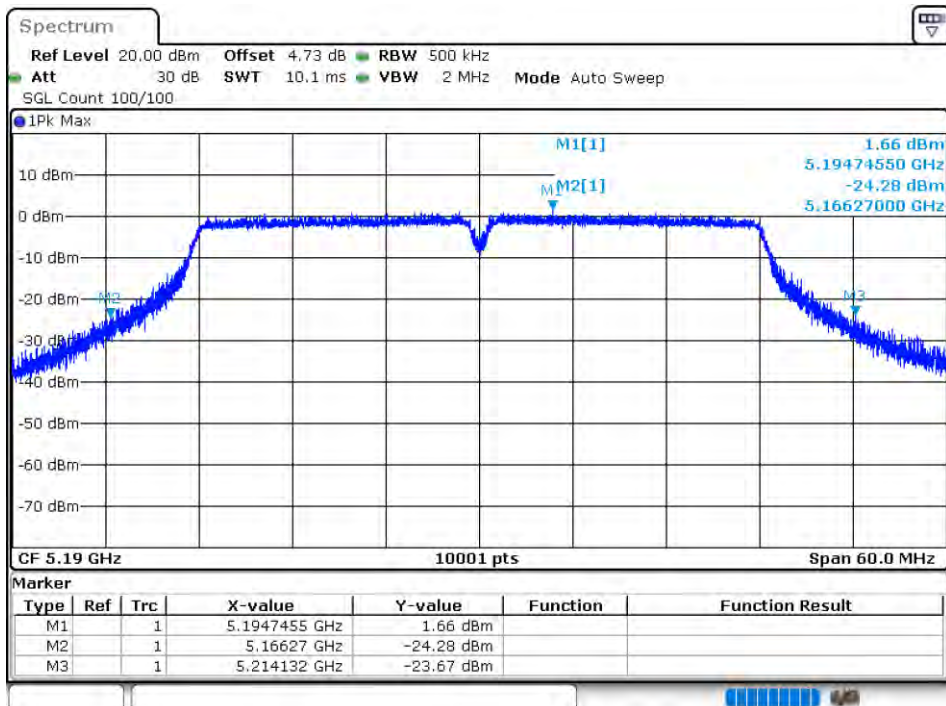


-26dB Bandwidth NVNT ac40 5230MHz Ant1

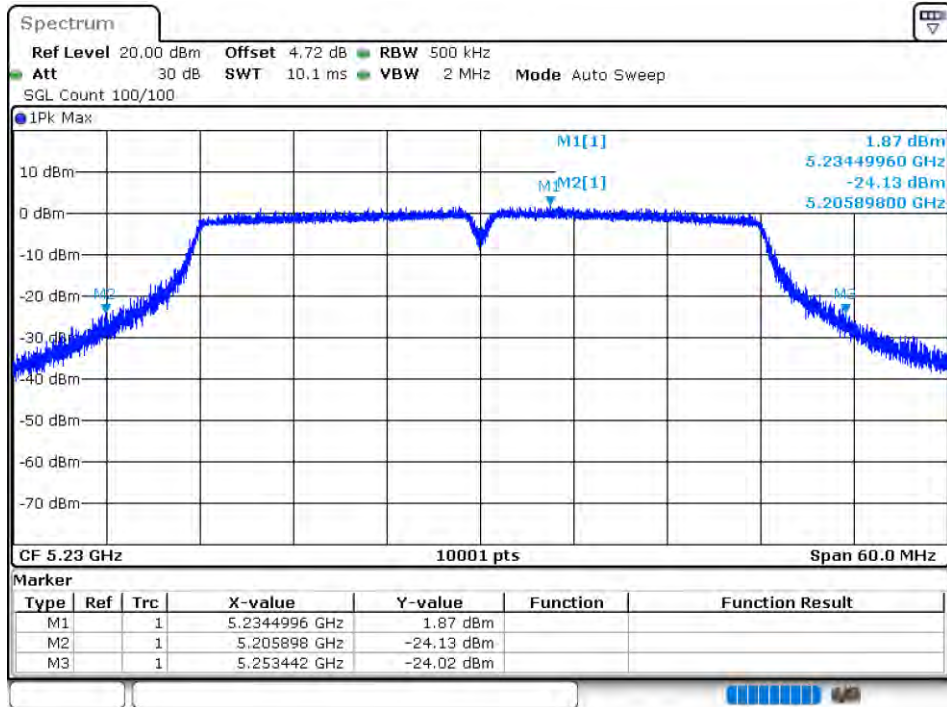


-26dB Bandwidth NVNT ax20 5180MHz Ant1

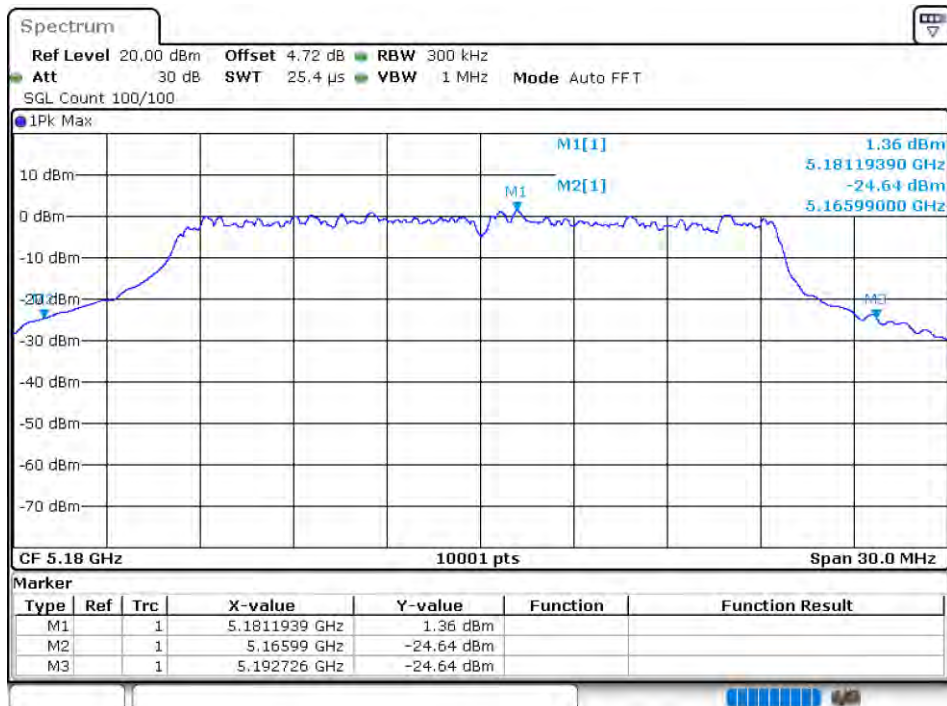


-26dB Bandwidth NVNT ax20 5200MHz Ant1

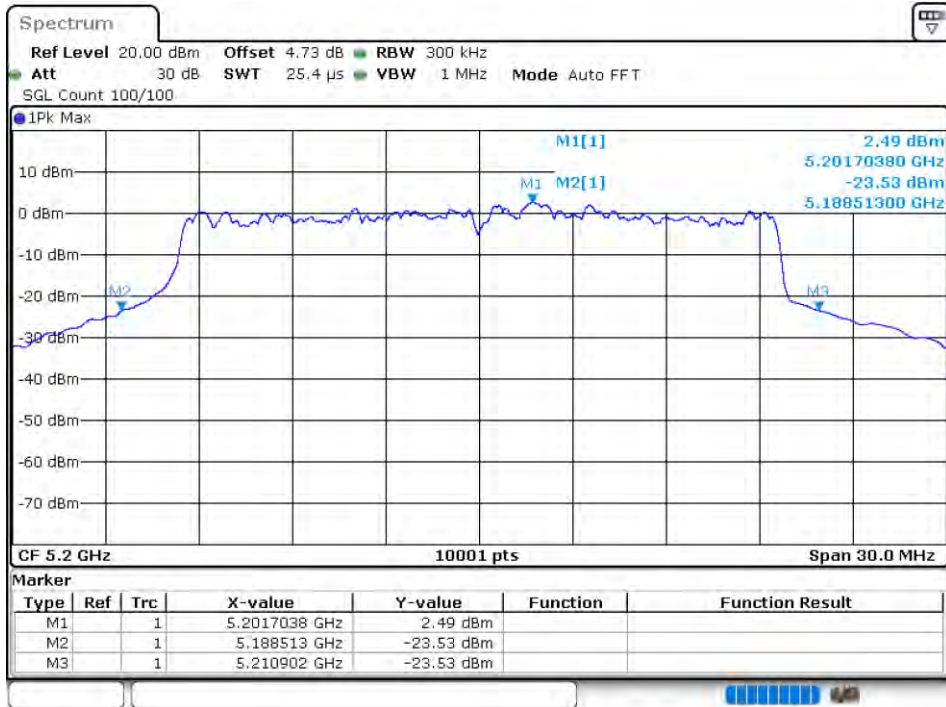


-26dB Bandwidth NVNT ax20 5240MHz Ant1

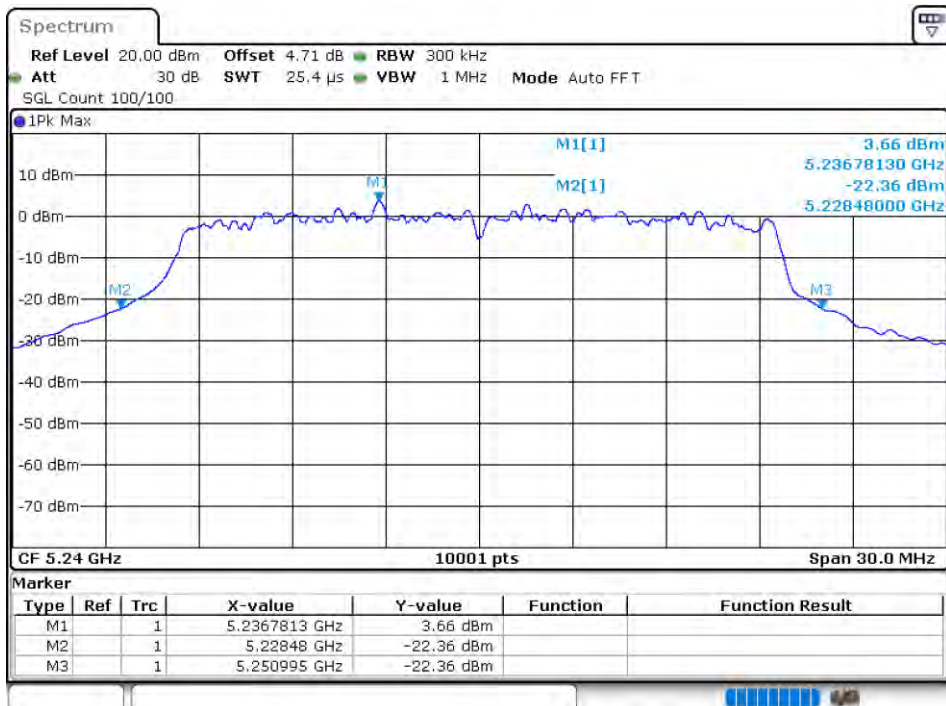

-26dB Bandwidth NVNT ax40 5190MHz Ant1

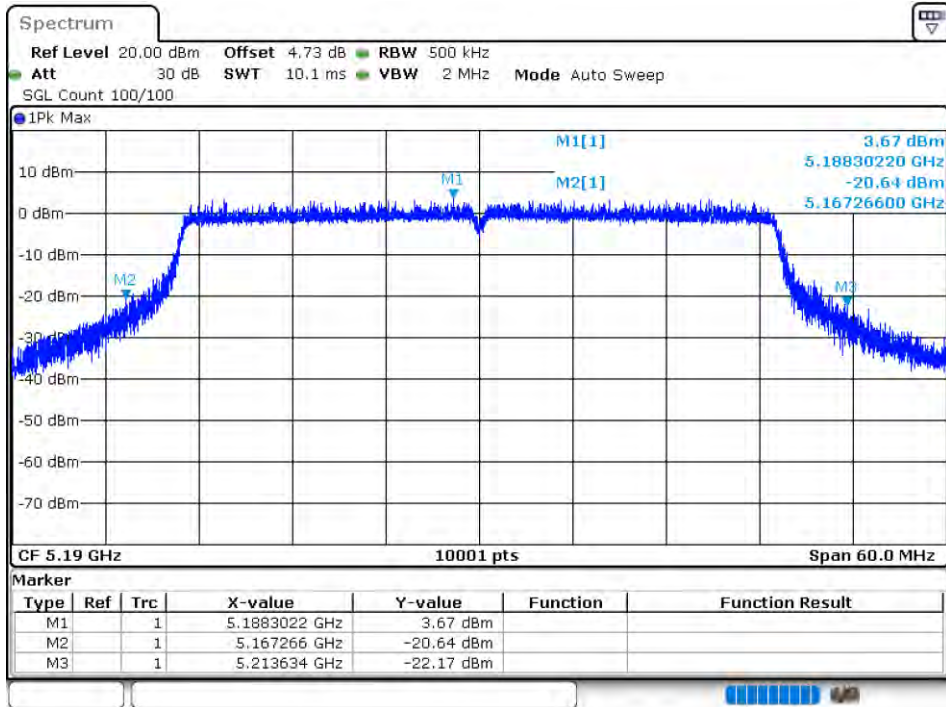

-26dB Bandwidth NVNT ax40 5230MHz Ant1

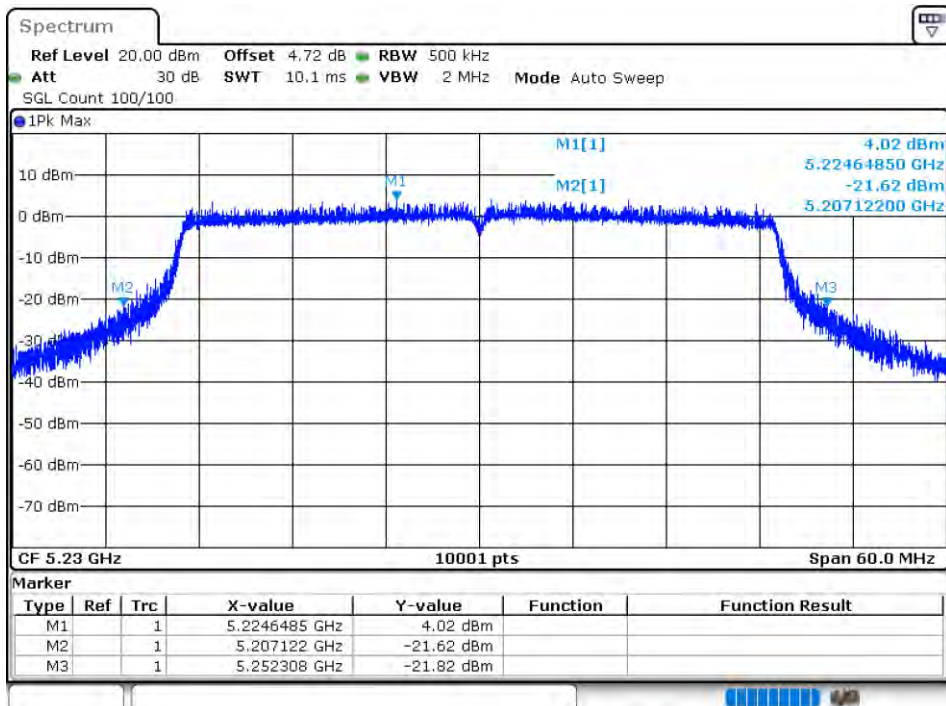


## Occupied Channel Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|------|-----------------|---------|---------------|
| NVNT      | a    | 5180            | Ant1    | 16.924        |
| NVNT      | a    | 5200            | Ant1    | 16.873        |
| NVNT      | a    | 5240            | Ant1    | 16.639        |
| NVNT      | n20  | 5180            | Ant1    | 17.782        |
| NVNT      | n20  | 5200            | Ant1    | 17.743        |
| NVNT      | n20  | 5240            | Ant1    | 17.968        |
| NVNT      | n40  | 5190            | Ant1    | 36.692        |
| NVNT      | n40  | 5230            | Ant1    | 36.554        |
| NVNT      | ac20 | 5180            | Ant1    | 18.307        |
| NVNT      | ac20 | 5200            | Ant1    | 17.74         |
| NVNT      | ac20 | 5240            | Ant1    | 17.962        |
| NVNT      | ac40 | 5190            | Ant1    | 36.692        |
| NVNT      | ac40 | 5230            | Ant1    | 36.536        |
| NVNT      | ax20 | 5180            | Ant1    | 18.952        |
| NVNT      | ax20 | 5200            | Ant1    | 19.006        |
| NVNT      | ax20 | 5240            | Ant1    | 19.126        |
| NVNT      | ax40 | 5190            | Ant1    | 37.982        |
| NVNT      | ax40 | 5230            | Ant1    | 37.898        |

Test Graphs


OBW NVNT a 5180MHz Ant1

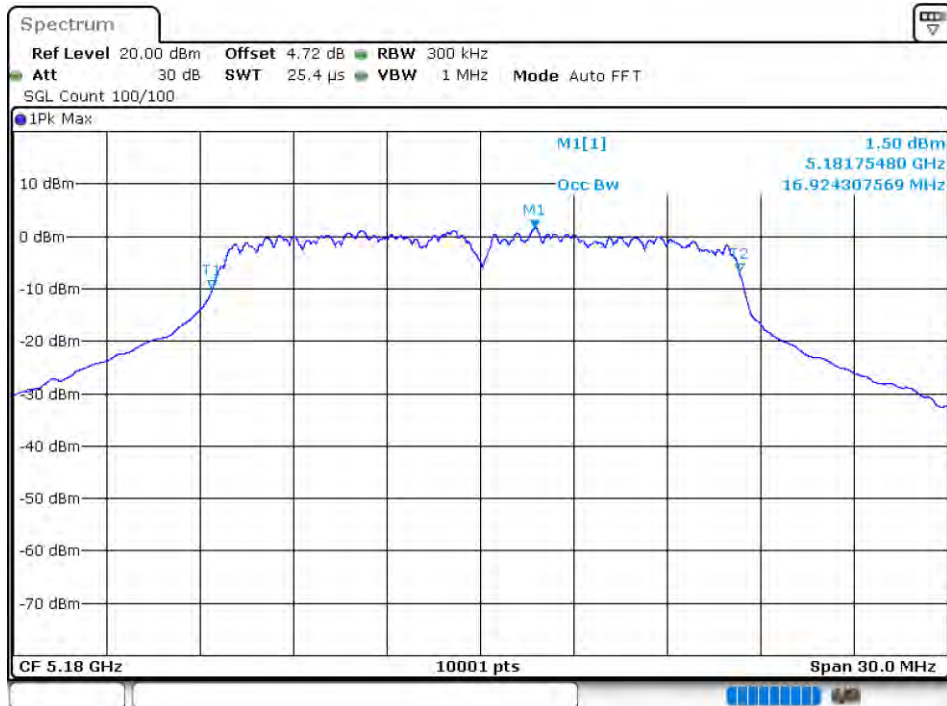


OBW NVNT a 5200MHz Ant1

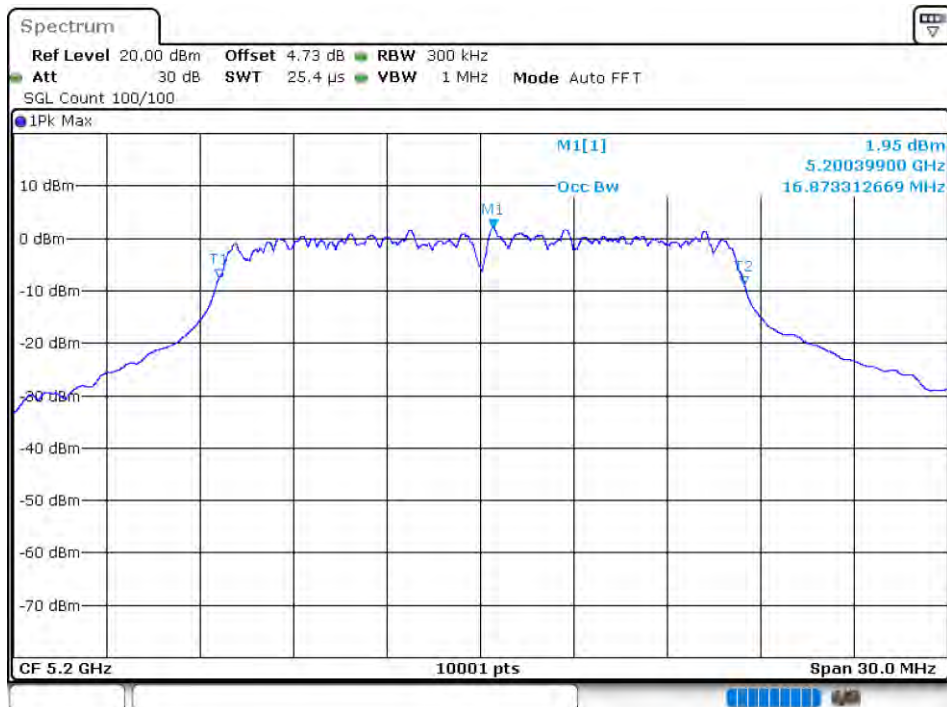



OBW NVNT a 5240MHz Ant1

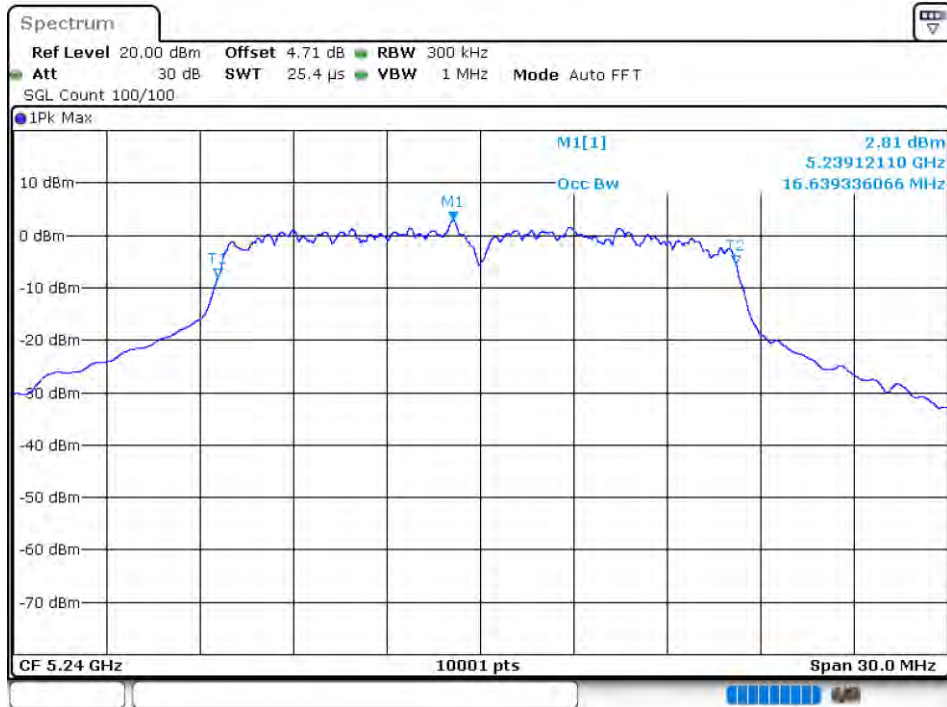


OBW NVNT n20 5180MHz Ant1

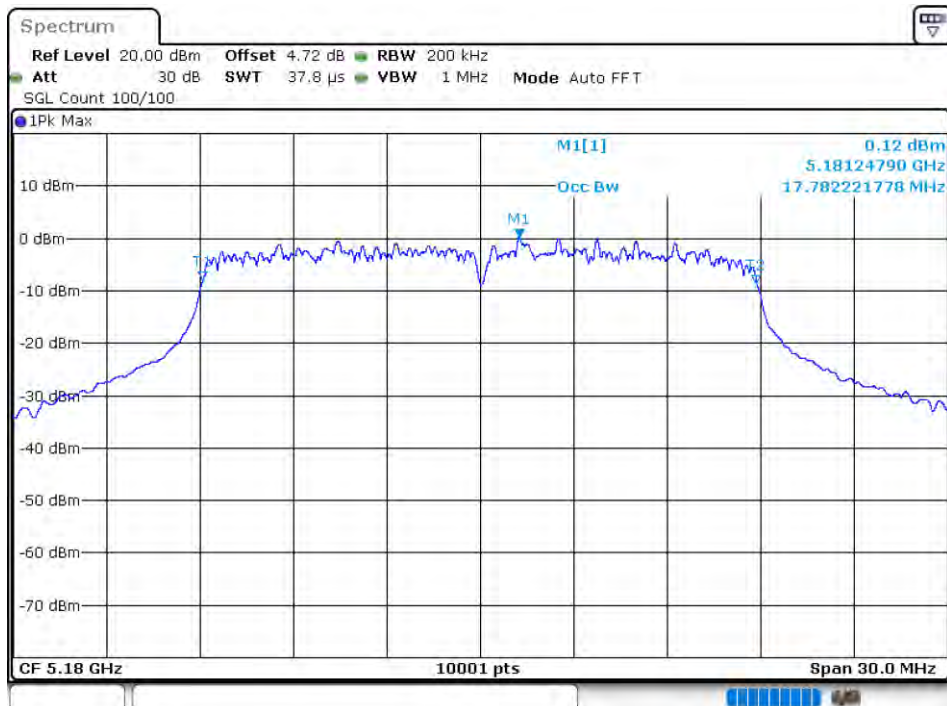

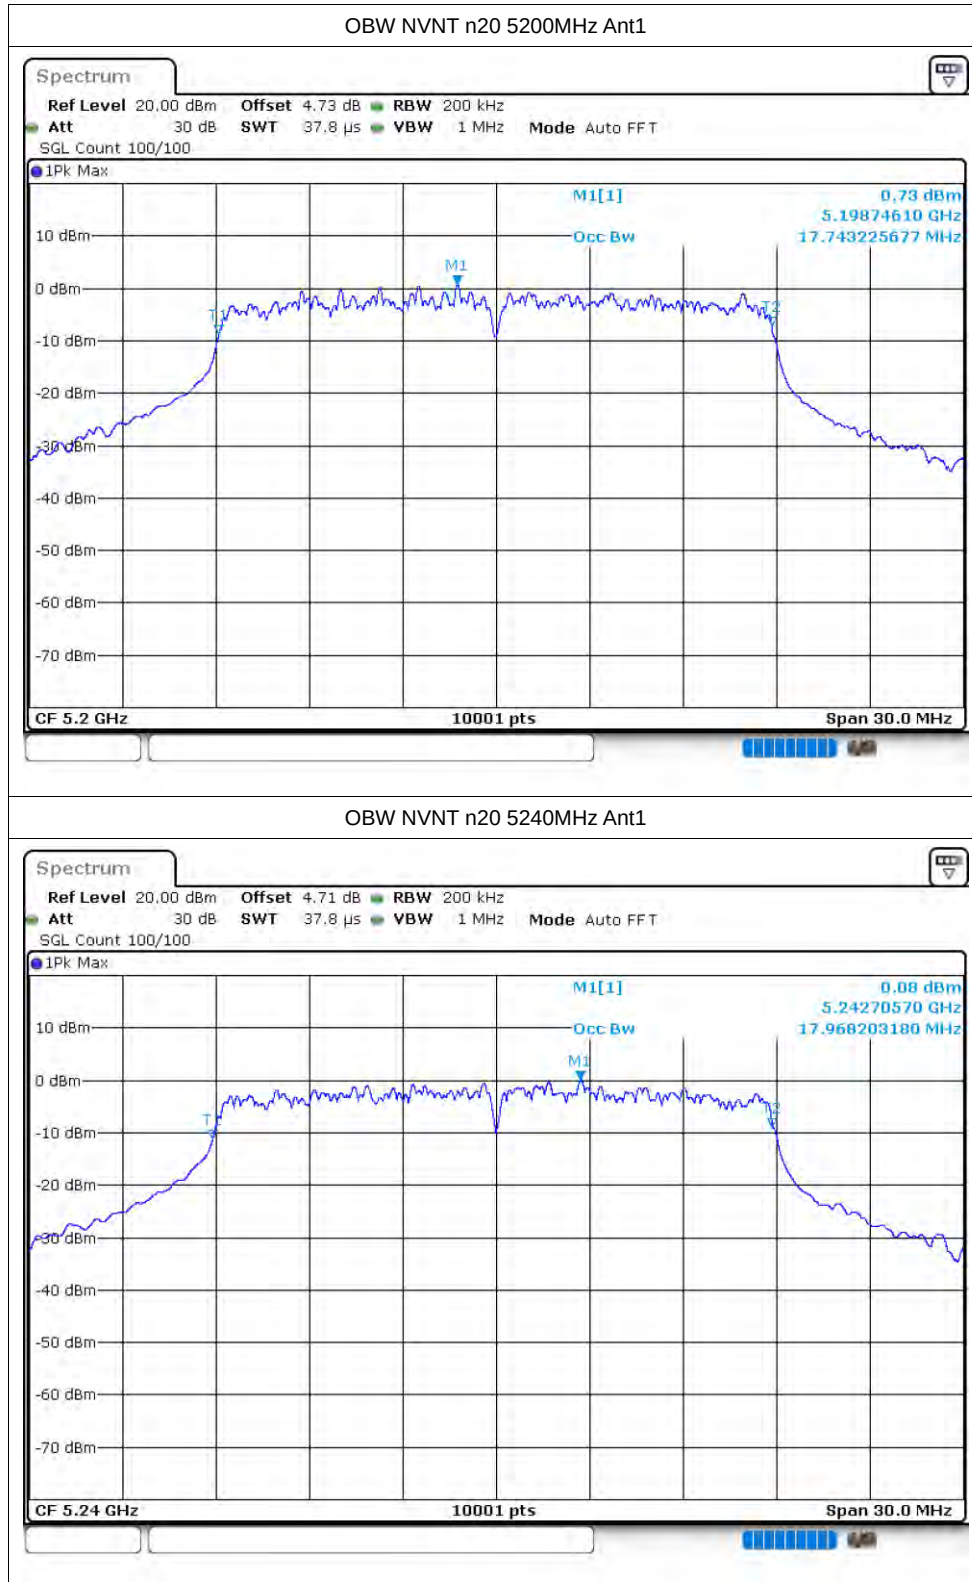


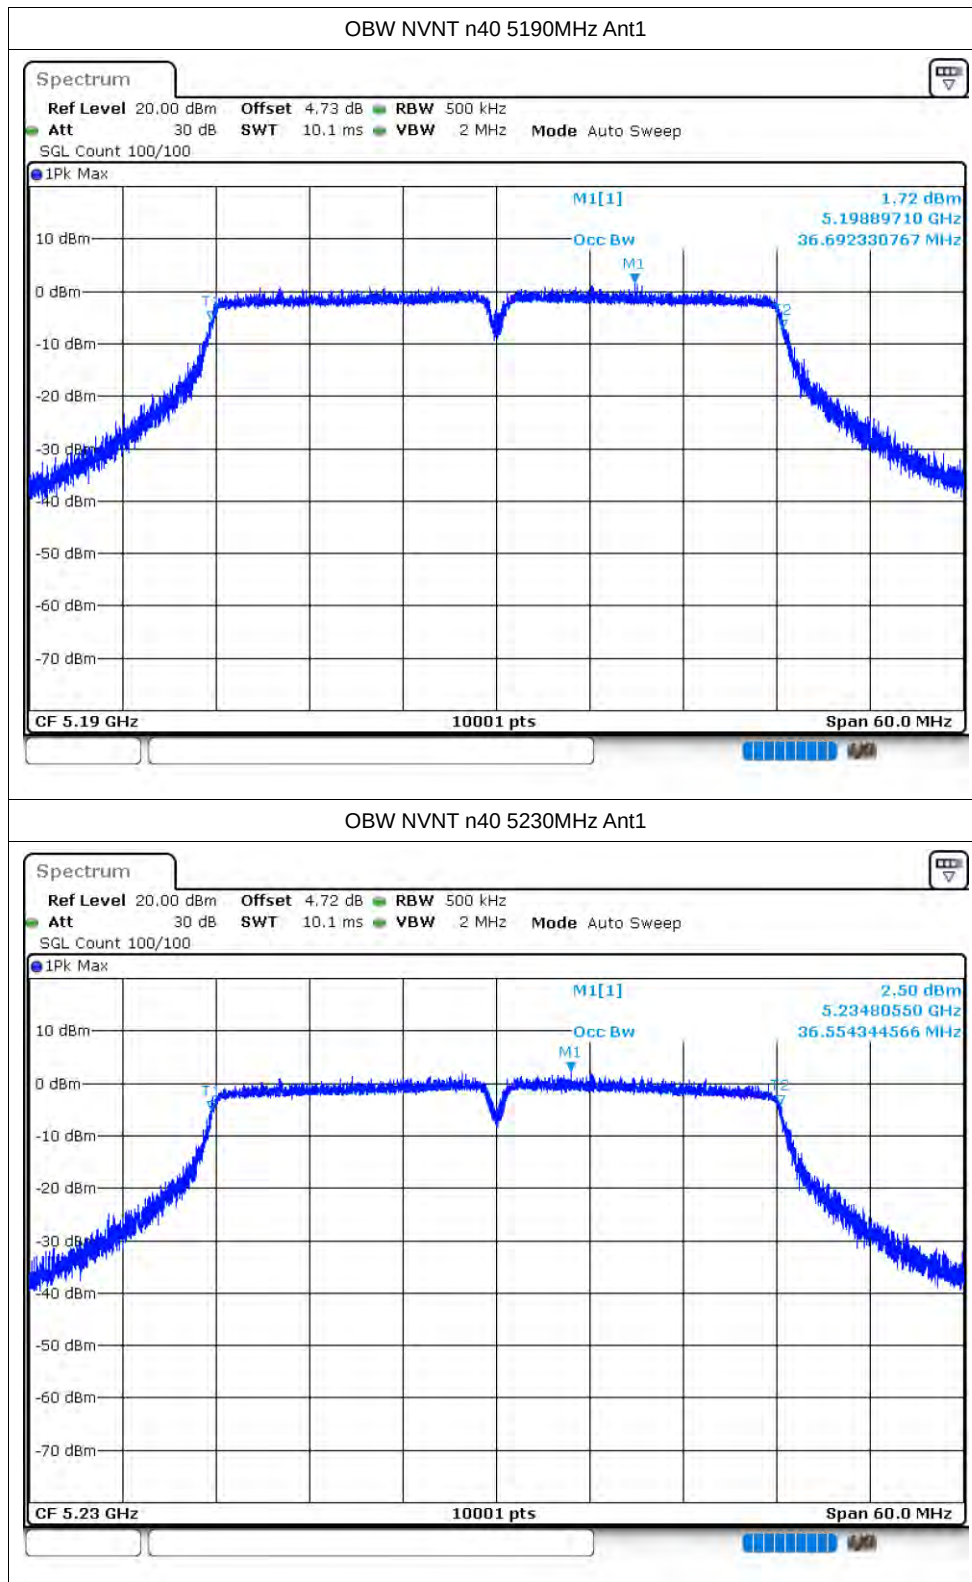


OBW NVNT ac20 5180MHz Ant1

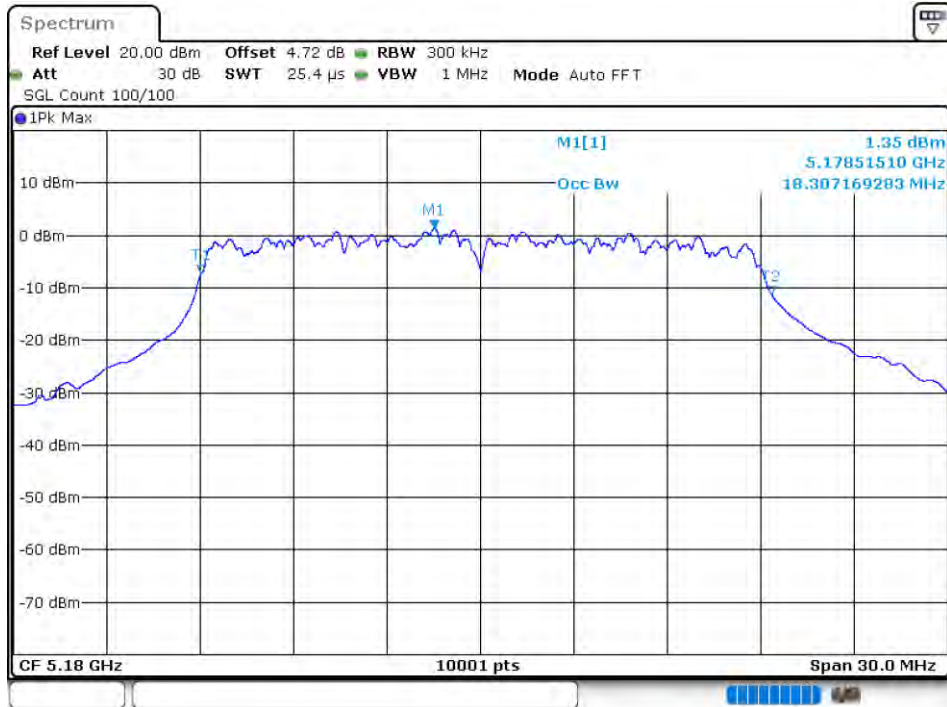


OBW NVNT ac20 5200MHz Ant1

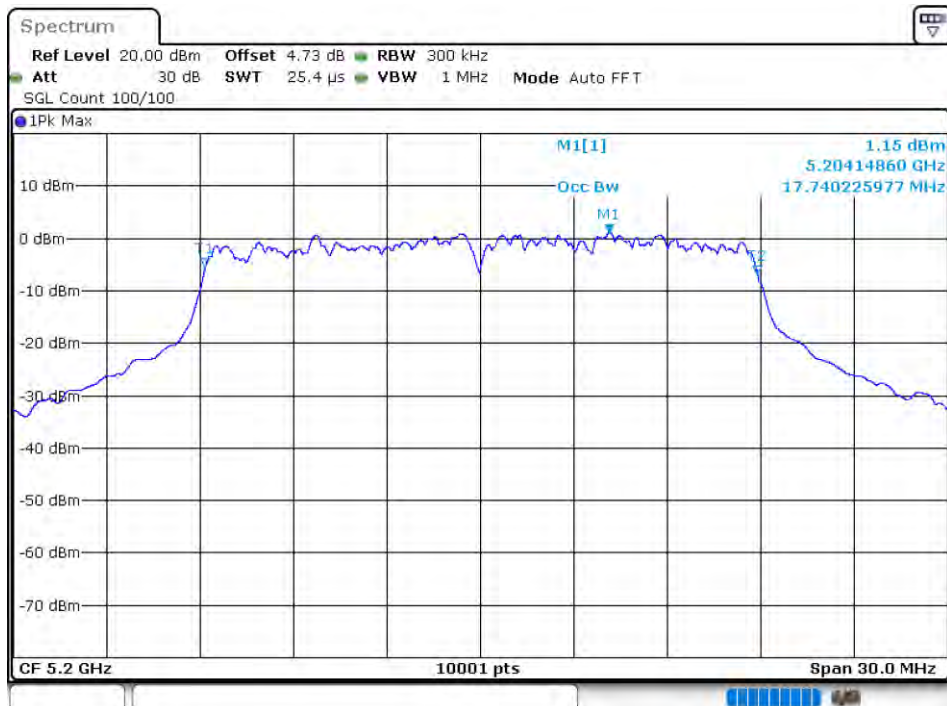


OBW NVNT ac20 5240MHz Ant1

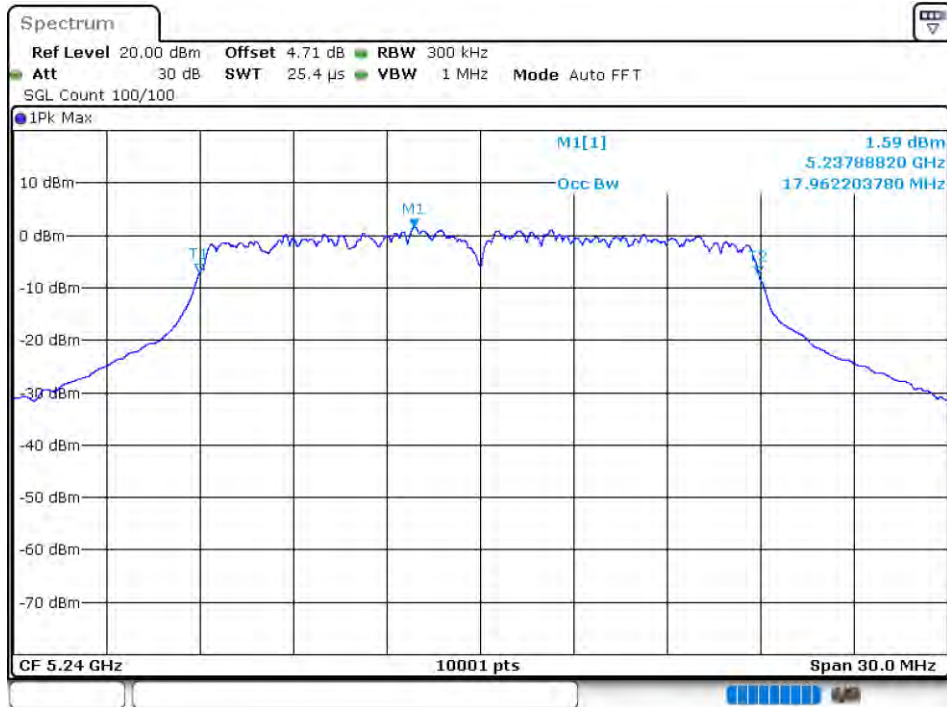


OBW NVNT ac40 5190MHz Ant1

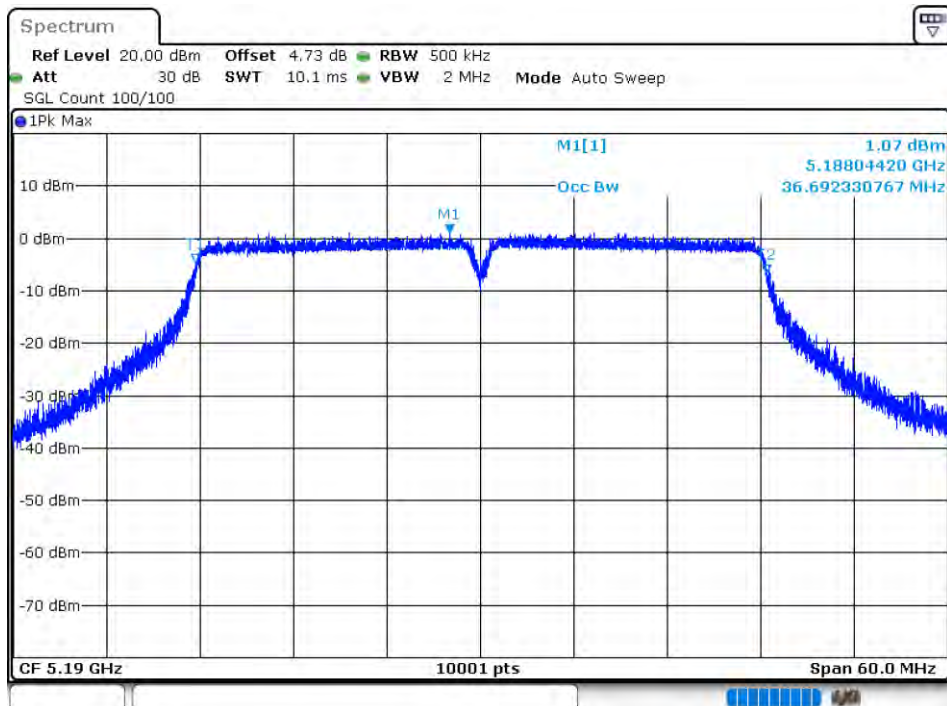


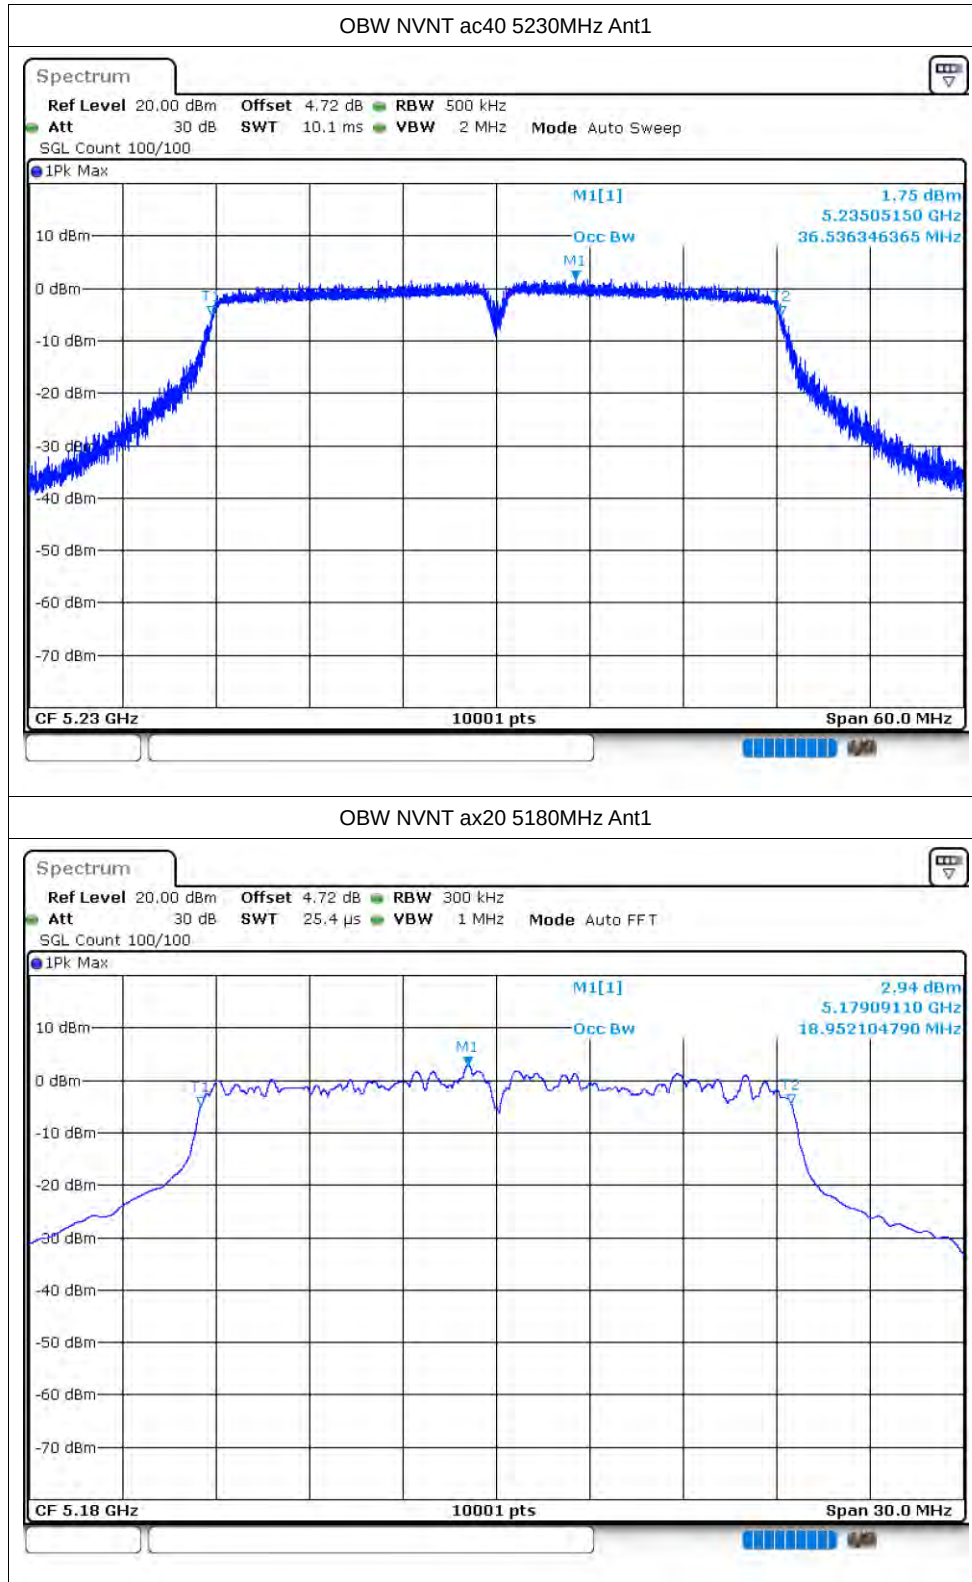


OBW NVNT ax20 5200MHz Ant1

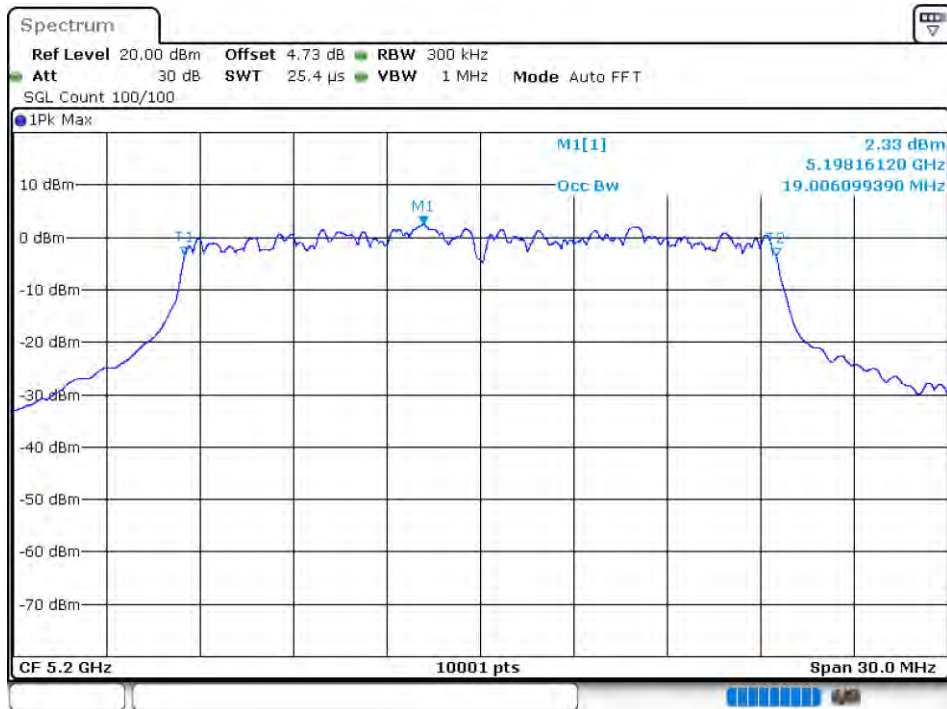

OBW NVNT ax20 5240MHz Ant1

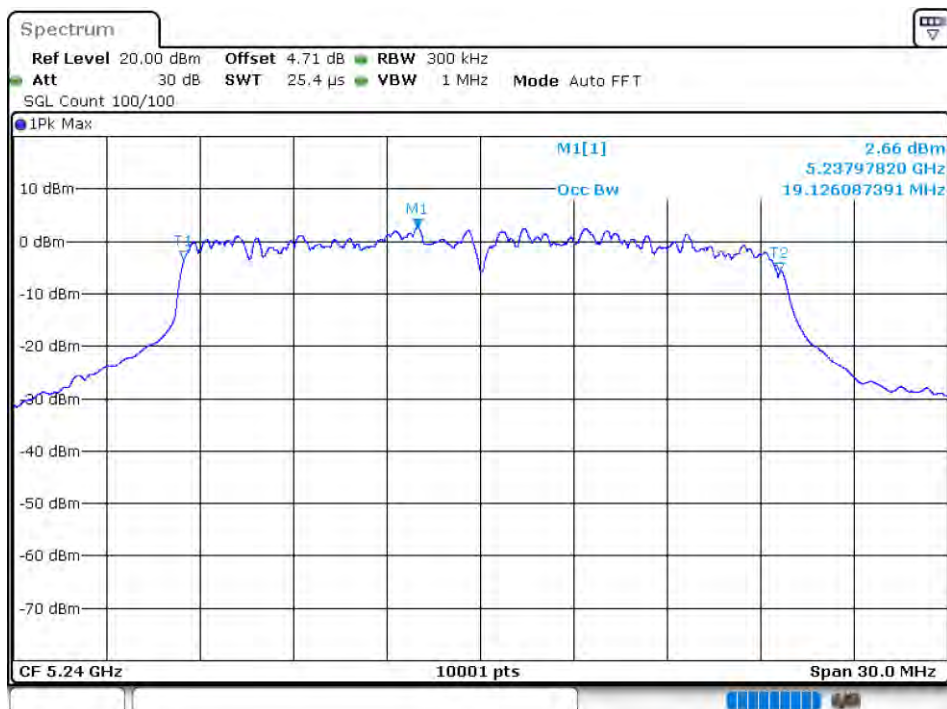

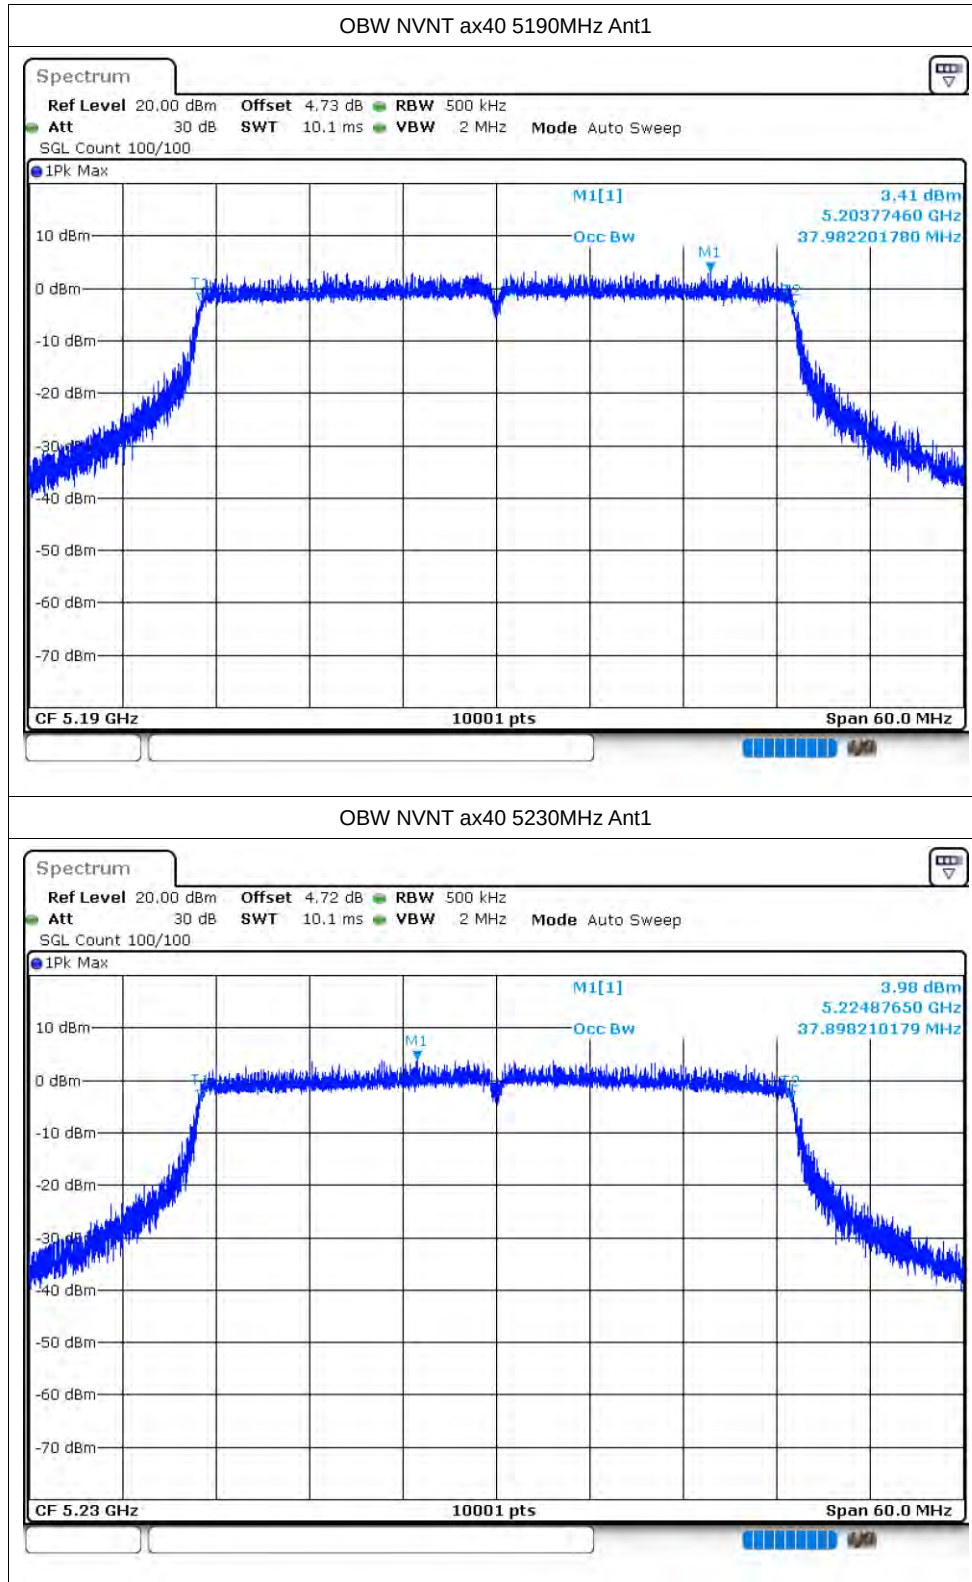


## Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm) | Duty Factor (dB) | Total PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|---------------------|------------------|-----------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | -0.35               | 0.25             | -0.1            | 11          | Pass    |
| NVNT      | a    | 5200            | Ant1    | -0.15               | 0.23             | 0.08            | 11          | Pass    |
| NVNT      | a    | 5240            | Ant1    | -0.18               | 0.34             | 0.16            | 11          | Pass    |
| NVNT      | n20  | 5180            | Ant1    | -0.74               | 0.34             | -0.4            | 11          | Pass    |
| NVNT      | n20  | 5200            | Ant1    | -0.6                | 0.34             | -0.26           | 11          | Pass    |
| NVNT      | n20  | 5240            | Ant1    | -0.52               | 0.39             | -0.13           | 11          | Pass    |
| NVNT      | n40  | 5190            | Ant1    | -4.54               | 0.49             | -4.05           | 11          | Pass    |
| NVNT      | n40  | 5230            | Ant1    | -3.71               | 0.58             | -3.13           | 11          | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | -0.97               | 0.3              | -0.67           | 11          | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | -0.76               | 0.37             | -0.39           | 11          | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | -0.56               | 0.36             | -0.2            | 11          | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | -4.49               | 0.52             | -3.97           | 11          | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | -3.57               | 0.46             | -3.11           | 11          | Pass    |
| NVNT      | ax20 | 5180            | Ant1    | -1.1                | 0.34             | -0.76           | 11          | Pass    |
| NVNT      | ax20 | 5200            | Ant1    | -1.05               | 0.44             | -0.61           | 11          | Pass    |
| NVNT      | ax20 | 5240            | Ant1    | -0.59               | 0.41             | -0.18           | 11          | Pass    |
| NVNT      | ax40 | 5190            | Ant1    | -4.53               | 0.6              | -3.93           | 11          | Pass    |
| NVNT      | ax40 | 5230            | Ant1    | -3.86               | 0.66             | -3.2            | 11          | Pass    |

Test Graphs


PSD NVNT a 5180MHz Ant1

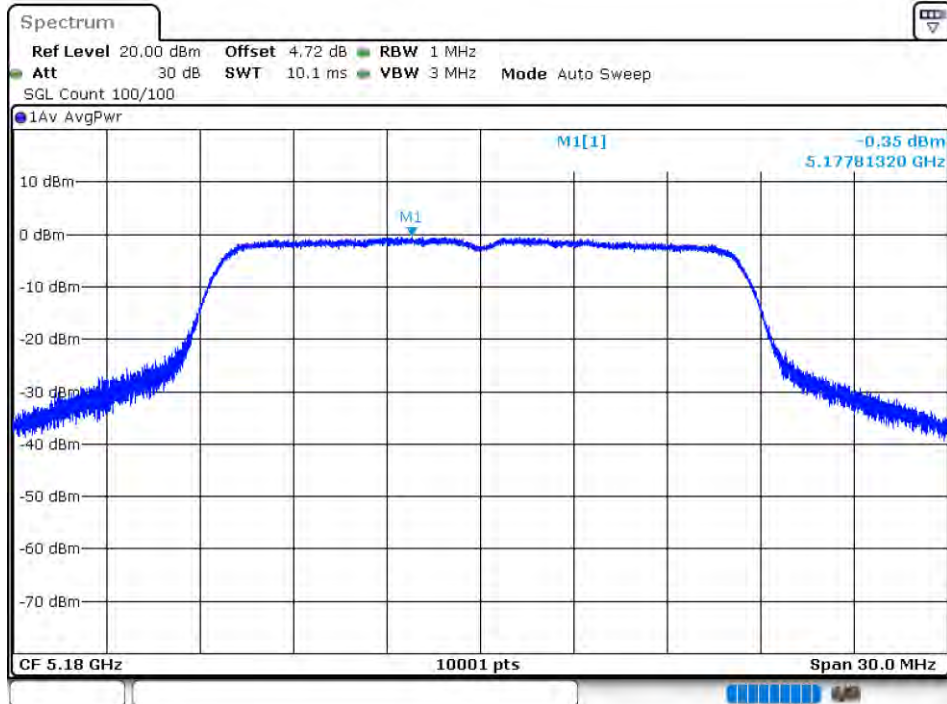


PSD NVNT a 5200MHz Ant1

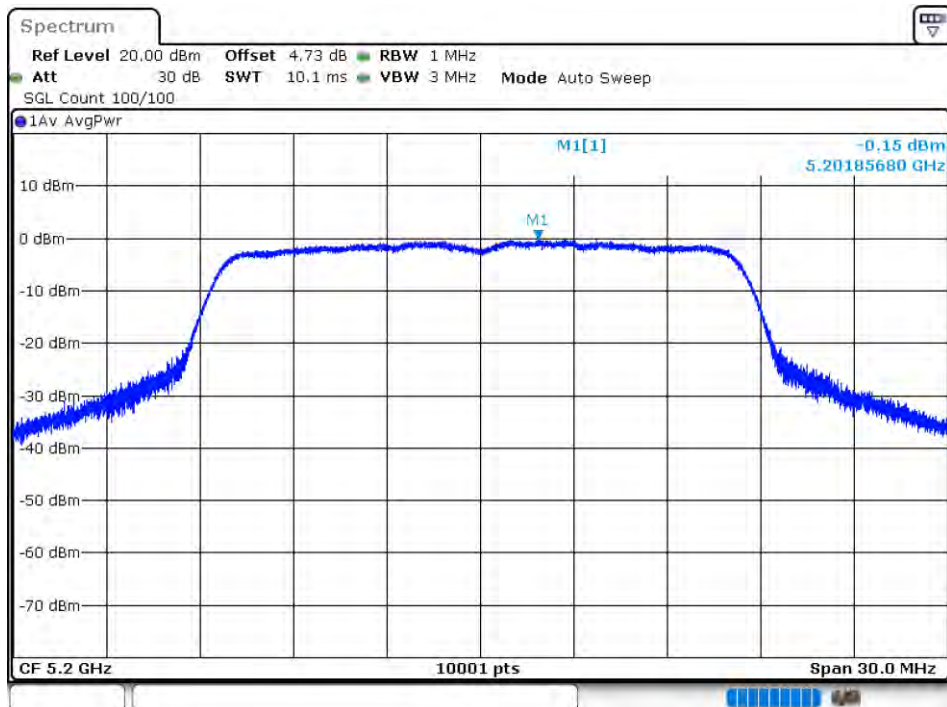



PSD NVNT a 5240MHz Ant1

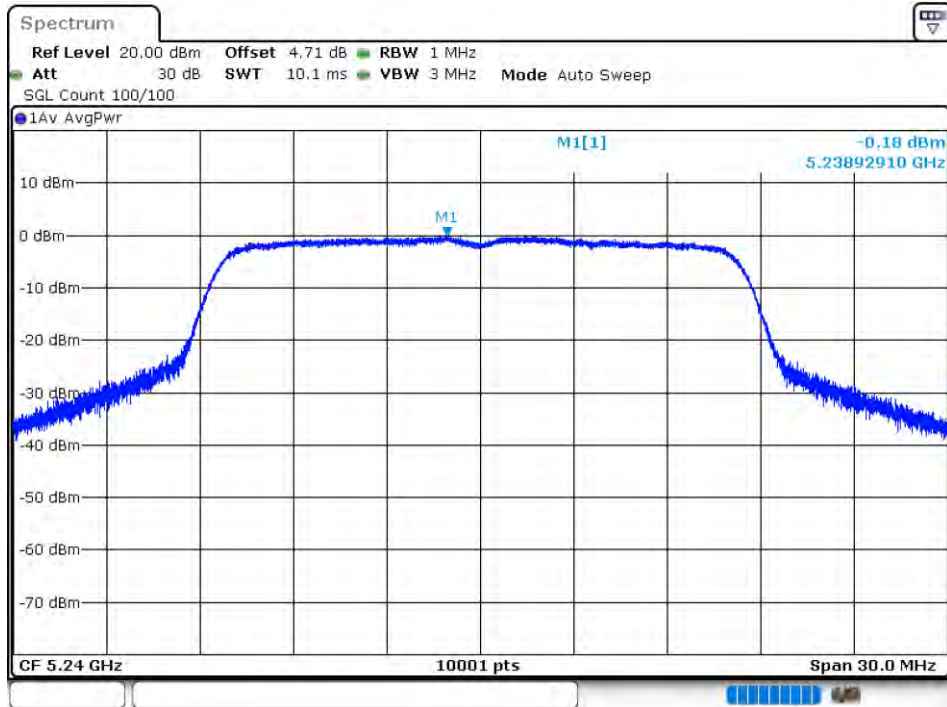



PSD NVNT n20 5180MHz Ant1

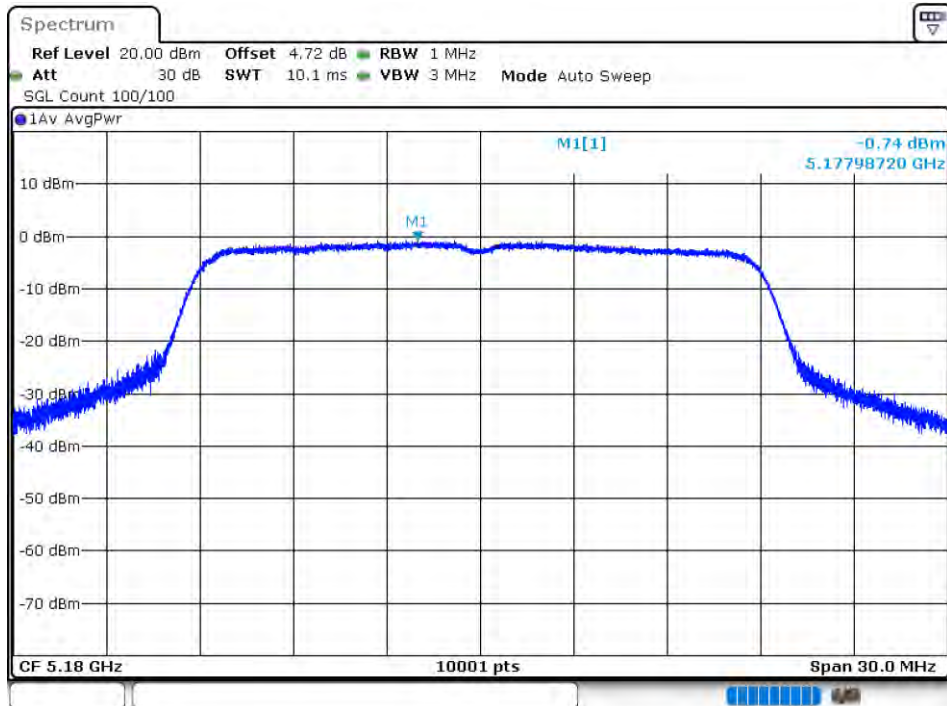


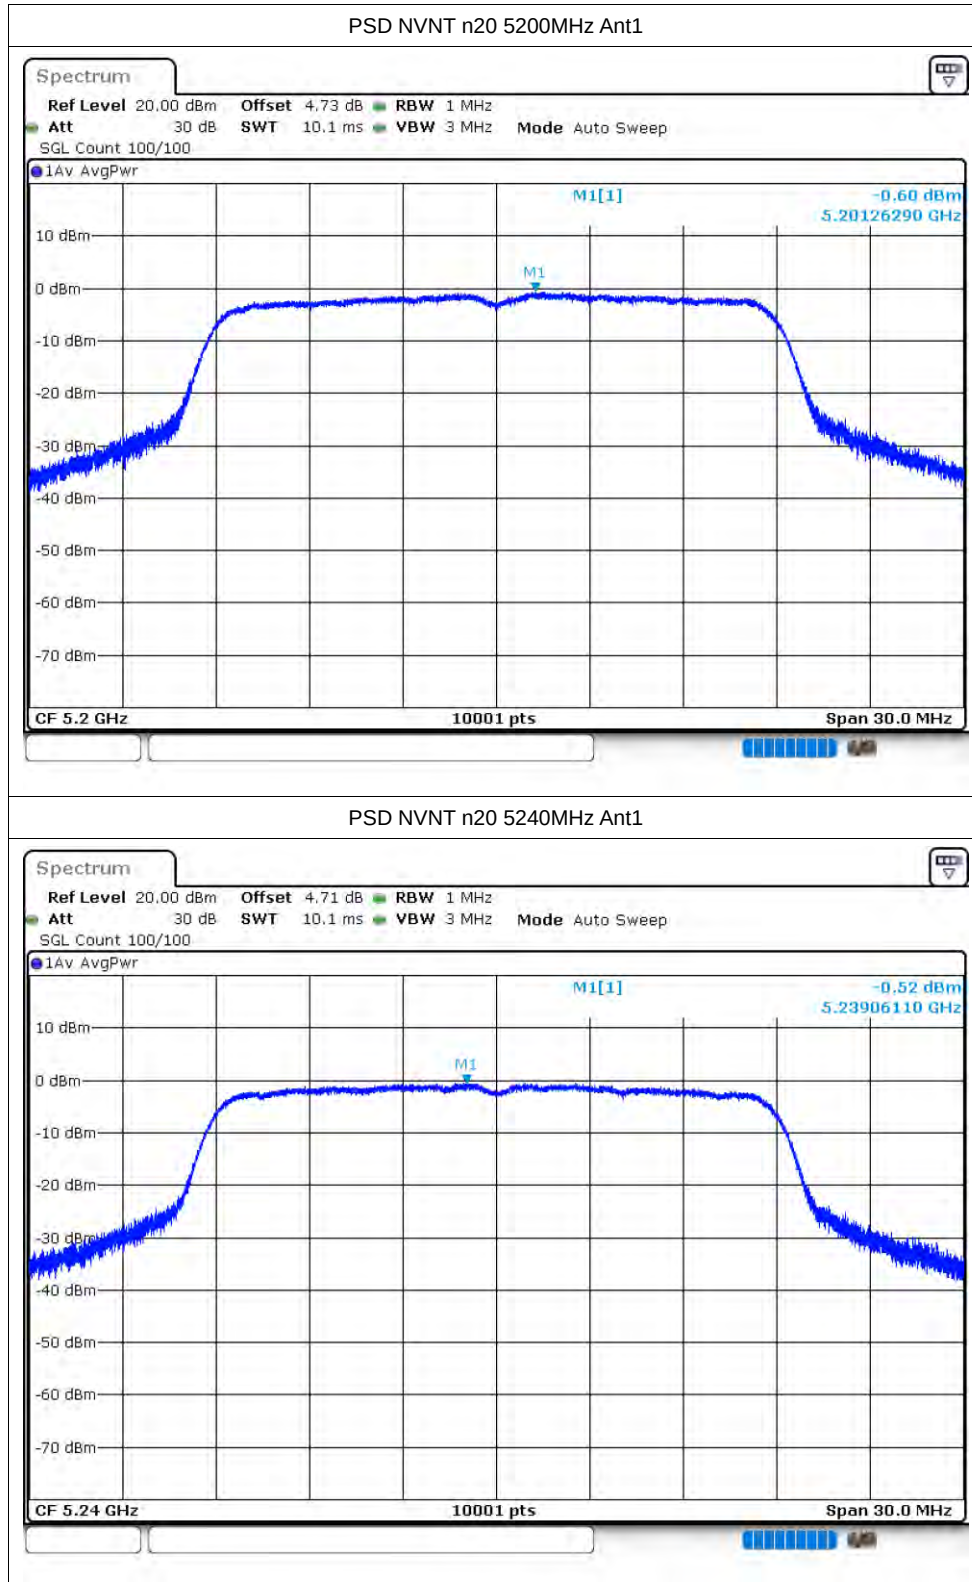


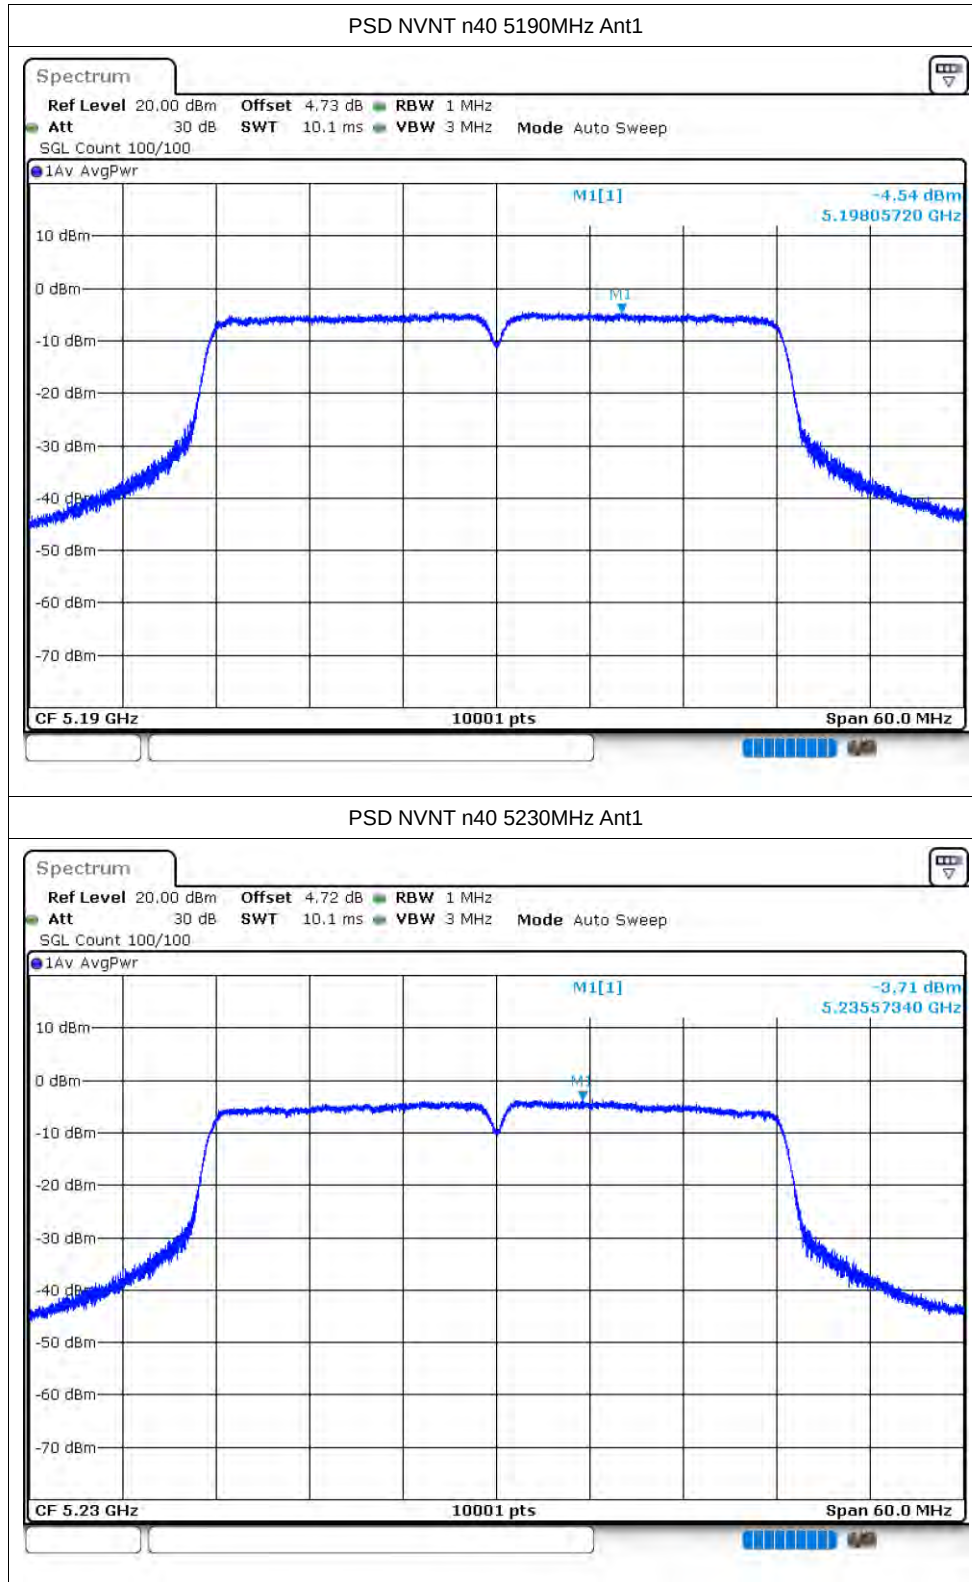


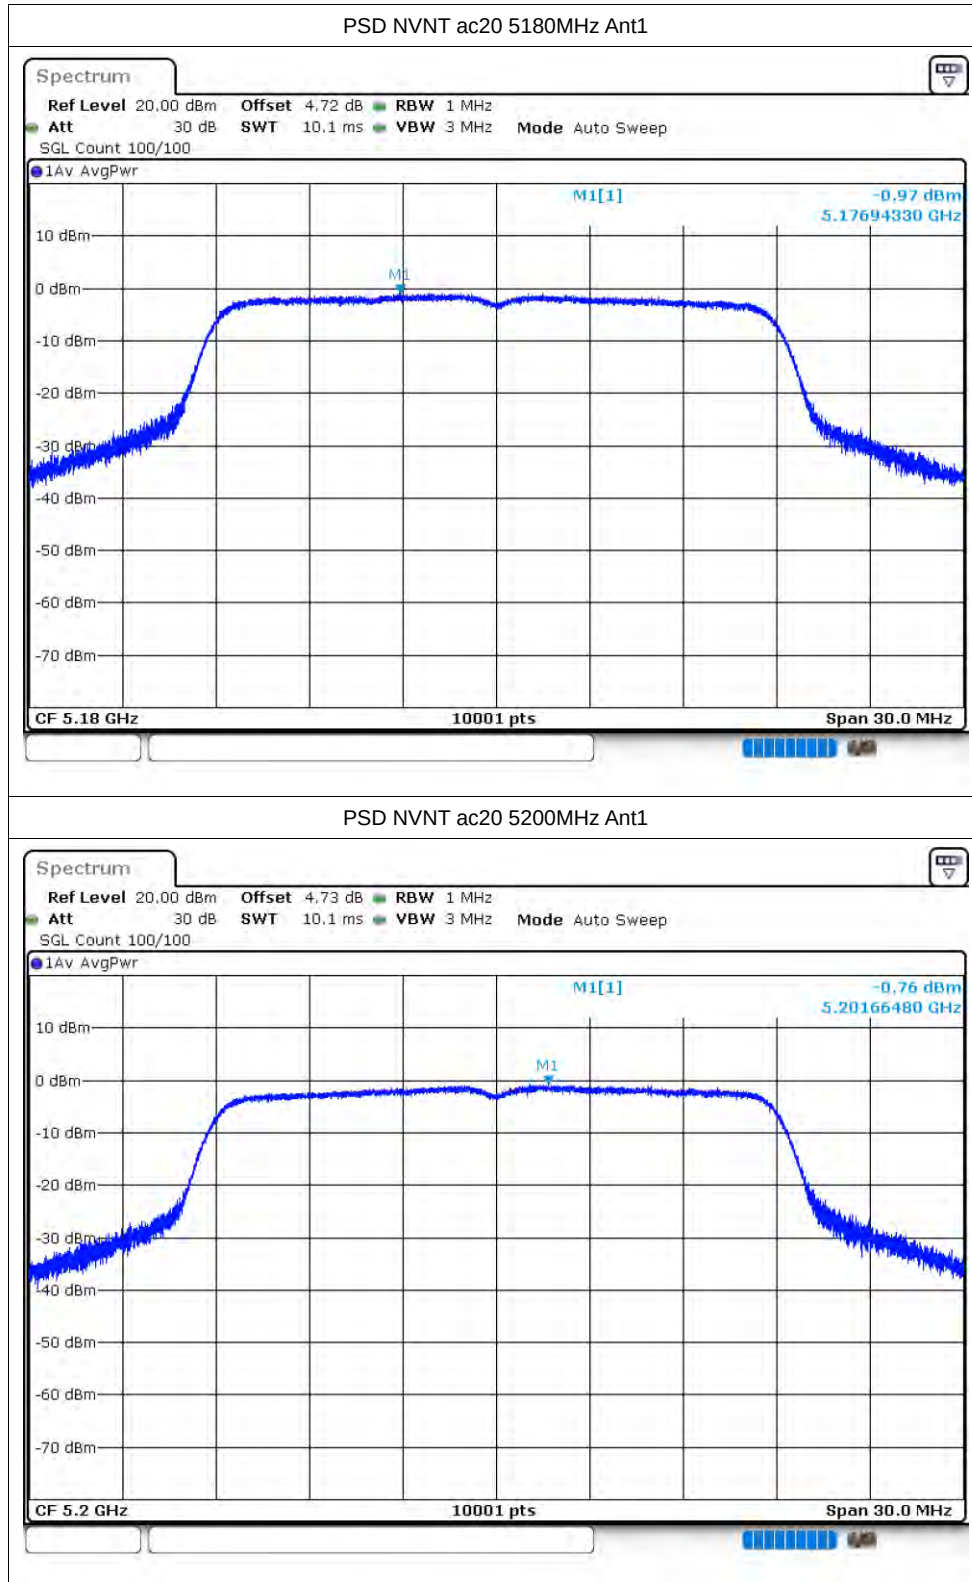

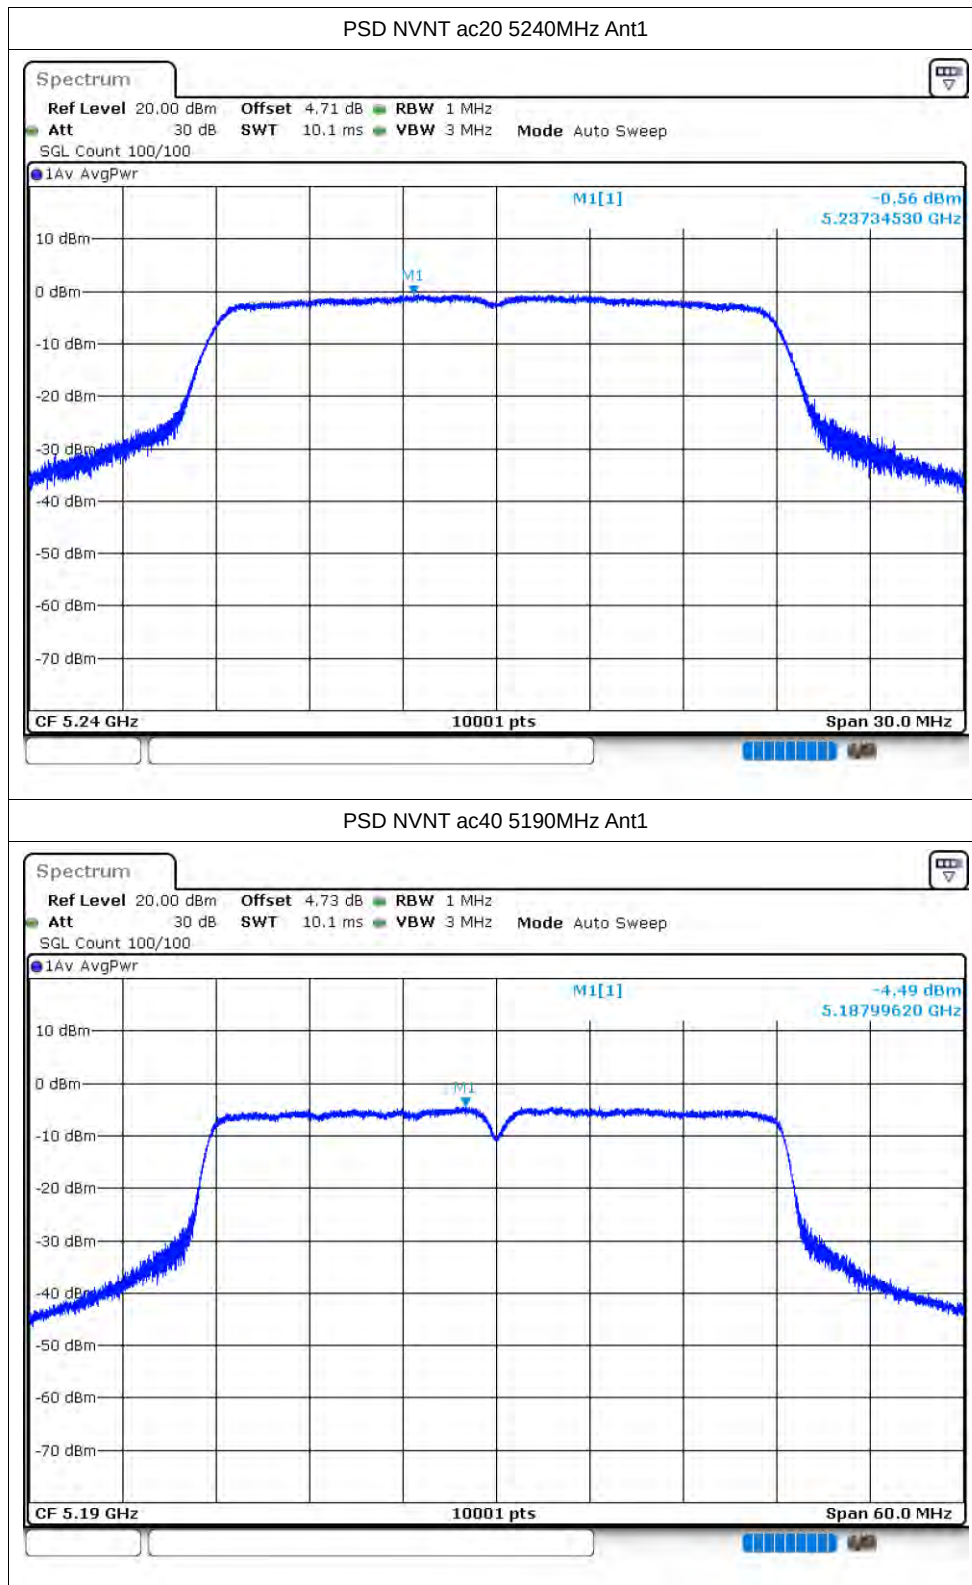

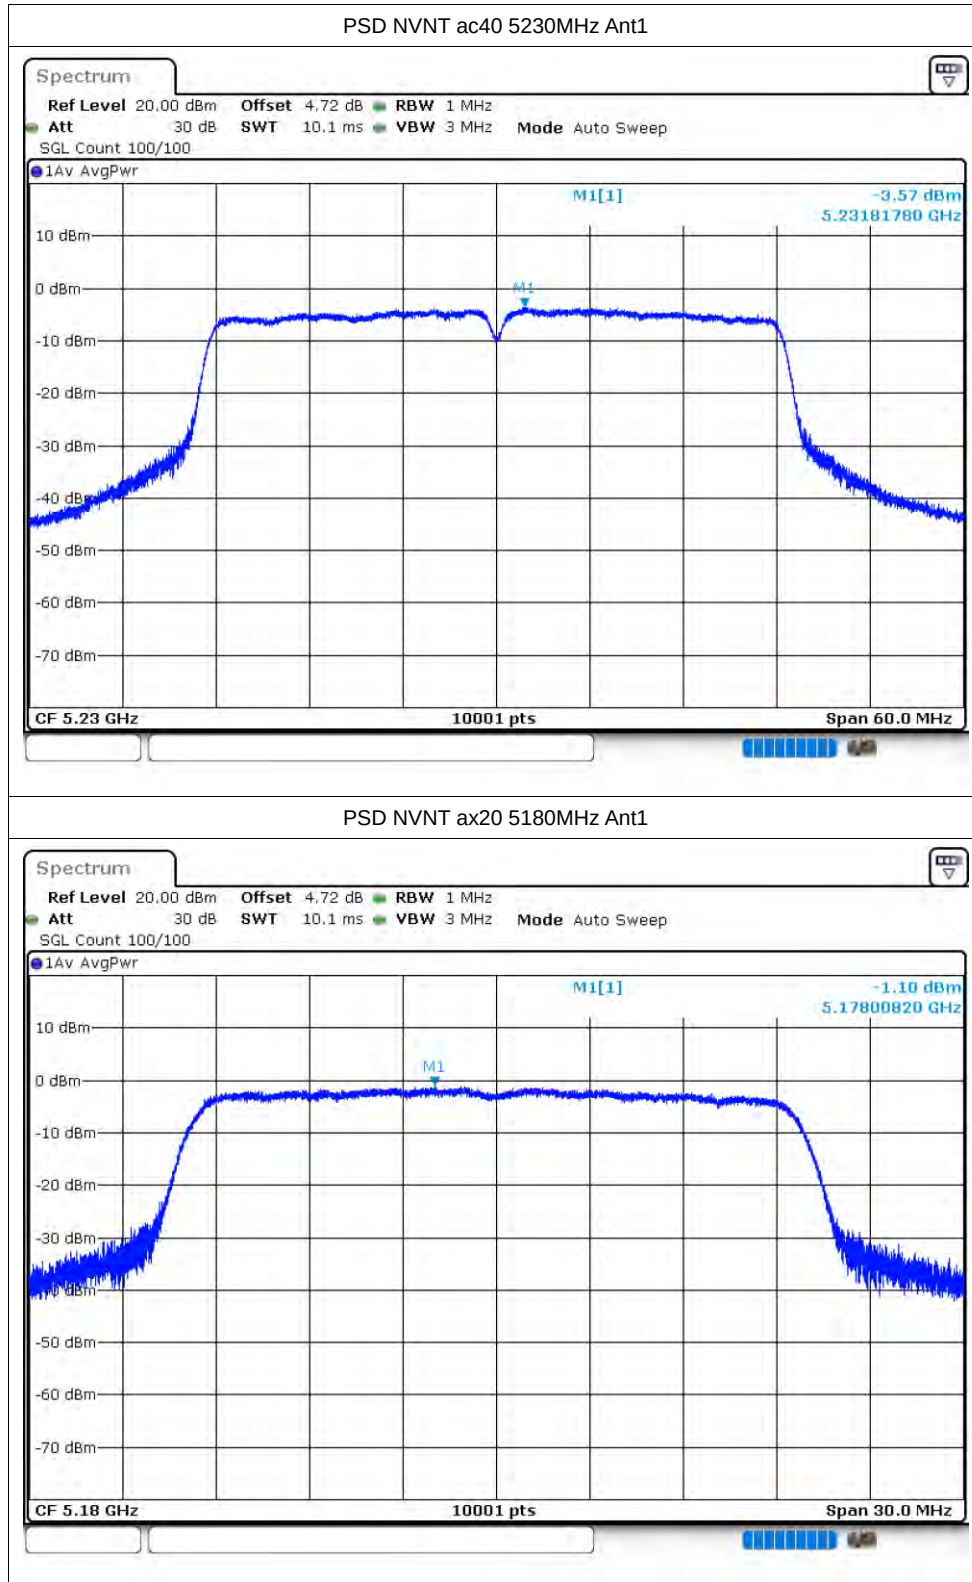

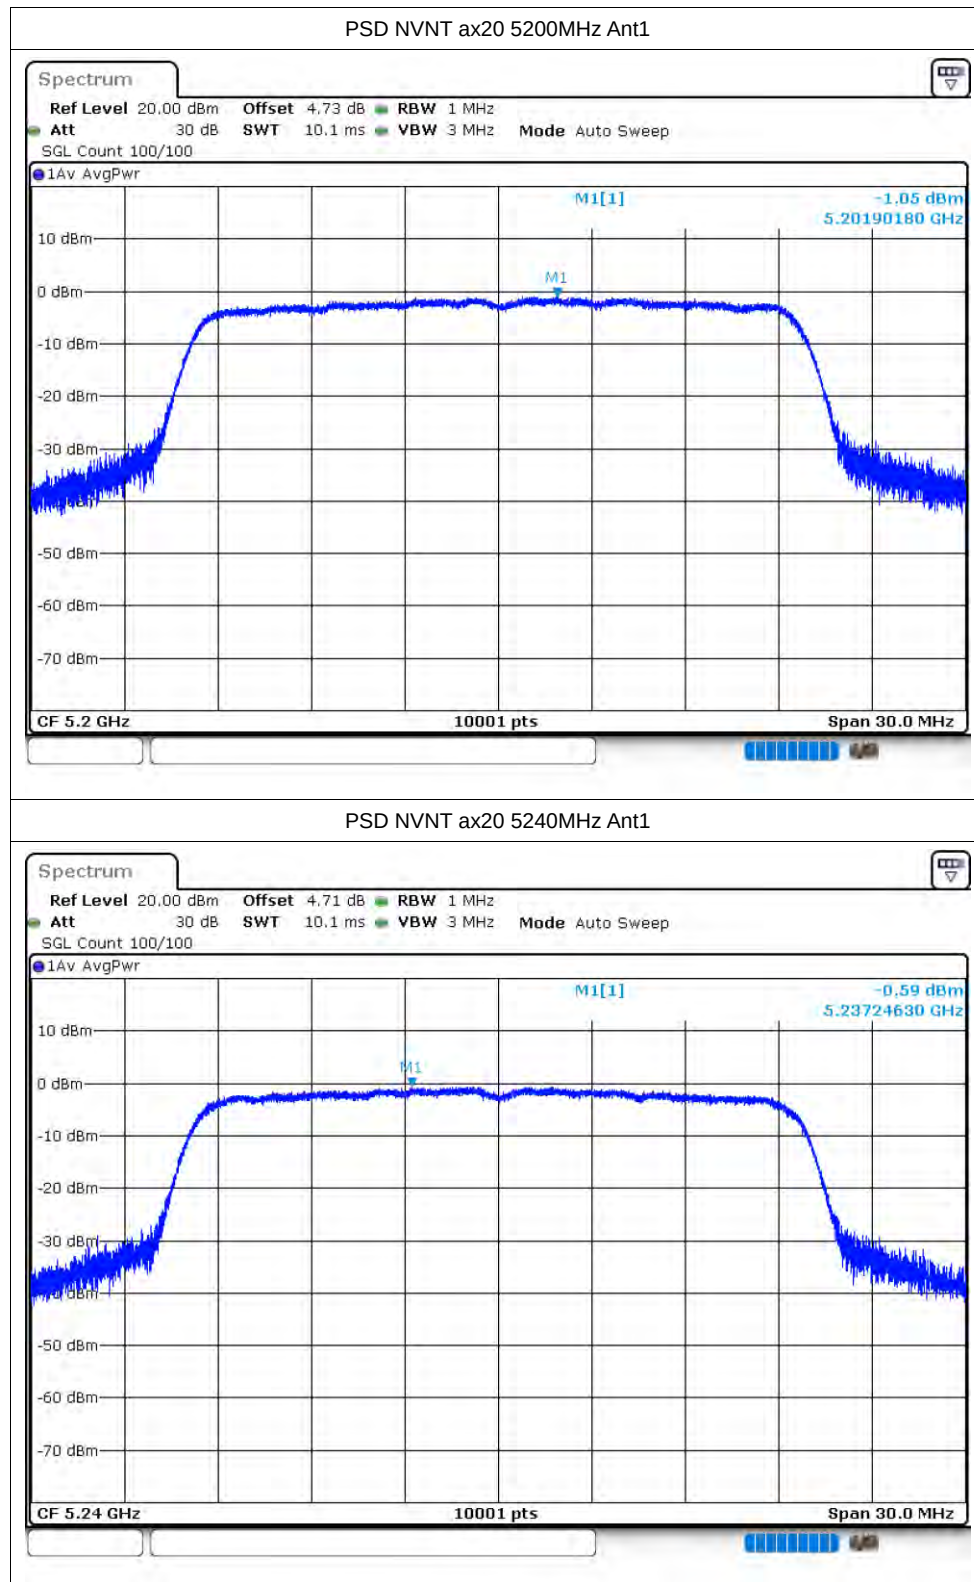

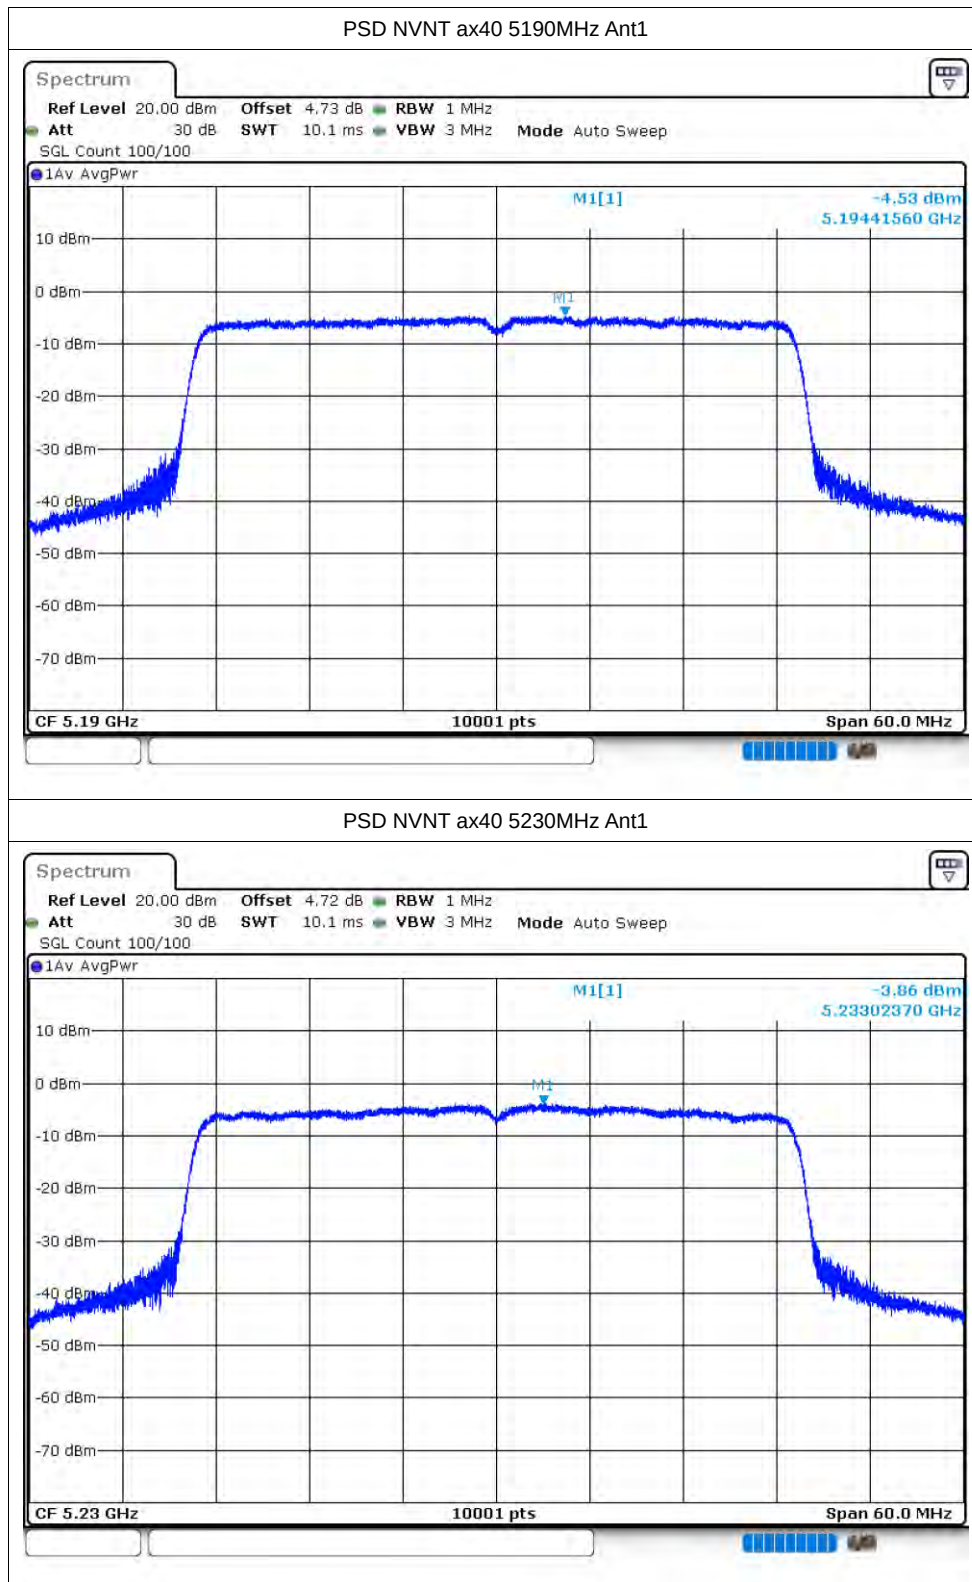


## Band Edge


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | -31.17          | -27         | Pass    |
| NVNT      | a    | 5240            | Ant1    | -37.42          | -27         | Pass    |
| NVNT      | n20  | 5180            | Ant1    | -28.16          | -27         | Pass    |
| NVNT      | n20  | 5240            | Ant1    | -36.62          | -27         | Pass    |
| NVNT      | n40  | 5190            | Ant1    | -27.01          | -27         | Pass    |
| NVNT      | n40  | 5230            | Ant1    | -37.61          | -27         | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | -31.61          | -27         | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | -37.93          | -27         | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | -27.62          | -27         | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | -38.49          | -27         | Pass    |
| NVNT      | ax20 | 5180            | Ant1    | -31.69          | -27         | Pass    |
| NVNT      | ax20 | 5240            | Ant1    | -38.12          | -27         | Pass    |
| NVNT      | ax40 | 5190            | Ant1    | -28.17          | -27         | Pass    |
| NVNT      | ax40 | 5230            | Ant1    | -37.46          | -27         | Pass    |

Test Graphs


Band Edge NVNT a 5180MHz Low Ant1

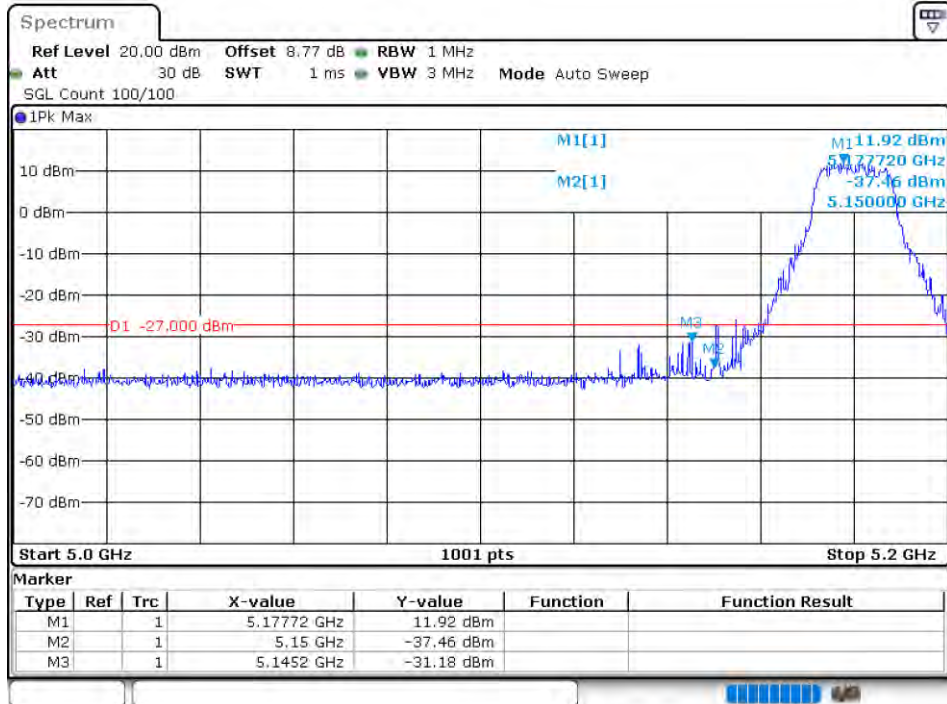


Band Edge NVNT a 5240MHz High Ant1

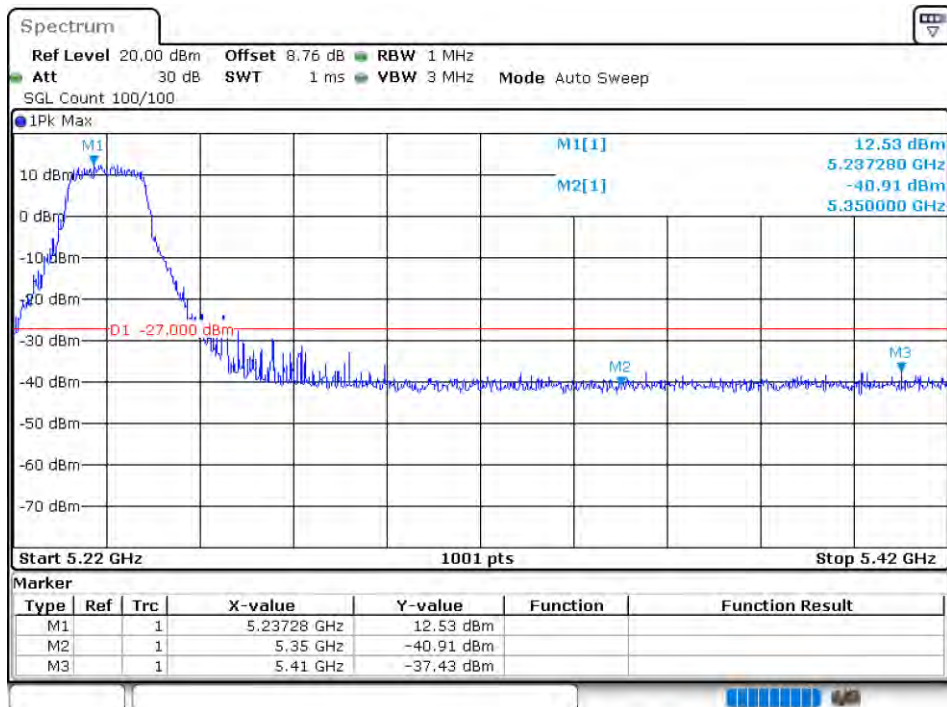


Band Edge NVNT n20 5180MHz Low Ant1

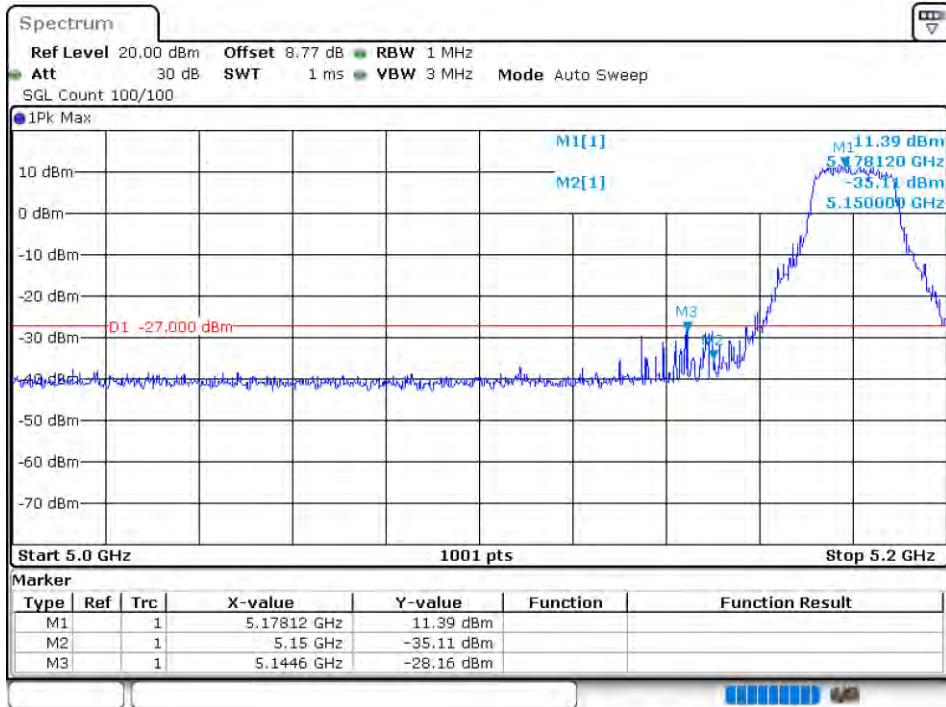


Band Edge NVNT n20 5240MHz High Ant1

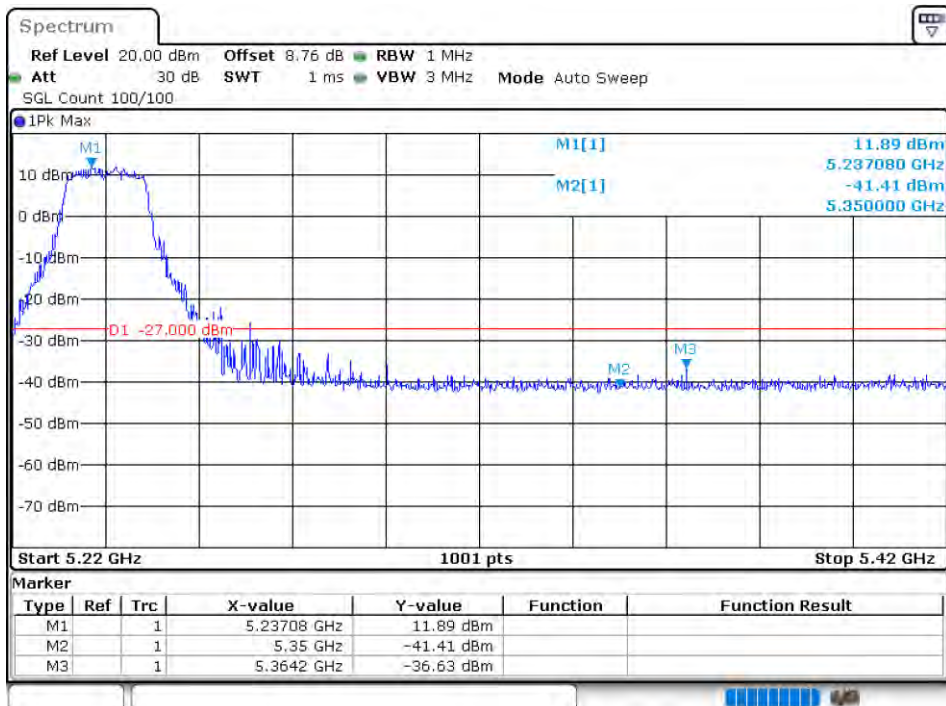


Band Edge NVNT n40 5190MHz Low Ant1

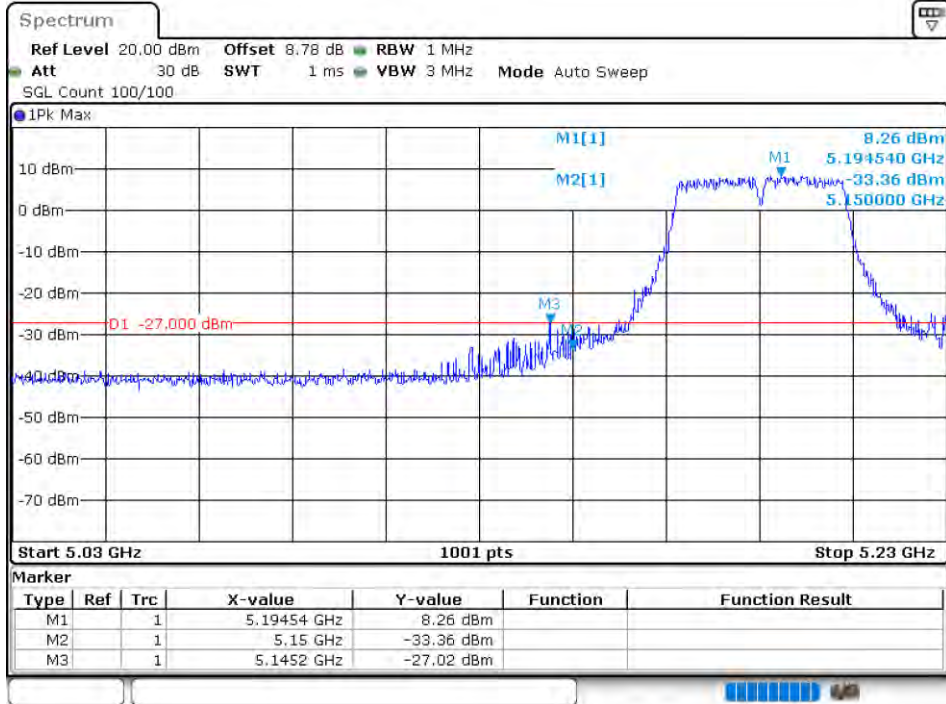


Band Edge NVNT n40 5230MHz High Ant1

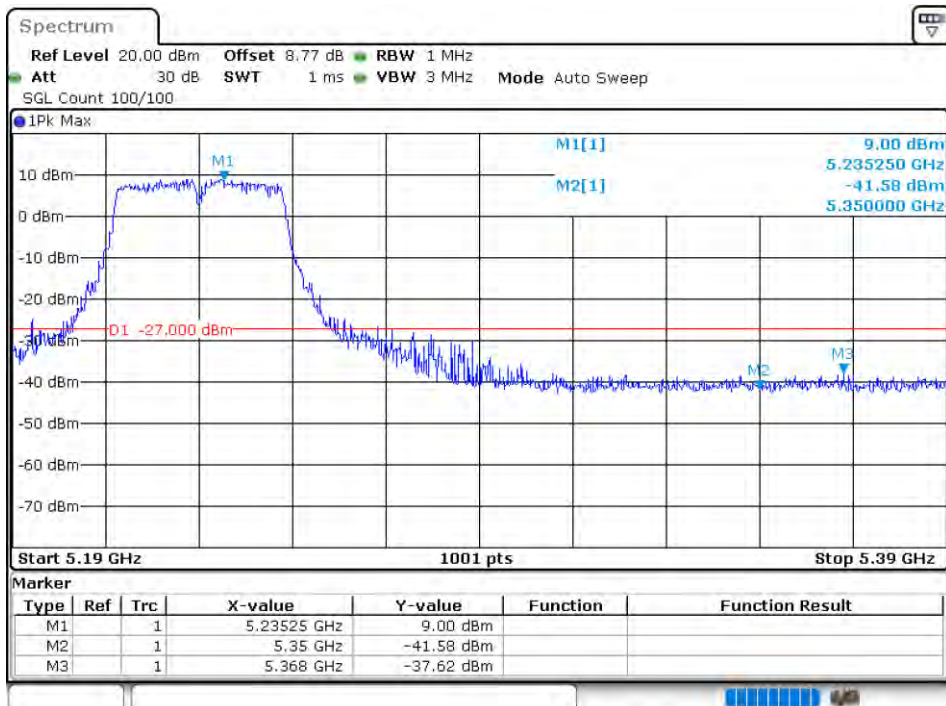


Band Edge NVNT ac20 5180MHz Low Ant1

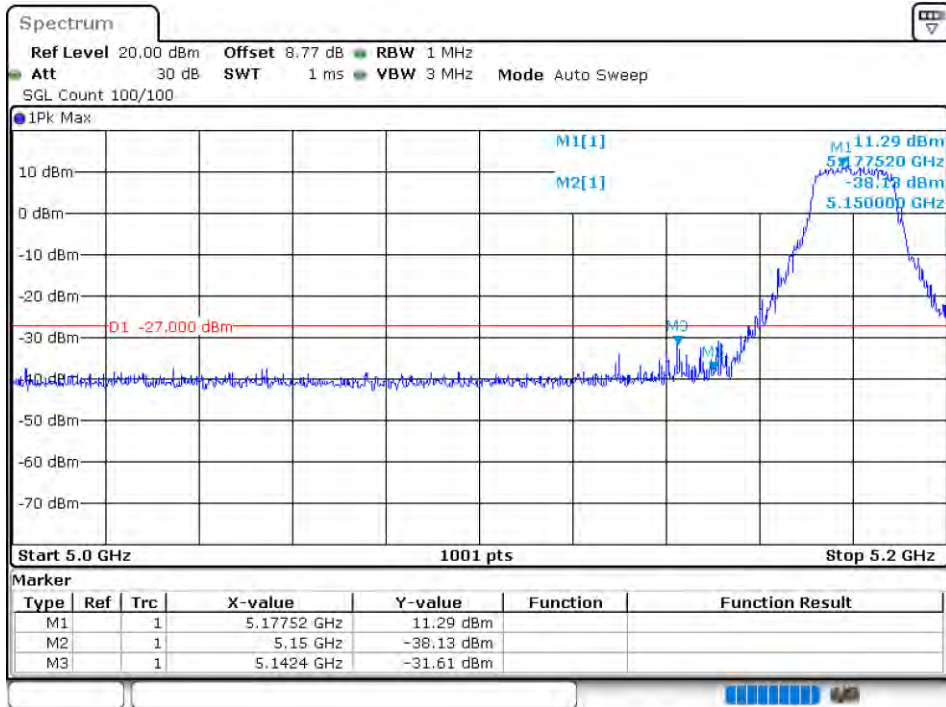


Band Edge NVNT ac20 5240MHz High Ant1

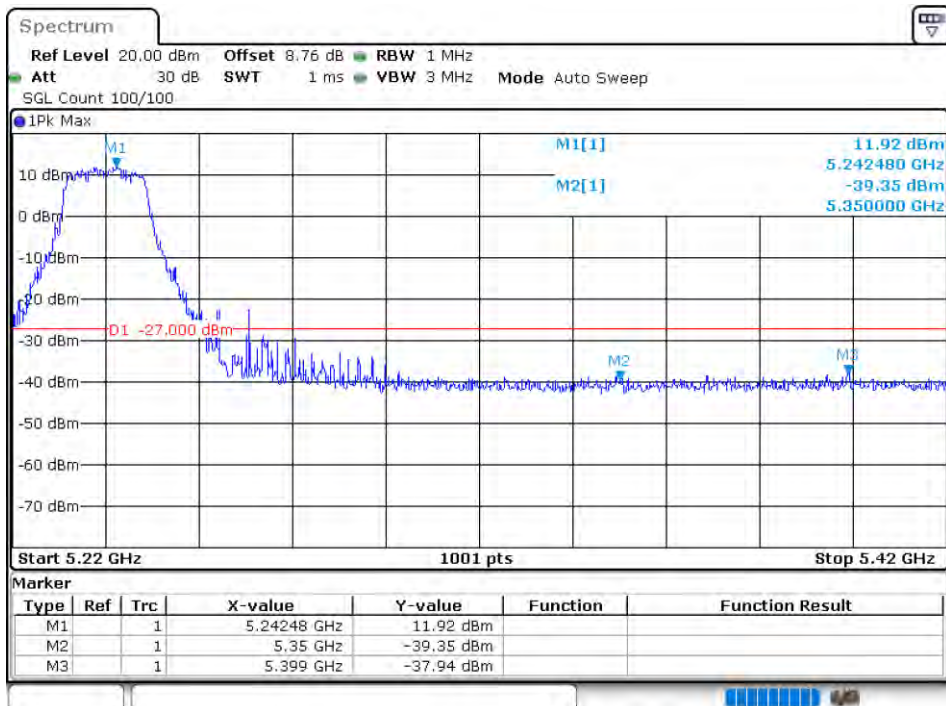


Band Edge NVNT ac40 5190MHz Low Ant1

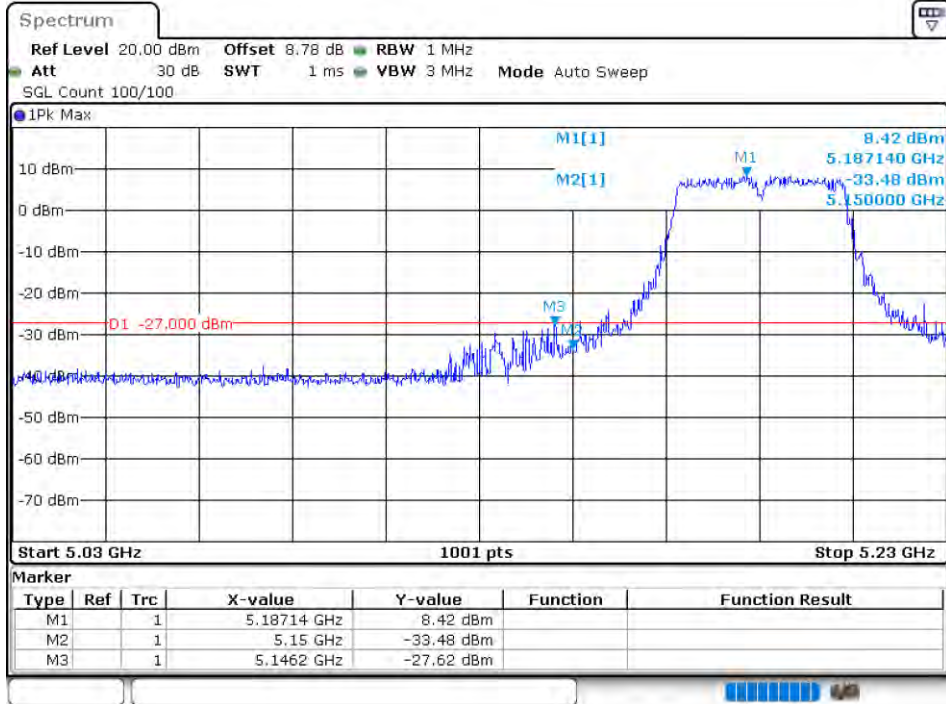


Band Edge NVNT ac40 5230MHz High Ant1

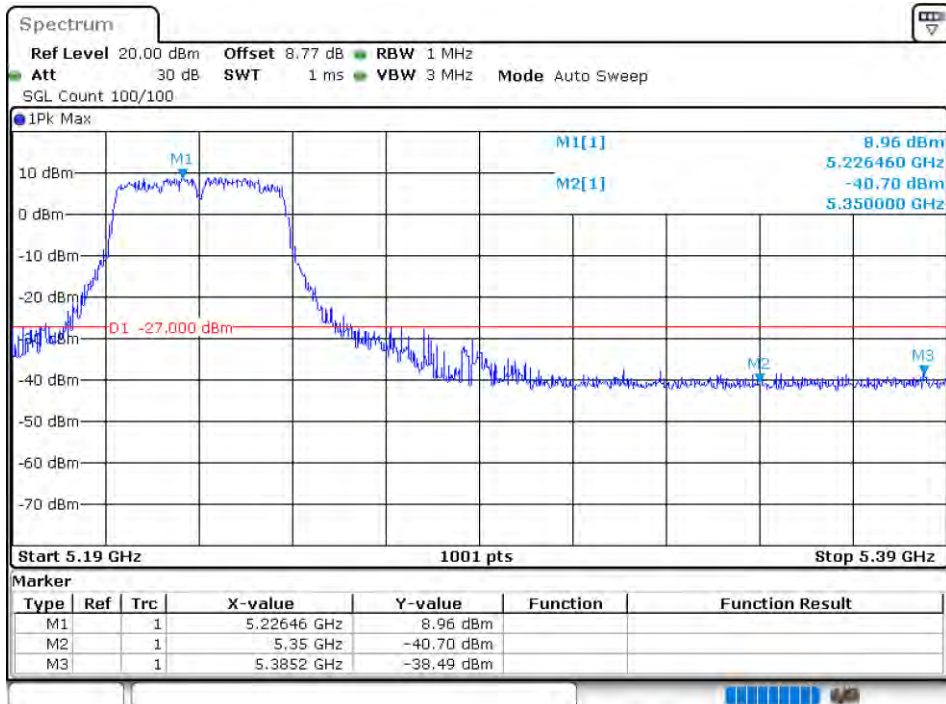


## Band Edge NVNT ax20 5180MHz Low Ant1

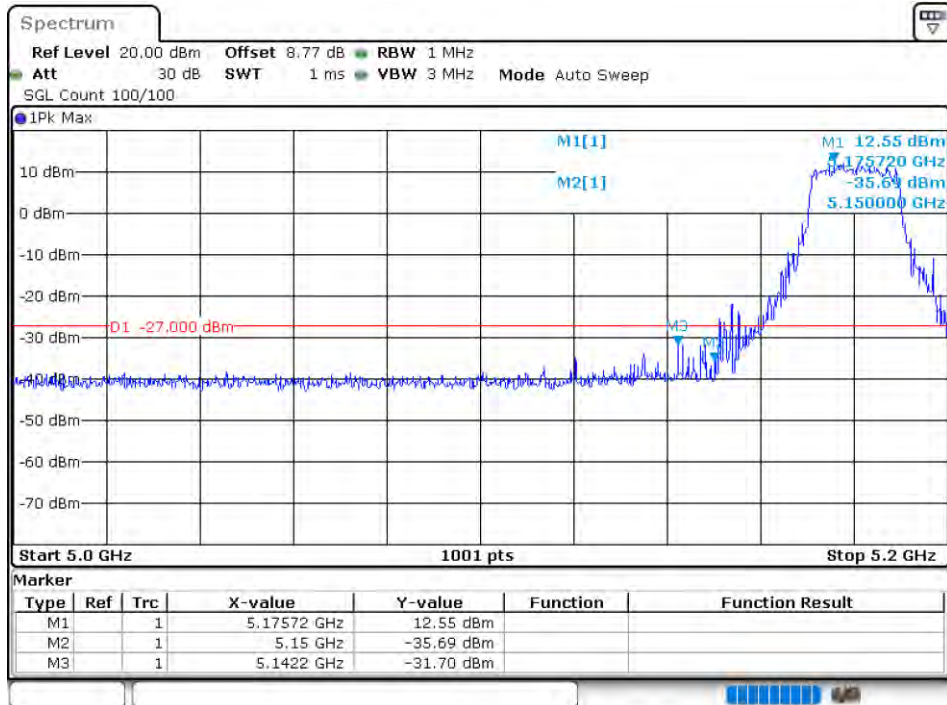


## Band Edge NVNT ax20 5240MHz High Ant1

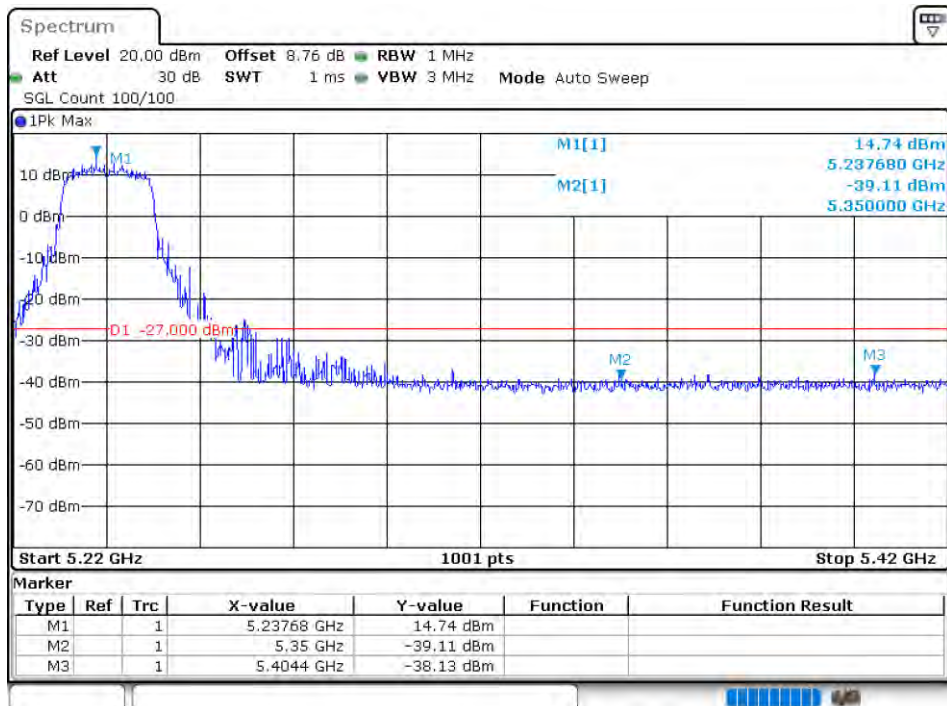

Band Edge NVNT ax40 5190MHz Low Ant1

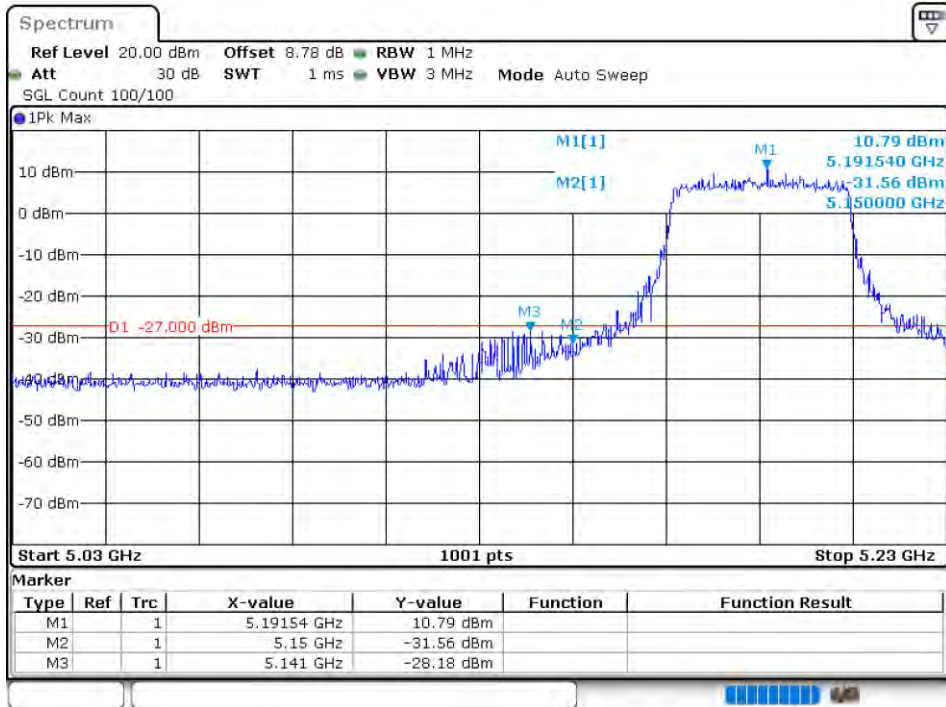

Band Edge NVNT ax40 5230MHz High Ant1

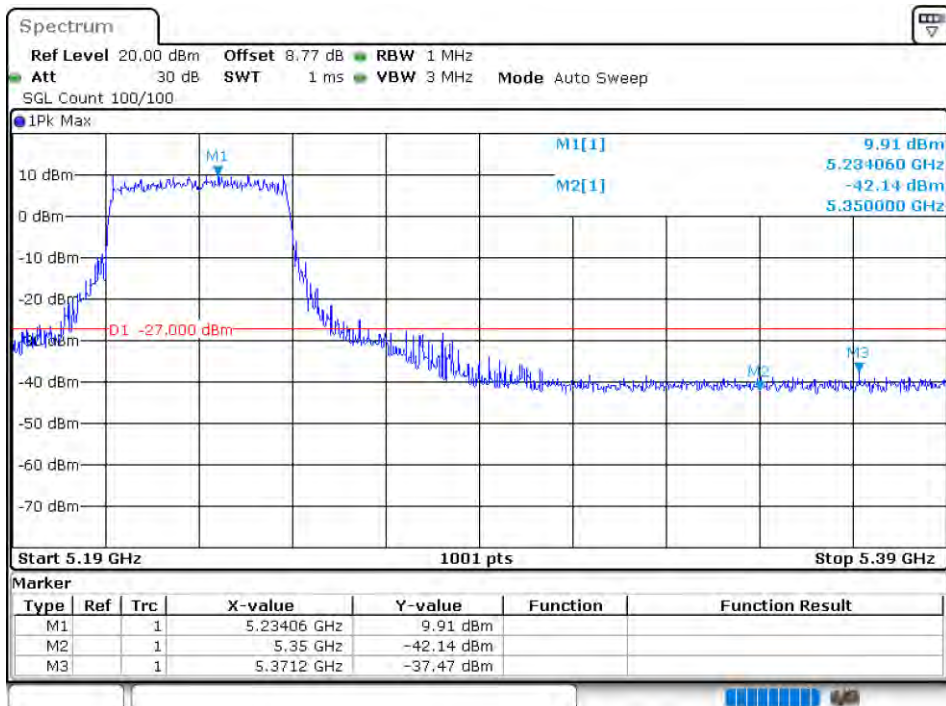


## Conducted RF Spurious Emission


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | -32.29          | -27         | Pass    |
| NVNT      | a    | 5200            | Ant1    | -32.12          | -27         | Pass    |
| NVNT      | a    | 5240            | Ant1    | -31.49          | -27         | Pass    |
| NVNT      | n20  | 5180            | Ant1    | -32.18          | -27         | Pass    |
| NVNT      | n20  | 5200            | Ant1    | -32.42          | -27         | Pass    |
| NVNT      | n20  | 5240            | Ant1    | -32.15          | -27         | Pass    |
| NVNT      | n40  | 5190            | Ant1    | -32.94          | -27         | Pass    |
| NVNT      | n40  | 5230            | Ant1    | -31.8           | -27         | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | -32.18          | -27         | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | -31.52          | -27         | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | -31.89          | -27         | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | -31.53          | -27         | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | -32.76          | -27         | Pass    |
| NVNT      | ax20 | 5180            | Ant1    | -31.71          | -27         | Pass    |
| NVNT      | ax20 | 5200            | Ant1    | -31.8           | -27         | Pass    |
| NVNT      | ax20 | 5240            | Ant1    | -32.33          | -27         | Pass    |
| NVNT      | ax40 | 5190            | Ant1    | -31.85          | -27         | Pass    |
| NVNT      | ax40 | 5230            | Ant1    | -32.36          | -27         | Pass    |

Test Graphs


Tx. Spurious NVNT a 5180MHz Ant1 Emission

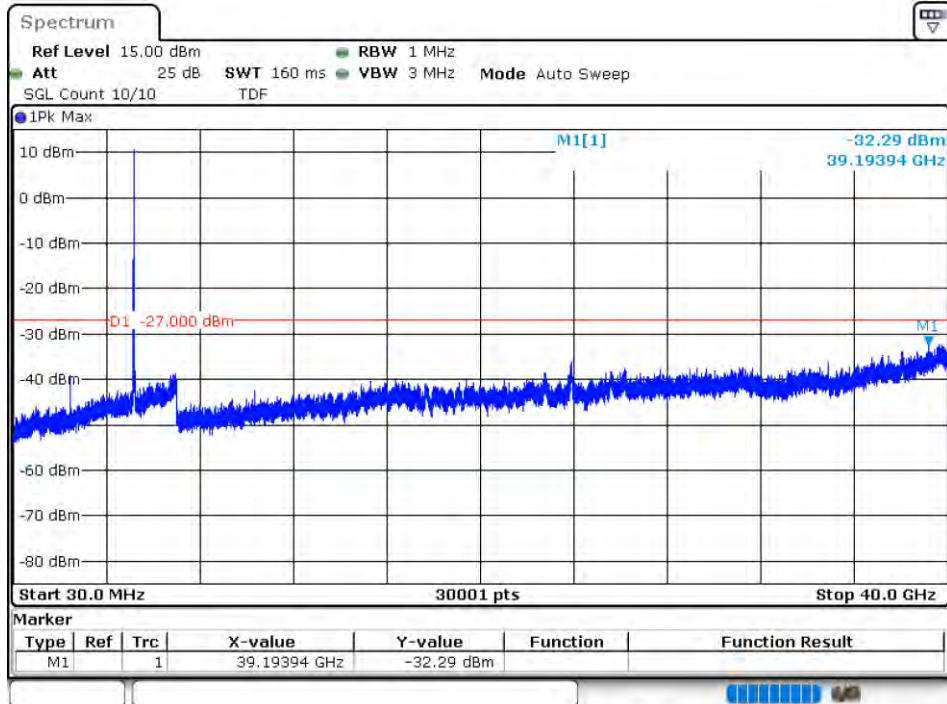


Tx. Spurious NVNT a 5200MHz Ant1 Emission

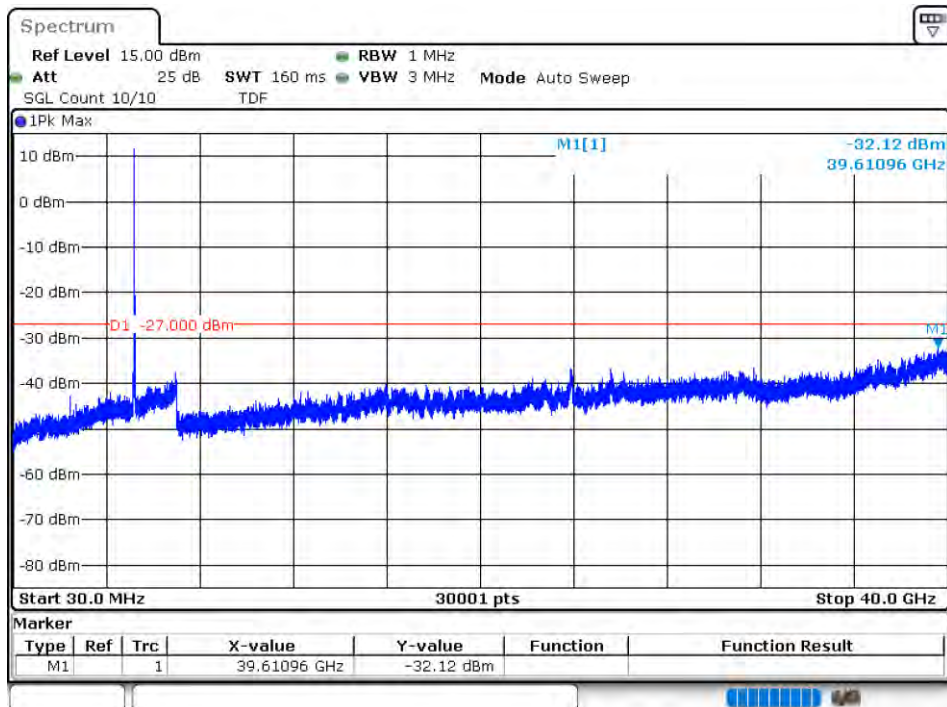


Tx. Spurious NVNT a 5240MHz Ant1 Emission

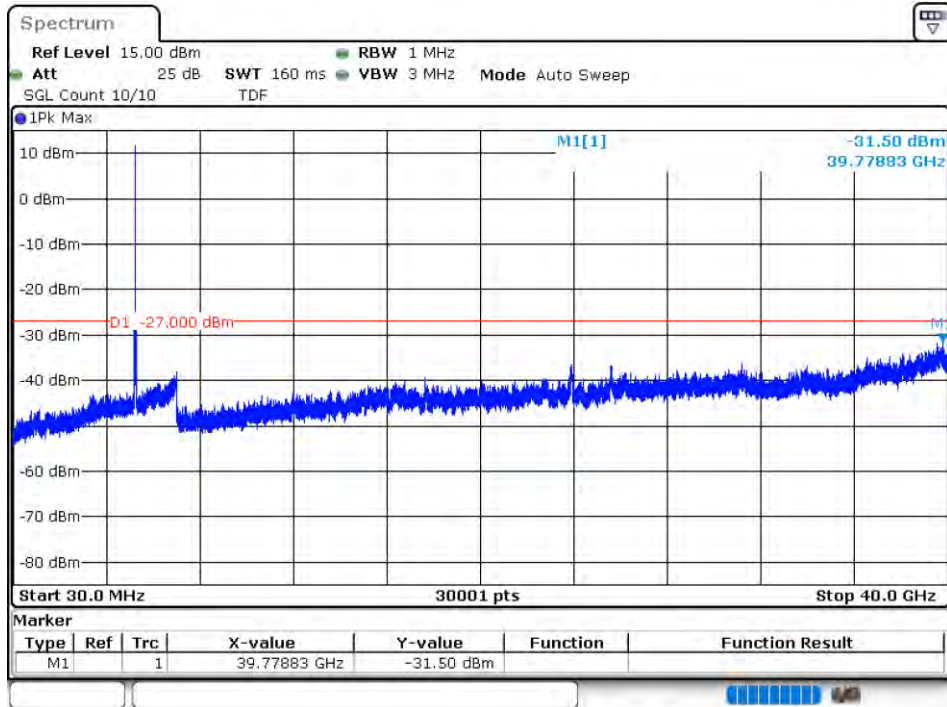


Tx. Spurious NVNT n20 5180MHz Ant1 Emission

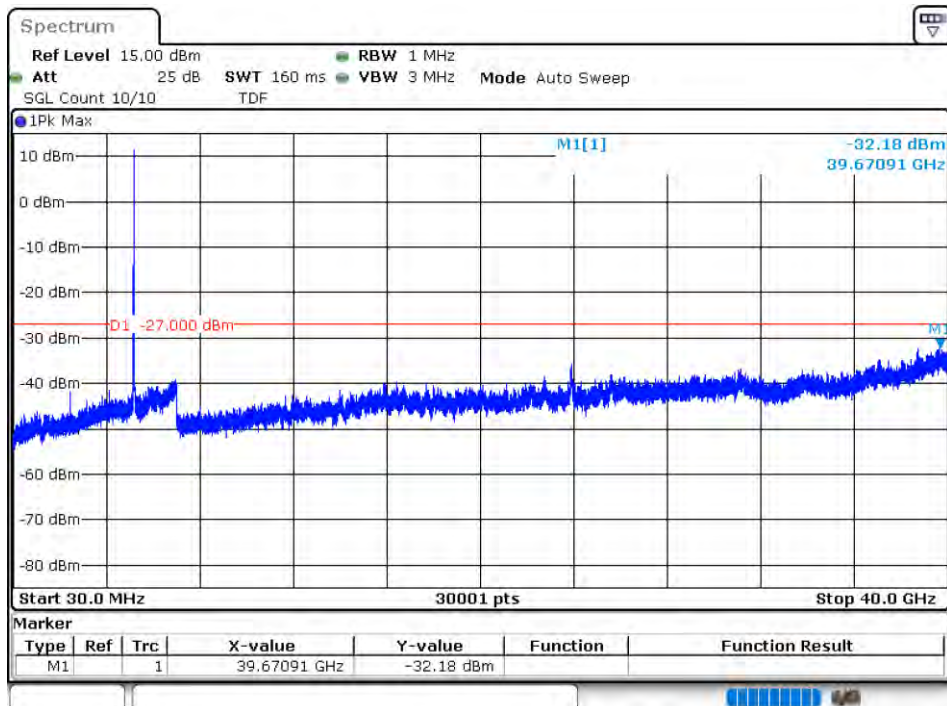


Tx. Spurious NVNT n20 5200MHz Ant1 Emission

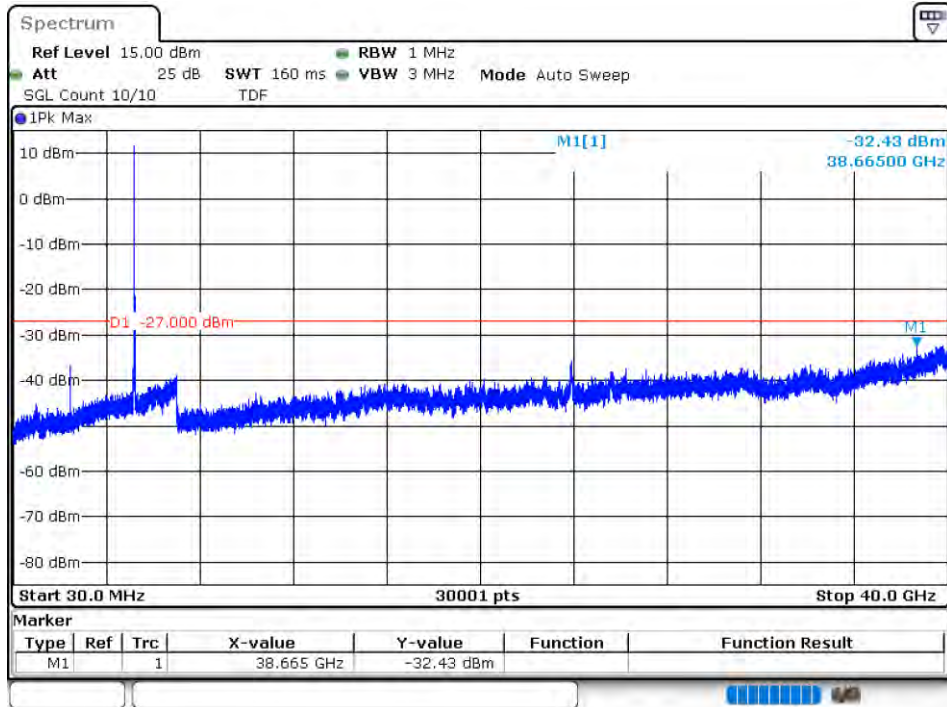


Tx. Spurious NVNT n20 5240MHz Ant1 Emission

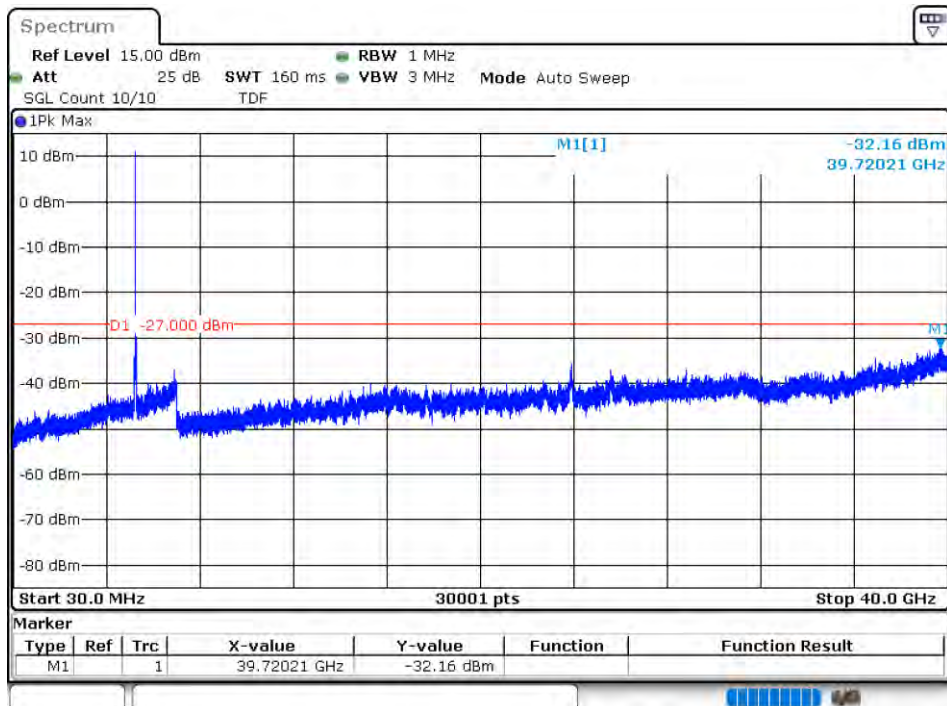


Tx. Spurious NVNT n40 5190MHz Ant1 Emission

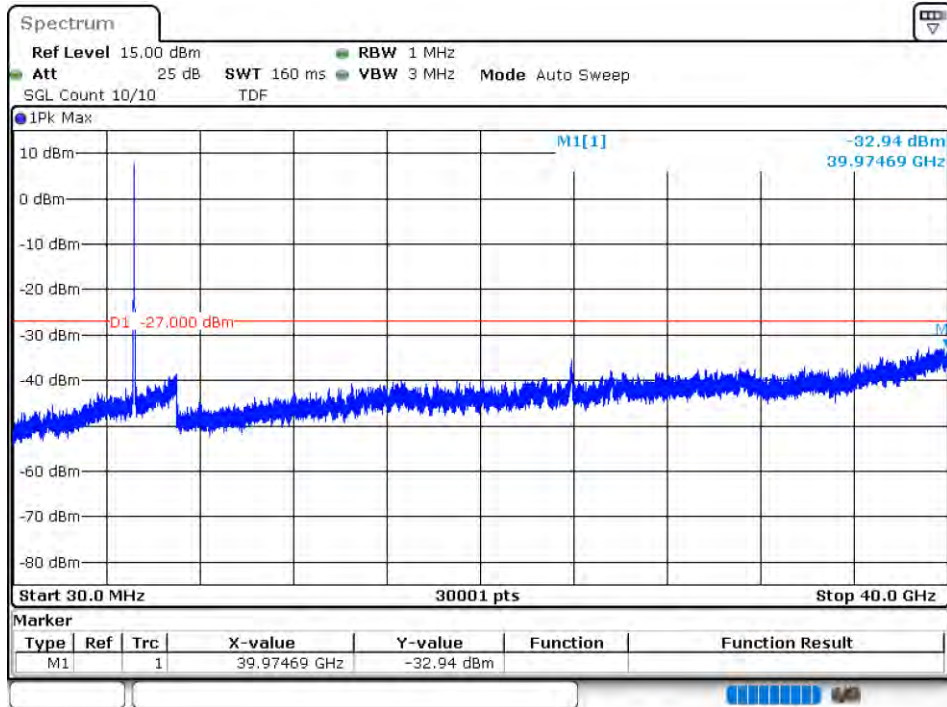


Tx. Spurious NVNT n40 5230MHz Ant1 Emission

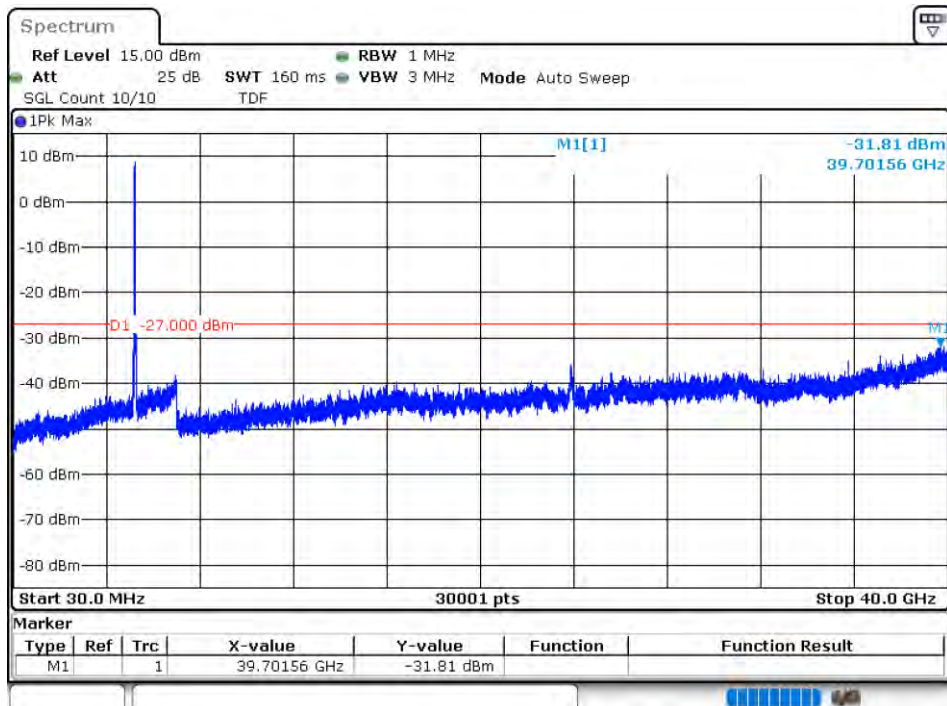


Tx. Spurious NVNT ac20 5180MHz Ant1 Emission

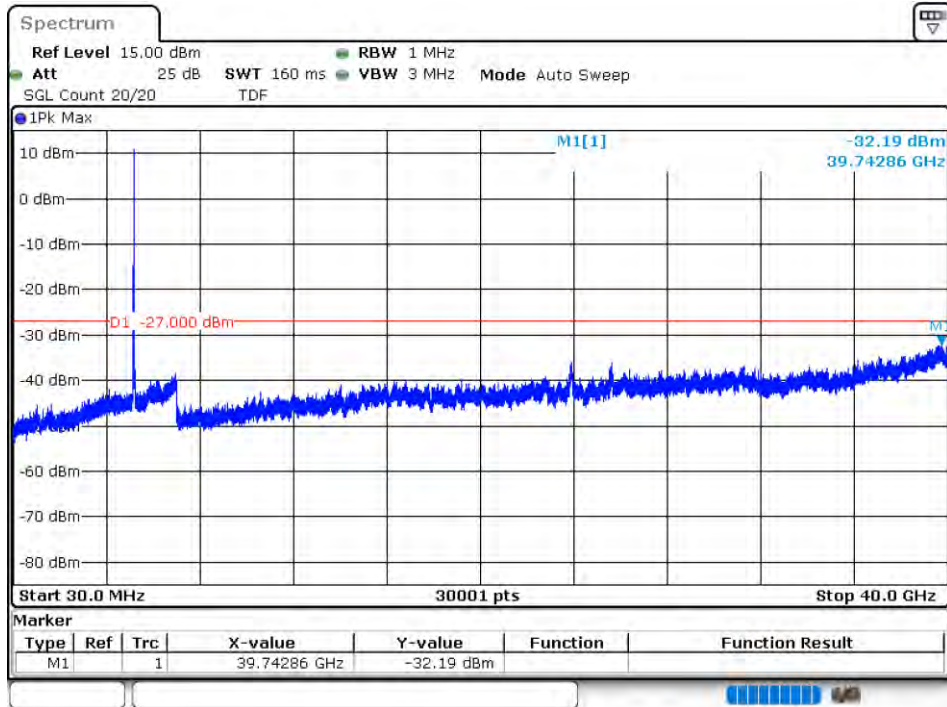


Tx. Spurious NVNT ac20 5200MHz Ant1 Emission

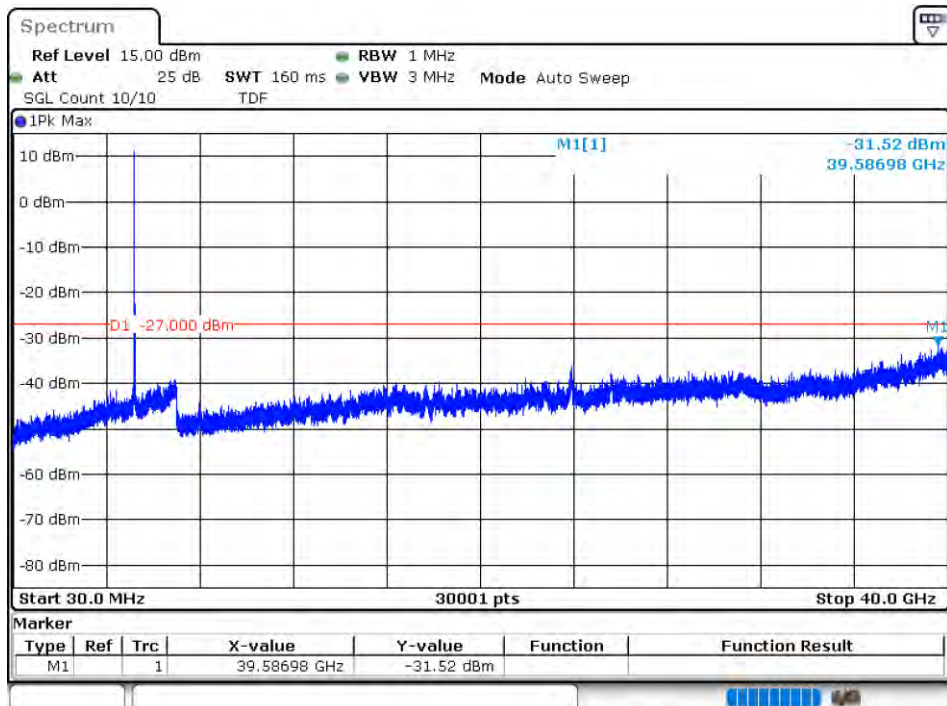


Tx. Spurious NVNT ac20 5240MHz Ant1 Emission

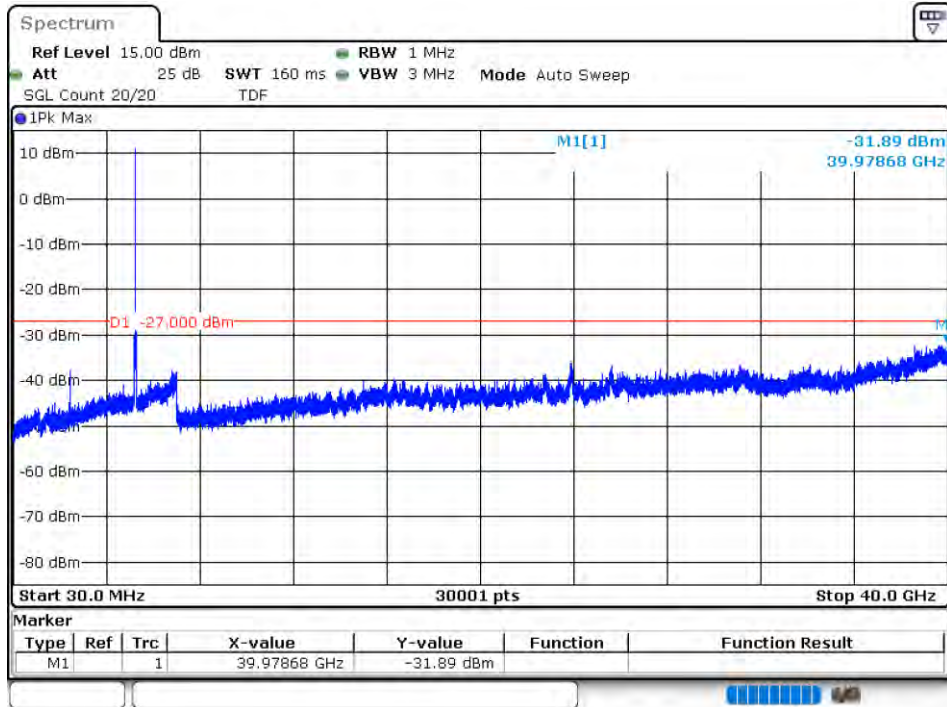


Tx. Spurious NVNT ac40 5190MHz Ant1 Emission

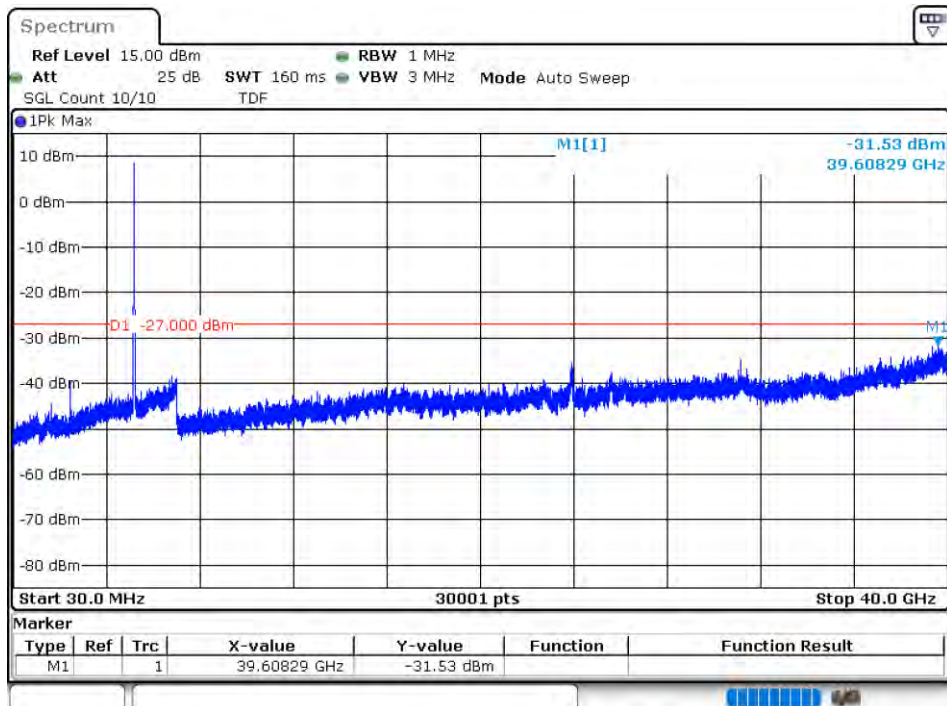


Tx. Spurious NVNT ac40 5230MHz Ant1 Emission

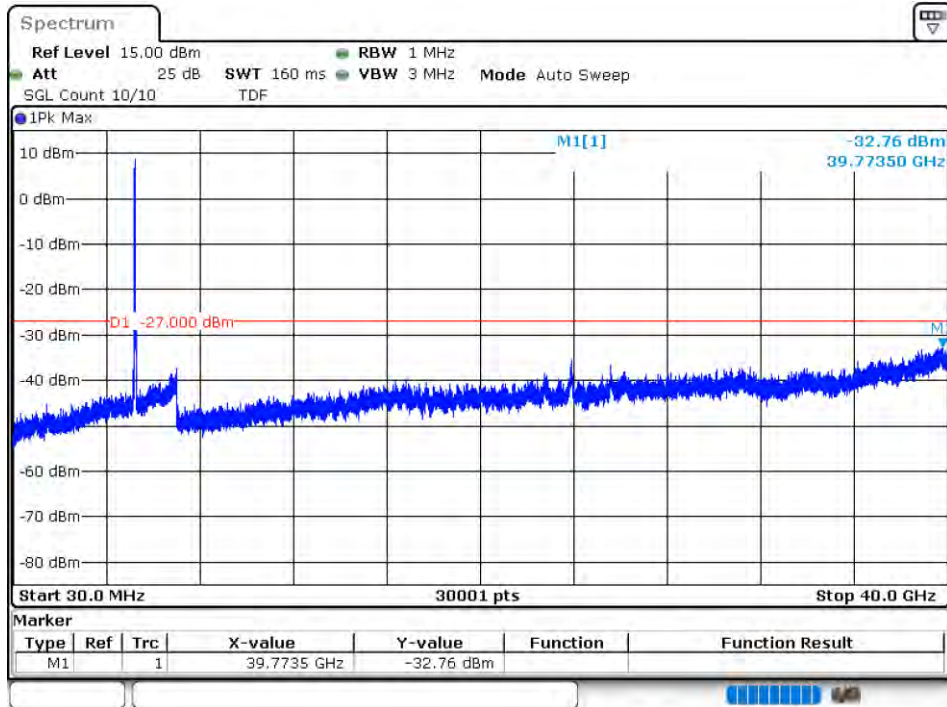


Tx. Spurious NVNT ax20 5180MHz Ant1 Emission

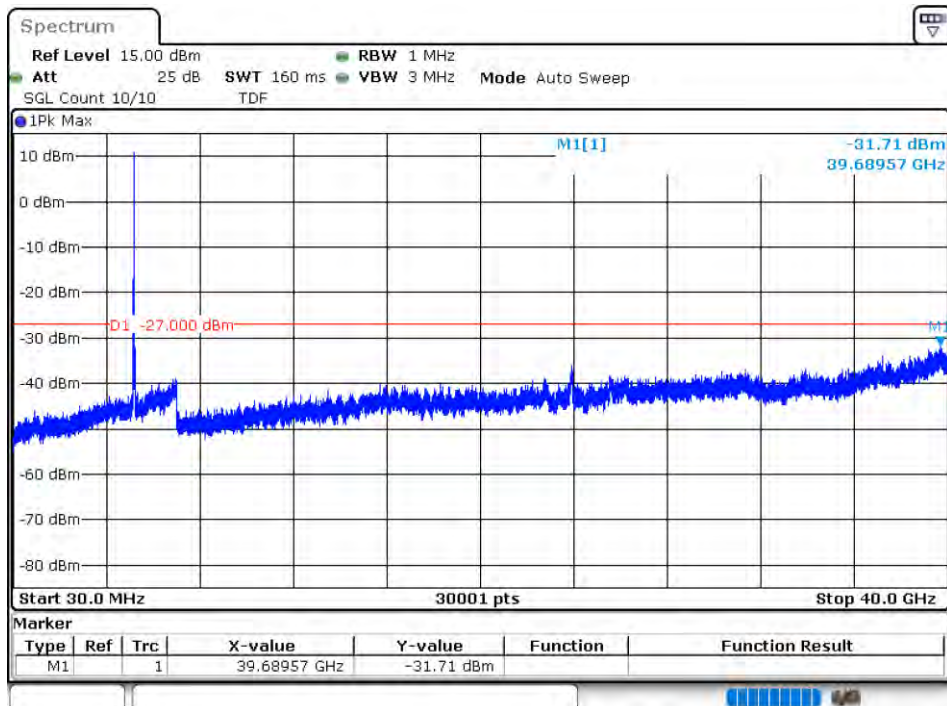


Tx. Spurious NVNT ax20 5200MHz Ant1 Emission

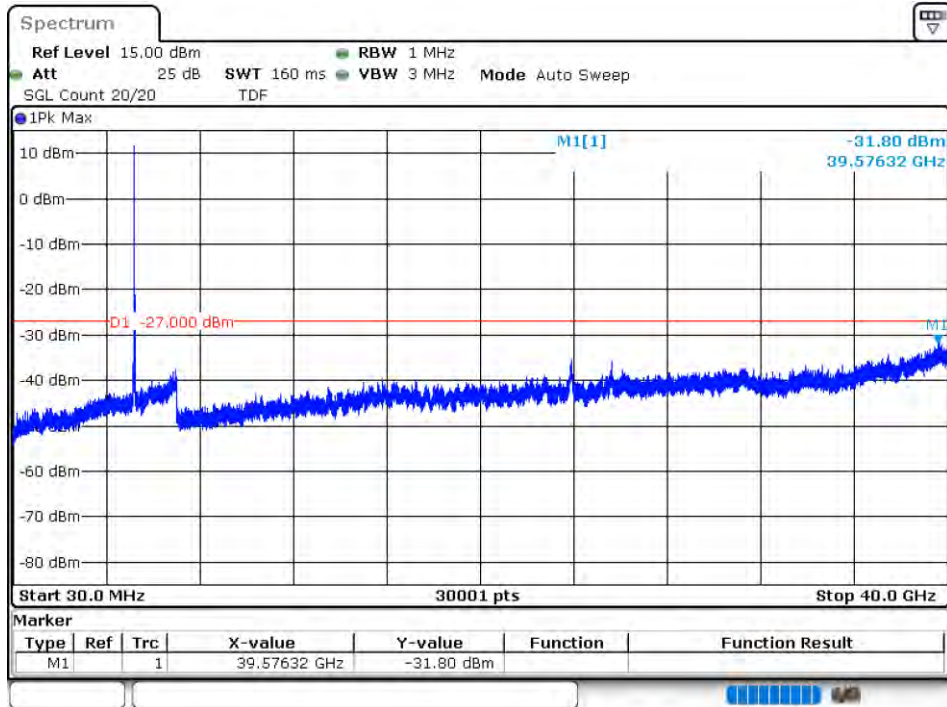


Tx. Spurious NVNT ax20 5240MHz Ant1 Emission

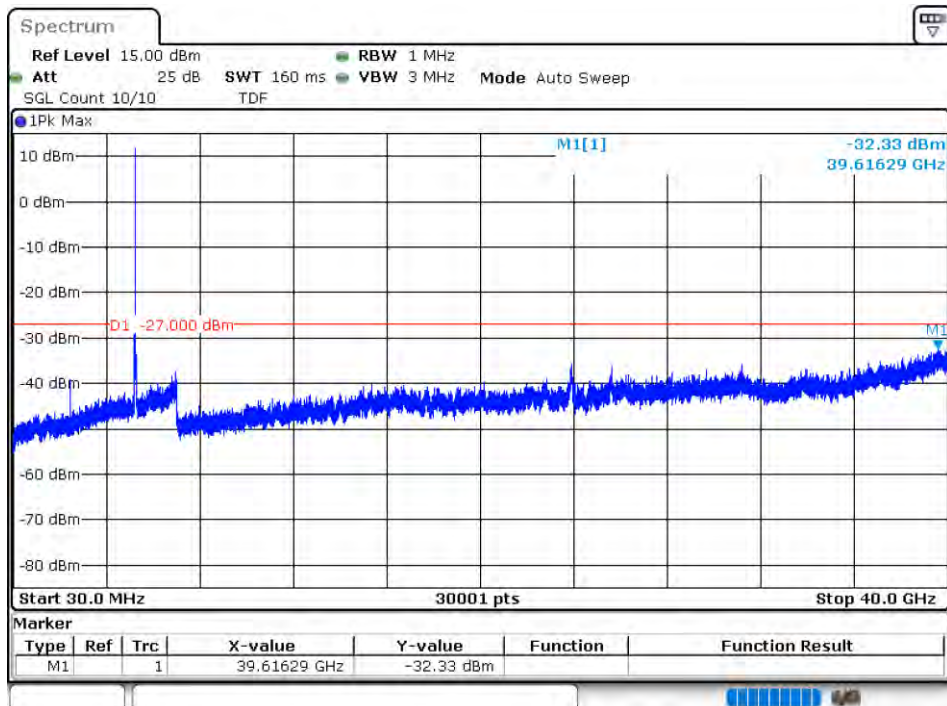

Tx. Spurious NVNT ax40 5190MHz Ant1 Emission

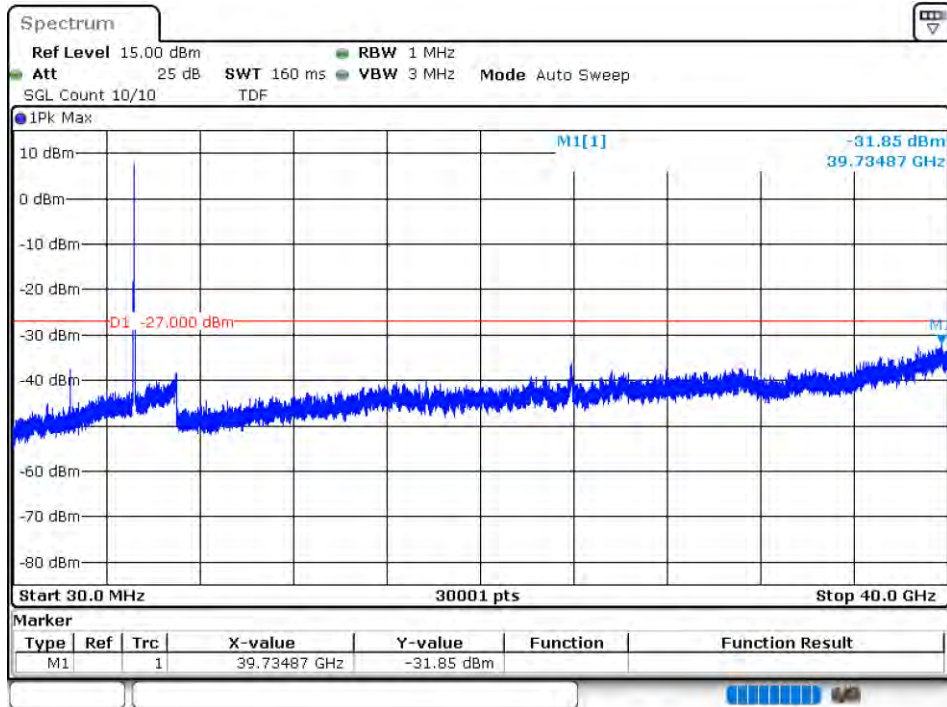

Tx. Spurious NVNT ax40 5230MHz Ant1 Emission

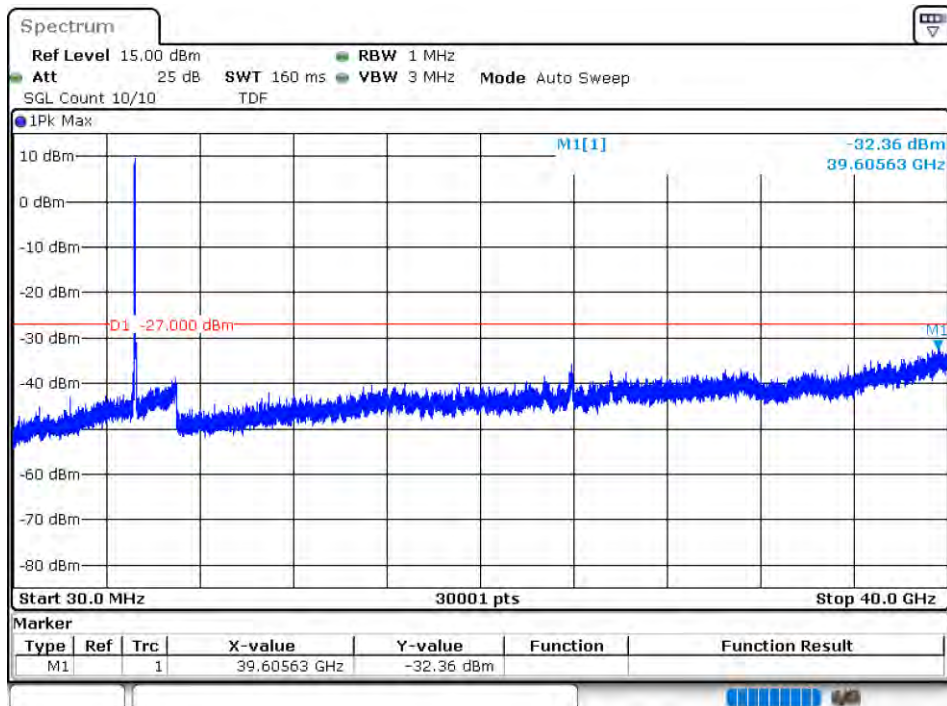


## 5.3G WIFI

### Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5260            | Ant1    | 92             | 0.36                   | 0.49      |
| NVNT      | a    | 5280            | Ant1    | 92.41          | 0.34                   | 0.49      |
| NVNT      | a    | 5320            | Ant1    | 94.57          | 0.24                   | 0.49      |
| NVNT      | n20  | 5260            | Ant1    | 91.56          | 0.38                   | 0.53      |
| NVNT      | n20  | 5280            | Ant1    | 91.85          | 0.37                   | 0.53      |
| NVNT      | n20  | 5320            | Ant1    | 94.63          | 0.24                   | 0.53      |
| NVNT      | n40  | 5270            | Ant1    | 84.86          | 0.71                   | 1.08      |
| NVNT      | n40  | 5310            | Ant1    | 90.38          | 0.44                   | 1.08      |
| NVNT      | ac20 | 5260            | Ant1    | 92             | 0.36                   | 0.53      |
| NVNT      | ac20 | 5280            | Ant1    | 92.14          | 0.36                   | 0.53      |
| NVNT      | ac20 | 5320            | Ant1    | 92.72          | 0.33                   | 0.53      |
| NVNT      | ac40 | 5270            | Ant1    | 0              | 0                      | 0         |
| NVNT      | ac40 | 5310            | Ant1    | 89.55          | 0.48                   | 1.06      |
| NVNT      | ax20 | 5260            | Ant1    | 89.75          | 0.47                   | 0.68      |
| NVNT      | ax20 | 5280            | Ant1    | 89.62          | 0.48                   | 0.68      |
| NVNT      | ax20 | 5320            | Ant1    | 93.35          | 0.3                    | 0.68      |
| NVNT      | ax40 | 5270            | Ant1    | 87.39          | 0.59                   | 1.32      |
| NVNT      | ax40 | 5310            | Ant1    | 87.45          | 0.58                   | 1.32      |


# Test Graphs

## Duty Cycle NVNT a 5260MHz Ant1

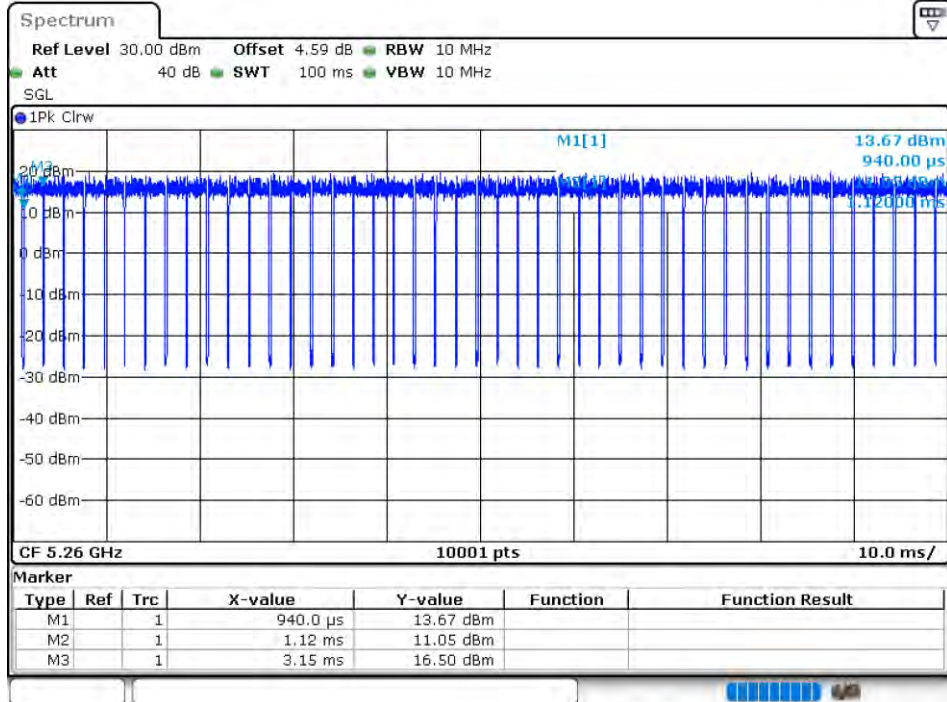


## Duty Cycle NVNT a 5280MHz Ant1

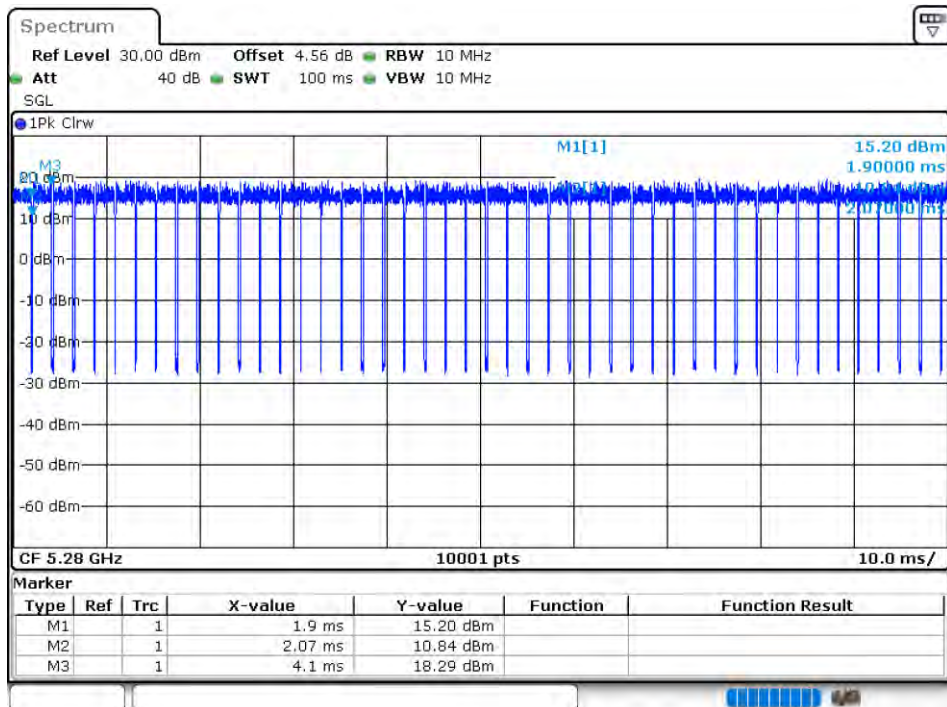


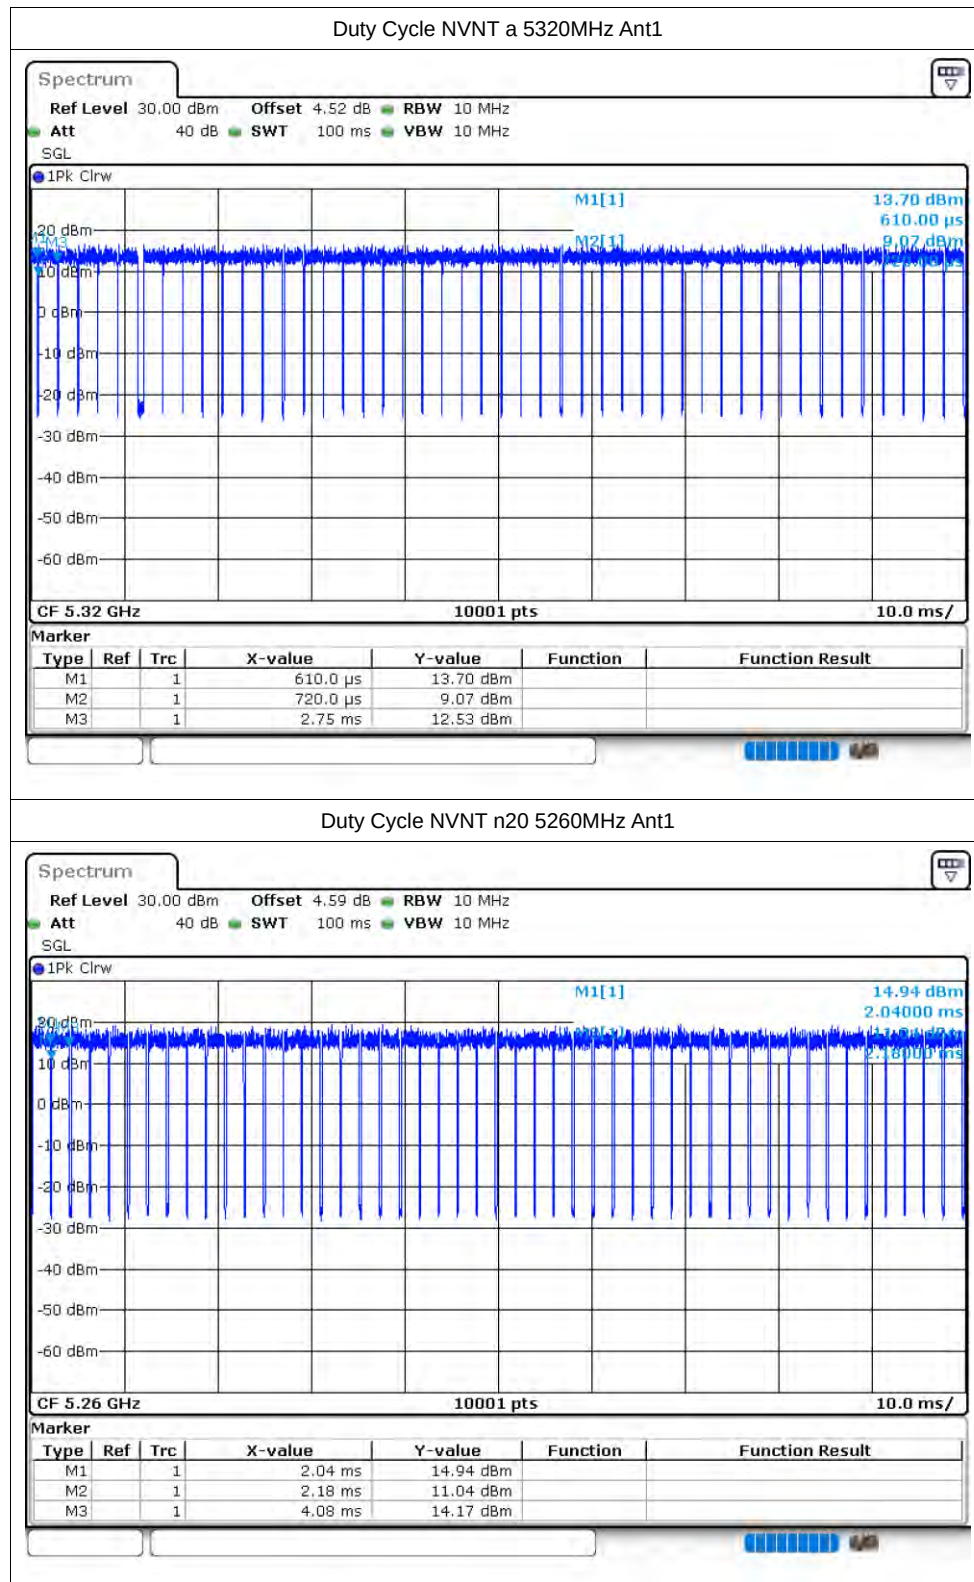


Duty Cycle NVNT n20 5280MHz Ant1

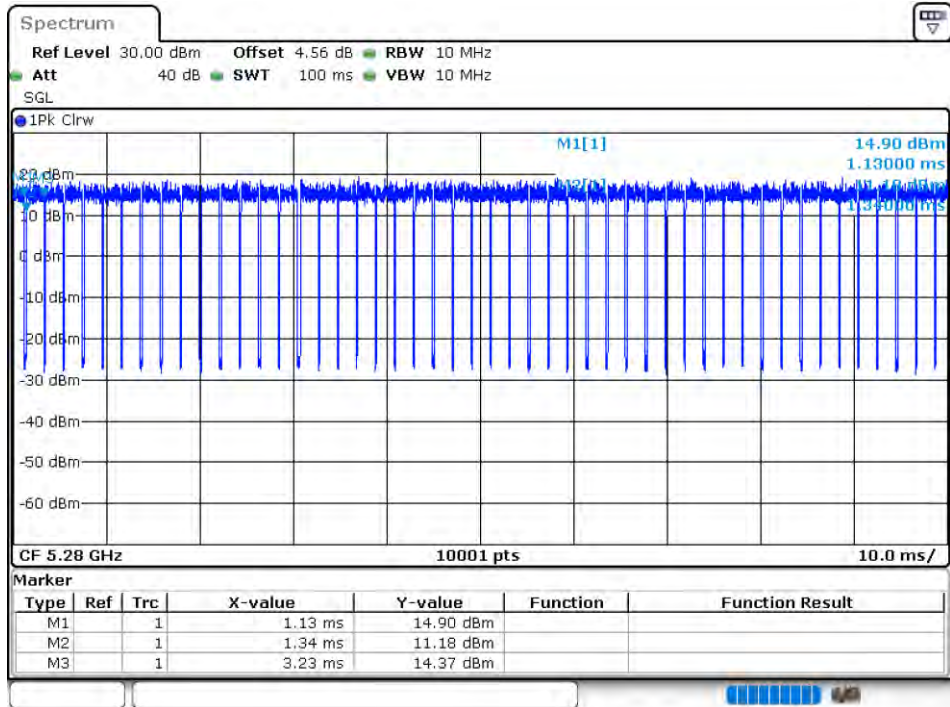


Duty Cycle NVNT n20 5320MHz Ant1

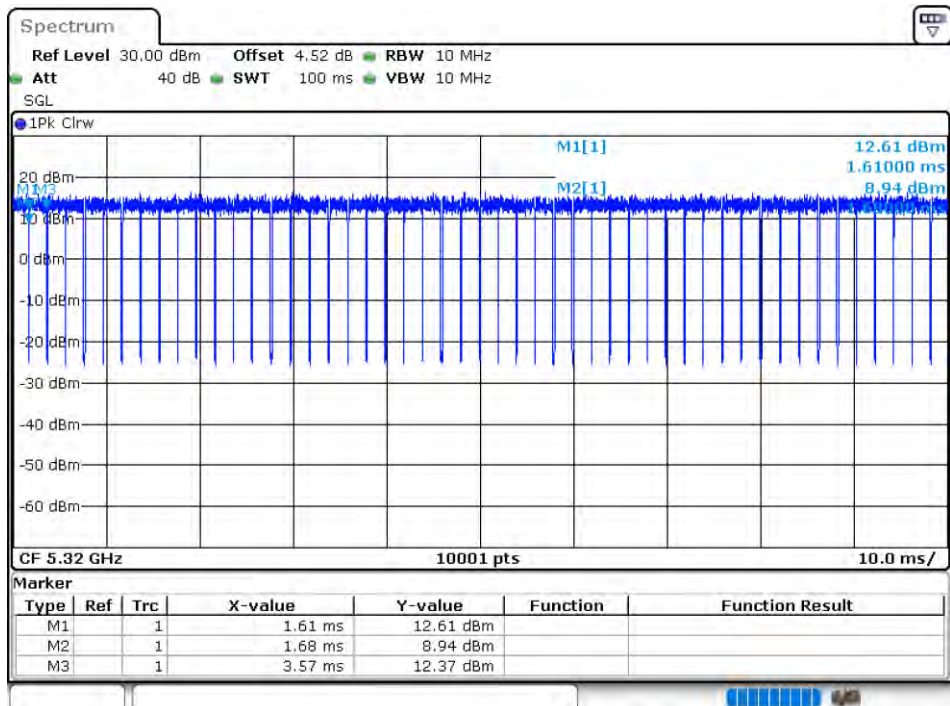


Duty Cycle NVNT n40 5270MHz Ant1

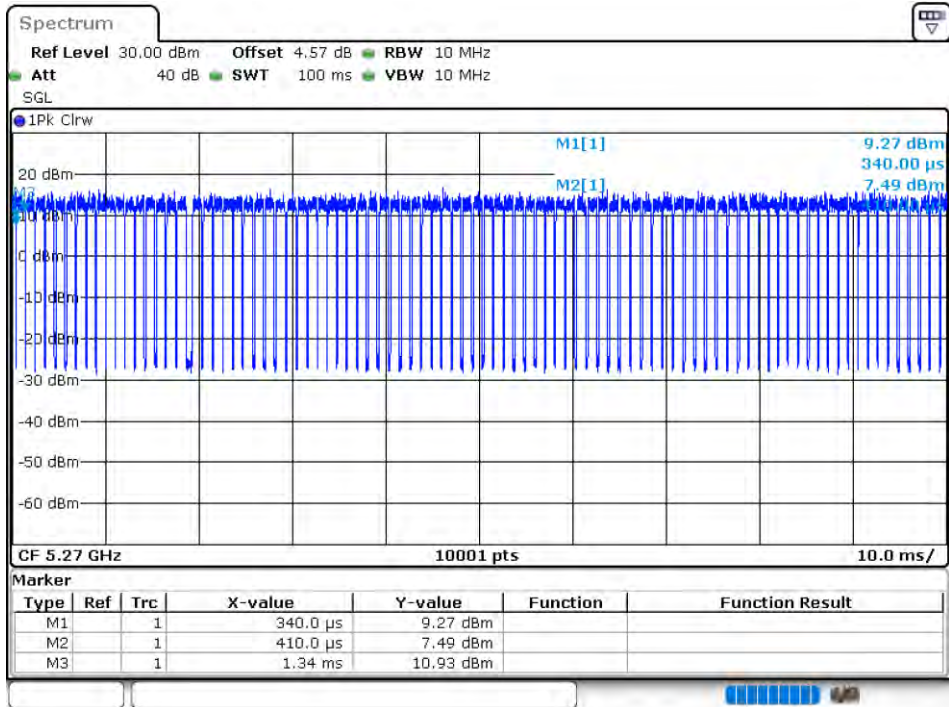


Duty Cycle NVNT n40 5310MHz Ant1

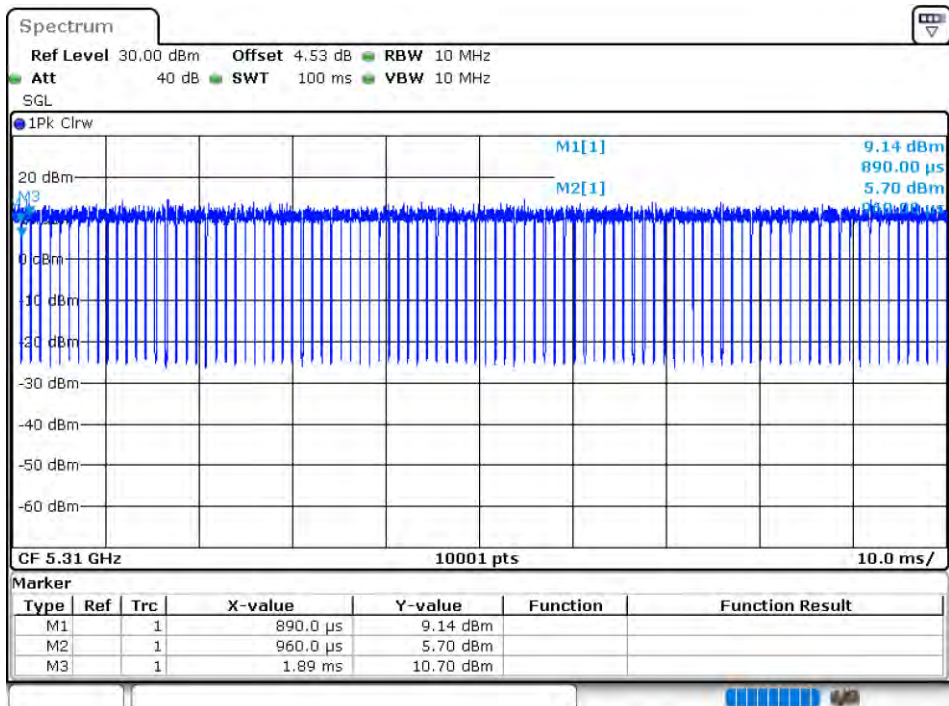


Duty Cycle NVNT ac20 5260MHz Ant1

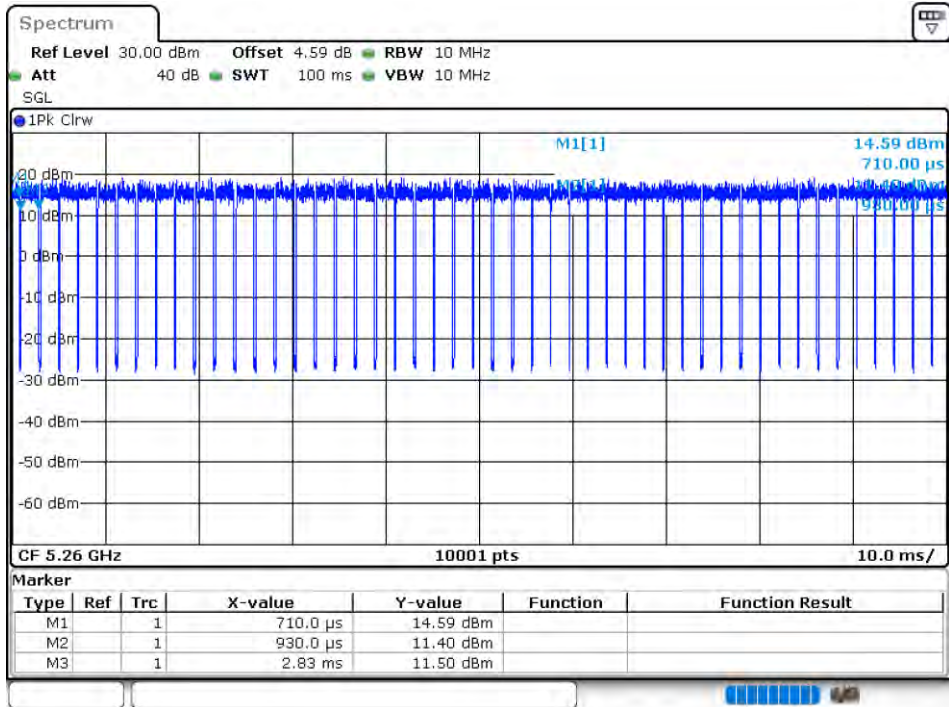


Duty Cycle NVNT ac20 5280MHz Ant1

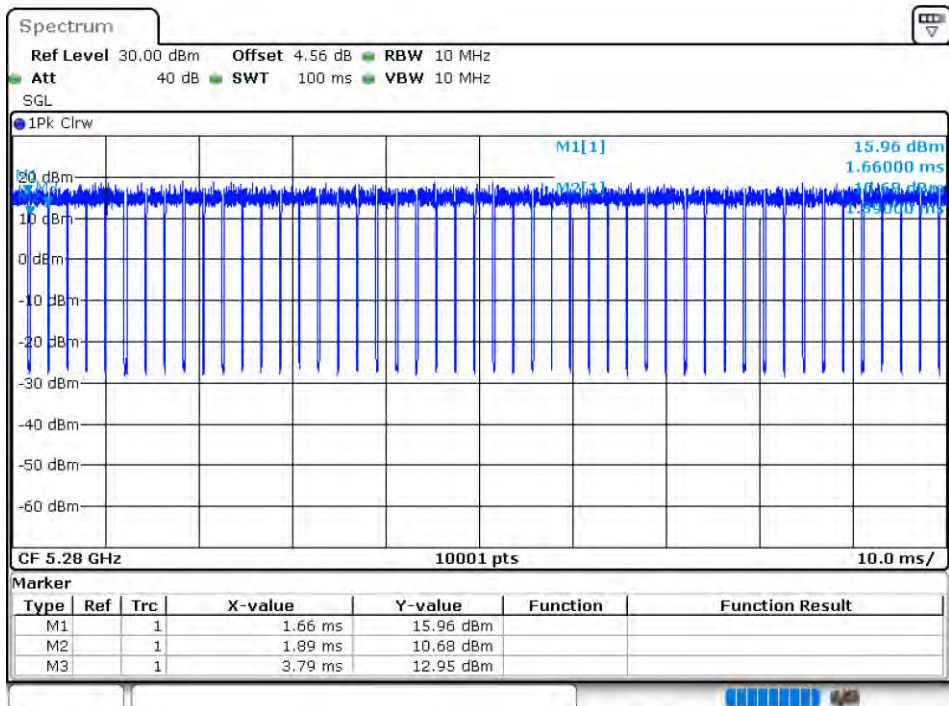


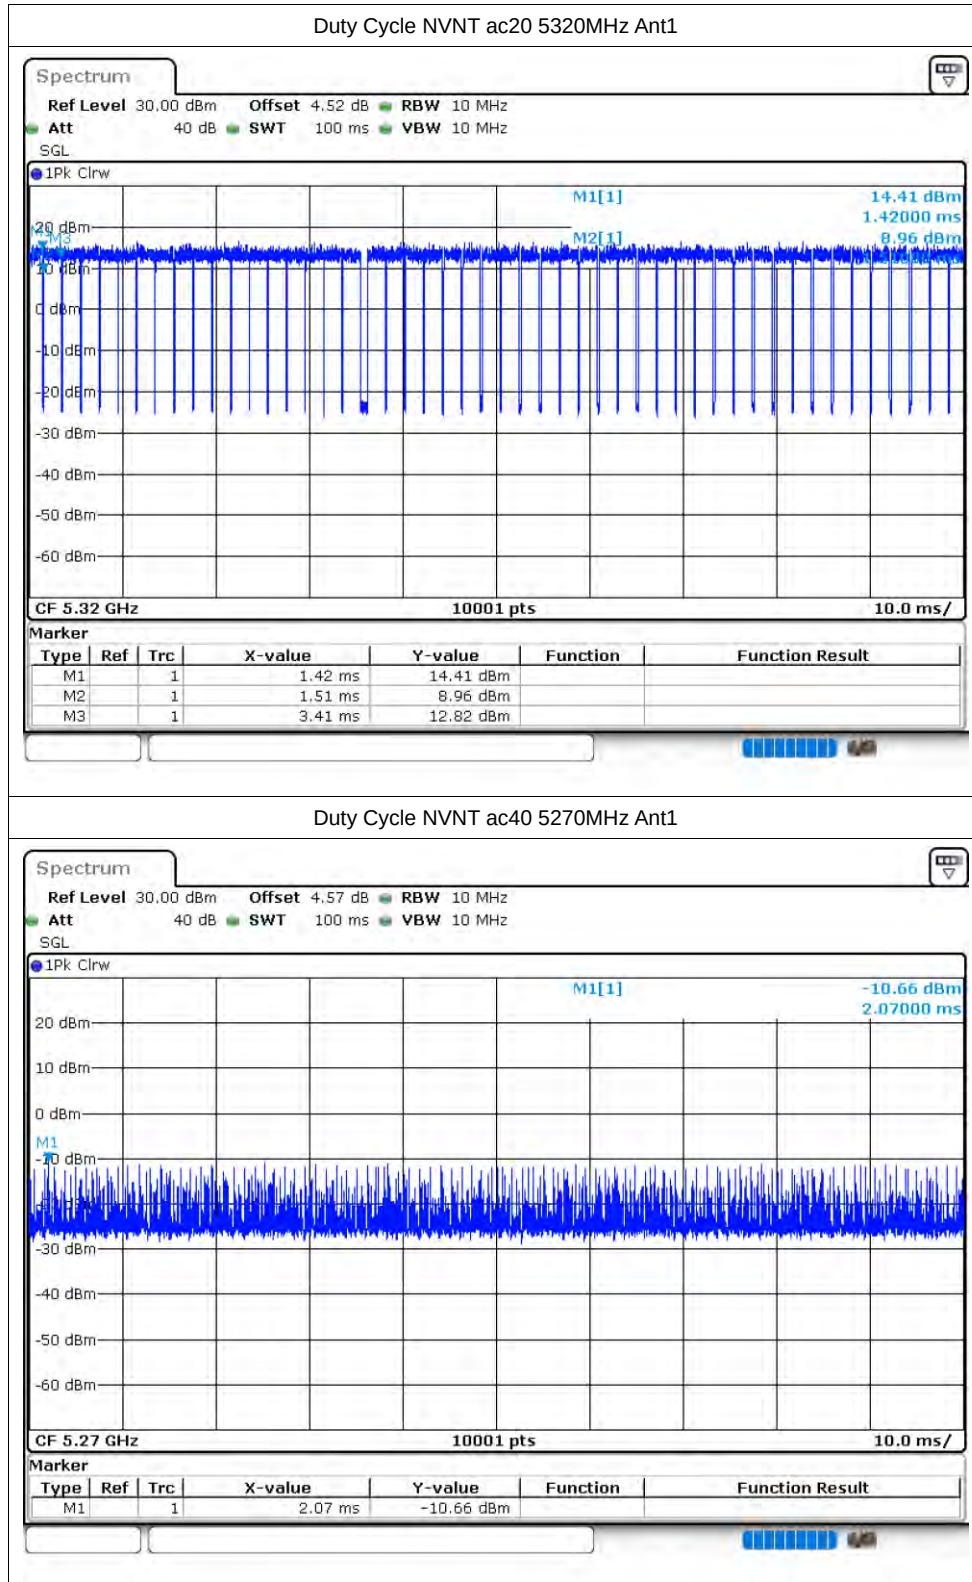


Duty Cycle NVNT ac40 5310MHz Ant1

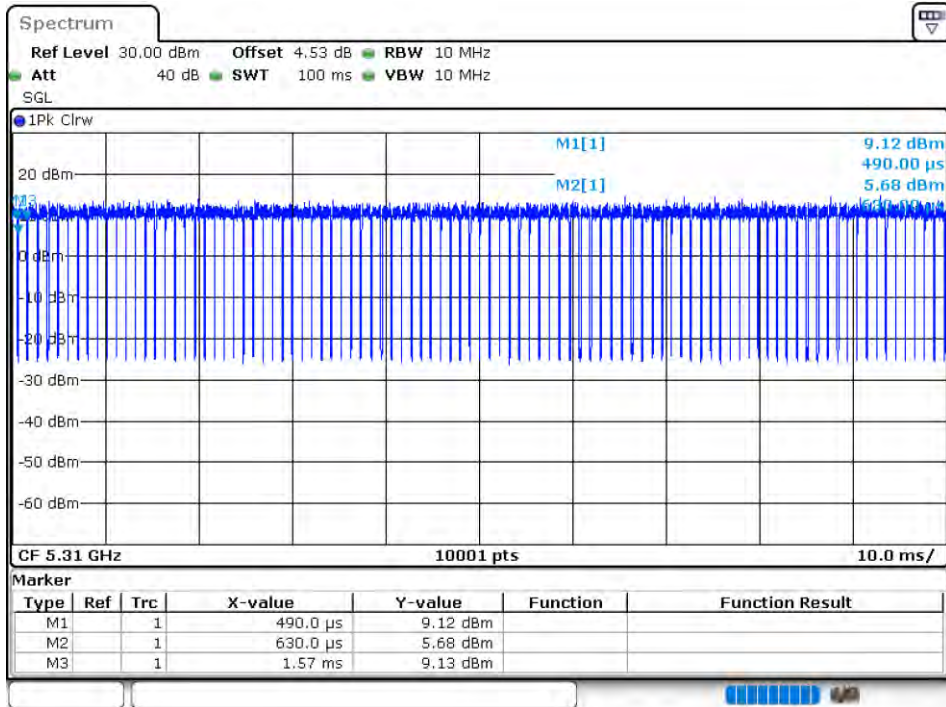


Duty Cycle NVNT ax20 5260MHz Ant1

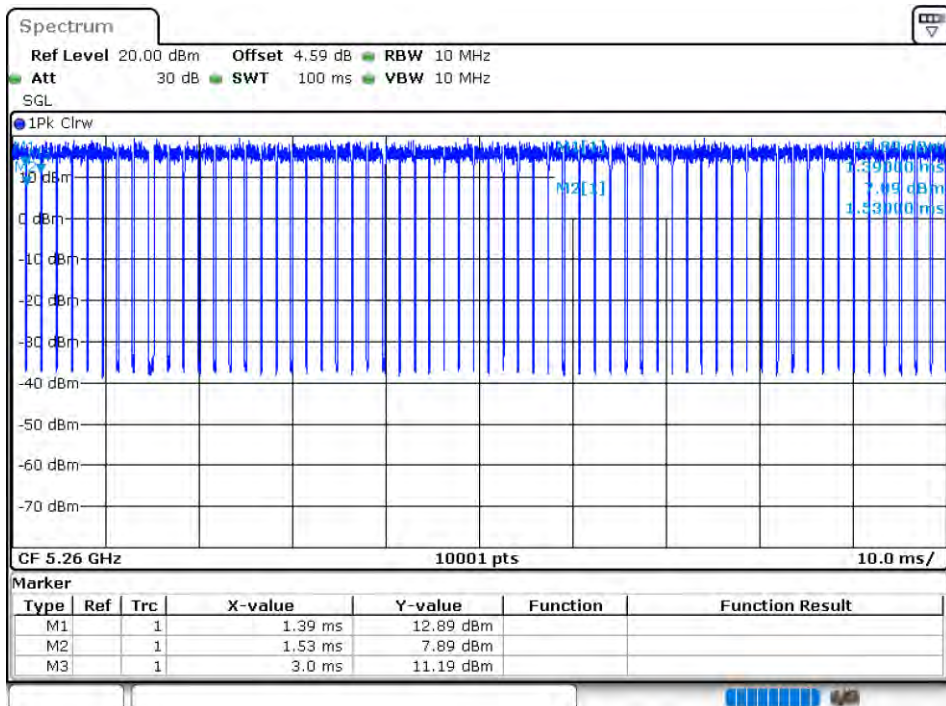


Duty Cycle NVNT ax20 5280MHz Ant1

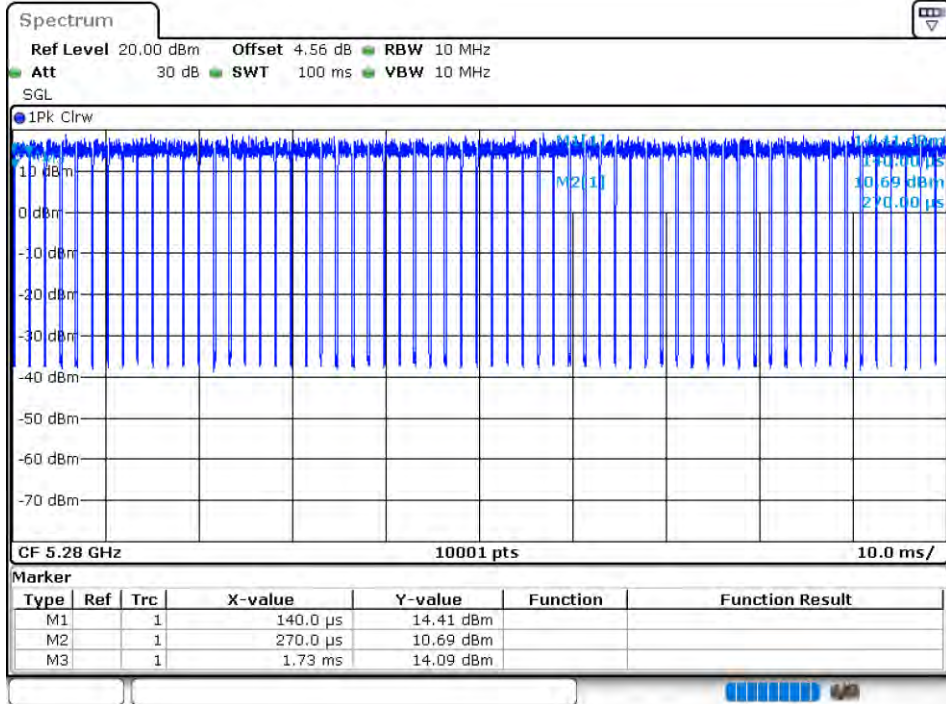


Duty Cycle NVNT ax20 5320MHz Ant1

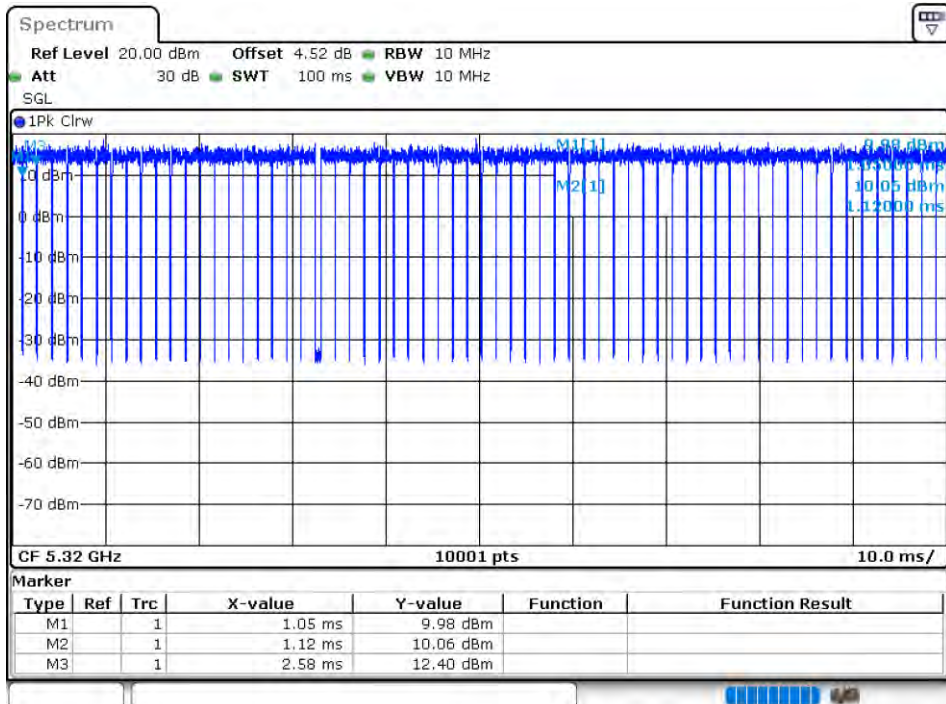

Duty Cycle NVNT ax40 5270MHz Ant1

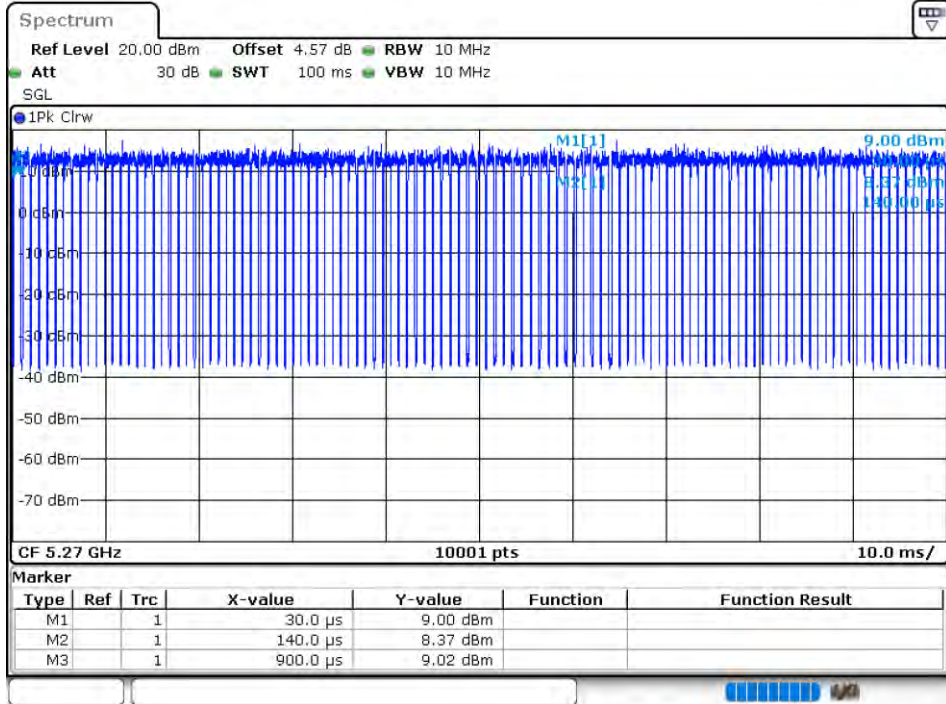

Duty Cycle NVNT ax40 5310MHz Ant1

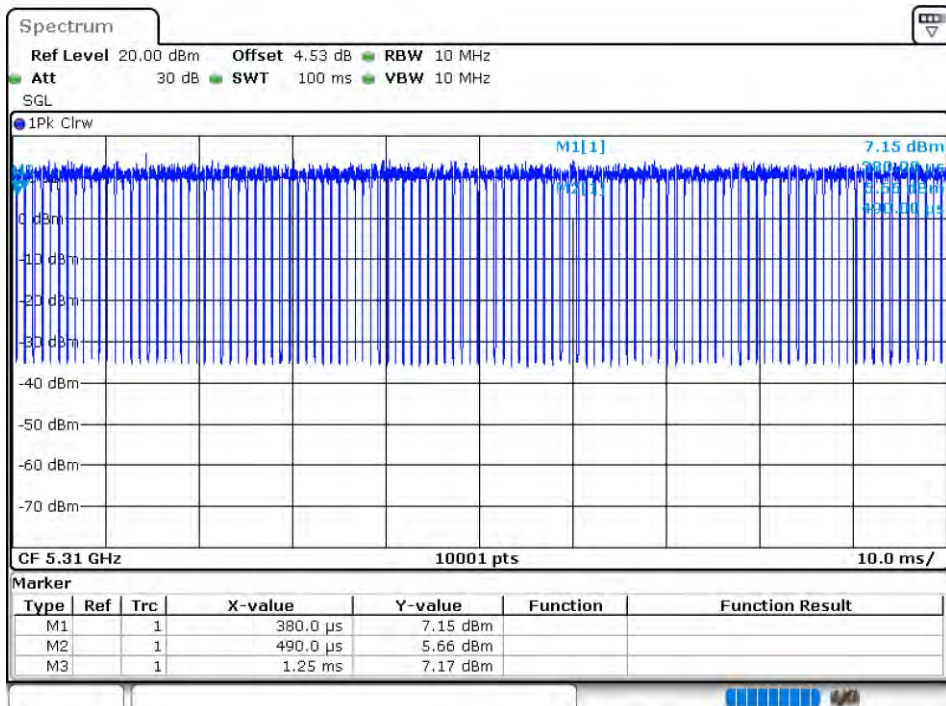

## Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | a    | 5260            | Ant1    | 11.12                 | 24          | Pass    |
| NVNT      | a    | 5280            | Ant1    | 11                    | 24          | Pass    |
| NVNT      | a    | 5320            | Ant1    | 10.27                 | 24          | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 10.86                 | 24          | Pass    |
| NVNT      | n20  | 5280            | Ant1    | 10.93                 | 24          | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 10.09                 | 24          | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 10.83                 | 24          | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 10.08                 | 24          | Pass    |
| NVNT      | ac20 | 5260            | Ant1    | 10.99                 | 24          | Pass    |
| NVNT      | ac20 | 5280            | Ant1    | 10.94                 | 24          | Pass    |
| NVNT      | ac20 | 5320            | Ant1    | 10.17                 | 24          | Pass    |
| NVNT      | ac40 | 5270            | Ant1    | 9.78                  | 24          | Pass    |
| NVNT      | ac40 | 5310            | Ant1    | 9.8                   | 24          | Pass    |
| NVNT      | ax20 | 5260            | Ant1    | 11.09                 | 24          | Pass    |
| NVNT      | ax20 | 5280            | Ant1    | 10.9                  | 24          | Pass    |
| NVNT      | ax20 | 5320            | Ant1    | 11.06                 | 24          | Pass    |
| NVNT      | ax40 | 5270            | Ant1    | 11.03                 | 24          | Pass    |
| NVNT      | ax40 | 5310            | Ant1    | 10.14                 | 24          | Pass    |


Note: The average contains duty cycle factor

## -26dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -26 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|---------|
| NVNT      | a    | 5260            | Ant1    | 23.232                 | Pass    |
| NVNT      | a    | 5280            | Ant1    | 23.91                  | Pass    |
| NVNT      | a    | 5320            | Ant1    | 24.411                 | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 27.015                 | Pass    |
| NVNT      | n20  | 5280            | Ant1    | 25.638                 | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 25.713                 | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 47.79                  | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 48.21                  | Pass    |
| NVNT      | ac20 | 5260            | Ant1    | 27.048                 | Pass    |
| NVNT      | ac20 | 5280            | Ant1    | 24.801                 | Pass    |
| NVNT      | ac20 | 5320            | Ant1    | 25.986                 | Pass    |
| NVNT      | ac40 | 5270            | Ant1    | 15.942                 | Pass    |
| NVNT      | ac40 | 5310            | Ant1    | 47.514                 | Pass    |
| NVNT      | ax20 | 5260            | Ant1    | 23.88                  | Pass    |
| NVNT      | ax20 | 5280            | Ant1    | 24.057                 | Pass    |
| NVNT      | ax20 | 5320            | Ant1    | 24.837                 | Pass    |
| NVNT      | ax40 | 5270            | Ant1    | 46.368                 | Pass    |
| NVNT      | ax40 | 5310            | Ant1    | 45.834                 | Pass    |

Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant1

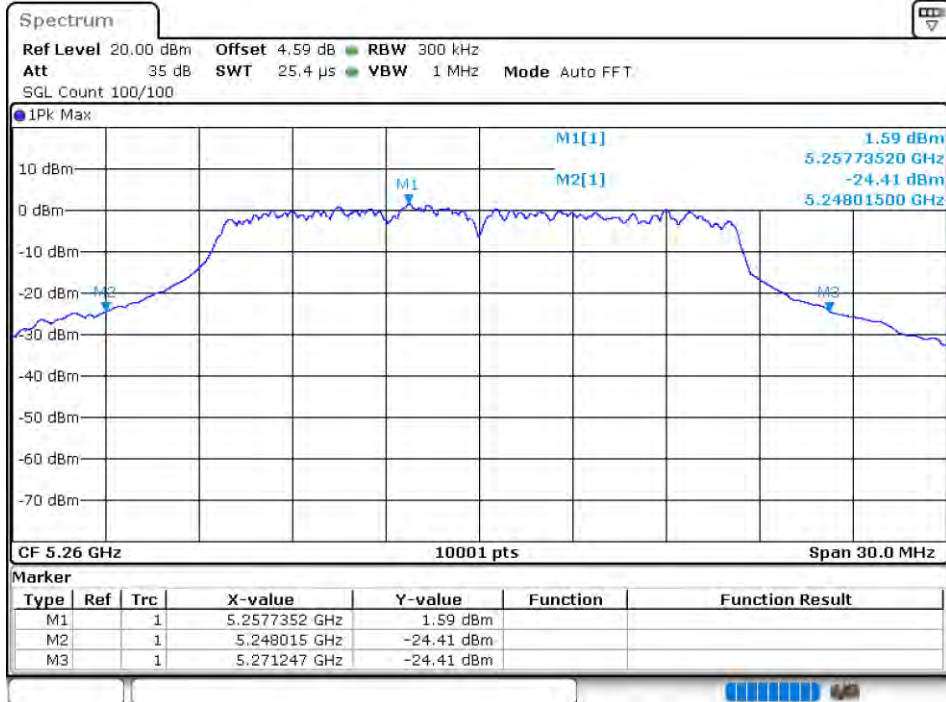

-26dB Bandwidth NVNT a 5280MHz Ant1

