

FCC PART 15 SUBPART C

Power Bank

MODEL No.:PN-W57

FCC ID:2A4LH-PNW57

REPORT NO.:NCT260301021XE1-1

ISSUE DATE: Jul. 28, 2026

Prepared for

Shenzhen Pannizhe Technology Co., Ltd.

2nd Floor 7th Building Tiankou industrial Park Huangtian Community, HangCheng
Street, Baoan District, Shenzhen, China 518128

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China
TEL: 400-8868-419

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULTS	5
2. GENERAL INFORMATION	6
2.1. Description of Device (EUT)	6
2.2. Description of Support Units	6
2.3. Independent Operation Modes	7
2.4. Test Mode	9
2.5. Description of Test Facility	9
2.6. Measurement Uncertainty	10
3. MEASURING DEVICE AND TEST EQUIPMENT	11
4. 20DB BANDWIDTH	13
4.1. Test Procedure	13
4.2. Test Results	13
5. POWER LINE CONDUCTED EMISSION MEASUREMENT	14
5.1. Block Diagram of Test Setup	14
5.2. Limits	14
5.3. Test Procedure	14
5.4. Measuring Results	15
6. RADIATED EMISSION TEST	18
6.1. Measurement Procedure	18
6.2. Test SET-UP (Block Diagram of Configuration)	18
6.3. Radiated Emission Limit	19
6.4. Measurement Result	21
7. TEST PHOTOGRAPHS AND EUT PHOTOGRAPHS	27

TEST REPORT DESCRIPTION

Applicant : Shenzhen Pannizhe Technology Co., Ltd.
Address : 2nd Floor 7th Building Tiankou industrial Park Huangtian Community,
HangCheng Street, Baoan District, Shenzhen, China 518128
Manufacturer : Shenzhen Pannizhe Technology Co., Ltd.
Address : 2nd Floor 7th Building Tiankou industrial Park Huangtian Community,
HangCheng Street, Baoan District, Shenzhen, China 518128
EUT : Power Bank
Model Name : PN-W57
Trademark : N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by Shenzhen NCT Testing Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C

The test results of this report relate only to the tested sample identified in this report.

Prepared by:
Shine Wu



Reviewer:
Keven Wu



Approved:
Henry Wang



Modified Information

Version	Report No.	Revision Data	Summary
Ver.1.0	NCT260301021XE1-1	Jul. 28, 2026	Original Version

1. SUMMARY OF TEST RESULTS

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Power Bank

Model Number : PN-W57

Model different : N/A

Sample ID : NCT260301021X-001

Sample(s) Status: : Engineer sample

Power Rating : Battery Capacity: 10000mAh/3.85V(38.5Wh)
USB-C Input: 5V $\Rightarrow$ 3A 9V $\Rightarrow$ 2A 12V $\Rightarrow$ 1.5A
USB-C Output: DC5V $\Rightarrow$ 3A 9V $\Rightarrow$ 2.22A 12V $\Rightarrow$ 1.67A
USB-C1 Cable Input: DC5V $\Rightarrow$ 3A 9V $\Rightarrow$ 2A 12V $\Rightarrow$ 1.5A
USB-C1 Cable Output: DC5V $\Rightarrow$ 3A 9V $\Rightarrow$ 2.22A 12V $\Rightarrow$ 1.67A
USB-C2 Cable Output: DC5V $\Rightarrow$ 3A
Thimble Input Charging: 5V $\Rightarrow$ 2A
Wireless Output: 5W/7.5W/10W/15W

Operation : 111-205 KHz
Frequency for WPT

Modulation : MSK

Antenna Type: : Coil Antenna

Date of Received : Jul. 23, 2026

Date of Test : Jul. 23, 2026 to Jul. 28, 2026

2.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Adapter	OMIX	X2903	N/A	Auxiliary
E-2	Phone 1	Apple	iPhone 14	N/A	Auxiliary
E-3	Phone 2	Apple	iPhone 13	N/A	Auxiliary

Note: (1)The support equipment was authorized by Declaration of Confirmation.
(2)For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.3. Independent Operation Modes

	Mode	Description	Remark
USB-C Input DC 5V/3A	1	EUT + iPhone(15W)	5%
	2		50%
	3		95%
	4	EUT + iPhone(10W)	5%
	5		50%
	6		95%
	7	EUT + iPhone(7.5W)	5%
	8		50%
	9		95%
	10	EUT + iPhone(5W)	5%
	11		50%
	12		95%
USB-C Input DC 9V/2A	13	EUT + iPhone(15W)	5%
	14		50%
	15		95%
	16	EUT + iPhone(10W)	5%
	17		50%
	18		95%
	19	EUT + iPhone(7.5W)	5%
	20		50%
	21		95%
	22	EUT + iPhone(5W)	5%
	23		50%
	24		95%
USB-C Input DC 12V/1.5A	25	EUT + iPhone(15W)	5%
	26		50%
	27		95%
	28	EUT + iPhone(10W)	5%
	29		50%
	30		95%
	31	EUT + iPhone(7.5W)	5%
	32		50%
	33		95%
	34	EUT + iPhone(5W)	5%
	35		50%
	36		95%
USB-C1 Cable Input DC 5V/3A	37	EUT + iPhone(15W)	5%
	38		50%
	39		95%
	40	EUT + iPhone(10W)	5%
	41		50%
	42		95%
	43	EUT + iPhone(7.5W)	5%
	44		50%
	45		95%
	46	EUT + iPhone(5W)	5%
	47		50%
	48		95%

USB-C1 Cable Input DC 9V/2A	49	EUT + iPhone(15W)	5%
	50		50%
	51		95%
	52	EUT + iPhone(10W)	5%
	53		50%
	54		95%
	55	EUT + iPhone(7.5W)	5%
	56		50%
	57		95%
	58	EUT + iPhone(5W)	5%
	59		50%
	60		95%
USB-C1 Cable Input DC 12V/1.5A	61	EUT + iPhone(15W)	5%
	62		50%
	63		95%
	64	EUT + iPhone(10W)	5%
	65		50%
	66		95%
	67	EUT + iPhone(7.5W)	5%
	68		50%
	69		95%
	70	EUT + iPhone(5W)	5%
	71		50%
	72		95%
battery	73	EUT + iPhone(15W)	5%
	74		50%
	75		95%
	76	EUT + iPhone(10W)	5%
	77		50%
	78		95%
	79	EUT + iPhone(7.5W)	5%
	80		50%
	81		95%
	82	EUT + iPhone(5W)	5%
	83		50%
	84		95%

2.4. Test Mode

Test Items	Test Voltage	Operation Modes
RE	AC 120V/60Hz	Mode 1
CE	AC 120V/60Hz	Mode 25
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

2.5. Description of Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27
The certificate is valid until 2028.01.07
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L8251

Designation Number: CN1347
Test Firm Registration Number: 894804
Accredited by A2LA, June 14, 2023
The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018
The Conformity Assessment Body Identifier is CN0150
Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.
Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

2.6.Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (9KHz~30MHz)	±3.24dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

3. MEASURING DEVICE AND TEST EQUIPMENT

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date	Equipment State
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16	Normal
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2025/6/05	2027/6/04	Normal
LISN	ENV 216	102796	Rohde & Schwarz	2025/6/05	2027/6/04	Normal
LISN	VN1-13S	004023	CRANAGE	2025/6/05	2027/6/04	Normal
Cable	RG223-1500MM	NA	RG	2025/6/05	2027/6/04	Normal

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date	Equipment State
966 Shielded Room	966 Room	/	EMToni	2025/1/17	2028/1/16	Normal
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2025/6/05	2027/6/04	Normal
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHWARZBECK	2025/6/05	2027/6/04	Normal
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHWARZBECK	2026/3/07	2027/3/06	Normal
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2026/3/07	2027/3/06	Normal
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2025/6/05	2027/6/04	Normal
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/6/05	2027/6/04	Normal
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2025/6/05	2027/6/04	Normal
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/6/05	2027/6/04	Normal
Loop Antenna (9KHz-30MHz)	FMZB 1513-60	00074	SCHWARZBECK	2025/6/05	2027/6/04	Normal
Amplifier (9KHz-30MHz)	BBV 9745	00109	CHNWARZBECK	2025/6/05	2027/6/04	Normal
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/6/05	2027/6/04	Normal

MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2026/6/05	2027/6/04	Normal
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2026/6/05	2027/6/04	Normal
Power Sensor	TR1029-2	512364	Techoy	2025/6/05	2027/6/04	Normal
RF Switch	TR1029-1	512364	Techoy	2025/6/05	2027/6/04	Normal
Cable	DA800-4000MM	NA	DA	2025/6/05	2027/6/04	Normal
Cable	DA800-11000MM	NA	DA	2025/6/05	2027/6/04	Normal

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4. 20DB BANDWIDTH

4.1. Test Procedure

Set to the maximum power setting and enable the EUT transmit continuously
Set RBW = 1-5%OBW.
Set the video bandwidth (VBW) =3RBW.
Set Span= 1KHz
Set Detector = Peak.
Set Trace mode = Max hold.
Set Sweep = auto couple.
Measure and record the results in the test report.


4.2. Test Results

	Frequency (KHz)	20dB bandwidth (Hz)	99% bandwidth (Hz)	Result
For Phone	170.9	234	213	Pass



5. POWER LINE CONDUCTED EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

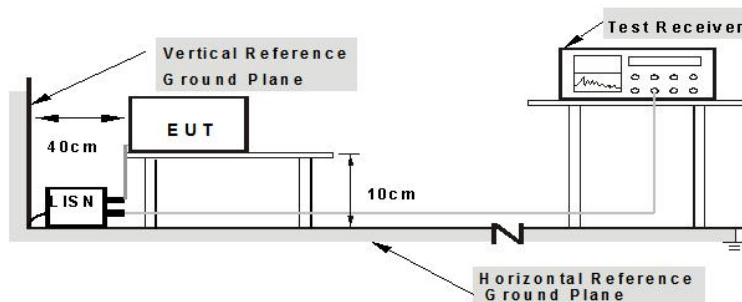

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 10 cm from EUT and at least 10 from other units and other metal planes

LISN: Line Impedance Stabilization Network
AE: Associated equipment
EUT: Equipment under test

5.2. Limits

FCC Part 15.207

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.3. Test Procedure

The EUT was placed on a desk 0.8 m height from the metal ground plane and 0.4 m from the conducting wall of the shielding room and it was kept at least 0.8 m from any other grounded conducting surface. The size of the table will nominally be 1.5 m x1.0 m.

The rear of the arrangement shall be flush with the back of the supporting tabletop unless that would not be possible or typical of normal use.

All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units.

Connect EUT to the power mains through a line impedance stabilization network (LISN). Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

All the support units are connecting to the other LISN.

The LISN provides 50 ohm coupling impedance for the measuring instrument.

Both sides of AC line were checked for maximum conducted interference.

The frequency range from 150 kHz to 30 MHz was sweep.

Set the test-receiver system to quasi peak detect function and average detect function, and to measure the conducted emissions values.

Test results were obtained from the following equation:


Emission Level (dBμV) = LISN Factor (dB) + Cable Loss (dB) + Reading (dBμV)

Margin (dB) = Emission Level (dBμV) - Limit (dBμV)

5.4. Measuring Results

PASS.

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase:	L
Test Voltage:	AC 120V/60Hz	Mode:	Mode 25

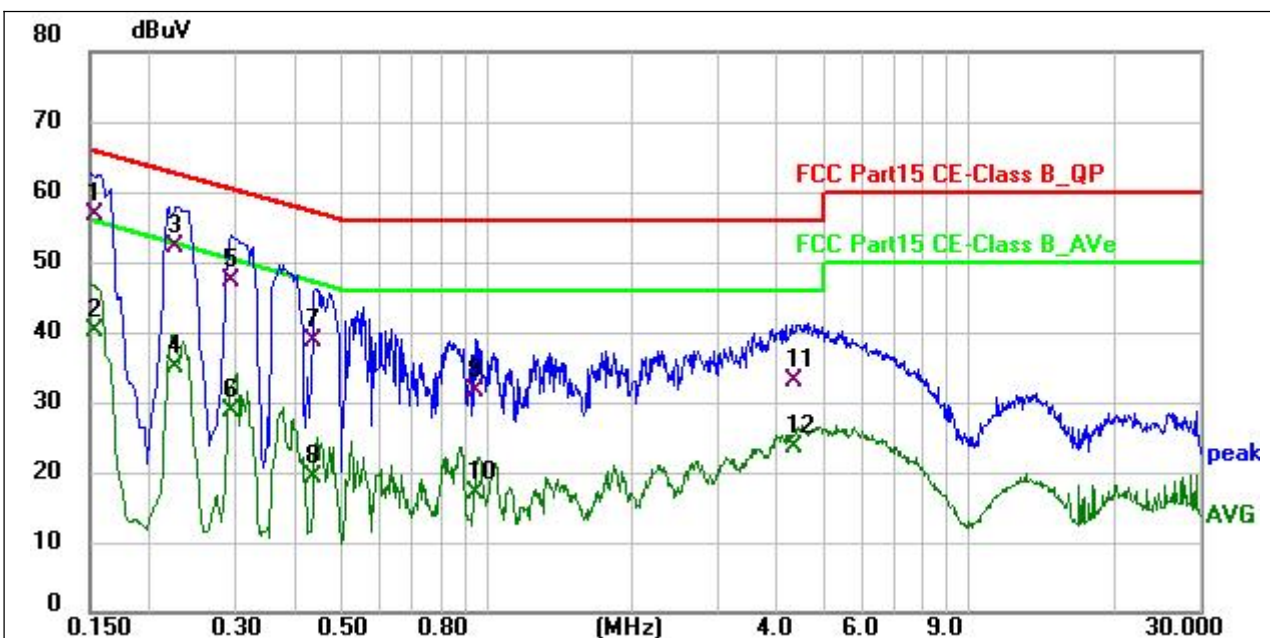


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.1542	37.15	19.65	56.80	65.77	-8.97	QP
2	0.1542	20.51	19.65	40.16	55.77	-15.61	AVG
3	0.2261	32.12	19.91	52.03	62.59	-10.56	QP
4	0.2261	15.02	19.91	34.93	52.59	-17.66	AVG
5	0.2936	27.30	19.92	47.22	60.42	-13.20	QP
6	0.2936	8.89	19.92	28.81	50.42	-21.61	AVG
7	0.4382	18.86	19.93	38.79	57.10	-18.31	QP
8	0.4382	-0.56	19.93	19.37	47.10	-27.73	AVG
9	0.9428	11.75	19.88	31.63	56.00	-24.37	QP
10	0.9428	-2.94	19.88	16.94	46.00	-29.06	AVG
11	4.2941	13.01	19.97	32.98	56.00	-23.02	QP
12	4.2941	3.69	19.97	23.66	46.00	-22.34	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission. Margin = Level-Limit , Correct Factor = Cable lose + LISN insertion loss,
3. Measurement Level = Reading level + Correct Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase:	N
Test Voltage:	AC 120V/60Hz	Mode:	Mode 25

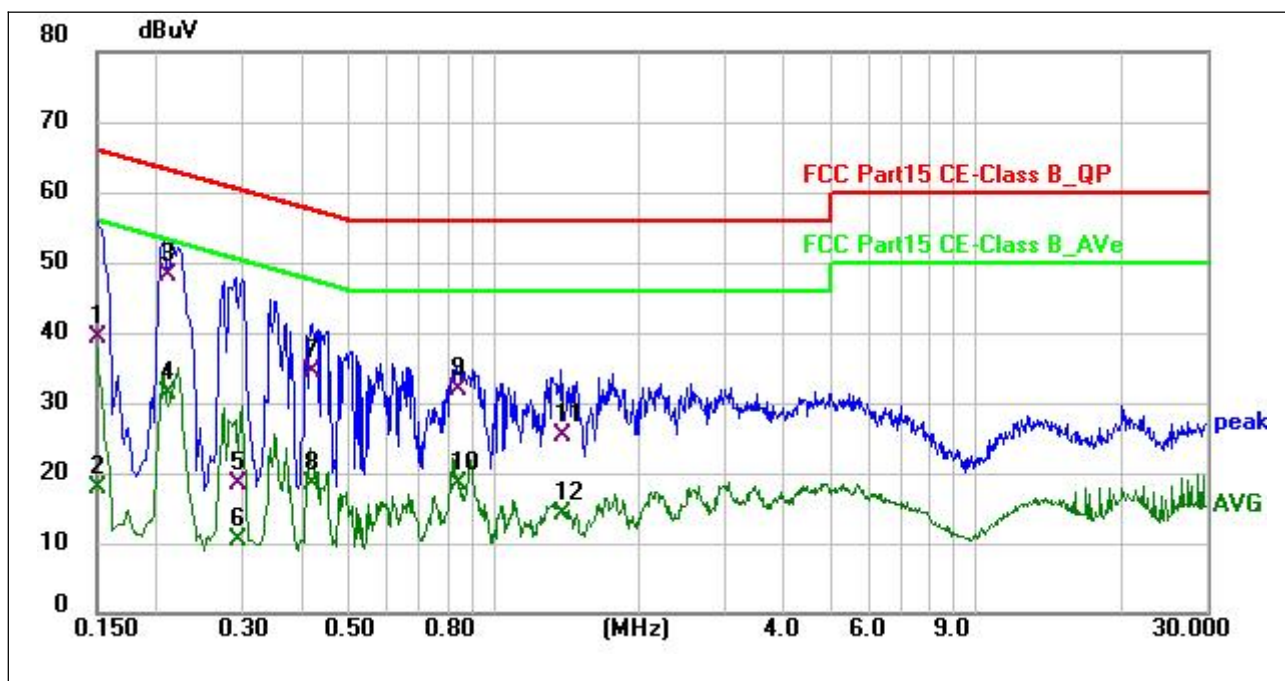

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	19.77	19.60	39.37	66.00	-26.63	QP
2	0.1500	-1.67	19.60	17.93	56.00	-38.07	AVG
3 *	0.2102	28.40	19.86	48.26	63.20	-14.94	QP
4	0.2102	11.41	19.86	31.27	53.20	-21.93	AVG
5	0.2942	-1.52	19.83	18.31	60.40	-42.09	QP
6	0.2942	-9.39	19.83	10.44	50.40	-39.96	AVG
7	0.4180	14.64	19.88	34.52	57.49	-22.97	QP
8	0.4180	-1.31	19.88	18.57	47.49	-28.92	AVG
9	0.8470	11.98	19.88	31.86	56.00	-24.14	QP
10	0.8470	-1.42	19.88	18.46	46.00	-27.54	AVG
11	1.3929	5.45	19.83	25.28	56.00	-30.72	QP
12	1.3929	-5.76	19.83	14.07	46.00	-31.93	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
Margin = Level-Limit , Correct Factor = Cable lose + LISN insertion loss,
3. Measurement Level = Reading level + Correct Factor


6. RADIATED EMISSION TEST

6.1.Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.
5. Use the following receiver/spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured
RBW=200Hz for 9KHz to 150KHz,
RBW=9kHz for 150KHz to 30MHz,
RBW=120KHz for 30MHz to 1GHz
VBW $\geq 3 \times$ RBW
Sweep = auto
Detector function = QP
Trace = max hold

6.2.Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

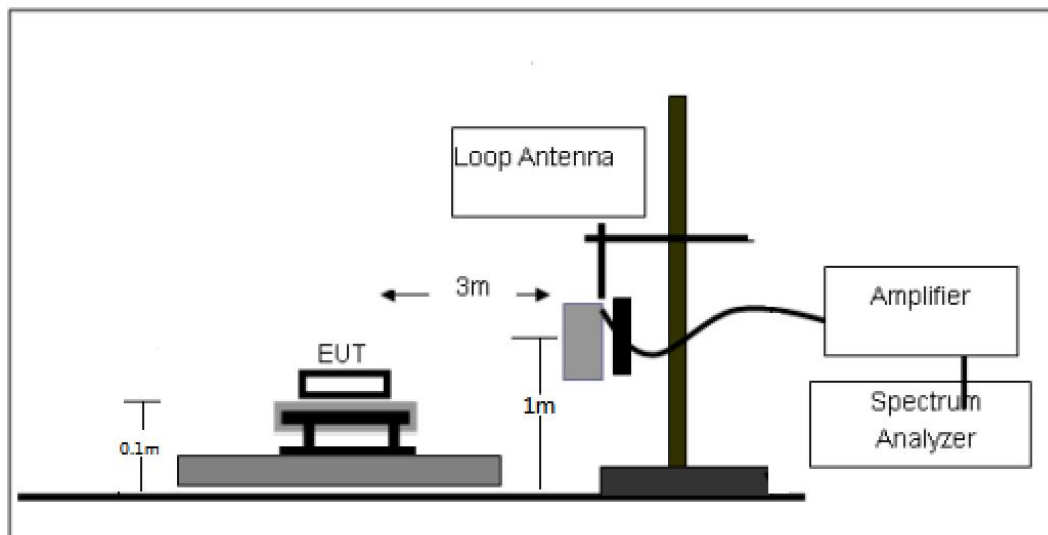

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

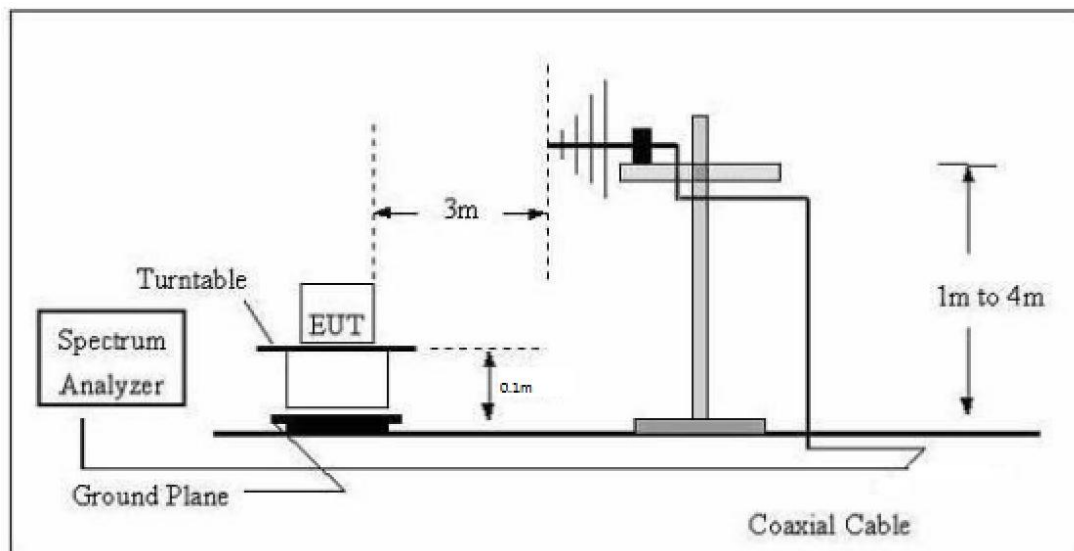

6.3. Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	$2400 / F(\text{KHz})$	300m	$10000 * 2400/F(\text{KHz})$	$20\log 2400/F(\text{KHz}) + 80$
0.490 – 1.705	$24000 / F(\text{KHz})$	30m	$100 * 24000/F(\text{KHz})$	$20\log 24000/F(\text{KHz}) + 40$
1.705 – 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 – 88.0	100	3m	100	$20\log 100$
88.0 – 216.0	150	3m	150	$20\log 150$
216.0 – 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

15.205 Restricted bands of operation


MHz	MHz	MHz	GHz
0.090 - 0.111	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark: 1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.4.Measurement Result

9 kHz~30 MHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Coaxial
Test Voltage:	AC 120V/60Hz	Mode:	Mode 1

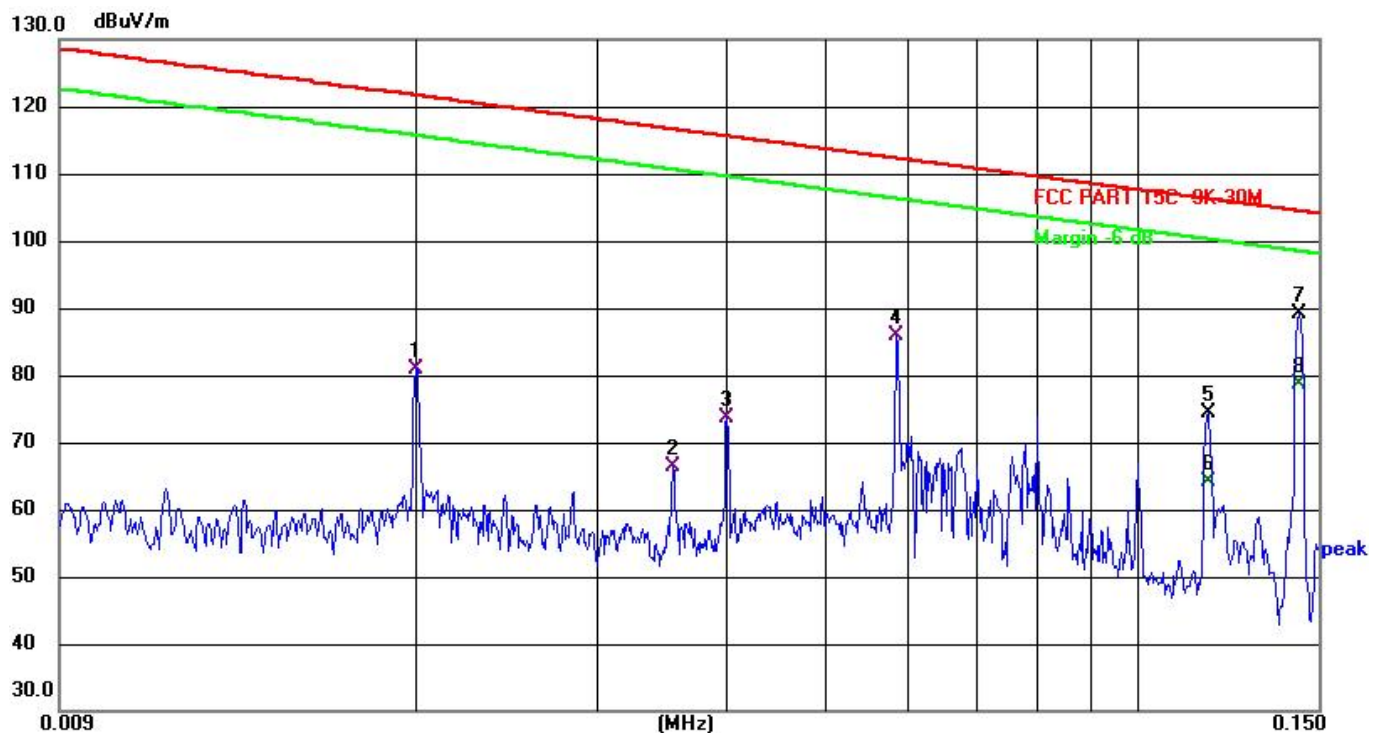

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0200	52.53	28.27	80.80	121.57	-40.77	QP
2	0.0354	38.18	28.08	66.26	116.61	-50.35	QP
3	0.0400	45.71	28.02	73.73	115.55	-41.82	QP
4	0.0584	58.02	27.80	85.82	112.27	-26.45	QP
5	0.1170	47.05	27.22	74.27	106.23	-31.96	peak
6	0.1170	37.03	27.22	64.25	106.23	-41.98	AVG
7	0.1438	61.94	27.07	89.01	104.44	-15.43	peak
8	0.1438	51.59	27.07	78.66	104.44	-25.78	AVG


Note:

Pre-scan in all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Coplane
Test Voltage:	AC 120V/60Hz	Mode:	Mode 1

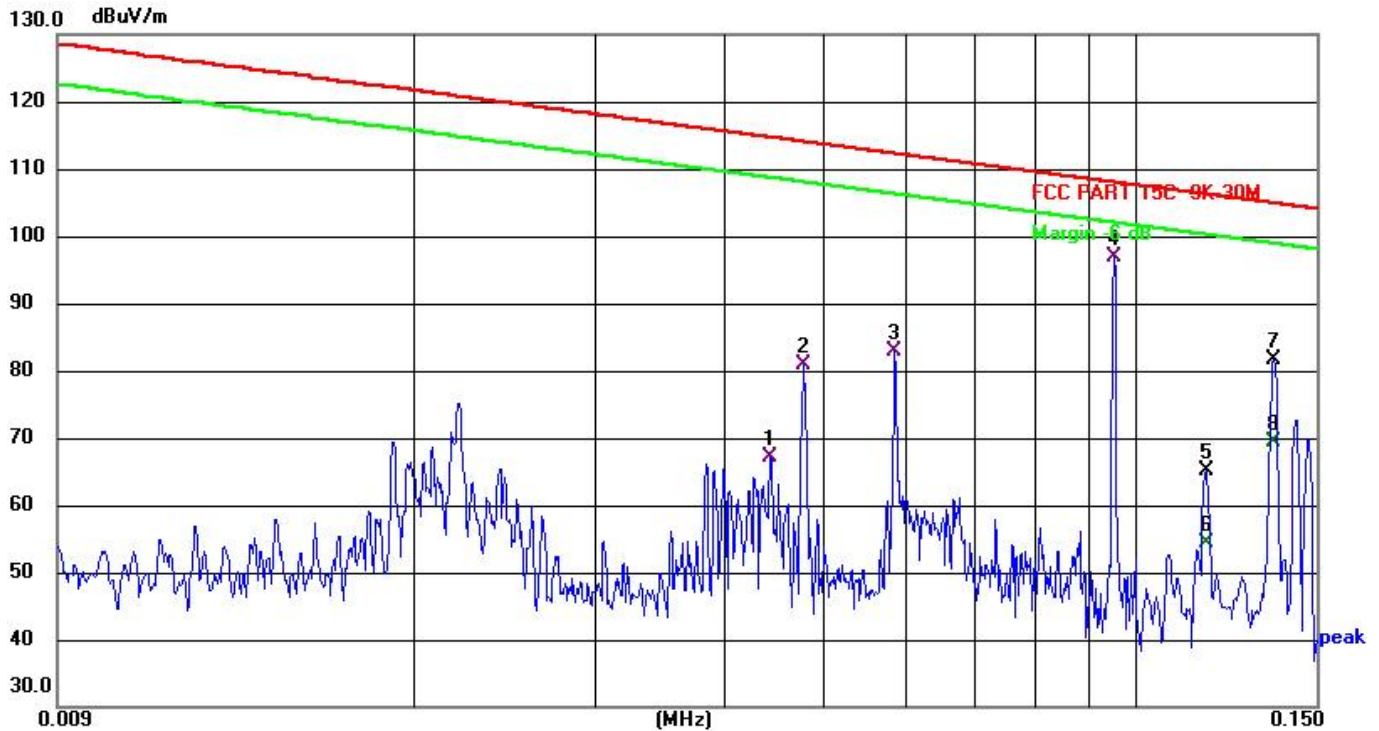

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0442	39.16	27.97	67.13	114.68	-47.55	QP
2	0.0476	52.94	27.94	80.88	114.04	-33.16	QP
3	0.0584	55.00	27.80	82.80	112.27	-29.47	QP
4	0.0952	69.59	27.37	96.96	108.02	-11.06	QP
5	0.1170	37.99	27.22	65.21	106.23	-41.02	peak
6	0.1170	27.07	27.22	54.29	106.23	-51.94	AVG
7	0.1363	54.62	27.12	81.74	104.91	-23.17	peak
8	0.1363	42.36	27.12	69.48	104.91	-35.43	AVG


Note:

Pre-scan in all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Coaxial
Test Voltage:	AC 120V/60Hz	Mode:	Mode 1

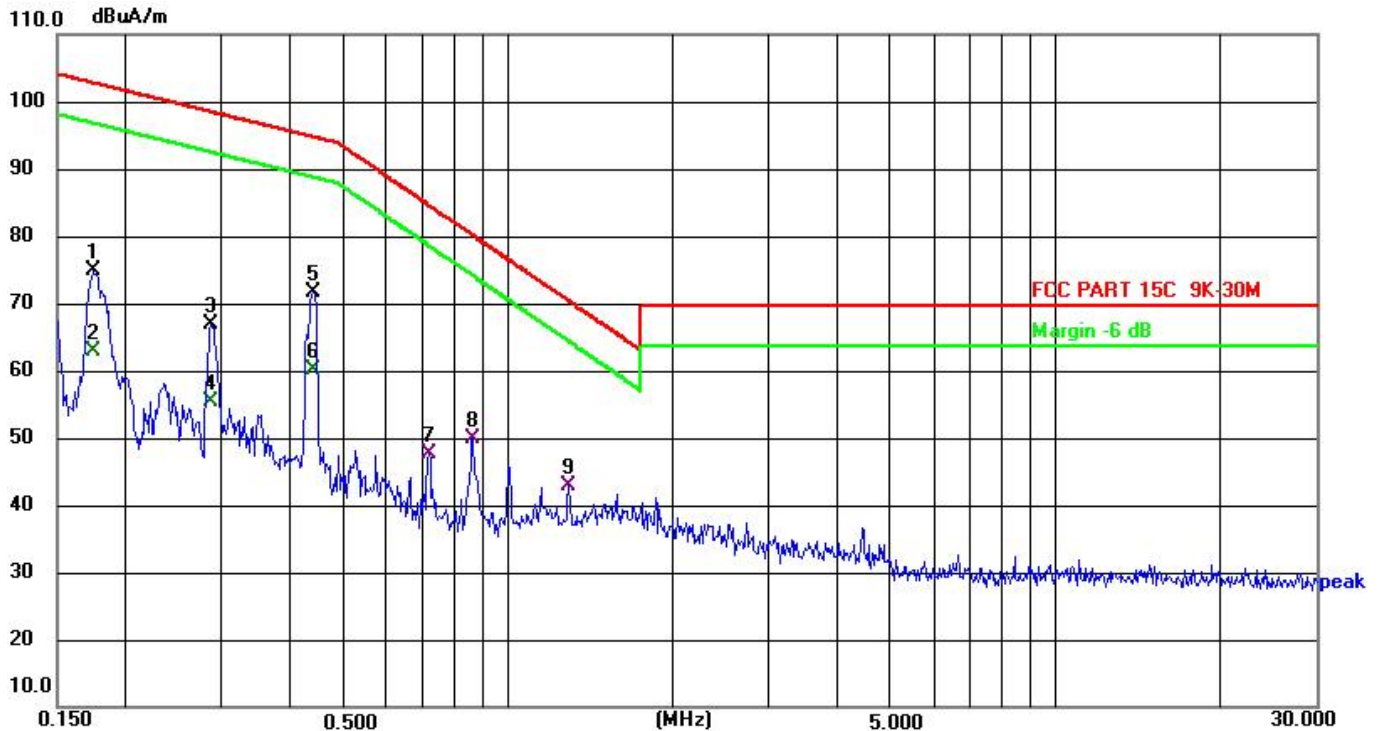

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuA/m)	Limit (dBuA/m)	Margin (dB)	Detector
1	0.1750	47.81	26.97	74.78	102.74	-27.96	peak
2	0.1750	35.88	26.97	62.85	102.74	-39.89	AVG
3	0.2862	40.17	26.62	66.79	98.47	-31.68	peak
4	0.2862	28.86	26.62	55.48	98.47	-42.99	AVG
5	0.4395	45.52	26.14	71.66	94.74	-23.08	peak
6	0.4395	34.11	26.14	60.25	94.74	-34.49	AVG
7	0.7160	22.35	25.28	47.63	84.62	-36.99	QP
8	0.8618	24.96	24.83	49.79	80.14	-30.35	QP
9	1.2890	18.78	24.06	42.84	70.40	-27.56	QP

Note:
 Pre-scan in all of mode, the worst case in of was recorded.
 Factor = antenna factor + cable loss – pre-amplifier.
 Margin = Emission Level- Limit.

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Coplane
Test Voltage:	AC 120V/60Hz	Mode:	Mode 1

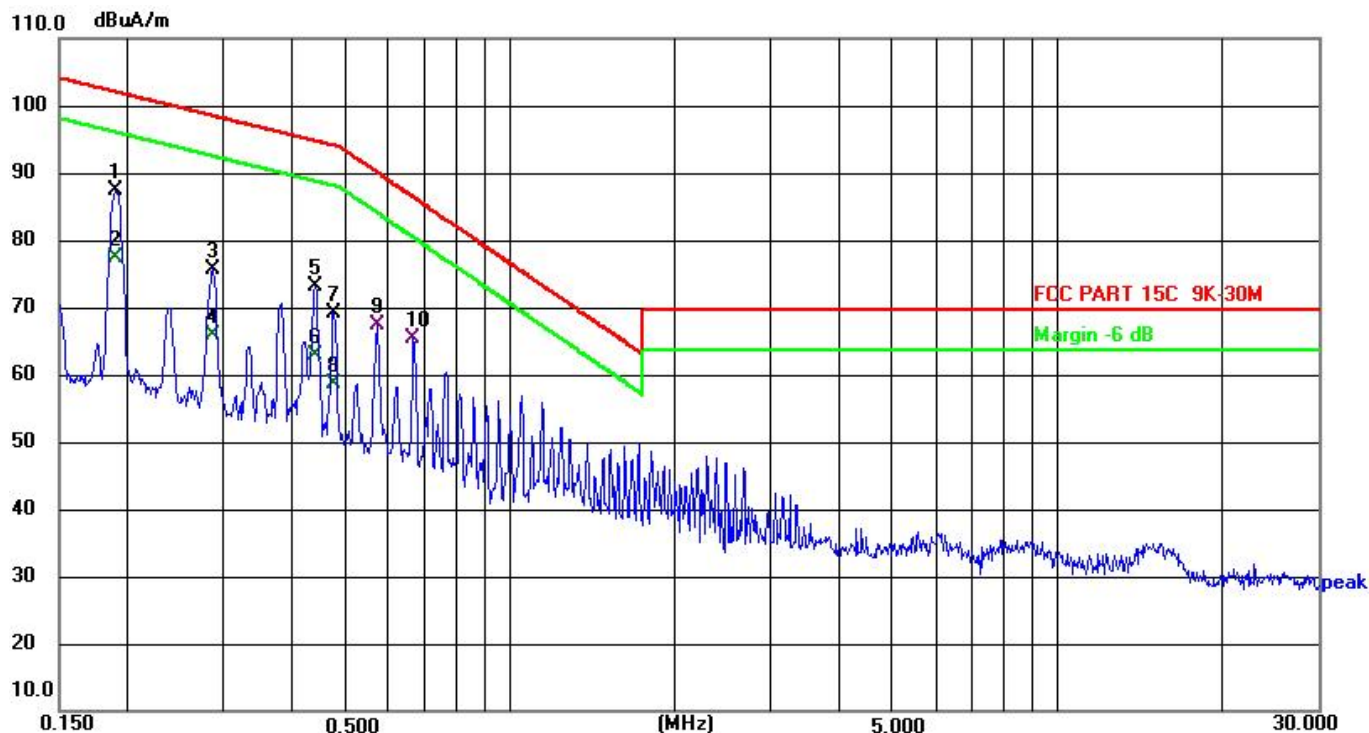

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuA/m)	Limit (dBuA/m)	Margin (dB)	Detector
1	0.1901	60.48	26.92	87.40	102.02	-14.62	peak
2	0.1901	50.53	26.92	77.45	102.02	-24.57	AVG
3	0.2862	48.91	26.62	75.53	98.47	-22.94	peak
4	0.2862	39.34	26.62	65.96	98.47	-32.51	AVG
5	0.4395	46.92	26.14	73.06	94.74	-21.68	peak
6	0.4395	36.71	26.14	62.85	94.74	-31.89	AVG
7	0.4761	43.10	26.03	69.13	94.05	-24.92	peak
8	0.4761	32.60	26.03	58.63	94.05	-35.42	AVG
9	0.5731	41.58	25.73	67.31	90.01	-22.70	QP
10	0.6643	39.90	25.44	65.34	86.44	-21.10	QP

Note:


Pre-scan in all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.


30MHz-1GHz:

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Mode:	Mode 1

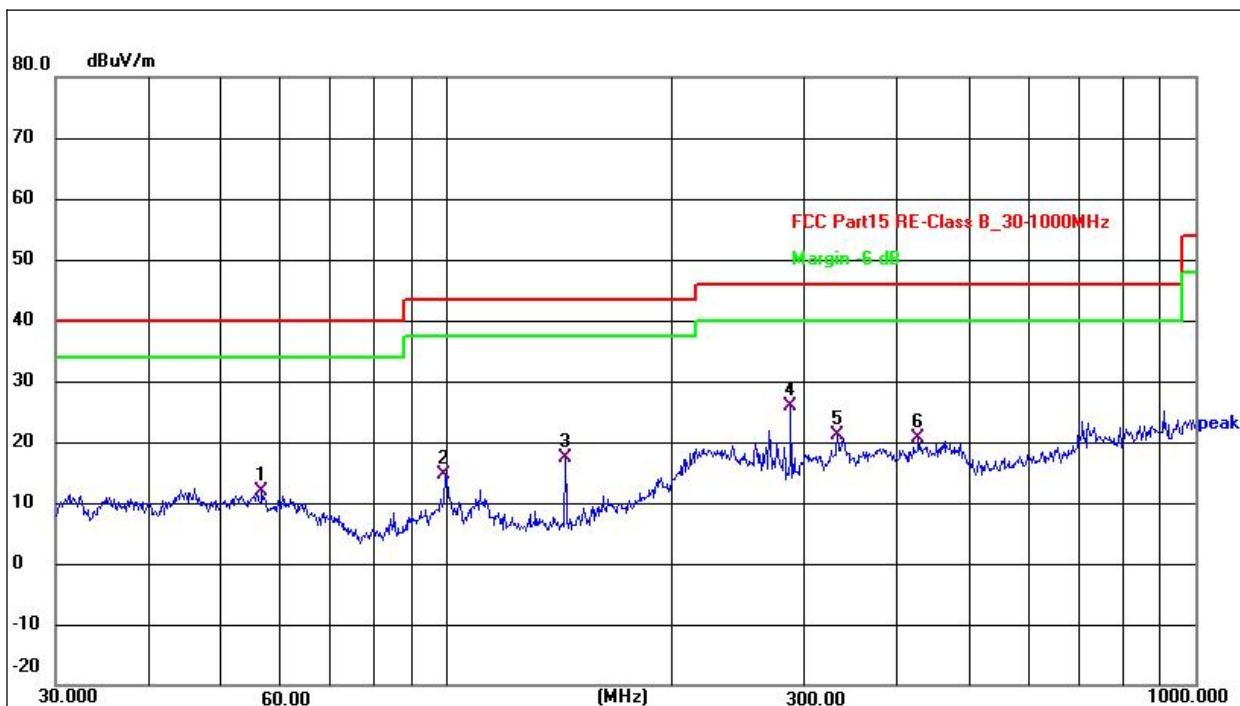

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	56.5930	26.65	-14.78	11.87	40.00	-28.13	QP
2	99.5279	31.11	-16.41	14.70	43.50	-28.80	QP
3	143.8293	37.48	-19.99	17.49	43.50	-26.01	QP
4	287.9904	40.25	-14.28	25.97	46.00	-20.03	QP
5	332.5187	34.20	-13.01	21.19	46.00	-24.81	QP
6	426.5210	31.97	-11.35	20.62	46.00	-25.38	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Mode:	Mode 1

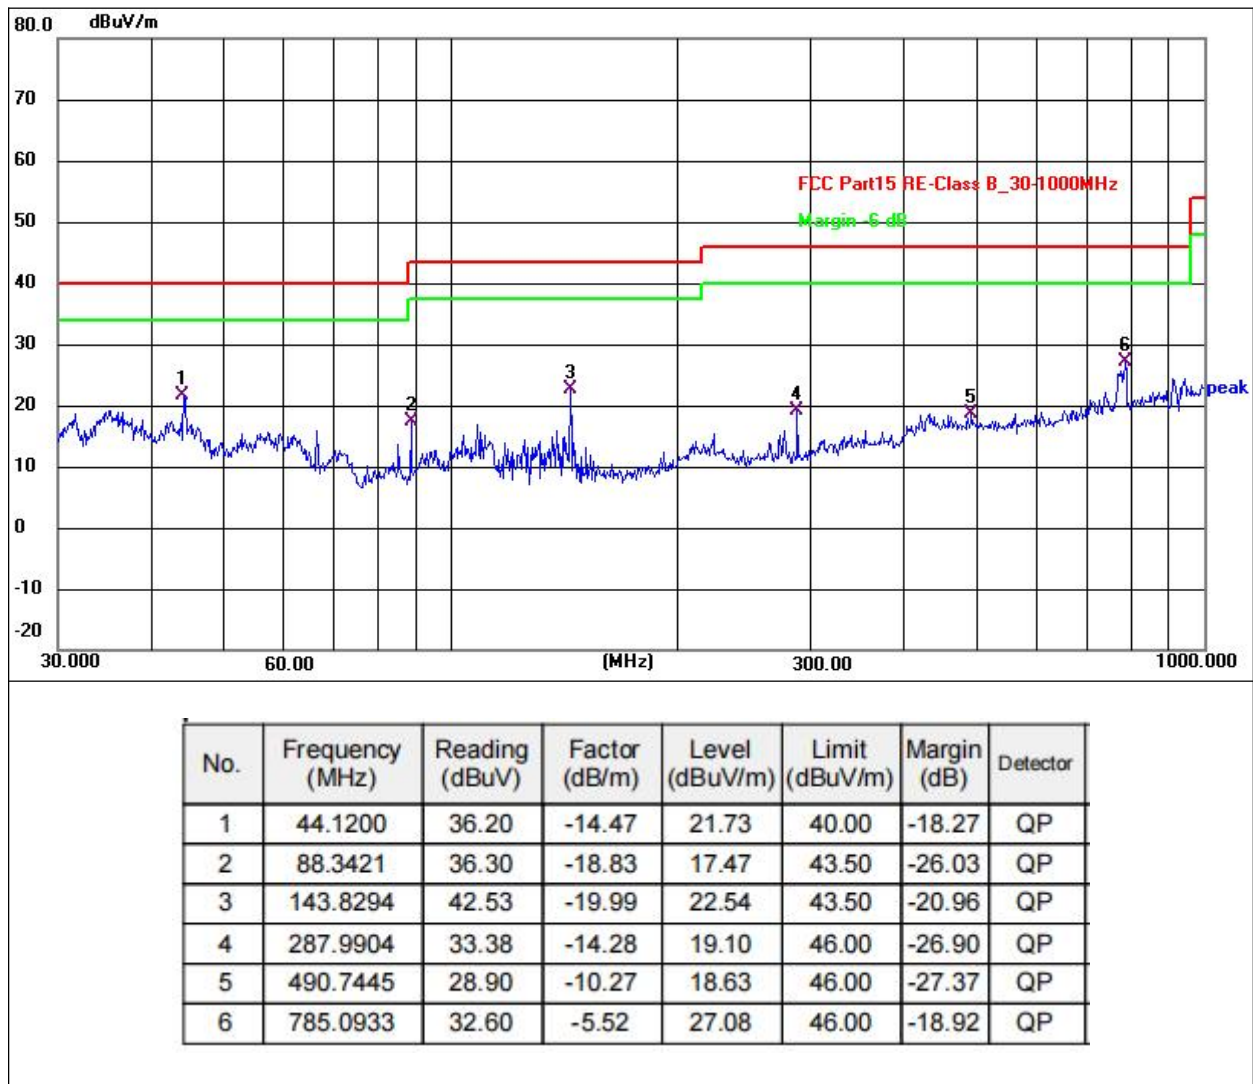

Remark:

Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading Level + Factor;

Margin = Level - Limit; the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

7. TEST PHOTOGRAPHS AND EUT PHOTOGRAPHS

Please see the attachment for details.

-----The end-----