



Instruction Manual

KB01003 Keyboard





English

1.Precautions

Device and System Requirements

1. The device needs to support Bluetooth 5.0 and above;
2. Multimedia features may not be fully functional in some operating systems.


2.Product Appearance

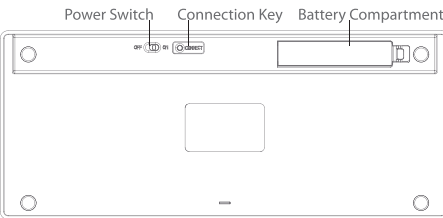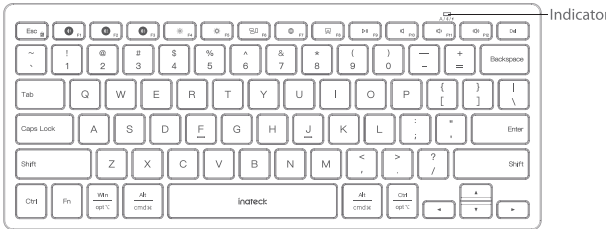

3. How to Use

Battery Installation

Open the battery compartment and install the batteries as indicated.



Note: The keyboard uses 2 AAA batteries. When not using the keyboard for an extended period or while carrying it, please switch it to the OFF position or remove the batteries.

Bluetooth Connection

Toggle the switch to "ON" position to enter Bluetooth channel 1 broadcasting mode. You will see " Inateck KB01003" in the Bluetooth list on your device. Click to connect.

4.Keyboard Function Keys

	Brightness-		Brightness+		Multitask Interface
	Switch Input Method		Screenshot		Play/Pause
	Mute		Volume-		Volume +
	Delete				

How to Use F1-F12

You may press + to enable/disable the lock. (The keyboard disables the lock by default.)

When lock is enabled:

Pressing triggers the function owned by .

Pressing + dims the screen brightness.

This method applies to all F keys (-).

When lock is disabled (Default Status):

Pressing dims the screen brightness.

Pressing + triggers the function owned by .

This method applies to all F keys (-).

Description for Other Keys(When lock is disabled)

	Short press to switch to BT1.
	Long press to pair in BT1.
	Short press to switch to BT2.
	Long press to pair in BT2.
	Short press to switch to BT3.
	Long press to pair in BT3.

Note: You can also press the "Connect" button on the back of the keyboard to initiate pairing for the current channel.

6.LED Indicator

Indicator Color	Status	Meaning
White	Solid	Caps Lock on
	Off	Caps Lock off
Red	Blinking	Low battery
Blue	Blinking	Connecting
	Off	Connected/Unconnected
Orange	Blinking	Connecting
	Off	Connected/Unconnected
Green	Blinking	Connecting
	Off	Connected/Unconnected

Bluetooth Indicator Color	Meaning
Blue	Bluetooth Channel 1
Orange	Bluetooth Channel 2
Green	Bluetooth Channel 3

7.Restore Factory Defaults

Hold + for 3 seconds and then all indicators will blink 3 times once the factory reset is completed.

8.Sleep Mode

After 30 minutes of inactivity, the keyboard will enter sleep mode. The connection can be rebuilt with a press of any key.

9.Product Specifications

Bluetooth Version	V 5.3
Bluetooth Range	About 10m
Power	2 *AAA batteries
Frequency Range	2402MHz - 2480MHz
Operating Temperature	-10°C -55°C
Actuation Force	60±10g

10.Packing List

- KB01003 * 1
- User Manual * 1
- AAA Battery * 2

FCC Note

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the Users, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

This equipment complies with FCC's RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or conjunction with any other antenna or transmitter.

⚠ Battery Safety Warning:

This product contains a built-in rechargeable lithium battery. Please observe the following safety precautions: do not dismantle, hit, crush, or expose the battery to fire. If the battery experiences severe swelling, discontinue use immediately. Avoid placing the battery in high-temperature environments, and do not use it if it has been immersed in water. During transportation, do not mix the battery with metallic objects.

⚠ Batteriesicherheitshinweis:

Dieses Produkt enthält einen eingebauten wiederaufladbaren Lithium-Akku. Bitte beachten Sie die folgenden Sicherheitsvorkehrungen: Zerlegen Sie den Akku nicht, schlagen Sie ihn nicht, zerquetschen Sie ihn nicht und setzen Sie ihn nicht Feuer aus. Bei starkem Aufblähen des Akkus verwenden Sie ihn bitte sofort nicht mehr. Vermeiden Sie es, den Akku in heißen Umgebungen zu platzieren, und verwenden Sie ihn nicht, wenn er in Wasser getaucht wurde. Mischen Sie den Akku während des Transports nicht mit metallischen Gegenständen.

⚠ 电池安全警告:
本产品内置可充电锂电池, 请遵守以下安全注意事项: 禁止拆解、撞击、挤压或投入火中。如出现严重鼓胀, 请勿继续使用。请勿至于高温环境中。电池浸水后禁止使用! 请勿将电池与金属物品一起运输!

EU Declaration of Conformity

Inateck Co., Ltd. hereby declares that this device complies with the Directive 2014/53/EU .

A copy of the Declaration of Conformity can be accessed from <https://www.imateck.de/pages/imateck-euro-compliance>.



Service Center

Europe

F&M Technology GmbH
Tel: +49 341 5199 8410 (Working day 8 AM - 4 PM CET)
Fax: +49 341 5199 8413
Address: Fraunhoferstraße 7, 04178 Leipzig, Deutschland

North America

Inateck Technology Inc.
Tel: +1 (909) 698 7018 (Working day 9 AM - 5 PM PST)
Address: 2078 Francis St., Unit 14-02, Ontario, CA 91761, USA

日本

Inateck 株式会社
電話番号: +81 06 7500 3304
〒 547-0014 大阪府大阪市平野区長吉川辺 3 丁目 10 番 11 号

F&M Technology GmbH

For Product and Battery
Fraunhoferstraße 7, 04178 Leipzig, Deutschland
Tel: +49 341 5199 8410
Email: service@imateck.com
Postal code: 04178

Inateck Technology (UK) Ltd.

95 High Street, Office B, Great Missenden, United Kingdom, HP16 0AL
Tel: +44 20 3239 9869

Manufacturer


Shenzhen Inateck Technology Co., Ltd.
Address: Suite 2507, Block 11 in Tian An Cloud Park, Bantian Street, Longgang District, Shenzhen, Guangdong, China
Email: product@licheng-tech.com
Postal code: 518129

Deutsch

1.Vorsichtsmaßnahmen

- Geräte- und Systemanforderungen
- 1. Das Gerät muss Bluetooth 5.0 oder höher unterstützen;
 - 2. Die Multimedia-Funktionen sind bei einigen Betriebssystemen möglicherweise nicht voll funktionsfähig.

2.Produkt Erscheinungsbild

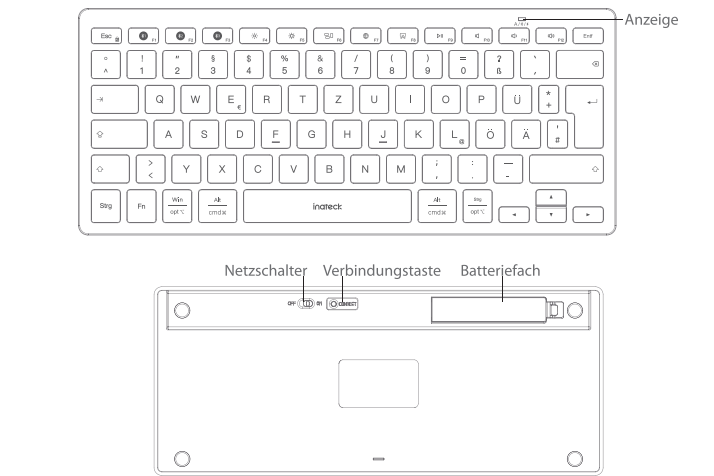

3. Nutzung

Einlegen der Batterien

Öffnen Sie das Batteriefach und legen Sie die Batterien wie angegeben ein.



Hinweis: Die Tastatur wird mit 2 AAA-Batterien betrieben. Wenn Sie die Tastatur über einen längeren Zeitraum nicht benutzen oder sie transportieren, schalten Sie sie bitte aus oder nehmen Sie die Batterien heraus.

Bluetooth-Verbindung

Schalten Sie den Schalter in die Position „ON“, um in den Übertragungsmodus für Bluetooth-Kanal 1 zu gelangen. Sie sehen „Inateck KB01003“ in der Bluetooth-Liste Ihres Geräts. Klicken Sie zum Verbinden.

4.Funktionstasten der Tastatur

	Helligkeit-		Helligkeit+		Multitasking Oberfläche
	Eingabemethode wechseln		Screenshot machen		Wiedergabe/Pause
	Stumm		Lautstärke-		Lautstärke+
	Löschen				

So verwenden Sie F1-F12

Sie können + drücken, um die Tastensperre zu aktivieren/deaktivieren. (Die Tastatur deaktiviert die Tastensperre standardmäßig.)

Wenn die Sperre aktiviert ist:

Durch Drücken von wird die Funktion der Taste ausgelöst.

Durch Drücken von + wird die Bildschirmhelligkeit gedimmt.

Diese Methode gilt für alle F-Tasten (-).

Wenn die Sperre deaktiviert ist (Standardstatus):

Wenn Sie drücken, wird die Bildschirmhelligkeit gedimmt.

Durch Drücken von + wird die Funktion der Taste ausgelöst.

Diese Methode gilt für alle F-Tasten (-).

Beschreibung der anderen Tasten(Wenn die Sperre deaktiviert ist)

	Kurz drücken um zu BT1 zu wechseln. Lang drücken um in BT1 zu koppeln.
	Kurz drücken um zu BT2 zu wechseln. Lang drücken um in BT2 zu koppeln.
	Kurz drücken um zu BT3 zu wechseln. Lang drücken um in BT3 zu koppeln.

Anmerkung: Sie können auch die "Connect"-Taste auf der Rückseite der Tastatur drücken, um die Paarung für den aktuellen Kanal zu initiieren.

6.LED Anzeige

Farbe der Anzeige	Status	Bedeutung
Weiß	Dauerhaft an	Feststelltaste Ein
	Aus	Feststelltaste Aus
Rot	Blinkend	Niedriger Batteriestand
	Blinkend	Verbinden
Blau	Aus	verbunden/unverbunden
	Blinkend	Verbinden
Orange	Aus	verbunden/unverbunden
	Blinkend	Verbinden
Grün	Aus	verbunden/unverbunden

Bluetooth-Anzeigefarbe	Bedeutung
Blau	Bluetooth-Kanal 1
Orange	Bluetooth-Kanal 2
Grün	Bluetooth-Kanal 3

7.Werkseinstellungen wiederherstellen

Halten Sie + 3 Sekunden lang gedrückt, dann blinken alle Anzeigen 3 Mal, sobald das Zurücksetzen auf die Werkseinstellungen abgeschlossen ist.

8.Ruhemodus

Nach 30 Minuten Inaktivität geht die Tastatur in den Ruhezustand über. Die Verbindung kann mit einem beliebigen Tastendruck wiederhergestellt werden.

9.Produktspezifikationen

Bluetooth -Version	V 5.3
Bluetooth-Reichweite	Ca. 10m
Stromversorgung	2 *AAA Batterien
Frequenzbereich	2402MHz - 2480MHz
Betriebstemperatur	-10°C -55°C
Antriebskraft	60±10g

10.Packungsinhalt

- KB01003 * 1
- Bedienungsanleitung * 1
- AAA Batterien * 2


中文

1. 注意事项

设备和系统要求

- 1. 设备需支持蓝牙 5.0 及以上；
- 2. 多媒体功能在不同的操作系统版本中部分无效。

2. 产品外观

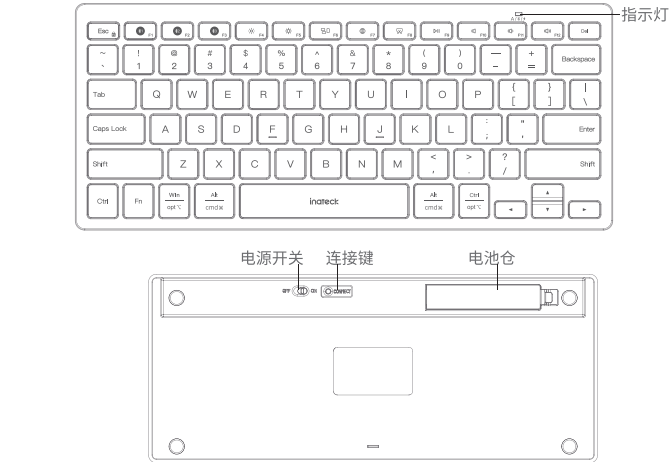

3. 怎么使用

电池安装

打开电池仓，将电池按照指示安装



注：键盘使用 AAA 电池 2 节，长时间不使用或携带时请将开关拨到标识为 OFF 关机状态或取出内部的电池。

蓝牙连接

键盘拨动开关到“ON”，进入通道 1 广播模式，您可以在设备的蓝牙列表上看到“Inateck KB01003”，点击即可连接。

4. 键盘功能键

	亮度 -		亮度 +		多任务界面
	切换输入法		截图		播放 / 暂停
	静音		音量 -		音量 +
	删除				

如何使用 F1-F12

您可以按 + 来启用 / 关闭 锁。（键盘默认禁用 锁）

当 锁被启用时：

按下 可以触发 键对应的功能。

按 + 的组合可以调暗屏幕的亮度。

这种方法适用于所有 F 键 (-)。

当 锁被禁用时（默认状态）：

按 可使屏幕亮度变暗。

同时按 + 可以触发 对应的功能。

这种方法适用于所有 F 键 (-)。

其他按键描述 (当 锁被禁用时)

	短按，切换到该通道 长按，该通道进行配对
	短按，切换到该通道 长按，该通道进行配对
	短按，切换到该通道 长按，该通道进行配对

注：你也可以按键盘背面的“连接键”启动当前通道配对。

6.LED 描述

指示灯颜色	状态	含义
白色	常亮	大写打开
	熄灭	大写未打开
红色	闪烁	低电量
蓝色	闪烁	连接中
	蓝灯熄灭	已连接 / 未连接
橙色	闪烁	连接中
	橙灯熄灭	已连接 / 未连接
绿色	闪烁	连接中
	绿灯熄灭	已连接 / 未连接

蓝牙指示灯颜色	描述
蓝色	蓝牙通道 1
橘色	蓝牙通道 2
绿色	蓝牙通道 3

7. 恢复出厂设置

长按 + 所有指示灯同时闪烁 3 次，这表示已经完成了恢复出厂设置。

8. 休眠模式

30 分钟不操作，键盘会进入深度休眠模式，按键即可回连。

9. 产品规格

蓝牙版本	V5.3
传输距离	约 10m
电源	AAA 电池 *2
频率范围	2402MHz - 2480MHz
工作温度	-10°C -55°C
按键力	60 ± 10g

10. 包装清单

- KB01003*1
- 说明书 *1
- AAA 电池 *2

说明书尺寸：折后 120*180mm

材质：100g 双胶纸

此页不做印刷