

inateck®

Instruction Manual




KB06103 Keyboard



English · Deutsch

English

1. Product Diagram

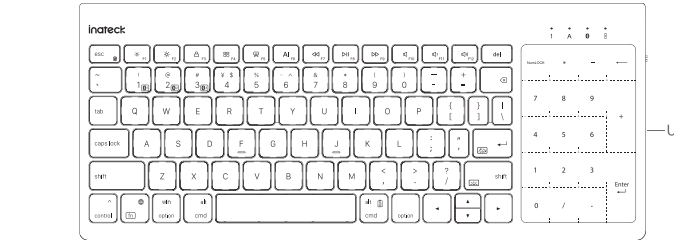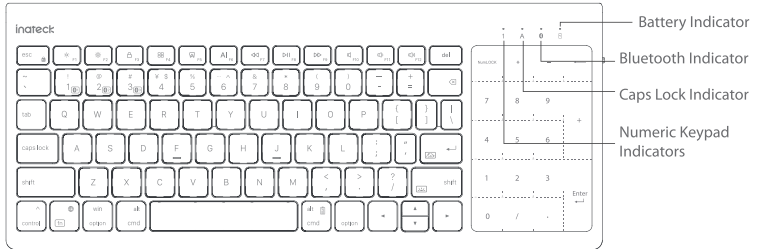

2. Power On/Off

- Power On: Slide to ON, the Bluetooth indicator lights up.
- Power Off: Slide to OFF, the Bluetooth indicator turns off.

3. Bluetooth Pairing

Step1: For the first use, place the iPad on the stand and slide the power switch to the On position and then KB06103 will automatically enter Bluetooth Channel 1 pairing mode (Default mode). To enter the Bluetooth pairing mode in the future use, you can also try the following steps:

- Hold **fn** + **1** for 3 seconds. When the Bluetooth indicator flashes in blue rapidly, it means KB06103 is in Bluetooth Channel 1 pairing mode.
- Hold **fn** + **2** for 3 seconds. When the Bluetooth indicator flashes in orange rapidly, it means KB06103 is in Bluetooth Channel 2 pairing mode.
- Hold **fn** + **3** for 3 seconds. When the Bluetooth indicator flashes in green rapidly, it means KB06103 is in Bluetooth Channel 3 pairing mode.

Step2: On the iPad, select Settings>Bluetooth>On and then "inateck KB06103" will show up in "Other Devices".
Step3: Tap "inateck KB06103" to pair it with your iPad and then the Bluetooth indicator will stay solid in seconds, which means that Bluetooth pairing is completed.

Note:

1)Set Up Your iPad:

For better user experience, please follow steps below to set up your iPad at first use once Bluetooth pairing is completed (using iPadOS 17 and above versions as the example). For any queries, feel free to contact us.
Go to Settings > General > Trackpad and drag the slider to the middle of the tracking speed.
Go to Settings > General > Trackpad and turn on "Tap to Click" and "Two Finger Secondary Click".
Go to Settings > Accessibility > Touch and turn off "Assistive Touch".
Go to Settings > Multitasking & Gestures and turn on "Four & Five Finger Gestures".
Go to Settings > Accessibility > Keyboards and turn off "Full Keyboard Access".

Optional Settings

Steps to stop Caps Lock changing your keyboard language:
Go to Settings > General > Keyboard > Hardware Keyboard and turn off Switch Languages using Caps Lock.
Steps to disable the double tap period shortcut:
Go to Settings > General > Keyboard > Hardware Keyboard and click the switch to turn on "Shortcut".
Steps to disable using the Global Key to show Emoji:
Go to Settings > General > Keyboard > Hardware Keyboard and turn off "Press the Global Key for Emoji".

2)Fix Bluetooth Pairing Problems:

Step 1: Go to Settings > Bluetooth, find "inateck KB06103" in My Devices and tap the info button next to it, then tap Forget This Device. If there are multiple pairing records related to the keyboard, please clear all of them.

Step 2: Hold **ESC** + **=** simultaneously for 3 seconds and then all four indicators will blink for 3 times once the factory reset is completed.

Step 3: Pair it with your inateck KB06103.

4. iPad OS Multi-Touch Gestures

	Drag: Click and hold the item until it lifts up and drag it to another location with another finger.		Scroll: Slide two fingers up or down to scroll.
	Swipe: Swipe left or right with two fingers.		Zoom in or out: Pinch with two fingers to zoom in or out.
	Secondary click: Click or tap with two fingers.		Show desktop: Swipe up with three fingers.
	App Exposé: Swipe up with three fingers and pause.		Swipe between full-screen apps: Swipe left or right with three fingers.

5.Touchpad Area Numeric Keypad On/Off

•Enable Numeric Keypad: Double-tap the NumLock area on the touchpad twice, and the indicator 1 will stay green.

•Disable Numeric Keypad: Double-tap the NumLock area on the touchpad twice to turn it off, and the indicator 1 will turn off.

Note: If there is no numeric input within 60 seconds, the numeric keypad function will be disabled, and the touchpad function will automatically switch on, with the numeric keypad indicator turning off.

6.Adjust the Keyboard Backlight

- 1) Hold **fn** + **Backlight** simultaneously to adjust the backlight color. 7 colors are available in total.
- 2) Hold **fn** + **Brightness** simultaneously to adjust the backlight brightness. 3 levels are at your choice.

7.Shortcut Keys

ESC	Undo	Brightness-	Brightness+
F5	Lock	Task View	Take a screenshot
AI	AI (Inateck Origin)	Last Track	Play/Pause
Next Track	Mute	Volume-	
Volume+	Delete	Page up	
Page down	Home	End	

2) Common Keyboard Shortcuts

cmd + X	Cut	cmd + C	Copy	cmd + V	Paste
cmd + A	Select all	cmd + Space	Search	control+Space	Switch keyboard layout
cmd + Tab	Switch between Apps				

3) How to Use on Windows

a. How to Use F1-F12

The default function of F1-F12 is shortcut and multimedia functions.
You may press **fn** + **ESC** to enable/disable the **fn** lock. (The keyboard disables the **fn** lock by default).
When the Fn Lock is enabled:

Press **ESC** can trigger the functionality owned by **F1**, such as the **refresh** function on Windows.
The battery indicator light will flash twice quickly; if Fn lock is turned off, the indicator will not flash.
To use shortcut and multimedia functions, press **fn** + F key, e.g., **fn** + **ESC** to decrease screen brightness.

This method applies to all F keys (F1-F12).
When the Fn Lock is disabled (Default Status):
For example, pressing F5 will take a screenshot; if you press **fn** + **F5**, it will trigger the F5 refresh function.

b. The Combination of Fn and Other Keys

fn + ESC	Enable/Disable Fn Lock
fn + Battery	Check the Battery Level
fn + 1	Short press to enter BT1 Hold for 3S to enter BT1 pairing mode
fn + 2	Short press to enter BT2 Hold for 3S to enter BT2 pairing mode
fn + 3	Short press to enter BT3 Hold for 3S to enter BT3 pairing mode

8.AI Function

On Windows devices, the **AI** can be used to wake up Inateck Origin, a software that supports AI translation, AI chat, and other functions.
You can search for Inateck Origin in the Microsoft Store to download it.

Short press the **AI**:

1.If no text is copied, it will activate AI chat;

2.If text is copied, it will activate AI translation.

9.LED Indicator

Indicator	Status	Meaning
Caps Lock Indicator-White	Solid	Caps Lock On
	Off	Caps Lock Off
Numeric keypad Indicator-Green	Solid	Numeric keypad is enabled; touchpad function is unavailable.
	Off	Numeric keypad is disabled; touchpad function is available.
Bluetooth Indicator (Channel 1-Blue Channel 2-Orange Channel 3-Green)	Solid	Bluetooth Connected
	Off	Bluetooth Unconnected
	Slow Blinking	Bluetooth Reconnecting
	Fast Blinking	Bluetooth Pairing
Charging Indicator-Red	Flash	Low Battery
	Solid	Charging
Charging Indicator-Green	Solid	Fully Charged
	Flash	Flash for 2S, Fn Lock On
Fn Lock Indicator-Red	Flash	Flash for 2S, Fn Lock On
	Stay Off	Fn Lock Off

10.Restore Factory Defaults

Hold **ESC** + **=** for 3 seconds and then the four indicators will blink for 3 times once the factory reset is completed.

11.Check Battery Level

Hold **fn** + **Battery** simultaneously to check the battery level according to the blinking frequency of the red battery indicator.

Blinking Frequency	Battery Level
Once	0-25%
Twice	25%-50%
Three Times	50%-75%
Four Times	75%-100%

12.Charging

When the battery level is under 20%, the battery indicator will blink in red. You can connect the included USB cable to recharge the keyboard. The recommended charging voltage is 5V. The keyboard will fully charge in 3.5 hours. The red battery indicator will stay solid in red when the keyboard is charging. Once it's fully charged, the battery indicator turns to green.

13.Sleep Mode

- 1) When KB06103 is left idle for **10 seconds**, the backlight will automatically turn off.
- 2) When KB06103 is left idle for **10 minutes**, it will enter sleep mode and the Bluetooth connection will be disrupted. The connection can be rebuilt with a press of any key.


Note: Pressing the touchpad cannot wake up the keyboard.

14.Product Specification


Bluetooth Version	V5.3
Bluetooth Range	10 m
Charging Time	3.5h
Continuous Working Time (Backlight On)	About 26h
Continuous Working Time (Backlight Off)	About 175h
Operating Temperature	-10°C ~ +55°C
Bluetooth Frequency Range	2402-2480MHZ
Actuation Force	60±10g
Battery Capacity	2600mAh

15.Keyboard Stand Usage


- 1.Slide out the stand on the back until it reaches the limit position.

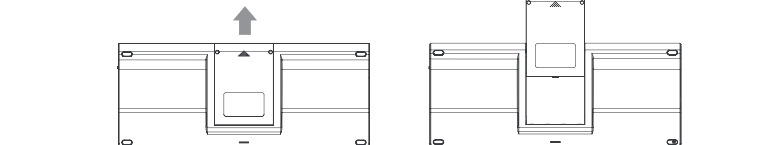

- 2.Rotate the stand support block to the limit position.

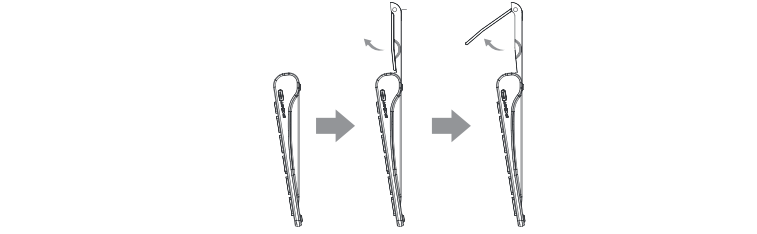

- 3.Place the tablet or phone on the stand. Note: Do not apply excessive force to the stand components to avoid exceeding the load-bearing capacity.

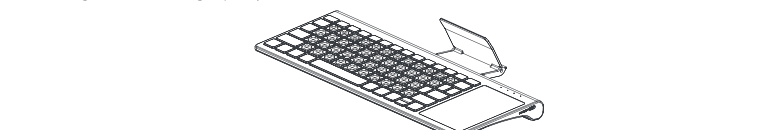

16.Packing List

- KB06103*1
- Charging Cable*1
- User Manual*1

FCC Note

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the Users, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment. The device has been evaluated to meet general RF exposure requirements. This equipment complies with FCC's RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or conjunction with any other antenna or transmitter.

Battery Safety Warning:

This product contains a built-in rechargeable lithium battery. Please observe the following safety precautions: do not dismantle, hit, crush, or expose the battery to fire. If the battery experiences severe swelling, discontinue use immediately. Avoid placing the battery in high-temperature environments, and do not use it if it has been immersed in water. During transportation, do not mix the battery with metallic objects.

Batteriesicherheitshinweis:

Dieses Produkt enthält einen eingebauten wiederaufladbaren Lithium-Akku. Bitte beachten Sie die folgenden Sicherheitsvorkehrungen: Zerlegen Sie den Akku nicht, schlagen Sie ihn nicht, zerquetschen Sie ihn nicht und setzen Sie ihn nicht Feuer aus. Bei starkem Aufblähen des Akkus verwenden Sie ihn bitte sofort nicht mehr. Vermeiden Sie es, den Akku in heißen Umgebungen zu platzieren, und verwenden Sie ihn nicht, wenn er in Wasser getaucht wurde. Mischen Sie den Akku während des Transports nicht mit metallischen Gegenständen.

Charging Precautions/Ladehinweise

EN:

The power delivered by the charger must be between min [0.175] Watts required by the radio equipment, and max [1.75] Watts in order to achieve the maximum charging speed.

DE:

Der vom Ladegerät gelieferte Strom muss zwischen dem Mindestwert von [0.175] Watt, der für die Funkgeräte erforderlich ist, und dem Höchstwert von [1.75] Watt liegen, um die maximale Ladegeschwindigkeit zu erreichen.



EU Declaration of Conformity

Inateck Co., Ltd. hereby declares that this device complies with the Directive 2014/53/EU .
A copy of the Declaration of Conformity can be accessed from <https://www.inateck.de/pages/inateck-euro-compliance>.



说明书尺寸：折后 120*180mm

材质：100g 双胶纸

此页不做印刷