

APPENDIX A: TEST RESULT

Appendix A.1: AC Line Conducted Emission

Test Data


Environmental Conditions

Temperature:	24.1℃
Relative Humidity:	42 %
ATM Pressure:	99.2 kPa
Test Engineer:	Homelander Dai
Test Date:	2026-09-07
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

With tag


AC 120V/60Hz, Line:

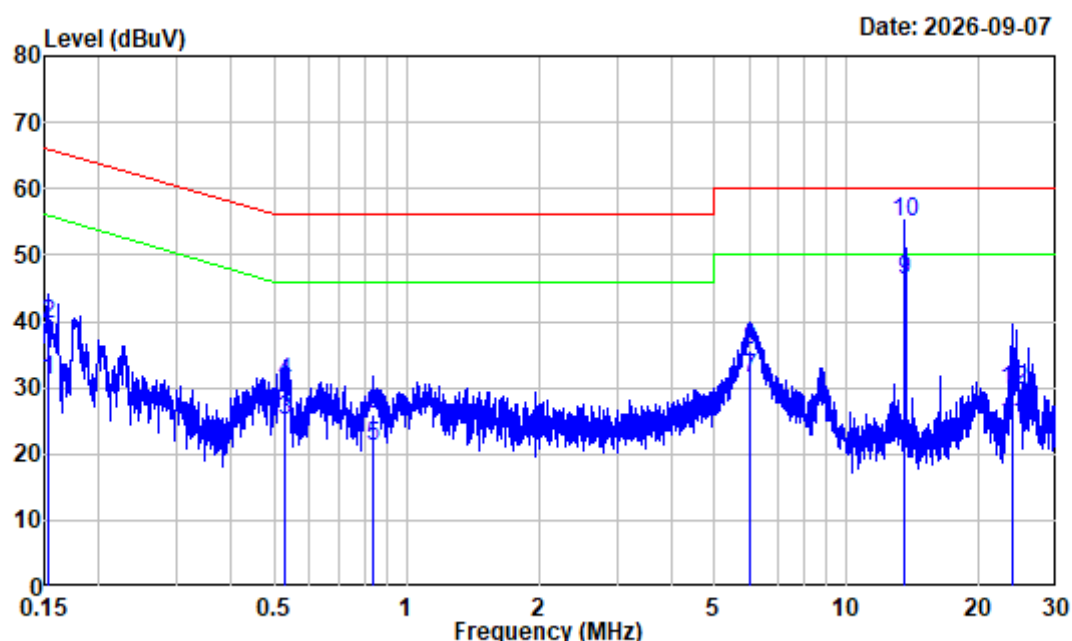

Site : Shielding Room
 Condition : Line
 Job No. : 2604V73214E-RF
 Test Mode : Transmitting(with tag)
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.153	19.73	11.29	31.02	55.84	-24.82	Average
2	0.153	19.73	19.83	39.56	65.84	-26.28	QP
3	0.528	20.02	4.93	24.95	46.00	-21.05	Average
4	0.528	20.02	10.64	30.66	56.00	-25.34	QP
5	0.836	20.09	1.01	21.10	46.00	-24.90	Average
6	0.836	20.09	5.79	25.88	56.00	-30.12	QP
7	6.044	20.63	10.74	31.37	50.00	-18.63	Average
8	6.044	20.63	15.00	35.63	60.00	-24.37	QP
9	13.569	19.53	26.53	46.06	50.00	-3.94	Average
10	13.569	19.53	35.35	54.88	60.00	-5.12	QP
11	23.762	19.54	4.87	24.41	50.00	-25.59	Average
12	23.762	19.54	10.00	29.54	60.00	-30.46	QP

AC 120V/60Hz, Neutral:

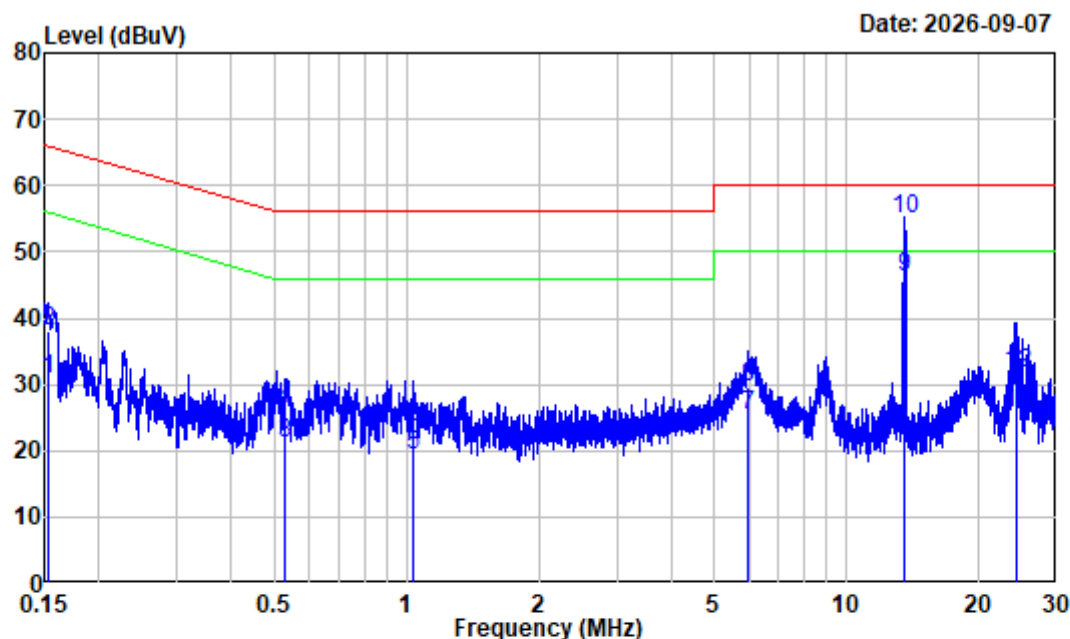


Site : Shielding Room
 Condition : Neutral
 Job No. : 2604V73214E-RF
 Test Mode : Transmitting(with tag)
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.154	19.41	11.42	30.83	55.80	-24.97	Average
2	0.154	19.41	18.76	38.17	65.80	-27.63	QP
3	0.529	20.02	1.22	21.24	46.00	-24.76	Average
4	0.529	20.02	6.16	26.18	56.00	-29.82	QP
5	1.031	20.43	-1.17	19.26	46.00	-26.74	Average
6	1.031	20.43	3.20	23.63	56.00	-32.37	QP
7	5.973	20.36	5.01	25.37	50.00	-24.63	Average
8	5.973	20.36	9.15	29.51	60.00	-30.49	QP
9	13.569	20.05	26.10	46.15	50.00	-3.85	Average
10	13.569	20.05	34.93	54.98	60.00	-5.02	QP
11	24.335	19.96	5.84	25.80	50.00	-24.20	Average
12	24.335	19.96	11.84	31.80	60.00	-28.20	QP

Without tag


AC 120V/60Hz, Line:

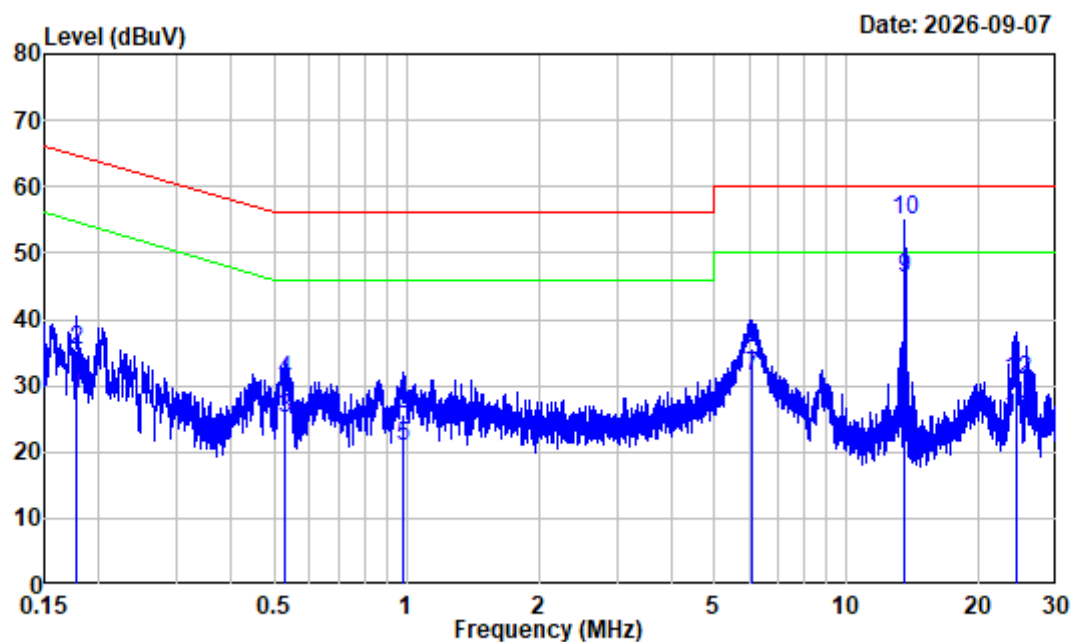

Site : Shielding Room
 Condition : Line
 Job No. : 2604V73214E-RF
 Test Mode : Transmitting(without tag)
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.178	19.94	8.60	28.54	54.59	-26.05	Average
2	0.178	19.94	15.48	35.42	64.59	-29.17	QP
3	0.528	20.02	4.90	24.92	46.00	-21.08	Average
4	0.528	20.02	10.70	30.72	56.00	-25.28	QP
5	0.986	20.15	0.77	20.92	46.00	-25.08	Average
6	0.986	20.15	5.48	25.63	56.00	-30.37	QP
7	6.113	20.63	10.85	31.48	50.00	-18.52	Average
8	6.113	20.63	15.07	35.70	60.00	-24.30	QP
9	13.569	19.53	26.54	46.07	50.00	-3.93	Average
10	13.569	19.53	35.27	54.80	60.00	-5.20	QP
11	24.335	19.52	5.61	25.13	50.00	-24.87	Average
12	24.335	19.52	11.19	30.71	60.00	-29.29	QP

AC 120V/60Hz, Neutral:

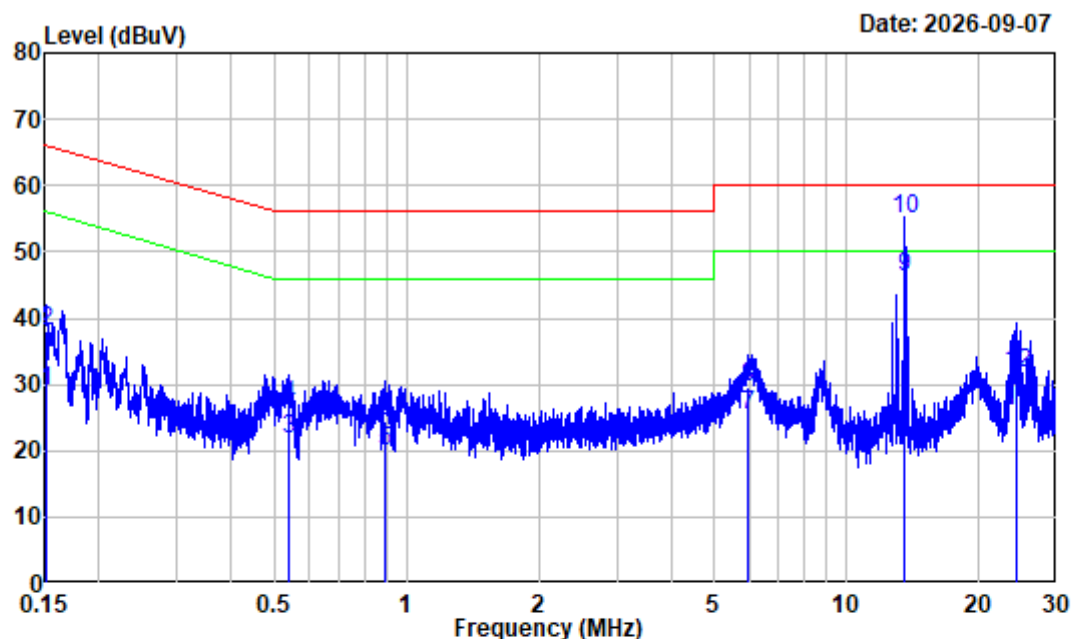

Site : Shielding Room
 Condition : Neutral
 Job No. : 2604V73214E-RF
 Test Mode : Transmitting(without tag)
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.152	19.40	9.55	28.95	55.90	-26.95	Average
2	0.152	19.40	18.50	37.90	65.90	-28.00	QP
3	0.540	20.02	1.71	21.73	46.00	-24.27	Average
4	0.540	20.02	6.96	26.98	56.00	-29.02	QP
5	0.896	20.32	-0.37	19.95	46.00	-26.05	Average
6	0.896	20.32	4.21	24.53	56.00	-31.47	QP
7	5.977	20.36	4.92	25.28	50.00	-24.72	Average
8	5.977	20.36	9.32	29.68	60.00	-30.32	QP
9	13.569	20.05	26.26	46.31	50.00	-3.69	Average
10	13.569	20.05	35.01	55.06	60.00	-4.94	QP
11	24.335	19.96	5.90	25.86	50.00	-24.14	Average
12	24.335	19.96	11.68	31.64	60.00	-28.36	QP

Appendix A.2: Radiated Emission

Test Data

For Radiated Spurious Emissions, this device is installed vertically in Y-axes orientation. It was provided by applicant. The Y-axes orientation was tested and recorded in the report.

9kHz-1GHz


Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	48 %
ATM Pressure:	99.2 kPa
Test Engineer:	Jayden Luo
Test Date:	2026-09-10
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.


With tag

9kHz~30MHz:

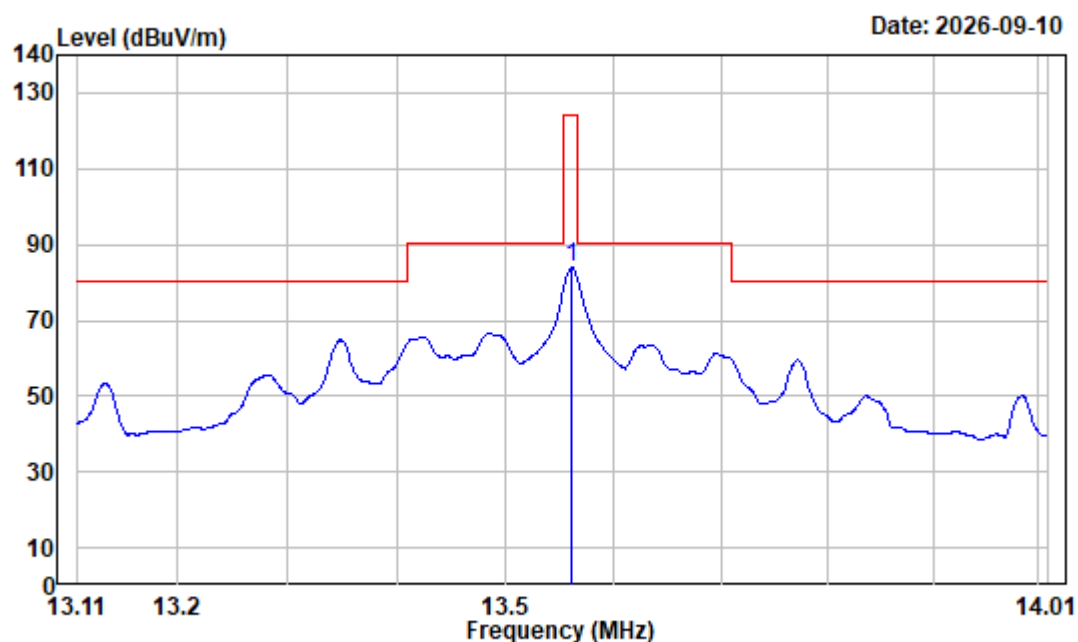


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.561	-4.41	88.37	83.96	124.00	-40.04	Peak

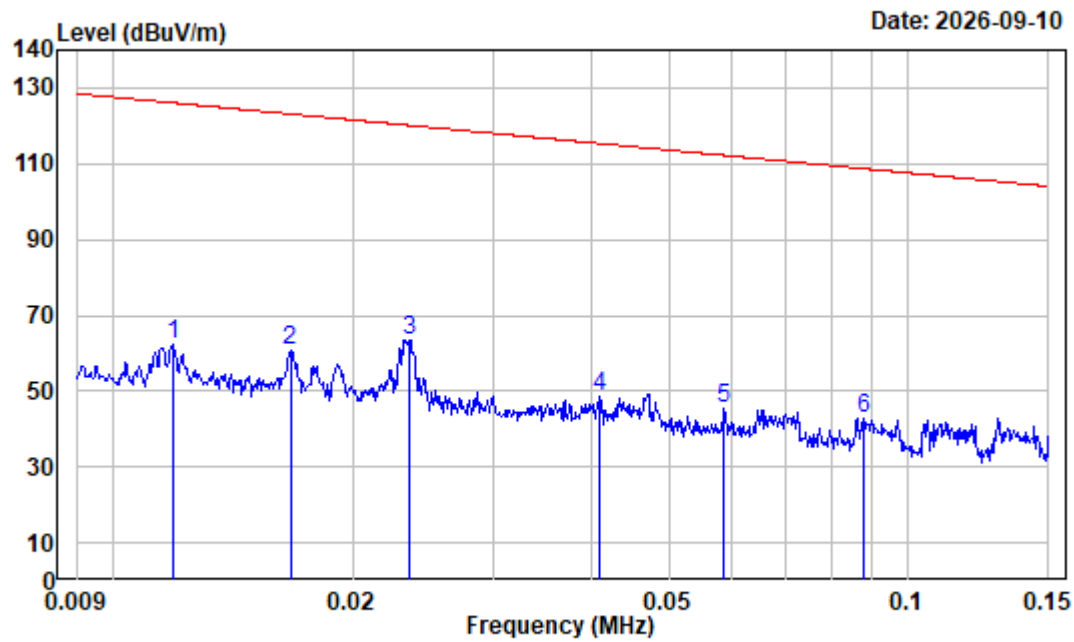


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:300Hz VBW:1kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	34.99	27.13	62.12	126.10	-63.98	Peak
2	0.017	32.85	27.85	60.70	123.14	-62.44	Peak
3	0.024	29.78	33.69	63.47	120.14	-56.67	Peak
4	0.041	24.67	24.12	48.79	115.35	-66.56	Peak
5	0.059	21.59	23.88	45.47	112.24	-66.77	Peak
6	0.088	17.70	25.08	42.78	108.73	-65.95	Peak

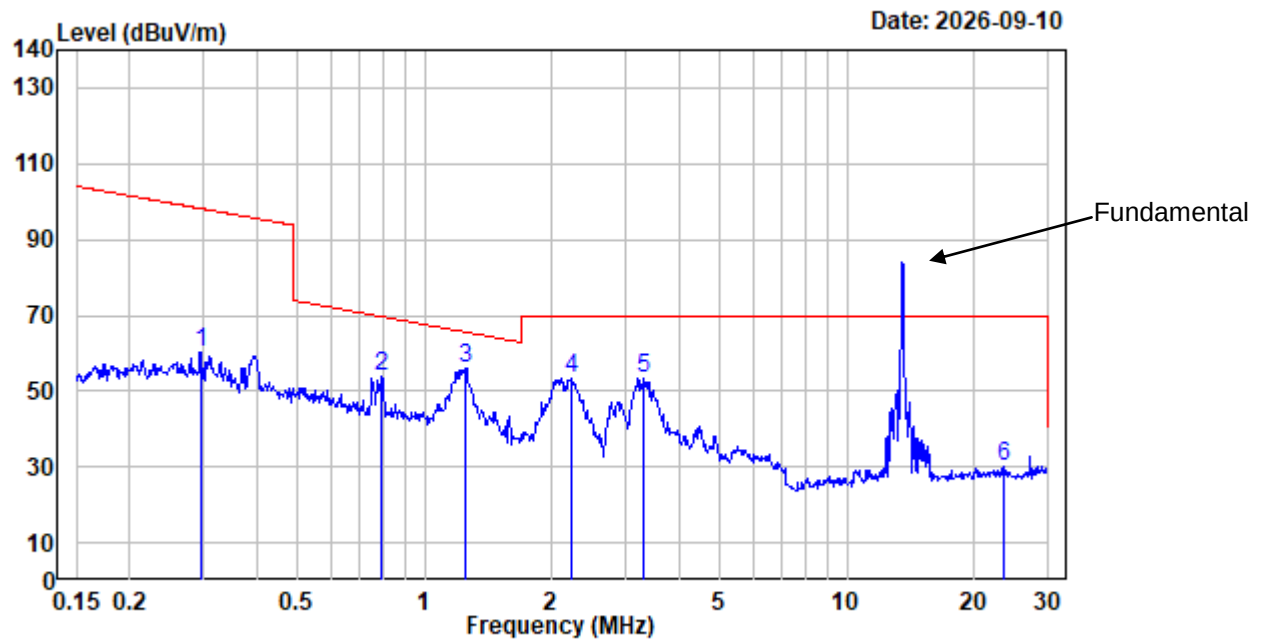


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.296	7.46	52.83	60.29	98.19	-37.90	Peak
2	0.792	-0.16	54.01	53.85	69.54	-15.69	Peak
3	1.255	-2.74	59.00	56.26	65.45	-9.19	Peak
4	2.237	-5.49	58.70	53.21	69.54	-16.33	Peak
5	3.310	-5.98	59.56	53.58	69.54	-15.96	Peak
6	23.511	-3.14	33.29	30.15	69.54	-39.39	Peak

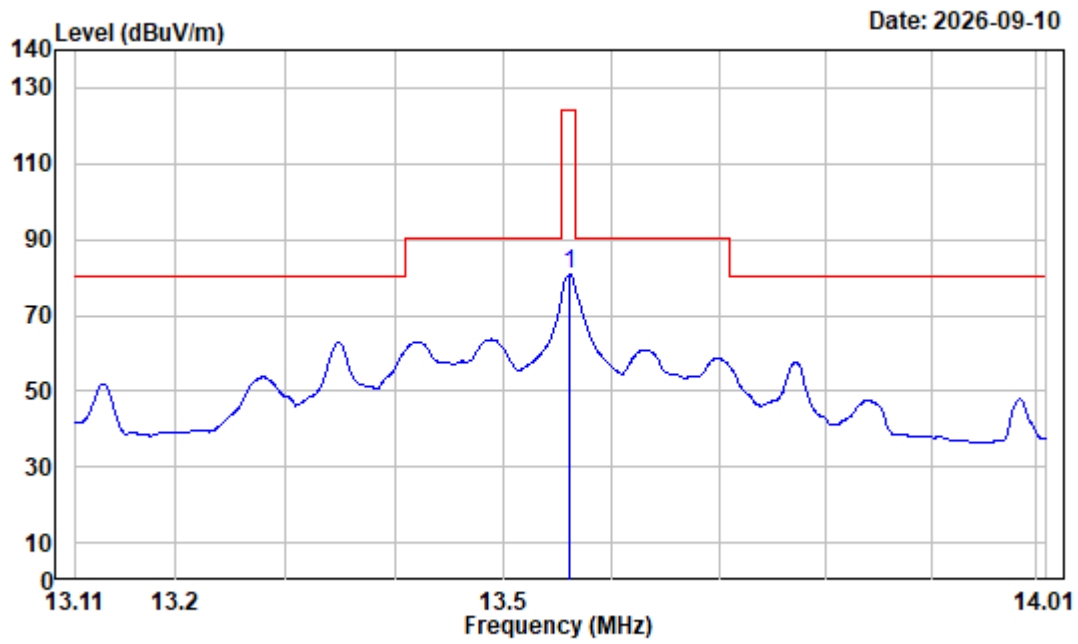


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Perpendicular Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:10kHz VBW:30kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.561	-4.41	85.30	80.89	124.00	-43.11 Peak

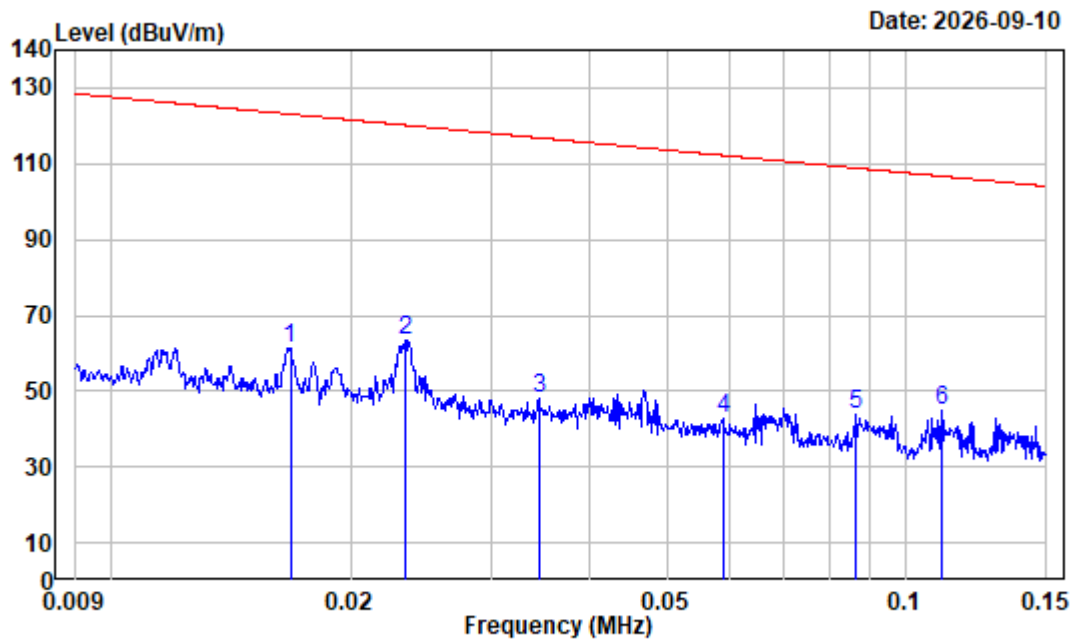


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Perpendicular Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:300Hz VBW:1kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.017	32.81	28.56	61.37	123.09	-61.72	Peak
2	0.023	29.84	33.62	63.46	120.19	-56.73	Peak
3	0.035	26.01	22.02	48.03	116.84	-68.81	Peak
4	0.059	21.56	21.14	42.70	112.22	-69.52	Peak
5	0.086	17.88	26.22	44.10	108.90	-64.80	Peak
6	0.111	15.94	28.83	44.77	106.70	-61.93	Peak

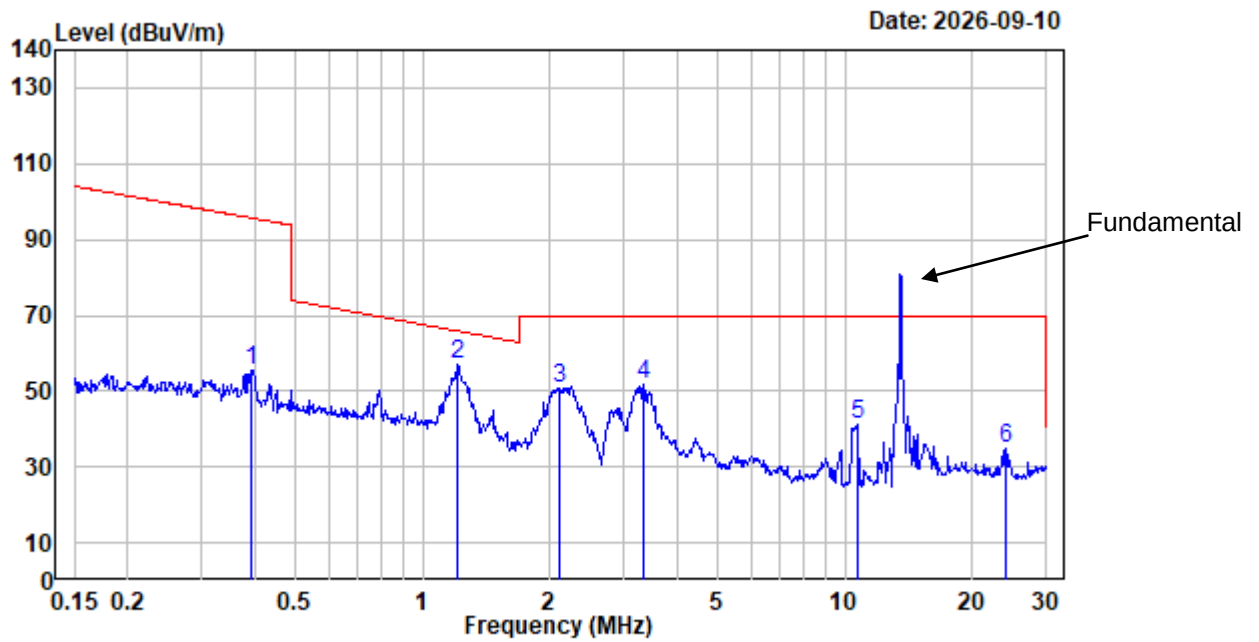


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Perpendicular Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.393	5.41	50.31	55.72	95.71	-39.99	Peak
2	1.210	-2.58	59.50	56.92	65.78	-8.86	Peak
3	2.110	-5.43	56.32	50.89	69.54	-18.65	Peak
4	3.328	-5.98	57.84	51.86	69.54	-17.68	Peak
5	10.676	-5.18	46.26	41.08	69.54	-28.46	Peak
6	24.142	-3.12	37.85	34.73	69.54	-34.81	Peak

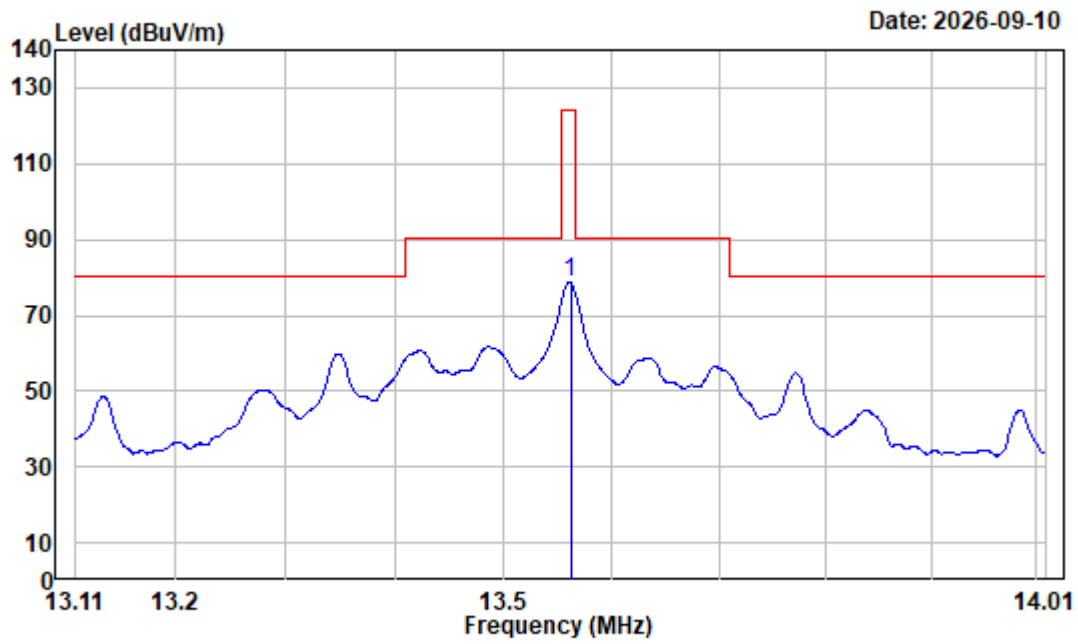


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Ground-parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	13.562	-4.41	83.14	78.73	124.00	-45.27 Peak

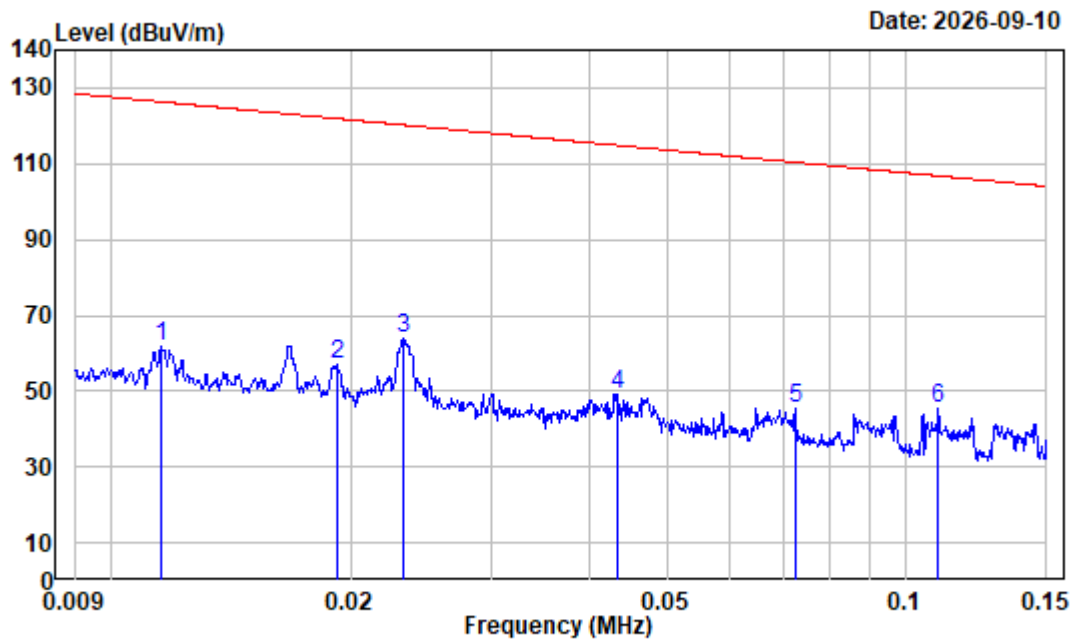

Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Ground-parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	35.12	26.70	61.82	126.32	-64.50	Peak
2	0.019	31.71	25.24	56.95	121.90	-64.95	Peak
3	0.023	29.92	34.01	63.93	120.26	-56.33	Peak
4	0.043	24.20	24.74	48.94	114.88	-65.94	Peak
5	0.073	19.58	25.78	45.36	110.39	-65.03	Peak
6	0.110	16.00	29.18	45.18	106.79	-61.61	Peak

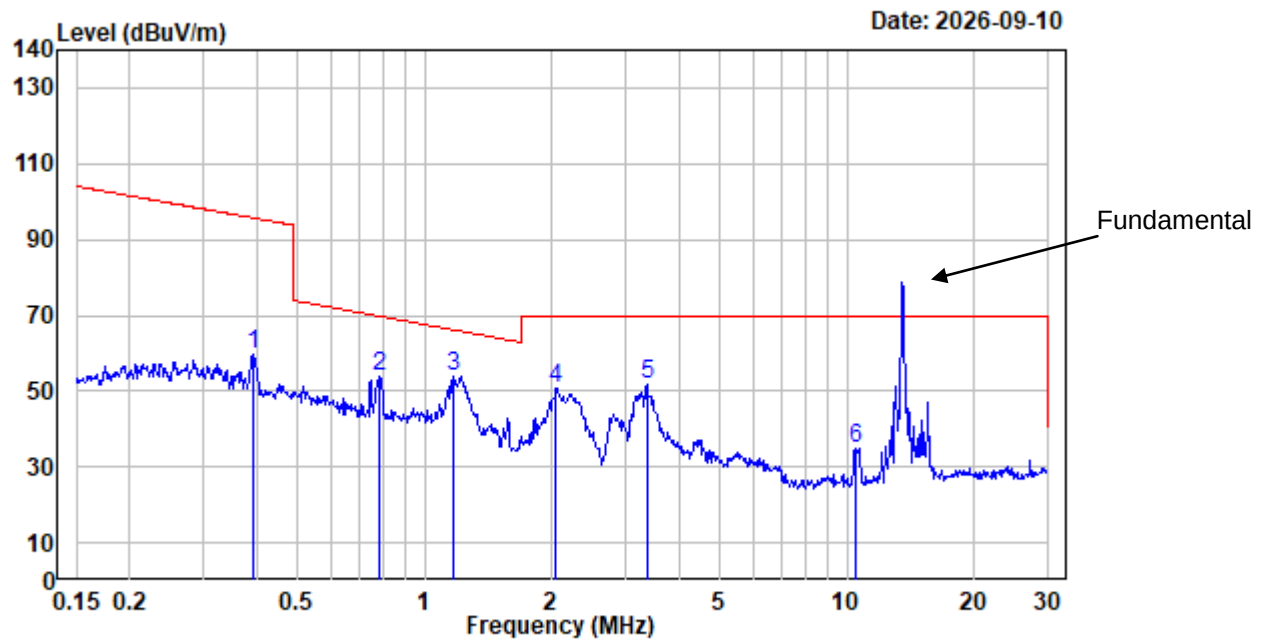

Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Ground-parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:10kHz VBW:30kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.393	5.41	54.23	59.64	95.71	-36.07	Peak
2	0.779	-0.02	53.70	53.68	69.68	-16.00	Peak
3	1.172	-2.44	56.37	53.93	66.07	-12.14	Peak
4	2.044	-5.40	56.08	50.68	69.54	-18.86	Peak
5	3.364	-6.00	57.53	51.53	69.54	-18.01	Peak
6	10.452	-5.24	40.19	34.95	69.54	-34.59	Peak

30MHz~1GHz:

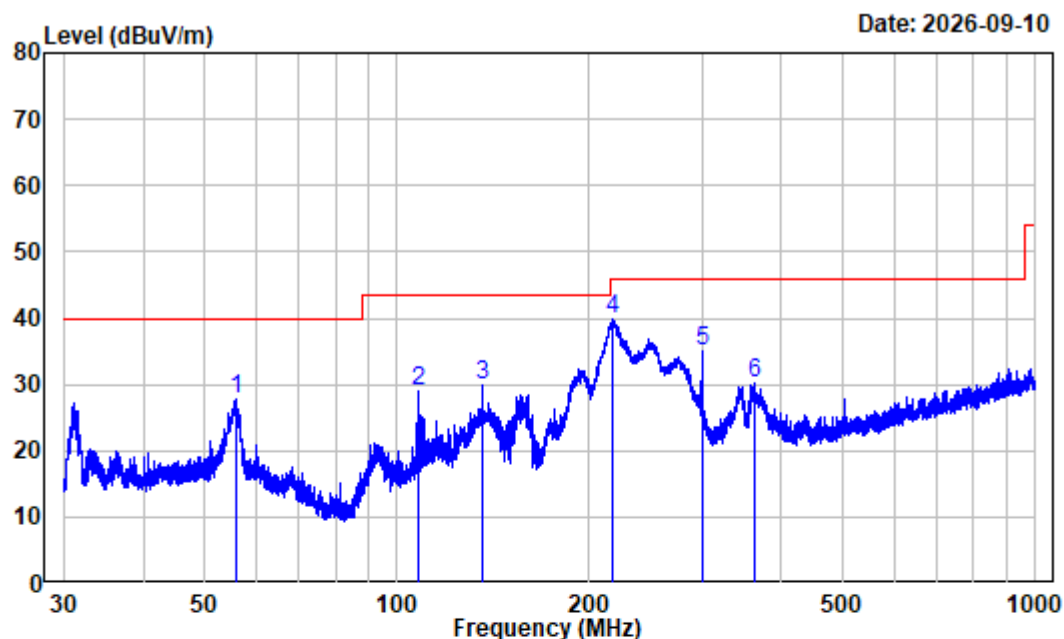


Site : chamber
 Condition : 3m HORIZONTAL
 Job No. : 2604V73214E-RF Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	55.952	-10.70	38.45	27.75	40.00	-12.25	Peak
2	108.077	-11.30	40.20	28.90	43.50	-14.60	Peak
3	135.625	-14.39	44.38	29.99	43.50	-13.51	Peak
4	217.926	-10.49	50.32	39.83	46.00	-6.17	Peak
5	299.973	-8.92	44.07	35.15	46.00	-10.85	Peak
6	362.190	-7.07	37.17	30.10	46.00	-15.90	Peak

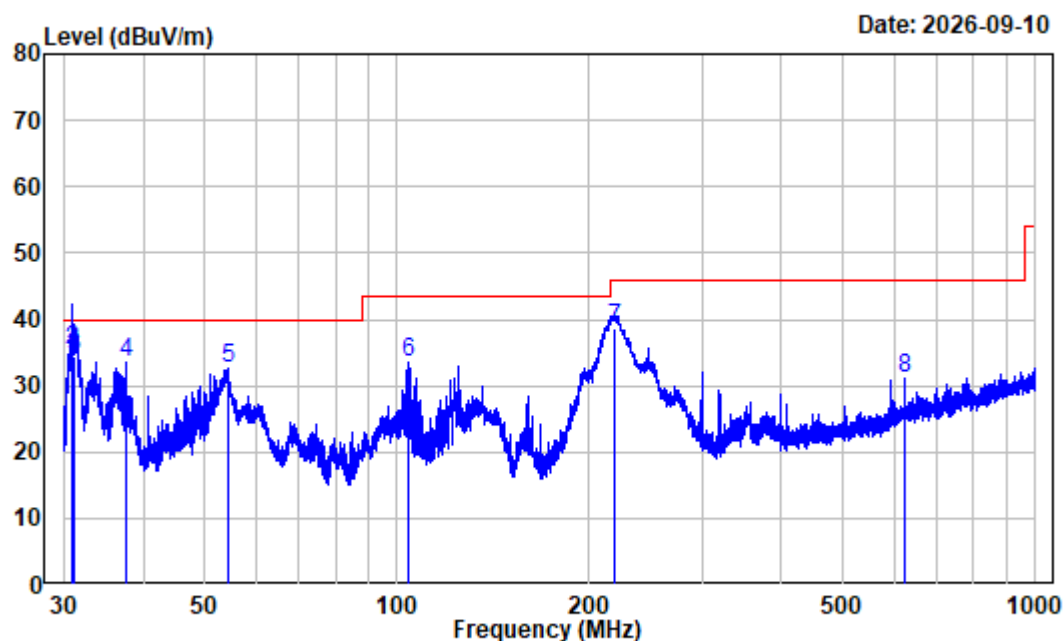


Site : chamber
 Condition : 3m VERTICAL
 Job No. : 2604V73214E-RF Tester: Jayden Luo
 Test Mode : Transmitting
 Note : With tag
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.875	-11.91	46.29	34.38	40.00	-5.62	QP
2	30.935	-11.93	47.16	35.23	40.00	-4.77	QP
3	31.207	-11.94	46.30	34.36	40.00	-5.64	QP
4	37.647	-11.03	44.60	33.57	40.00	-6.43	Peak
5	54.428	-10.53	43.11	32.58	40.00	-7.42	Peak
6	104.445	-11.11	44.72	33.61	43.50	-9.89	Peak
7	218.309	-10.50	49.08	38.58	46.00	-7.42	QP
8	623.983	-1.71	32.92	31.21	46.00	-14.79	Peak

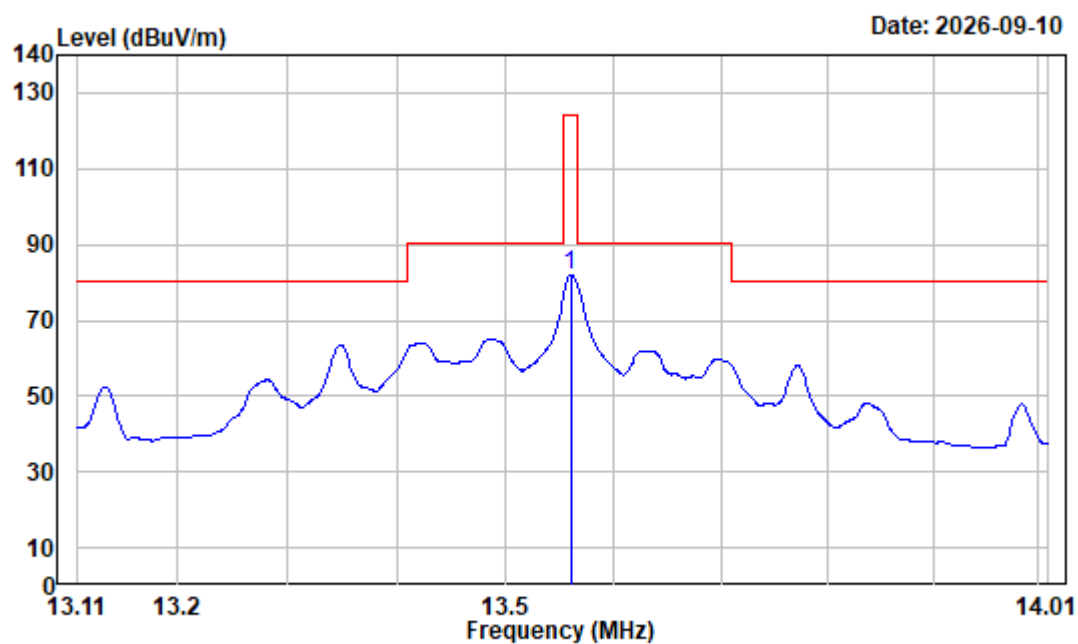Without tag**9kHz~30MHz:**


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.560	-4.41	86.54	82.13	124.00	-41.87	Peak

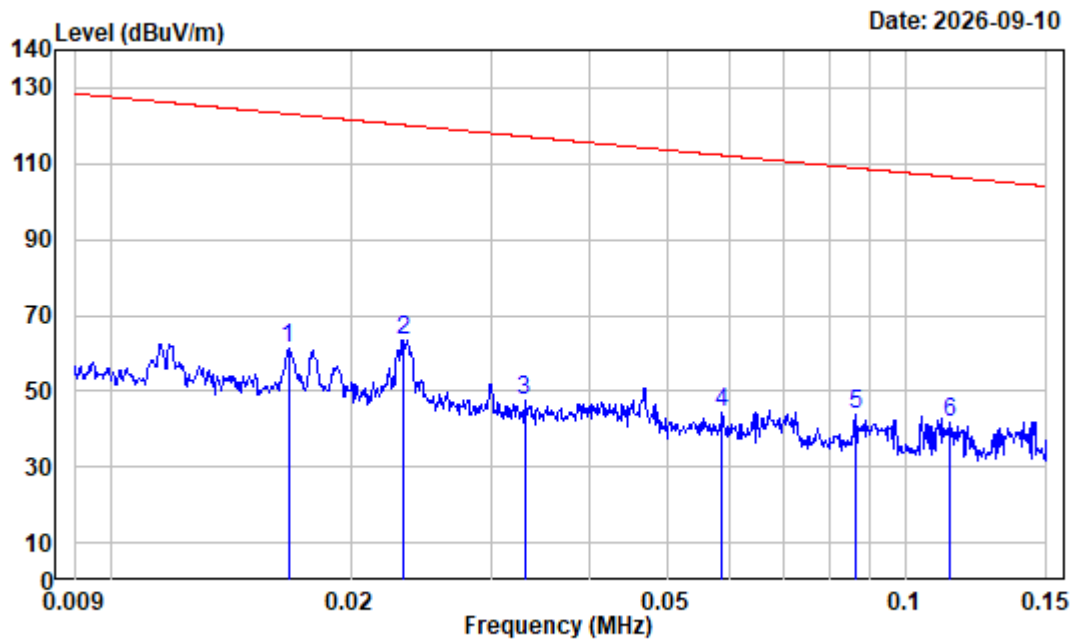


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:300Hz VBW:1kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.017	32.85	28.30	61.15	123.14	-61.99	Peak
2	0.023	29.92	33.74	63.66	120.26	-56.60	Peak
3	0.033	26.30	21.46	47.76	117.21	-69.45	Peak
4	0.059	21.59	22.66	44.25	112.24	-67.99	Peak
5	0.086	17.86	25.89	43.75	108.87	-65.12	Peak
6	0.114	15.83	25.70	41.53	106.50	-64.97	Peak

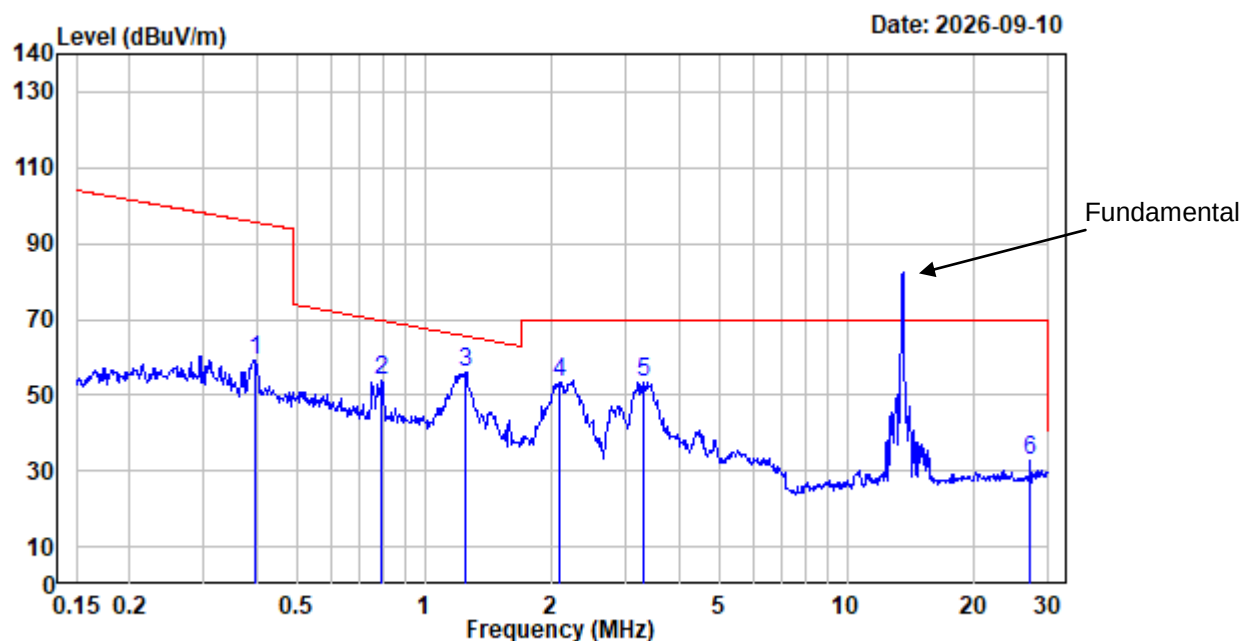


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.396	5.37	54.02	59.39	95.66	-36.27	Peak
2	0.792	-0.16	54.01	53.85	69.54	-15.69	Peak
3	1.255	-2.74	59.00	56.26	65.45	-9.19	Peak
4	2.088	-5.42	58.89	53.47	69.54	-16.07	Peak
5	3.310	-5.98	59.56	53.58	69.54	-15.96	Peak
6	27.127	-3.04	35.73	32.69	69.54	-36.85	Peak

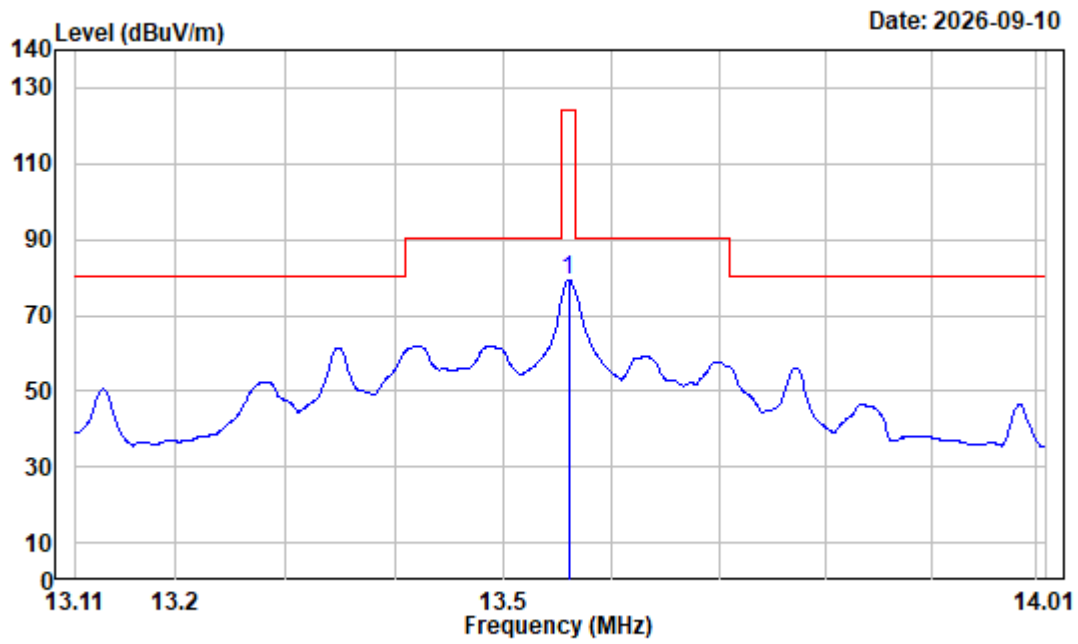


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Perpendicular Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:10kHz VBW:30kHz

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	
1	13.560	-4.41	83.87	79.46	124.00 -44.54 Peak

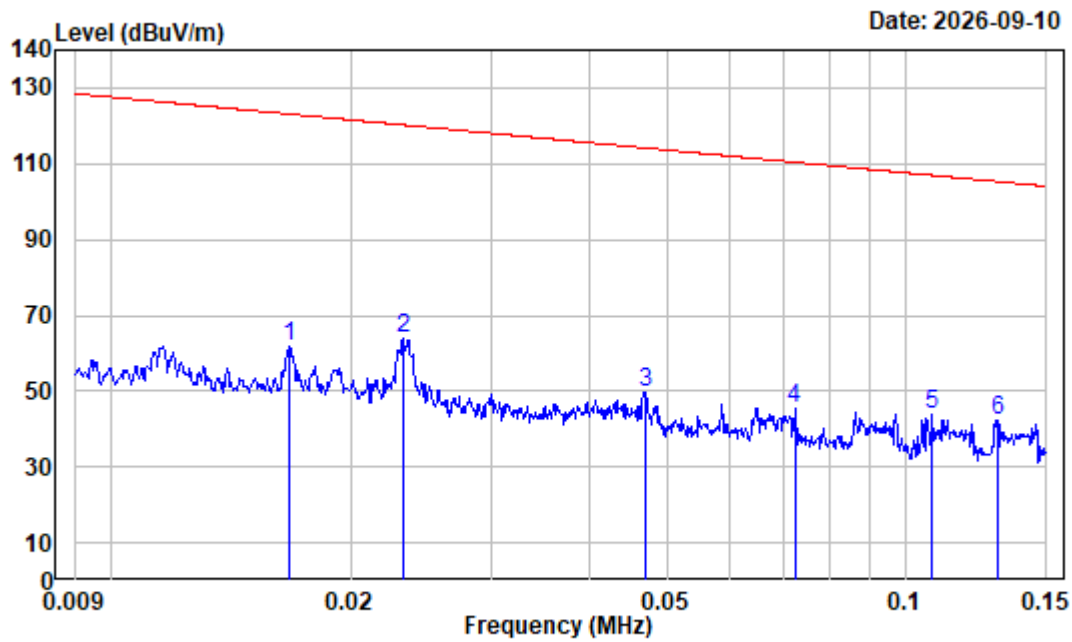


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Perpendicular Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:300Hz VBW:1kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.017	32.83	28.73	61.56	123.12	-61.56	Peak
2	0.023	29.92	33.95	63.87	120.26	-56.39	Peak
3	0.047	23.42	26.31	49.73	114.15	-64.42	Peak
4	0.072	19.61	25.90	45.51	110.41	-64.90	Peak
5	0.108	16.09	27.88	43.97	106.97	-63.00	Peak
6	0.130	15.07	27.28	42.35	105.30	-62.95	Peak

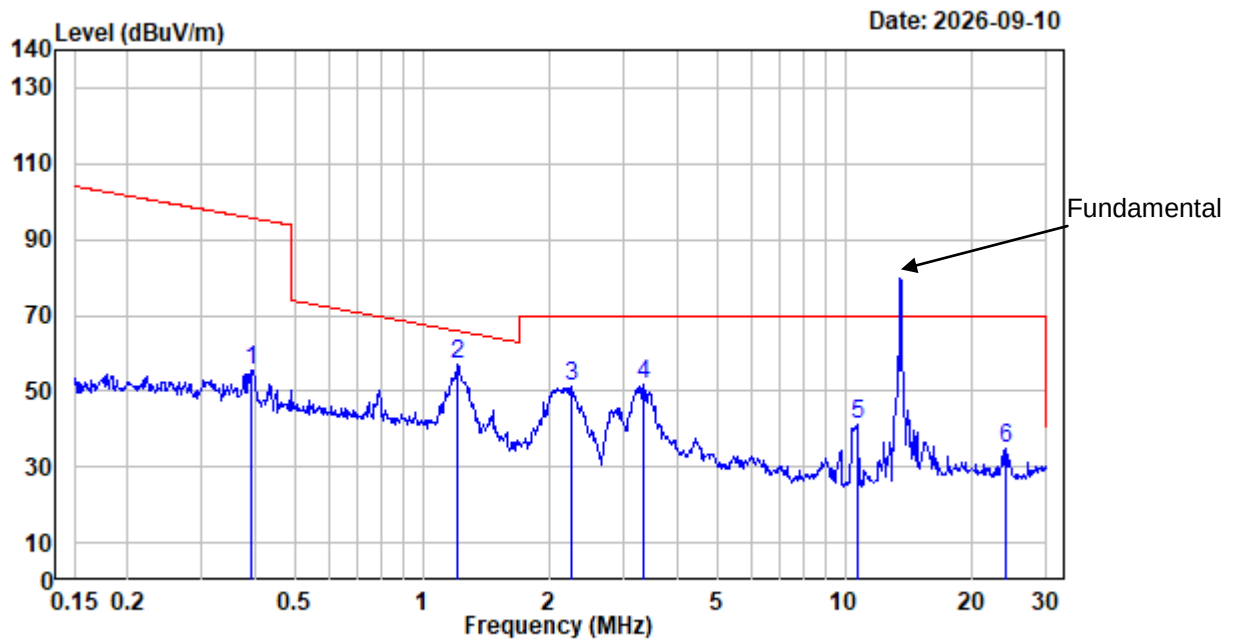


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Perpendicular Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.393	5.41	50.31	55.72	95.71	-39.99	Peak
2	1.210	-2.58	59.50	56.92	65.78	-8.86	Peak
3	2.261	-5.50	56.89	51.39	69.54	-18.15	Peak
4	3.328	-5.98	57.84	51.86	69.54	-17.68	Peak
5	10.676	-5.18	46.26	41.08	69.54	-28.46	Peak
6	24.142	-3.12	37.85	34.73	69.54	-34.81	Peak

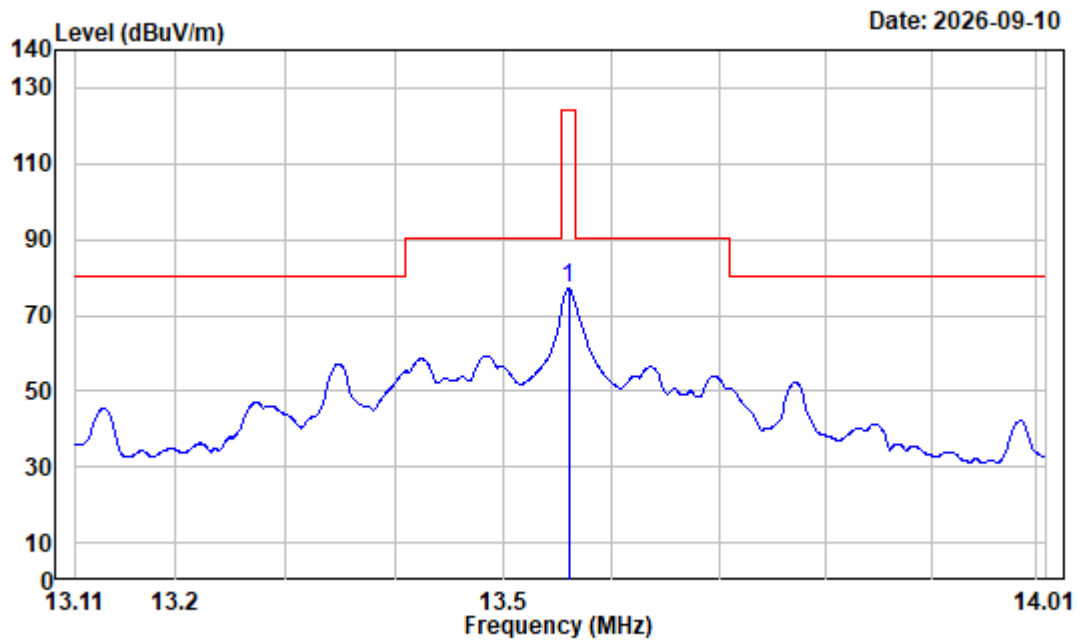


Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Ground-parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	13.560	-4.41	81.60	77.19	124.00	-46.81 Peak

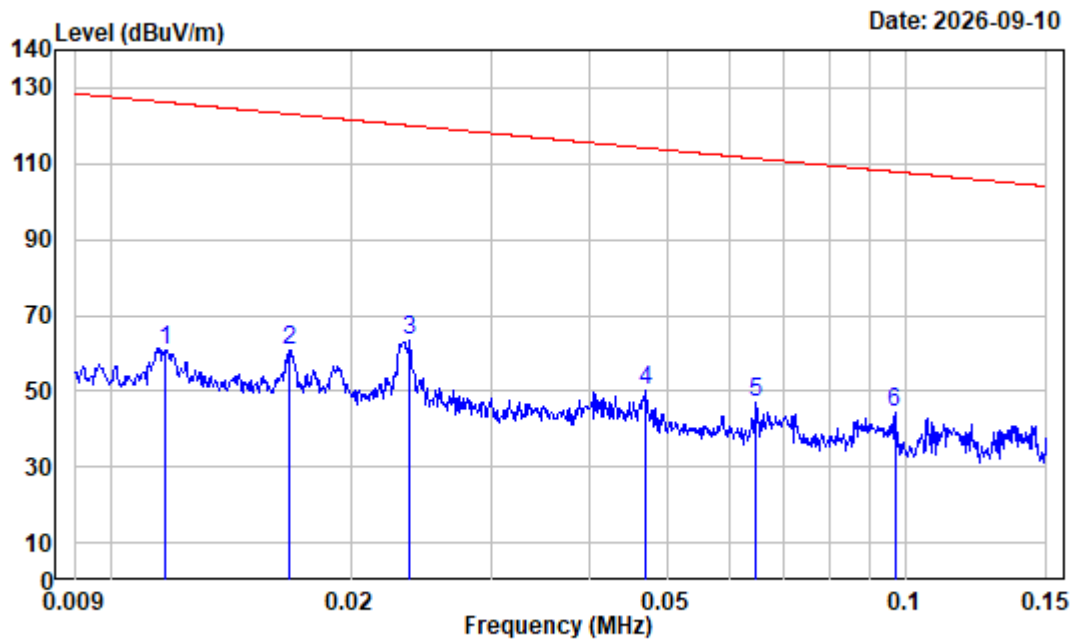

Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Ground-parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	35.06	25.73	60.79	126.22	-65.43	Peak
2	0.017	32.83	28.15	60.98	123.12	-62.14	Peak
3	0.024	29.72	33.43	63.15	120.09	-56.94	Peak
4	0.047	23.45	26.50	49.95	114.18	-64.23	Peak
5	0.065	20.72	26.09	46.81	111.39	-64.58	Peak
6	0.097	16.79	27.77	44.56	107.89	-63.33	Peak

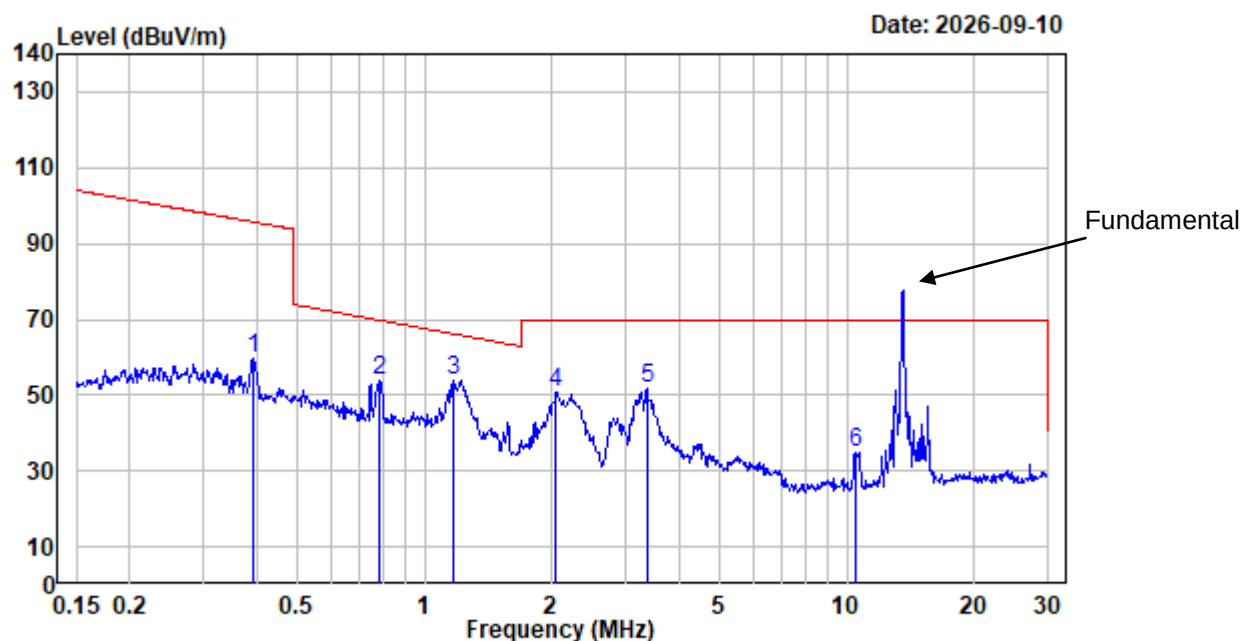

Site : chamber
 Condition : 3m
 Job No. : 2604V73214E-RF
 Polarization : Ground-parallel Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:10kHz VBW:30kHz


	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.393	5.41	54.23	59.64	95.71	-36.07	Peak
2	0.779	-0.02	53.70	53.68	69.68	-16.00	Peak
3	1.172	-2.44	56.37	53.93	66.07	-12.14	Peak
4	2.044	-5.40	56.08	50.68	69.54	-18.86	Peak
5	3.364	-6.00	57.53	51.53	69.54	-18.01	Peak
6	10.452	-5.24	40.19	34.95	69.54	-34.59	Peak

30MHz~1GHz:

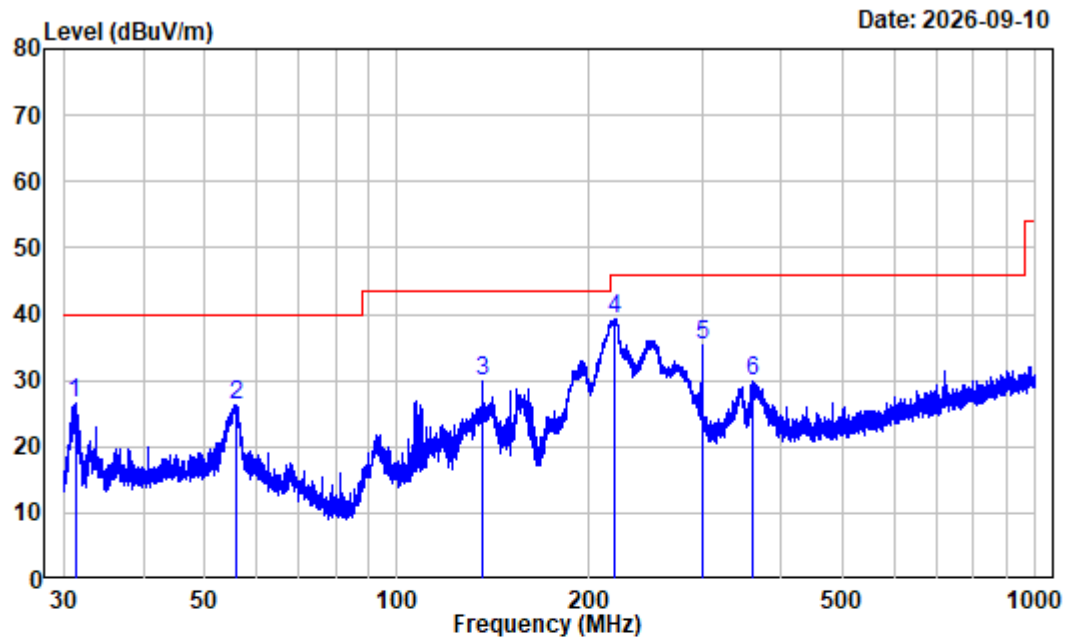

Site : chamber
 Condition : 3m HORIZONTAL
 Job No. : 2604V73214E-RF Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.289	-11.94	38.46	26.52	40.00	-13.48	Peak
2	55.854	-10.70	37.04	26.34	40.00	-13.66	Peak
3	135.566	-14.39	44.41	30.02	43.50	-13.48	Peak
4	218.404	-10.49	49.88	39.39	46.00	-6.61	Peak
5	299.973	-8.92	44.15	35.23	46.00	-10.77	Peak
6	361.397	-7.08	37.04	29.96	46.00	-16.04	Peak

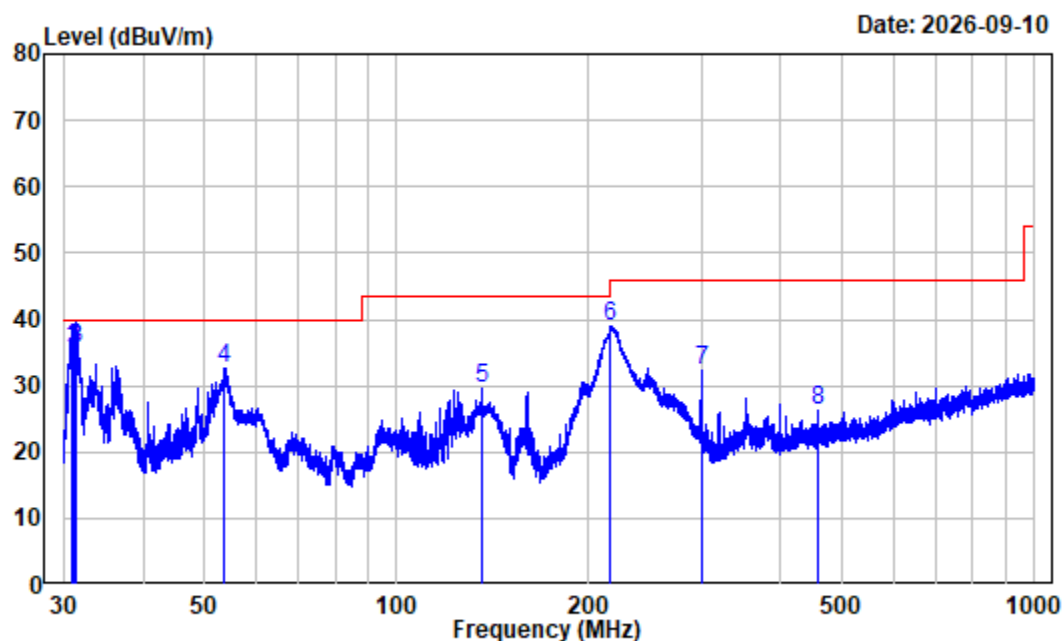

Site : chamber
 Condition : 3m VERTICAL
 Job No. : 2604V73214E-RF Tester: Jayden Luo
 Test Mode : Transmitting
 Note : Without tag
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.894	-11.92	47.49	35.57	40.00	-4.43	QP
2	31.166	-11.94	47.63	35.69	40.00	-4.31	QP
3	31.441	-11.94	47.43	35.49	40.00	-4.51	QP
4	53.482	-10.37	43.00	32.63	40.00	-7.37	Peak
5	135.566	-14.39	44.11	29.72	43.50	-13.78	Peak
6	216.214	-10.46	49.42	38.96	46.00	-7.04	Peak
7	299.973	-8.92	41.36	32.44	46.00	-13.56	Peak
8	456.106	-4.79	31.16	26.37	46.00	-19.63	Peak

Appendix A.3: Frequency Stability

Test Data

Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	48 %
ATM Pressure:	99.2 kPa
Test Engineer:	Jayden Luo
Test Date:	2026-09-10
EUT Operation Mode:	Transmitting (Radiated Measurement)

Test Result: Compliance. Please refer to the below data.

With tag

Test Item	Temperature (°C)	Voltage (V _{AC})	Measured frequency (MHz)	FCC Frequency Error (%)	FCC Limit (%)	ISED Frequency Error (ppm)	ISED Limit (ppm)
Frequency Stability vs. Temperature	-20	120	13.56012461	0.00092	0.01	9.19	±100
	-10		13.56018903	0.00139	0.01	13.94	±100
	0		13.56010572	0.00078	0.01	7.80	±100
	10		13.56013188	0.00097	0.01	9.73	±100
	20		13.56016259	0.00120	0.01	11.99	±100
	25		13.56017795	0.00131	0.01	13.12	±100
	30		13.56014710	0.00108	0.01	10.85	±100
	40		13.56019326	0.00143	0.01	14.25	±100
	50		13.56015047	0.00111	0.01	11.10	±100
Frequency Stability vs. Voltage	20	102	13.56017234	0.00127	0.01	12.71	±100
	20	138	13.56011895	0.00088	0.01	8.77	±100

Without tag

Test Item	Temperature (°C)	Voltage (V _{AC})	Measured frequency (MHz)	FCC Frequency Error (%)	FCC Limit (%)	ISED Frequency Error (ppm)	ISED Limit (ppm)
Frequency Stability vs. Temperature	-20	120	13.56016281	0.00120	0.01	12.01	±100
	-10		13.56010973	0.00081	0.01	8.09	±100
	0		13.56015129	0.00112	0.01	11.16	±100
	10		13.56019047	0.00140	0.01	14.05	±100
	20		13.56012608	0.00093	0.01	9.30	±100
	25		13.56013455	0.00099	0.01	9.92	±100
	30		13.56017814	0.00131	0.01	13.14	±100
	40		13.56014392	0.00106	0.01	10.61	±100
	50		13.56018520	0.00137	0.01	13.66	±100
Frequency Stability vs. Voltage	20	102	13.56011763	0.00087	0.01	8.67	±100
	20	138	13.56015906	0.00117	0.01	11.73	±100

Note: the extreme voltage was declared by the applicant.

Appendix A.4: 20dB Emission Bandwidth & 99% Occupied Bandwidth

Test Data


Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	48 %
ATM Pressure:	99.2 kPa
Test Engineer:	Jayden Luo
Test Date:	2026-09-10
EUT Operation Mode:	Transmitting (Radiated Measurement)

Test Result: Compliance. Please refer to the below data.


With tag

Frequency (MHz)	20 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
13.56	1.4153	3.0912

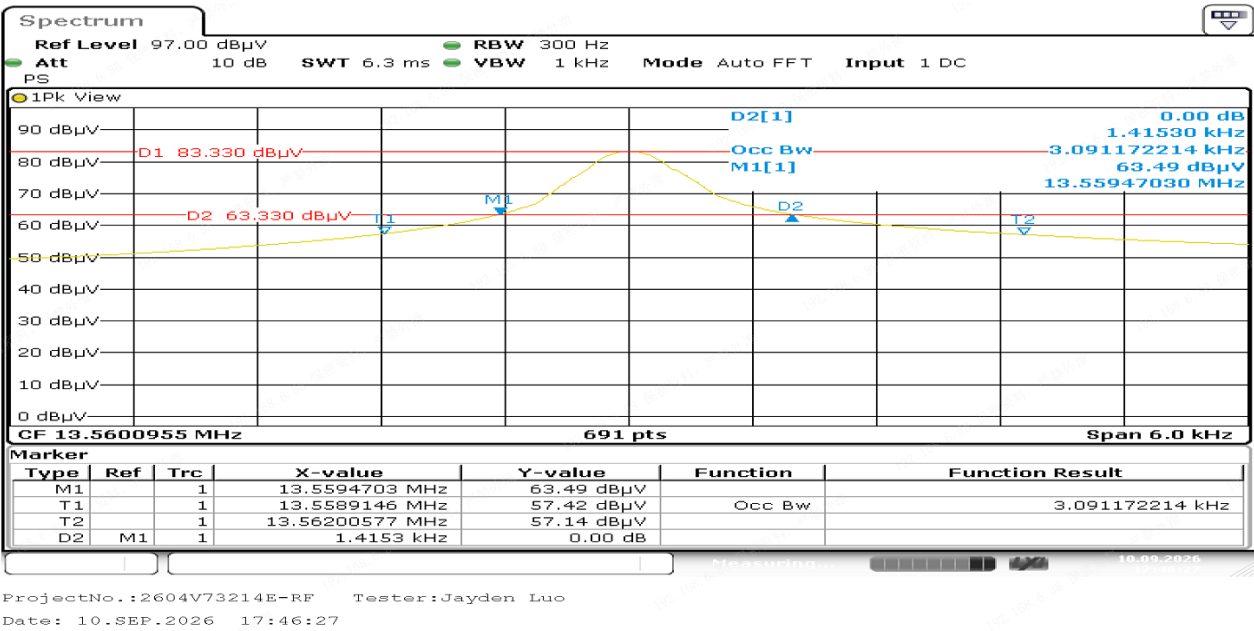

Without tag

Frequency (MHz)	20 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
13.56	1.5369	3.3169

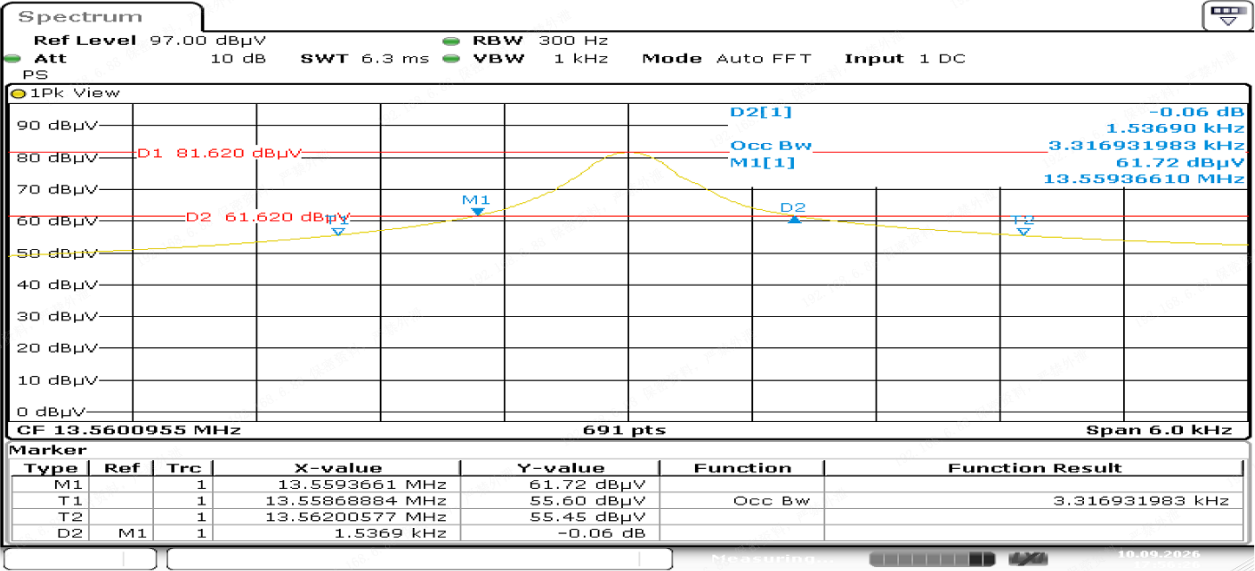

ProjectNo.:2604V73214E-RF Tester:Jayden Luo
Date: 10.SEP.2026 17:56:26

***** END *****