

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BT-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-02_14.19.31

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23

Load: full load

Hum.: 54%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

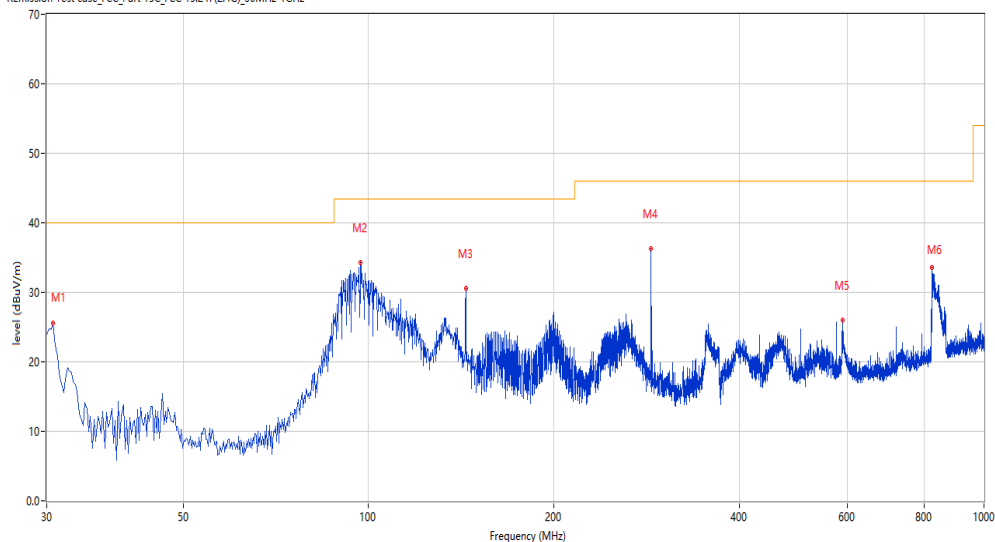

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.242	24.69	-29.74	40.0	-15.31	Peak	97.60	100	Horizontal	Pass
2	96.913	34.32	-26.97	43.5	-9.18	Peak	228.90	150	Horizontal	Pass
3	143.947	30.64	-30.00	43.5	-12.86	Peak	360.00	150	Horizontal	Pass
4	287.956	36.29	-24.10	46.0	-9.71	Peak	360.00	150	Horizontal	Pass
5	589.550	26.05	-15.82	46.0	-19.95	Peak	360.00	150	Horizontal	Pass
6	823.262	33.63	-11.84	46.0	-12.37	Peak	196.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-06-02_13.19.47

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23

Load: full load

Hum.: 54%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

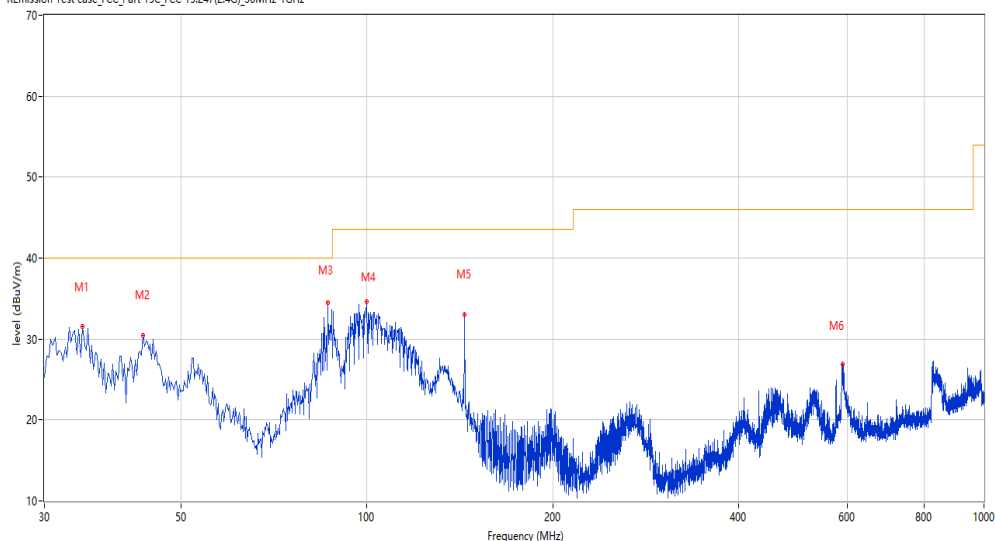

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.606	31.51	-28.20	40.0	-8.49	Peak	360.00	200	Vertical	Pass
2	43.334	30.48	-25.44	40.0	-9.52	Peak	360.00	200	Vertical	Pass
3	86.488	34.49	-29.92	40.0	-5.51	Peak	360.00	200	Vertical	Pass
4	99.823	34.63	-26.67	43.5	-8.87	Peak	282.90	100	Vertical	Pass
5	143.947	33.03	-30.00	43.5	-10.47	Peak	287.30	100	Vertical	Pass
6	589.550	26.86	-15.82	46.0	-19.14	Peak	360.00	200	Vertical	Pass

1-18G

BT-Low channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.04.46

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

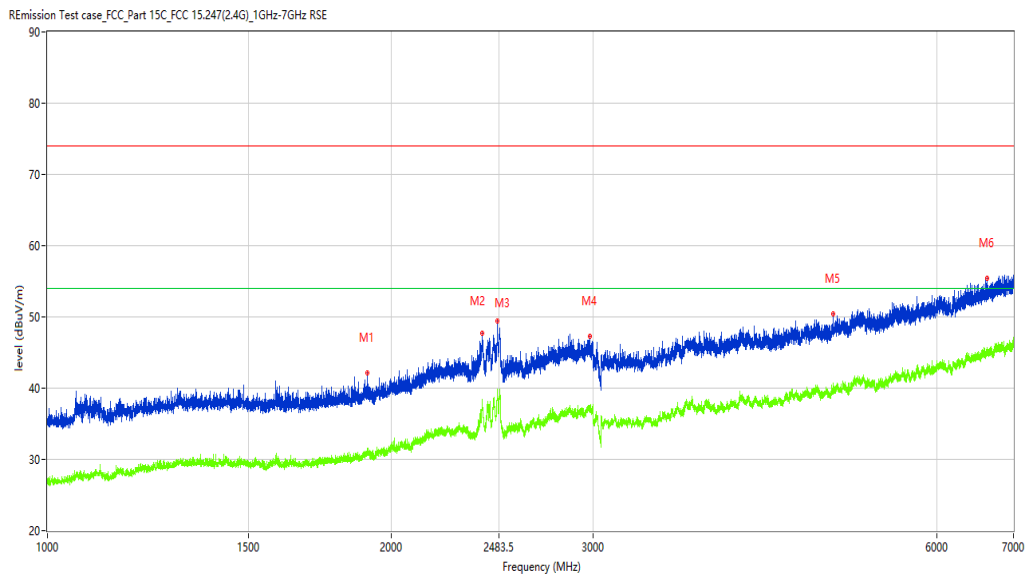

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1904.137	42.14	-11.77	74.0	-31.86	Peak	348.30	100	Horizontal	Pass
1**	1904.137	31.00	-11.77	54.0	-23.00	AV	348.30	100	Horizontal	Pass
2	2401.075	47.67	-4.03	74.0	-26.33	Peak	102.80	100	Horizontal	Pass
2**	2401.075	37.54	-4.03	54.0	-16.46	AV	102.80	100	Horizontal	Pass
3	2475.066	49.50	-2.14	74.0	-24.50	Peak	140.80	100	Horizontal	Pass
3**	2475.066	38.90	-2.14	54.0	-15.10	AV	140.80	100	Horizontal	Pass
4	2981.752	47.23	-3.19	74.0	-26.77	Peak	217.60	100	Horizontal	Pass
4**	2981.752	36.88	-3.19	54.0	-17.12	AV	217.60	100	Horizontal	Pass
5	4868.766	50.37	0.05	74.0	-23.63	Peak	194.50	100	Horizontal	Pass
5**	4868.766	40.70	0.05	54.0	-13.30	AV	194.50	100	Horizontal	Pass
6	6634.546	55.40	4.47	74.0	-18.60	Peak	1.60	100	Horizontal	Pass
6**	6634.546	44.86	4.47	54.0	-9.14	AV	1.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_16.53.37

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 19.8

Load: full load

Hum.: 50%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

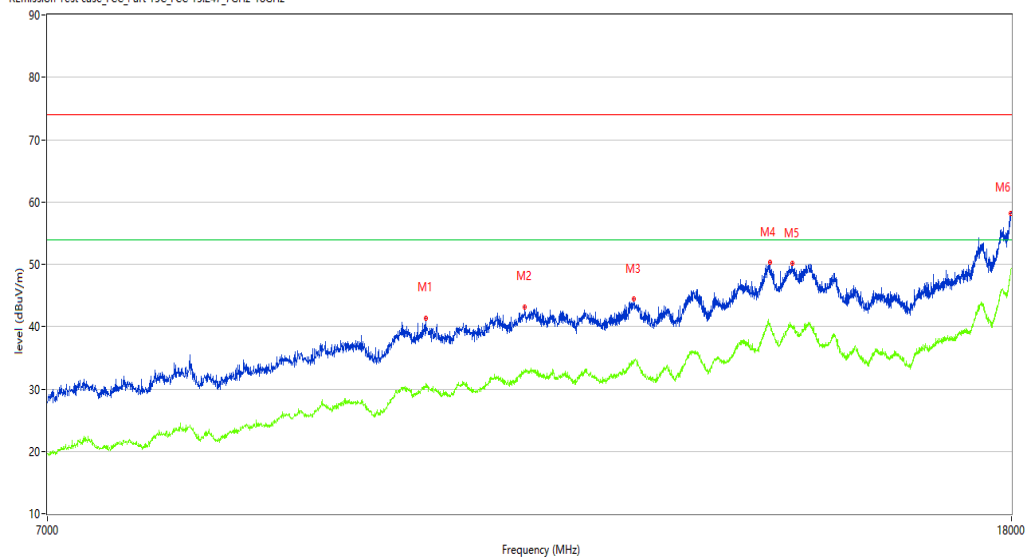

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10139.715	41.38	9.33	74.0	-32.62	Peak	214.50	100	Horizontal	Pass
1**	10139.715	30.30	9.33	54.0	-23.70	AV	214.50	100	Horizontal	Pass
2	11173.457	43.18	11.04	74.0	-30.82	Peak	296.00	100	Horizontal	Pass
2**	11173.457	32.67	11.04	54.0	-21.33	AV	296.00	100	Horizontal	Pass
3	12435.391	44.37	12.43	74.0	-29.63	Peak	61.10	100	Horizontal	Pass
3**	12435.391	34.67	12.43	54.0	-19.33	AV	61.10	100	Horizontal	Pass
4	14208.698	50.28	19.30	74.0	-23.72	Peak	61.10	100	Horizontal	Pass
4**	14208.698	40.05	19.30	54.0	-13.95	AV	61.10	100	Horizontal	Pass
5	14524.869	50.12	17.52	74.0	-23.88	Peak	210.10	100	Horizontal	Pass
5**	14524.869	39.85	17.52	54.0	-14.15	AV	210.10	100	Horizontal	Pass
6	17980.755	58.22	26.73	74.0	-15.78	Peak	80.10	100	Horizontal	Pass
6**	17980.755	48.29	26.73	54.0	-5.71	AV	80.10	100	Horizontal	Pass

BT-Low channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.32.22

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

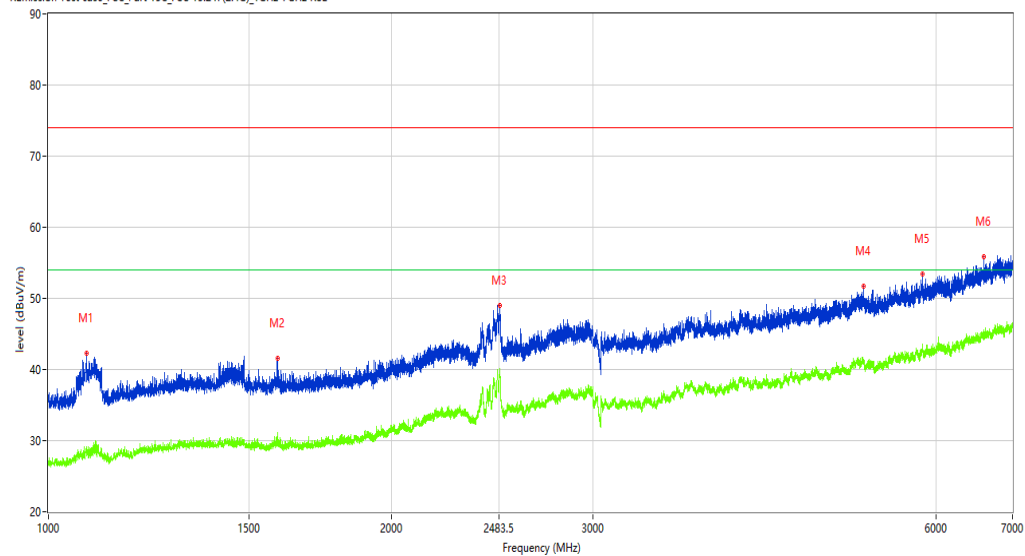

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1080.490	42.35	-14.22	74.0	-31.65	Peak	333.10	100	Vertical	Pass
1**	1080.490	29.14	-14.22	54.0	-24.86	AV	333.10	100	Vertical	Pass
2	1588.926	41.57	-13.07	74.0	-32.43	Peak	328.70	100	Vertical	Pass
2**	1588.926	31.09	-13.07	54.0	-22.91	AV	328.70	100	Vertical	Pass
3	2487.564	49.06	-1.89	74.0	-24.94	Peak	2.50	100	Vertical	Pass
3**	2487.564	39.46	-1.89	54.0	-14.54	AV	2.50	100	Vertical	Pass
4	5182.727	51.70	1.13	74.0	-22.30	Peak	175.50	100	Vertical	Pass
4**	5182.727	40.94	1.13	54.0	-13.06	AV	175.50	100	Vertical	Pass
5	5834.646	53.36	2.31	74.0	-20.64	Peak	210.10	100	Vertical	Pass
5**	5834.646	43.00	2.31	54.0	-11.00	AV	210.10	100	Vertical	Pass
6	6607.049	55.85	4.36	74.0	-18.15	Peak	53.80	100	Vertical	Pass
6**	6607.049	44.40	4.36	54.0	-9.60	AV	53.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_15.53.21

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

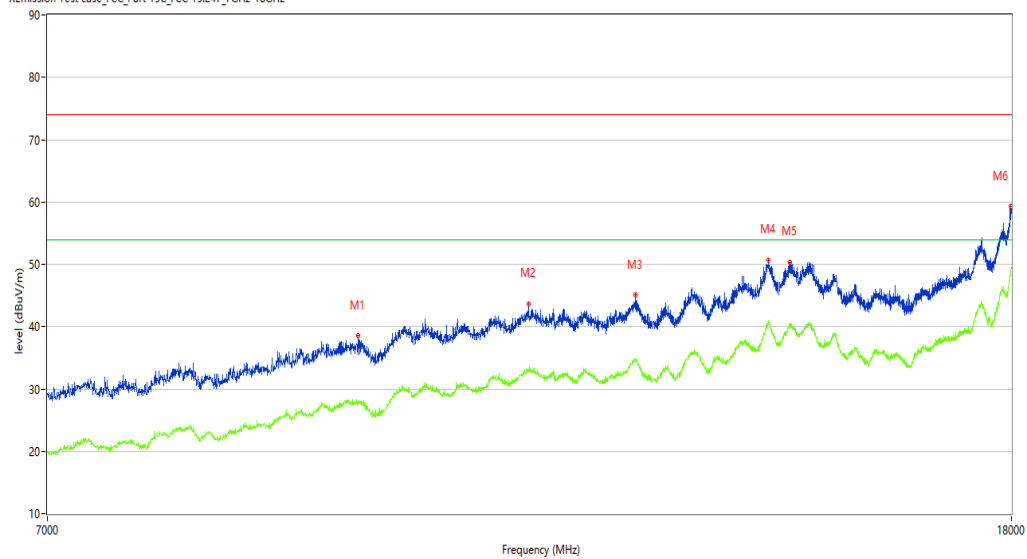

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9490.877	38.55	7.85	74.0	-35.45	Peak	312.70	100	Vertical	Pass
1**	9490.877	27.78	7.85	54.0	-26.22	AV	312.70	100	Vertical	Pass
2	11211.947	43.64	11.40	74.0	-30.36	Peak	137.40	100	Vertical	Pass
2**	11211.947	33.13	11.40	54.0	-20.87	AV	137.40	100	Vertical	Pass
3	12457.386	45.07	12.53	74.0	-28.93	Peak	249.00	100	Vertical	Pass
3**	12457.386	34.61	12.53	54.0	-19.39	AV	249.00	100	Vertical	Pass
4	14192.202	50.65	19.67	74.0	-23.35	Peak	195.80	100	Vertical	Pass
4**	14192.202	40.99	19.67	54.0	-13.01	AV	195.80	100	Vertical	Pass
5	14486.378	50.39	17.80	74.0	-23.61	Peak	360.00	100	Vertical	Pass
5**	14486.378	40.31	17.80	54.0	-13.69	AV	360.00	100	Vertical	Pass
6	17986.253	59.27	27.07	74.0	-14.73	Peak	28.70	100	Vertical	Pass
6**	17986.253	48.33	27.07	54.0	-5.67	AV	28.70	100	Vertical	Pass

BT-Middle channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.07.20

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

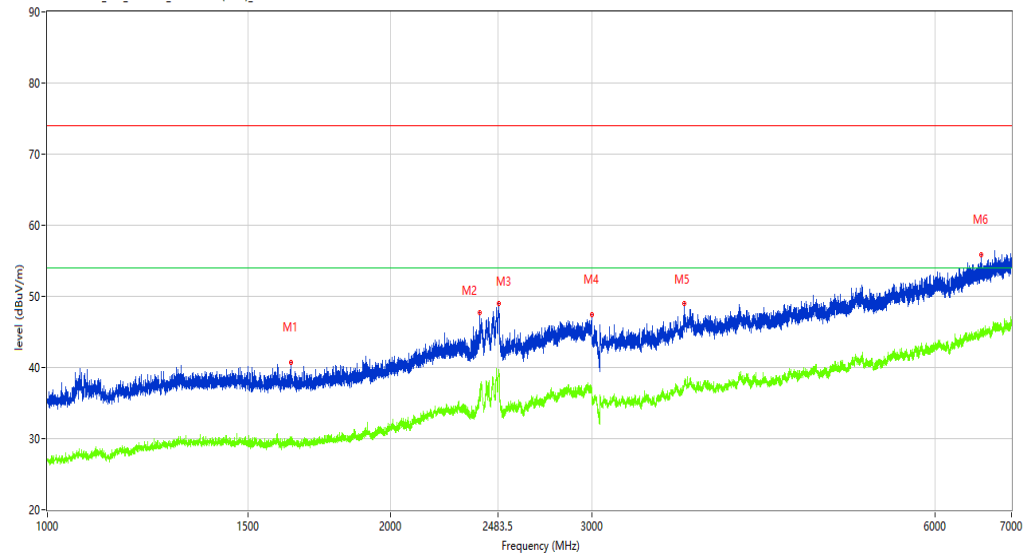

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1635.171	40.73	-12.98	74.0	-33.27	Peak	314.70	100	Horizontal	Pass
1**	1635.171	29.52	-12.98	54.0	-24.48	AV	314.70	100	Horizontal	Pass
2	2392.076	47.68	-4.15	74.0	-26.32	Peak	354.40	100	Horizontal	Pass
2**	2392.076	37.05	-4.15	54.0	-16.95	AV	354.40	100	Horizontal	Pass
3	2488.564	49.03	-1.87	74.0	-24.97	Peak	79.00	100	Horizontal	Pass
3**	2488.564	38.75	-1.87	54.0	-15.25	AV	79.00	100	Horizontal	Pass
4	2999.250	47.44	-3.05	74.0	-26.56	Peak	6.90	100	Horizontal	Pass
4**	2999.250	37.07	-3.05	54.0	-16.93	AV	6.90	100	Horizontal	Pass
5	3614.923	49.02	-1.85	74.0	-24.98	Peak	85.40	100	Horizontal	Pass
5**	3614.923	37.36	-1.85	54.0	-16.64	AV	85.40	100	Horizontal	Pass
6	6584.052	55.83	4.23	74.0	-18.17	Peak	359.90	100	Horizontal	Pass
6**	6584.052	44.99	4.23	54.0	-9.01	AV	359.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_16.51.40

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 19.8

Load: full load

Hum.: 50%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

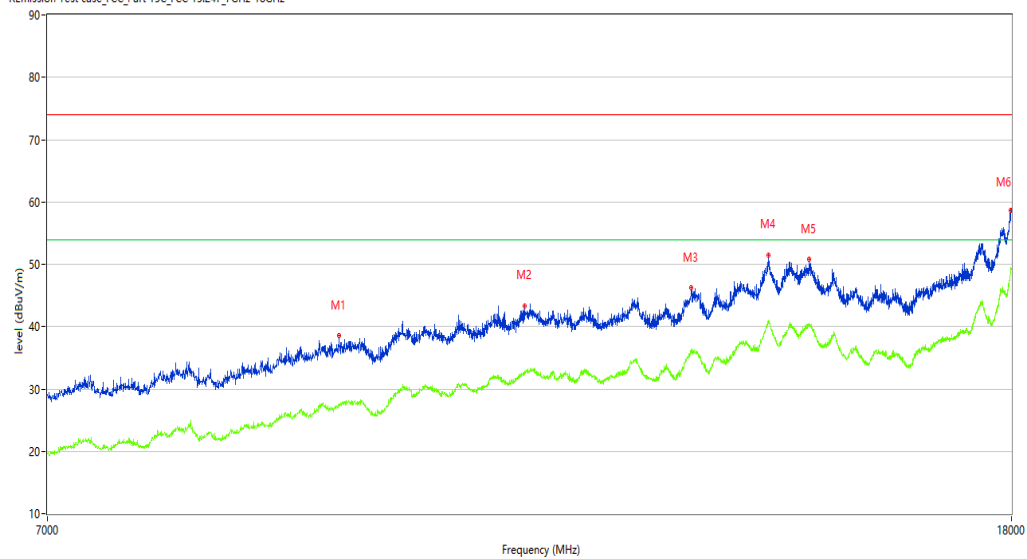

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9312.172	38.55	6.99	74.0	-35.45	Peak	61.80	100	Horizontal	Pass
1**	9312.172	27.58	6.99	54.0	-26.42	AV	61.80	100	Horizontal	Pass
2	11170.707	43.35	11.02	74.0	-30.65	Peak	90.90	100	Horizontal	Pass
2**	11170.707	32.44	11.02	54.0	-21.56	AV	90.90	100	Horizontal	Pass
3	13152.962	46.17	13.98	74.0	-27.83	Peak	264.30	100	Horizontal	Pass
3**	13152.962	36.06	13.98	54.0	-17.94	AV	264.30	100	Horizontal	Pass
4	14192.202	51.54	19.67	74.0	-22.46	Peak	269.10	100	Horizontal	Pass
4**	14192.202	40.70	19.67	54.0	-13.30	AV	269.10	100	Horizontal	Pass
5	14766.808	50.77	18.82	74.0	-23.23	Peak	359.60	100	Horizontal	Pass
5**	14766.808	40.46	18.82	54.0	-13.54	AV	359.60	100	Horizontal	Pass
6	17989.003	58.58	27.24	74.0	-15.42	Peak	0.00	100	Horizontal	Pass
6**	17989.003	48.92	27.24	54.0	-5.08	AV	0.00	100	Horizontal	Pass

BT-Middle channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.36.25

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

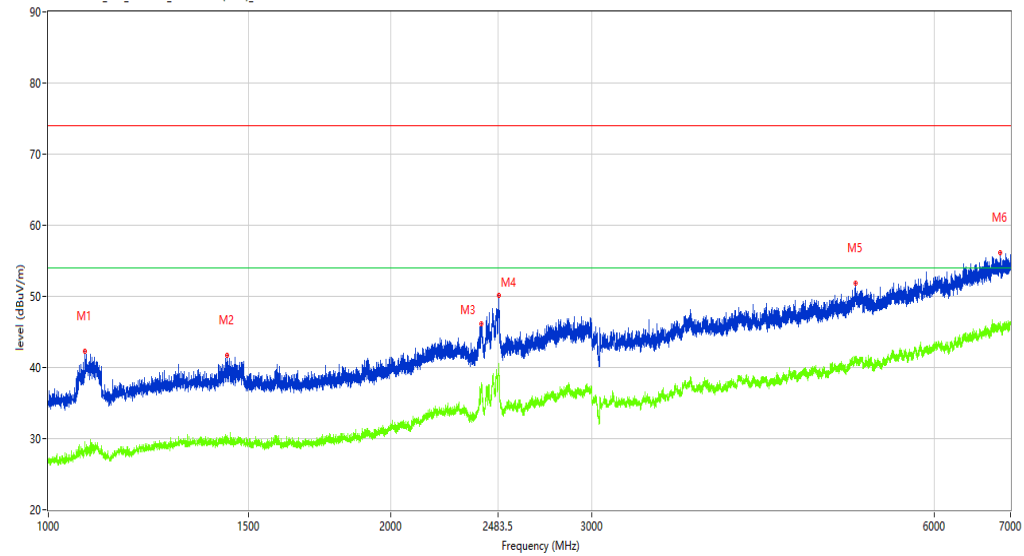

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1076.740	42.25	-14.22	74.0	-31.75	Peak	335.10	100	Vertical	Pass
1**	1076.740	29.61	-14.22	54.0	-24.39	AV	335.10	100	Vertical	Pass
2	1434.696	41.66	-12.65	74.0	-32.34	Peak	277.80	100	Vertical	Pass
2**	1434.696	29.59	-12.65	54.0	-24.41	AV	277.80	100	Vertical	Pass
3	2401.575	46.07	-4.02	74.0	-27.93	Peak	167.30	100	Vertical	Pass
3**	2401.575	37.01	-4.02	54.0	-16.99	AV	167.30	100	Vertical	Pass
4	2486.064	50.17	-1.91	74.0	-23.83	Peak	358.80	100	Vertical	Pass
4**	2486.064	39.73	-1.91	54.0	-14.27	AV	358.80	100	Vertical	Pass
5	5116.735	51.90	1.29	74.0	-22.10	Peak	94.70	100	Vertical	Pass
5**	5116.735	41.36	1.29	54.0	-12.64	AV	94.70	100	Vertical	Pass
6	6855.018	56.14	5.04	74.0	-17.86	Peak	0.50	100	Vertical	Pass
6**	6855.018	45.80	5.04	54.0	-8.20	AV	0.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_16.00.08

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 19.8

Load: full load

Hum.: 50%

Remark: DR-RSE01-H22020028-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

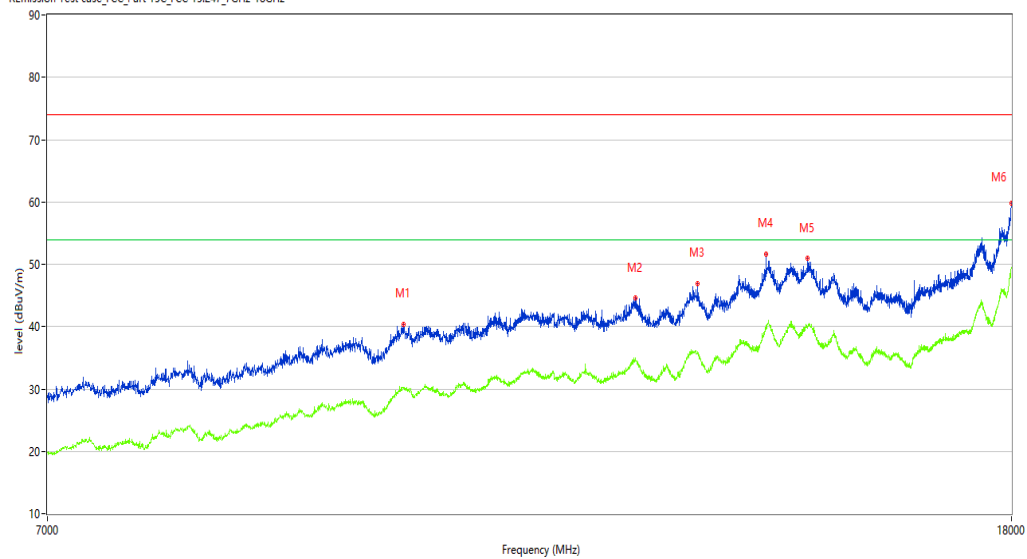

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9925.269	40.36	9.87	74.0	-33.64	Peak	226.70	100	Vertical	Pass
1**	9925.269	30.27	9.87	54.0	-23.73	AV	226.70	100	Vertical	Pass
2	12451.887	44.57	12.51	74.0	-29.43	Peak	295.90	100	Vertical	Pass
2**	12451.887	35.00	12.51	54.0	-19.00	AV	295.90	100	Vertical	Pass
3	13235.441	46.97	14.16	74.0	-27.03	Peak	347.30	100	Vertical	Pass
3**	13235.441	35.81	14.16	54.0	-18.19	AV	347.30	100	Vertical	Pass
4	14153.712	51.69	18.67	74.0	-22.31	Peak	256.10	100	Vertical	Pass
4**	14153.712	39.75	18.67	54.0	-14.25	AV	256.10	100	Vertical	Pass
5	14744.814	50.94	18.65	74.0	-23.06	Peak	206.60	100	Vertical	Pass
5**	14744.814	40.12	18.65	54.0	-13.88	AV	206.60	100	Vertical	Pass
6	17994.501	59.76	27.58	74.0	-14.24	Peak	138.90	100	Vertical	Pass
6**	17994.501	49.32	27.58	54.0	-4.68	AV	138.90	100	Vertical	Pass

BT-High channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.09.38

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

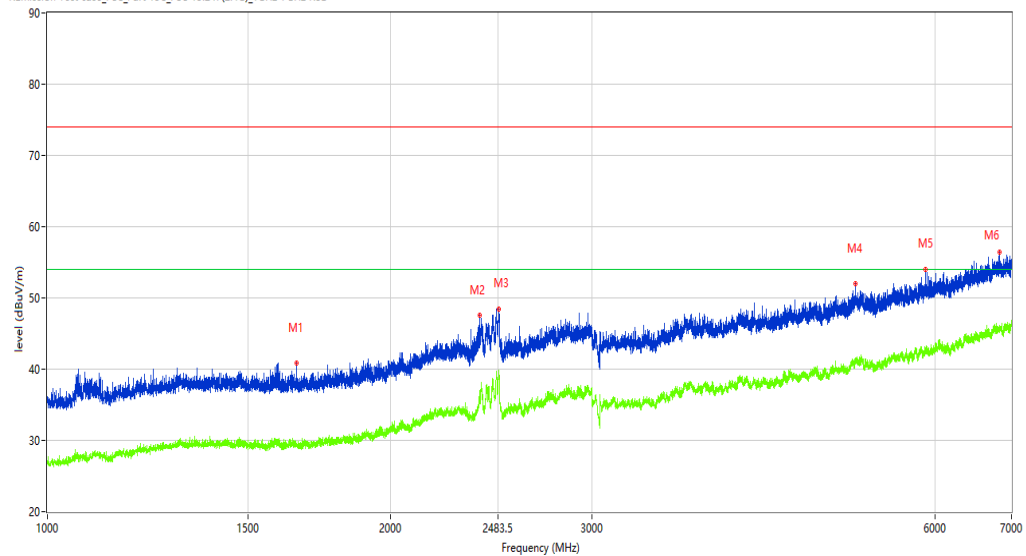

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1652.918	40.90	-12.94	74.0	-33.10	Peak	359.00	100	Horizontal	Pass
1**	1652.918	29.48	-12.94	54.0	-24.52	AV	359.00	100	Horizontal	Pass
2	2391.826	47.59	-4.42	74.0	-26.41	Peak	330.10	100	Horizontal	Pass
2**	2391.826	36.61	-4.42	54.0	-17.39	AV	330.10	100	Horizontal	Pass
3	2487.814	48.38	-1.88	74.0	-25.62	Peak	325.30	100	Horizontal	Pass
3**	2487.814	39.56	-1.88	54.0	-14.44	AV	325.30	100	Horizontal	Pass
4	5107.237	51.98	1.30	74.0	-22.02	Peak	243.10	100	Horizontal	Pass
4**	5107.237	41.45	1.30	54.0	-12.55	AV	243.10	100	Horizontal	Pass
5	5888.639	53.95	2.11	74.0	-20.05	Peak	43.30	100	Horizontal	Pass
5**	5888.639	43.05	2.11	54.0	-10.95	AV	43.30	100	Horizontal	Pass
6	6830.021	56.44	5.09	74.0	-17.56	Peak	321.30	100	Horizontal	Pass
6**	6830.021	45.34	5.09	54.0	-8.66	AV	321.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_16.55.26

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 19.8

Load: full load

Hum.: 50%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

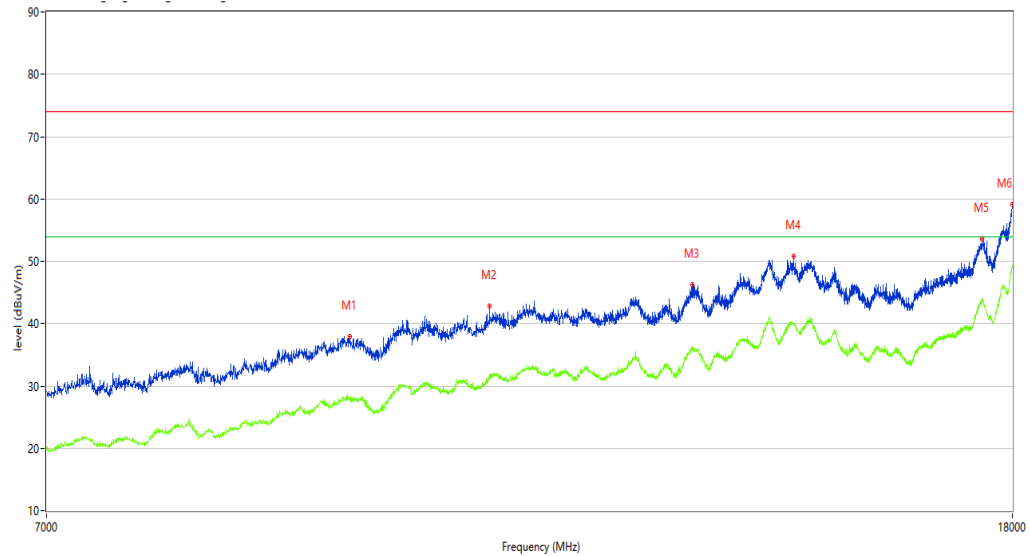

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9416.646	37.97	7.63	74.0	-36.03	Peak	0.00	100	Horizontal	Pass
1**	9416.646	27.90	7.63	54.0	-26.10	AV	0.00	100	Horizontal	Pass
2	10794.051	42.80	10.39	74.0	-31.20	Peak	288.90	100	Horizontal	Pass
2**	10794.051	31.42	10.39	54.0	-22.58	AV	288.90	100	Horizontal	Pass
3	13161.210	46.24	14.00	74.0	-27.76	Peak	195.40	100	Horizontal	Pass
3**	13161.210	36.04	14.00	54.0	-17.96	AV	195.40	100	Horizontal	Pass
4	14533.117	50.78	17.46	74.0	-23.22	Peak	47.00	100	Horizontal	Pass
4**	14533.117	39.92	17.46	54.0	-14.08	AV	47.00	100	Horizontal	Pass
5	17472.132	53.52	21.29	74.0	-20.48	Peak	161.20	100	Horizontal	Pass
5**	17472.132	43.63	21.29	54.0	-10.37	AV	161.20	100	Horizontal	Pass
6	18000.000	59.16	27.92	74.0	-14.84	Peak	51.40	100	Horizontal	Pass
6**	18000.000	49.39	27.92	54.0	-4.61	AV	51.40	100	Horizontal	Pass

BT-High channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09:38.47

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

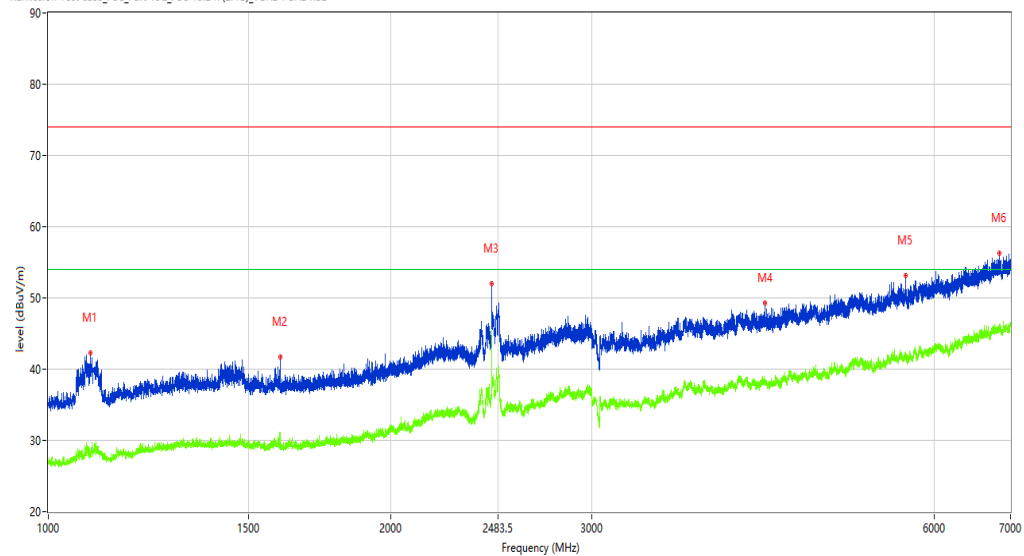

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1088.489	42.26	-14.22	74.0	-31.74	Peak	345.70	100	Vertical	Pass
1**	1088.489	28.29	-14.22	54.0	-25.71	AV	345.70	100	Vertical	Pass
2	1598.675	41.71	-13.14	74.0	-32.29	Peak	330.10	100	Vertical	Pass
2**	1598.675	31.13	-13.14	54.0	-22.87	AV	330.10	100	Vertical	Pass
3	2450.819	52.01	-2.82	74.0	-21.99	Peak	229.30	100	Vertical	Pass
3**	2450.819	45.52	-2.82	54.0	-8.48	AV	229.30	100	Vertical	Pass
4	4258.343	49.26	-1.55	74.0	-24.74	Peak	0.00	100	Vertical	Pass
4**	4258.343	37.82	-1.55	54.0	-16.18	AV	0.00	100	Vertical	Pass
5	5662.667	53.10	1.56	74.0	-20.90	Peak	112.60	100	Vertical	Pass
5**	5662.667	42.27	1.56	54.0	-11.73	AV	112.60	100	Vertical	Pass
6	6842.020	56.27	5.06	74.0	-17.73	Peak	1.90	100	Vertical	Pass
6**	6842.020	45.92	5.06	54.0	-8.08	AV	1.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_16.39.48

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

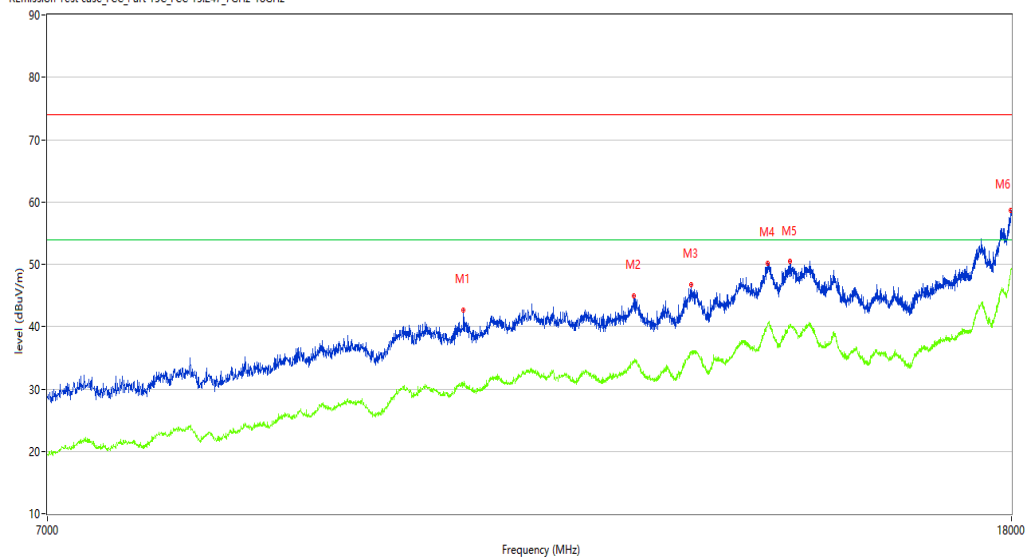

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10524.619	42.68	10.23	74.0	-31.32	Peak	125.10	100	Vertical	Pass
1**	10524.619	30.75	10.23	54.0	-23.25	AV	125.10	100	Vertical	Pass
2	12432.642	44.94	12.42	74.0	-29.06	Peak	187.30	100	Vertical	Pass
2**	12432.642	34.55	12.42	54.0	-19.45	AV	187.30	100	Vertical	Pass
3	13155.711	46.79	13.98	74.0	-27.21	Peak	125.10	100	Vertical	Pass
3**	13155.711	35.77	13.98	54.0	-18.23	AV	125.10	100	Vertical	Pass
4	14172.957	50.16	19.28	74.0	-23.84	Peak	0.40	100	Vertical	Pass
4**	14172.957	40.40	19.28	54.0	-13.60	AV	0.40	100	Vertical	Pass
5	14489.128	50.46	17.78	74.0	-23.54	Peak	105.70	100	Vertical	Pass
5**	14489.128	40.22	17.78	54.0	-13.78	AV	105.70	100	Vertical	Pass
6	17989.003	58.66	27.24	74.0	-15.34	Peak	260.60	100	Vertical	Pass
6**	17989.003	49.26	27.24	54.0	-4.74	AV	260.60	100	Vertical	Pass

BT-Bandedge -Low channel- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.23.31

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

R*Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

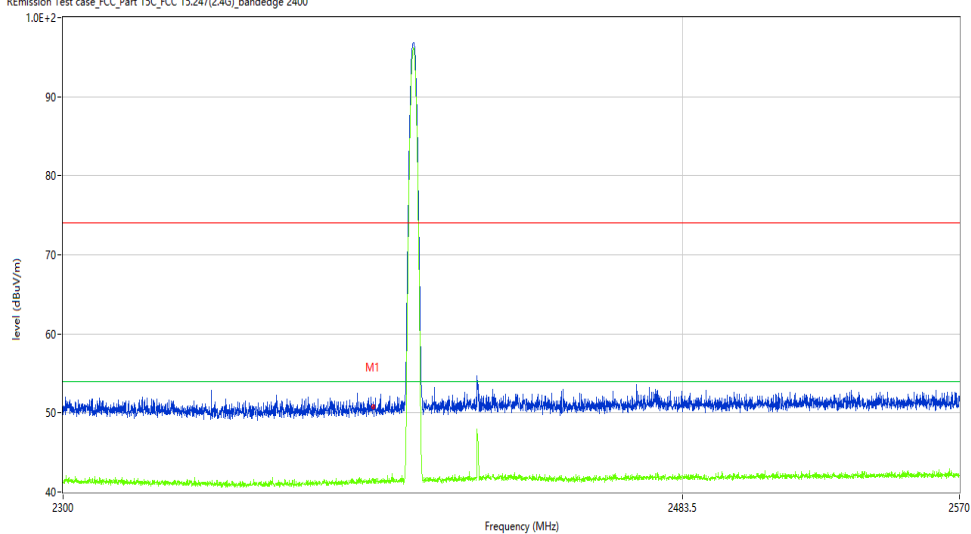

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.66	-9.96	74.0	-23.34	Peak	272.80	100	H	Pass
1**	2390.000	41.29	-9.96	54.0	-12.71	AV	272.80	100	H	Pass

BT-Bandedge -Low channel- Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.08.01

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

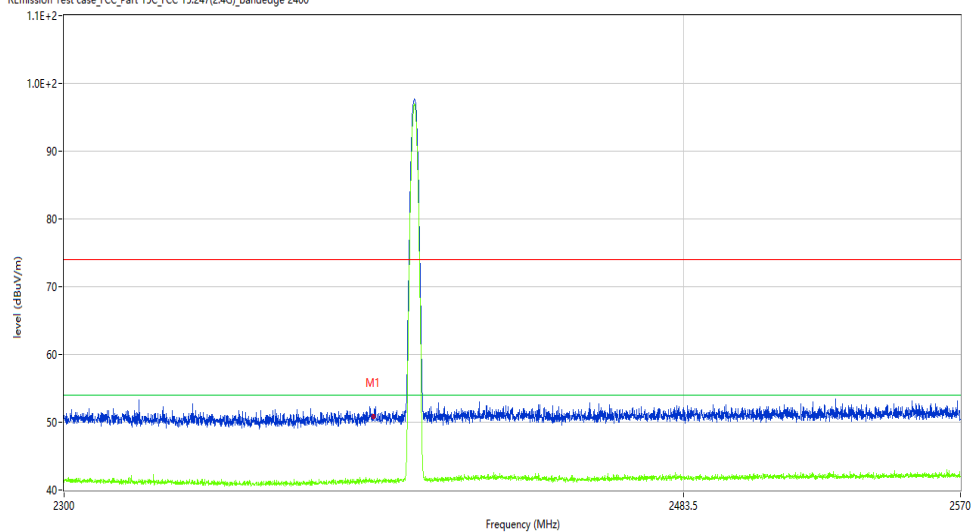

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.85	-9.96	74.0	-23.15	Peak	182.50	100	V	Pass
1**	2390.000	41.34	-9.96	54.0	-12.66	AV	182.50	100	V	Pass

BT-Bandedge -High channel- Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.27.01

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

R*Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

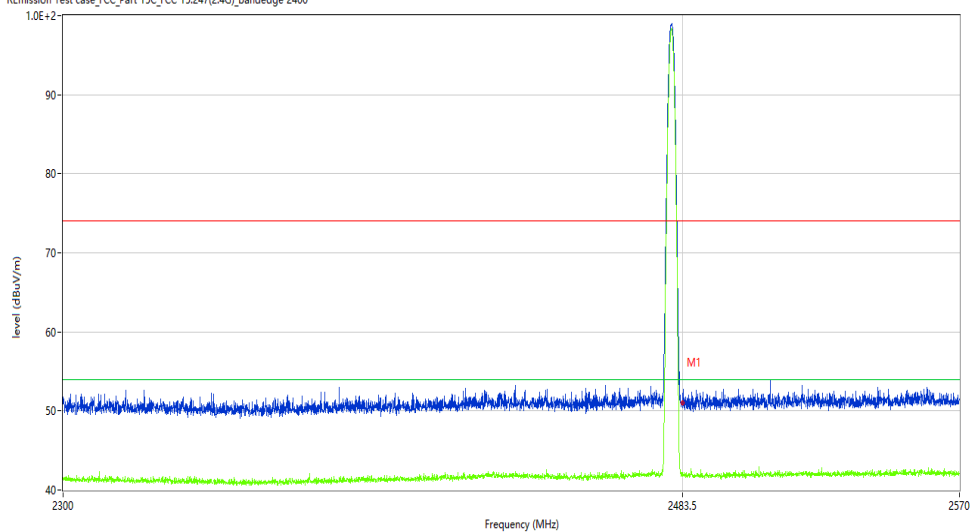

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.95	-9.51	74.0	-23.05	Peak	140.05	100	H	Pass
1**	2483.500	41.94	-9.51	54.0	-12.06	AV	140.05	100	H	Pass

BT-Bandedge -High channel- Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.12.16

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

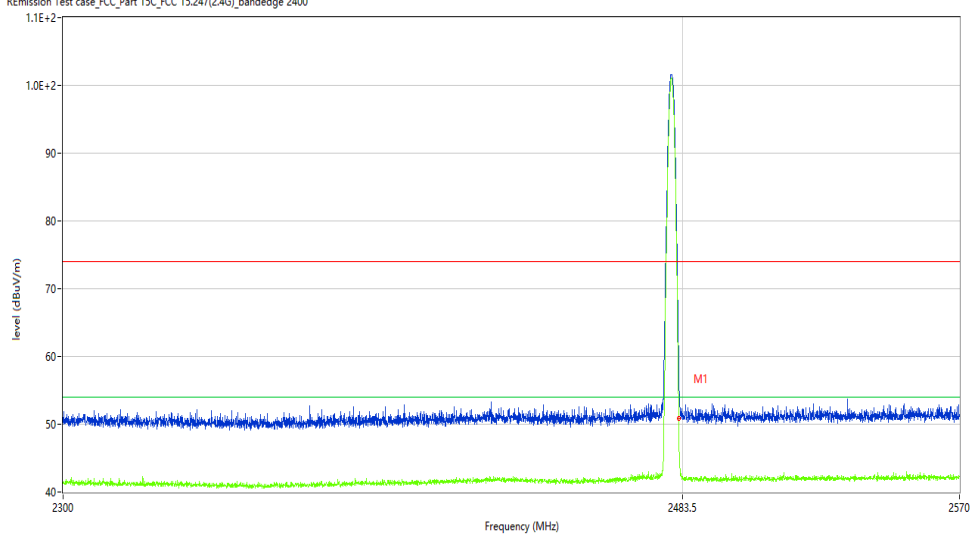

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.79	-9.51	74.0	-23.21	Peak	85.77	100	V	Pass
1**	2483.500	42.00	-9.51	54.0	-12.00	AV	85.77	100	V	Pass

30M-1G

BT-Hopping-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2022-06-02_14.21.49

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23

Load: full load

Hum.: 54%

Remark: DR-RSE01-H22020028-01#01

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

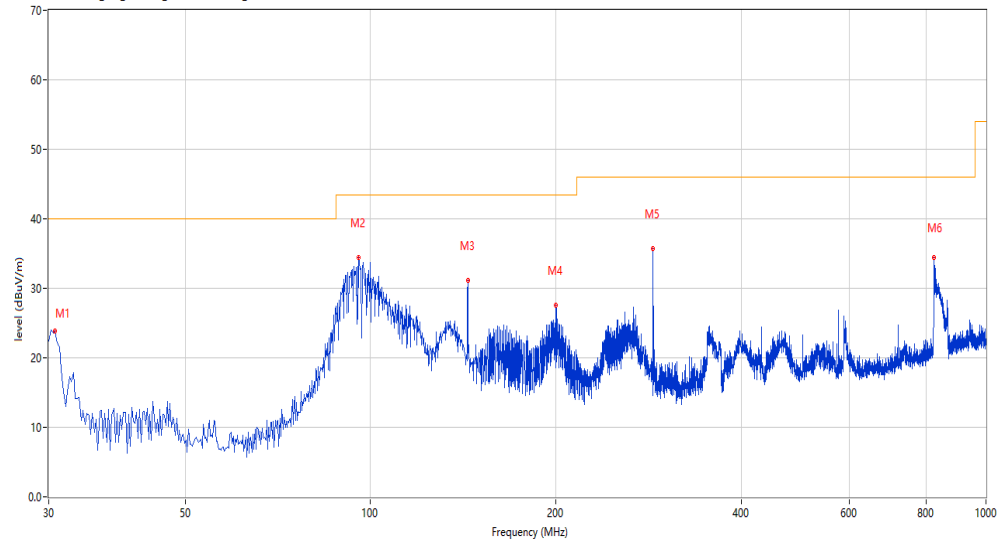

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.727	23.88	-29.59	40.0	-16.12	Peak	89.00	100	Horizontal	Pass
2	95.701	34.49	-27.22	43.5	-9.01	Peak	232.30	150	Horizontal	Pass
3	143.947	31.18	-30.00	43.5	-12.32	Peak	355.00	150	Horizontal	Pass
4	200.192	27.64	-26.20	43.5	-15.86	Peak	53.70	150	Horizontal	Pass
5	287.956	35.77	-24.10	46.0	-10.23	Peak	360.00	150	Horizontal	Pass
6	823.262	34.37	-11.84	46.0	-11.63	Peak	205.90	100	Horizontal	Pass

BT-Hopping -Vertical-TX

Test result

Project Number: Certification

Test Time: 2022-06-02_13.24.03

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23

Hum.: 54%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

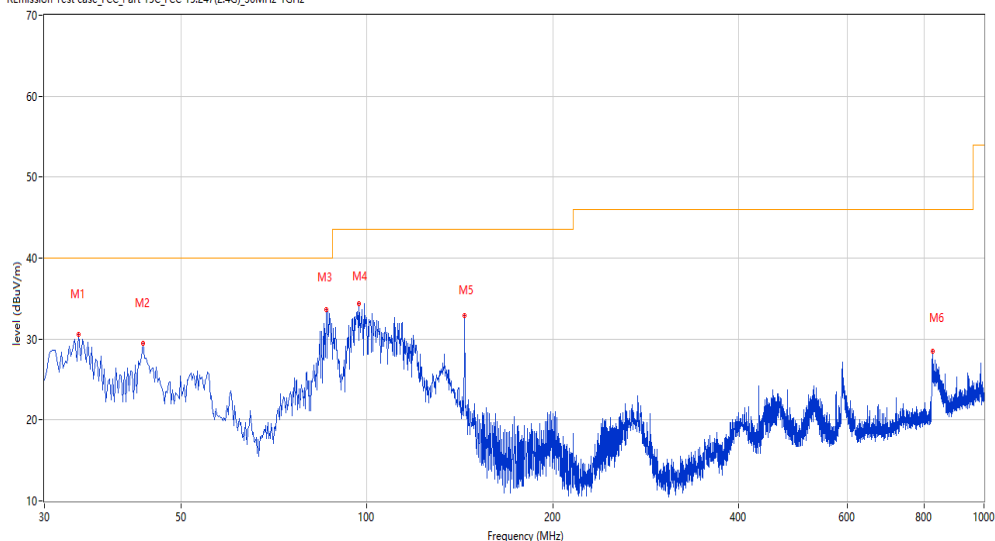

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.121	30.61	-28.36	40.0	-9.39	Peak	321.60	100	Vertical	Pass
2	43.334	29.51	-25.44	40.0	-10.49	Peak	234.90	200	Vertical	Pass
3	86.003	33.58	-30.09	40.0	-6.42	Peak	100.50	100	Vertical	Pass
4	96.913	34.36	-26.97	43.5	-9.14	Peak	243.10	100	Vertical	Pass
5	143.947	32.94	-30.00	43.5	-10.56	Peak	58.90	100	Vertical	Pass
6	825.929	28.48	-11.75	46.0	-17.52	Peak	152.10	150	Vertical	Pass

1-18G

BT-Hopping -Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.14.05

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

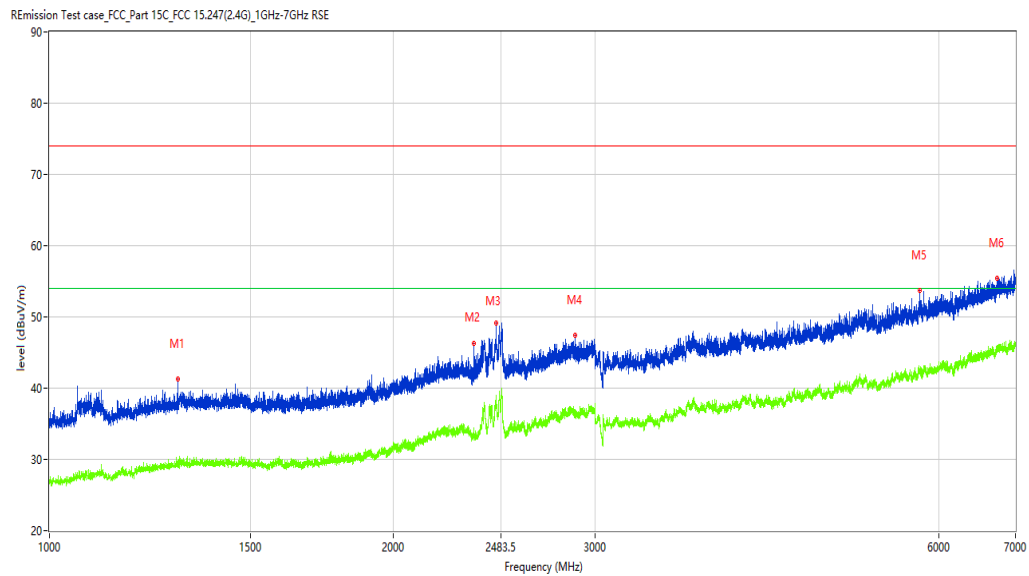

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1294.213	41.27	-12.95	74.0	-32.73	Peak	159.40	100	Horizontal	Pass
1**	1294.213	29.85	-12.95	54.0	-24.15	AV	159.40	100	Horizontal	Pass
2	2351.081	46.32	-8.03	74.0	-27.68	Peak	310.20	100	Horizontal	Pass
2**	2351.081	34.25	-8.03	54.0	-19.75	AV	310.20	100	Horizontal	Pass
3	2458.568	49.07	-2.58	74.0	-24.93	Peak	93.90	100	Horizontal	Pass
3**	2458.568	38.61	-2.58	54.0	-15.39	AV	93.90	100	Horizontal	Pass
4	2884.014	47.39	-3.86	74.0	-26.61	Peak	112.50	100	Horizontal	Pass
4**	2884.014	36.38	-3.86	54.0	-17.62	AV	112.50	100	Horizontal	Pass
5	5770.654	53.66	2.29	74.0	-20.34	Peak	213.40	100	Horizontal	Pass
5**	5770.654	42.41	2.29	54.0	-11.59	AV	213.40	100	Horizontal	Pass
6	6746.532	55.49	4.82	74.0	-18.51	Peak	1.30	100	Horizontal	Pass
6**	6746.532	45.62	4.82	54.0	-8.38	AV	1.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_16.46.03

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 19.8

Load: full load

Hum.: 50%

Remark: DR-RSE01-H22020028-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

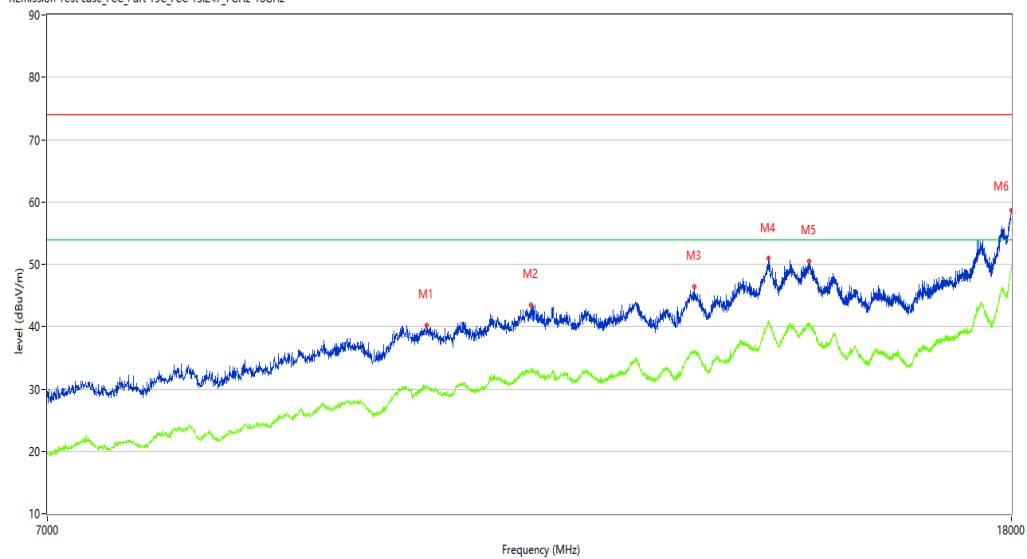

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10153.462	40.27	9.22	74.0	-33.73	Peak	110.00	100	Horizontal	Pass
1**	10153.462	30.21	9.22	54.0	-23.79	AV	110.00	100	Horizontal	Pass
2	11244.939	43.51	11.83	74.0	-30.49	Peak	124.50	100	Horizontal	Pass
2**	11244.939	33.05	11.83	54.0	-20.95	AV	124.50	100	Horizontal	Pass
3	13188.703	46.49	14.06	74.0	-27.51	Peak	0.40	100	Horizontal	Pass
3**	13188.703	36.19	14.06	54.0	-17.81	AV	0.40	100	Horizontal	Pass
4	14189.453	50.94	19.73	74.0	-23.06	Peak	332.90	100	Horizontal	Pass
4**	14189.453	40.49	19.73	54.0	-13.51	AV	332.90	100	Horizontal	Pass
5	14758.560	50.51	18.81	74.0	-23.49	Peak	55.20	100	Horizontal	Pass
5**	14758.560	40.22	18.81	54.0	-13.78	AV	55.20	100	Horizontal	Pass
6	17994.501	58.72	27.58	74.0	-15.28	Peak	260.70	100	Horizontal	Pass
6**	17994.501	49.38	27.58	54.0	-4.62	AV	260.70	100	Horizontal	Pass

BT-Hopping -Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.19.47

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

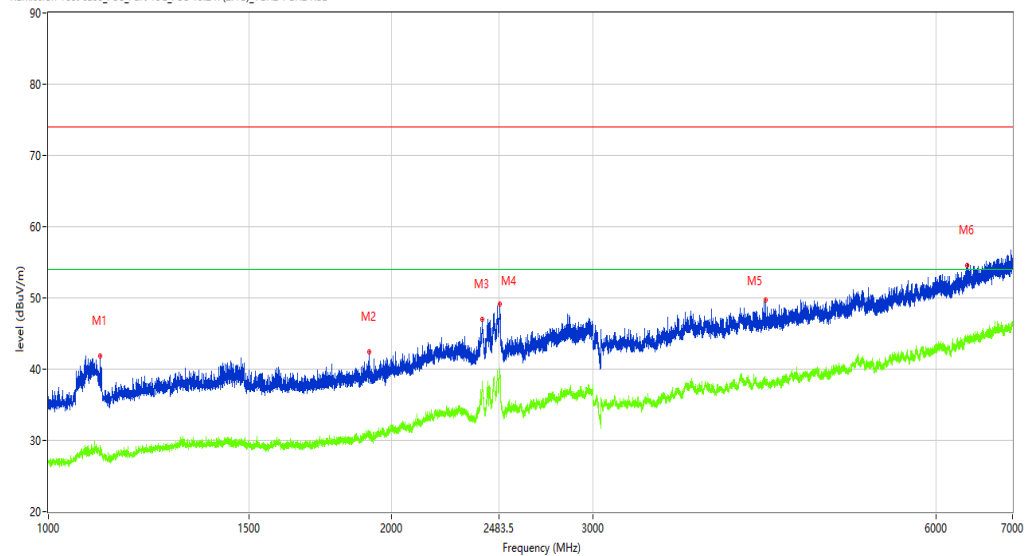

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1109.986	41.87	-14.09	74.0	-32.13	Peak	351.40	100	Vertical	Pass
1**	1109.986	29.24	-14.09	54.0	-24.76	AV	351.40	100	Vertical	Pass
2	1912.386	42.36	-11.67	74.0	-31.64	Peak	55.90	100	Vertical	Pass
2**	1912.386	30.81	-11.67	54.0	-23.19	AV	55.90	100	Vertical	Pass
3	2400.825	47.00	-4.04	74.0	-27.00	Peak	220.00	100	Vertical	Pass
3**	2400.825	37.45	-4.04	54.0	-16.55	AV	220.00	100	Vertical	Pass
4	2487.814	49.17	-1.88	74.0	-24.83	Peak	70.00	100	Vertical	Pass
4**	2487.814	39.44	-1.88	54.0	-14.56	AV	70.00	100	Vertical	Pass
5	4255.843	49.72	-1.56	74.0	-24.28	Peak	359.90	100	Vertical	Pass
5**	4255.843	38.43	-1.56	54.0	-15.57	AV	359.90	100	Vertical	Pass
6	6385.077	54.56	3.62	74.0	-19.44	Peak	168.00	100	Vertical	Pass
6**	6385.077	43.94	3.62	54.0	-10.06	AV	168.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_16.42.37

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

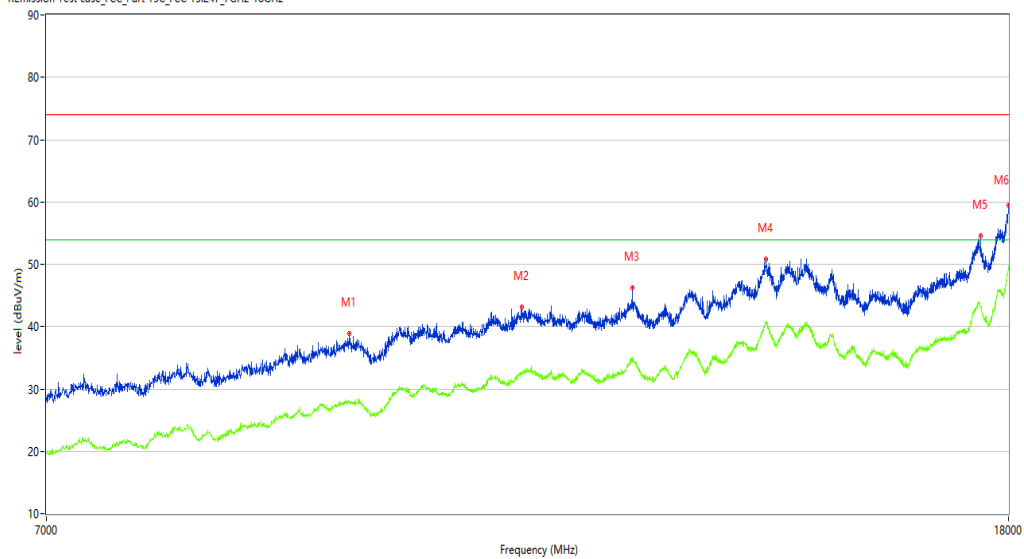

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9424.894	38.91	7.62	74.0	-35.09	Peak	326.30	100	Vertical	Pass
1**	9424.894	27.85	7.62	54.0	-26.15	AV	326.30	100	Vertical	Pass
2	11159.710	43.10	10.93	74.0	-30.90	Peak	209.70	100	Vertical	Pass
2**	11159.710	32.74	10.93	54.0	-21.26	AV	209.70	100	Vertical	Pass
3	12443.639	46.27	12.47	74.0	-27.73	Peak	12.70	100	Vertical	Pass
3**	12443.639	35.15	12.47	54.0	-18.85	AV	12.70	100	Vertical	Pass
4	14192.202	50.82	19.67	74.0	-23.18	Peak	126.00	100	Vertical	Pass
4**	14192.202	40.78	19.67	54.0	-13.22	AV	126.00	100	Vertical	Pass
5	17516.121	54.56	20.82	74.0	-19.44	Peak	233.50	100	Vertical	Pass
5**	17516.121	42.92	20.82	54.0	-11.08	AV	233.50	100	Vertical	Pass
6	18000.000	59.47	27.92	74.0	-14.53	Peak	214.60	100	Vertical	Pass
6**	18000.000	49.69	27.92	54.0	-4.31	AV	214.60	100	Vertical	Pass

BT-Bandedge-Hopping- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.33.02

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

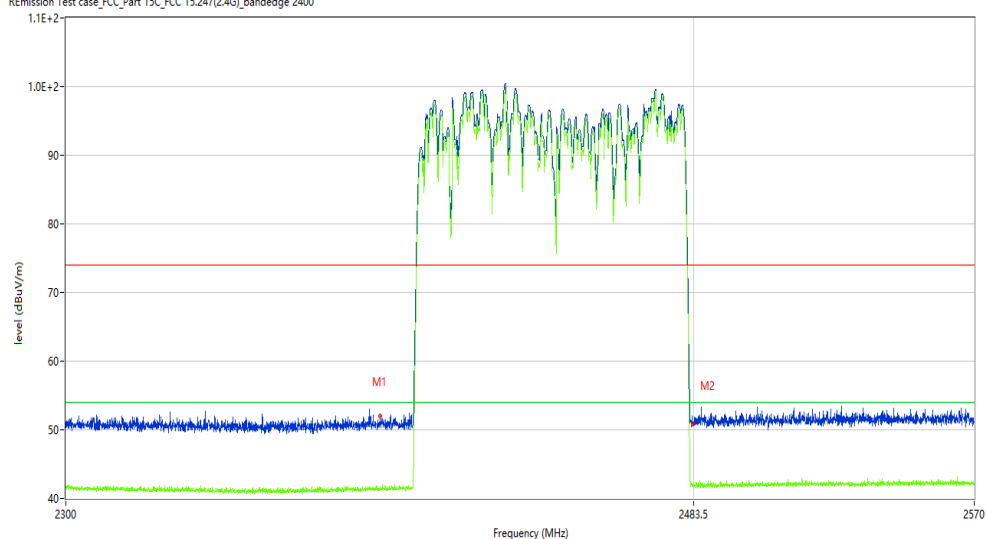

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.80	-9.96	74.0	-22.20	Peak	196.08	100	H	Pass
1**	2390.000	41.41	-9.96	54.0	-12.59	AV	196.08	100	H	Pass
2	2483.500	50.82	-9.51	74.0	-23.18	Peak	171.17	100	H	Pass
2**	2483.500	42.06	-9.51	54.0	-11.94	AV	171.17	100	H	Pass

BT-Bandedge-Hopping-Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.36.46

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

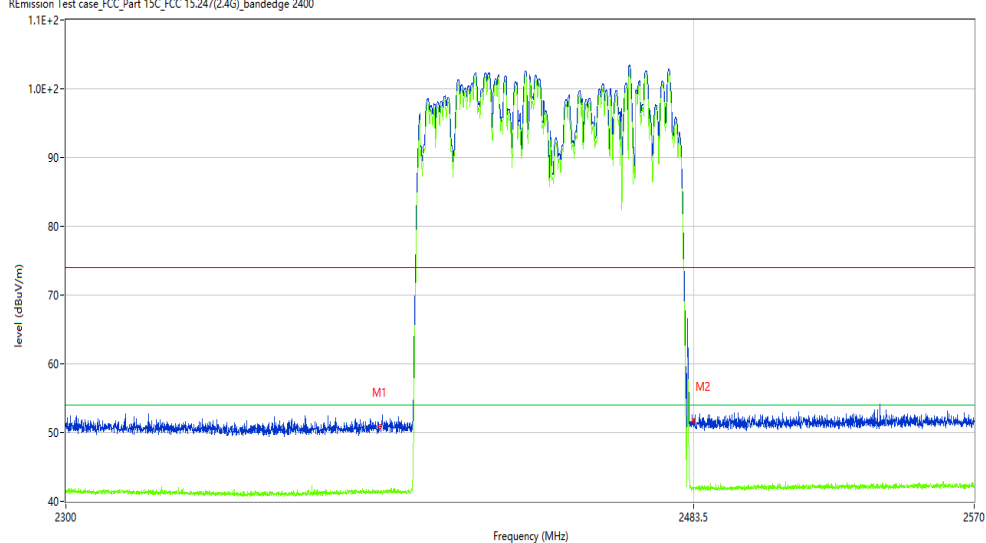

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.91	-9.96	74.0	-23.09	Peak	107.77	100	V	Pass
1**	2390.000	41.60	-9.96	54.0	-12.40	AV	107.77	100	V	Pass
2	2483.500	51.77	-9.51	74.0	-22.23	Peak	174.20	100	V	Pass
2**	2483.500	42.01	-9.51	54.0	-11.99	AV	174.20	100	V	Pass

30M-1G

BT 3M-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-02_14.27.18

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23

Load: full load

Hum.: 54%

Remark: DR-RSE01-H22020028-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(Z.4G)_30MHz-1GHz

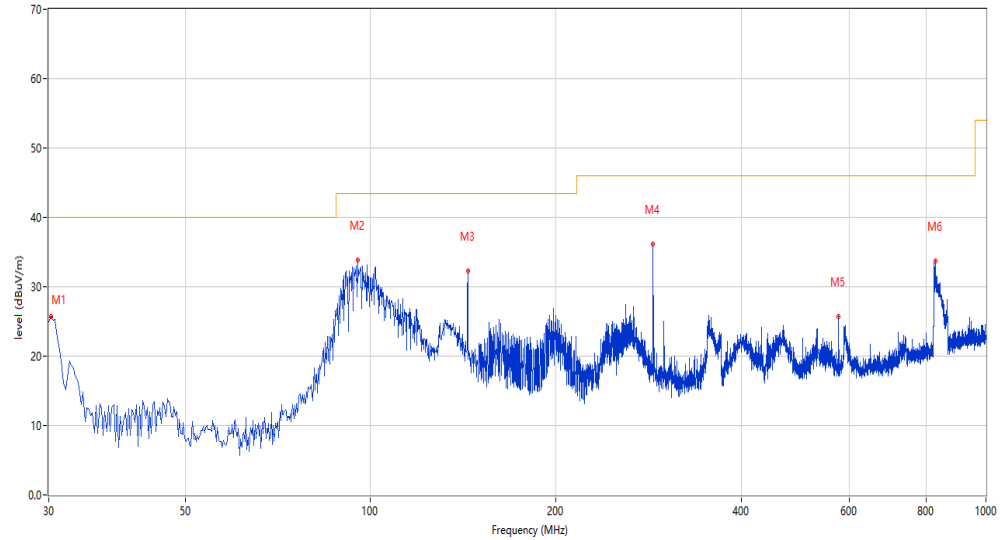

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.000	25.00	-29.82	40.0	-15.00	Peak	89.80	150	Horizontal	Pass
2	95.216	33.88	-27.32	43.5	-9.62	Peak	233.00	150	Horizontal	Pass
3	143.947	32.32	-30.00	43.5	-11.18	Peak	21.00	150	Horizontal	Pass
4	287.956	36.08	-24.10	46.0	-9.92	Peak	360.00	150	Horizontal	Pass
5	575.731	25.74	-16.82	46.0	-20.26	Peak	123.30	150	Horizontal	Pass
6	827.626	33.70	-11.69	46.0	-12.30	Peak	193.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-06-02_13.28.44

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23

Load: full load

Hum.: 54%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

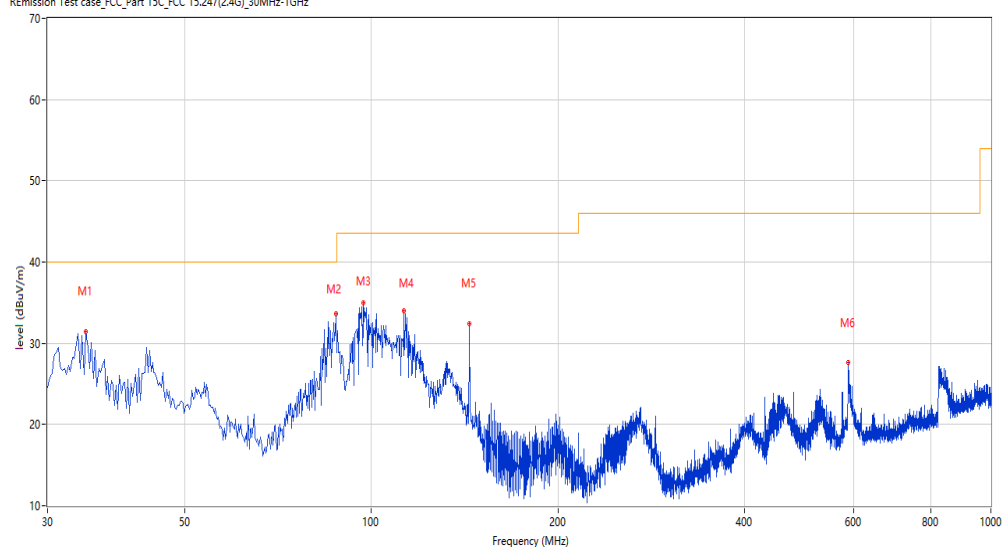

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.606	31.44	-28.20	40.0	-8.56	Peak	343.90	100	Vertical	Pass
2	87.701	33.64	-29.50	40.0	-6.36	Peak	78.60	150	Vertical	Pass
3	96.913	34.97	-26.97	43.5	-8.53	Peak	297.50	100	Vertical	Pass
4	112.914	34.02	-27.25	43.5	-9.48	Peak	121.50	100	Vertical	Pass
5	143.947	32.42	-30.00	43.5	-11.08	Peak	359.60	100	Vertical	Pass
6	588.338	27.58	-15.88	46.0	-18.42	Peak	181.40	100	Vertical	Pass

1-18G

BT 3M -Low channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.07.55

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

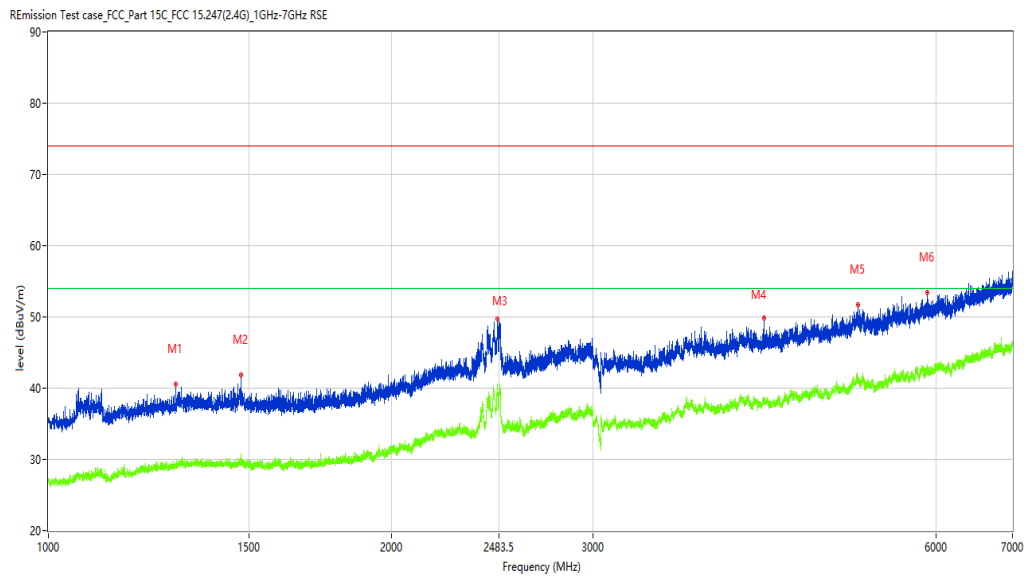

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1293.963	40.53	-12.95	74.0	-33.47	Peak	72.70	100	Horizontal	Pass
1**	1293.963	29.42	-12.95	54.0	-24.58	AV	72.70	100	Horizontal	Pass
2	1474.191	41.79	-12.90	74.0	-32.21	Peak	24.30	100	Horizontal	Pass
2**	1474.191	29.35	-12.90	54.0	-24.65	AV	24.30	100	Horizontal	Pass
3	2475.566	49.72	-2.12	74.0	-24.28	Peak	333.60	100	Horizontal	Pass
3**	2475.566	40.55	-2.12	54.0	-13.45	AV	333.60	100	Horizontal	Pass
4	4237.345	49.82	-1.54	74.0	-24.18	Peak	24.00	100	Horizontal	Pass
4**	4237.345	38.76	-1.54	54.0	-15.24	AV	24.00	100	Horizontal	Pass
5	5121.235	51.74	1.26	74.0	-22.26	Peak	268.50	100	Horizontal	Pass
5**	5121.235	40.96	1.26	54.0	-13.04	AV	268.50	100	Horizontal	Pass
6	5890.639	53.47	2.09	74.0	-20.53	Peak	351.90	100	Horizontal	Pass
6**	5890.639	42.53	2.09	54.0	-11.47	AV	351.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_16.58.11

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 19.8

Load: full load

Hum.: 50%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

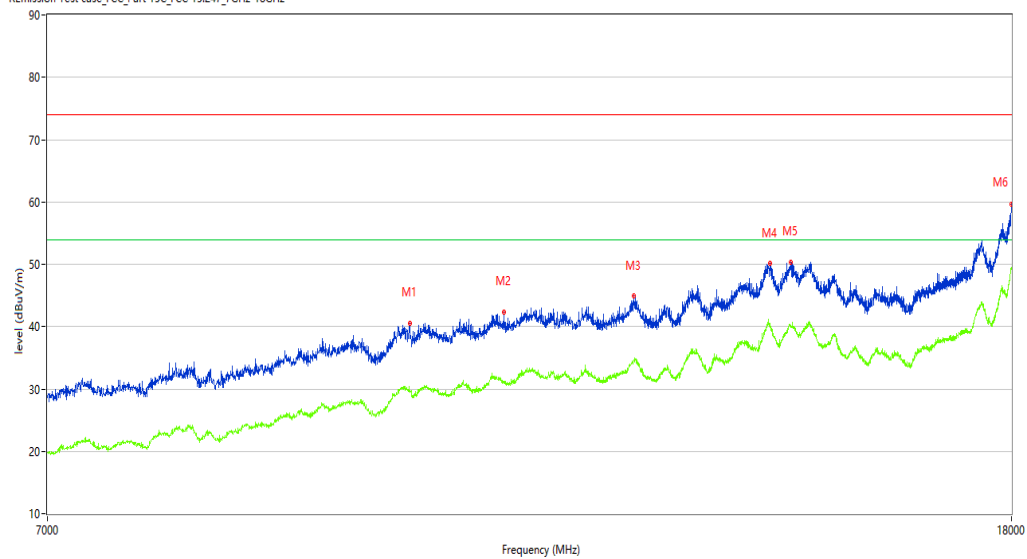

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9983.004	40.59	9.38	74.0	-33.41	Peak	0.00	100	Horizontal	Pass
1**	9983.004	29.57	9.38	54.0	-24.43	AV	0.00	100	Horizontal	Pass
2	10945.264	42.41	11.14	74.0	-31.59	Peak	360.00	100	Horizontal	Pass
2**	10945.264	30.96	11.14	54.0	-23.04	AV	360.00	100	Horizontal	Pass
3	12435.391	44.86	12.43	74.0	-29.14	Peak	327.20	100	Horizontal	Pass
3**	12435.391	34.43	12.43	54.0	-19.57	AV	327.20	100	Horizontal	Pass
4	14211.447	50.13	19.24	74.0	-23.87	Peak	2.50	100	Horizontal	Pass
4**	14211.447	40.58	19.24	54.0	-13.42	AV	2.50	100	Horizontal	Pass
5	14500.125	50.34	17.71	74.0	-23.66	Peak	147.80	100	Horizontal	Pass
5**	14500.125	40.19	17.71	54.0	-13.81	AV	147.80	100	Horizontal	Pass
6	18000.000	59.65	27.92	74.0	-14.35	Peak	0.00	100	Horizontal	Pass
6**	18000.000	49.49	27.92	54.0	-4.51	AV	0.00	100	Horizontal	Pass

BT 3M -Low channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.43.17

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

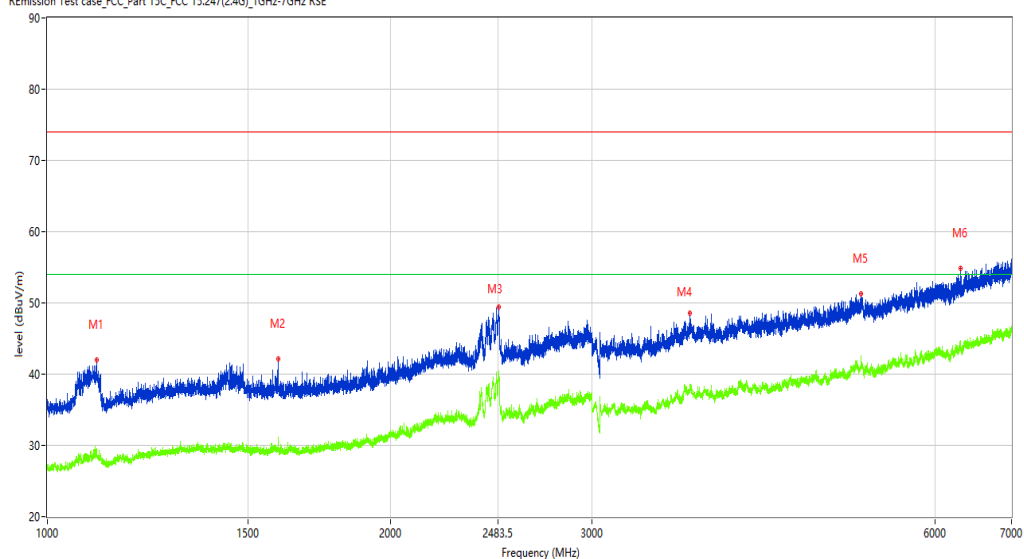

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1104.987	41.94	-14.15	74.0	-32.06	Peak	344.40	100	Vertical	Pass
1**	1104.987	29.15	-14.15	54.0	-24.85	AV	344.40	100	Vertical	Pass
2	1594.426	42.18	-13.11	74.0	-31.82	Peak	334.70	100	Vertical	Pass
2**	1594.426	31.11	-13.11	54.0	-22.89	AV	334.70	100	Vertical	Pass
3	2487.814	49.39	-1.88	74.0	-24.61	Peak	157.50	100	Vertical	Pass
3**	2487.814	40.12	-1.88	54.0	-13.88	AV	157.50	100	Vertical	Pass
4	3658.418	48.53	-1.61	74.0	-25.47	Peak	172.40	100	Vertical	Pass
4**	3658.418	38.17	-1.61	54.0	-15.83	AV	172.40	100	Vertical	Pass
5	5168.729	51.29	1.13	74.0	-22.71	Peak	339.20	100	Vertical	Pass
5**	5168.729	41.23	1.13	54.0	-12.77	AV	339.20	100	Vertical	Pass
6	6320.585	54.85	3.43	74.0	-19.15	Peak	192.90	100	Vertical	Pass
6**	6320.585	43.51	3.43	54.0	-10.49	AV	192.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.06.27

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

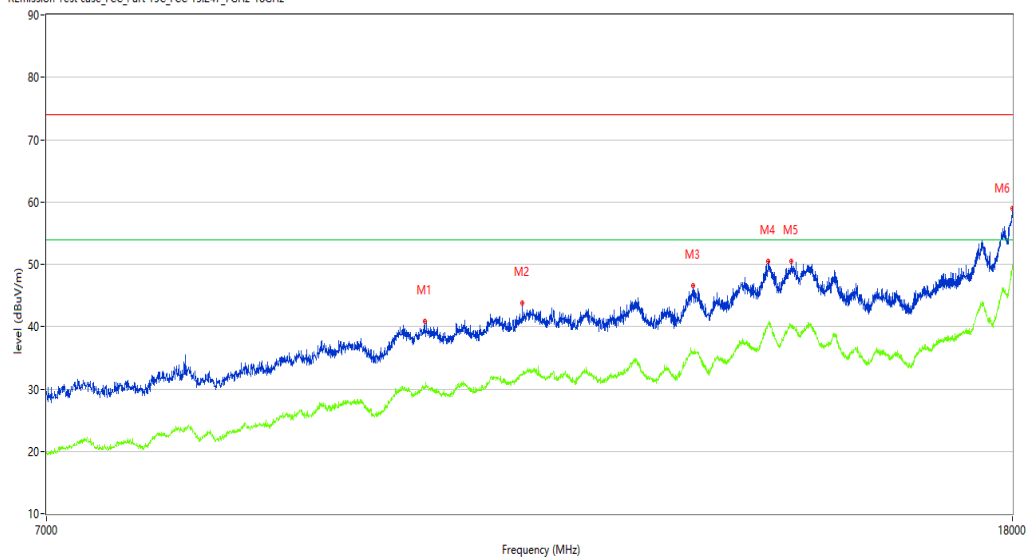

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10131.467	40.85	9.40	74.0	-33.15	Peak	326.10	100	Vertical	Pass
1**	10131.467	30.46	9.40	54.0	-23.54	AV	326.10	100	Vertical	Pass
2	11145.964	43.80	10.82	74.0	-30.20	Peak	149.00	100	Vertical	Pass
2**	11145.964	32.36	10.82	54.0	-21.64	AV	149.00	100	Vertical	Pass
3	13177.706	46.58	14.03	74.0	-27.42	Peak	18.00	100	Vertical	Pass
3**	13177.706	36.01	14.03	54.0	-17.99	AV	18.00	100	Vertical	Pass
4	14178.455	50.50	19.46	74.0	-23.50	Peak	95.80	100	Vertical	Pass
4**	14178.455	40.37	19.46	54.0	-13.63	AV	95.80	100	Vertical	Pass
5	14505.624	50.50	17.67	74.0	-23.50	Peak	100.60	100	Vertical	Pass
5**	14505.624	40.00	17.67	54.0	-14.00	AV	100.60	100	Vertical	Pass
6	18000.000	58.93	27.92	74.0	-15.07	Peak	72.00	100	Vertical	Pass
6**	18000.000	49.80	27.92	54.0	-4.20	AV	72.00	100	Vertical	Pass

BT 3M -Middle channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.10.28

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

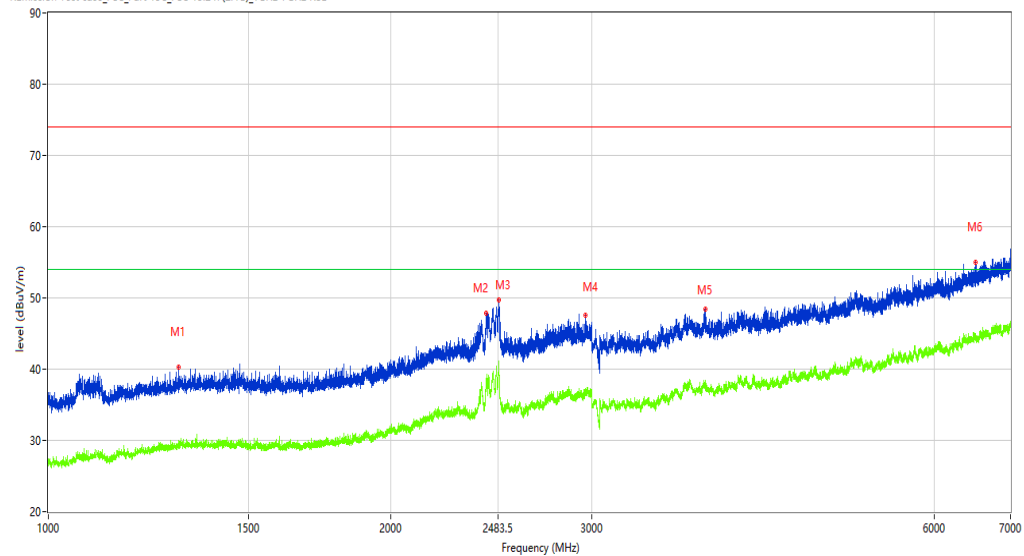

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1301.962	40.30	-12.74	74.0	-33.70	Peak	23.90	100	Horizontal	Pass
1**	1301.962	30.01	-12.74	54.0	-23.99	AV	23.90	100	Horizontal	Pass
2	2425.322	47.82	-3.41	74.0	-26.18	Peak	78.20	100	Horizontal	Pass
2**	2425.322	38.41	-3.41	54.0	-15.59	AV	78.20	100	Horizontal	Pass
3	2487.814	49.66	-1.88	74.0	-24.34	Peak	150.00	100	Horizontal	Pass
3**	2487.814	40.30	-1.88	54.0	-13.70	AV	150.00	100	Horizontal	Pass
4	2960.755	47.51	-3.42	74.0	-26.49	Peak	125.90	100	Horizontal	Pass
4**	2960.755	36.46	-3.42	54.0	-17.54	AV	125.90	100	Horizontal	Pass
5	3778.903	48.39	-1.96	74.0	-25.61	Peak	99.90	100	Horizontal	Pass
5**	3778.903	37.77	-1.96	54.0	-16.23	AV	99.90	100	Horizontal	Pass
6	6524.059	55.01	4.07	74.0	-18.99	Peak	8.80	100	Horizontal	Pass
6**	6524.059	44.26	4.07	54.0	-9.74	AV	8.80	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.01.43

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

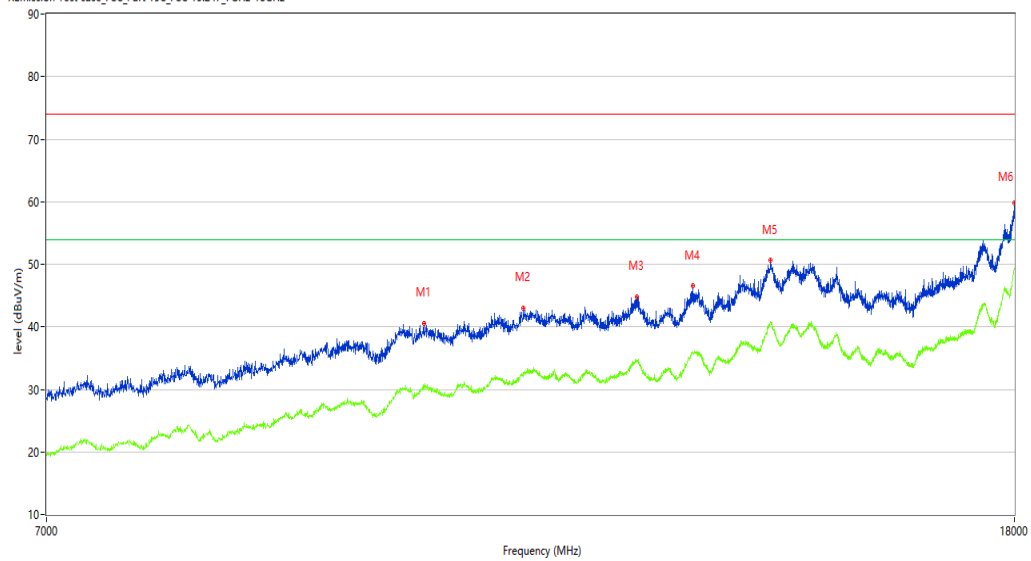

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10114.971	40.53	9.53	74.0	-33.47	Peak	70.40	100	Horizontal	Pass
1**	10114.971	30.09	9.53	54.0	-23.91	AV	70.40	100	Horizontal	Pass
2	11148.713	43.02	10.85	74.0	-30.98	Peak	317.50	100	Horizontal	Pass
2**	11148.713	32.62	10.85	54.0	-21.38	AV	317.50	100	Horizontal	Pass
3	12449.138	44.82	12.50	74.0	-29.18	Peak	230.80	100	Horizontal	Pass
3**	12449.138	34.65	12.50	54.0	-19.35	AV	230.80	100	Horizontal	Pass
4	13147.463	46.50	13.96	74.0	-27.50	Peak	355.10	100	Horizontal	Pass
4**	13147.463	35.92	13.96	54.0	-18.08	AV	355.10	100	Horizontal	Pass
5	14183.954	50.61	19.63	74.0	-23.39	Peak	216.60	100	Horizontal	Pass
5**	14183.954	40.72	19.63	54.0	-13.28	AV	216.60	100	Horizontal	Pass
6	18000.000	59.86	27.92	74.0	-14.14	Peak	355.10	100	Horizontal	Pass
6**	18000.000	49.39	27.92	54.0	-4.61	AV	355.10	100	Horizontal	Pass

BT 3M -Middle channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.47.43

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_1GHz-7GHz RSE

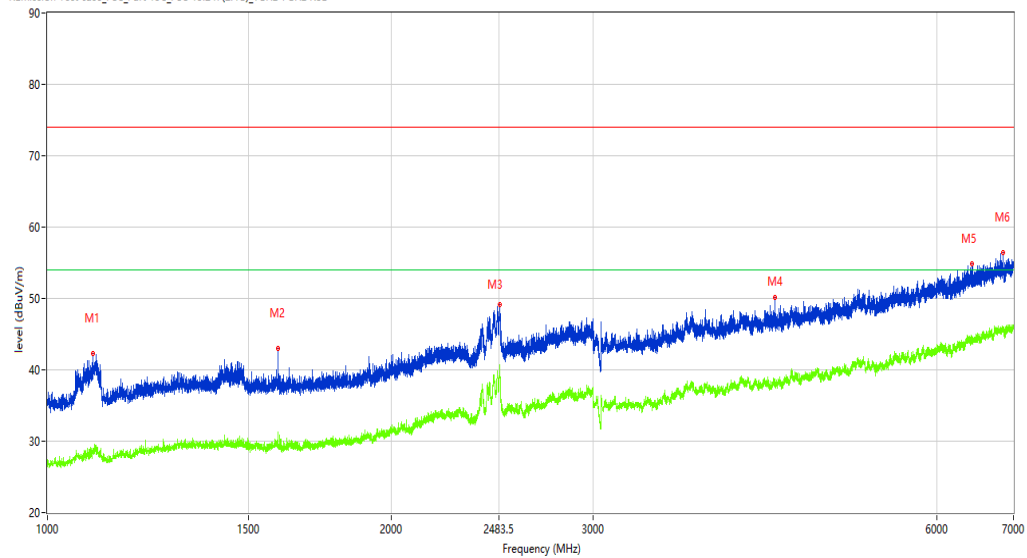

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1095.988	42.22	-14.22	74.0	-31.78	Peak	341.00	100	Vertical	Pass
1**	1095.988	28.90	-14.22	54.0	-25.10	AV	341.00	100	Vertical	Pass
2	1591.926	43.00	-13.09	74.0	-31.00	Peak	335.80	100	Vertical	Pass
2**	1591.926	31.22	-13.09	54.0	-22.78	AV	335.80	100	Vertical	Pass
3	2487.314	49.10	-1.89	74.0	-24.90	Peak	359.70	100	Vertical	Pass
3**	2487.314	40.42	-1.89	54.0	-13.58	AV	359.70	100	Vertical	Pass
4	4331.834	50.16	-1.37	74.0	-23.84	Peak	353.90	100	Vertical	Pass
4**	4331.834	38.76	-1.37	54.0	-15.24	AV	353.90	100	Vertical	Pass
5	6441.570	54.81	3.82	74.0	-19.19	Peak	221.20	100	Vertical	Pass
5**	6441.570	43.84	3.82	54.0	-10.16	AV	221.20	100	Vertical	Pass
6	6853.018	56.36	5.04	74.0	-17.64	Peak	216.80	100	Vertical	Pass
6**	6853.018	45.76	5.04	54.0	-8.24	AV	216.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.08.09

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

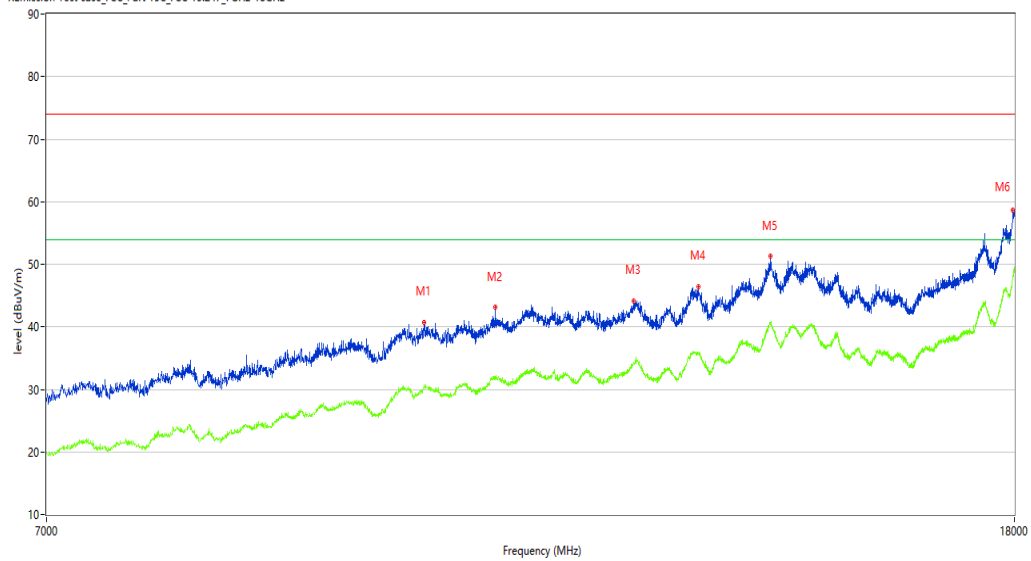

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10114.971	40.73	9.53	74.0	-33.27	Peak	360.00	100	Vertical	Pass
1**	10114.971	30.57	9.53	54.0	-23.43	AV	360.00	100	Vertical	Pass
2	10846.288	43.07	11.11	74.0	-30.93	Peak	42.50	100	Vertical	Pass
2**	10846.288	31.81	11.11	54.0	-22.19	AV	42.50	100	Vertical	Pass
3	12413.397	44.19	12.32	74.0	-29.81	Peak	96.80	100	Vertical	Pass
3**	12413.397	34.32	12.32	54.0	-19.68	AV	96.80	100	Vertical	Pass
4	13221.695	46.46	14.16	74.0	-27.54	Peak	269.80	100	Vertical	Pass
4**	13221.695	35.62	14.16	54.0	-18.38	AV	269.80	100	Vertical	Pass
5	14192.202	51.25	19.67	74.0	-22.75	Peak	13.10	100	Vertical	Pass
5**	14192.202	40.55	19.67	54.0	-13.45	AV	13.10	100	Vertical	Pass
6	17978.005	58.72	26.56	74.0	-15.28	Peak	37.60	100	Vertical	Pass
6**	17978.005	48.26	26.56	54.0	-5.74	AV	37.60	100	Vertical	Pass

BT 3M -High channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.12.45

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_1GHz-7GHz RSE

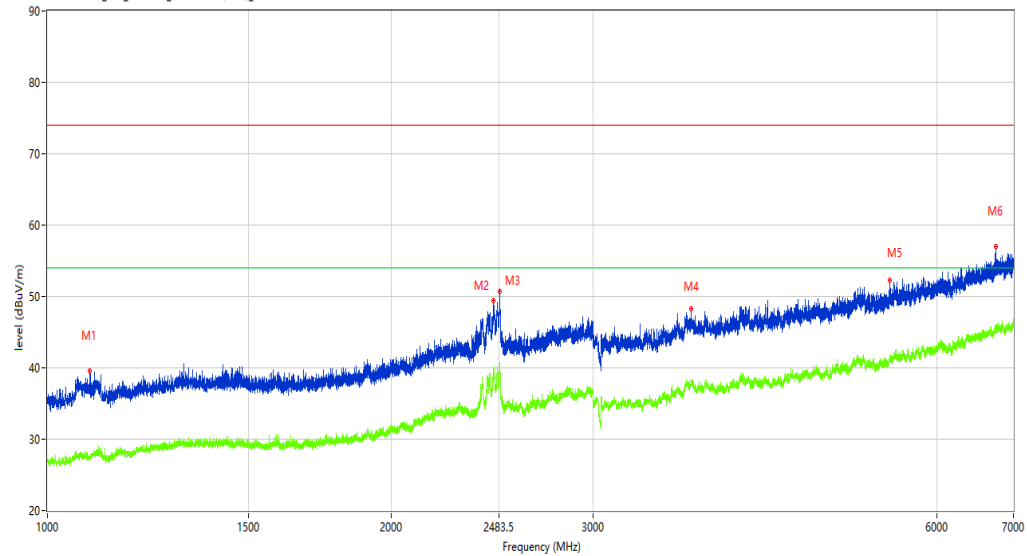

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1089.239	39.61	-14.22	74.0	-34.39	Peak	114.70	100	Horizontal	Pass
1**	1089.239	27.35	-14.22	54.0	-26.65	AV	114.70	100	Horizontal	Pass
2	2457.068	49.48	-2.62	74.0	-24.52	Peak	47.00	100	Horizontal	Pass
2**	2457.068	39.84	-2.62	54.0	-14.16	AV	47.00	100	Horizontal	Pass
3	2486.814	50.67	-1.90	74.0	-23.33	Peak	208.80	100	Horizontal	Pass
3**	2486.814	40.39	-1.90	54.0	-13.61	AV	208.80	100	Horizontal	Pass
4	3658.418	48.24	-1.61	74.0	-25.76	Peak	177.70	100	Horizontal	Pass
4**	3658.418	38.03	-1.61	54.0	-15.97	AV	177.70	100	Horizontal	Pass
5	5455.193	52.35	0.91	74.0	-21.65	Peak	211.20	100	Horizontal	Pass
5**	5455.193	41.11	0.91	54.0	-12.89	AV	211.20	100	Horizontal	Pass
6	6754.531	57.03	4.90	74.0	-16.97	Peak	294.60	100	Horizontal	Pass
6**	6754.531	45.83	4.90	54.0	-8.17	AV	294.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.04.55

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

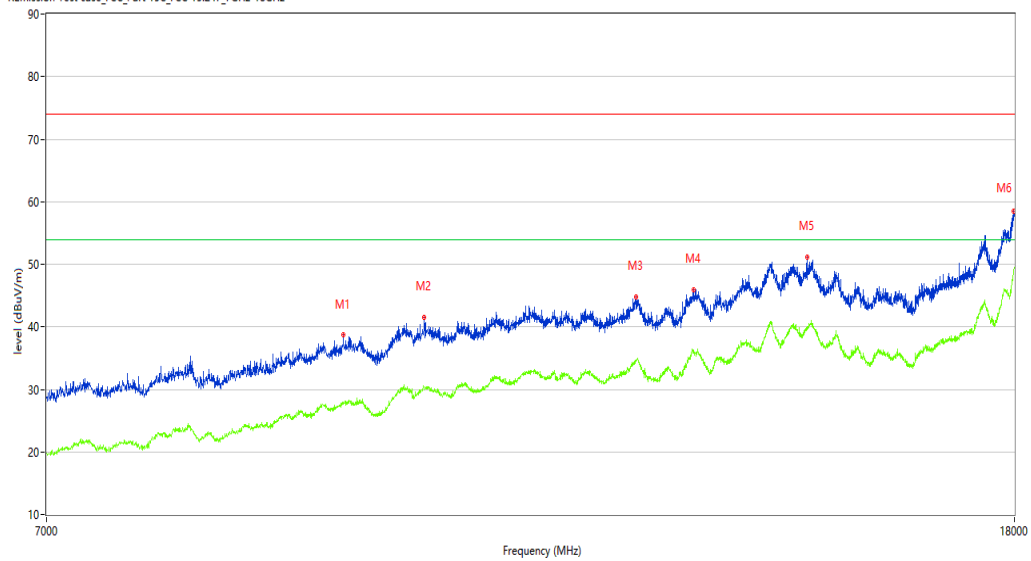

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9350.662	38.71	7.51	74.0	-35.29	Peak	360.00	100	Horizontal	Pass
1**	9350.662	27.92	7.51	54.0	-26.08	AV	360.00	100	Horizontal	Pass
2	10120.470	41.57	9.49	74.0	-32.43	Peak	335.10	100	Horizontal	Pass
2**	10120.470	29.94	9.49	54.0	-24.06	AV	335.10	100	Horizontal	Pass
3	12446.388	44.80	12.49	74.0	-29.20	Peak	290.50	100	Horizontal	Pass
3**	12446.388	34.46	12.49	54.0	-19.54	AV	290.50	100	Horizontal	Pass
4	13166.708	45.92	14.01	74.0	-28.08	Peak	187.00	100	Horizontal	Pass
4**	13166.708	36.30	14.01	54.0	-17.70	AV	187.00	100	Horizontal	Pass
5	14700.825	51.09	18.12	74.0	-22.91	Peak	104.80	100	Horizontal	Pass
5**	14700.825	39.53	18.12	54.0	-14.47	AV	104.80	100	Horizontal	Pass
6	17980.755	58.56	26.73	74.0	-15.44	Peak	4.50	100	Horizontal	Pass
6**	17980.755	48.49	26.73	54.0	-5.51	AV	4.50	100	Horizontal	Pass

BT 3M -High channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.50.14

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_1GHz-7GHz RSE

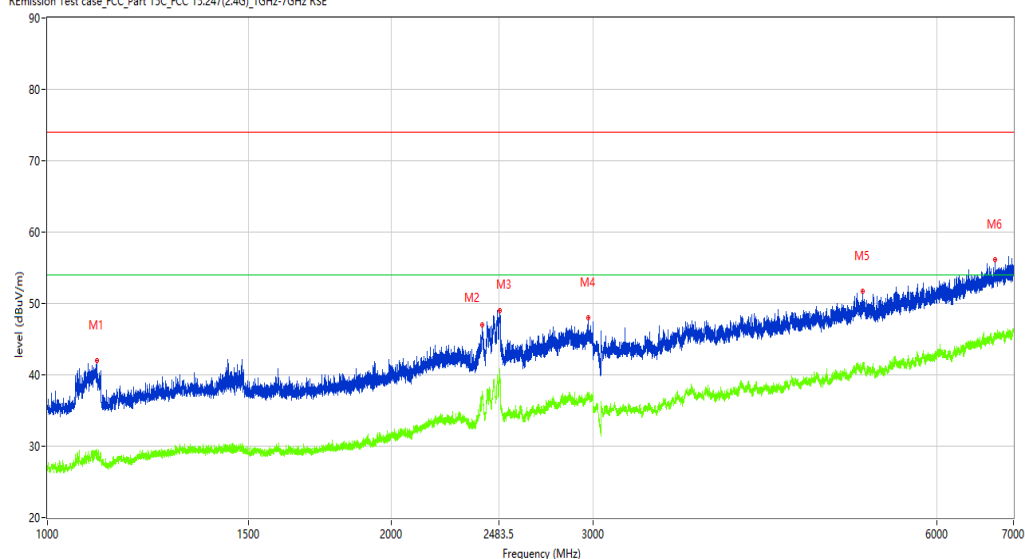

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1104.737	42.01	-14.15	74.0	-31.99	Peak	347.60	100	Vertical	Pass
1**	1104.737	29.57	-14.15	54.0	-24.43	AV	347.60	100	Vertical	Pass
2	2400.575	47.00	-4.04	74.0	-27.00	Peak	127.00	100	Vertical	Pass
2**	2400.575	36.98	-4.04	54.0	-17.02	AV	127.00	100	Vertical	Pass
3	2485.314	48.98	-1.92	74.0	-25.02	Peak	285.80	100	Vertical	Pass
3**	2485.314	39.72	-1.92	54.0	-14.28	AV	285.80	100	Vertical	Pass
4	2971.504	47.95	-3.28	74.0	-26.05	Peak	328.60	100	Vertical	Pass
4**	2971.504	36.71	-3.28	54.0	-17.29	AV	328.60	100	Vertical	Pass
5	5168.729	51.76	1.13	74.0	-22.24	Peak	118.90	100	Vertical	Pass
5**	5168.729	41.26	1.13	54.0	-12.74	AV	118.90	100	Vertical	Pass
6	6749.031	56.14	4.84	74.0	-17.86	Peak	124.10	100	Vertical	Pass
6**	6749.031	45.39	4.84	54.0	-8.61	AV	124.10	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.09.47

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

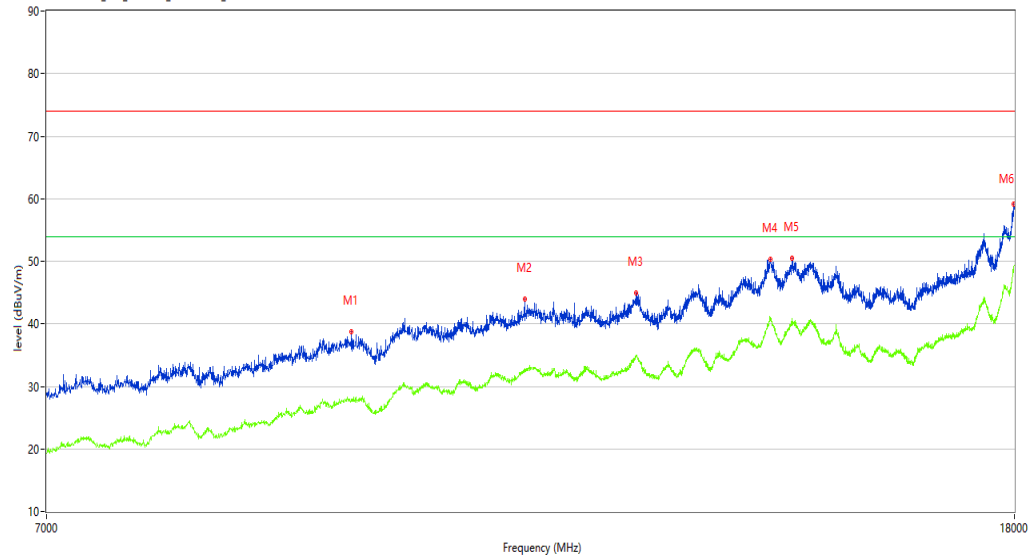

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9427.643	38.78	7.62	74.0	-35.22	Peak	293.70	100	Vertical	Pass
1**	9427.643	28.02	7.62	54.0	-25.98	AV	293.70	100	Vertical	Pass
2	11159.710	43.97	10.93	74.0	-30.03	Peak	105.80	100	Vertical	Pass
2**	11159.710	32.38	10.93	54.0	-21.62	AV	105.80	100	Vertical	Pass
3	12443.639	44.96	12.47	74.0	-29.04	Peak	332.40	100	Vertical	Pass
3**	12443.639	34.79	12.47	54.0	-19.21	AV	332.40	100	Vertical	Pass
4	14186.703	50.32	19.72	74.0	-23.68	Peak	359.50	100	Vertical	Pass
4**	14186.703	40.95	19.72	54.0	-13.05	AV	359.50	100	Vertical	Pass
5	14491.877	50.50	17.76	74.0	-23.50	Peak	120.30	100	Vertical	Pass
5**	14491.877	40.27	17.76	54.0	-13.73	AV	120.30	100	Vertical	Pass
6	17983.504	59.08	26.90	74.0	-14.92	Peak	19.50	100	Vertical	Pass
6**	17983.504	48.64	26.90	54.0	-5.36	AV	19.50	100	Vertical	Pass

BT 3M -Bandedge -Low channel- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.00.59

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

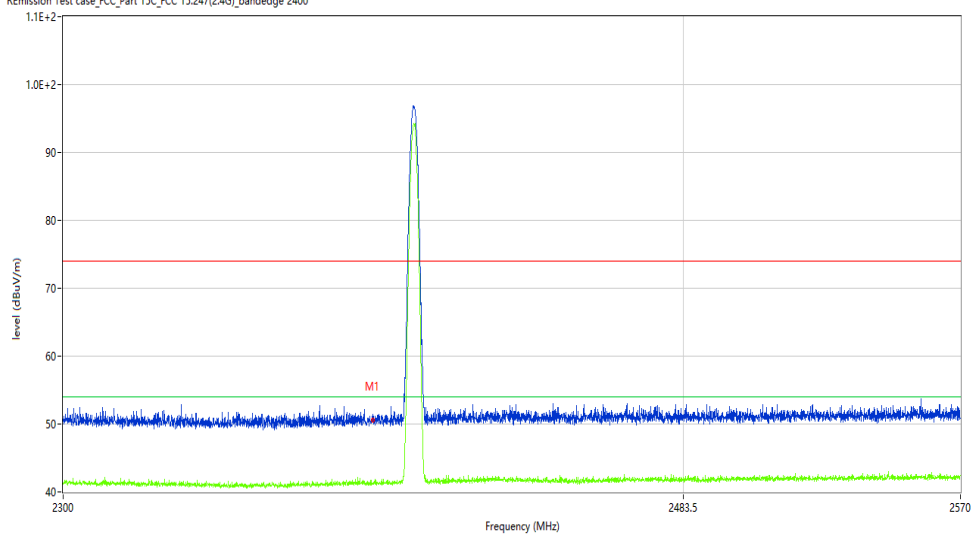

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.64	-9.96	74.0	-23.36	Peak	152.65	100	H	Pass
1**	2390.000	41.36	-9.96	54.0	-12.64	AV	152.65	100	H	Pass

BT 3M -Bandedge -Low channel- Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.40.43

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

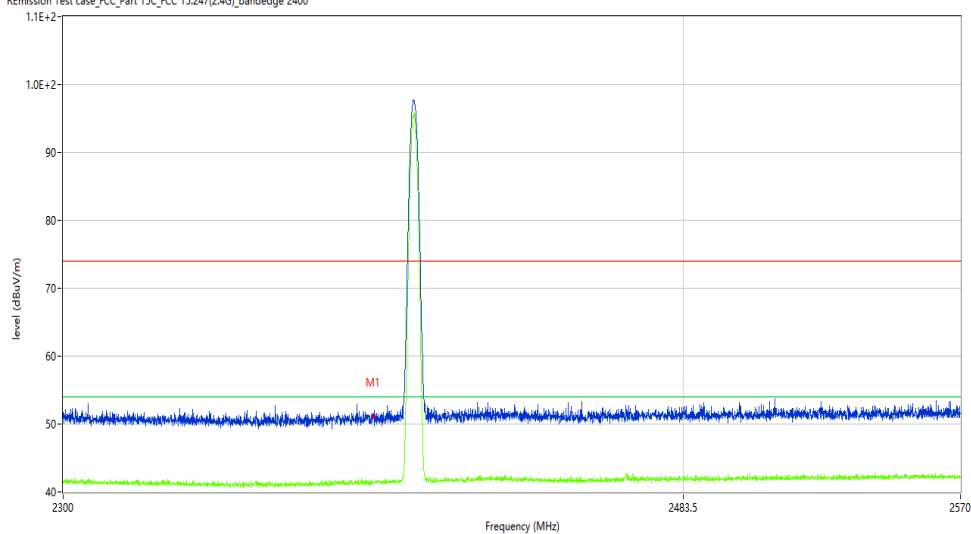

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.12	-9.96	74.0	-22.88	Peak	189.36	100	V	Pass
1**	2390.000	41.45	-9.96	54.0	-12.55	AV	189.36	100	V	Pass

BT 3M -Bandedge -High channel- Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_11.03.56

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

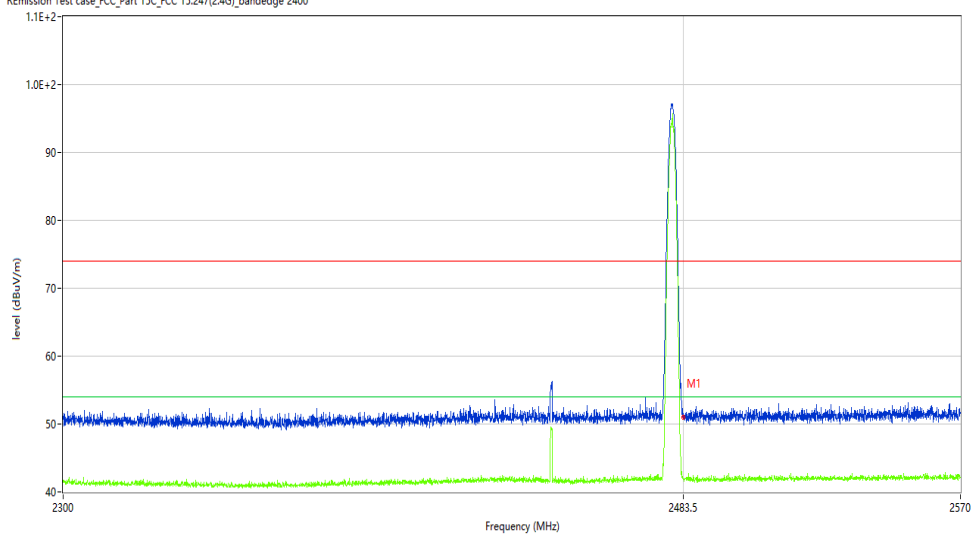

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.05	-9.51	74.0	-22.95	Peak	3.03	100	H	Pass
1**	2483.500	41.91	-9.51	54.0	-12.09	AV	3.03	100	H	Pass

BT 3M -Bandedge -High channel- Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.46.47

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

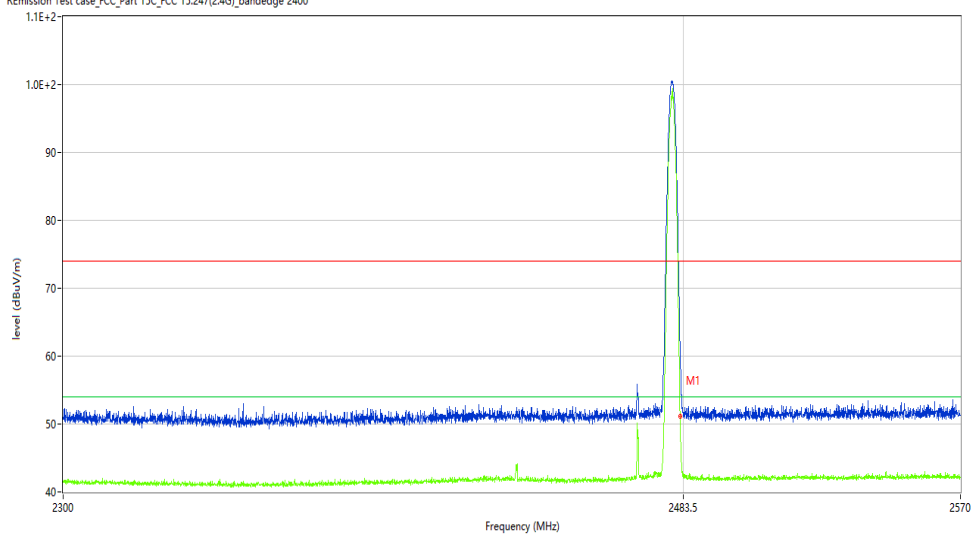

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.08	-9.51	74.0	-22.92	Peak	224.60	100	V	Pass
1**	2483.500	42.08	-9.51	54.0	-11.92	AV	224.60	100	V	Pass

30M-1G

BT 3M-Hopping-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2022-06-02_14.24.43

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23

Load: full load

Hum.: 54%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

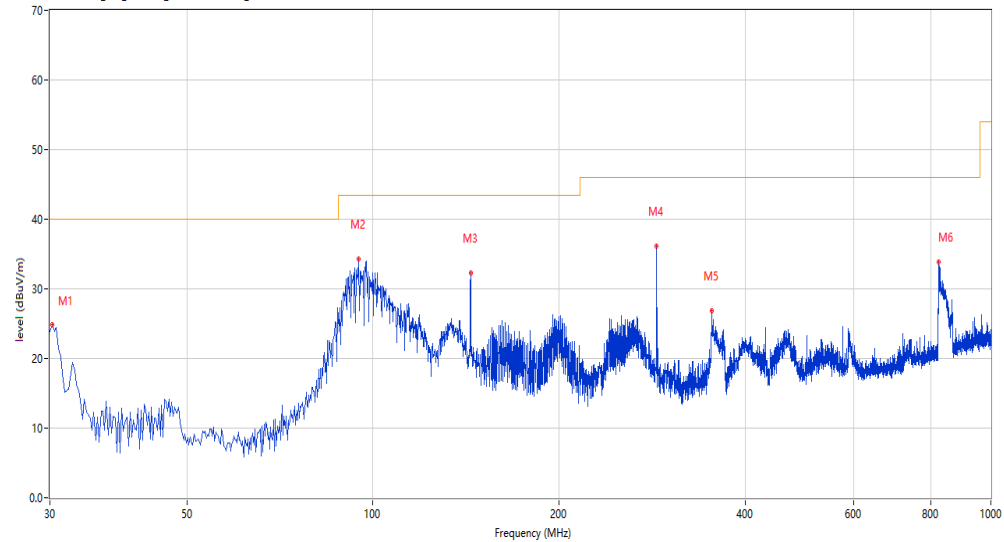

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.000	23.86	-29.82	40.0	-16.14	Peak	360.00	150	Horizontal	Pass
2	94.731	34.22	-27.43	43.5	-9.28	Peak	231.60	150	Horizontal	Pass
3	143.947	32.24	-30.00	43.5	-11.26	Peak	12.70	150	Horizontal	Pass
4	287.956	36.07	-24.10	46.0	-9.93	Peak	360.00	150	Horizontal	Pass
5	353.657	26.91	-21.89	46.0	-19.09	Peak	360.00	150	Horizontal	Pass
6	823.262	33.86	-11.84	46.0	-12.14	Peak	188.00	100	Horizontal	Pass

BT 3M-Hopping -Vertical-TX

Test result

Project Number: Certification

Test Time: 2022-06-02_13.31.57

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23

Load: full load

Hum.: 54%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

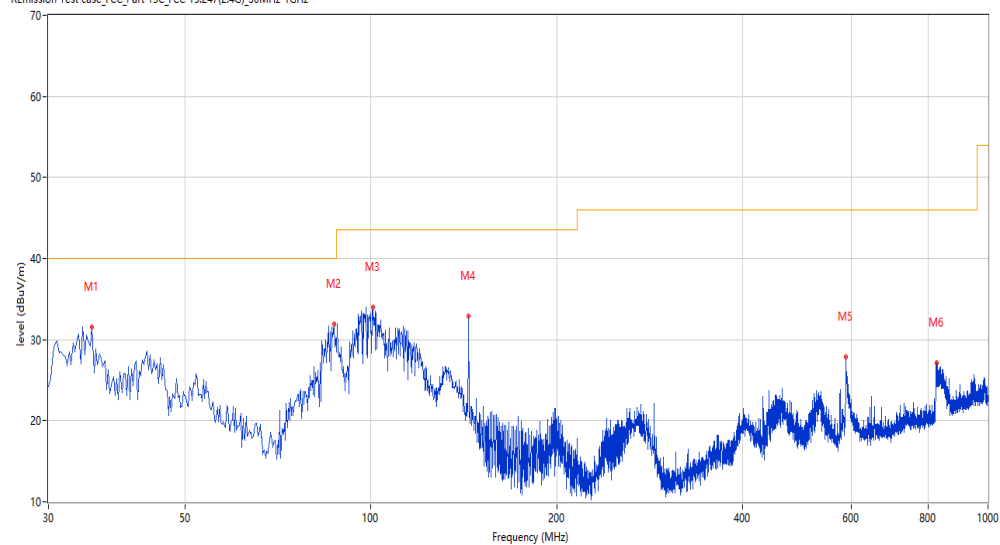

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.334	31.60	-27.95	40.0	-8.40	Peak	96.80	100	Vertical	Pass
2	87.216	31.88	-29.67	40.0	-8.12	Peak	83.90	200	Vertical	Pass
3	100.792	33.99	-26.62	43.5	-9.51	Peak	0.00	150	Vertical	Pass
4	143.947	32.90	-30.00	43.5	-10.60	Peak	330.20	100	Vertical	Pass
5	588.095	27.94	-15.90	46.0	-18.06	Peak	339.10	100	Vertical	Pass
6	826.413	27.19	-11.73	46.0	-18.81	Peak	137.60	150	Vertical	Pass

1-18G

BT 3M-Hopping -Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.02.10

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

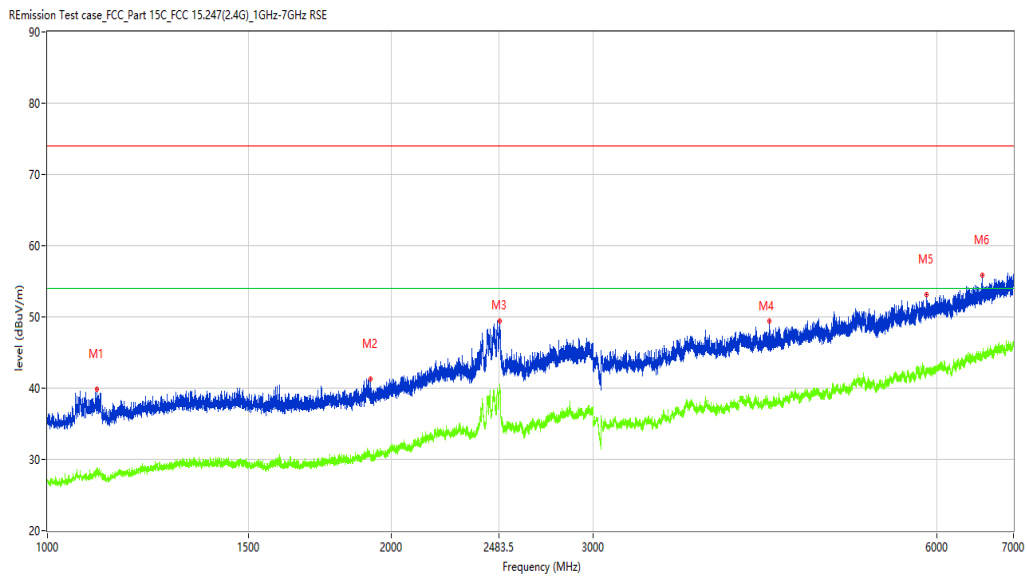

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1104.737	39.89	-14.15	74.0	-34.11	Peak	48.30	100	Horizontal	Pass
1**	1104.737	28.40	-14.15	54.0	-25.60	AV	48.30	100	Horizontal	Pass
2	1915.886	41.29	-11.61	74.0	-32.71	Peak	9.40	100	Horizontal	Pass
2**	1915.886	30.45	-11.61	54.0	-23.55	AV	9.40	100	Horizontal	Pass
3	2488.314	49.43	-1.88	74.0	-24.57	Peak	2.60	100	Horizontal	Pass
3**	2488.314	39.65	-1.88	54.0	-14.35	AV	2.60	100	Horizontal	Pass
4	4282.340	49.36	-1.45	74.0	-24.64	Peak	24.00	100	Horizontal	Pass
4**	4282.340	37.96	-1.45	54.0	-16.04	AV	24.00	100	Horizontal	Pass
5	5879.140	53.18	2.20	74.0	-20.82	Peak	294.90	100	Horizontal	Pass
5**	5879.140	42.31	2.20	54.0	-11.69	AV	294.90	100	Horizontal	Pass
6	6579.553	55.83	4.23	74.0	-18.17	Peak	57.90	100	Horizontal	Pass
6**	6579.553	44.63	4.23	54.0	-9.37	AV	57.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.16.47

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

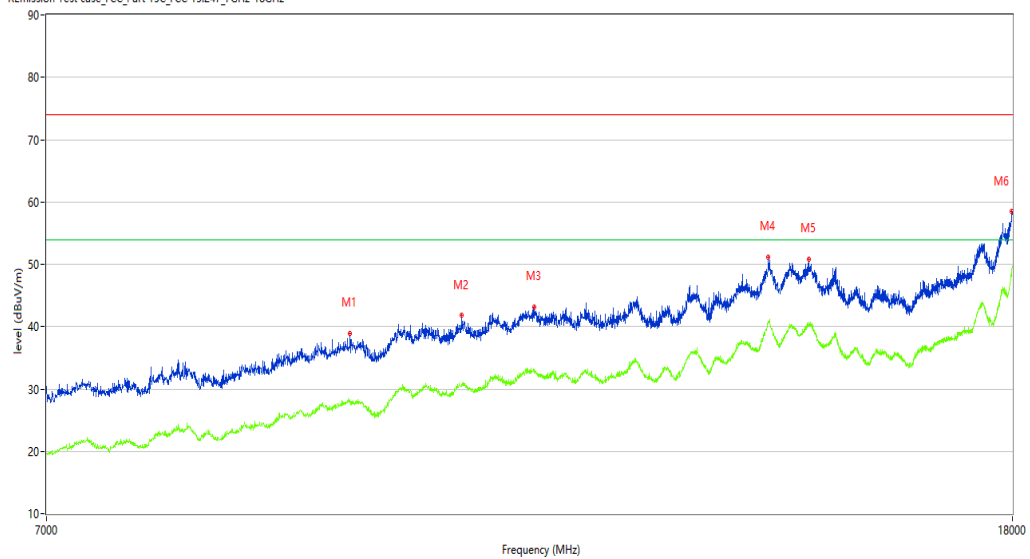

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9419.395	38.90	7.63	74.0	-35.10	Peak	61.10	100	Horizontal	Pass
1**	9419.395	27.98	7.63	54.0	-26.02	AV	61.10	100	Horizontal	Pass
2	10505.374	41.76	10.04	74.0	-32.24	Peak	318.60	100	Horizontal	Pass
2**	10505.374	30.61	10.04	54.0	-23.39	AV	318.60	100	Horizontal	Pass
3	11280.680	43.21	12.29	74.0	-30.79	Peak	89.40	100	Horizontal	Pass
3**	11280.680	32.58	12.29	54.0	-21.42	AV	89.40	100	Horizontal	Pass
4	14178.455	51.18	19.46	74.0	-22.82	Peak	212.20	100	Horizontal	Pass
4**	14178.455	40.75	19.46	54.0	-13.25	AV	212.20	100	Horizontal	Pass
5	14750.312	50.85	18.72	74.0	-23.15	Peak	157.10	100	Horizontal	Pass
5**	14750.312	40.19	18.72	54.0	-13.81	AV	157.10	100	Horizontal	Pass
6	17991.752	58.43	27.41	74.0	-15.57	Peak	93.90	100	Horizontal	Pass
6**	17991.752	49.13	27.41	54.0	-4.87	AV	93.90	100	Horizontal	Pass

BT 3M-Hopping -Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2022-06-01_09.54.46

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(24G)_1GHz-7GHz RSE

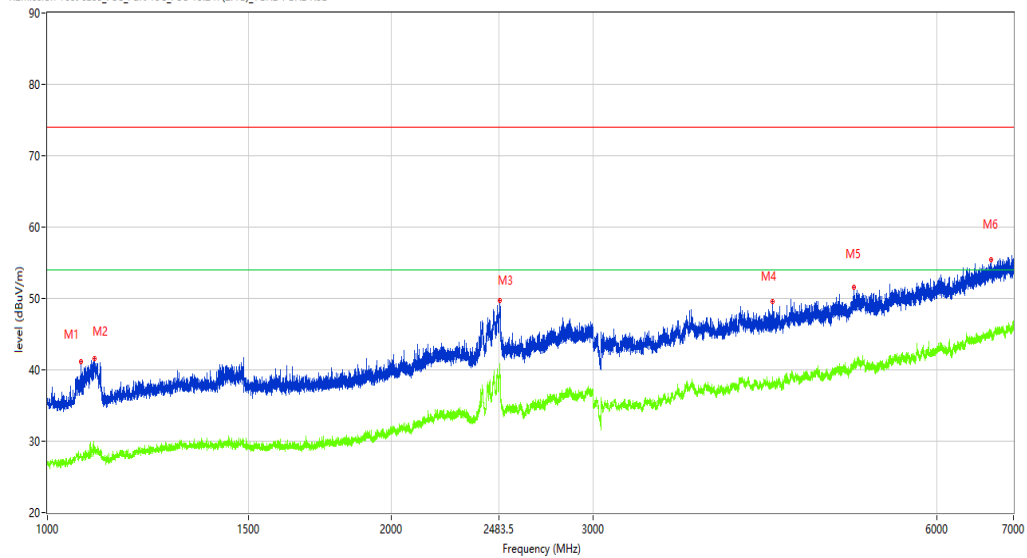

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1070.491	41.19	-14.24	74.0	-32.81	Peak	326.80	100	Vertical	Pass
1**	1070.491	27.94	-14.24	54.0	-26.06	AV	326.80	100	Vertical	Pass
2	1098.988	41.61	-14.21	74.0	-32.39	Peak	331.60	100	Vertical	Pass
2**	1098.988	28.69	-14.21	54.0	-25.31	AV	331.60	100	Vertical	Pass
3	2487.814	49.66	-1.88	74.0	-24.34	Peak	27.20	100	Vertical	Pass
3**	2487.814	39.79	-1.88	54.0	-14.21	AV	27.20	100	Vertical	Pass
4	4306.837	49.55	-1.40	74.0	-24.45	Peak	1.40	100	Vertical	Pass
4**	4306.837	38.31	-1.40	54.0	-15.69	AV	1.40	100	Vertical	Pass
5	5074.741	51.51	0.99	74.0	-22.49	Peak	89.50	100	Vertical	Pass
5**	5074.741	40.90	0.99	54.0	-13.10	AV	89.50	100	Vertical	Pass
6	6688.539	55.39	4.49	74.0	-18.61	Peak	6.90	100	Vertical	Pass
6**	6688.539	45.51	4.49	54.0	-8.49	AV	6.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-05-30_17.12.50

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 19.8

Hum.: 50%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

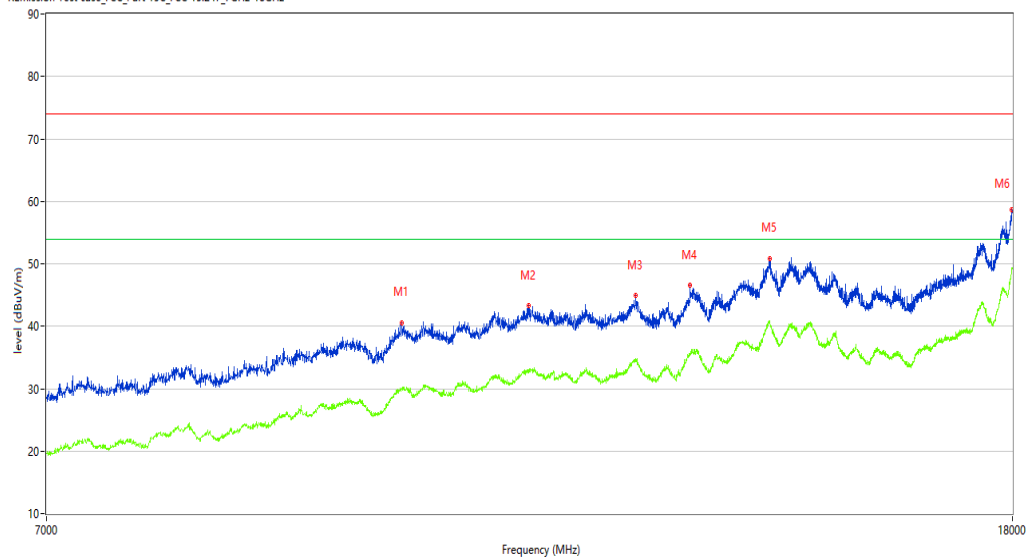

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9908.773	40.50	9.83	74.0	-33.50	Peak	352.80	100	Vertical	Pass
1**	9908.773	30.09	9.83	54.0	-23.91	AV	352.80	100	Vertical	Pass
2	11214.696	43.25	11.43	74.0	-30.75	Peak	67.40	100	Vertical	Pass
2**	11214.696	32.47	11.43	54.0	-21.53	AV	67.40	100	Vertical	Pass
3	12451.887	44.89	12.51	74.0	-29.11	Peak	62.60	100	Vertical	Pass
3**	12451.887	34.55	12.51	54.0	-19.45	AV	62.60	100	Vertical	Pass
4	13136.466	46.54	13.91	74.0	-27.46	Peak	116.50	100	Vertical	Pass
4**	13136.466	35.48	13.91	54.0	-18.52	AV	116.50	100	Vertical	Pass
5	14203.199	50.88	19.42	74.0	-23.12	Peak	255.70	100	Vertical	Pass
5**	14203.199	40.49	19.42	54.0	-13.51	AV	255.70	100	Vertical	Pass
6	17991.752	58.65	27.41	74.0	-15.35	Peak	265.00	100	Vertical	Pass
6**	17991.752	49.36	27.41	54.0	-4.64	AV	265.00	100	Vertical	Pass

BT 3M-Bandedge-Hopping- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.56.51

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

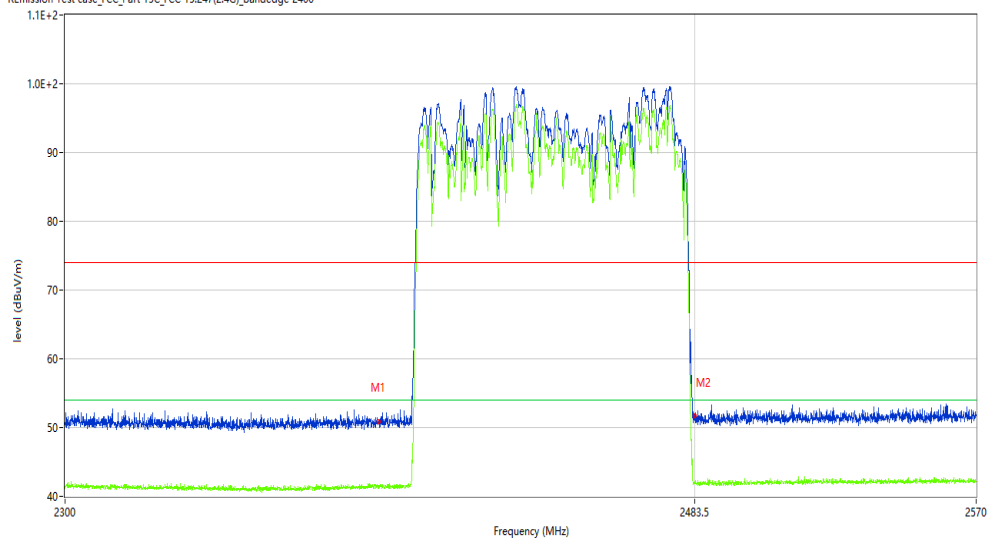

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.90	-9.96	74.0	-23.10	Peak	202.09	100	H	Pass
1**	2390.000	41.62	-9.96	54.0	-12.38	AV	202.09	100	H	Pass
2	2483.500	51.69	-9.51	74.0	-22.31	Peak	22.65	100	H	Pass
2**	2483.500	41.80	-9.51	54.0	-12.20	AV	22.65	100	H	Pass

BT 3M-Bandedge-Hopping-Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2022-06-01_10.50.47

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: full load

Hum.: 47%

Remark: DR-RSE01-H22020028-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

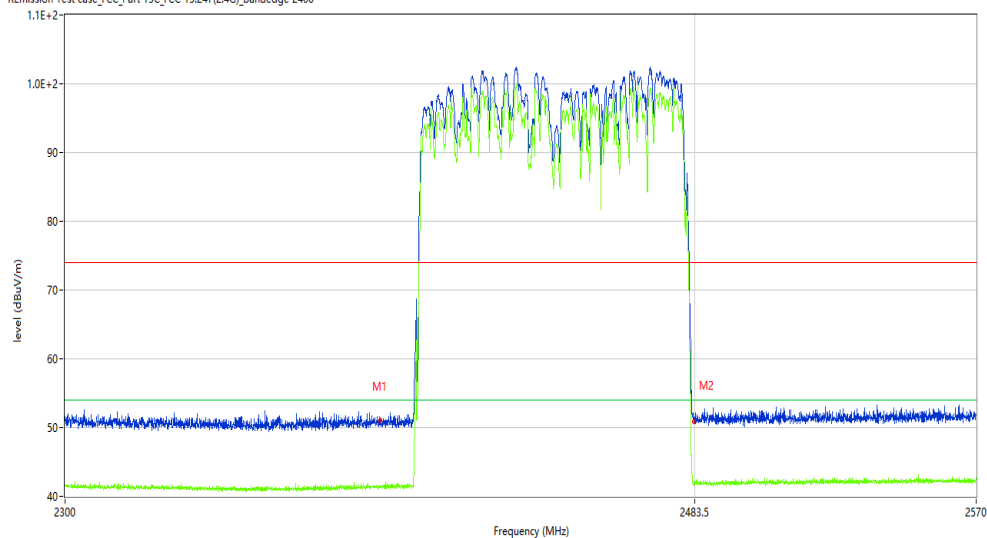

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.79	-9.96	74.0	-23.21	Peak	124.62	100	V	Pass
1**	2390.000	41.28	-9.96	54.0	-12.72	AV	124.62	100	V	Pass
2	2483.500	50.89	-9.51	74.0	-23.11	Peak	268.45	100	V	Pass
2**	2483.500	41.91	-9.51	54.0	-12.09	AV	268.45	100	V	Pass