



FCC 15B Report

FCC ID: 2ADD4-CR10iNG

FCC 47 CFR Part 15 Subpart B

Product : NETWORK SECURITY EQUIPMENT

Trade Name : CYBEROAM

Model Number : CR10iNG

Issued for

Cyberoam Technologies Pvt Ltd

CYBEROAM HOUSE, Sai Gulshan Complex, Beside White House, Gulbai Tekra
Road, Gulbai Tekra Road, Ahmedabad, India

Issued by

Shenzhen STONE Testing Technology Co., Ltd.

F/6, Bldg.12, Zhongxing Industrial City, Chuangye Rd.,
Nanshan District, Shenzhen, Guangdong, China

Tel.: +86-0755-26582862 Fax.: +86-0755-61673854

Website: www.stt-lab.org

*Note: This report shall not be reproduced except in full, without the written approval of Shenzhen STONE Testing Technology Co., Ltd.. This document may be altered or revised by Shenzhen STONE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document.
The test results in the report only apply to the tested sample.*

**TEST RESULT CERTIFICATION**

Product : NETWORK SECURITY EQUIPMENT
Applicant : Cyberoam Technologies Pvt Ltd
Address : CYBEROAM HOUSE, Sai Gulshan Complex, Beside White
House, Gulbai Tekra Road, Gulbai Tekra Road, Ahmedabad, India
Manufacturer : HAXUN TECHNOLOGY CO., LTD
Address : A702 Huangjia Commercial Plaza, Minzhi Avenue, Longhua
Town, BaoAn District, Shenzhen, Guangdong, 518131, China
Model No. : CR10iNG
Standards : FCC Part 15 Subpart B
Test Method : ANSI C63.4: 2003

The above equipment has been tested by Shenzhen STONE Testing Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Test

Date of receipt of test item 2014-09-22

Date(s) of performance of test 2014-09-22 to 2014-10-15

Test Result : Pass

Testing by	:	<u>Linna Liu</u>	Date	:	<u>2014-10-15</u>
		(Linna Liu)			
Check by	:	<u>Andy Huang</u>	Date	:	<u>2014-10-16</u>
		(Andy Huang)			
Approved by	:	<u>Ethan Chen</u>	Date	:	<u>2014-10-17</u>
		(Ethan Chen)			



Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 DESCRIPTION OF TEST SETUP	8
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
3 . CONDUCTED EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)	10
3.2 TEST PROCEDURE	10
3.3 TEST SETUP	11
3.4 TEST INSTRUMENTS	11
3.5 EUT OPERATING CONDITIONS	11
3.6 TEST RESULTS	12
4 . RADIATED EMISSION MEASUREMENT	16
4.1 RADIATED EMISSION LIMIT	16
4.2 TEST PROCEDURE	17
4.3 TEST SETUP	17
4.4 TEST INSTRUMENTS	18
4.5 EUT OPERATING CONDITIONS	18
4.6 TEST RESULTS	19



1. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part 15 B			
Emission			
Standard Section	Test Item	Judgement	Remark
FCC Part 15B 15.107	Conducted Emission	PASS	Class B
FCC Part 15B 15.109	Radiated Emissions	PASS	Class B

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) The test results of this report relate only to the tested sample(s) identified in this report.



1.1 TEST FACILITY

Shenzhen STONE Testing Technology Co., Ltd.

Add. : F/6, Bldg.12, Zhongxing Industrial City, Chuangye Rd., Nanshan District, Shenzhen, Guangdong, China

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

FCC Registration No.: 323508

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Emission :

The measurement uncertainty is evaluated as ± 3.2 dB.

B. Radiated Measurement :

The measurement uncertainty is evaluated as ± 3.7 dB.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	NETWORK SECURITY EQUIPMENTR
Model Name	CR10iNG
Additional Model Number(s)	N/A
Model Difference	N/A
Power Source	DC power from AC/DC Adapter
Power Rating	AC/DC Adapter: Input: AC 120~240V 50/60 Hz Output: DC12V, 4A,48W
Remark	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Note:

- (1) This Test Report is for compliance FCC Part 15 Subpart B, for compliance FCC Part 15 Subpart C, please refer to the Radio test reports.



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	AC Charging Mode with Normal Mode
Mode 2	WiFi Link Mode

For Conducted Test	
Final Test Mode	Description
Mode 1	AC Charging Mode with Normal Mode
Mode 2	WiFi Link Mode


For Radiated Test (Below 1GHz)	
Final Test Mode	Description
Mode 1	AC Charging Mode with Normal Mode
Mode 2	WiFi Link Mode
For Radiated Test (Above 1GHz)	
Mode 2	WiFi Link Mode

Note:

- (1) After the preliminary scan, the final test was executed the worst condition and test data were recorded in this report.


2.3 DESCRIPTION OF TEST SETUP

Conducted Emission

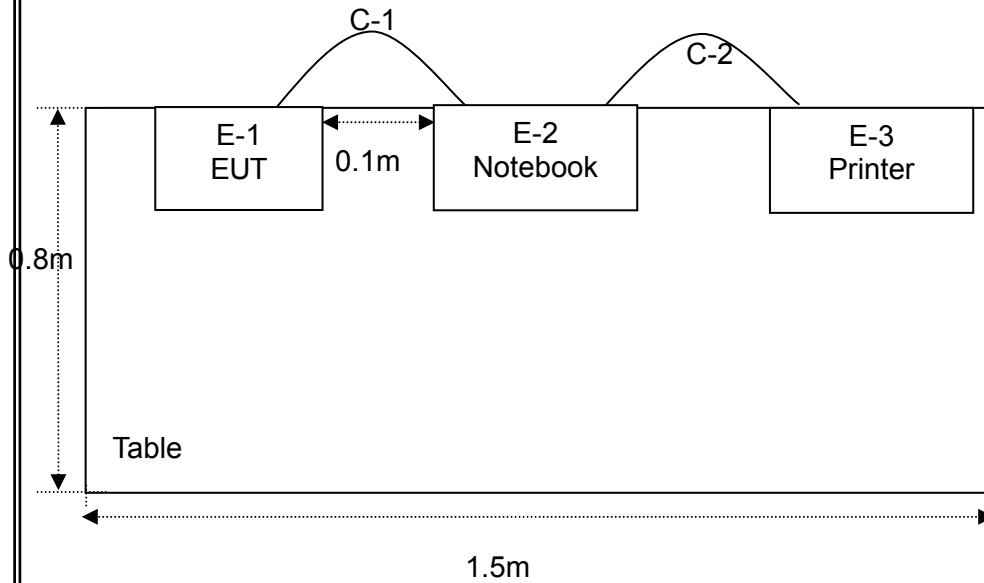

Radiated Emission

USB Charging and Loading Data

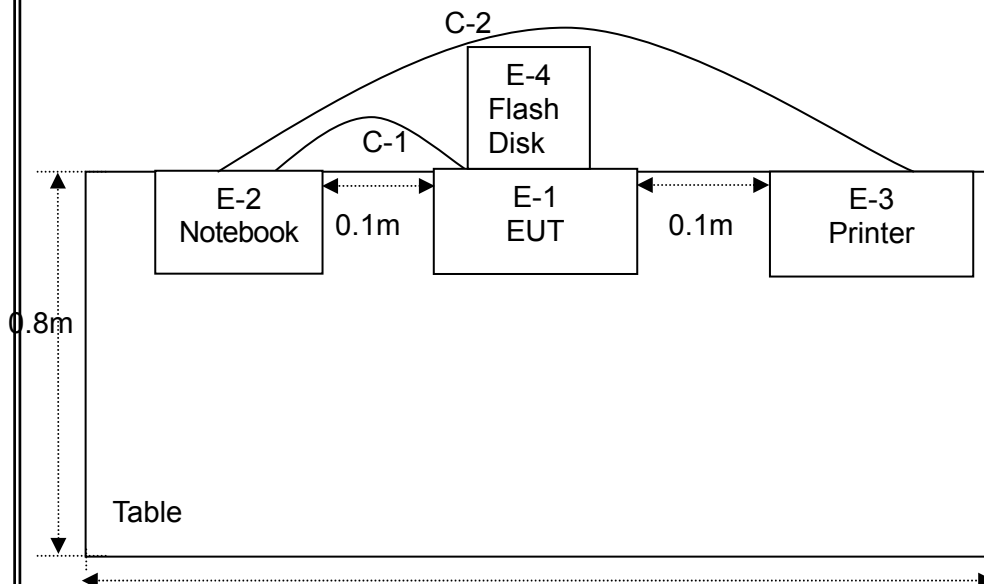



2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	NETWORK SECURITY EQUIPMENT	/	CR10iNG	N/A	EUT
E-2	Notebook	N/A	8.3R	N/A	
E-3	Printer	HP	5015N	N/A	
E-4	Flash Disk	Kinston	2GB	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.5m	USB Cable
C-2	YES	NO	1.5m	USB Cable

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.



3. CONDUCTED EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)

CLASS B LIMIT		
FREQUENCY (MHz)	Quasi-peak	Average
	dBuV	dBuV
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

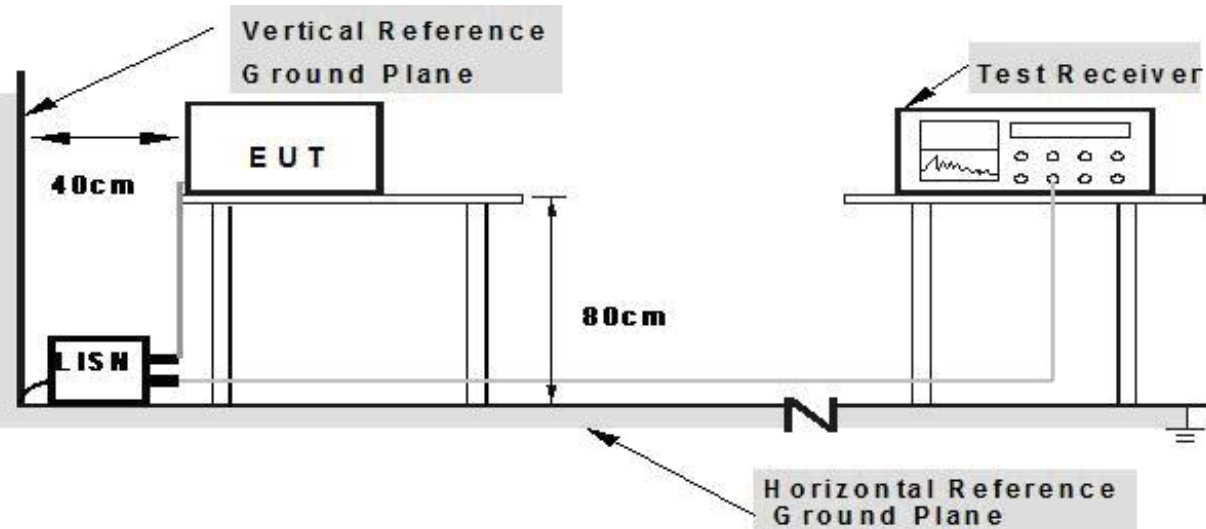

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
LISN	R&S	NSLK81	8126466	Jul. 06, 2014	Jul. 05. 2015	1 year
LISN	R&S	NSLK81	8126487	Dec. 25, 2013	Dec. 24, 2014	1 year
50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 06, 2014	Jul. 05. 2015	1 year
Test Cable	N/A	C01	N/A	Jul. 06, 2014	Jul. 05. 2015	1 year
Test Cable	N/A	C02	N/A	Jul. 06, 2014	Jul. 05. 2015	1 year
Test Cable	N/A	C03	N/A	Jul. 06, 2014	Jul. 05. 2015	1 year
EMI Test Receiver	R&S	ESCI	1166.595	Jul. 06, 2014	Jul. 05. 2015	1 year
Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 06, 2014	Jul. 05. 2015	1 year

3.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.6 TEST RESULTS

EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10iNG
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 1	Phase :	Line
Test Voltage :	120V/ 60Hz		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1685	44.98	10.12	55.10	65.03	-9.93	QP	
2		0.1685	27.72	10.12	37.84	55.03	-17.19	AVG	
3		0.5500	32.66	10.02	42.68	56.00	-13.32	QP	
4		0.5500	23.28	10.02	33.30	46.00	-12.70	AVG	
5		0.6500	33.56	10.02	43.58	56.00	-12.42	QP	
6		0.6500	25.51	10.02	35.53	46.00	-10.47	AVG	
7		3.4180	26.11	10.06	36.17	56.00	-19.83	QP	
8		3.4180	18.95	10.06	29.01	46.00	-16.99	AVG	
9		7.1540	37.29	10.07	47.36	60.00	-12.64	QP	
10	*	7.1540	31.17	10.07	41.24	50.00	-8.76	AVG	
11		25.6620	32.01	10.07	42.08	60.00	-17.92	QP	
12		25.6620	26.80	10.07	36.87	50.00	-13.13	AVG	

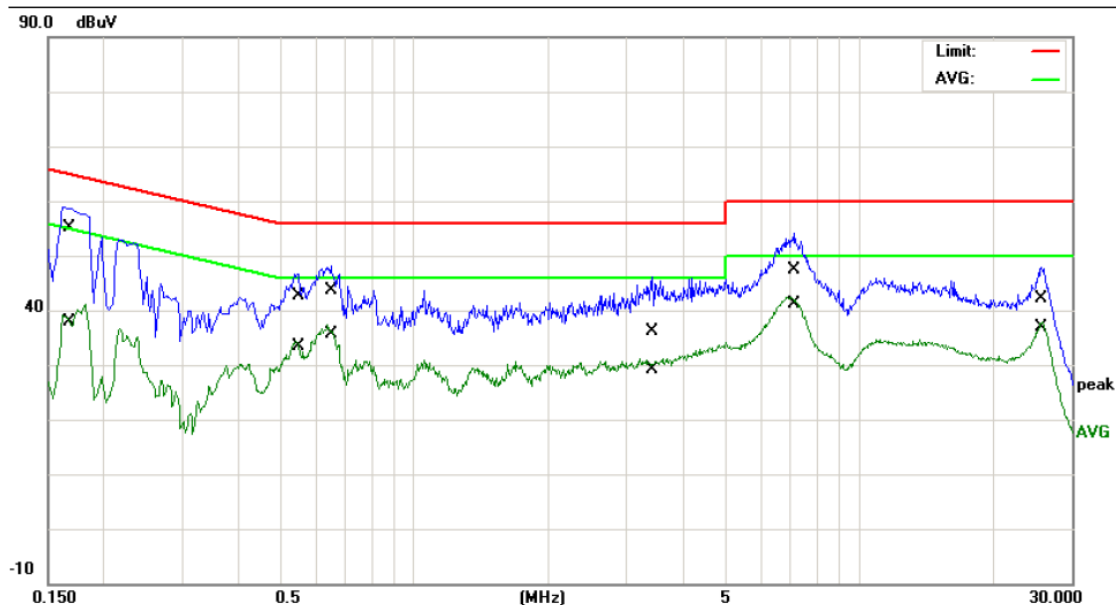



EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10iNG
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 1	Phase :	Neutral
Test Voltage :	120V/ 60Hz		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1580	40.03	9.94	49.97	65.57	-15.60	QP	
2		0.1580	26.10	9.94	36.04	55.57	-19.53	AVG	
3		0.2340	35.24	10.02	45.26	62.31	-17.05	QP	
4		0.2340	25.28	10.02	35.30	52.31	-17.01	AVG	
5		0.6820	36.16	10.11	46.27	56.00	-9.73	QP	
6	*	0.6820	29.68	10.11	39.79	46.00	-6.21	AVG	
7		3.0420	28.96	10.03	38.99	56.00	-17.01	QP	
8		3.0420	23.27	10.03	33.30	46.00	-12.70	AVG	
9		7.1300	37.51	10.06	47.57	60.00	-12.43	QP	
10		7.1300	31.02	10.06	41.08	50.00	-8.92	AVG	
11		25.8340	32.97	10.18	43.15	60.00	-16.85	QP	
12		25.8340	28.08	10.18	38.26	50.00	-11.74	AVG	

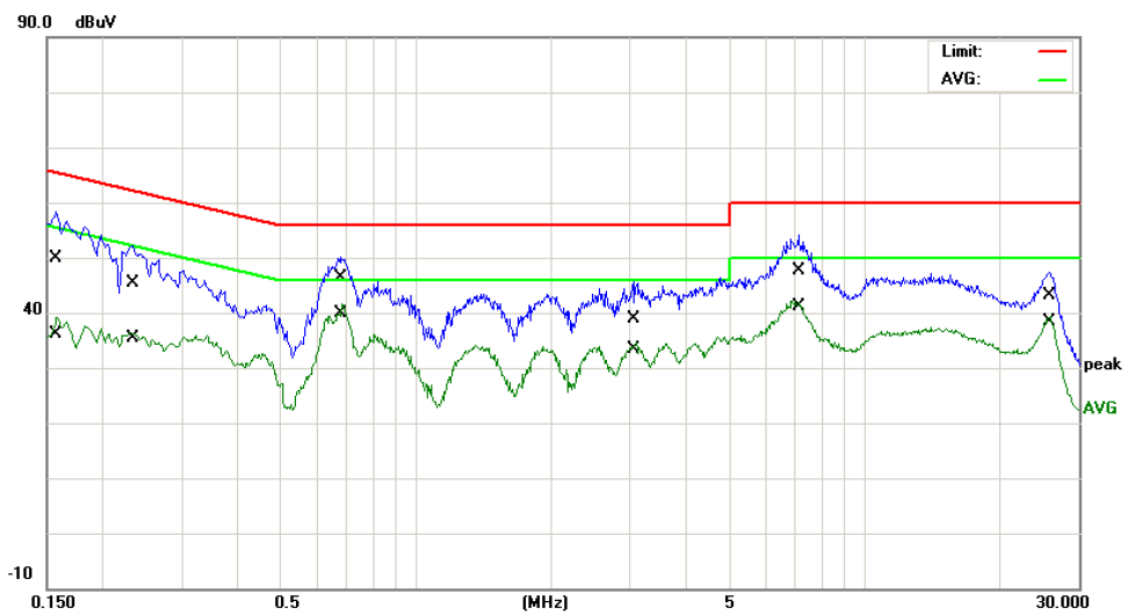



EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10ING
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 2	Phase :	Line
Test Voltage :	120V/ 60Hz		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1548	39.25	10.12	49.37	65.74	-16.37	QP	
2		0.1548	23.98	10.12	34.10	55.74	-21.64	AVG	
3		0.1980	37.15	10.12	47.27	63.69	-16.42	QP	
4		0.1980	23.92	10.12	34.04	53.69	-19.65	AVG	
5		0.6740	35.44	10.02	45.46	56.00	-10.54	QP	
6	*	0.6740	28.60	10.02	38.62	46.00	-7.38	AVG	
7		3.5860	29.93	10.06	39.99	56.00	-16.01	QP	
8		3.5860	24.18	10.06	34.24	46.00	-11.76	AVG	
9		6.8100	37.55	10.06	47.61	60.00	-12.39	QP	
10		6.8100	31.21	10.06	41.27	50.00	-8.73	AVG	
11		25.7060	34.08	10.07	44.15	60.00	-15.85	QP	
12		25.7060	28.94	10.07	39.01	50.00	-10.99	AVG	

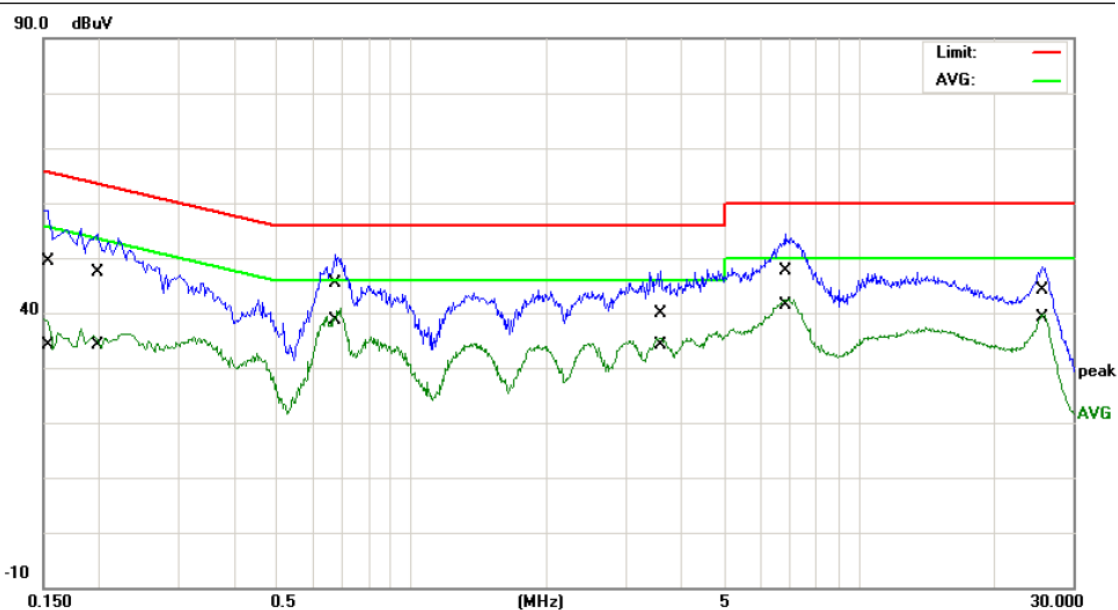



EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10ING
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 2	Phase :	Neutral
Test Voltage :	120V/ 60Hz		

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1540	0.86	10.12	10.98	65.78	-54.80	QP	
2		0.1540	-3.62	10.12	6.50	55.78	-49.28	AVG	
3		0.2220	36.19	10.11	46.30	62.74	-16.44	QP	
4		0.2220	8.66	10.11	18.77	52.74	-33.97	AVG	
5		0.6380	34.11	10.02	44.13	56.00	-11.87	QP	
6		0.6380	26.34	10.02	36.36	46.00	-9.64	AVG	
7		3.4500	26.20	10.06	36.26	56.00	-19.74	QP	
8		3.4500	19.36	10.06	29.42	46.00	-16.58	AVG	
9		7.2260	36.79	10.07	46.86	60.00	-13.14	QP	
10	*	7.2260	30.68	10.07	40.75	50.00	-9.25	AVG	
11		25.8340	32.17	10.08	42.25	60.00	-17.75	QP	
12		25.8340	26.89	10.08	36.97	50.00	-13.03	AVG	

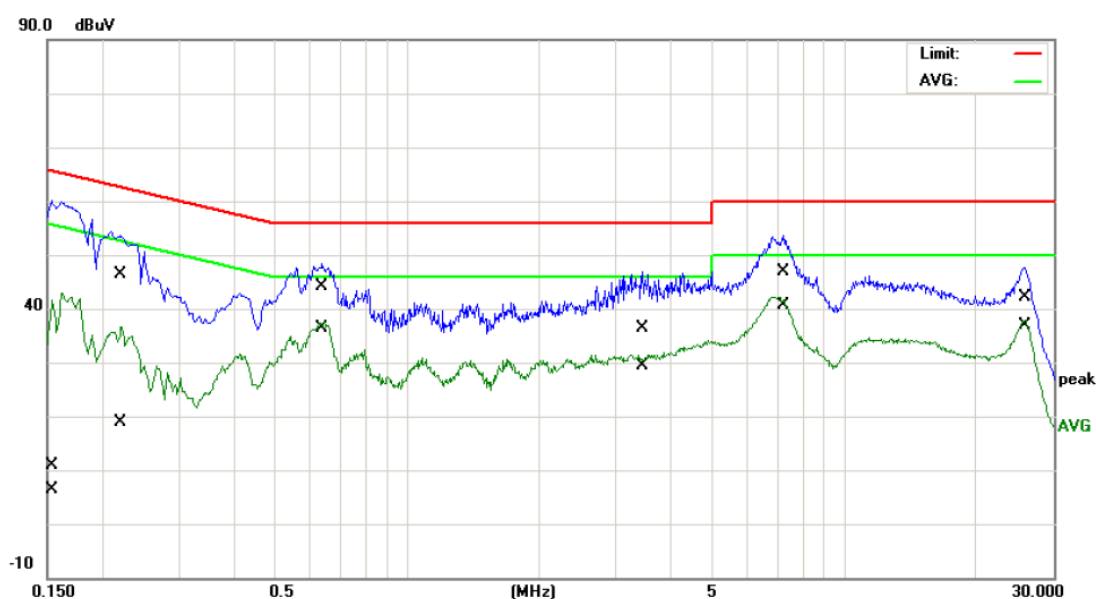



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMIT

RADIATED EMISSION LIMITS (Bellow 1GHz)

CLASS B LIMIT		
FREQUENCY (MHz)	Field Strength (dBuV/m)	Measurement Distance (meters)
30 -88	40	3
88 -216	43.5	
216~960	46	
Above 960	54	

RADIATED EMISSION LIMITS (Above 1GHz)

FREQUENCY (MHz)	Class A (dBuV/m)(at 3 M)		Class B (dBuV/m)(at 3 M)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission Level(dBuV/m)=20log Emission Level(uV/m)
- (4) Peak detector limit is corresponding to 20 dB above the maximum permitted average limit.

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or in which the device operated or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.75	30
1.75-108	1000
108-500	2000
500-1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

The following table is the setting of the spectrum

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB/ VB (emission in restricted band)	1MHz/ 3 MHz for Peak, 1MHz/ 10Hz for Average

4.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested.


And performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

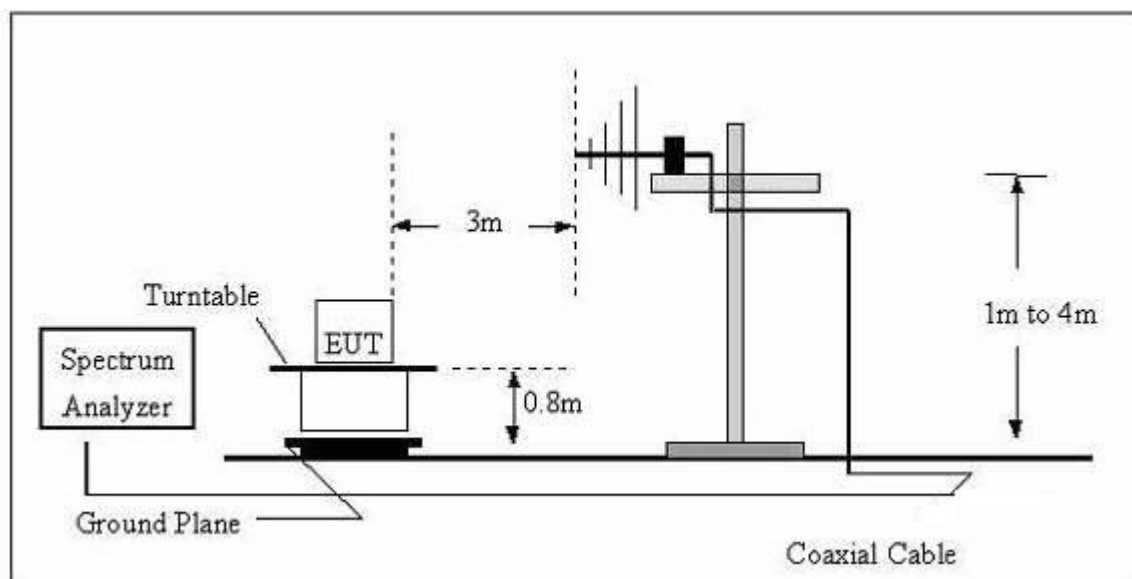

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

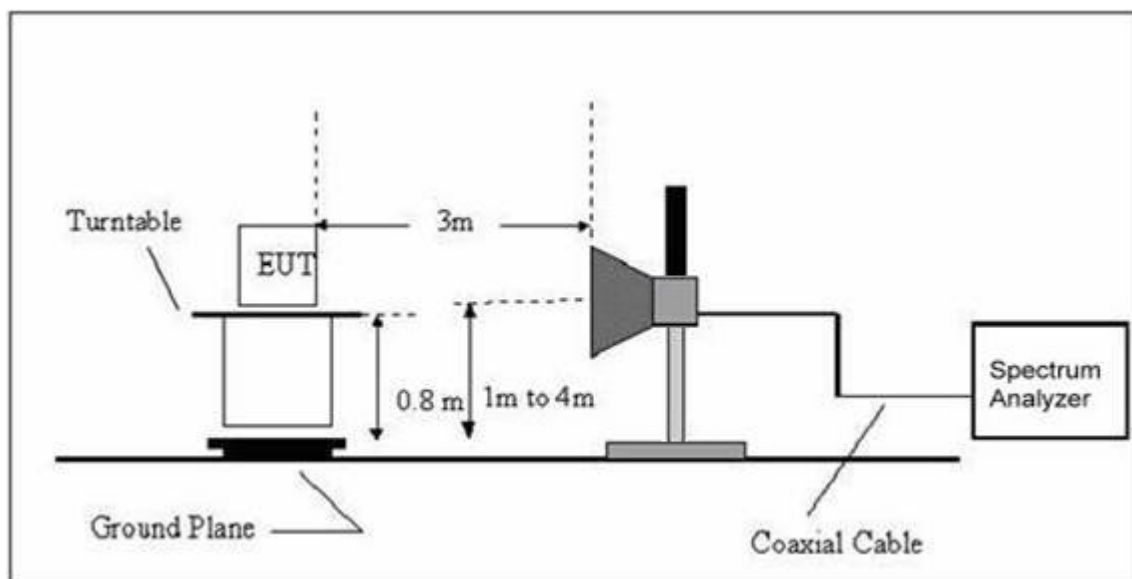

4.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Broadband Antenna	R&S	VULB 9168	VULB 9168-456	Jul. 06, 2014	Jul. 05. 2015	1 year
Test Cable	N/A	R-01	N/A	Dec. 25, 2013	Dec. 24, 2014	1 year
Test Cable	N/A	R-02	N/A	Dec. 25, 2013	Dec. 24, 2014	1 year
EMI Test Receiver	R&S	ESCI	101324	Jul. 06, 2014	Jul. 05. 2015	1 year
Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
Turn Table	EM	SC100	060531	N/A	N/A	N/A
50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 06, 2014	Jul. 05. 2015	1 year
Spectrum Analyzer	R&S	FSP40	100154	Jul. 06, 2014	Jul. 05. 2015	1 year
Horn Antenna	R&S	HF906	10029	Jul. 06, 2014	Jul. 05. 2015	1 year
Amplifier	EM	EM-30180	060538	Jul. 06, 2014	Jul. 05. 2015	1 year

4.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.



4.6 TEST RESULTS

4.6.1 TEST RESULTS (Bellow 1GHz)

EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10ING
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	AC 120V/60 Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		81.2116	52.61	-23.21	29.40	40.00	-10.60	peak	
2		117.3602	53.86	-22.34	31.52	43.50	-11.98	peak	
3		185.7880	55.53	-20.76	34.77	43.50	-8.73	peak	
4	*	372.0045	57.29	-14.48	42.81	46.00	-3.19	peak	
5	!	556.7744	50.64	-10.12	40.52	46.00	-5.48	peak	
6	!	903.3093	46.30	-5.02	41.28	46.00	-4.72	peak	

Remark:

Factor = Antenna Factor + Cable Loss.



EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10ING
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	AC 120V/60 Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		116.5400	52.05	-22.29	29.76	43.50	-13.74	peak	
2		185.7880	53.83	-20.76	33.07	43.50	-10.43	peak	
3	!	372.0045	55.01	-14.48	40.53	46.00	-5.47	peak	
4		483.9094	51.61	-11.63	39.98	46.00	-6.02	peak	
5	*	556.7744	52.41	-10.12	42.29	46.00	-3.71	peak	
6	!	903.3093	45.76	-5.02	40.74	46.00	-5.26	peak	

Remark:

Factor = Antenna Factor + Cable Loss.



EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10ING
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 2	Polarization :	Horizontal
Test Power :	AC 120V/60 Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		117.3602	53.86	-22.34	31.52	43.50	-11.98	peak	
2		185.7880	55.53	-20.76	34.77	43.50	-8.73	peak	
3	!	372.0045	56.29	-14.48	41.81	46.00	-4.19	peak	
4	!	483.9094	52.49	-11.63	40.86	46.00	-5.14	peak	
5	*	556.7744	52.64	-10.12	42.52	46.00	-3.48	peak	
6	!	903.3093	47.30	-5.02	42.28	46.00	-3.72	peak	

Remark:

Factor = Antenna Factor + Cable Loss.



EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10ING
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 2	Polarization :	Vertical
Test Power :	AC 120V/60 Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		116.5401	52.05	-22.29	29.76	43.50	-13.74	peak	
2		185.7882	53.83	-20.76	33.07	43.50	-10.43	peak	
3	*	372.0045	56.51	-14.48	42.03	46.00	-3.97	peak	
4		483.9094	51.61	-11.63	39.98	46.00	-6.02	peak	
5	!	556.7744	51.41	-10.12	41.29	46.00	-4.71	peak	
6	!	903.3093	45.26	-5.02	40.24	46.00	-5.76	peak	

Remark:

Factor = Antenna Factor + Cable Loss.



4.6.2 TEST RESULTS (Above 1GHz)

EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10ING
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 2	Polarization :	Horizontal
Test Power :	AC 120V/60 Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1965.320	43.30	5.65	48.95	74.00	-25.05	peak	
2	*	1965.320	36.96	5.65	42.61	54.00	-11.39	AVG	

Remark:

Factor = Antenna Factor + Cable Loss.



EUT :	NETWORK SECURITY EQUIPMENT	Model Name. :	CR10ING
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2014-09-30
Test Mode :	Mode 2	Polarization :	Vertical
Test Power :	AC 120V/60 Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1965.320	39.66	7.59	47.25	74.00	-26.75	peak	
2	*	1965.320	34.47	7.59	42.06	54.00	-11.94	AVG	

Remark:

Factor = Antenna Factor + Cable Loss.