HAC T-Coil Test Report

For

Applicant Name:	**UNNECTO HOLDING LIMITED**
Address:	13/F HARBOUR COMMERCIAL BUILDING 122-124 CONNAUGHT ROAD CENTRAL SHEUNG WAN HK
EUT Name:	Mobile Phone
Brand Name:	unnecto™
Model Name:	Bolt 1U

Issued By

Company Name:	**BTF Testing Lab (Shenzhen) Co., Ltd.**
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Report Number:	BTF250630R00602
Test Standards:	ANSI C63.19-2019 FCC 47 CFR §20.19 KDB 285076 D01 KDB 285076 D02 KDB 285076 D03
FCC ID:	2ADR3UB01U
Test Conclusion:	Pass
Test Date:	2025-08-13 to 2025-10-14
Date of Issue:	2025-10-21
Tested By:	Kris Li / Tester
Date:	2025-10-21
Reviewed By:	Amenda Zhong / Project Engineer
Date:	2025-10-21
Approved By:	Ryan.CJ / EMC Manager
Date:	2025-10-21

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2025-10-21	Original
Note:	*Once the revision has been made, then previous versions reports are invalid.*	

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Table of Contents

1. Introduction 4
1.1 Identification of Testing Laboratory 4
1.2 Identification of the Responsible Testing Location 4
1.3 Laboratory Condition 4
1.4 Announcement 4
2. Product Information 5
2.1 Application Information 5
2.2 Manufacturer Information 5
2.3 Factory Information 5
2.4 General Description of Equipment under Test (EUT) 5
2.5 Equipment under Test Ancillary Equipment 5
2.6 Technical Information 5
2.7 Equipment under Test (EUT) Description 6
2.8 Air Interfaces / Bands Indicating Operating Modes 7
3. Summary of Test Results 8
3.1 Test Standards 8
3.2 Attestation of Testing Summary 8
4. Test Uncertainty 9
5. Measurement System 10
5.1 Definition of Hearing Aid Compatibility (HAC) 10
5.2 MVG HAC System 11
5.3 T-Coil Measurement Set-up 14
5.4 System Calibration 15
6. HAC (T-Coil) Measurement 16
6.1 T-Coil Performance Requirements 16
6.2 T-Coil measurement points and reference plane 19
6.3 Test procedure for T-Coil signal—preferred 20
7. T-Coil Test Result 23
8. Test Equipment List 25
ANNEX A System Validation Result 26
ANNEX B Test Data 27
ANNEX C Test Setup Photo 33
ANNEX D EUT External & Internal Photos 33
ANNEX E Calibration Information 33

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
FCC Registration Number	518915
Designation Number	CN1409

1.3 Laboratory Condition

Ambient Temperature:	21℃ to 25℃
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

(1) The test report reference to the report template version v0.

(2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.

(3) The test report is invalid if there is any evidence and/or falsification.

(4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.

(5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

(6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

2. Product Information

2.1 Application Information

Company Name:	UNNECTO HOLDING LIMITED
Address:	13/F HARBOUR COMMERCIAL BUILDING 122-124 CONNAUGHT ROAD CENTRAL SHEUNG WAN HK

2.2 Manufacturer Information

Company Name:	Shenzhen Water World Information Co., LTD
Address:	3rd Floor, Building 3, Dexinchang Smart Park, No. 23, Heping Road, Qinghua Community, Longhua Sub-district, Longhua District, Shenzhen City.

2.3 Factory Information

Company Name:	Shenzhen Water World Information Co., LTD
Address:	3rd Floor, Building 3, Dexinchang Smart Park, No. 23, Heping Road, Qinghua Community, Longhua Sub-district, Longhua District, Shenzhen City.

2.4 General Description of Equipment under Test (EUT)

EUT Name	Mobile Phone
Under Test Model Name	Bolt 1U
Sample No.	BTFSN250630008

2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Battery	
	Capacity	4000mAh
	Rated Voltage	3.85V

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 850/1900 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network FDD LTE Band 2/4/5/12/13/17/25/26/66/71 TDD LTE Band 38/41 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) BT (EDR+BLE)

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

2.7 Equipment under Test (EUT) Description

Operating Mode	GSM, WCDMA, LTE, WLAN, Bluetooth,	
Frequency Range	GSM 850	824 MHz ~ 849 MHz
	GSM 1900	1850 MHz ~ 1910 MHz
	WCDMA Band 2	1850 MHz ~ 1910 MHz
	WCDMA Band 4	1710 MHz ~ 1755 MHz
	WCDMA Band 5	824 MHz ~ 849 MHz
	LTE Band 2	1850 MHz ~ 1910 MHz
	LTE Band 4	1710 MHz ~ 1755 MHz
	LTE Band 5	824 MHz ~ 849 MHz
	LTE Band 12	699 MHz ~ 716 MHz
	LTE Band 13	777 MHz ~ 787 MHz
	LTE Band 17	704 MHz ~ 716 MHz
	LTE Band 25	1850 MHz ~ 1915 MHz
	LTE Band 26 part 90	814.7 MHz ~ 823.3 MHz
	LTE Band 26 part 22	824.7 MHz ~ 848.3 MHz
	LTE Band 38	2570 MHz ~ 2620 MHz
	LTE Band 41	2496 MHz ~ 2690 MHz
	LTE Band 66	1710 MHz ~ 1780 MHz
	LTE Band 71	663 MHz ~ 698 MHz
	802.11a /802.11n(HT20/40) /802.11ac(HT20/40/80)	U-NII-1: 5180 MHz ~ 5240 MHz, U-NII-2A: 5260 MHz ~ 5320 MHz, U-NII-2C: 5500 MHz ~ 5700 MHz, U-NII-3: 5745 MHz ~ 5825 MHz
	Bluetooth	2402 ~ 2480 MHz
Modulation Mode	GSM/GPRS: GMSK EDGE: 8PSK WCDMA: QPSK, 16QAM LTE: QPSK, 16QAM, 64QAM 802.11b: DSSS 802.11a/g: OFDM 802.11n-HT20/HT40: OFDM 802.11ac-VHT20/40/80/160: OFDM BR+EDR: GFSK, π/4-DQPSK, 8-DPSK Bluetooth LE: GFSK	

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

2.8 Air Interfaces / Bands Indicating Operating Modes

Air Interface	Band	Type	C63.19 RFAIL Tested	Simultaneous Transmitt er	Name of Service	Power Reduction
GSM	850	VO	Yes	WLAN & BT	CMRS Voice	No
	1900	VO	Yes	WLAN & BT	CMRS Voice	No
	GPRS/EGPRS	DT	No	N/A	N/A	No
WCDMA	Band II	VO	Yes	WLAN & BT	CMRS Voice	No
	Band IV	VO	Yes	WLAN & BT	CMRS Voice	No
	Band V	VO	Yes	WLAN & BT	CMRS Voice	No
	HSPA	DT	No	N/A	N/A	No
LTE	Band 2	VD	Yes	WLAN & BT	VoLTE	No
	Band 4	VD	Yes	WLAN & BT	VoLTE	No
	Band 5	VD	Yes	WLAN & BT	VoLTE	No
	Band 12	VD	Yes	WLAN & BT	VoLTE	No
	Band 13	VD	Yes	WLAN & BT	VoLTE	No
	Band 17	VD	Yes	WLAN & BT	VoLTE	No
	Band 25	VD	Yes	WLAN & BT	VoLTE	No
	Band 26 part 90	VD	Yes	WLAN & BT	VoLTE	No
	Band 26 part 22	VD	Yes	WLAN & BT	VoLTE	No
	Band 38	VD	Yes	WLAN & BT	VoLTE	No
	Band 41	VD	Yes	WLAN & BT	VoLTE	No
	Band 66	VD	Yes	WLAN & BT	VoLTE	No
	Band 71	VD	Yes	WLAN & BT	VoLTE	No
WLAN	2.4g&5g	DT	No	WWAN	N/A	No
BT	2450	DT	No	WWAN	N/A	No

NA: Not Applicable
VO: Voice Only
VD: CMRS and IP Voice Service over Digital Transport
DT: Digital Transport Only

Note1:The air interface max power plus MIF is complies with ANSI63.19-2019 Table 4.1 RFAIPL
Note2: According to ANSI C63.19 2019-version, for the air interface technology of a device is exempt from testing whose peak antenna input power, averaged over intervals ≤50 μs, is ≤23 dBm.
Note3:The hearing aid compatibility mode of the prototype was turned on during testing, and all tests were performed in HAC mode.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	ANSI C63.19-2019	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids
2	FCC 47 CFR §20.19	Hearing Aid Compatible Mobile Headsets
3	KDB 285076 D01	HAC Guidance v06r04
4	KDB 285076 D02	T-coil testing for CMRS IP v04
5	KDB 285076 D03	HAC FAQ v01r06

3.2 Attestation of Testing Summary

Frequency Band	Frequency Response	result
GSM 850	Pass	Pass
GSM 1900	Pass	Pass
WCDMA II	Pass	Pass
WCDMA IV	Pass	Pass
WCDMA V	Pass	Pass
LTE Band 2	Pass	Pass
LTE Band 4	Pass	Pass
LTE Band 5	Pass	Pass
LTE Band 12	Pass	Pass
LTE Band 13	Pass	Pass
LTE Band 17	Pass	Pass
LTE Band 25	Pass	Pass
LTE Band 26 part 90	Pass	Pass
LTE Band 26 part 22	Pass	Pass
LTE Band 38	Pass	Pass
LTE Band 41	Pass	Pass
LTE Band 66	Pass	Pass
LTE Band 71	Pass	Pass

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

4. Test Uncertainty

UNCERTAINTY EVALUATION FOR AUDIO HAC MEASUREMENT					
Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Uncertainty (dB)	Uncertainty (%)
Measurement System					
RF reflections	0.1	R	√3	0.06	
Acoustic noise	0.1	R	√3	0.06	
Probe coil sensitivity	0.49	R	√3	0.28	
Reference signal level	0.25	R	√3	0.14	
Positioning accuracy	0.4	R	√3	0.23	
Cable loss	0.1	N	2	0.05	
Frequency analyzer	0.15	R	√3	0.09	
System repeatability	0.2	N	1	0.20	
Repeatability of the WD	0.4	N	1	0.40	
Combined Standard Uncertainty		N	1	0.61	
Expanded uncertainty (confidence level of 95%,k = 2)		N	K=2	1.22	15.05
REPORTED Expanded uncertainty (confidence level of 95%, k = 2)		N	K=2	1.20	15.00

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

5. Measurement System

5.1 Definition of Hearing Aid Compatibility (HAC)

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:

a) Radio frequency (RF) measurements of the near-field electric and magnetic fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.

b) Magnetic field measurements of a WD emitted via the audio transducer associated with the T-coil mode of the hearing aid, for assessment of hearing aid performance.

c) Measurements with the hearing aid and a simulation of the categorized WD T-coil emissions to assess the hearing aid RF immunity in the T-coil mode.

The WD radio frequency (RF) and audio band emissions are measured. Hence, the following are measurements made for the WD:

a) RF E-Field emissions

b) T-coil mode, magnetic signal strength in the audio band

c) T-coil mode, magnetic signal and noise articulation index

d) T-coil mode, magnetic signal frequency response through the audio band

Corresponding to the WD measurements, the hearing aid is measured for:

a) RF immunity in microphone mode

b) RF immunity in T-coil mode

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

5.2 MVG HAC System

MVG HAC System Diagram

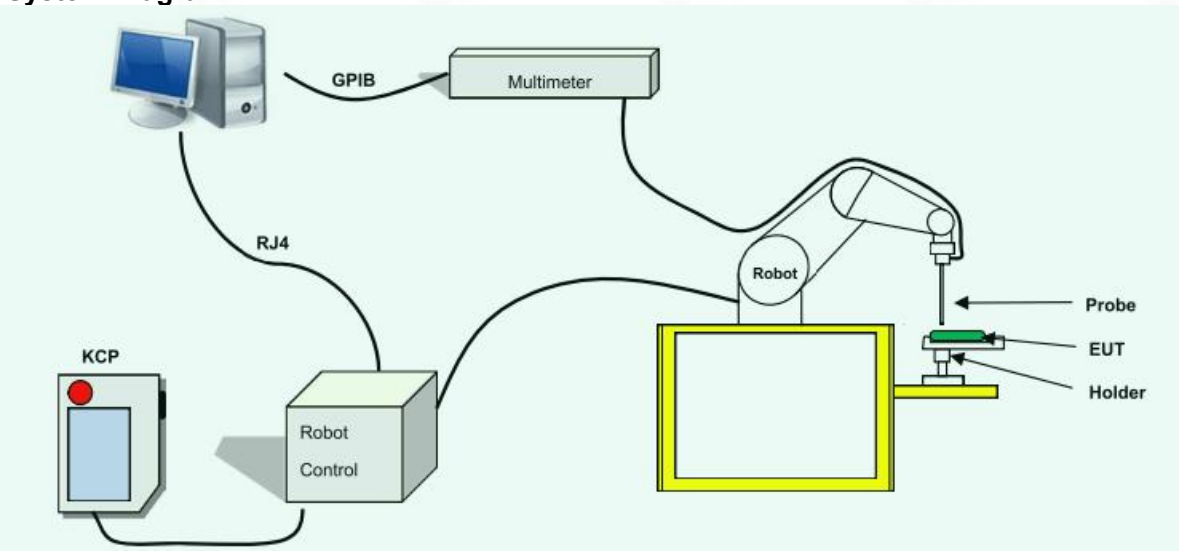

5.2.1 Robot

A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System
· It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
· Must be able to set the probe orthogonal of the surface of the phantom (±30°).
· Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

5.2.2 T-coil Probe

Figure 1 – *MVG COMOHAC T-coil Probe*

Coil Dimension	6.55 mm length * 2.29 mm diameter
DC resistance	860.6 Ω
Wire size	51AWG
Inductance at 1 kHz	132.1 mH at 1 kHz

Device Under Test	
Device Type	COMOHAC T-COIL PROBE
Manufacturer	MVG
Model	STCOIL
Serial Number	SN 07/17 TCP38
Product Condition (new / used)	New
Frequency Range of Probe	200-5000 Hz

This probe is designed to fulfill ANSI recommendations for the measurement of audio frequency magnetic fields radiated by mobile phones. The T-Coil probe has two connectors:

the 6 male wires connector enables to fix the probe on the robot
the BNC connector enables to link the probe to the audio DAQ

This probe was designed for a 6-axis robot. The coil is oriented with a 45 degree angle so that used with a 6-axis robot, both radial and axial measurements can be performed with one probe.

5.2.3 TMFS

MVG COMOHAC Magnetic Simulator

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Device Under Test	
Device Type	COMOHAC Magnetic Field Simulator
Manufacturer	MVG
Model	STMFS
Serial Number	SN 13/22 TMFS30
Product Condition (new / used)	New
Frequency Range	200-5000 Hz

All methods used to perform the measurements and calibrations comply with the ANSI C63.19. All measurements were performed with the TMFS in the standard device test configuration, with the TMFS in free space, 10 mm below the coil center.

5.2.4 Device Holder/DUT positioner

	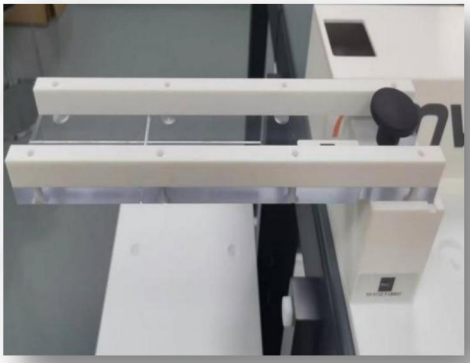
DUT Holder	DUT Positioner

During test, use DUT positioner to check if the Speaker is aligned with the positioner center.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

5.3 T-Coil Measurement Set-up

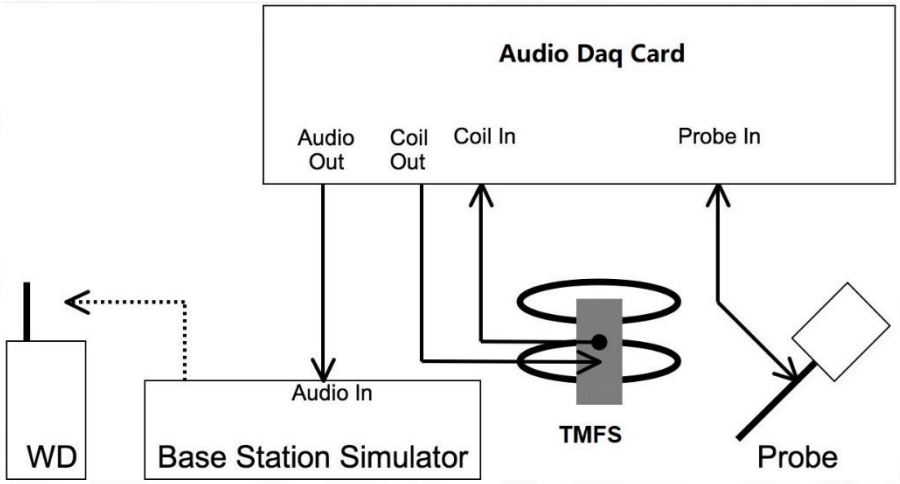

Fig. 2. T-coil signal measurement test setup

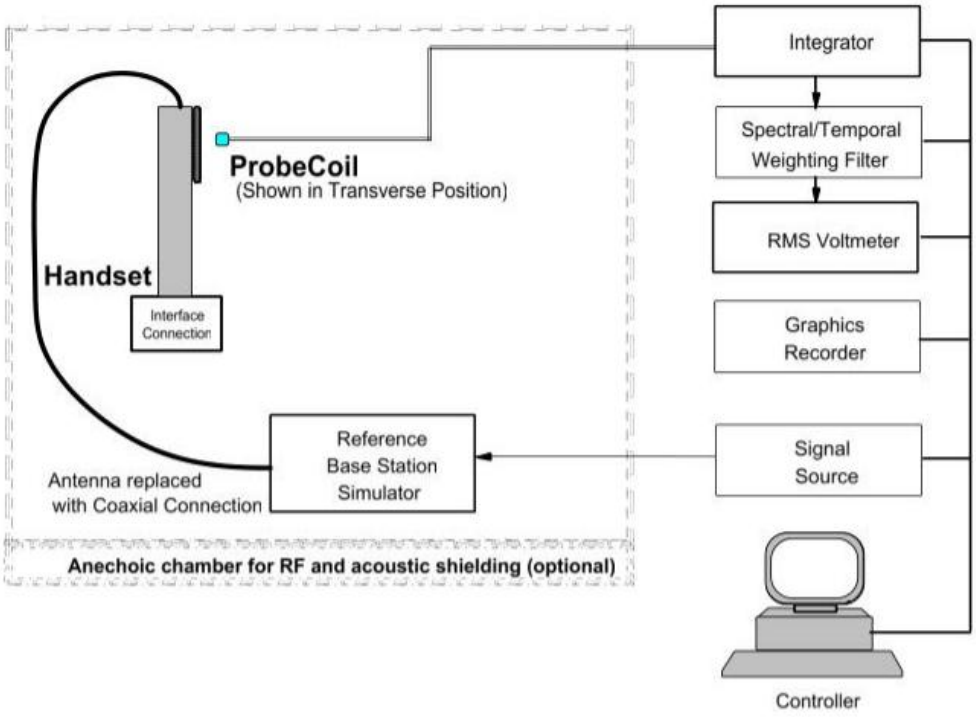

Note：

1. The setup assumes that the proper reference input level to the base station simulator or phone interface as specified in ANSI C63.19-2019 section 6.4.3.2 has already been determined.
2. The receive audio signal for the WD may be injected into the base station simulator, which transmits it to the WD while the WD is on a call. An alternative method is to use the WD manufacturer's test mode, if available. If a manufacturer's test mode is used, it is up to the tester to show that the signal is equivalent to the reference input level into a base station simulator as specified in ANSI C63.19-2019 Table 6.1.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

5.4 System Calibration

For correct and calibrated measurement of the voltages and ABM field, Denso will perform a calibration job as below.

for cable loss calibration:

a) Use Audio Generator to determine the loss between Audio Generator and TMFS

b) Audio output power to TMFS: 1025Hz, 500mV.

c) adjust the audio signal output power to check the cable loss, and use front panel of Multimeter to show target level: 1025Hz, 500mW. (for example, set the audio output power to TMFS: 1025Hz, 0.5924V)

for system verification:

a) Place TMFS properly—the distance between the center of TMFS and T-coil probe is 10mm.

b) send the signal to TMFS, and use probe to measure the ABM1 over the TMFS.

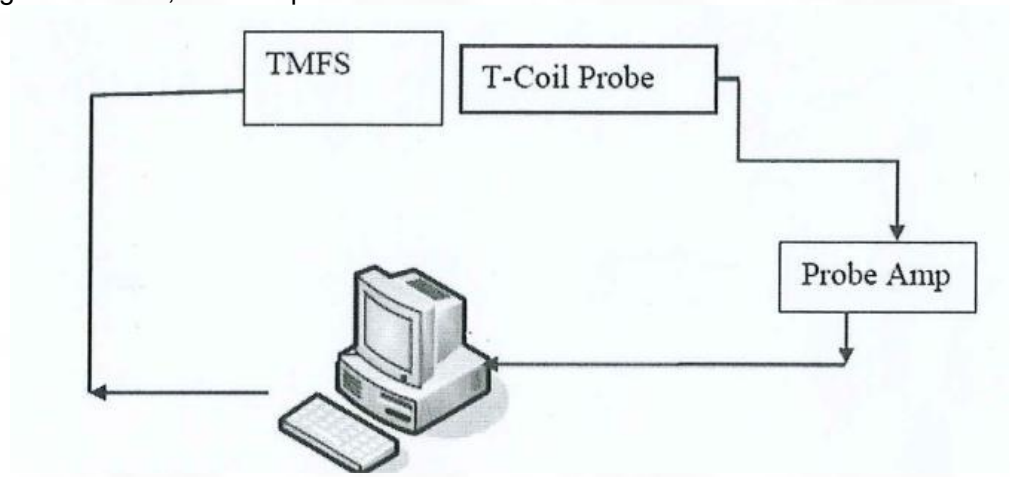

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

6. HAC (T-Coil) Measurement

6.1 T-Coil Performance Requirements

In order to be rated for T-Coil use, a WD shall meet the requirements for signal level and signal quality contained in this part.

1) T-Coil coupling field intensity
When measured as specified in this standard, there arc two groups of qualifying measurement points:

Primary group: A qualifying measurement point shall have its T-Coil signal, desired ABM signal, >-18 dB(A/m) at I kHz, in a 1/3 octave band filter. These measurements shall be made with the WD operating at a reference input level as specified in Table 6.1. Simultaneously, the qualifying measurement point shall have its weighted magnetic noise, undesired ABM field <-38 dB(A/m).

Secondary group: A qualifying measurement point shall have its weighted magnetic noise, undesired ABM field <-38 dB(A/m). This group inherently includes all the members of the primary group.

These levels arc designed to be compatible with hearing aids that produce the same acoustic output level for either an acoustic input level of 65 dB SPL or a magnetic input level of-25 dB(A/m) (56.2 mA/m)39 at either 1.0 kHz or 1.6 kHz. The hearing aid operational measurements are performed per ANSI S3.22-2014.

2) Frequency response
The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. Figure 1 and Figure 2 provide the boundaries for the specified frequency.
These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

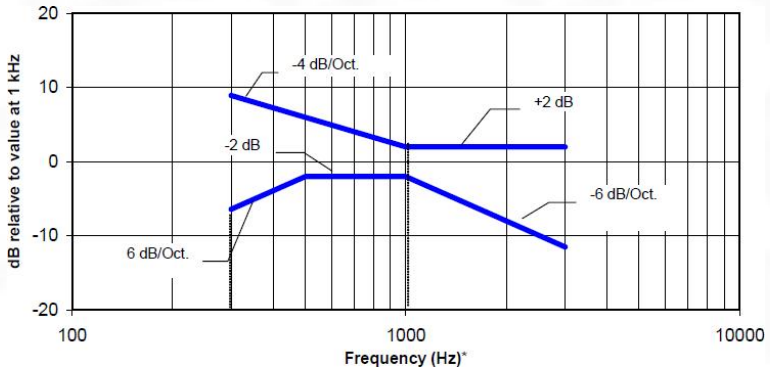

Magnetic field frequency response for WDs with a field ≤ –15 dB (A/m) at 1 kHz

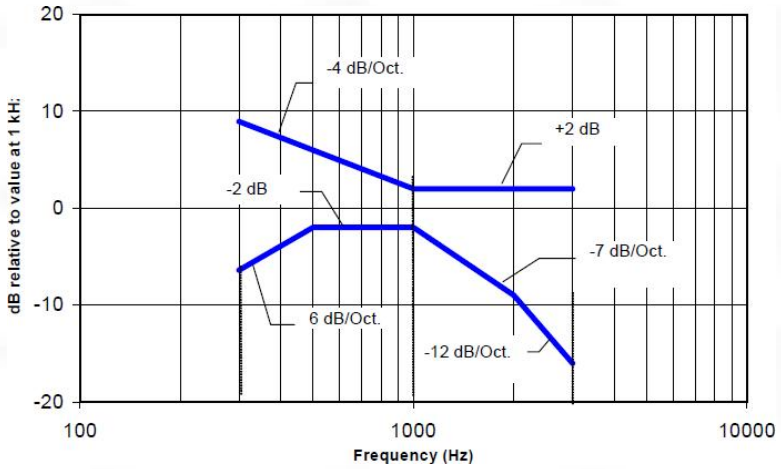

Magnetic field frequency response for WDs with a field that exceeds –15dB(A/m) at 1 kHz

3) Desired ABM signal, undesired ABM field qualification requirements

<Non-2G GSM operating modes>

The goal of this requirement is to ensure an adequate area where desired ABM signal is sufficiently strong to be heard clearly and a larger area where undesired ABM field is sufficiently low as to avoid undue annoyance. Qualifying measurement points shall fulfill the requirements of ANSI 63.19-2019 section 6.6.2; both the primary and secondary group requirements shall be met:

__ The primary group shall include at least 75 measurement points.
__ The secondary group shall include at least 300 contiguous measurement points.

Additionally, to avoid an oddly shaped area of low noise,the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying points and at least one transverse row containing at least 15 contiguous qualifying points.

Figure 6.6 is an example of a qualifying scan. The total number of primary group qualifying measurement points is 161, which is ≥75.The total number of secondary group qualifying points is 536,which is ≥300.

The secondary group has a longitudinal column of 26,which is ≥10,and a transverse row also of 26 contiguous points, which is≥15.

<2G GSM operating modes>

If the 2G GSM operating mode(s) are selected for qualification, the qualifying measurement points shall fulfil the requirements of 6.6.2; both the primary and secondary group requirements shall be met:

__ The primary group shall include at least 25 measurement points.
__ The secondary group shall include at least 125 contiguous measurement points.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

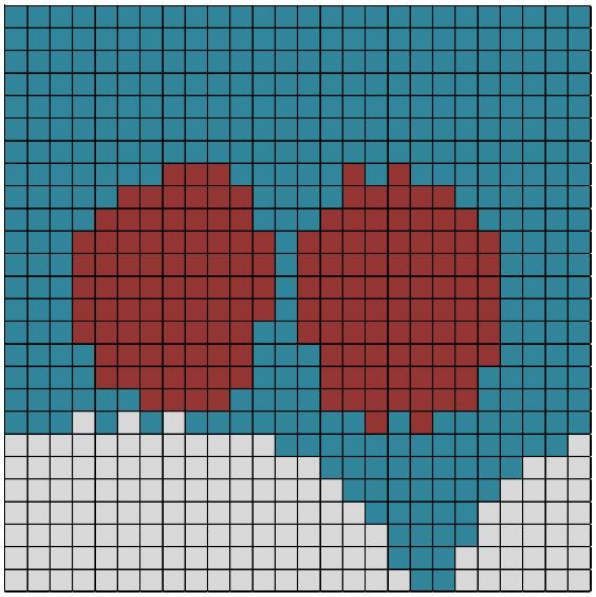

Red (primary group): AB desired ABM signal M1 ≥−18 dB(A/m) and undesired ABM field ≤−38 dB(A/m)
Blue and red (secondary group): undesired ABM field ≤−38 dB(A/m)

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

6.2 T-Coil measurement points and reference plane

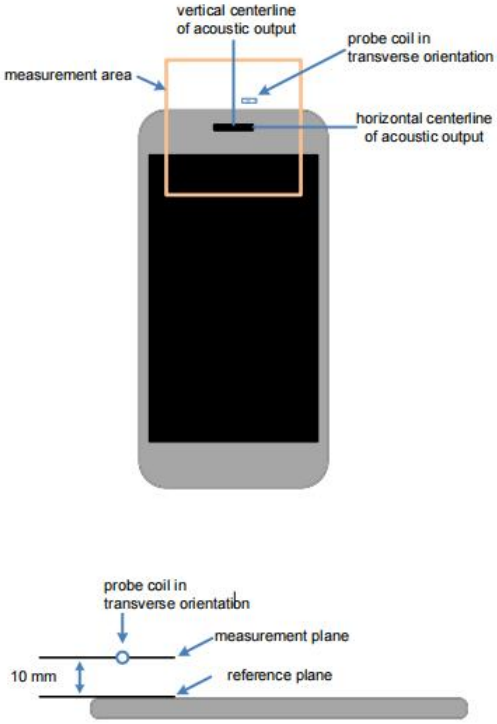

Figure A.4—Measurement and reference planes probe orientation for WD audio frequency magnetic field measurements

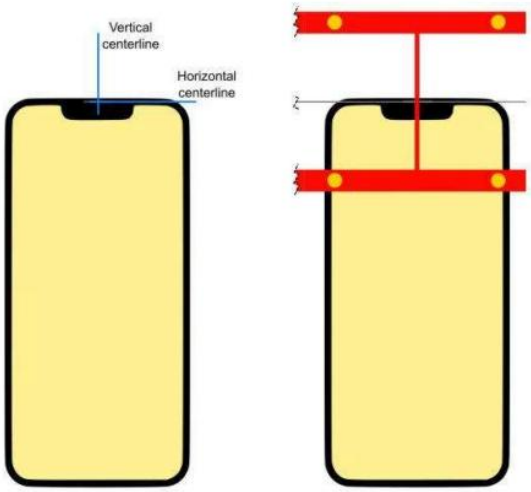

Device Under Test Positioning under the Test Arch

The T-Coil measurement plane, reference plane and other measurement parameters shall be:

a) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the WD handset, which, in normal handset use, rest against the ear.

b) The measurement plane is parallel to, and 10 mm in front of, the reference plane.

c) The reference axis is normal to the reference plane and passes through the center of the acoustic output (or the center of the hole array); or may be centered on or near a secondary inductive source. The actual location of the reference axis and resultant measurement area shall be noted in the test report.

d) The measurement area shall be 50 mm by 50 mm. The measurement area for both desired ABM signal and undesired ABM field may be located where the transverse magnetic measurements are optimum with regard to the requirements. However, the measurement area should be in the vicinity of the acoustic output of the WD and shall be located in the same half of the phone as the WD receiver. In a WD handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

e) Measurements of desired ABM signal strength and undesired ABM field are made at 2.0 mm ± 0.5 mm or 4 mm intervals in an X-Y measurement area pattern over the entire measurement area (676 measurement points total); either all measured, or measured plus interpolated, per 6.4.

f) Desired ABM signal frequency response is measured at a single location at or near the maximum desired ABM signal strength location.

g) The actual locations of the measurement points shall be noted in the test report.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

6.3 Test procedure for T-Coil signal—preferred

This subclause describes the procedures used to measure the ABM (T-Coil) performance of the WD. Measurements shall be performed over a measurement area 50 mm square, in the measurement plane, as specified in A.3. The measurement area shall be scanned with a uniform measurement point spacing of 2.0 mm ± 0.5 mm in each X-Y axis of the plane, yielding 676 measurement points with approximately even spacing throughout the area.

Optionally, measurement point spacing may be increased to 4 mm, with interpolation employed to yield the required 676 equivalent measurement points distributed uniformly over the 50 mm square measurement area. Interpolated points shall be derived from the average of the linear representations of the field strengths of the nearest two or four equidistant measured points. The area of measurement is increased to a 52 mm square so that edge rows and columns of the required 50 mm square can be either measured or interpolated, with none extrapolated.

In addition to measuring the desired ABM signal levels, the weighted magnitude of the unintended signal shall also be determined. Weighting of the unintended and undesired ABM field shall be by the spectral and temporal weighting described in D.4 through D.6.

In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal shall be made at the same locations. Measurements shall not include undesired influence from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load might be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there could still be RF leakage from the WD, which could interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 6.1. If the device display can be turned off during a phone call, then that may be done during the measurement as well. If tested with the display in the off state this shall be documented in the test report.

Measurements shall be performed with the probe coil oriented in the transverse direction, as illustrated in A.3, that is, aligned in the plane of the measurement area and perpendicular to the long dimension of the WD. A multi-stage sequence consists of first measuring the field strength of the desired T-Coil signal (desired ABM signal) that is useful to a hearing aid T-Coil at each specified measurement point. The undesired magnetic component (undesired ABM field) is then measured in the same transverse orientation at each of the same measurement points. At a single location only, taken at or near the highest desired ABM signal reading, the desired ABM signal frequency response shall be determined in a third measurement stage. The flowchart in Figure 6.3 illustrates this three-stage process.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Test flow for T-Coil signal test

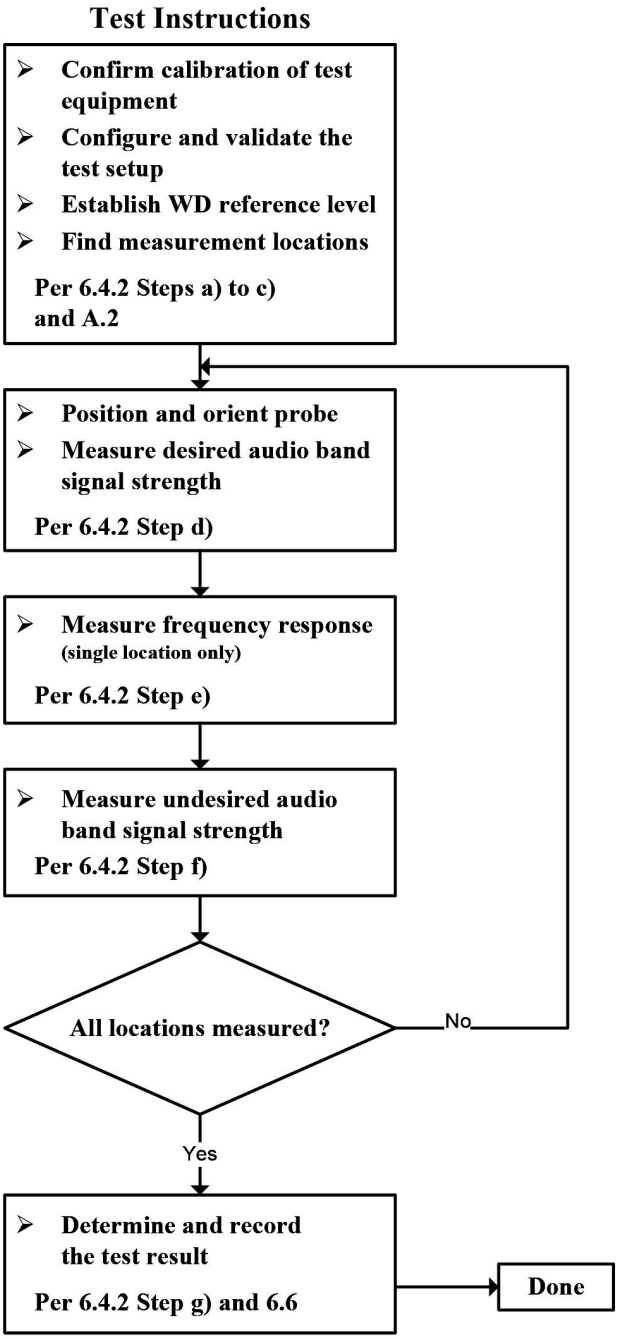

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

The following steps summarize the basic test flow for determining desired ABM signal and undesired ABM field. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of desired ABM signal level. An alternative procedure, yielding equivalent results, using a broadband excitation is described in 6.5.

a) A validation of the test setup and instrumentation shall be performed. This may be done using a TMFS or Helmholtz Coil. Measure the emissions and confirm that they are within tolerance of the expected values.

b) Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 6.3.2.

c) Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load (if necessary to control RF interference in the measurement equipment) as shown in Figure 6.1 or Figure 6.2.

d) The drive level to the WD is set such that the reference input level specified in Table 6.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (desired ABM signal) at f = 1 kHz. Either a sine wave at 1025 Hz, or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as specified in 6.4.3, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.35 The same drive level will be used for the desired ABM signal frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.

e) At each measurement location over the measurement area and in the transverse orientation, measure and record the desired 1 kHz T-Coil magnetic signal (desired ABM signal) as described in Step c).

f) At or near a location representing a maximum in the just-measured desired ABM signal, measure and record the desired T-Coil magnetic signals (desired ABM signal at f_i) as described in 6.4.5.2 in each individual ISO 266:1975 R10 standard 1/3 octave band. The desired audio band input frequency (f_i) shall be centered in each 1/3 octave band maintaining the same drive level as determined in Step c), and the reading taken for that band.

Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input–output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as described in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB(A/m).) Compare the frequency response found to the requirements of 6.6.3.

g) At the same locations measured in Step d), measure and record the undesired broadband audio magnetic signal (undesired ABM field) with no audio signal applied (or digital zero applied, if appropriate) using the specified spectral weighting, the half-band integrator followed by the temporal weighting.

h) Calculate and record the location and number of the measurement points that satisfy both the minimum desired ABM signal level and the maximum undesired ABM field level specified in 6.6.2. Compare this to the requirements in 6.6.4 and record the result.

i) Calculate and record the location and number of the measurement points that satisfy the maximum undesired ABM field level and distribution requirements specified in 6.6.4.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

7. T-Coil Test Result

General Note:

1.Phone Condition:Mute on; Backlight off; Max Volume

2. Codec Investigation: For a voice service/air interface,investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.

3. Air Interface Investigation:

a. Through Internal radio configuration investigation (e.g.bandwidth, modulation data rate, subcarrier spacings, and resource blocks) that the worst radio configuration was document as below table.

b. Use the worst-case codec test and document a limited set of bands/channel/bandwidths.

c. According to the ANSI C63.19-2019 section 6.3.3, using a frequency near the center of the frequency band perform T-coil evaluation.

<GSM Evaluation Results>

Codec Investigation					
Codec	**AMR NB Full Rate**	**AMR NB Full Rate**	**EFR NB (FR V2)**	**Orientation**	**Band/Channel**
Bit rate	**4.75 Kbps**	**12.2 Kbps**	**12.2Kbps**		
Primary Group Contiguous Point Count	92	**84**	107	Transversal(Y)	GSM 850/190
Secondary Group Contiguous Point Count	312	**308**	320		
Frequency response	Pass	Pass	Pass		
Note: The bold data represents the worst case.					

<WCDMA Evaluation Results>

Codec Investigation						
Codec	**NB AMR**	**WB AMR**	**NB AMR**	**WB AMR**	**Orientation**	**Band/Channel**
Bit rate	**4.75 Kbps**	**6.60 Kbps**	**12.2 Kbps**	**23.85Kbps**		
Primary Group Contiguous Point Count	199	203	**189**	212	Transversal(Y)	WCDMA Band II/9400
Secondary Group Contiguous Point Count	456	441	**436**	462		
Secondary Group Max Longitudinal	26	26	**26**	26		
Secondary Group Max Transverse	21	21	**21**	21		
Frequency response	Pass	Pass	Pass	Pass		
Note: The bold data represents the worst case.						

<VoLTE Evaluation Results>

Codec Investigation										
Codec	**AMR-NB**	**AMR-NB**	**AMR-WB**	**AMR-WB**	**EVS-NB**	**EVS-NB**	**EVS-WB**	**EVS-WB**	**Orientation**	**Band/ Channel**
Bit rate	**4.75 Kbps**	**12.2 Kbps**	**6.60 Kbps**	**23.85 Kbps**	**5.9 Kbps**	**24.4 Kbps**	**5.9 Kbps**	**24.4 Kbps**		
Primary Group Contiguous Point Count	223	231	219	**209**	242	234	229	218	Transversal (Y)	LTE Band 2/ 18900
Secondary Group Contiguous Point Count	465	458	486	**446**	461	476	468	487		
Secondary Group Max Longitudinal	26	26	26	**26**	26	26	26	26		
Secondary Group Max Transverse	26	26	25	**25**	24	26	26	26		
Frequency response	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass		
Note: The bold data represents the worst case.										

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Air Interface Investigation											
Plot No.	Mode	Channel	BW	Probe Position	Modulation /Mode	Primary Group Contiguous Point Count	Secondary Grour Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Ambient Noise (dB A/m)	Frequency Response
1	GSM850	190/836.6MHz	/	Transversal(Y)	Voice	**84**	**308**	/	/	-50.67	Pass
2	PCS1900	512/1850.2MHz	/	Transversal(Y)	Voice	96	335	/	/	-49.75	Pass
3	WCDMA Band II	9262/1852.4MHz	/	Transversal(Y)	Voice	**189**	**436**	26	21	-49.64	Pass
4	WCDMA Band IV	1312/1712.4MHz	/	Transversal(Y)	Voice	204	452	26	22	-49.25	Pass
5	WCDMA Band V	4132/826.4MHz	/	Transversal(Y)	Voice	217	461	26	22	-50.31	Pass
6	LTE FDD Band 2	18700/1860.0MHz	20MHz_QPSK_1_50	Transversal(Y)	Voice	**209**	**446**	26	25	-49.53	Pass
7	LTE FDD Band 4	20300/1745.0MHz	20MHz_QPSK_1_50	Transversal(Y)	Voice	213	458	26	25	-50.76	Pass
8	LTE FDD Band 5	20450/829.0MHz	10MHz_QPSK_1_0	Transversal(Y)	Voice	256	463	26	25	-48.11	Pass
9	LTE FDD Band 12	23095/707.5MHz	10MHz_QPSK_1_25	Transversal(Y)	Voice	231	474	26	26	-48.38	Pass
10	LTE FDD Band 13	23230/782.0MHz	10MHz_QPSK_1_25	Transversal(Y)	Voice	242	468	26	25	-48.45	Pass
11	LTE FDD Band 17	23800/711.0MHz	10MHz_QPSK_1_25	Transversal(Y)	Voice	239	491	26	25	-49.32	Pass
12	LTE FDD Band 25	27710/2310.0MHz	10MHz_QPSK_1_0	Transversal(Y)	Voice	247	482	26	26	-48.71	Pass
13	LTE FDD Band 26 part 90	26740/819.0MHz	10MHz_QPSK_1_25	Transversal(Y)	Voice	259	478	26	26	-49.39	Pass
14	LTE FDD Band 26 part 22	26965/841.5MHz	15MHz_QPSK_1_74	Transversal(Y)	Voice	246	443	26	26	-49.28	Pass
15	LTE TDD Band 38	38000/2595.0MHz	20MHz_QPSK_1_0	Transversal(Y)	Voice	251	469	26	26	-49.76	Pass
16	LTE TDD Band 41	41490/2680.0MHz	20MHz_QPSK_1_50	Transversal(Y)	Voice	249	471	26	26	-49.25	Pass
17	LTE FDD Band 66	132572/1770MHz	20MHz_QPSK_1_50	Transversal(Y)	Voice	265	492	26	26	-48.35	Pass
18	LTE FDD Band 71	133372/688.0MHz	20MHz_QPSK_1_50	Transversal(Y)	Voice	273	468	26	25	-49.21	Pass

Remark:
1. There is special HAC mode software on this EUT.
2. The volume was adjusted to maximum level and the backlight turned off during T-Coil testing
3. According to standard ANSI C63.19-2019, for the measurement of both desired ABM signal and undesired ABM field, the environmental noise level should be <-48 dB(A/m).

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

8. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	MVG	N/A	OpenHAC V5.1.3	N/A	N/A
6 1/2 Multimeter	Keithley	DMM6500	4527164	2024/10/25	2025/10/24
Audio Card	National Instruments	NI PCI-4461	01C4B4EB	N/A	N/A
WIDEBAND RADIO COMMUNICATI ON TESTER	ROHDE&SCHWARZ	CMW500	161997	2024/10/25	2025/10/24
COMOHAC T-Coil Probe	MVG	STCOIL	07/17 TCP38	2025/02/05	2026/02/04
TMFS	MVG	STMFS	SN 13/22 TMFS30	2025/05/28	2028/05/27
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	/	/

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

ANNEX A System Validation Result

Input Level (mV)	Axial Description	Location	Magnetic Field Measurement (dBA/m)	Magnetic Field Target (dBA/m)	Magnetic Field Deviation	Limit (dBA/m)
500	Axial	Max	-9.86	-9.78	-0.08	±0.85
	Radial H	Right	-16.48	-16.4	-0.08	±0.85
		Left	-16.34	-16.16	-0.18	±0.85
	Radial V	Upper	-16.30	-15.49	-0.81	±0.85
		Lower	-16.18	-15.85	-0.33	±0.85

System check at 0.00 MHz

Date of measurement: 28/9/2025

Experimental Conditions

Probe	SN_0717_TCP38
Signal	-
Band	-
Channels	-
Channels Number	-
Frequency (MHz)	0.00

Raw data result

	Axial	Radial H	Radial V
ABM1 first maximum dB(A/m)	-9.86	-16.48	-16.30
ABM1 second maximum dB(A/m)	-	-16.34	-16.18

Desired signal (ABM1) scans

	Axial	Radial H	Radial V
Image			
Audio frequency (Hz)	1025	1025	1025
Scan area: length (mm), width (mm)	70.00, 70.00	70.00, 70.00	70.00, 70.00
Measurement point spacing (mm)	5	5	5
distance to reference plane (mm)	10.00	10.00	10.00
X and Y offset with the reference point (mm)	0.00, 0.00	0.00, 0.00	0.00, 0.00
Number of measurement points	225	225	225

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

ANNEX B Test Data

Measurement at GSM850

Date of measurement: 28/9/2025

Experimental Conditions

Probe	SN_0717_TCP38
Signal	GSM
Band	GSM850
Channels	middle
Channels Number	190
Frequency (MHz)	836.60

Results

Device compliant	Yes
Measurement status	Complete

Requirement verification

C63.19	Test description	Minimum limit	Measured	Verdict
6.6.4.2	Primary group size	25	84	Pass
6.6.4.2	Secondary group size	125	308	Pass
6.6.3	Frequency response inside boundaries	-	-	Pass

Qualifying points

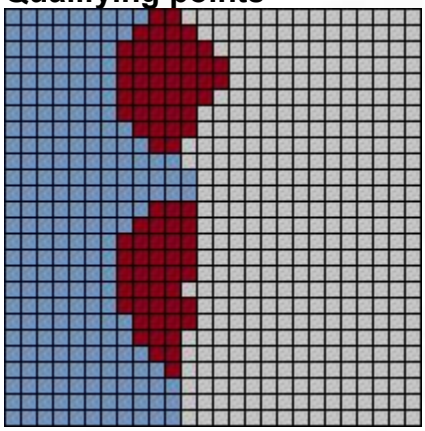

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Frequency response

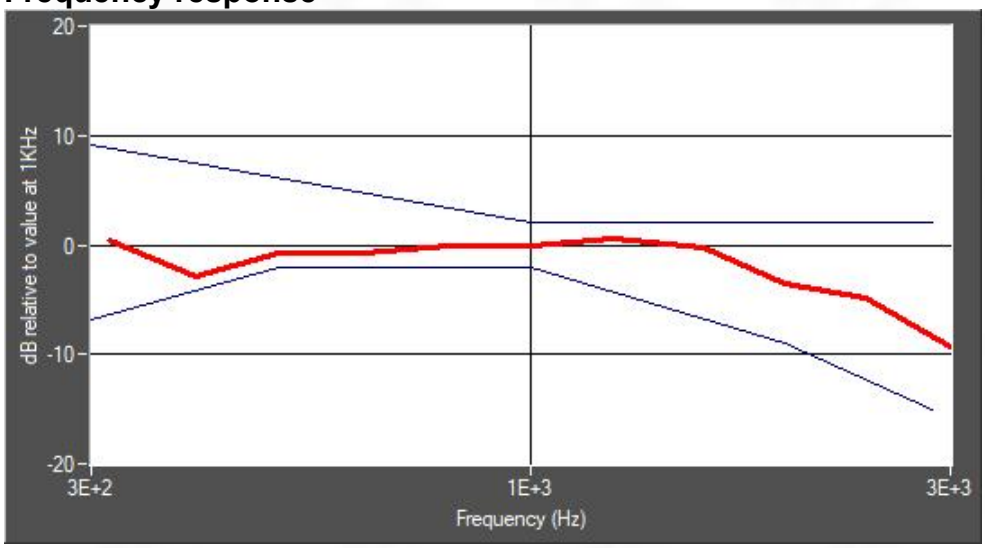

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Measurement at Band 2 (1900)

Date of measurement: 28/9/2025

Experimental Conditions

Probe	SN_0717_TCP38
Signal	W-CDMA
Band	Band 2 (1900)
Channels	middle
Channels Number	9400
Frequency (MHz)	1880.00

Results

Device compliant	Yes
Measurement status	Complete

Requirement verification

C63.19	Test description	Minimum limit	Measured	Verdict
6.6.4.2	Primary group size	75	189	Pass
6.6.4.2	Secondary group size	300	436	Pass
6.6.4.2	Biggest column	10	26	Pass
6.6.4.2	Biggest row	15	21	Pass
6.6.3	Frequency response inside boundaries	-	-	Pass

Qualifying points

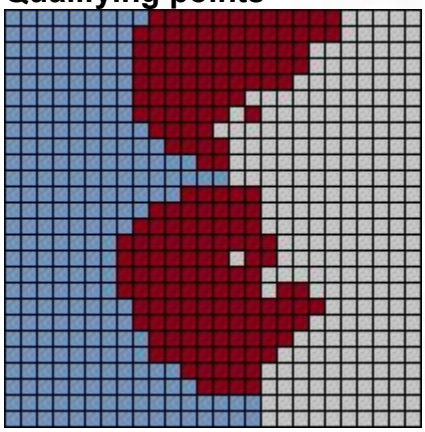

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Frequency response

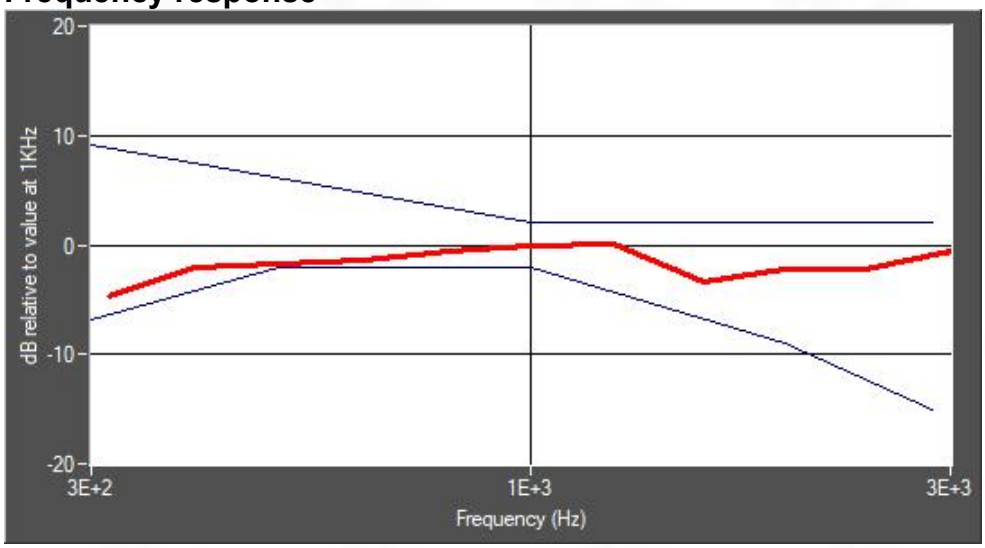

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Measurement at LTE band 2

Date of measurement: 10/10/2025

Experimental Conditions

Probe	SN_0717_TCP38
Signal	LTE FDD
Band	LTE band 2
Channels	middle
Channels Number	18900
Frequency (MHz)	1880.00

Results

Device compliant	No
Measurement status	Complete

Requirement verification

C63.19	Test description	Minimum limit	Measured	Verdict
6.6.4.2	Primary group size	75	209	Pass
6.6.4.2	Secondary group size	300	446	Pass
6.6.4.2	Biggest column	10	26	Pass
6.6.4.2	Biggest row	15	25	Pass
6.6.3	Frequency response inside boundaries	-	-	Pass

Qualifying points

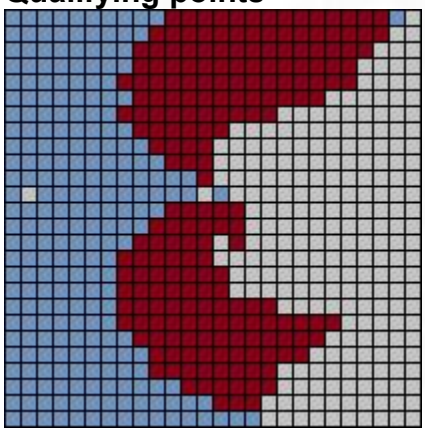

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Frequency response

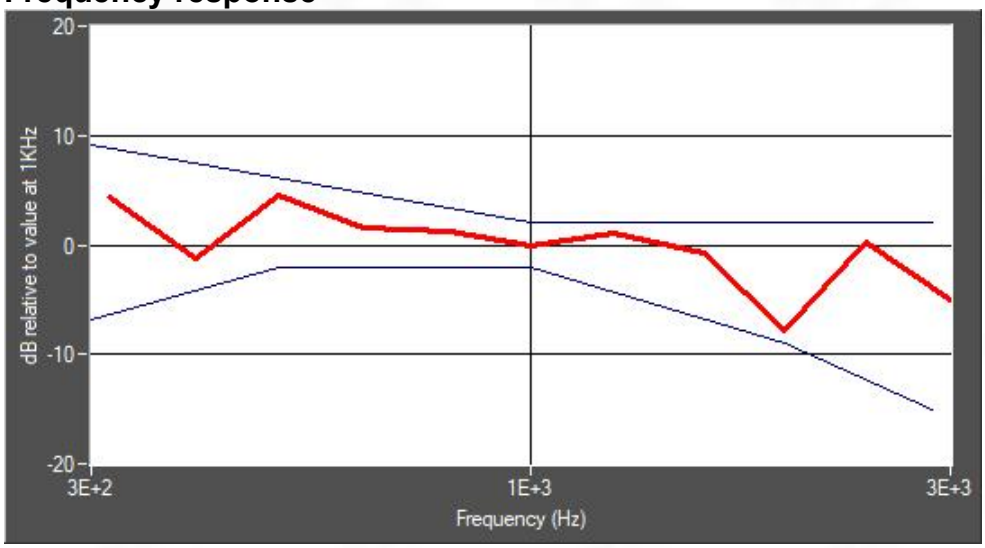

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

ANNEX C Test Setup Photo

Please refer to the Appendix Test Setup Photos

ANNEX D EUT External & Internal Photos

Please refer to RF Report.

ANNEX E Calibration Information

Please refer to the document “Calibration.pdf”.

BTF Testing Lab (Shenzhen) Co., Ltd.

101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--

Total or partial reproduction of this document without permission of the Laboratory is not allowed.