Report No.: DDT-R22031014-2E01

Issued Date: Jun. 20, 2022

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Jovision Technology Co., Ltd.
Address	:	Floor 12, Building No.3, Aosheng Square, No. 1166 Xinluo Street, Jinan, Shandong, China
Equipment under Test	:	Network Camera
Model No.	:	JVS-H930E, JVS-H940E, JVS-H950E, JVS-H960E, JVS-H970E, JVS-H980E, JVS-H990E, JVS-N513-DS-Z5, JVS-N533-DS-Z5, JVS-N933-K1-PE, JVS-N933-K1, JVS-N933-KDL-PE, JVS-N916-KDL-PE, JVS-N916-KDL, JVS-N933-KDL, JVS-N513-K1-PE, JVS-N913-K1-PE, JVS-N913-K1, JVS-N933-YWC, JVS-N933-YWC-PE, JVS-N913-YWC, JVS-N913-YWC-PE, JVS-N913-YWS-PE, JVS-N96-X3, JVS-N97-X3, JVS-N98-X3, JVS-N99-X3 JVS-FPT-DL18, JVS-NL65-Z70, JVS-DL64-Z33, JVS-DL68-Z78, JVS-N5022, JVS-N510-YWS, JVS-N3122SL, JVS-N935SL-HY, JVS-N955-HY, JVS-N43-Z25, JVS-N917-SDL, JVS-N917-SDL-PE, JVS-N916-YWD, JVS-N9122SL, JVS-SD1, AS-DB01, AS-DB02, AS-DB03, AS-DB06, AS-DB08, JVS-516-YWD, JVS-936-HDL, JVS-536-HDL
Trade Mark	:	JOVISION
FCC ID	:	2AEW9JVS-H930E
Manufacturer	:	Jovision Technology Co., Ltd.
Address	:	Floor 12, Building No.3, Aosheng Square, No. 1166 Xinluo Street, Jinan, Shandong, China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808
Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, http://www.dgddt.com

REPORT

TABLE OF CONTENTS

Test report declares....4
1. Summary of test results 6
2. General test information 7
2.1. Description of EUT 7
2.2. Accessories of EUT 8
2.3. Assistant equipment used for test 8
2.4. Block diagram of EUT configuration for test 8
2.5. Deviations of test standard 8
2.6. Test environment conditions 9
2.7. Test laboratory 9
2.8. Measurement uncertainty 9
3. Equipment used during test 10
4. 6dB Bandwidth and 99% Bandwidth 11
4.1. Block diagram of test setup 11
4.2. Limits 11
4.3. Test Procedure 11
4.4. Test Result 12
4.5. original test data 12
5. Conducted Peak Output Power 19
5.1. Block diagram of test setup 19
5.2. Limits 19
5.3. Test Procedure 19
5.4. Test Result 19
6. Power Spectral Density 20
6.1. Block diagram of test setup 20
6.2. Limits 20
6.3. Test Procedure 20
6.4. Test Result 20
6.5. original test data 21
7. Band Edge Compliance (Conducted Method) 25
7.1. Block diagram of test setup 25
7.2. Limits 25
7.3. Test procedure 25
7.4. Test Result 25
7.5. original test data 26
8. Radiated Spurious Emissions 29
8.1. Block diagram of test setup 29

8.2. Limit 30
8.3. Test Procedure 31
8.4. Test result 33
9. RF Conducted Spurious Emissions 48
9.1. Block diagram of test setup 48
9.2. Limits 48
9.3. Test procedure 48
9.4. Test Result 49
9.5. original test data 49
10. Radiated Band Edge Compliance 59
10.1. Block diagram of test setup 59
10.2. Limit 59
10.3. Test Procedure 59
10.4. Test result 59
11. Power Line Conducted Emission 72
11.1. Block diagram of test setup 72
11.2. Power Line Conducted Emission Limits (Class B) 72
11.3. Test Procedure 72
11.4. Test Result 73
12. Antenna Requirements 76
12.1. Limit 76
12.2. Result 76
13. Test setup photograph 77
14. Photos of the EUT 79

TEST REPORT DECLARE

Applicant	:	Jovision Technology Co., Ltd.
Address	:	Floor 12, Building No.3, Aosheng Square, No. 1166 Xinluo Street, Jinan, Shandong, China
Equipment under Test	:	Network Camera
Model No	:	JVS-H930E, JVS-H940E, JVS-H950E, JVS-H960E, JVS-H970E, JVS-H980E, JVS-H990E, JVS-N513-DS-Z5, JVS-N533-DS-Z5, JVS-N933-K1-PE, JVS-N933-K1, JVS-N933-KDL-PE, JVS-N916-KDL-PE, JVS-N916-KDL, JVS-N933-KDL, JVS-N513-K1-PE, JVS-N913-K1-PE, JVS-N913-K1, JVS-N933-YWC, JVS-N933-YWC-PE, JVS-N913-YWC, JVS-N913-YWC-PE, JVS-N913-YWS-PE, JVS-N96-X3, JVS-N97-X3, JVS-N98-X3, JVS-N99-X3 JVS-FPT-DL18, JVS-NL65-Z70, JVS-DL64-Z33, JVS-DL68-Z78, JVS-N5022, JVS-N510-YWS, JVS-N3122SL, JVS-N935SL-HY, JVS-N955-HY, JVS-N43-Z25, JVS-N917-SDL, JVS-N917-SDL-PE, JVS-N916-YWD, JVS-N9122SL, JVS-SD1, AS-DB01, AS-DB02, AS-DB03, AS-DB06, AS-DB08, JVS-516-YWD, JVS-936-HDL, JVS-536-HDL
Trade Mark	:	JOVISION
Manufacturer	:	Jovision Technology Co., Ltd.
Address	:	Floor 12, Building No.3, Aosheng Square, No. 1166 Xinluo Street, Jinan, Shandong, China

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C
Test procedure used: ANSI C63.10:2013

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No:	DDT-R22031014-2E01		
Date of Receipt:	May 25, 2022	**Date of Test:**	May 25, 2022 ~ Jun. 20, 2022

Prepared By: ***Approved By:***

Johnny Wang

Johnny Wang/Engineer ***Damon Hu/EMC Manager***

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jun. 20, 2022	

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	**Standard**	**Results**
6dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013	Pass
Conducted Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013	Pass
Power Spectral Density	FCC Part 15:15.247 ANSI C63.10:2013	Pass
Band-edge and Spurious Emissions (Conducted)	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013	Pass
Radiated Spurious Emissions	FCC Part 15: 15.247 ANSI C63.10:2013	Pass
Radiated Band Edge Compliance	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013	Pass
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2013	Pass
Antenna requirement	FCC Part 15: 15.203	Pass

2. General test information

2.1. Description of EUT

EUT* Name	:	Network Camera
Model Number	:	JVS-H930E, JVS-H940E, JVS-H950E, JVS-H960E, JVS-H970E, JVS-H980E, JVS-H990E, JVS-N513-DS-Z5, JVS-N533-DS-Z5, JVS-N933-K1-PE, JVS-N933-K1, JVS-N933-KDL-PE, JVS-N916-KDL-PE, JVS-N916-KDL, JVS-N933-KDL, JVS-N513-K1-PE, JVS-N913-K1-PE, JVS-N913-K1, JVS-N933-YWC, JVS-N933-YWC-PE, JVS-N913-YWC, JVS-N913-YWC-PE, JVS-N913-YWS-PE, JVS-N96-X3, JVS-N97-X3, JVS-N98-X3, JVS-N99-X3 JVS-FPT-DL18, JVS-NL65-Z70, JVS-DL64-Z33, JVS-DL68-Z78, JVS-N5022, JVS-N510-YWS, JVS-N3122SL, JVS-N935SL-HY, JVS-N955-HY, JVS-N43-Z25, JVS-N917-SDL, JVS-N917-SDL-PE, JVS-N916-YWD, JVS-N9122SL, JVS-SD1, AS-DB01, AS-DB02, AS-DB03, AS-DB06, AS-DB08, JVS-516-YWD, JVS-936-HDL, JVS-536-HDL
Difference of models	:	Above models are identical in schematic and structure, only the name is different for all the models, therefore the test performed on the model JVS-H930E.
EUT function description	:	Please reference user manual of this device
Power supply	:	DC 5V from adapter
Radio Technology	:	IEEE 802.11b/g/n
FCC Operation frequency	:	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz
Modulation	:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	:	IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: up to 72.2 Mbps
Antenna Type	:	FPC antenna, maximum PK gain: 2.5 dBi
Sample Number	:	S22031014-04 for conductive S22031014-05 for radiation

Note: EUT is the ab. of equipment under test.

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

2.2. Accessories of EUT

Assistant equipment	Manufacturer	Model number	Other
AC/DC ADAPTER	Shenzhen Keyu Power Supply Technology Co., Ltd.	KA12H-0502000USH	Input: 100-240V 50/60Hz 0.4A Max Output: DC 5V, 2A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test

AC Mains —— EUT

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.
Test software: SecureCRT.exe
The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, setting Tx power and rand data rate information				
Mode	Setting Tx Power ANT1	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
Tx mode 802.11b	8	11	LCH: CH1	2412
	8	11	MCH: CH6	2437
	8	11	HCH: CH11	2462
Tx mode 802.11g	8	54	LCH: CH1	2412
	8	54	MCH: CH6	2437
	8	54	HCH: CH11	2462
Tx mode 802.11n HT20	8	MCS 7	LCH: CH1	2412
	8	MCS 7	MCH: CH6	2437
	8	MCS 7	HCH: CH11	2462
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.				

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25℃
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, http://www.dgddt.com, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10^{-8} (Antenna couple method)
	5.5 x 10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz≤ f < 22 GHz)
Uncertainty for radio frequency (RBW<20 kHz)	3×10^{-8}
Temperature	0.4℃
Humidity	2%
Uncertainty for Radiation Emission test (30 MHz-1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz-40 GHz)	4.10 dB (1-6 GHz)
	4.40 dB (6 GHz-18 GHz)
	3.54 dB (18 GHz-26 GHz)
	4.30 dB (26 GHz-40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz-30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒RF Connected Test (Tonscend RF Measurement System 1#)					
SIGNAL ANALYZER	R&S	FSQ26	101272	May 18, 2022	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Sep. 02, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Oct. 15, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	May 18, 2022	1 Year
RF Control Unit	Tonsend	JS0806-2	158060010	May 18, 2022	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 26, 2022	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
☒Radiation 3#chamber					
EMI Test Receiver	R&S	ESU	100472	May 18, 2022	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	May 18, 2022	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Aug. 07, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02468	Nov. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 06, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Sep. 02, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 11, 2022	1 Year
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
☒Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101109	Sep. 07, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 07, 2021	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 02, 2021	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 02, 2021	1 Year
LISN 3	SCHWARZBECK	NSLK 8163	00017	Sep. 02, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

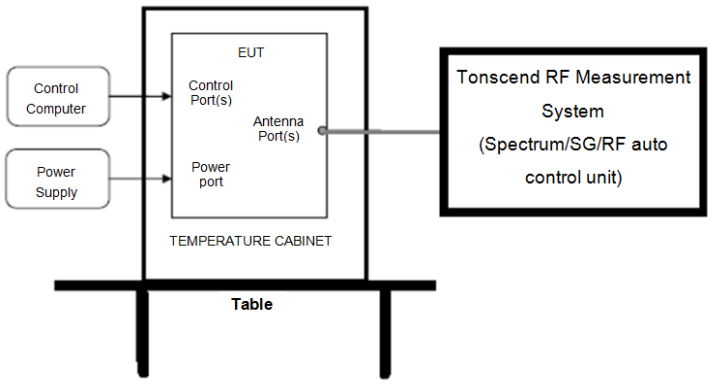

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW:	500 kHz
VBW:	2 MHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) 6dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4. Test Result

Test Mode	Test	Ant	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
11B	2412	Ant1	8.64	0.5	Pass
11B	2437	Ant1	8.68	0.5	Pass
11B	2462	Ant1	9.16	0.5	Pass
11G	2412	Ant1	16.48	0.5	Pass
11G	2437	Ant1	16.64	0.5	Pass
11G	2462	Ant1	16.64	0.5	Pass
11N20SISO	2412	Ant1	17.68	0.5	Pass
11N20SISO	2437	Ant1	17.72	0.5	Pass
11N20SISO	2462	Ant1	17.80	0.5	Pass

Test Mode	Test	Ant	99% OBW [MHz]	Limit [MHz]	Verdict
11B	2412	Ant1	13.16	---	Pass
11B	2437	Ant1	13.32	---	Pass
11B	2462	Ant1	13.40	---	Pass
11G	2412	Ant1	17.24	---	Pass
11G	2437	Ant1	17.40	---	Pass
11G	2462	Ant1	17.44	---	Pass
11N20SISO	2412	Ant1	18.08	---	Pass
11N20SISO	2437	Ant1	18.24	---	Pass
11N20SISO	2462	Ant1	18.24	---	Pass

4.5. original test data

6 dB bandwidth：

11B_Ant1_2412

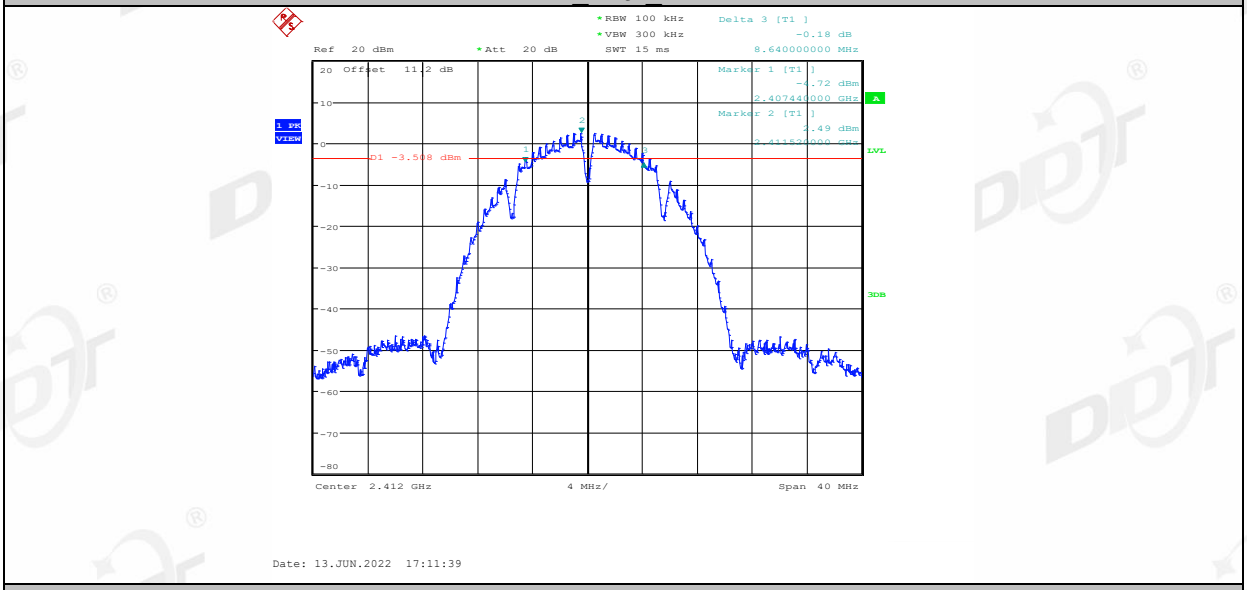

11B_Ant1_2437

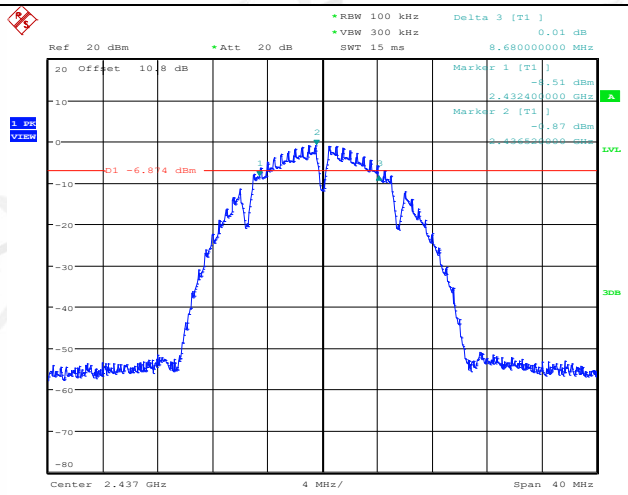

Date: 13.JUN.2022 19:27:51

11B_Ant1_2462

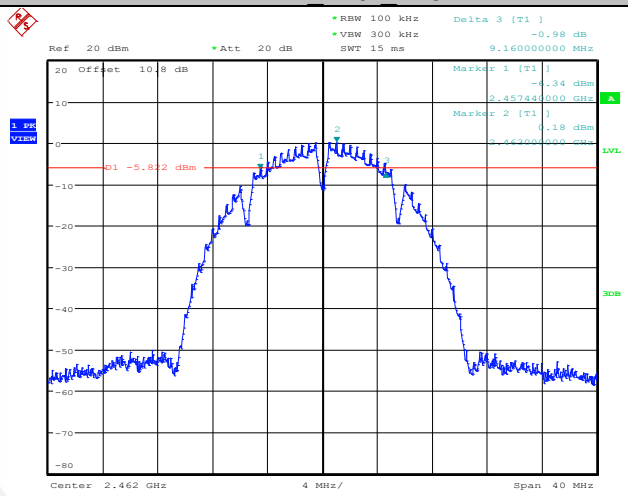

Date: 13.JUN.2022 19:30:00

11G_Ant1_2412

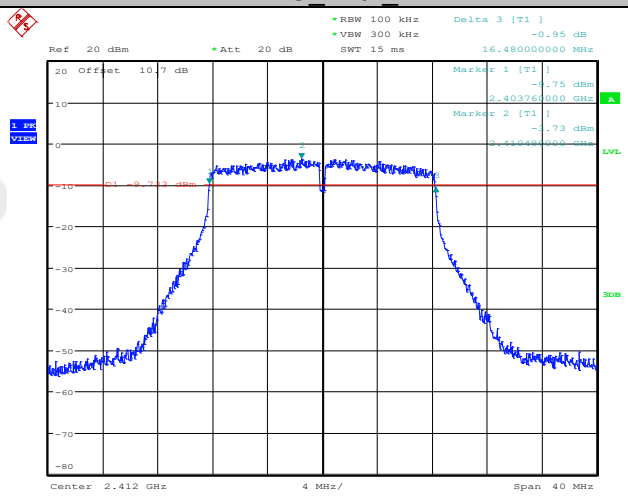

Date: 13.JUN.2022 19:32:09

11G_Ant1_2437

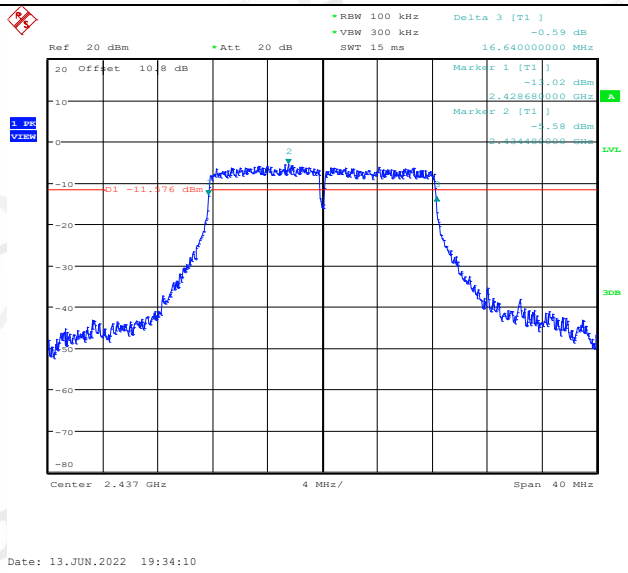

11G_Ant1_2462

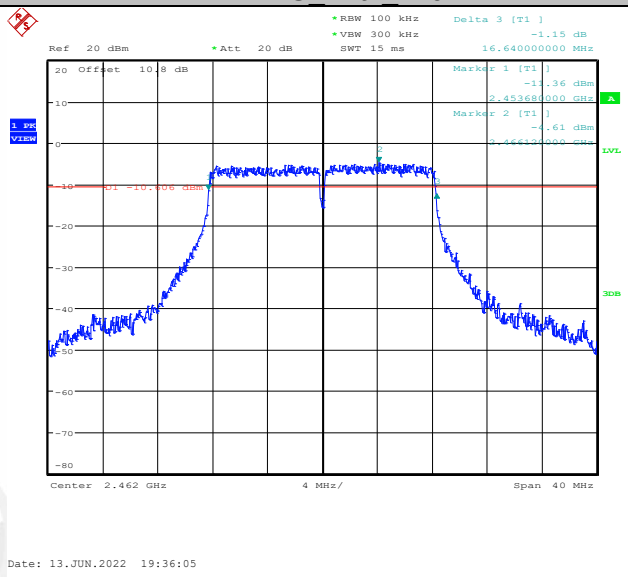

11N20SISO_Ant1_2412

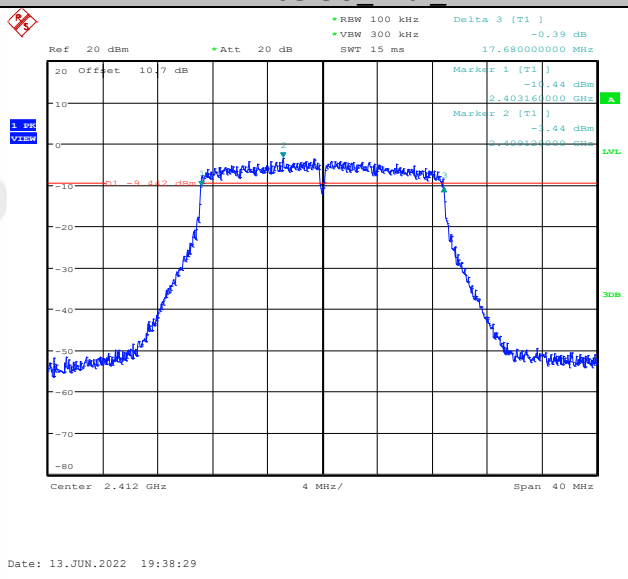

11N20SISO_Ant1_2437

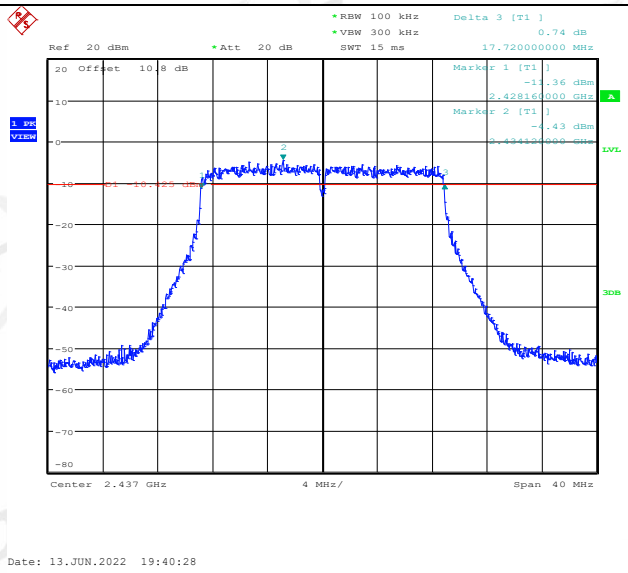

11N20SISO_Ant1_2462

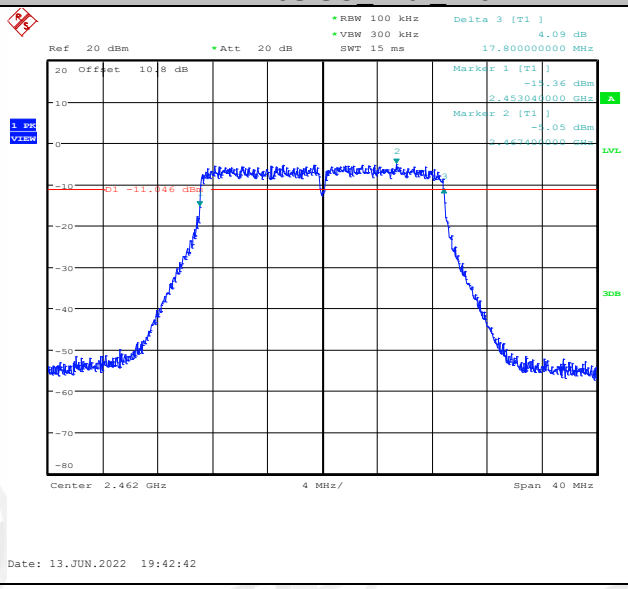

99% bandwidth：

11B_Ant1_2412

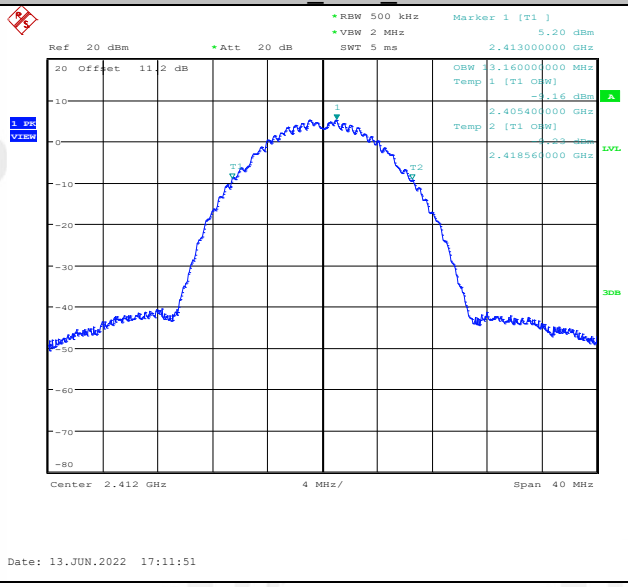

11B_Ant1_2437

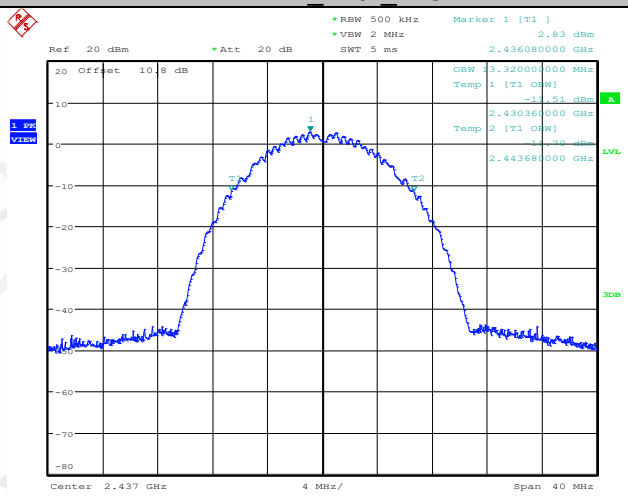

Date: 13.JUN.2022 19:28:02

11B_Ant1_2462

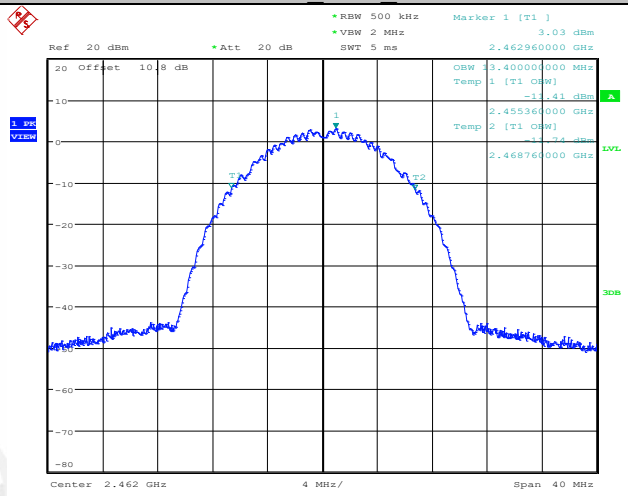

Date: 13.JUN.2022 19:30:12

11G_Ant1_2412

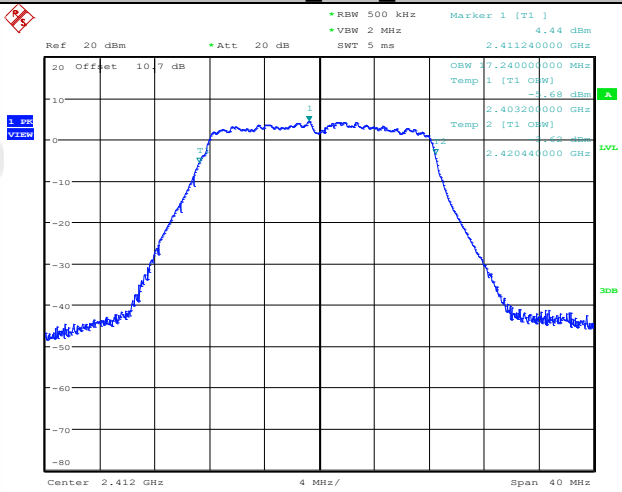

Date: 13.JUN.2022 19:32:21

11G_Ant1_2437

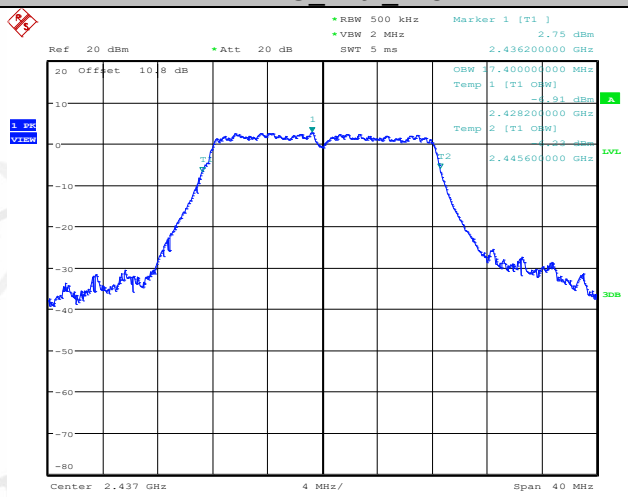

Date: 13.JUN.2022 19:34:21

11G_Ant1_2462

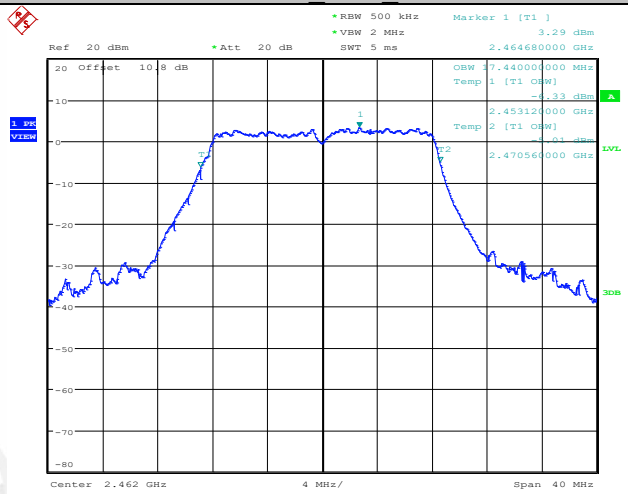

Date: 13.JUN.2022 19:36:16

11N20SISO_Ant1_2412

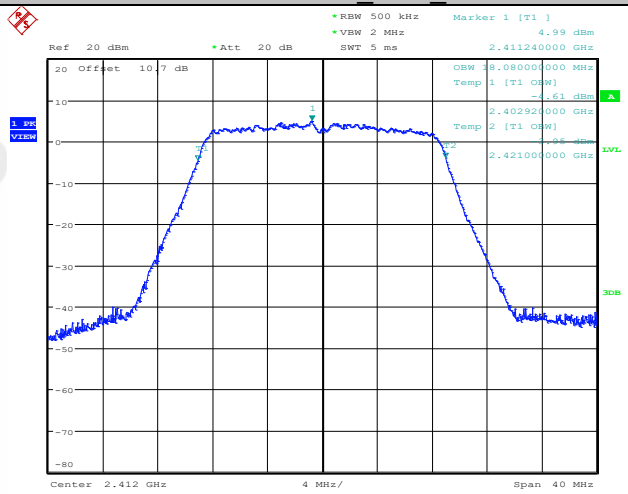

Date: 13.JUN.2022 19:38:41

11N20SISO_Ant1_2437

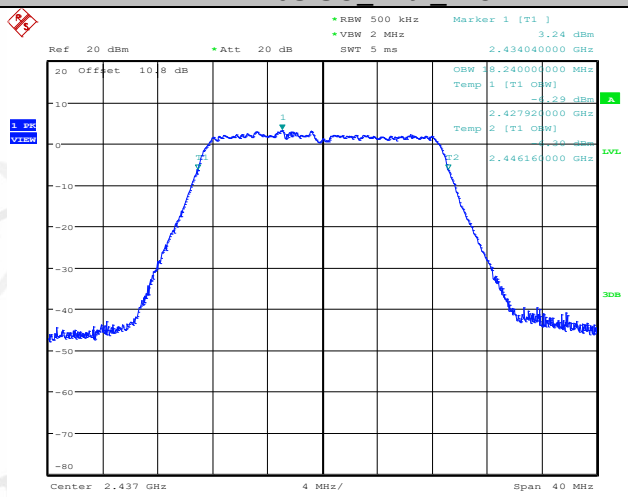

Date: 13.JUN.2022 19:40:39

11N20SISO_Ant1_2462

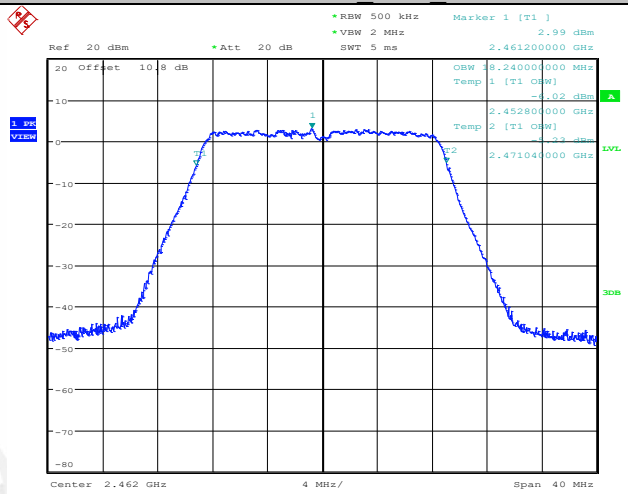

Date: 13.JUN.2022 19:42:53

5. Conducted Peak Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power meter.

5.4. Test Result

Test Mode	Test Channel	Ant	Conducted Output Power (dBm)	Limit [dBm]	Verdict
11B	2412	Ant1	**11.17**	30	Pass
11B	2437	Ant1	10.50	30	Pass
11B	2462	Ant1	10.29	30	Pass
11G	2412	Ant1	9.89	30	Pass
11G	2437	Ant1	9.93	30	Pass
11G	2462	Ant1	9.81	30	Pass
11N20SISO	2412	Ant1	10.40	30	Pass
11N20SISO	2437	Ant1	10.25	30	Pass
11N20SISO	2462	Ant1	9.75	30	Pass

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	3 kHz ≤ RBW ≤ 100 kHz
VBW:	≥ 3RBW
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test Result

Test Mode	Test Channel	Ant	PSD [dBm]	Limit [dBm/3kHz]	Verdict
11B	2412	Ant1	-18.29	8.00	Pass
11B	2437	Ant1	-20.34	8.00	Pass
11B	2462	Ant1	-19.91	8.00	Pass
11G	2412	Ant1	-17.58	8.00	Pass
11G	2437	Ant1	-18.67	8.00	Pass
11G	2462	Ant1	-18.44	8.00	Pass
11N20SISO	2412	Ant1	-17.37	8.00	Pass
11N20SISO	2437	Ant1	-18.78	8.00	Pass
11N20SISO	2462	Ant1	-18.56	8.00	Pass

6.5. original test data

11B_Ant1_2412

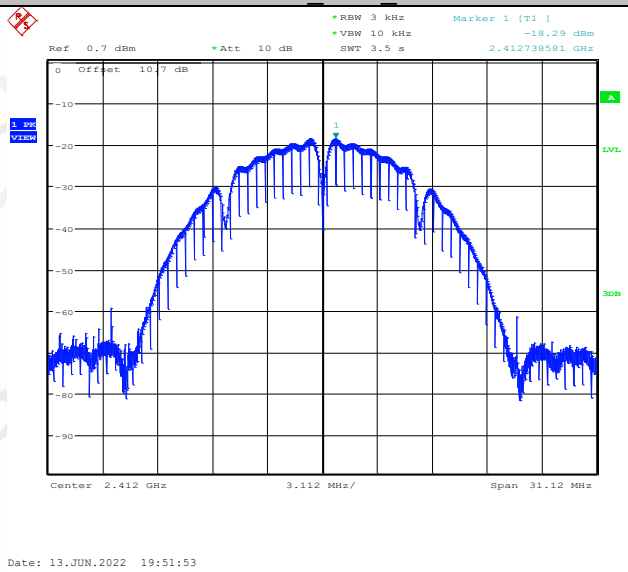

11B_Ant1_2437

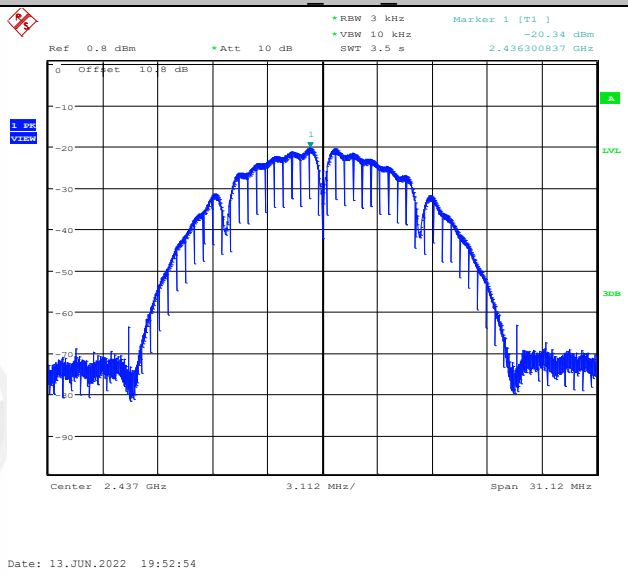

11B_Ant1_2462

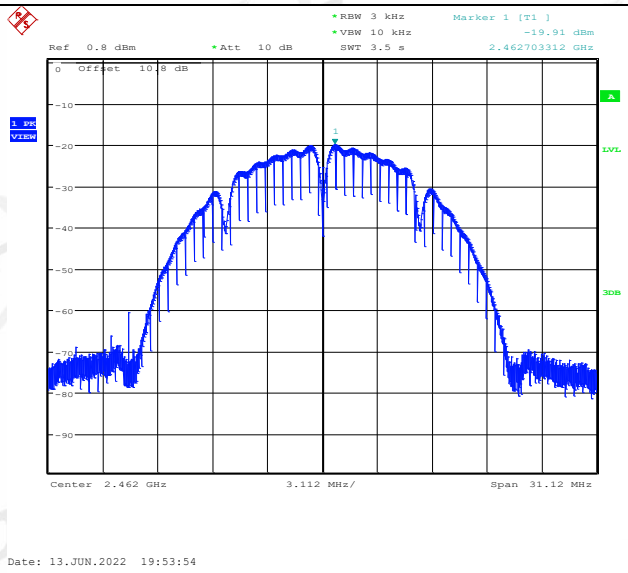

11G_Ant1_2412

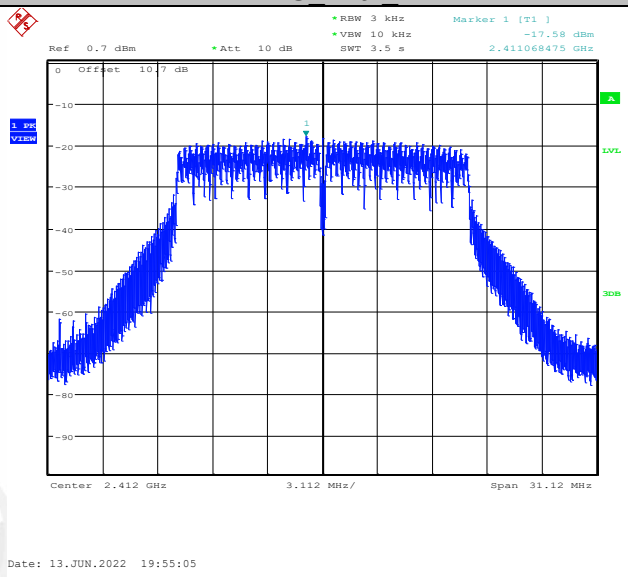

11G_Ant1_2437

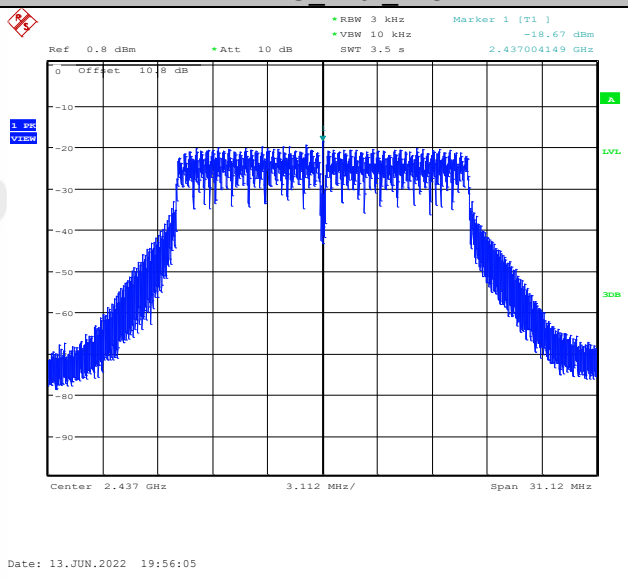

11G_Ant1_2462

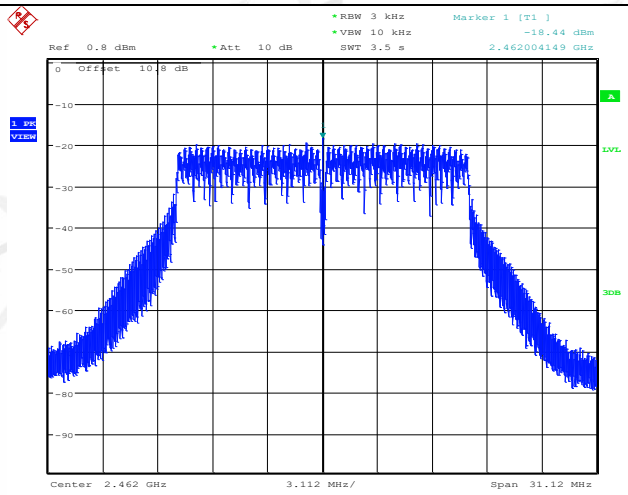

11N20SISO_Ant1_2412

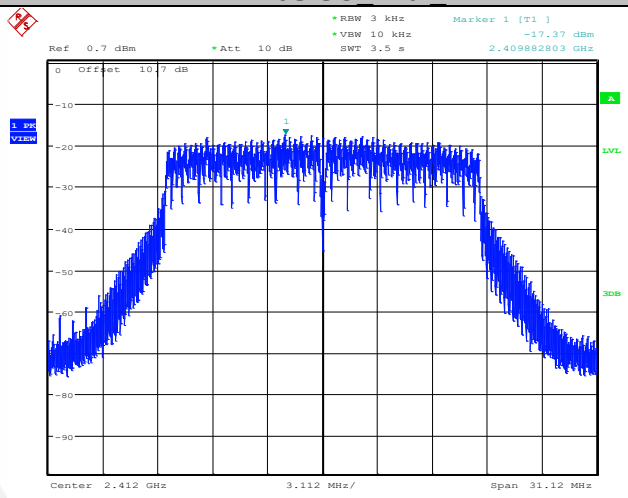

11N20SISO_Ant1_2437

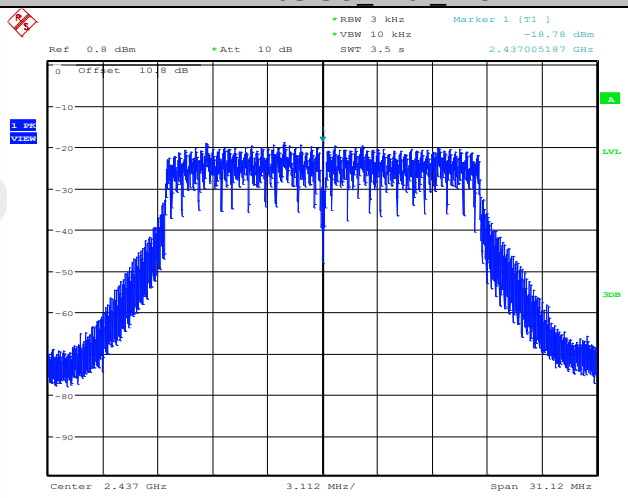

11N20SISO_Ant1_2462

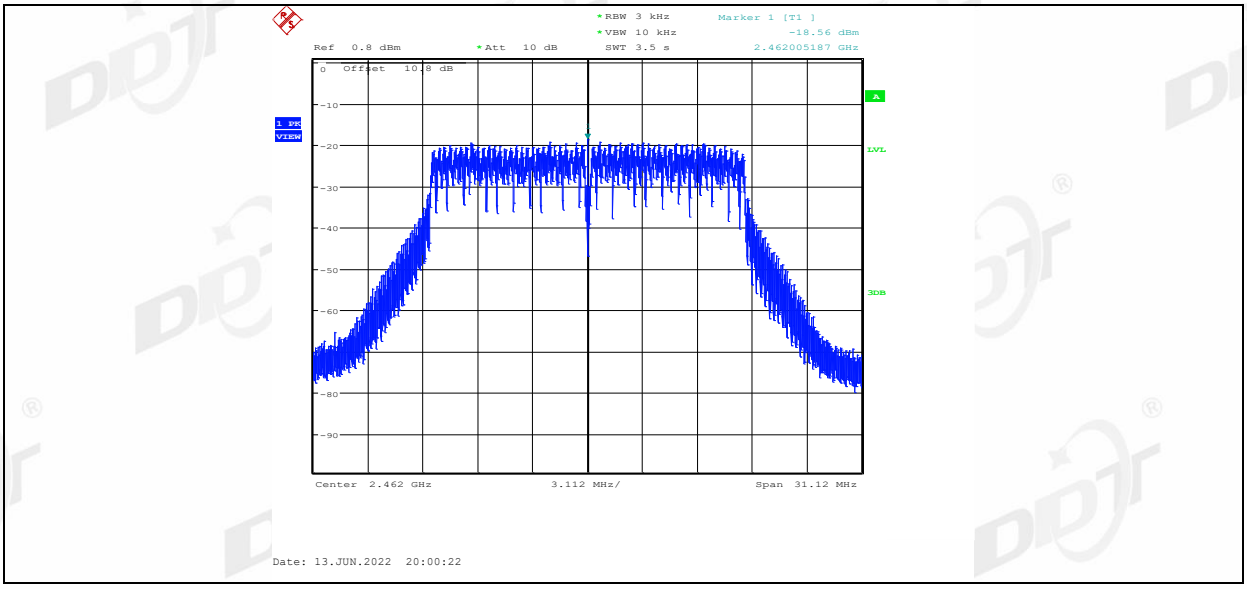
RBW 3 kHz
VBW 10 kHz
SWT 3.5 s
Marker 1 [T1]
-18.56 dBm
2.462005187 GHz
Ref 0.8 dBm
Att 10 dB
Offset 10.8 dB
1 PK VIEW
A
LVL
3DB
Center 2.462 GHz
3.112 MHz/
Span 31.12 MHz
Date: 13.JUN.2022 20:00:22

7. Band Edge Compliance (Conducted Method)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

7.4. Test Result

EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	/	/	/
	CH6	Pass		/	/
	CH11	Pass		/	/

7.5. original test data

11B_Ant1_Low_2412

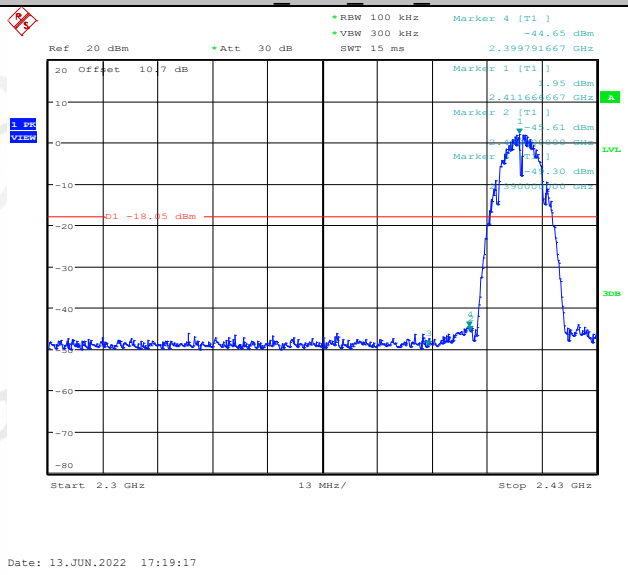

11B_Ant1_High_2462

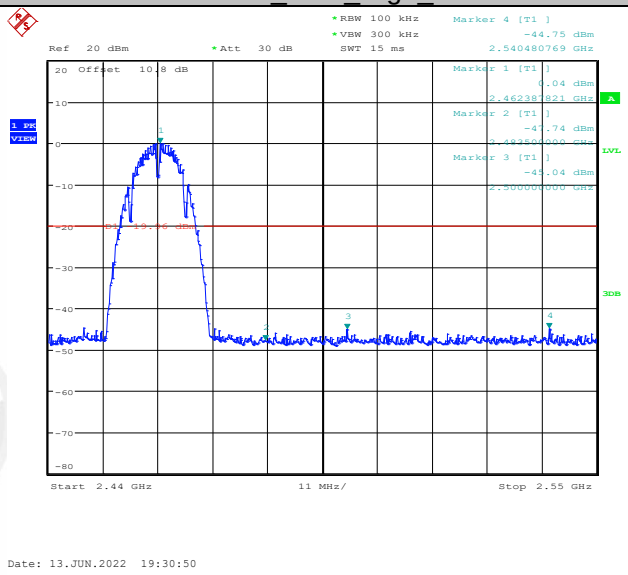

11G_Ant1_Low_2412

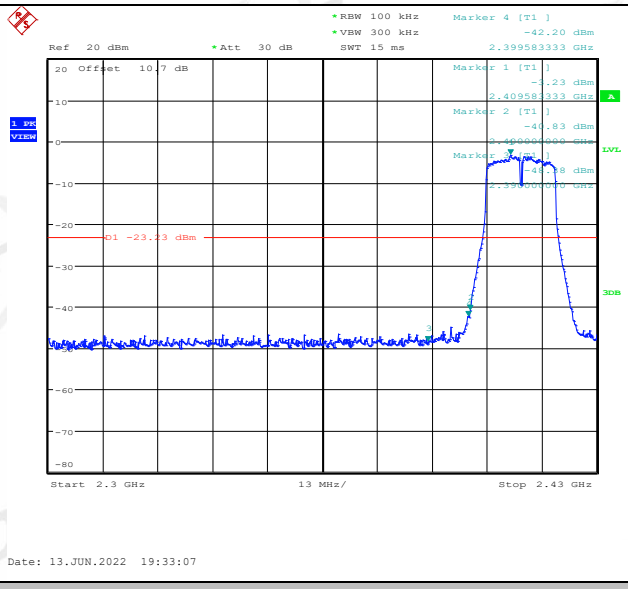

11G_Ant1_High_2462

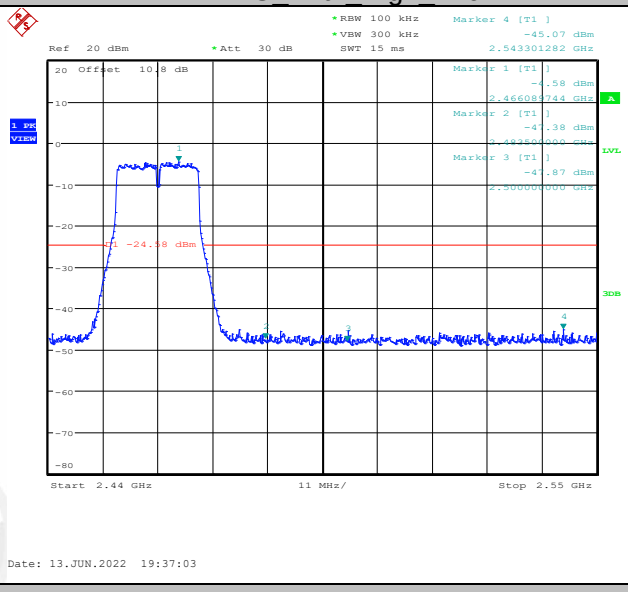

11N20SISO_Ant1_Low_2412

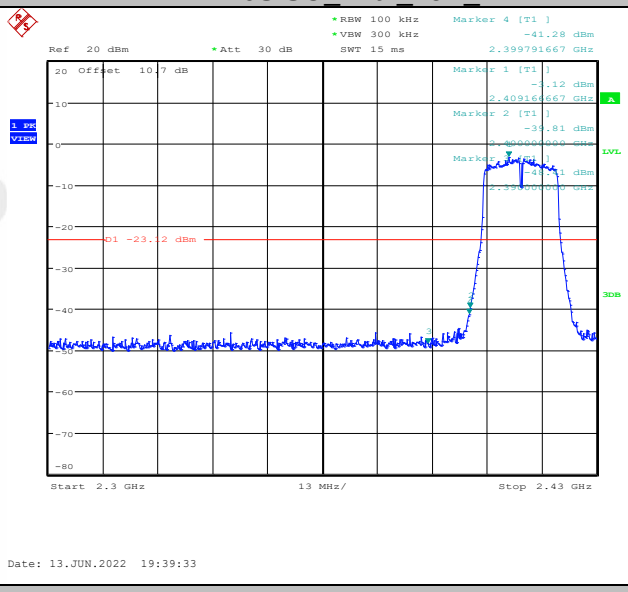

11N20SISO_Ant1_High_2462

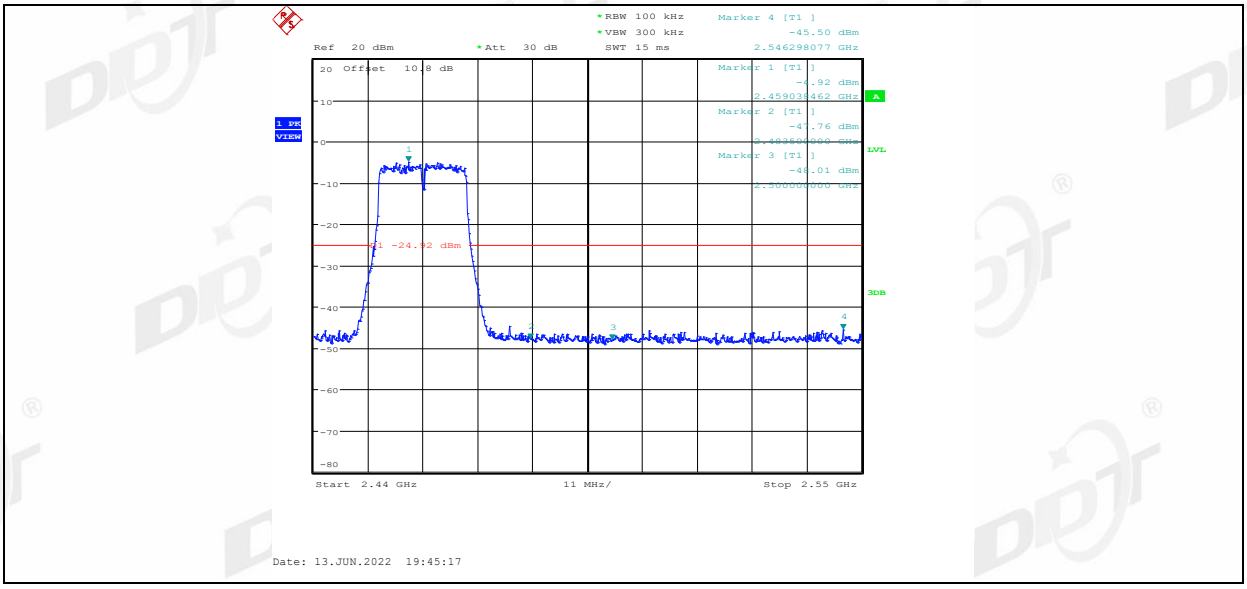
RBW 100 kHz
VBW 300 kHz
SWT 15 ms
Ref 20 dBm
Att 30 dB
Offset 10.8 dB
Marker 4 [T1]
-45.50 dBm
2.546298077 GHz
Marker 1 [T1]
-4.92 dBm
2.459038462 GHz
Marker 2 [T1]
-47.76 dBm
2.483500000 GHz
Marker 3 [T1]
-48.01 dBm
2.500000000 GHz
D1 -24.92 dBm
Start 2.44 GHz
11 MHz/
Stop 2.55 GHz
Date: 13.JUN.2022 19:45:17

8. Radiated Spurious Emissions

8.1. Block diagram of test setup

In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

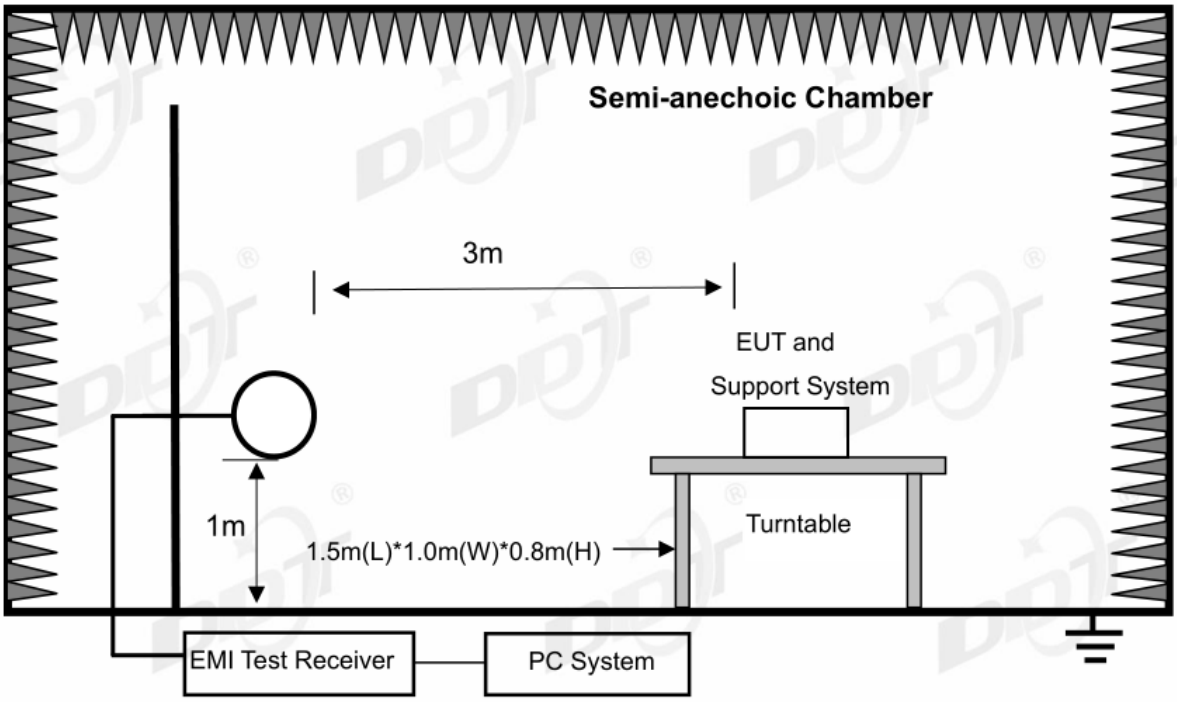

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

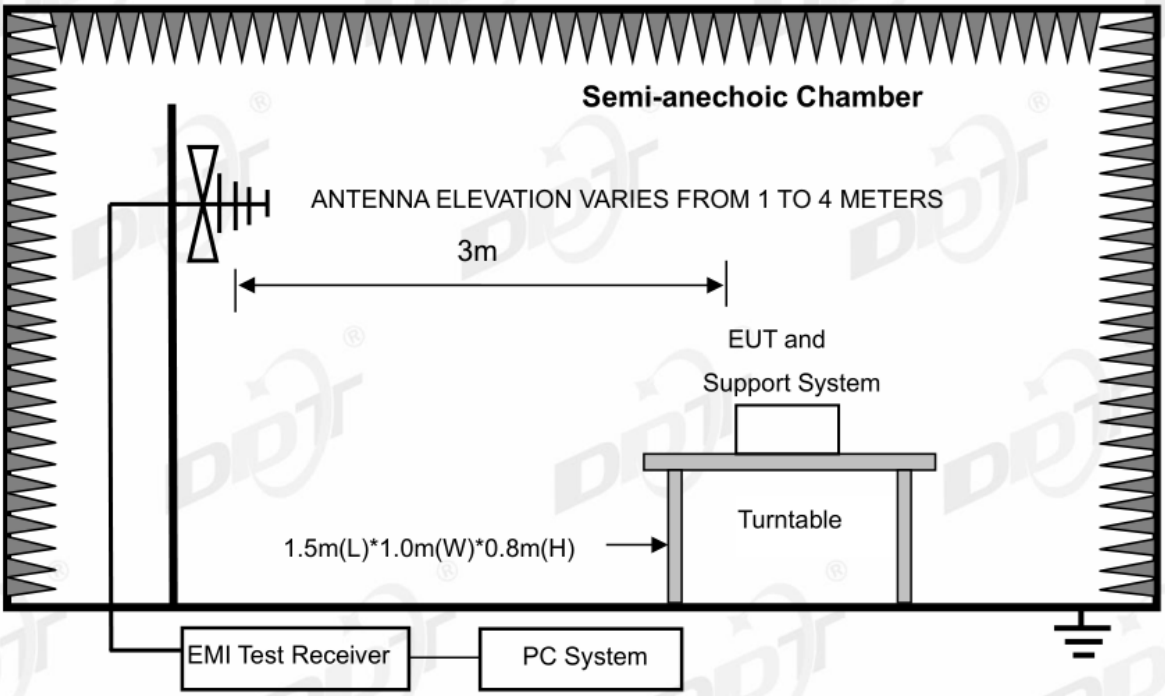

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

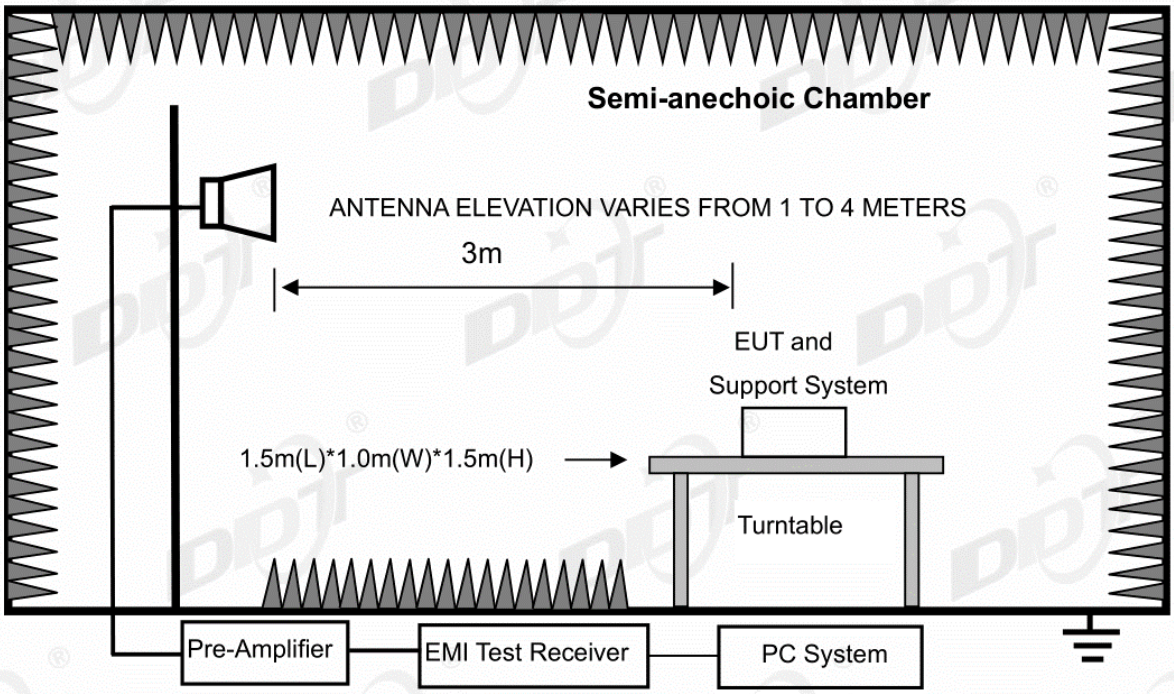

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
[1]0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	([2])
13.36-13.41			

[1]Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

[2]Above 38.6

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$Limit_{3m}(dBuV/m) = Limit_{30m}(dBuV/m) + 40Log(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

8.3. Test Procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi-anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi-anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6,5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or

Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz,110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

8.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is 8022.11b mode)

Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in Ant1 of 802.11b, Tx 2412 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC BELOW 1G.EM6	
Test Date	: 2022-06-09	**Tested By**	: Bairong
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: TX mode
Condition	: Temp:24.5°C,Humi:55%,Press:100.1kPa	**Antenna/Distance**	: 2021 VLUB 9163 #3/3m/VERTICAL
Memo	: 2.4GWIFI		

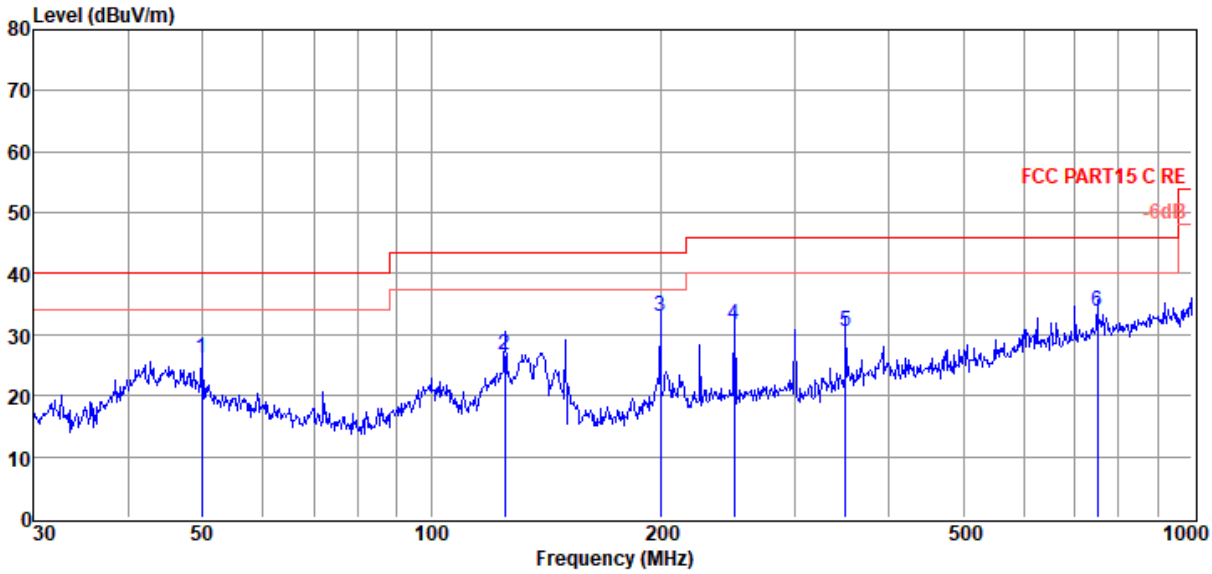

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	49.88	9.80	12.62	3.67	26.09	40.00	-13.91	QP	VERTICAL
2	125.01	13.48	9.00	4.13	26.61	43.50	-16.89	QP	VERTICAL
3	199.99	16.77	11.90	4.45	33.12	43.50	-10.38	QP	VERTICAL
4	250.30	14.59	12.51	4.65	31.75	46.00	-14.25	QP	VERTICAL
5	350.48	10.55	15.09	5.00	30.64	46.00	-15.36	QP	VERTICAL
6	750.11	7.15	20.60	6.10	33.85	46.00	-12.15	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC BELOW 1G.EM6	
Test Date	: 2022-06-09	**Tested By**	: Bairong
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: TX mode
Condition	: Temp:24.5°C,Humi:55%,Press:100.1kPa	**Antenna/Distance**	: 2021 VLUB 9163 #3/3m/HORIZONTAL
Memo	: 2.4GWIFI		

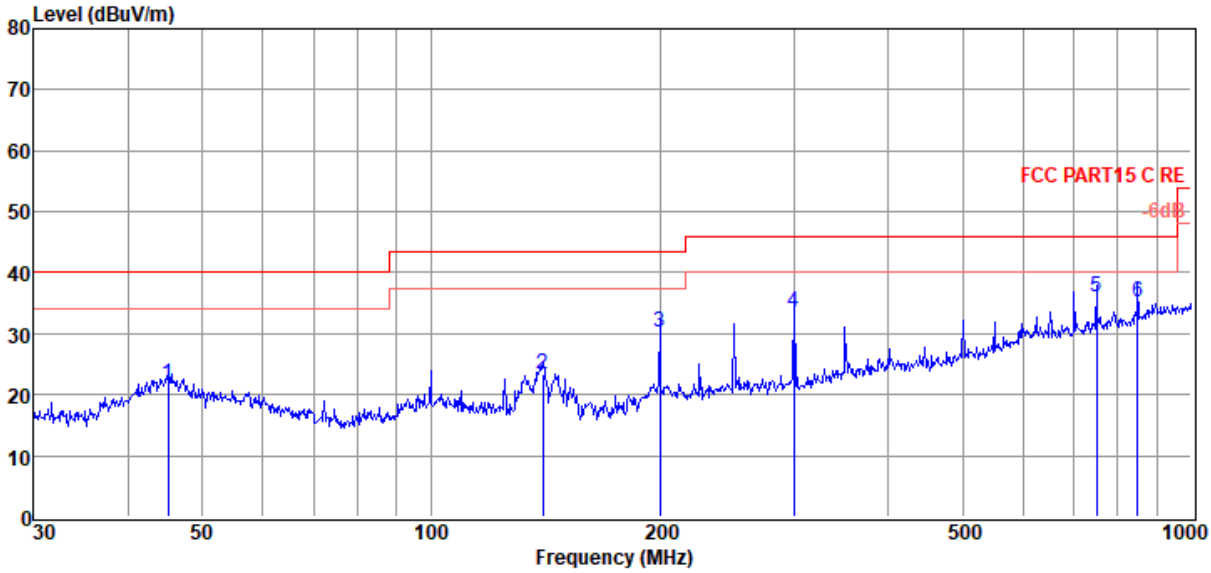

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	45.06	2.96	15.07	3.64	21.67	40.00	-18.33	QP	HORIZONTAL
2	140.34	11.28	7.87	4.21	23.36	43.50	-20.14	QP	HORIZONTAL
3	199.99	13.82	11.90	4.45	30.17	43.50	-13.33	QP	HORIZONTAL
4	300.37	15.37	13.30	4.82	33.49	46.00	-12.51	QP	HORIZONTAL
5	750.11	9.30	20.60	6.10	36.00	46.00	-10.00	QP	HORIZONTAL
6	851.04	7.51	21.32	6.34	35.17	46.00	-10.83	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-11	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11B 2412		

Data: 13

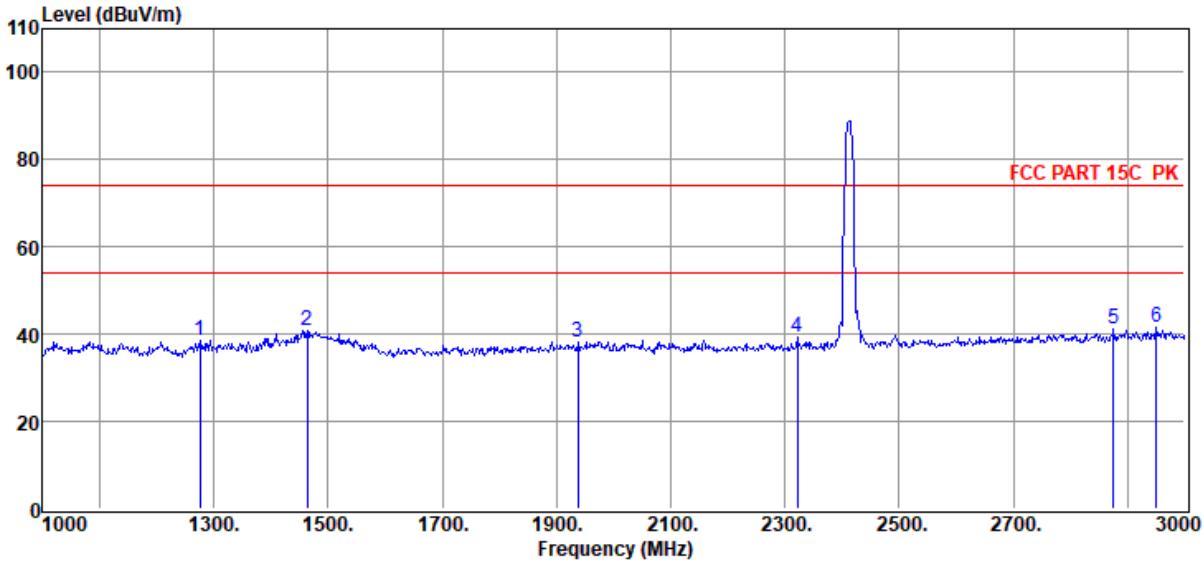

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1276.00	49.72	25.44	38.31	1.25	0.55	38.65	74.00	-35.35	Peak	HORIZONTAL
2	1464.00	51.93	25.41	38.60	1.36	0.58	40.68	74.00	-33.32	Peak	HORIZONTAL
3	1938.00	48.86	26.54	39.31	1.57	0.67	38.33	74.00	-35.67	Peak	HORIZONTAL
4	2322.00	49.07	27.28	39.56	1.69	0.72	39.20	74.00	-34.80	Peak	HORIZONTAL
5	2876.00	49.52	29.03	39.84	1.84	0.78	41.33	74.00	-32.67	Peak	HORIZONTAL
6	2950.00	49.33	29.31	39.88	1.86	0.78	41.40	74.00	-32.60	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11B 2412		

Data: 14

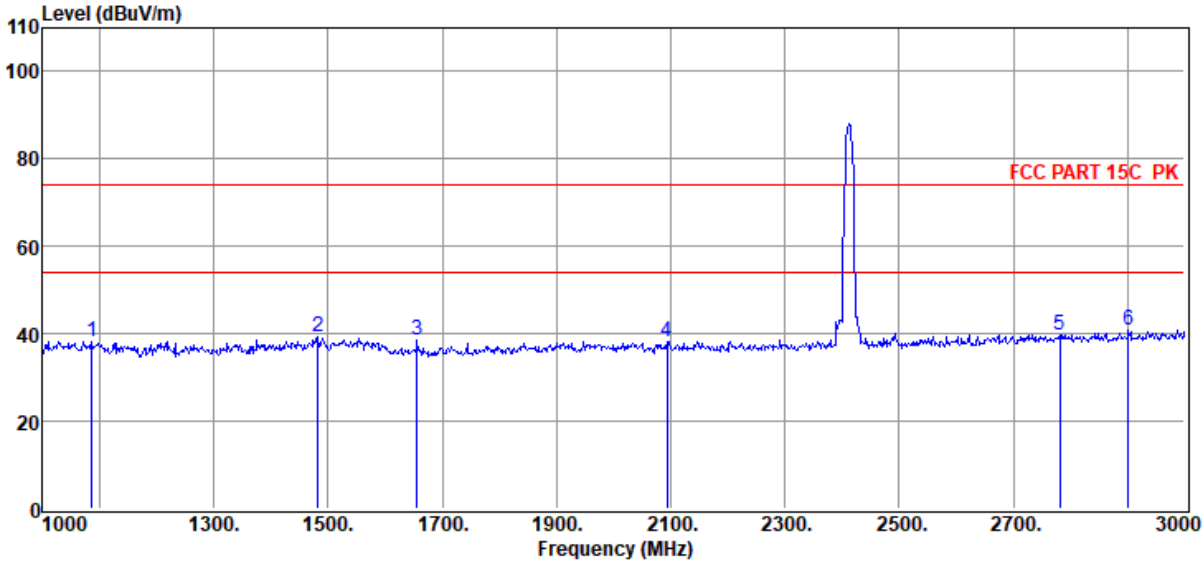

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1086.00	49.17	25.48	38.03	1.15	0.52	38.29	74.00	-35.71	Peak	VERTICAL
2	1482.00	50.50	25.40	38.62	1.37	0.59	39.24	74.00	-34.76	Peak	VERTICAL
3	1656.00	49.53	25.81	38.88	1.45	0.62	38.53	74.00	-35.47	Peak	VERTICAL
4	2094.00	48.56	26.87	39.45	1.63	0.69	38.30	74.00	-35.70	Peak	VERTICAL
5	2782.00	48.42	28.67	39.79	1.81	0.77	39.88	74.00	-34.12	Peak	VERTICAL
6	2902.00	48.82	29.13	39.85	1.84	0.78	40.72	74.00	-33.28	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-11	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11B 2437		

Data: 15

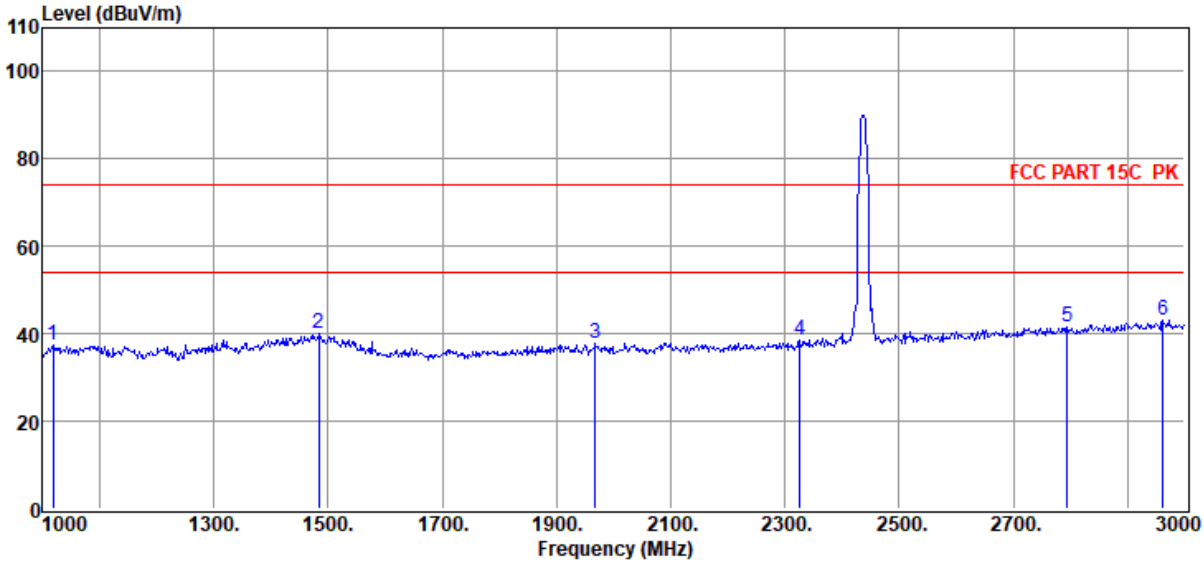

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1018.00	48.86	25.50	37.93	1.11	0.00	37.54	74.00	-36.46	Peak	HORIZONTAL
2	1484.00	51.79	25.40	38.63	1.37	0.00	39.93	74.00	-34.07	Peak	HORIZONTAL
3	1968.00	48.98	26.62	39.35	1.59	0.00	37.84	74.00	-36.16	Peak	HORIZONTAL
4	2326.00	47.96	27.29	39.56	1.69	1.03	38.41	74.00	-35.59	Peak	HORIZONTAL
5	2794.00	48.22	28.72	39.80	1.82	2.52	41.48	74.00	-32.52	Peak	HORIZONTAL
6	2962.00	48.65	29.36	39.88	1.86	3.05	43.04	74.00	-30.96	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11B 2437		

Data: 16

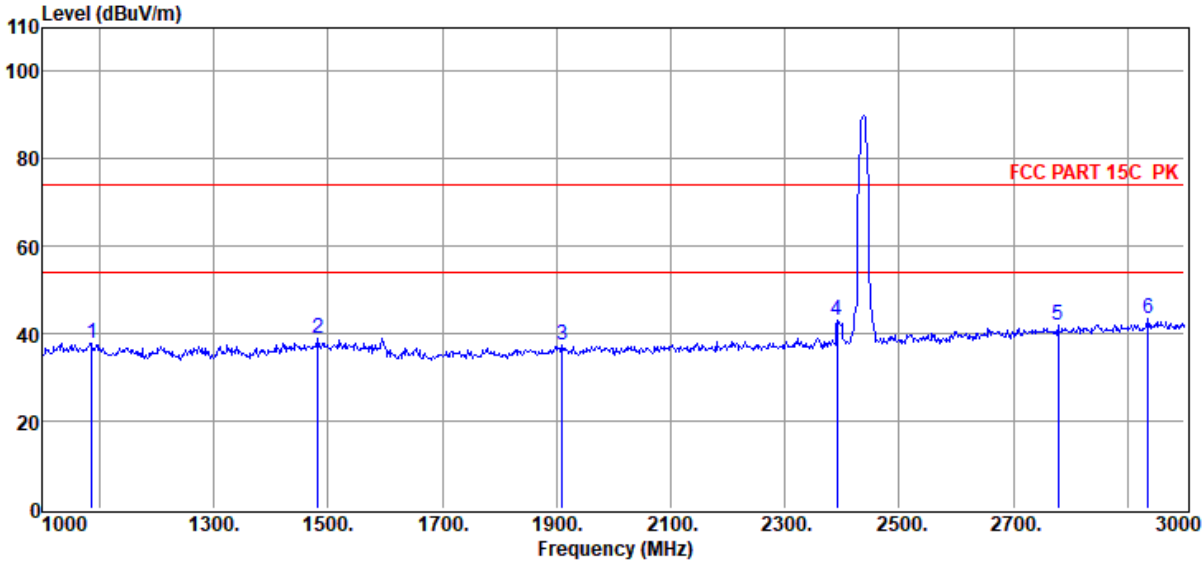

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1086.00	49.28	25.48	38.03	1.15	0.00	37.88	74.00	-36.12	Peak	VERTICAL
2	1482.00	50.62	25.40	38.62	1.37	0.00	38.77	74.00	-35.23	Peak	VERTICAL
3	1910.00	48.61	26.47	39.27	1.56	0.00	37.37	74.00	-36.63	Peak	VERTICAL
4	2392.00	52.39	27.41	39.60	1.71	1.24	43.15	74.00	-30.85	Peak	VERTICAL
5	2778.00	48.85	28.66	39.79	1.81	2.47	42.00	74.00	-32.00	Peak	VERTICAL
6	2936.00	49.38	29.26	39.87	1.85	2.97	43.59	74.00	-30.41	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11B 2462		

Data: 17

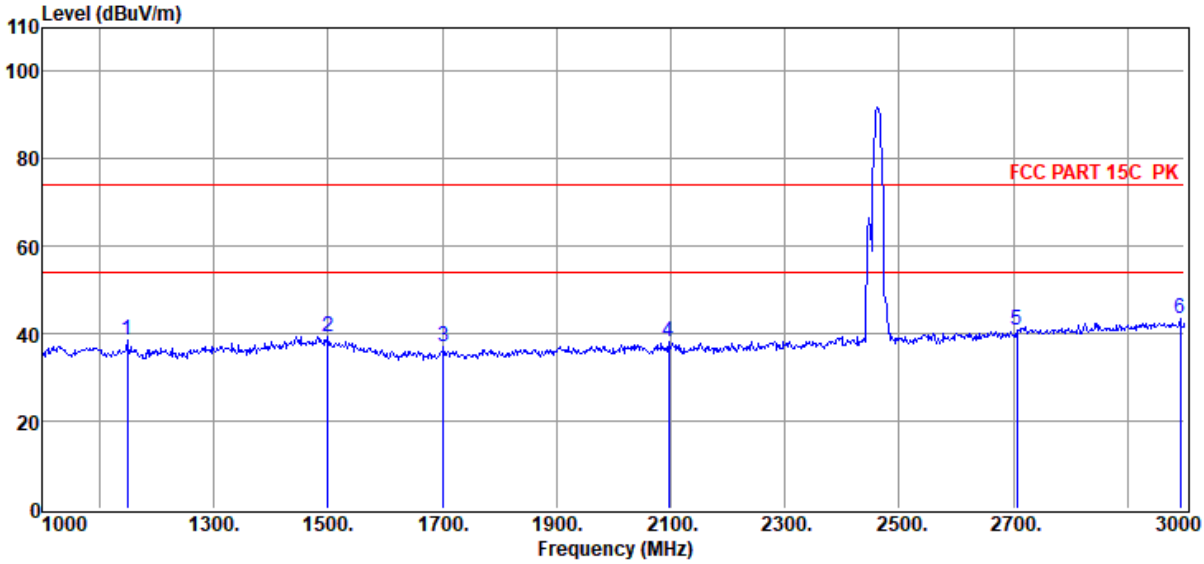

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1148.00	50.05	25.47	38.12	1.18	0.00	38.58	74.00	-35.42	Peak	HORIZONTAL
2	1500.00	51.11	25.40	38.65	1.38	0.00	39.24	74.00	-34.76	Peak	HORIZONTAL
3	1702.00	48.71	25.93	38.95	1.47	0.00	37.16	74.00	-36.84	Peak	HORIZONTAL
4	2096.00	48.93	26.87	39.45	1.63	0.30	38.28	74.00	-35.72	Peak	HORIZONTAL
5	2706.00	48.14	28.38	39.75	1.79	2.24	40.80	74.00	-33.20	Peak	HORIZONTAL
6	2992.00	48.95	29.47	39.90	1.87	3.14	43.53	74.00	-30.47	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11B 2462		

Data: 18

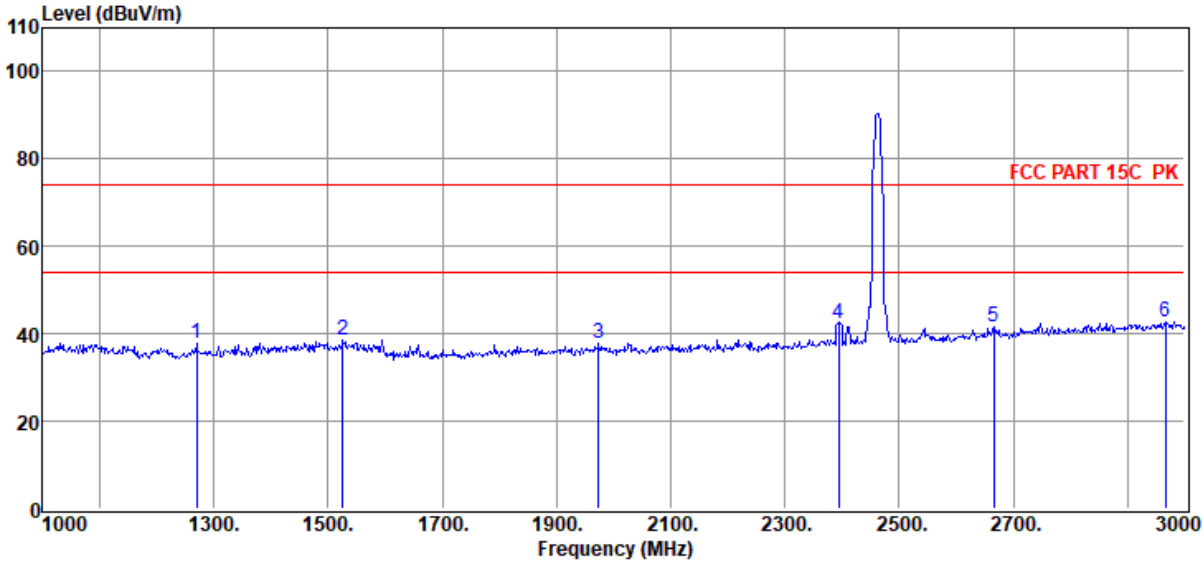

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1270.00	49.59	25.45	38.31	1.25	0.00	37.98	74.00	-36.02	Peak	VERTICAL
2	1526.00	50.55	25.47	38.69	1.39	0.00	38.72	74.00	-35.28	Peak	VERTICAL
3	1974.00	48.86	26.63	39.36	1.59	0.00	37.72	74.00	-36.28	Peak	VERTICAL
4	2394.00	51.62	27.41	39.60	1.71	1.25	42.39	74.00	-31.61	Peak	VERTICAL
5	2666.00	49.25	28.23	39.73	1.78	2.11	41.64	74.00	-32.36	Peak	VERTICAL
6	2966.00	48.37	29.37	39.88	1.86	3.06	42.78	74.00	-31.22	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-11	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11B 2412		

Data: 19

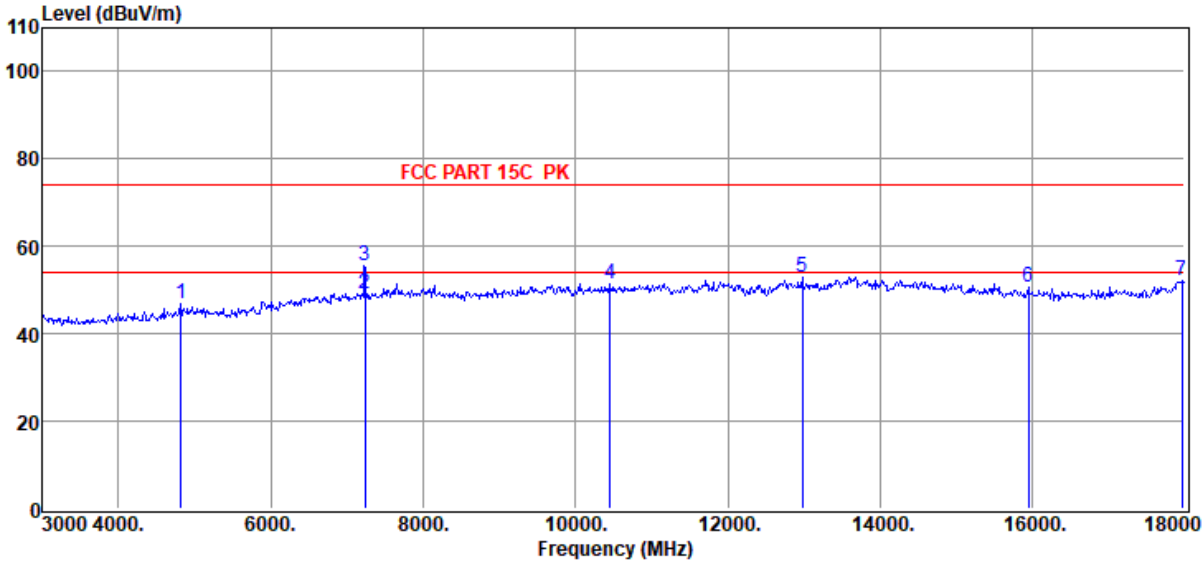

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4824.00	49.96	32.54	40.36	2.48	2.16	46.78	74.00	-27.22	Peak	HORIZONTAL
2	7236.00	47.21	36.19	39.72	3.08	2.26	49.02	54.00	-4.98	Average	HORIZONTAL
3	7236.00	53.66	36.19	39.72	3.08	2.26	55.47	74.00	-18.53	Peak	HORIZONTAL
4	10455.00	46.68	38.95	40.42	3.67	2.43	51.31	74.00	-22.69	Peak	HORIZONTAL
5	12975.00	46.24	39.57	40.39	4.37	2.95	52.74	74.00	-21.26	Peak	HORIZONTAL
6	15945.00	44.95	38.00	39.88	4.60	3.09	50.76	74.00	-23.24	Peak	HORIZONTAL
7	17970.00	41.80	42.31	40.68	4.95	3.78	52.16	74.00	-21.84	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-11	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11B 2412		

Data: 20

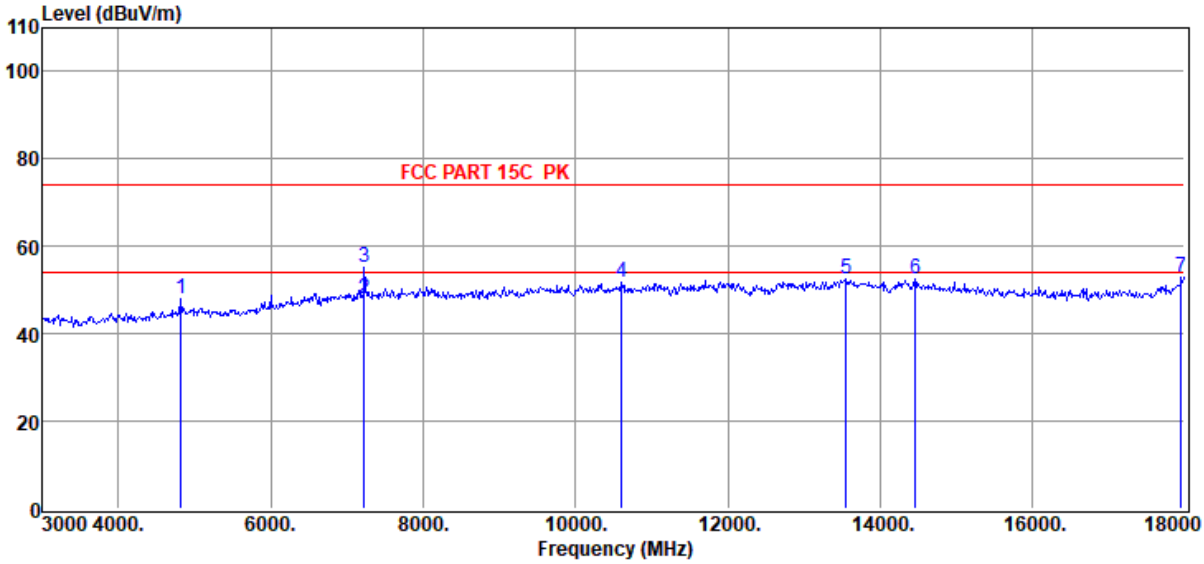

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4815.00	51.37	32.51	40.36	2.47	2.16	48.15	74.00	-25.85	Peak	VERTICAL
2	7230.00	46.24	36.18	39.72	3.08	2.26	48.04	54.00	-5.96	Average	VERTICAL
3	7230.00	53.49	36.18	39.72	3.08	2.26	55.29	74.00	-18.71	Peak	VERTICAL
4	10605.00	47.14	39.06	40.36	3.70	2.42	51.96	74.00	-22.04	Peak	VERTICAL
5	13560.00	45.51	39.99	40.01	4.05	2.93	52.47	74.00	-21.53	Peak	VERTICAL
6	14460.00	45.35	39.90	39.65	4.36	2.77	52.73	74.00	-21.27	Peak	VERTICAL
7	17955.00	42.57	42.22	40.67	4.95	3.78	52.85	74.00	-21.15	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-11	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11B 2437		

Data: 21

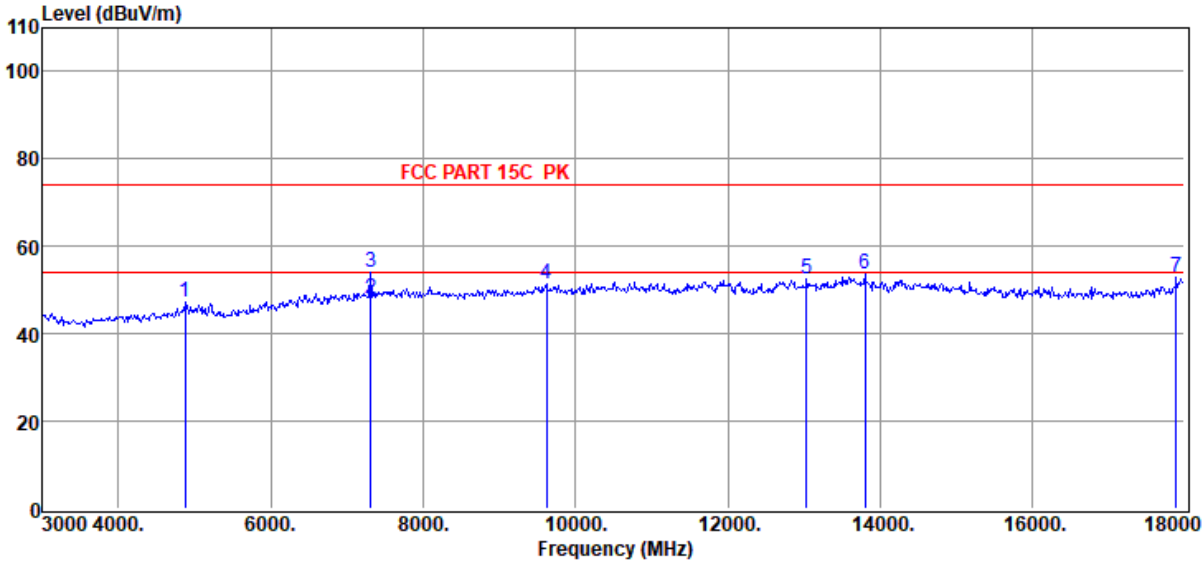

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4874.00	50.33	32.70	40.37	2.49	2.17	47.32	74.00	-26.68	Peak	HORIZONTAL
2	7311.00	46.19	36.25	39.73	3.09	2.27	48.07	54.00	-5.93	Average	HORIZONTAL
3	7311.00	52.35	36.25	39.73	3.09	2.27	54.23	74.00	-19.77	Peak	HORIZONTAL
4	9615.00	47.25	38.63	40.33	3.63	2.36	51.54	74.00	-22.46	Peak	HORIZONTAL
5	13035.00	45.83	39.63	40.38	4.37	2.96	52.41	74.00	-21.59	Peak	HORIZONTAL
6	13800.00	46.40	39.94	39.84	4.31	2.91	53.72	74.00	-20.28	Peak	HORIZONTAL
7	17895.00	43.12	41.85	40.64	4.93	3.76	53.02	74.00	-20.98	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-11	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11B 2437		

Data: 22

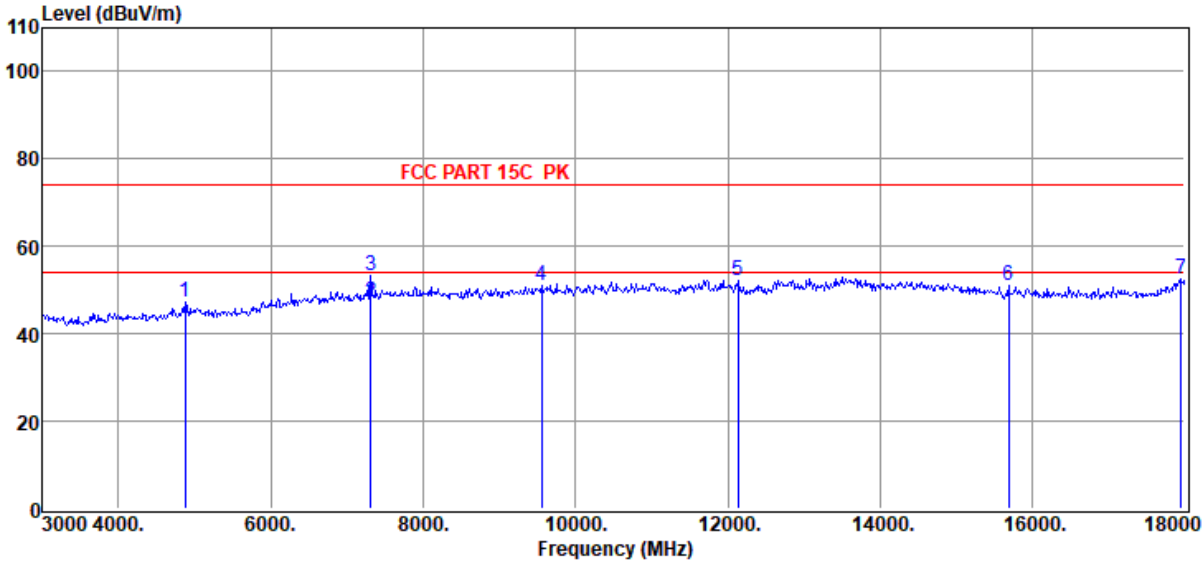

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4874.00	50.09	32.70	40.37	2.49	2.17	47.08	74.00	-26.92	Peak	VERTICAL
2	7311.00	45.27	36.25	39.73	3.09	2.27	47.15	54.00	-6.85	Average	VERTICAL
3	7311.00	51.36	36.25	39.73	3.09	2.27	53.24	74.00	-20.76	Peak	VERTICAL
4	9555.00	46.75	38.67	40.29	3.63	2.35	51.11	74.00	-22.89	Peak	VERTICAL
5	12135.00	46.85	39.15	40.14	3.96	2.48	52.30	74.00	-21.70	Peak	VERTICAL
6	15690.00	44.85	38.46	39.81	4.58	2.96	51.04	74.00	-22.96	Peak	VERTICAL
7	17955.00	42.32	42.22	40.67	4.95	3.78	52.60	74.00	-21.40	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-11	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11B 2462		

Data: 23

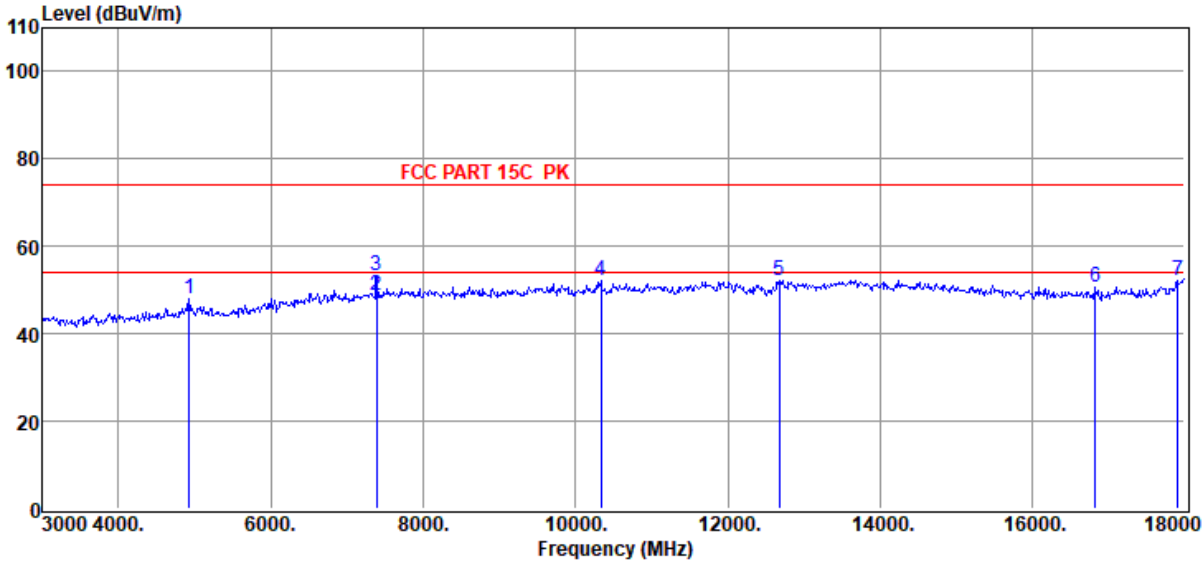

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4924.00	50.99	32.86	40.38	2.51	2.18	48.16	74.00	-25.84	Peak	HORIZONTAL
2	7386.00	46.78	36.31	39.74	3.11	2.27	48.73	54.00	-5.27	Average	HORIZONTAL
3	7386.00	51.33	36.31	39.74	3.11	2.27	53.28	74.00	-20.72	Peak	HORIZONTAL
4	10335.00	47.80	38.80	40.47	3.67	2.45	52.25	74.00	-21.75	Peak	HORIZONTAL
5	12675.00	46.50	39.21	40.30	3.95	2.78	52.14	74.00	-21.86	Peak	HORIZONTAL
6	16830.00	44.43	38.30	40.07	4.72	3.44	50.82	74.00	-23.18	Peak	HORIZONTAL
7	17910.00	42.16	41.94	40.65	4.93	3.76	52.14	74.00	-21.86	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-11	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11B 2462		

Data: 24

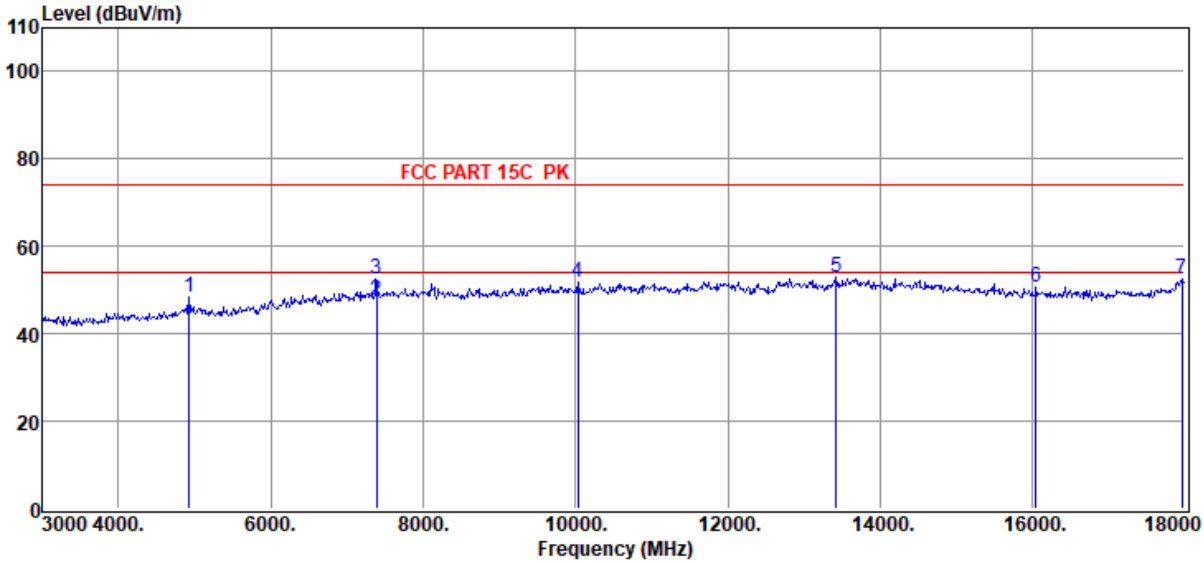

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	4924.00	51.28	32.86	40.38	2.51	2.18	48.45	74.00	-25.55	Peak	VERTICAL
2	7386.00	45.66	36.31	39.74	3.11	2.27	47.61	54.00	-6.39	Average	VERTICAL
3	7386.00	50.51	36.31	39.74	3.11	2.27	52.46	74.00	-21.54	Peak	VERTICAL
4	10035.00	47.79	38.44	40.59	3.67	2.48	51.79	74.00	-22.21	Peak	VERTICAL
5	13425.00	46.07	39.94	40.10	4.05	2.93	52.89	74.00	-21.11	Peak	VERTICAL
6	16050.00	44.99	37.90	39.91	4.61	3.14	50.73	74.00	-23.27	Peak	VERTICAL
7	17970.00	42.31	42.31	40.68	4.95	3.78	52.67	74.00	-21.33	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	≥span/RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test Result

EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	/	/	/
	CH6	Pass		/	/
	CH11	Pass		/	/

9.5. original test data

11B_Ant1_2412_0~Reference

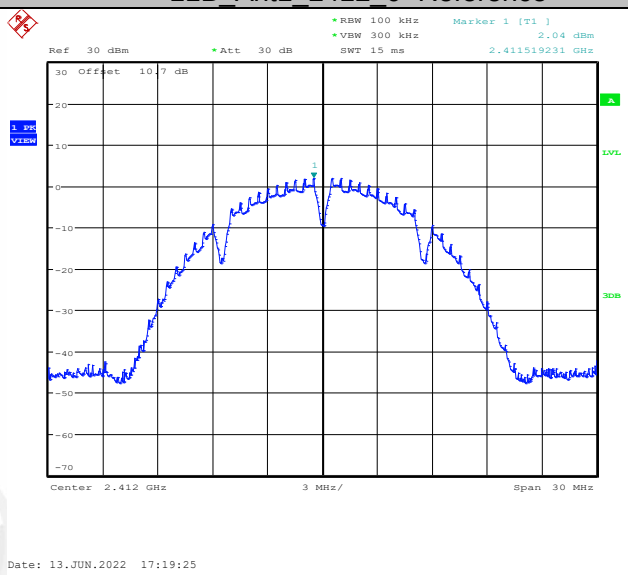

11B_Ant1_2412_30~1000

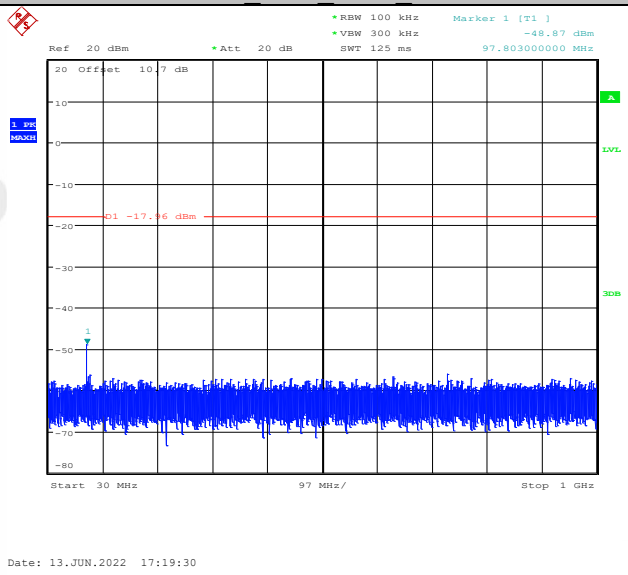

11B_Ant1_2412_1000~26500

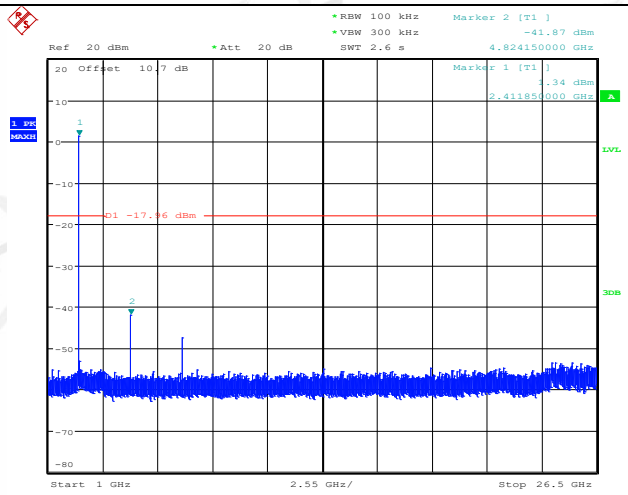

11B_Ant1_2437_0~Reference

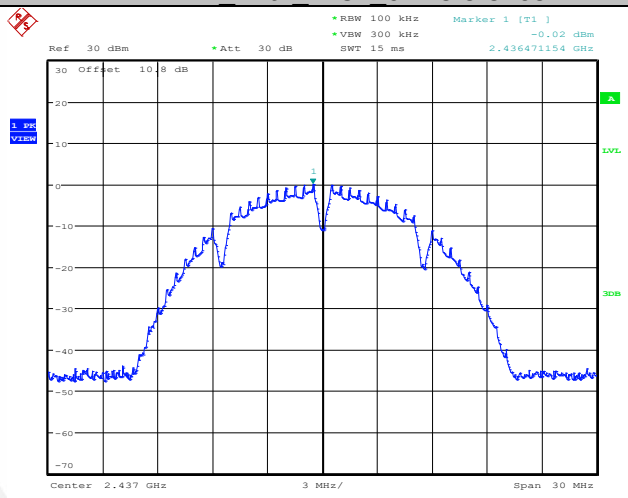

11B_Ant1_2437_30~1000

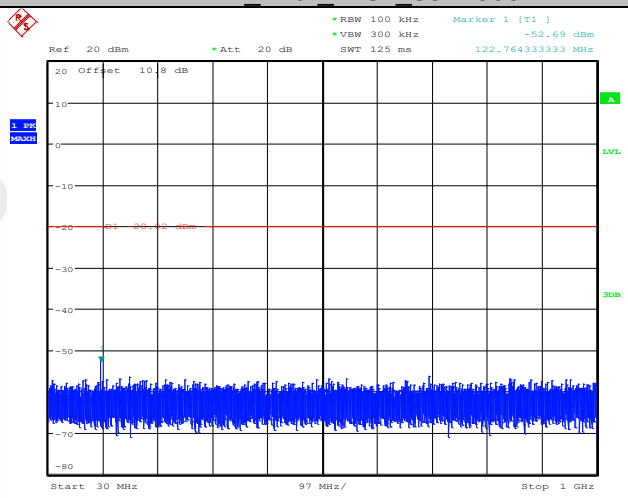

11B_Ant1_2437_1000~26500

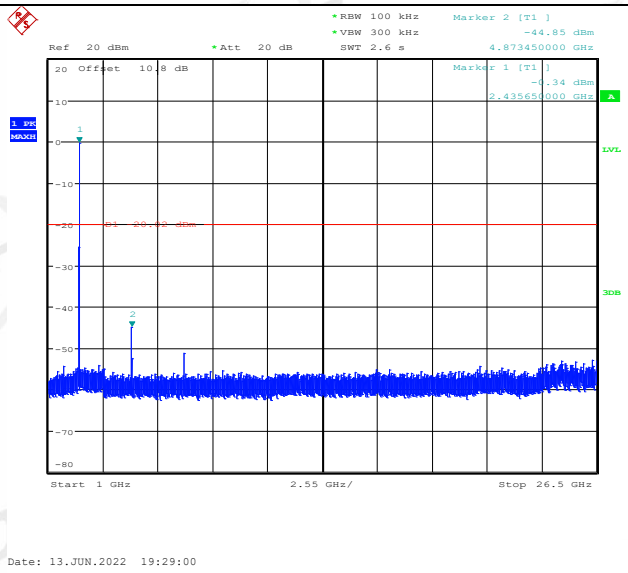

11B_Ant1_2462_0~Reference

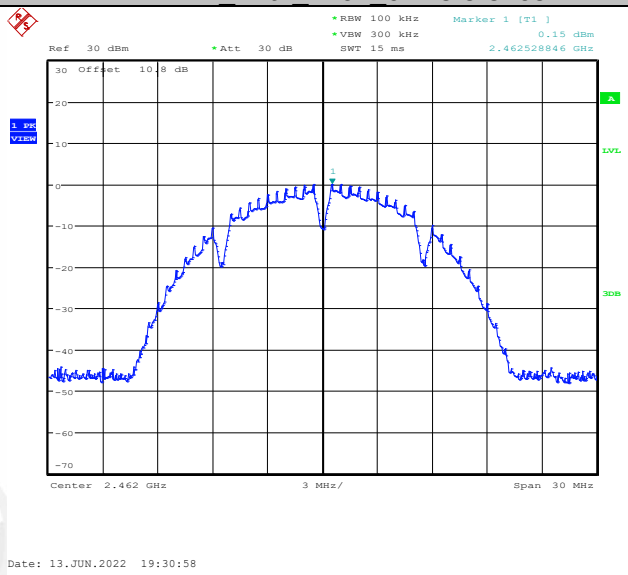

11B_Ant1_2462_30~1000

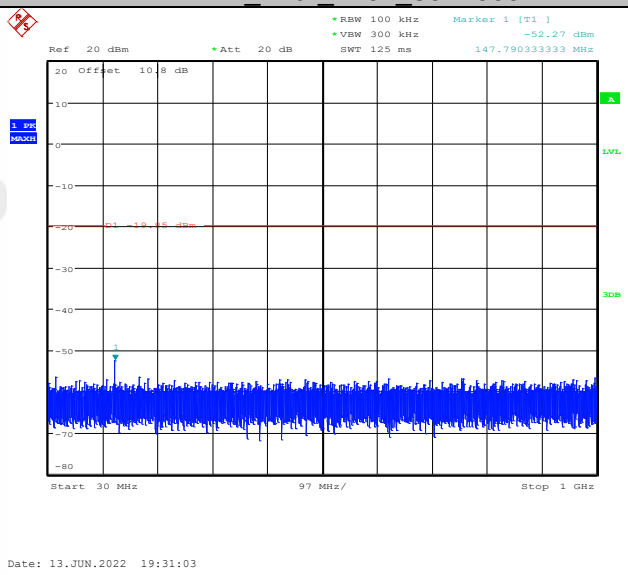

11B_Ant1_2462_1000~26500

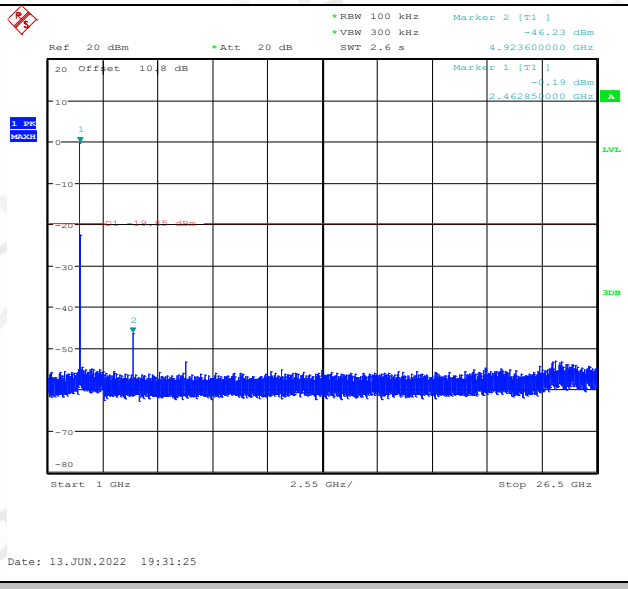

11G_Ant1_2412_0~Reference

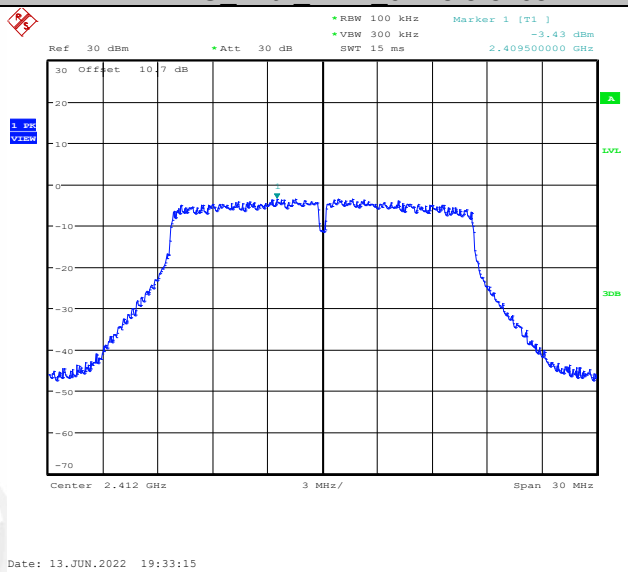

11G_Ant1_2412_30~1000

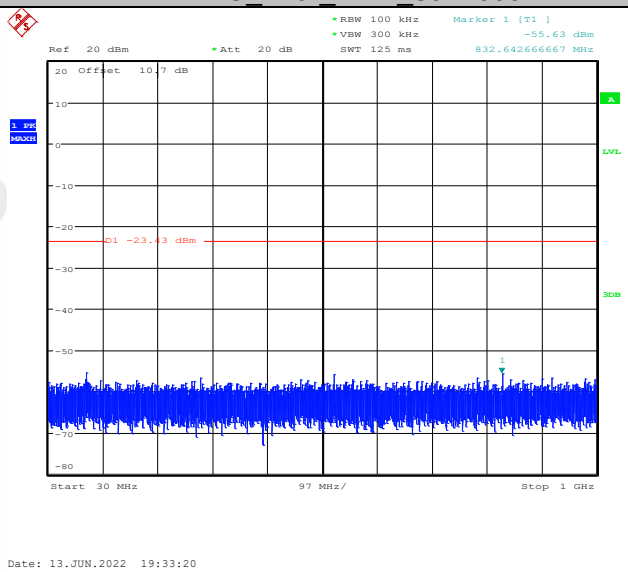

11G_Ant1_2412_1000~26500

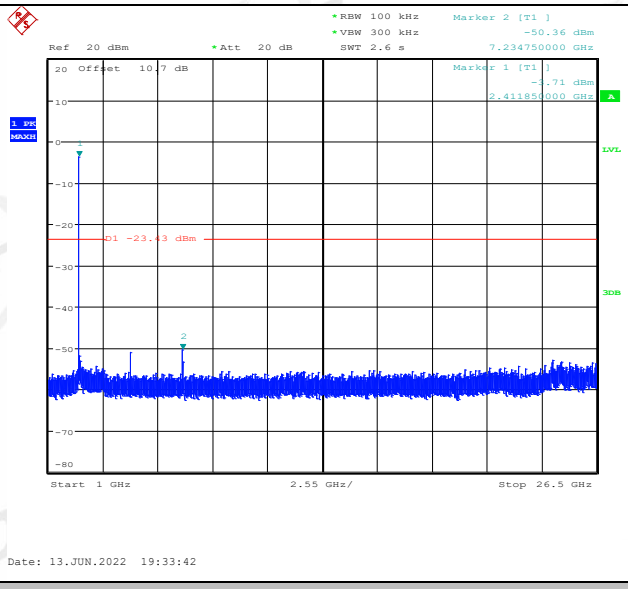

11G_Ant1_2437_0~Reference

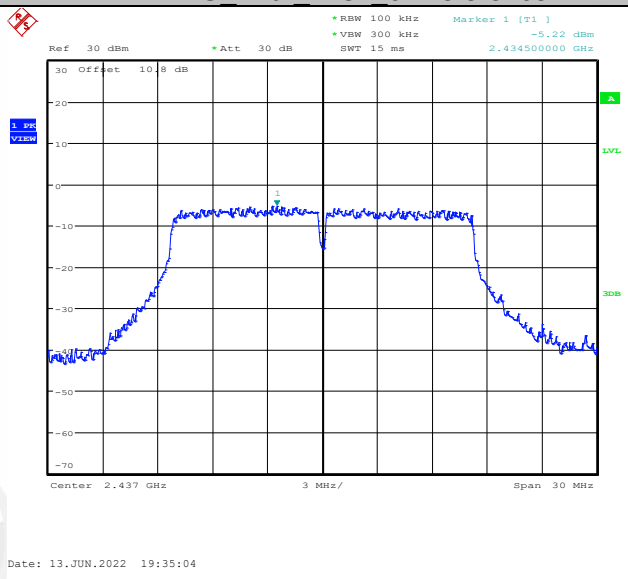

11G_Ant1_2437_30~1000

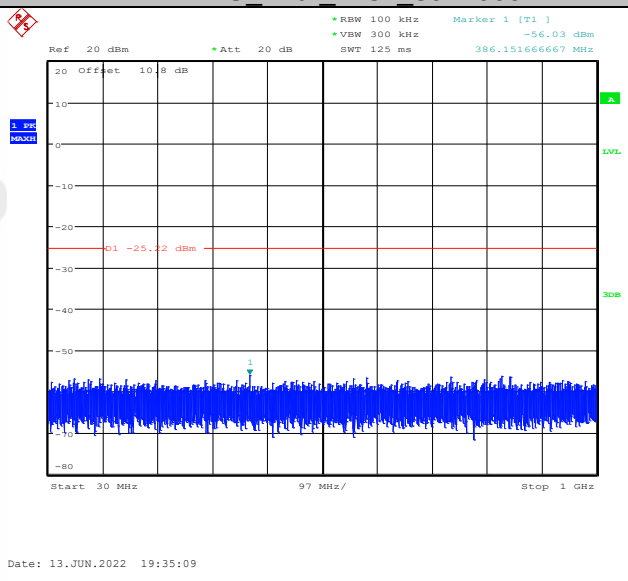

11G_Ant1_2437_1000~26500

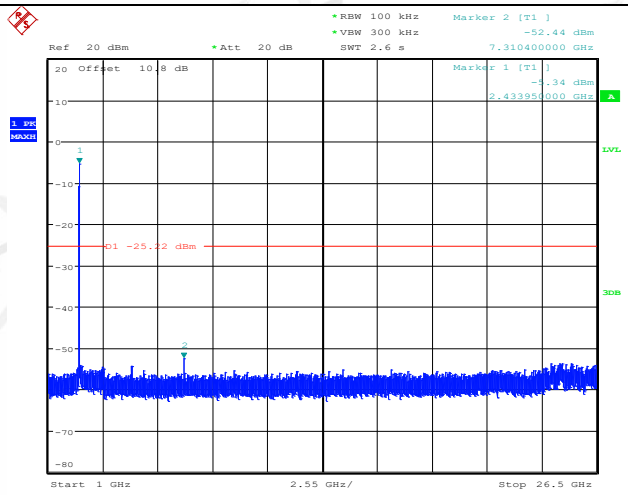

11G_Ant1_2462_0~Reference

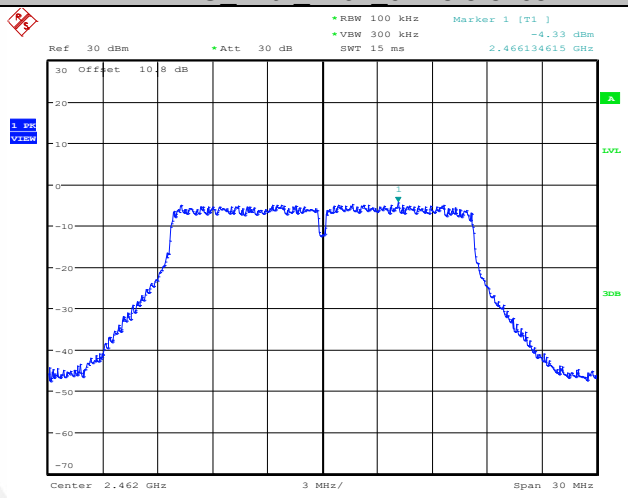

11G_Ant1_2462_30~1000

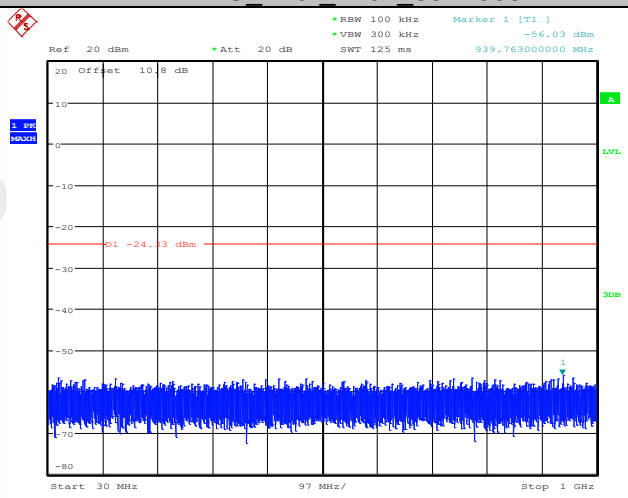

11G_Ant1_2462_1000~26500

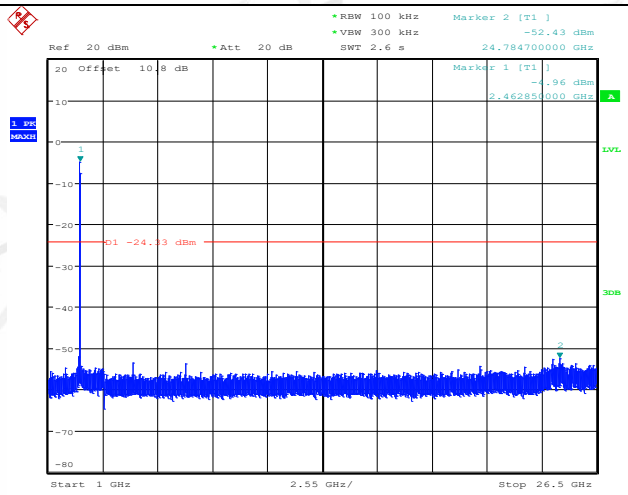

11N20SISO_Ant1_2412_0~Reference

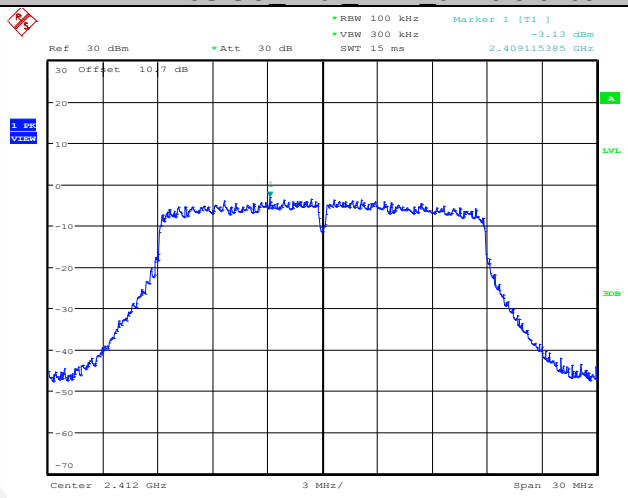

11N20SISO_Ant1_2412_30~1000

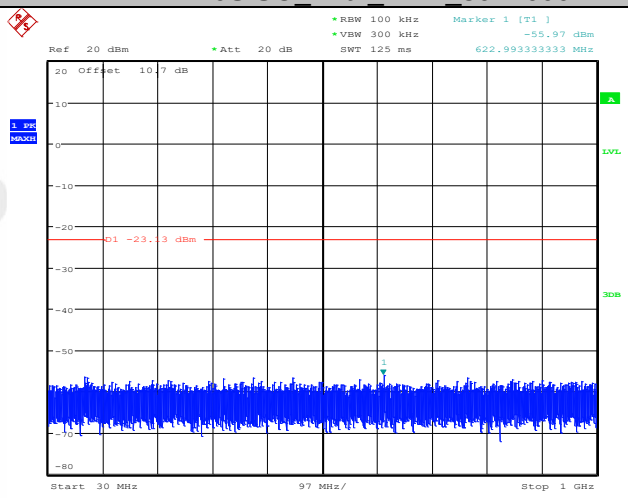

11N20SISO_Ant1_2412_1000~26500

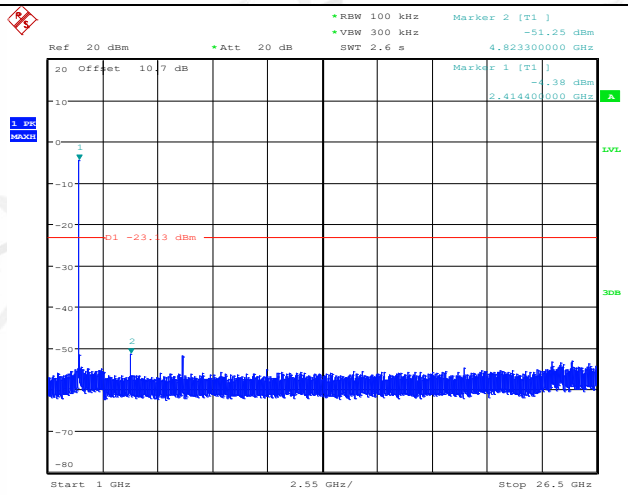

11N20SISO_Ant1_2437_0~Reference

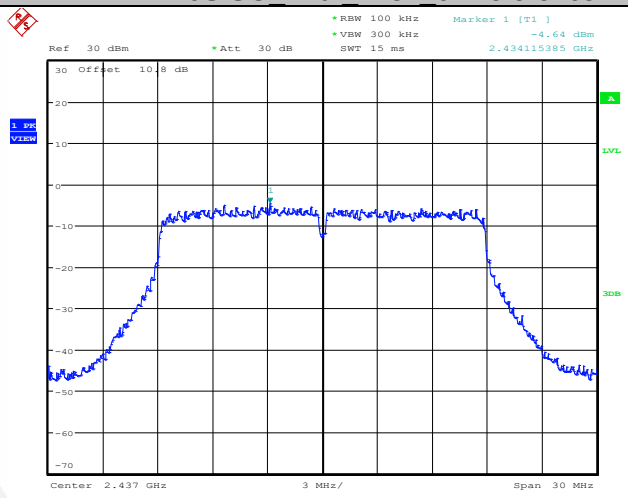

11N20SISO_Ant1_2437_30~1000

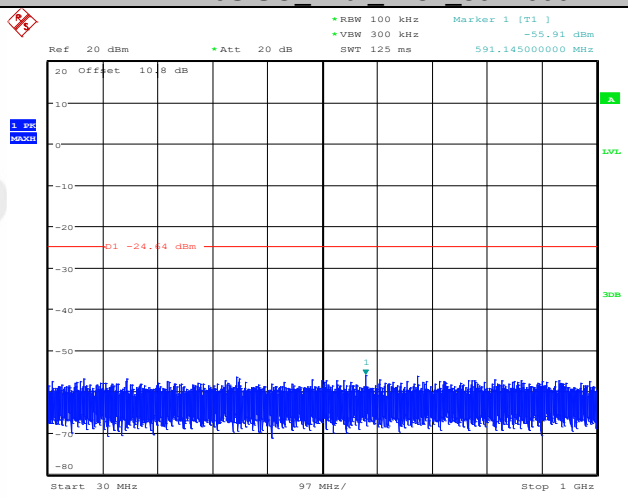

11N20SISO_Ant1_2437_1000~26500

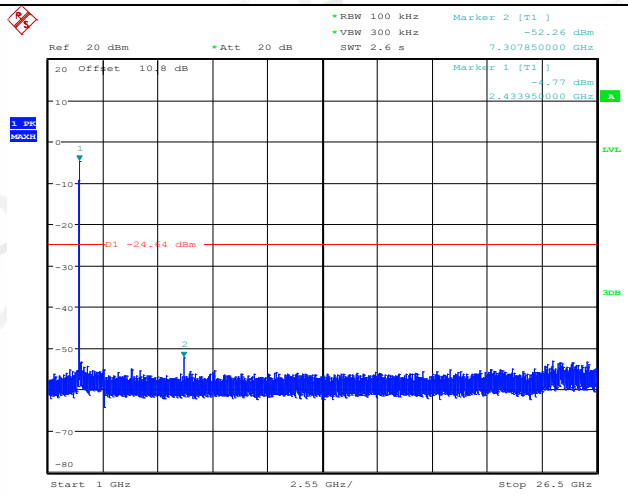

11N20SISO_Ant1_2462_0~Reference

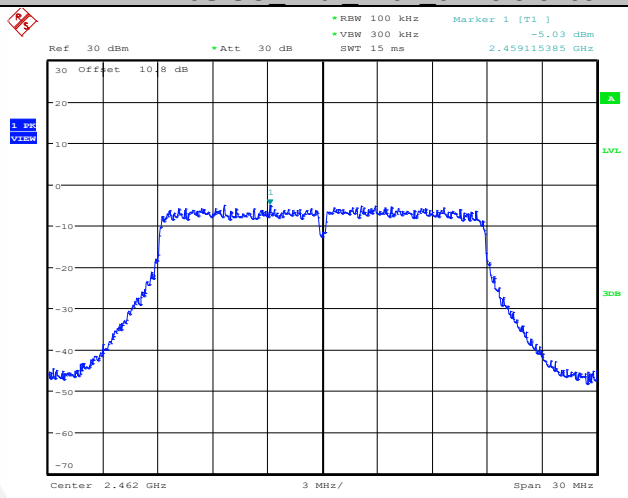

11N20SISO_Ant1_2462_30~1000

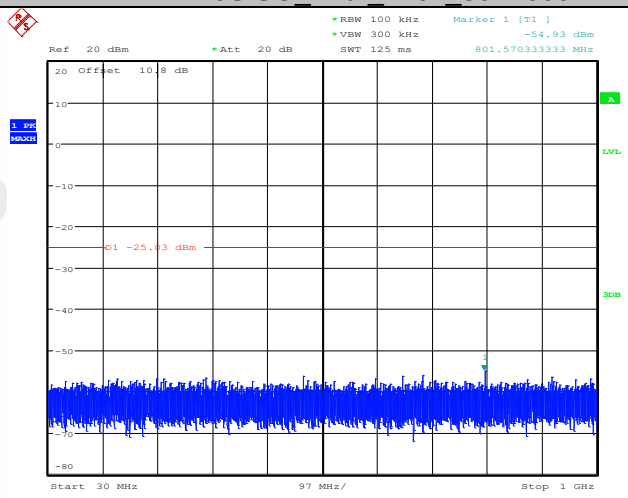

11N20SISO_Ant1_2462_1000~26500

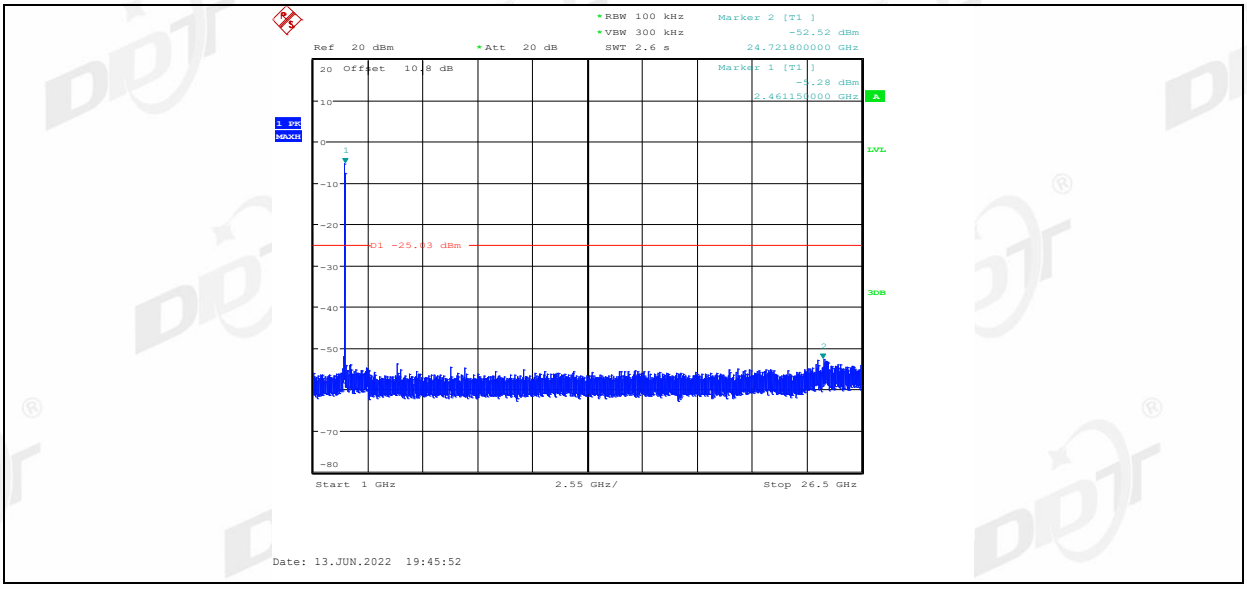
RBW 100 kHz
VBW 300 kHz
SWT 2.6 s
Marker 2 [T1]
-52.52 dBm
24.721800000 GHz
Ref 20 dBm
Att 20 dB
Offset 10.8 dB
Marker 1 [T1]
-5.28 dBm
2.461150000 GHz
D1 -25.03 dBm
Start 1 GHz
2.55 GHz/
Stop 26.5 GHz
Date: 13.JUN.2022 19:45:52

10. Radiated Band Edge Compliance

10.1. Block diagram of test setup

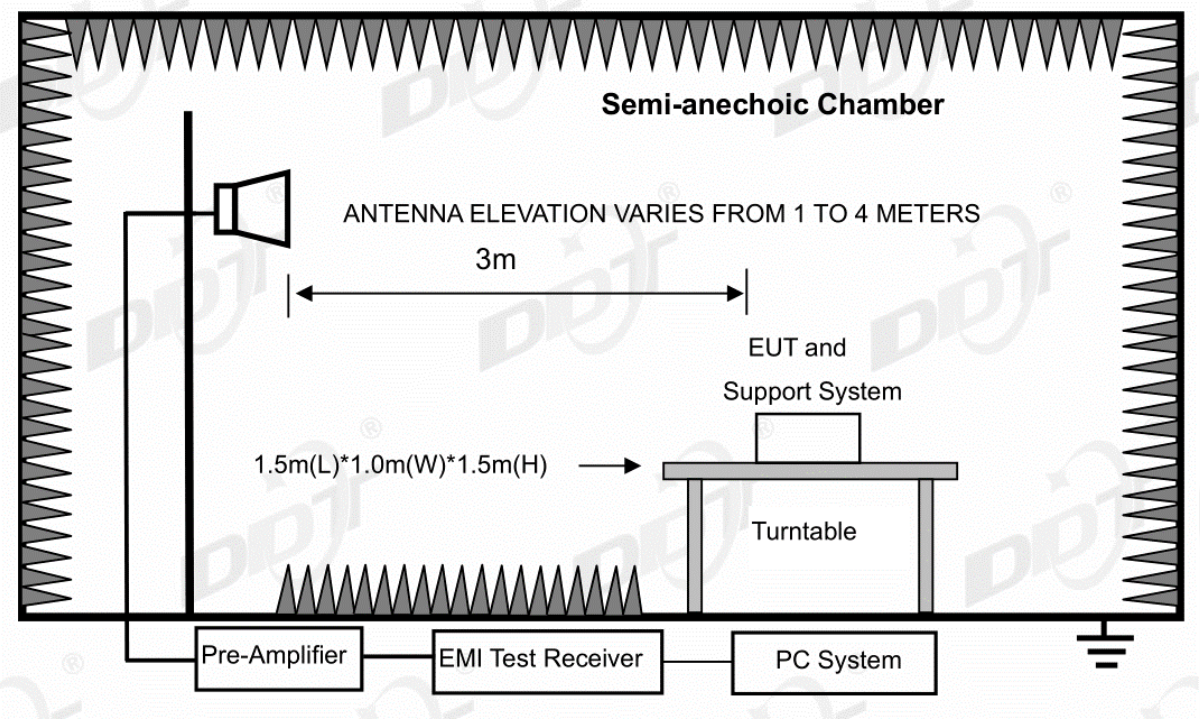

10.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with FCC 15.209 limits.

10.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2430 MHz and 2450 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

10.4. Test result

Pass. (See below detailed test result)

Note: All mode were tested and only the worst case was recorded this report.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11B 2412		

Data: 1

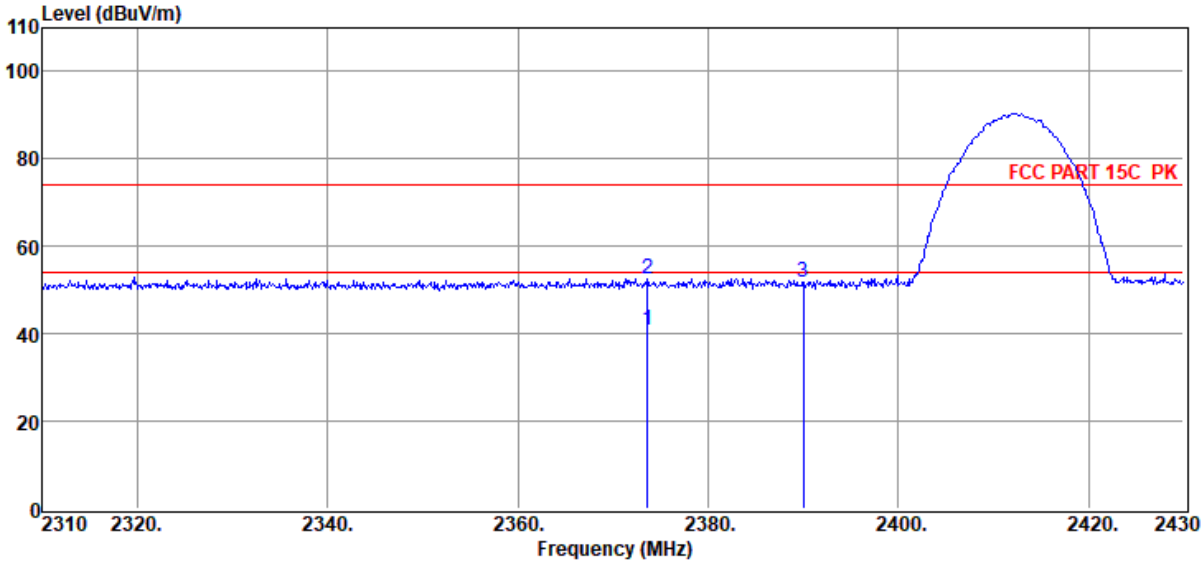

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2373.60	10.98	27.37	0.00	1.70	0.72	40.77	54.00	-13.23	Average	HORIZONTAL
2	2373.60	22.77	27.37	0.00	1.70	0.72	52.56	74.00	-21.44	Peak	HORIZONTAL
3	2390.04	21.82	27.40	0.00	1.71	0.72	51.65	74.00	-22.35	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11B 2412		

Data: 2

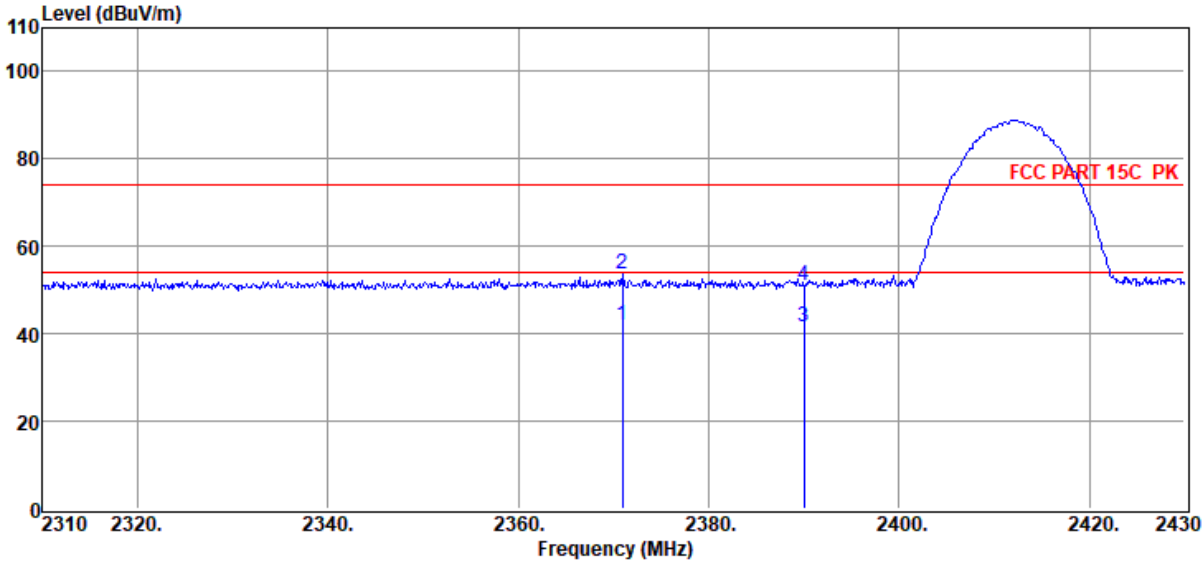

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2370.96	12.12	27.37	0.00	1.70	0.72	41.91	54.00	-12.09	Average	VERTICAL
2	2370.96	23.98	27.37	0.00	1.70	0.72	53.77	74.00	-20.23	Peak	VERTICAL
3	2390.04	11.78	27.40	0.00	1.71	0.72	41.61	54.00	-12.39	Average	VERTICAL
4	2390.04	21.04	27.40	0.00	1.71	0.72	50.87	74.00	-23.13	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11B 2462		

Data: 3

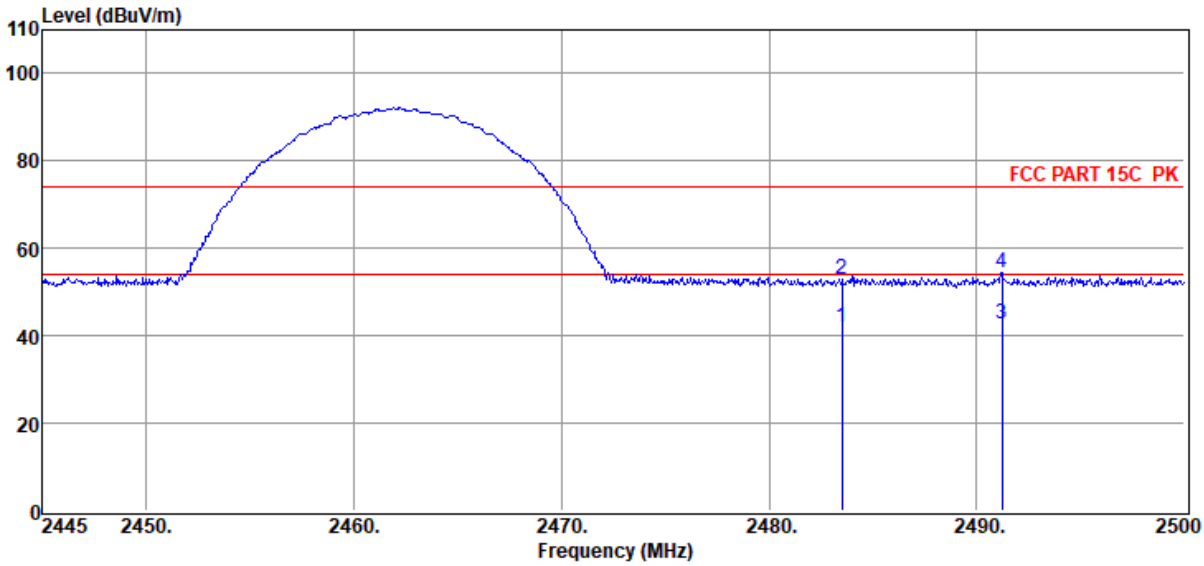

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	12.03	27.57	0.00	1.74	0.73	42.07	54.00	-11.93	Average	HORIZONTAL
2	2483.50	22.73	27.57	0.00	1.74	0.73	52.77	74.00	-21.23	Peak	HORIZONTAL
3	2491.20	12.74	27.58	0.00	1.74	0.73	42.79	54.00	-11.21	Average	HORIZONTAL
4	2491.20	24.52	27.58	0.00	1.74	0.73	54.57	74.00	-19.43	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11B 2462		

Data: 4

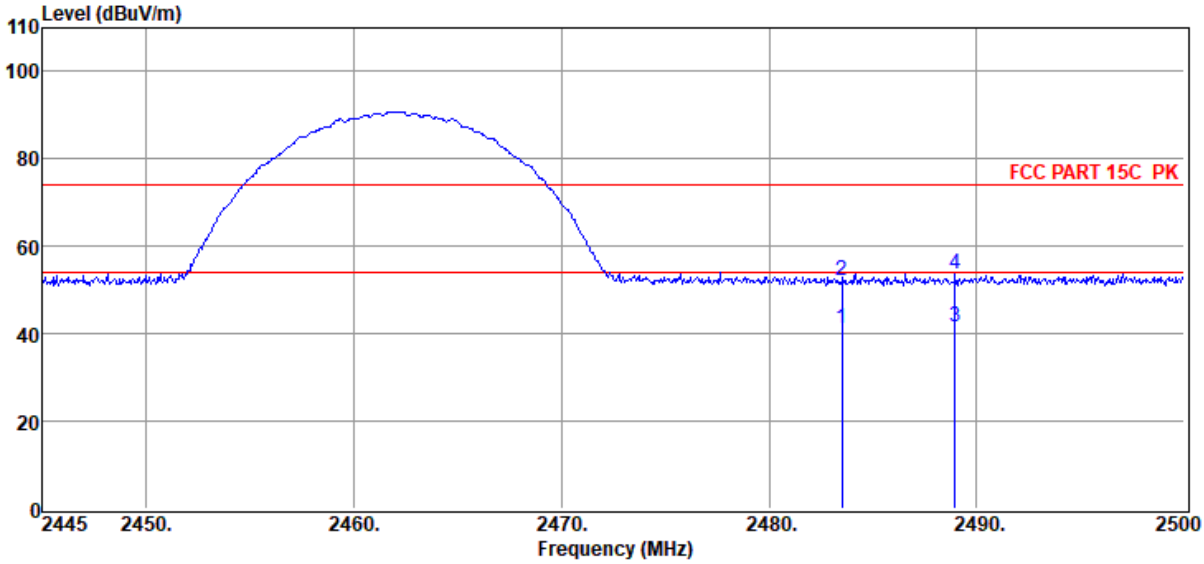

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	11.17	27.57	0.00	1.74	0.73	41.21	54.00	-12.79	Average	VERTICAL
2	2483.50	22.06	27.57	0.00	1.74	0.73	52.10	74.00	-21.90	Peak	VERTICAL
3	2488.95	11.46	27.58	0.00	1.74	0.73	41.51	54.00	-12.49	Average	VERTICAL
4	2488.95	23.80	27.58	0.00	1.74	0.73	53.85	74.00	-20.15	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11G 2412		

Data: 5

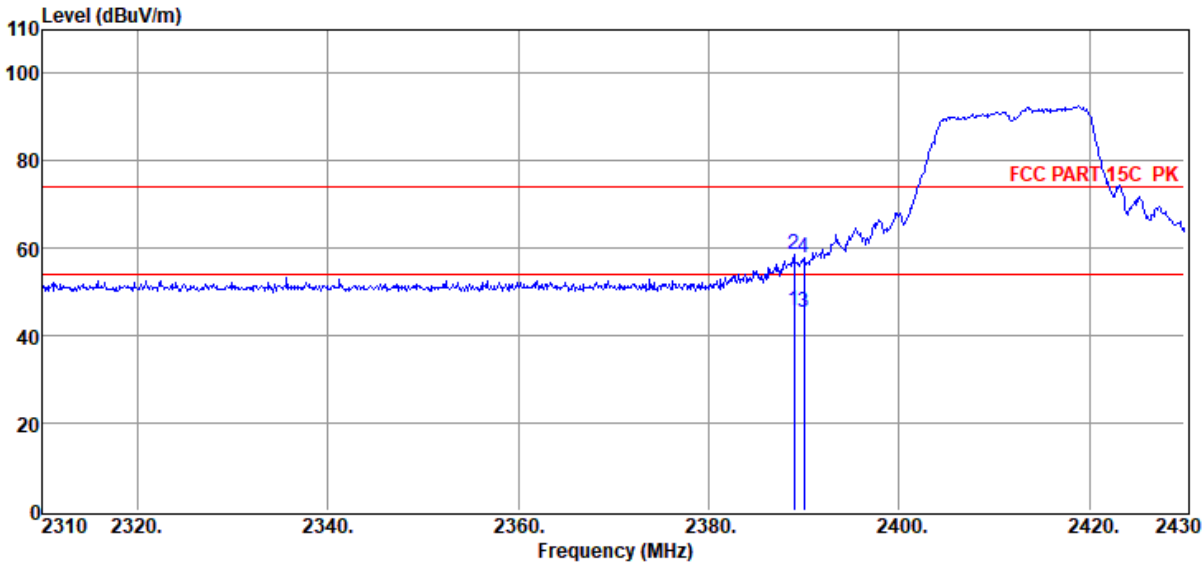

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2388.96	16.04	27.40	0.00	1.71	0.72	45.87	54.00	-8.13	Average	HORIZONTAL
2	2388.96	28.78	27.40	0.00	1.71	0.72	58.61	74.00	-15.39	Peak	HORIZONTAL
3	2390.04	15.49	27.40	0.00	1.71	0.72	45.32	54.00	-8.68	Average	HORIZONTAL
4	2390.04	27.97	27.40	0.00	1.71	0.72	57.80	74.00	-16.20	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11G 2412		

Data: 6

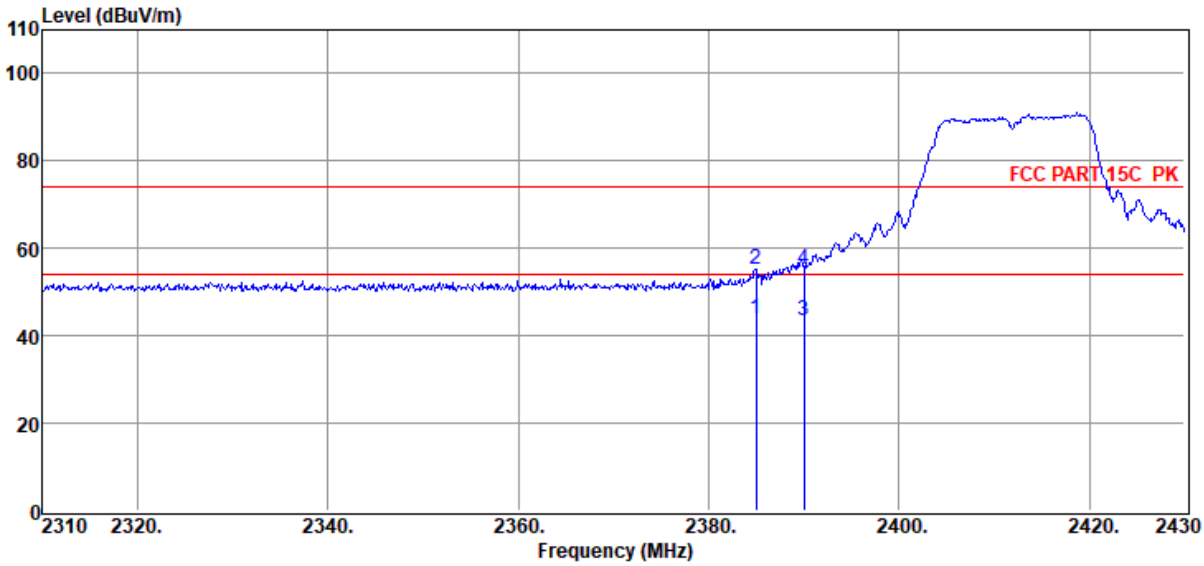

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2385.00	14.11	27.39	0.00	1.71	0.72	43.93	54.00	-10.07	Average	VERTICAL
2	2385.00	25.28	27.39	0.00	1.71	0.72	55.10	74.00	-18.90	Peak	VERTICAL
3	2390.04	13.79	27.40	0.00	1.71	0.72	43.62	54.00	-10.38	Average	VERTICAL
4	2390.04	25.40	27.40	0.00	1.71	0.72	55.23	74.00	-18.77	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11G 2462		

Data: 7

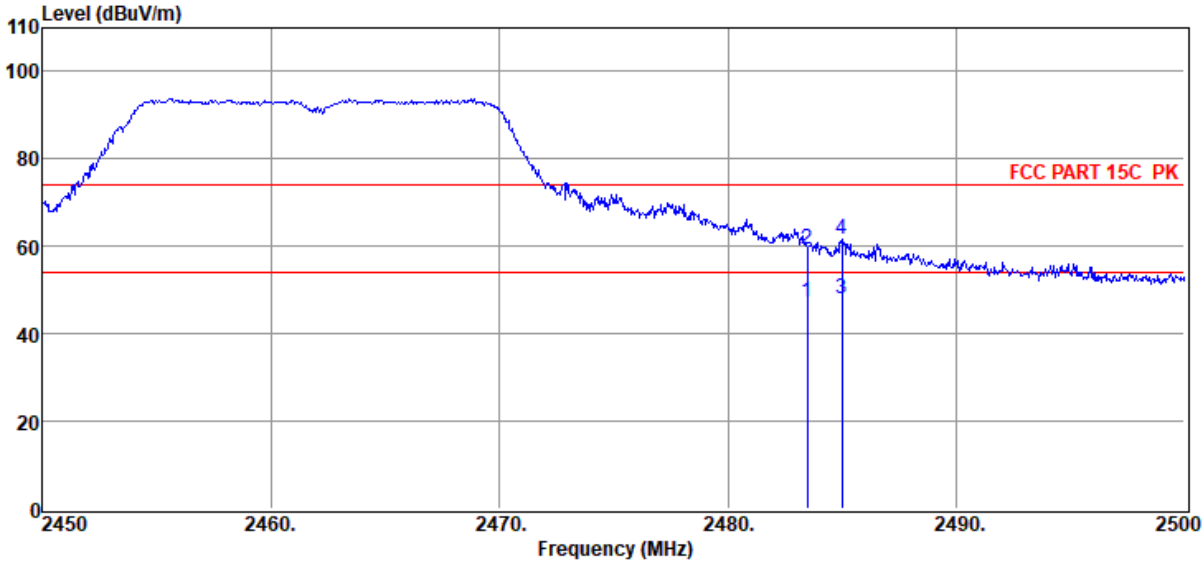

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	17.13	27.57	0.00	1.74	0.73	47.17	54.00	-6.83	Average	HORIZONTAL
2	2483.50	29.43	27.57	0.00	1.74	0.73	59.47	74.00	-14.53	Peak	HORIZONTAL
3	2485.00	18.04	27.57	0.00	1.74	0.73	48.08	54.00	-5.92	Average	HORIZONTAL
4	2485.00	31.64	27.57	0.00	1.74	0.73	61.68	74.00	-12.32	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11G 2462		

Data: 8

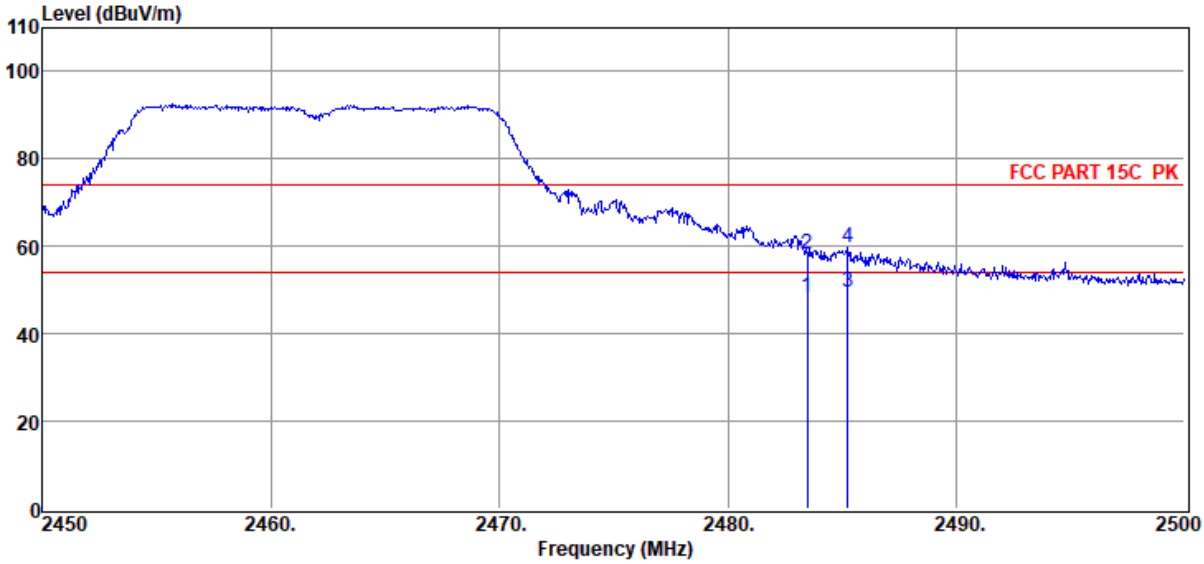

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	18.47	27.57	0.00	1.74	0.73	48.51	54.00	-5.49	Average	VERTICAL
2	2483.50	28.24	27.57	0.00	1.74	0.73	58.28	74.00	-15.72	Peak	VERTICAL
3	2485.25	19.36	27.57	0.00	1.74	0.73	49.40	54.00	-4.60	Average	VERTICAL
4	2485.25	29.64	27.57	0.00	1.74	0.73	59.68	74.00	-14.32	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11N20 2412		

Data: 9

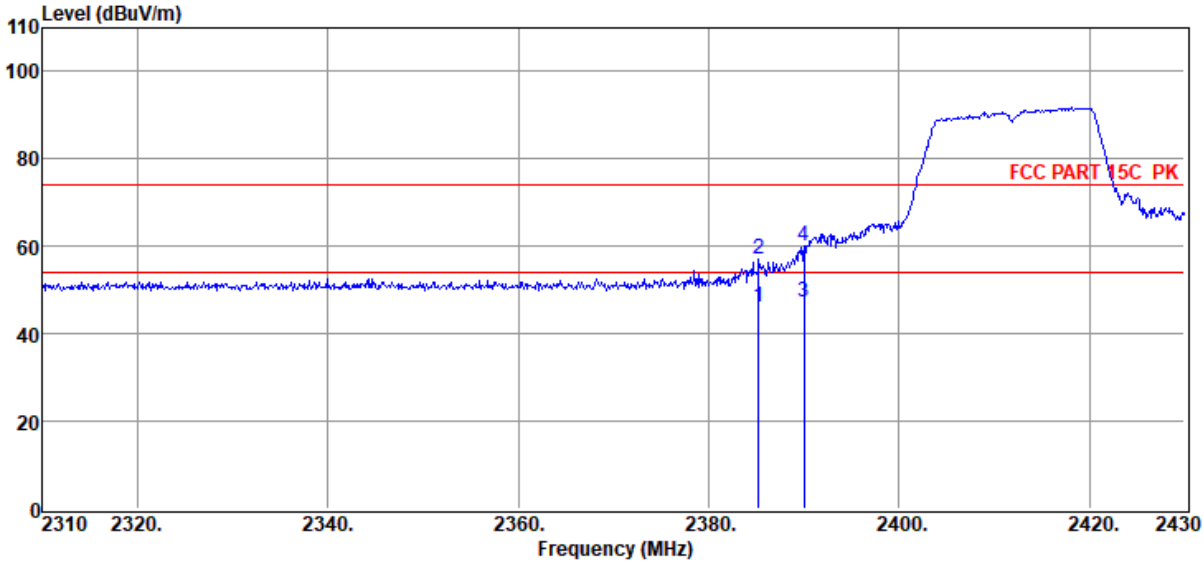

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2385.24	16.27	27.39	0.00	1.71	0.72	46.09	54.00	-7.91	Average	HORIZONTAL
2	2385.24	27.07	27.39	0.00	1.71	0.72	56.89	74.00	-17.11	Peak	HORIZONTAL
3	2390.04	17.39	27.40	0.00	1.71	0.72	47.22	54.00	-6.78	Average	HORIZONTAL
4	2390.04	30.34	27.40	0.00	1.71	0.72	60.17	74.00	-13.83	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11N20 2412		

Data: 10

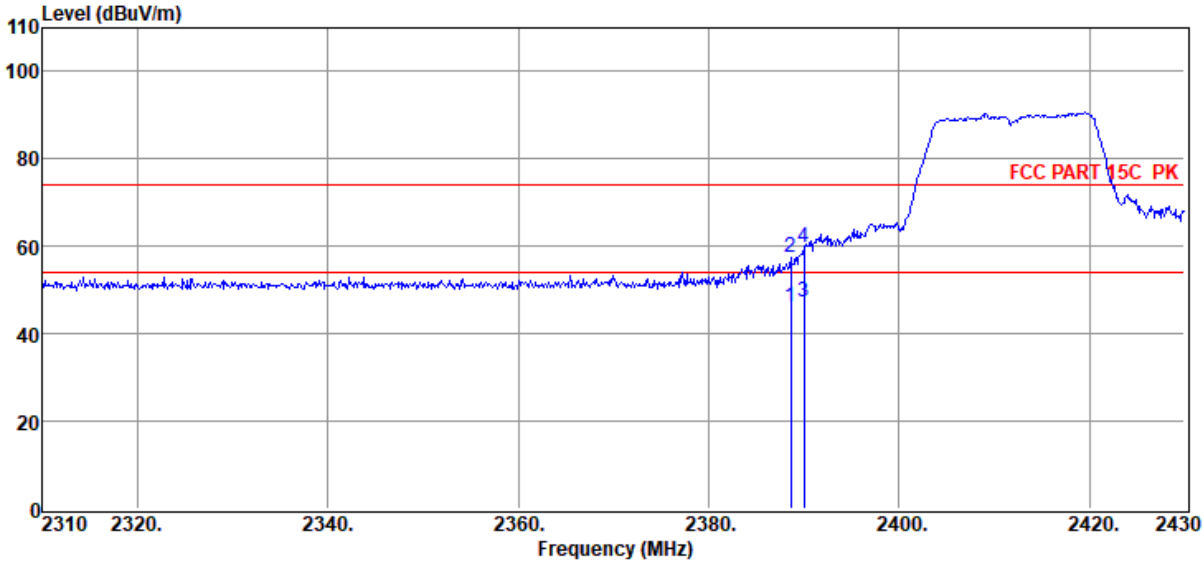

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2388.60	16.22	27.40	0.00	1.71	0.72	46.05	54.00	-7.95	Average	VERTICAL
2	2388.60	27.64	27.40	0.00	1.71	0.72	57.47	74.00	-16.53	Peak	VERTICAL
3	2390.04	17.48	27.40	0.00	1.71	0.72	47.31	54.00	-6.69	Average	VERTICAL
4	2390.04	30.08	27.40	0.00	1.71	0.72	59.91	74.00	-14.09	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/HORIZONTAL
Memo	: 11N20 2462		

Data: 11

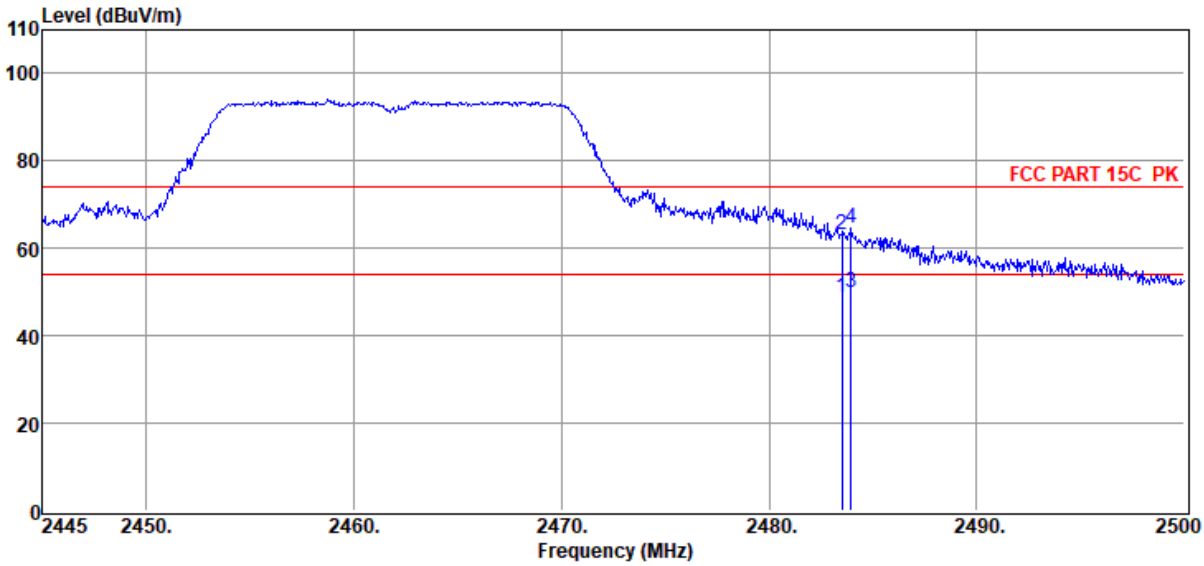

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	18.54	27.57	0.00	1.74	0.73	48.58	54.00	-5.42	Average	HORIZONTAL
2	2483.50	33.03	27.57	0.00	1.74	0.73	63.07	74.00	-10.93	Peak	HORIZONTAL
3	2483.94	19.82	27.57	0.00	1.74	0.73	49.86	54.00	-4.14	Average	HORIZONTAL
4	2483.94	34.44	27.57	0.00	1.74	0.73	64.48	74.00	-9.52	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22031014-2E JVS-H930E\FCC ABOVE 1G .EM6	
Test Date	: 2022-06-09	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx Mode
Condition	: Temp:22.1°C,Humi:66.3%,Press:100.5kPa	**Antenna/Distance**	: 2021 BBHA 9120D 3#/3m/VERTICAL
Memo	: 11N20 2462		

Data: 12

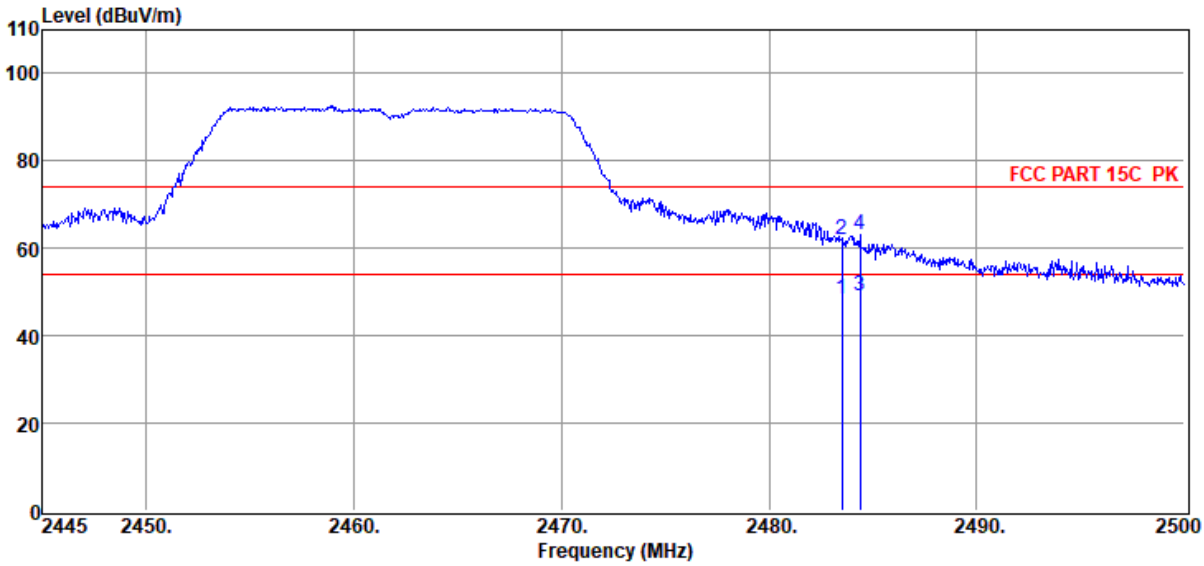

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	18.33	27.57	0.00	1.74	0.73	48.37	54.00	-5.63	Average	VERTICAL
2	2483.50	31.85	27.57	0.00	1.74	0.73	61.89	74.00	-12.11	Peak	VERTICAL
3	2484.38	19.26	27.57	0.00	1.74	0.73	49.30	54.00	-4.70	Average	VERTICAL
4	2484.38	33.08	27.57	0.00	1.74	0.73	63.12	74.00	-10.88	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Power Line Conducted Emission

11.1. Block diagram of test setup

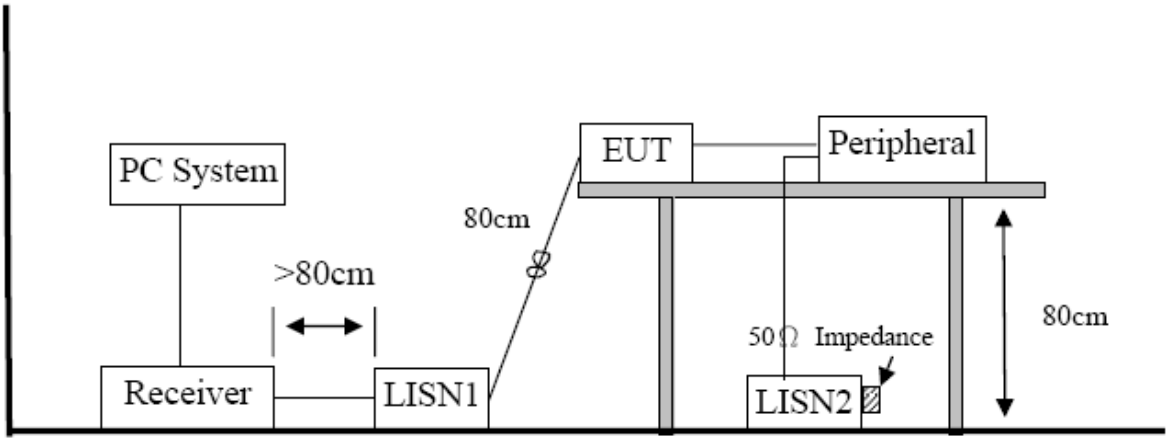

11.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

11.4. Test Result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.
Note2: "-----" means peak detection; "-----" means average detection
Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	D:\2022 CE report date\Q22031014-2E\FCC.EM6	
Test Date	: 2022-06-16	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: TX mode
Condition	: TEMP:23.8°C, RH:62.0%, BP:101.2kPa	**LISN**	: 2021 1# ENV216/LINE
Memo	: 2.4G WiFi		

Data: 2

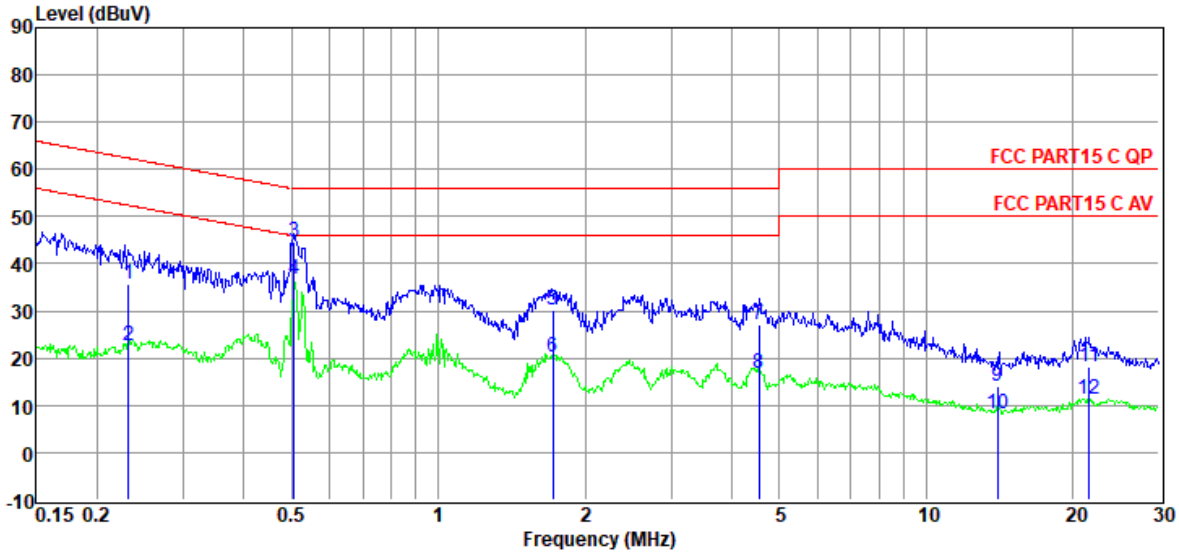

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Over Limit (dB)	Detector	Phase
1	0.23	15.84	9.77	0.02	9.92	35.55	62.39	-26.84	QP	LINE
2	0.23	2.78	9.77	0.02	9.92	22.49	52.39	-29.90	Average	LINE
3	0.51	25.27	9.60	0.02	9.91	44.80	56.00	-11.20	QP	LINE
4	0.51	17.15	9.60	0.02	9.91	36.68	46.00	-9.32	Average	LINE
5	1.72	10.64	9.52	0.04	9.89	30.09	56.00	-25.91	QP	LINE
6	1.72	0.90	9.52	0.04	9.89	20.35	46.00	-25.65	Average	LINE
7	4.55	7.63	9.58	0.06	9.92	27.19	56.00	-28.81	QP	LINE
8	4.55	-2.62	9.58	0.06	9.92	16.94	46.00	-29.06	Average	LINE
9	13.99	-5.79	9.75	0.14	9.93	14.03	60.00	-45.97	QP	LINE
10	13.99	-11.55	9.75	0.14	9.93	8.27	50.00	-41.73	Average	LINE
11	21.60	-1.64	9.62	0.18	9.97	18.13	60.00	-41.87	QP	LINE
12	21.60	-8.59	9.62	0.18	9.97	11.18	50.00	-38.82	Average	LINE

Note:
1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	D:\2022 CE report date\Q22031014-2E\FCC.EM6	
Test Date	: 2022-06-16	**Tested By**	: James Gan
EUT	: Network Camera	**Model Number**	: JVS-H930E
Power Supply	: AC 120V/60Hz	**Test Mode**	: TX mode
Condition	: TEMP:23.8°C, RH:62.0%, BP:101.2kPa	**LISN**	: 2021 1# ENV216/NEUTRAL
Memo	: 2.4G WiFi		

Data: 4

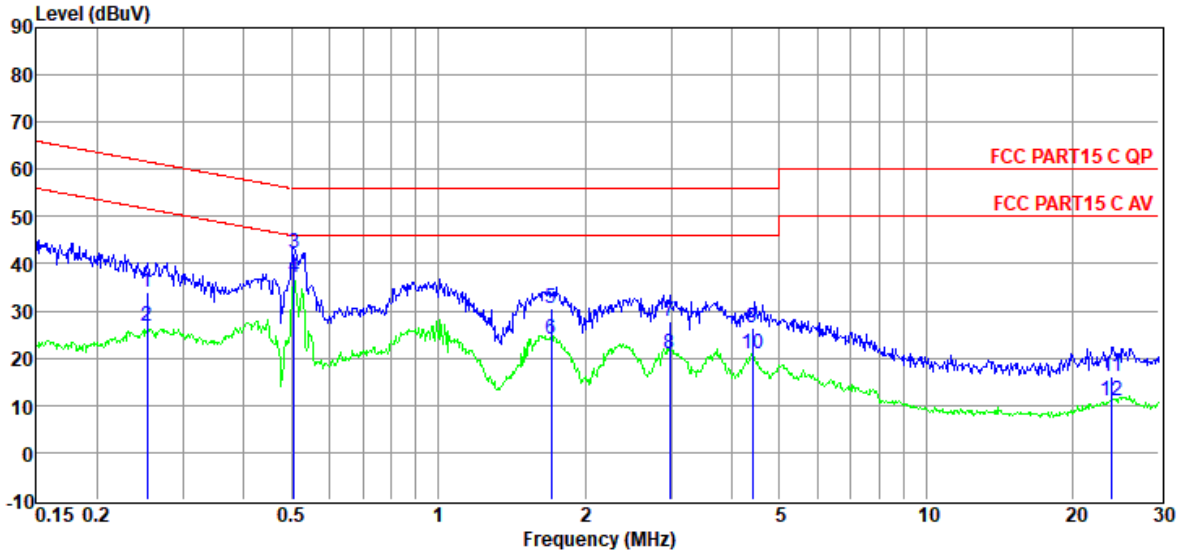

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Over Limit (dB)	Detector	Phase
1	0.25	14.42	9.72	0.02	9.92	34.08	61.64	-27.56	QP	NEUTRAL
2	0.25	7.06	9.72	0.02	9.92	26.72	51.64	-24.92	Average	NEUTRAL
3	0.51	22.79	9.51	0.02	9.91	42.23	56.00	-13.77	QP	NEUTRAL
4	0.51	17.72	9.51	0.02	9.91	37.16	46.00	-8.84	Average	NEUTRAL
5	1.71	10.86	9.62	0.04	9.89	30.41	56.00	-25.59	QP	NEUTRAL
6	1.71	4.36	9.62	0.04	9.89	23.91	46.00	-22.09	Average	NEUTRAL
7	2.98	8.05	9.71	0.05	9.91	27.72	56.00	-28.28	QP	NEUTRAL
8	2.98	1.28	9.71	0.05	9.91	20.95	46.00	-25.05	Average	NEUTRAL
9	4.41	6.62	9.77	0.06	9.92	26.37	56.00	-29.63	QP	NEUTRAL
10	4.41	1.31	9.77	0.06	9.92	21.06	46.00	-24.94	Average	NEUTRAL
11	24.02	-3.76	9.85	0.19	9.98	16.26	60.00	-43.74	QP	NEUTRAL
12	24.02	-8.93	9.85	0.19	9.98	11.09	50.00	-38.91	Average	NEUTRAL

Note:
1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

12.2. Result

The product is that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.5 dBi.