FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Guangdong Hisense Broadband Technology Co., Ltd
Address	:	No.8 Hisense Road, Tangxia Town, Pengjiang District, Jiangmen City, Guangdong Province
Equipment under Test	:	GPON SFU ONT
Model No.	:	7285G
Trade Mark	:	iPhotonix, CORNING, Hisense
FCC ID	:	2AGHCHBMT07
Manufacturer	:	Guangdong Hisense Broadband Technology Co., Ltd
Address	:	No.8 Hisense Road, Tangxia Town, Pengjiang District, Jiangmen City, Guangdong Province

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-89201699, **E-mail:** ddt@dgddt.com, http://www.dgddt.com

REPORT

TABLE OF CONTENTS

Test report declares....4
1. Summary of test results....6
2. General test information....7
2.1. Description of EUT....7
2.2. Accessories of EUT....7
2.3. Assistant equipment used for test....8
2.4. Block diagram of EUT configuration for test....8
2.5. Deviations of test standard....8
2.6. Test environment conditions....8
2.7. Test laboratory....9
2.8. Measurement uncertainty....9
3. Equipment used during test....10
4. 6dB Bandwidth....11
4.1. Block diagram of test setup....11
4.2. Limits....11
4.3. Test Procedure....11
4.4. Test Result....12
4.5. original test data....13
5. Conducted peak Output Power....23
5.1. Block diagram of test setup....23
5.2. Limits....23
5.3. Test Procedure....23
5.4. Test Result....24
5.5. original test data....25
6. Power Spectral Density....35
6.1. Block diagram of test setup....35
6.2. Limits....35
6.3. Test Procedure....35
6.4. Test Result....36
6.5. original test data....37
7. Band Edge and Spurious Emissions (Conducted)....48
7.1. Block diagram of test setup....48
7.2. Limits....48
7.3. Test Procedure....48
7.4. Test Result....49
7.5. original test data....49
8. Radiated Spurious Emissions....88

8.1. Block diagram of test setup 88
8.2. Limit 89
8.3. Test Procedure 90
8.4. Test result 92
9. Radiated Band Edge Compliance 96
9.1. Block diagram of test setup 96
9.2. Limit 96
9.3. Test Procedure 96
9.4. Test result 96
10. Power Line Conducted Emission 113
10.1. Block diagram of test setup 113
10.2. Power Line Conducted Emission Limits(Class B) 113
10.3. Test Procedure 113
10.4. Test Result 114
11. Antenna Requirements 117
11.1. Limit 117
11.2. Result 117

TEST REPORT DECLARE

Applicant	:	Guangdong Hisense Broadband Technology Co., Ltd
Address	:	No.8 Hisense Road, Tangxia Town, Pengjiang District, Jiangmen City, Guangdong Province
Equipment under Test	:	GPON SFU ONT
Model No	:	7285G
Trade Mark	:	iPhotonix, CORNING, Hisense
Manufacturer	:	Guangdong Hisense Broadband Technology Co., Ltd
Address	:	No.8 Hisense Road, Tangxia Town, Pengjiang District, Jiangmen City, Guangdong Province

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C

Test procedure used: ANSI C63.10:2013, KDB 558074 D01 DTS Meas Guidance V03r03

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-R18030203-1E1		
Date of Receipt:	Mar. 06, 2018	**Date of Test:**	Mar. 06, 2018 ~ Apr. 24, 2018

Prepared By: ***Approved By:***

Sam Li

Sam Li/Engineer ***Kevin Feng/EMC Manager***

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Apr. 24, 2018	

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	**Standard**	**Results**
6dB Bandwidth Bandwidth	FCC 15.247 (a) (2)	PASS
Conducted Output Power	FCC 15.247 (b) (3)	PASS
Power Spectral Density	FCC 15.247 (e)	PASS
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d)	PASS
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205	PASS
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205	PASS
Power Line Conducted Emission	FCC 15.207	PASS
Antenna requirement	FCC 15.203	PASS

2. General test information

2.1. Description of EUT

EUT* Name	:	GPON SFU ONT
Model Number	:	7285G
EUT function description	:	Please reference user manual of this device
Power supply	:	DC 12V from external AC Adapter
Radio Technology	:	IEEE 802.11b/g/n
Operation frequency	:	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Modulation	:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	:	IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: up to 150 Mbps IEEE 802.11n HT40: up to 300 Mbps
Antenna Type	:	Integrated metal antenna 1: 2.4G band maximum PK gain 2.38dBi Integrated metal antenna 2: 2.4G band maximum PK gain 2.87dBi
Sample Type	:	Series production

Note1: EUT is the ab. of equipment under test.

Antenna information			
	Ant1 gain	Ant2 gain	MIMO
IEEE 802.11b	2.38	/	/
IEEE 802.11g	2.38	2.87	/
IEEE 802.11n HT20	2.38	2.87	5.64
IEEE 802.11n HT40	2.38	2.87	5.64

Channel information							
CH	Frequency	CH	Frequency	CH	Frequency	CH	Frequency
1	2412	5	2432	9	2452	/	/
2	2417	6	2437	10	2457	/	/
3	2422	7	2442	11	2462	/	/
4	2427	8	2447	/	/	/	/

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
AC Adapter	N/A	RD1201500-C55-24MG	N/A	Input: AC 100-240V -50/60Hz, 0.6A; Output: DC 12V, 1.5A; Length: 1.60m

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	DELL	Latitude D610	FCC DOC	00045-534-136-30 0
Network Cable	N/A	N/A	N/A	Length: 1.5m

2.4. Block diagram of EUT configuration for test

EUT was connected to control to provided by manufacturer which has a standard LAN PORT connector to connect to Notebook, and the Notebook will run “CMD telnet” to control EUT work in Continuous Tx mode, and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	/	11	LCH :CH1	2412
	/	11	MCH: CH6	2437
	/	11	HCH: CH11	2462
IEEE 802.11g	/	54	LCH :CH1	2412
	/	54	MCH: CH6	2437
	/	54	HCH: CH11	2462
IEEE 802.11n HT20	/	MCS 7	LCH :CH1	2412
	/	MCS 7	MCH: CH6	2437
	/	MCS 7	HCH: CH11	2462
IEEE 802.11n HT40	/	MCS 7	LCH :CH3	2422
	/	MCS 7	MCH: CH6	2437
	/	MCS 7	HCH: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.				

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25℃
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-89201699, http://www.dgddt.com, Email: ddt@dgddt.com

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

Designation Number: CN1182; Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power(Conducted)(Spectrum analyzer)	0.86dB (10 MHz ≤ f < 3.6GHz);
	1.38dB (3.6GHz ≤ f < 8GHz)
Peak Output Power(Conducted)(Power Sensor)	0.74dB
Power Spectral Density	0.74dB (10 MHz ≤ f < 3.6GHz);
	1.38dB (3.6GHz ≤ f < 8GHz)
Frequencies Stability	6.7 x 10^{-8} (Antenna couple method)
	5.5 x 10^{-8} (Conducted method)
Conducted spurious emissions	0.86dB (10 MHz ≤ f < 3.6GHz);
	1.40dB (3.6GHz ≤ f < 8GHz)
	1.66dB (8GHz≤ f < 22GHz)
Uncertainty for radio frequency (RBW<20kHz)	3×10^{-8}
Temperature	0.4℃
Humidity	2%
Uncertainty for Radiation Emission test (30MHz-1GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz-40GHz)	4.10dB (1-6GHz)
	4.40dB (6GHz-18GHz)
	3.54dB (18GHz-26GHz)
	4.30dB (26GHz-40GHz)
Uncertainty for Power line conduction emission test	3.32dB (150kHz-30MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (Tonscend RF Measurement System)					
Spectrum analyzer	R&S	FSU26	200071	Oct. 23, 2017	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 16, 2017	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Oct. 23, 2017	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun.16, 2017	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Oct. 21, 2017	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Oct. 23, 2017	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Aug. 18, 2017	1 Year
Attenuator	Mini-Circuits	BW-S10W2	101109	Aug. 18, 2017	1 Year
RF Cable	Micable	C10-01-01-1	100309	Oct. 21, 2017	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150 L	ZX170110-A	Oct. 21, 2017	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
Radiated Emission Test Chamber 1#					
EMI Test Receiver	R&S	ESU8	100316	Oct. 21, 2017	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 16, 2017	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 09, 2017	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Oct. 17, 2017	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Oct. 17, 2017	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Nov. 09, 2017	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Oct. 21, 2017	1 Year
Pre-amplifier	TERA-MW	TRLA-0040G 35	101303	Oct. 21, 2017	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Oct. 21, 2017	1 Year
RF Cable	N/A	SMAJ-SMAJ-1M+ 11M	17070133+17 070131	Nov. 08, 2017	1 Year
MI Cable	HUBSER	C10-01-01-1 M	1091629	Oct. 21, 2017	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESU8	100316	Oct. 21, 2017	1 Year
LISN 1	R&S	ENV216	101109	Oct. 21, 2017	1 Year
LISN 2	R&S	ESH2-Z5	100309	Oct. 21, 2017	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Oct. 21, 2017	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Oct. 21, 2017	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

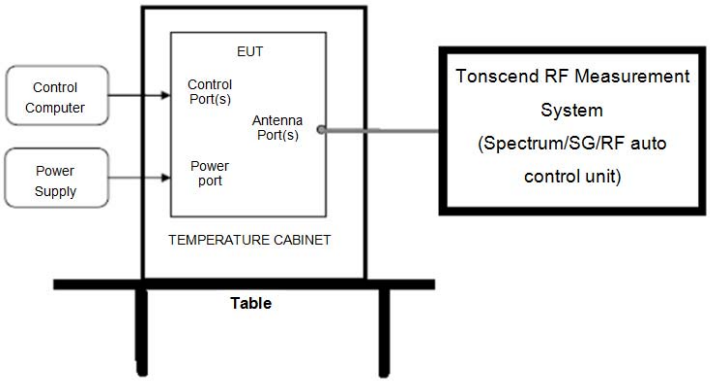

4.2. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz

4.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

RBW:	100kHz
VBW:	300kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4. Test Result

Test Mode	Freq. [MHz]	Ant	6dB Bandwidth [MHz]	Limit	Verdict
11B	2412	ANT1	8.000	0.5	PASS
11B	2437	ANT1	7.640	0.5	PASS
11B	2462	ANT1	8.120	0.5	PASS
11G	2412	ANT1	15.760	0.5	PASS
11G	2412	ANT2	15.160	0.5	PASS
11G	2437	ANT1	15.160	0.5	PASS
11G	2437	ANT2	14.200	0.5	PASS
11G	2462	ANT1	15.440	0.5	PASS
11G	2462	ANT2	15.200	0.5	PASS
11N20	2412	ANT1	15.200	0.5	PASS
11N20	2412	ANT2	16.040	0.5	PASS
11N20	2437	ANT1	16.400	0.5	PASS
11N20	2437	ANT2	16.160	0.5	PASS
11N20	2462	ANT1	17.440	0.5	PASS
11N20	2462	ANT2	16.320	0.5	PASS
11N40	2422	ANT1	35.840	0.5	PASS
11N40	2422	ANT2	35.920	0.5	PASS
11N40	2437	ANT1	35.280	0.5	PASS
11N40	2437	ANT2	35.280	0.5	PASS
11N40	2452	ANT1	36.000	0.5	PASS
11N40	2452	ANT2	36.080	0.5	PASS

4.5. original test data

11B_ANT1_2412

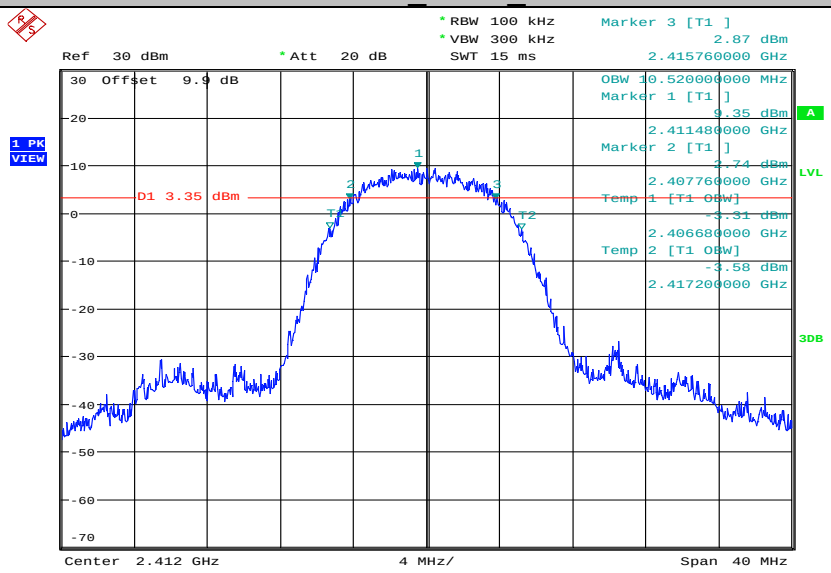

Date: 20.MAR.2018 09:48:17

11B_ANT1_2437

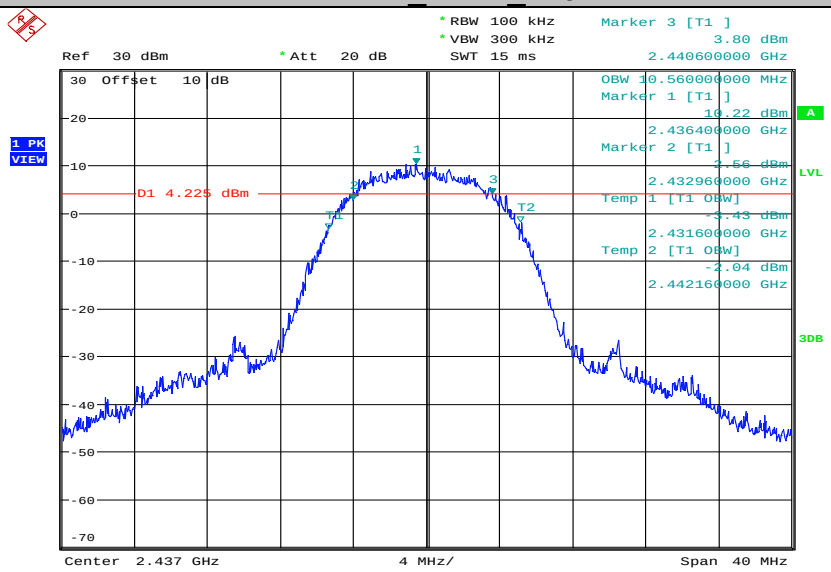

Date: 20.MAR.2018 10:01:00

11B_ANT1_2462

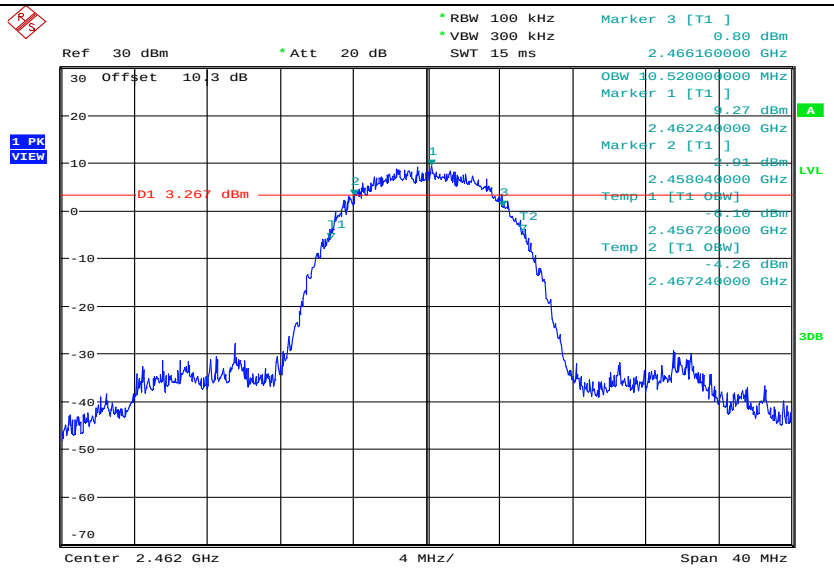

Date: 20.MAR.2018 10:04:28

11G_ANT1_2412

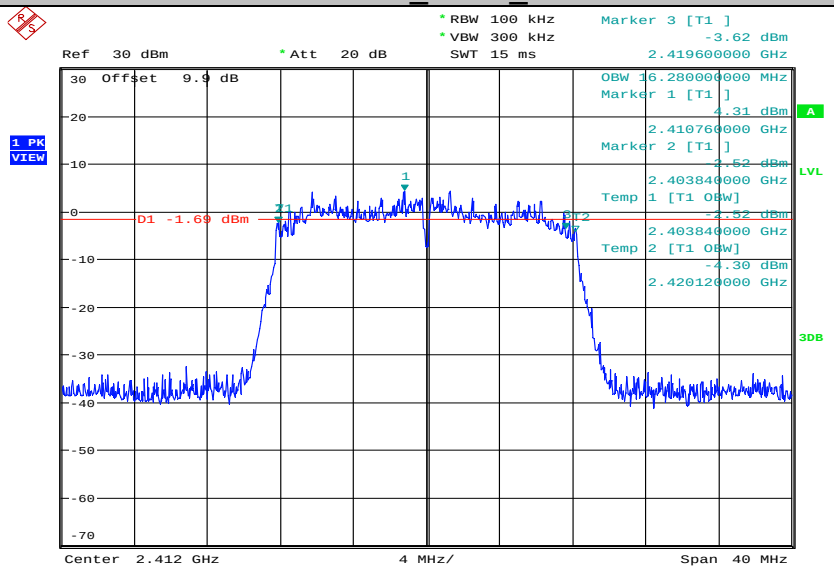

Date: 20.MAR.2018 10:17:24

11G_ANT2_2412

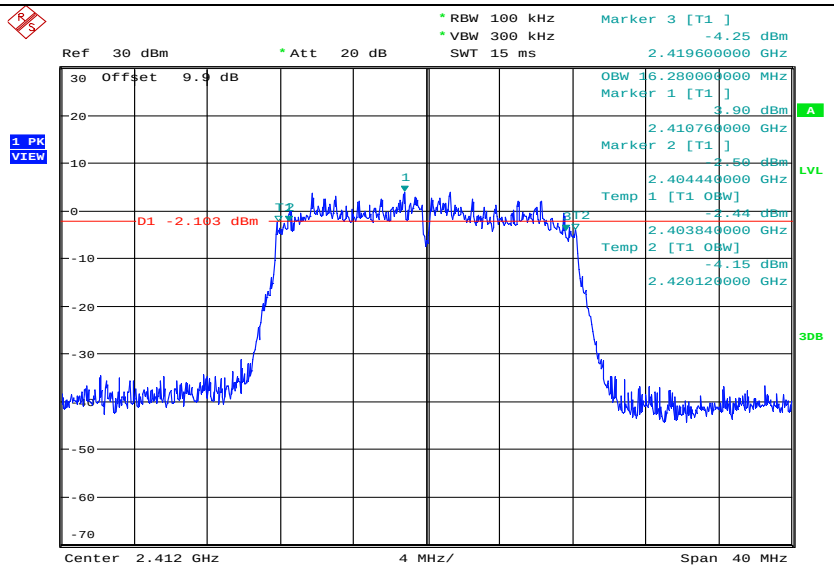

11G_ANT1_2437

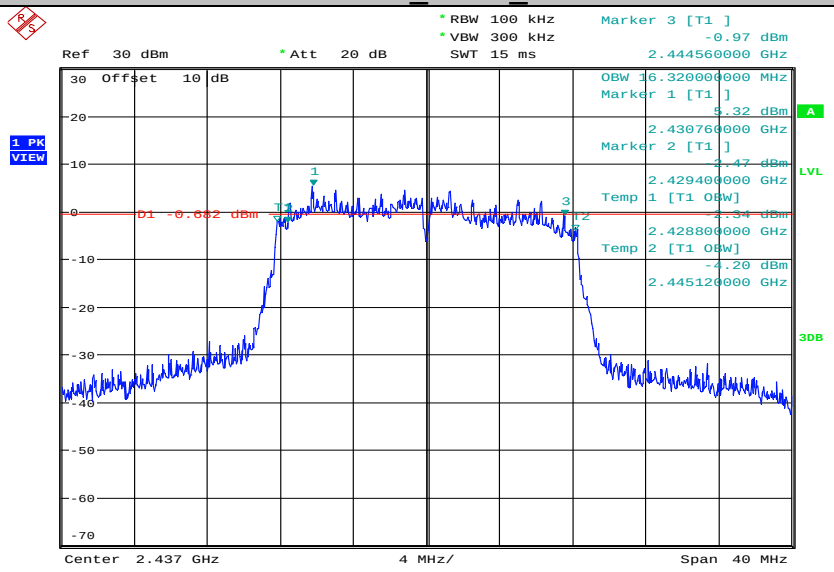

11G_ANT2_2437

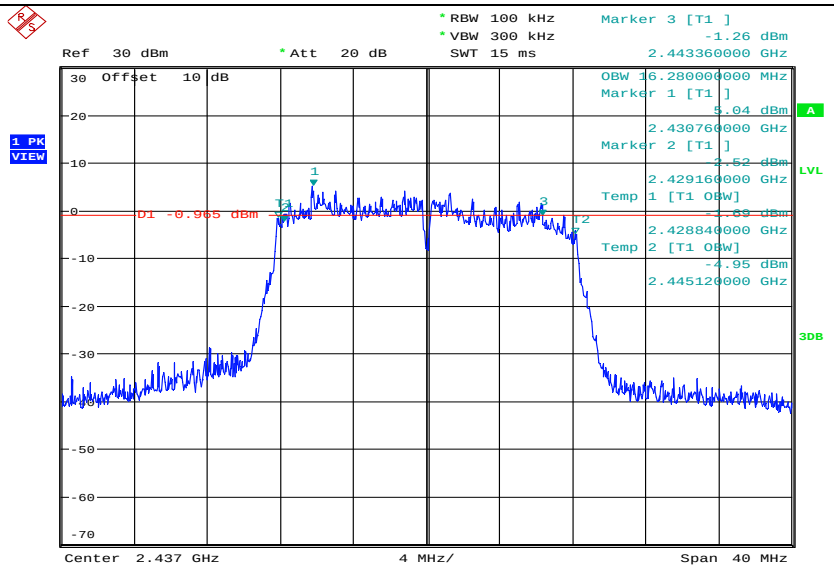

Date: 20.MAR.2018 10:49:51

11G_ANT1_2462

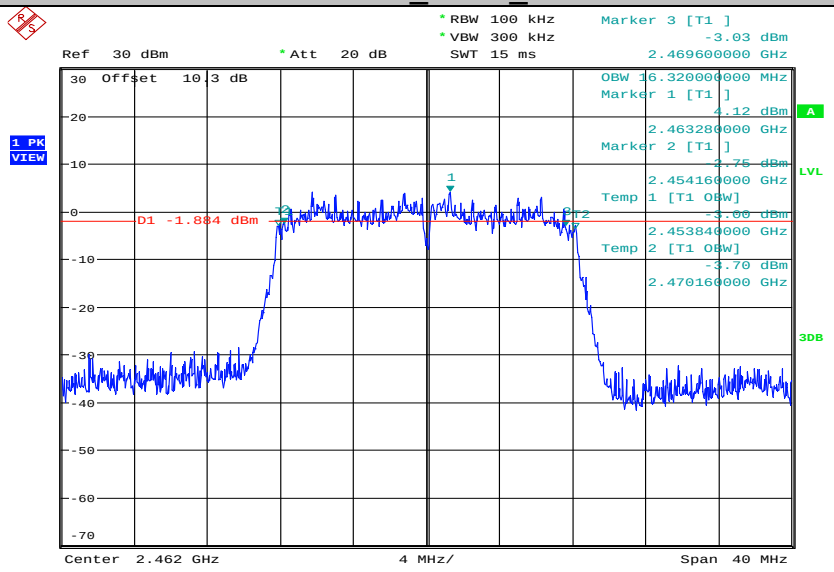

Date: 20.MAR.2018 10:31:29

11G_ANT2_2462

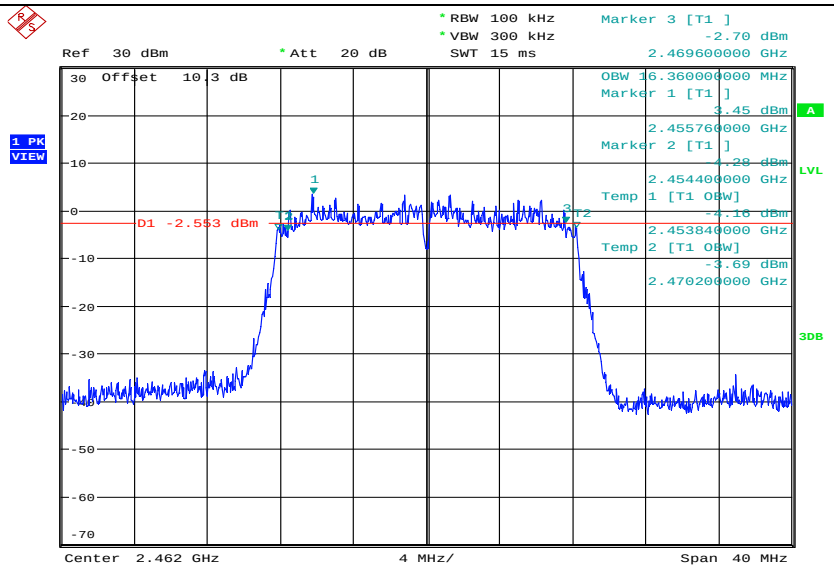

Date: 20.MAR.2018 10:52:21

11N20MIMO_ANT1_2412

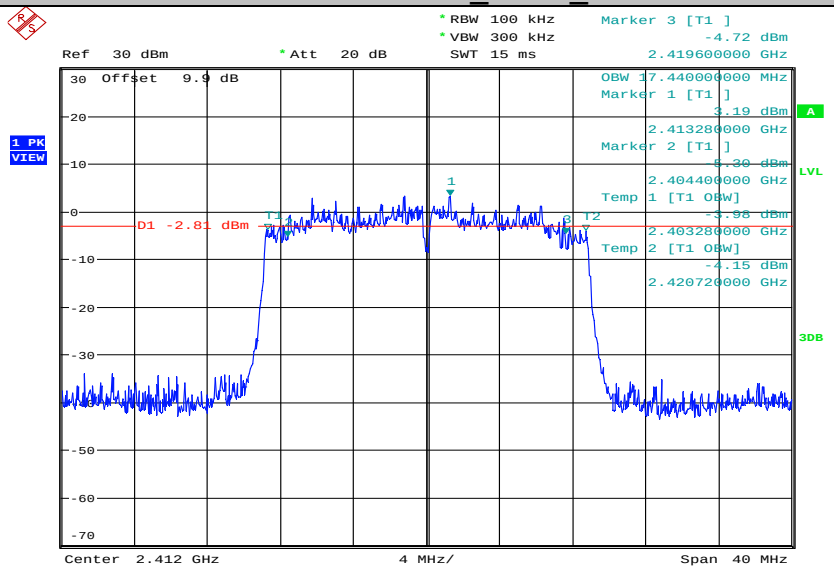

Date: 20.MAR.2018 11:17:42

11N20MIMO_ANT2_2412

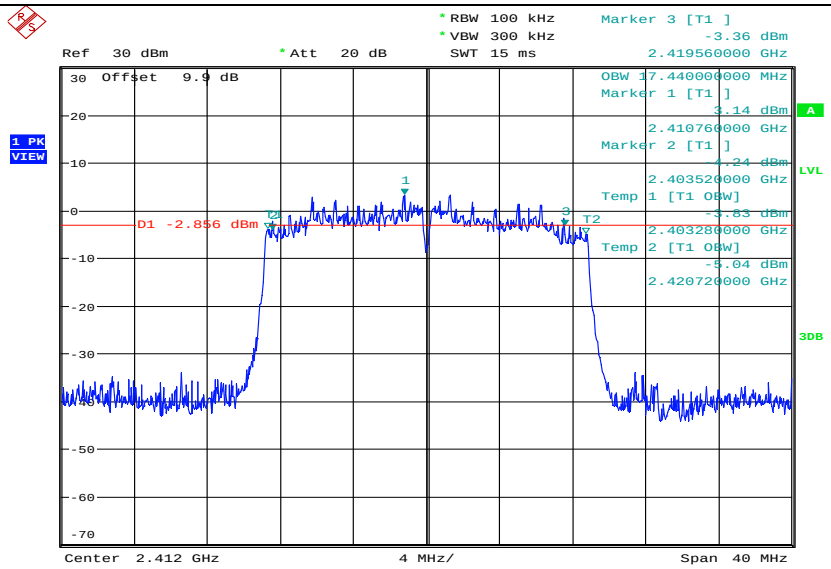

Date: 20.MAR.2018 11:19:51

11N20MIMO_ANT1_2437

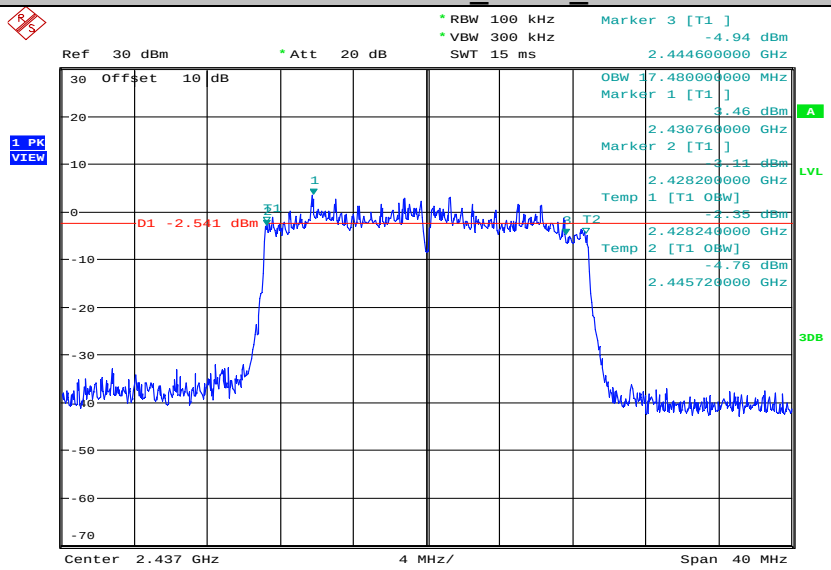

Date: 20.MAR.2018 13:37:22

11N20MIMO_ANT2_2437

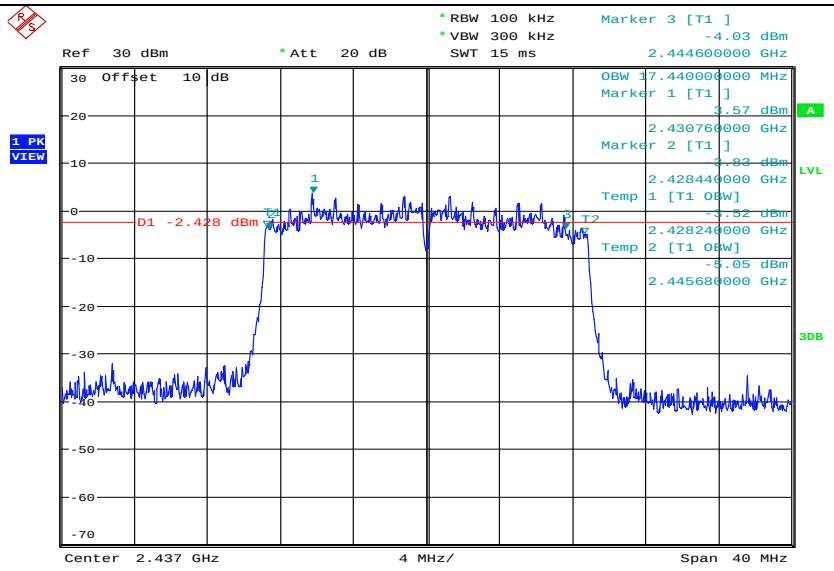

Date: 20.MAR.2018 15:43:40

11N20MIMO_ANT1_2462

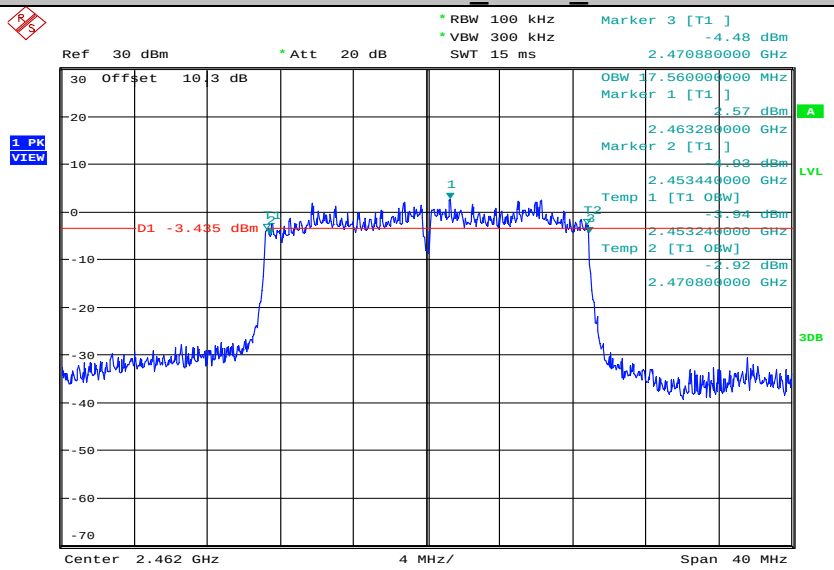

Date: 20.MAR.2018 15:51:05

11N20MIMO_ANT2_2462

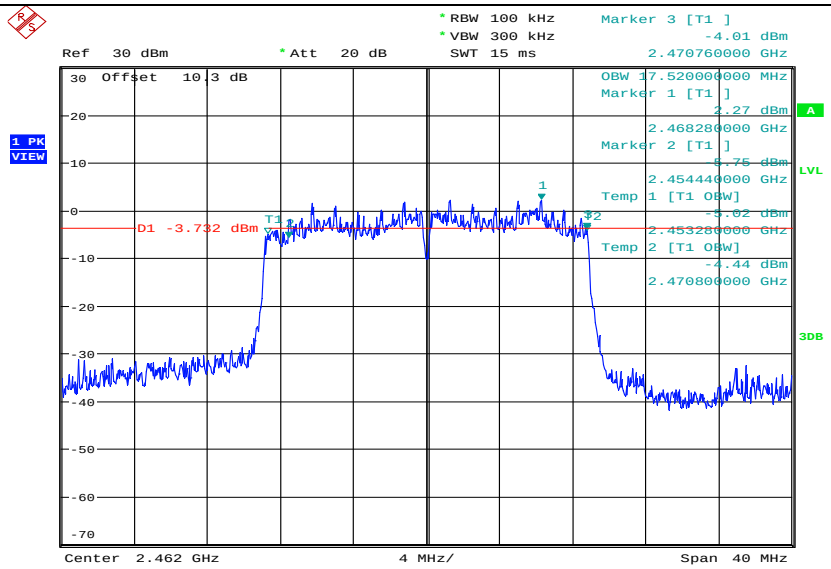

Date: 20.MAR.2018 15:53:16

11N40MIMO_ANT1_2422

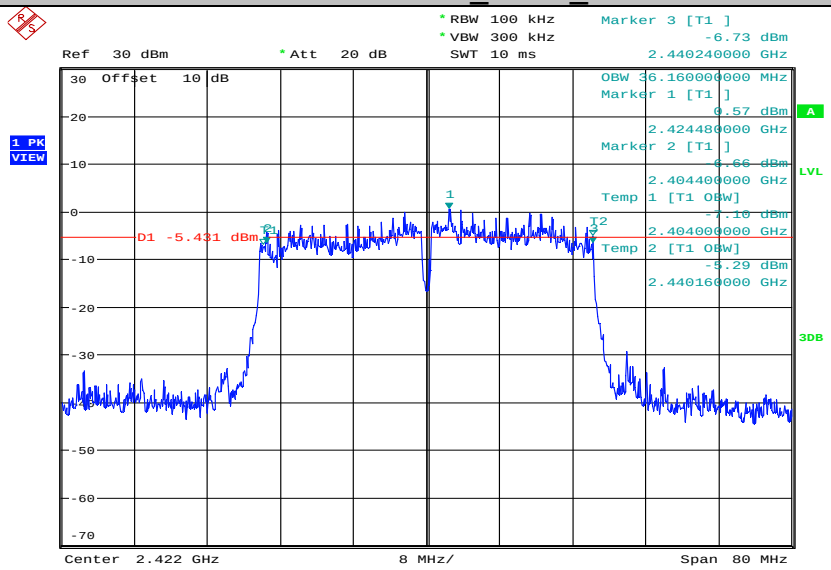

Date: 20.MAR.2018 15:58:56

11N40MIMO_ANT2_2422

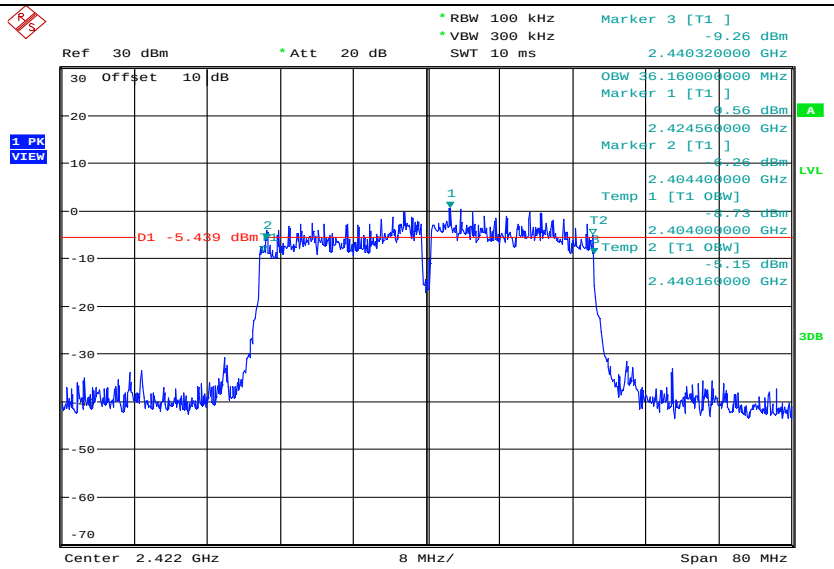

Date: 20.MAR.2018 16:01:24

11N40MIMO_ANT1_2437

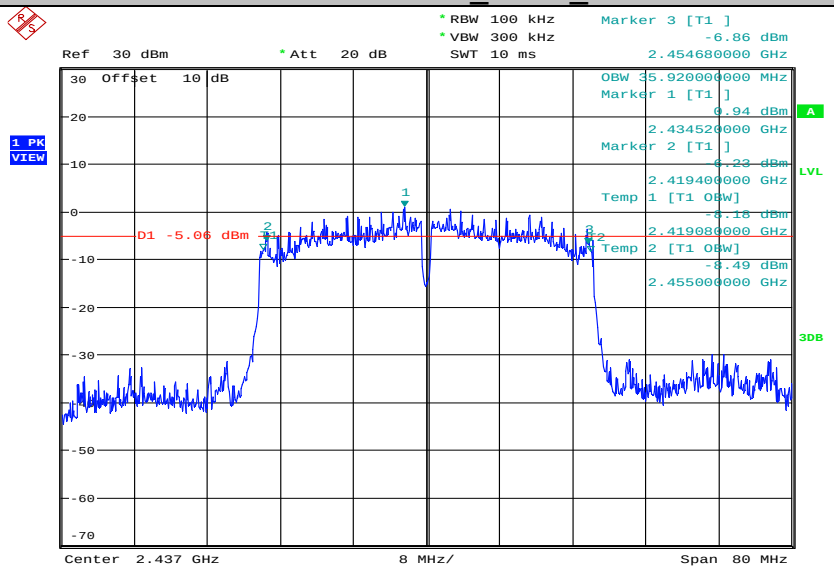

Date: 20.MAR.2018 16:04:09

11N40MIMO_ANT2_2437

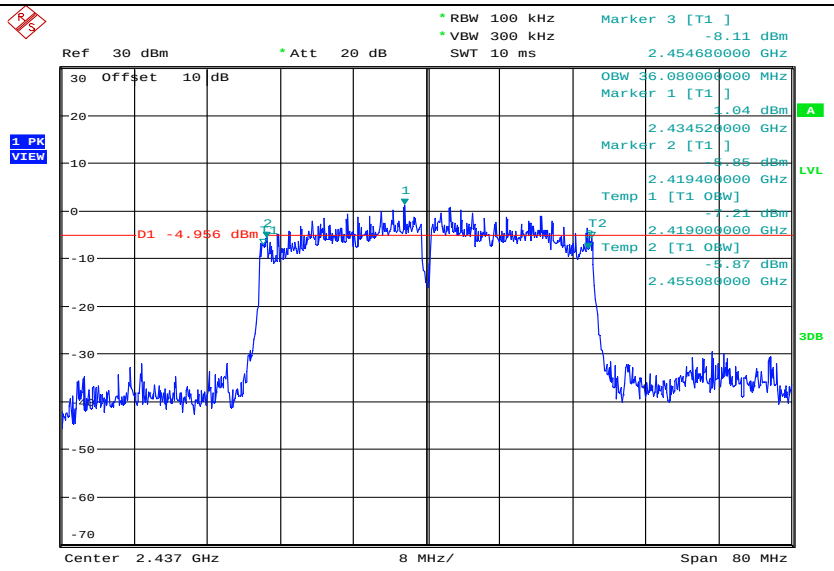

Date: 20.MAR.2018 16:06:03

11N40MIMO_ANT1_2452

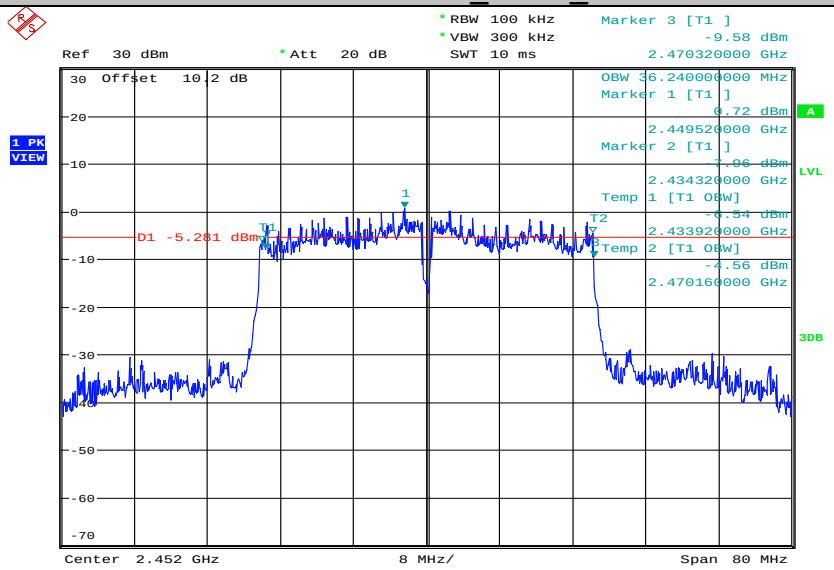

Date: 20.MAR.2018 16:08:40

11N40MIMO_ANT2_2452

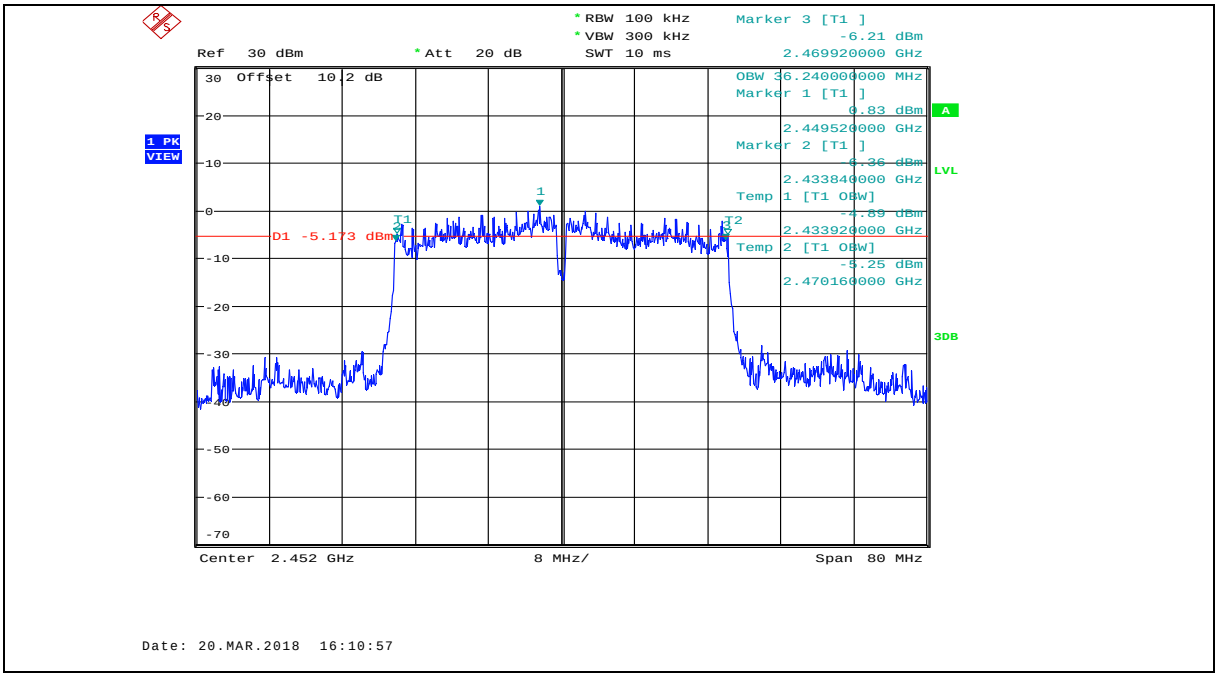

5. Conducted peak Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by Spectrum Analyzer.

5.4. Test Result

Test Mode	Antenna	Freq. [MHz]	Power[dBm]	Limit[dBm]	Verdict
11B	ANT1	2412	24.76	30	PASS
11B	ANT1	2437	24.95	30	PASS
11B	ANT1	2462	24.57	30	PASS
11G	ANT1	2412	23.38	30	PASS
11G	ANT2	2412	22.87	30	PASS
11G	ANT1	2437	23.55	30	PASS
11G	ANT2	2437	23.22	30	PASS
11G	ANT1	2462	23.38	30	PASS
11G	ANT2	2462	22.89	30	PASS
11N20 MIMO	ANT1	2412	21.98	30	PASS
11N20 MIMO	ANT2	2412	21.99	30	PASS
11N20 MIMO	total	2412	25.01	30	PASS
11N20 MIMO	ANT1	2437	22.14	30	PASS
11N20 MIMO	ANT2	2437	22.16	30	PASS
11N20 MIMO	total	2437	25.16	30	PASS
11N20 MIMO	ANT1	2462	21.63	30	PASS
11N20 MIMO	ANT2	2462	21.60	30	PASS
11N20 MIMO	total	2462	24.61	30	PASS
11N40 MIMO	ANT1	2422	21.69	30	PASS
11N40 MIMO	ANT2	2422	21.74	30	PASS
11N40 MIMO	total	2422	24.71	30	PASS
11N40 MIMO	ANT1	2437	21.86	30	PASS
11N40 MIMO	ANT2	2437	22.06	30	PASS
11N40 MIMO	total	2437	25.01	30	PASS
11N40 MIMO	ANT1	2452	21.99	30	PASS
11N40 MIMO	ANT2	2452	22.01	30	PASS
11N40 MIMO	total	2452	25.01	30	PASS

5.5. original test data

11B_ANT1_2412

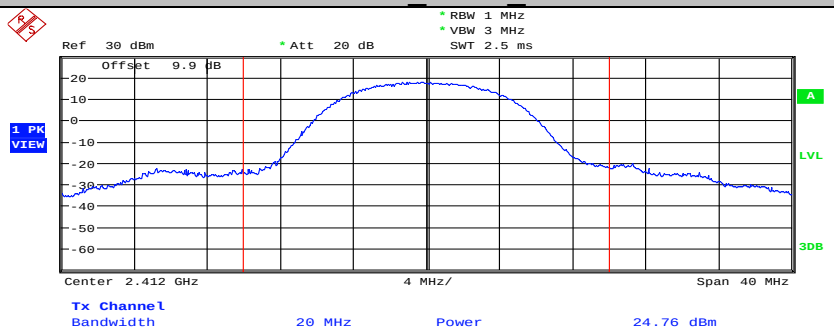

Date: 20.MAR.2018 09:48:39

11B_ANT1_2437

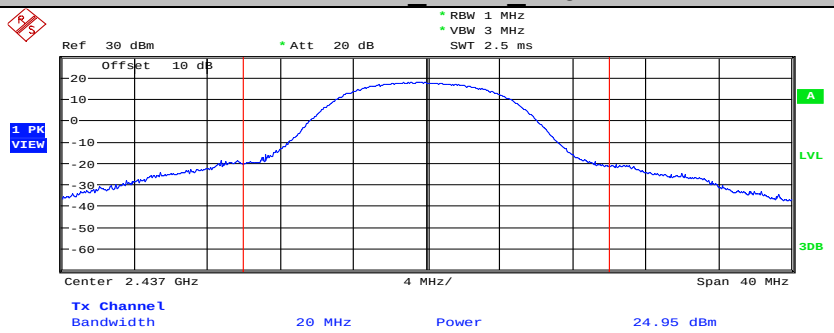

Date: 20.MAR.2018 10:01:21

11B_ANT1_2462

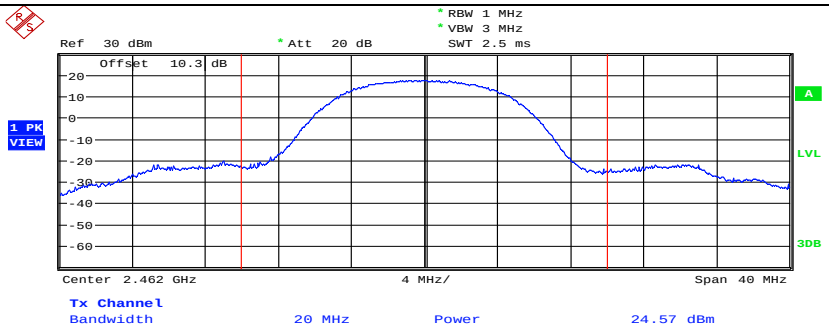

Date: 20.MAR.2018 10:04:49

11G_ANT1_2412

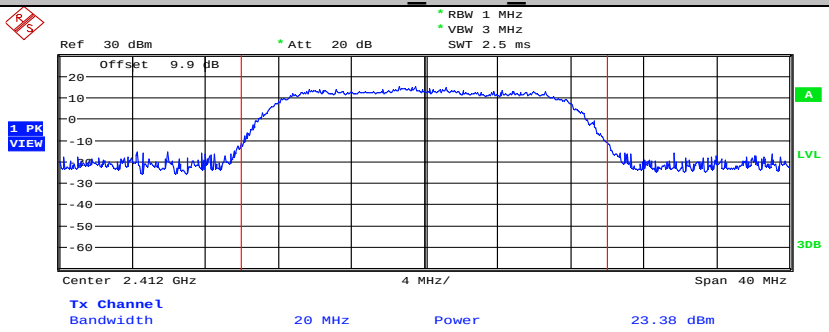

Date: 20.MAR.2018 10:17:45

11G_ANT2_2412

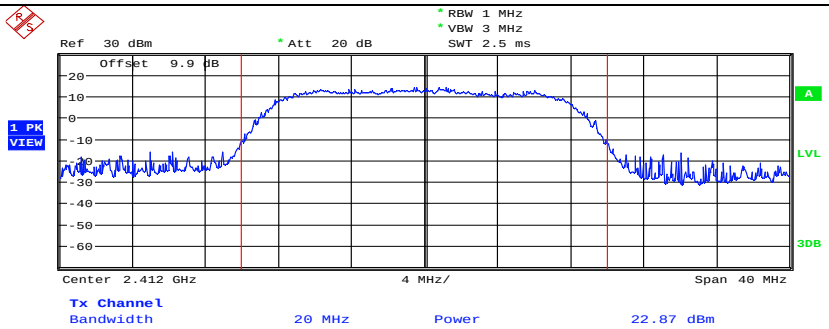

Date: 20.MAR.2018 10:42:52

11G_ANT1_2437

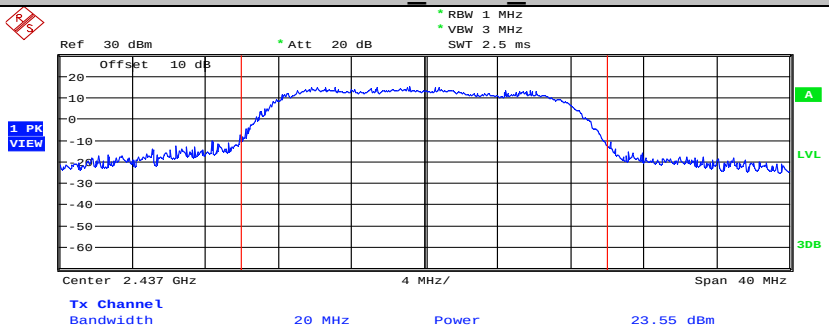

Date: 20.MAR.2018 10:23:09

11G_ANT2_2437

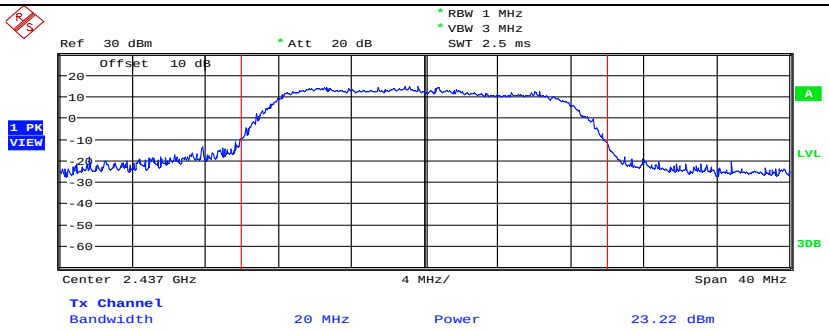

Date: 20.MAR.2018 10:50:12

11G_ANT1_2462

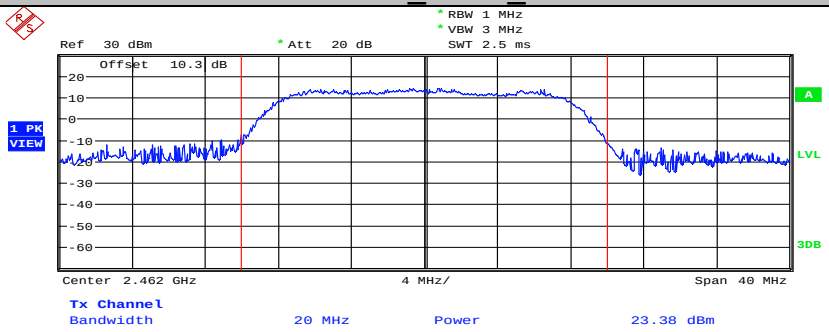

Date: 20.MAR.2018 10:31:49

11G_ANT2_2462

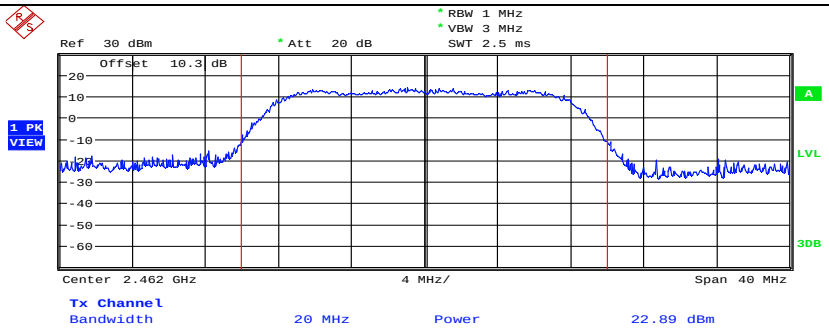

Date: 20.MAR.2018 10:52:42

11N20MIMO_ANT1_2412

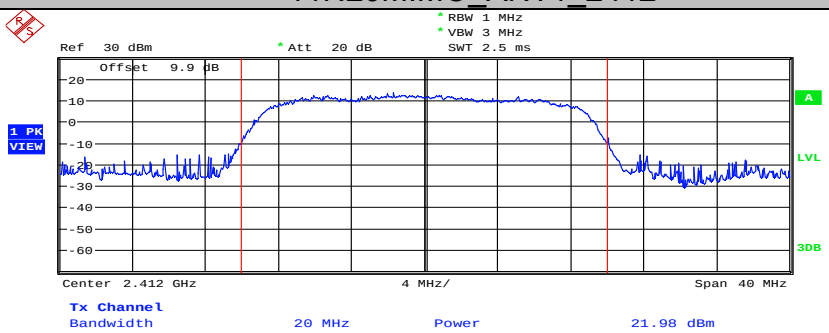

Date: 20.MAR.2018 11:18:03

11N20MIMO_ANT2_2412

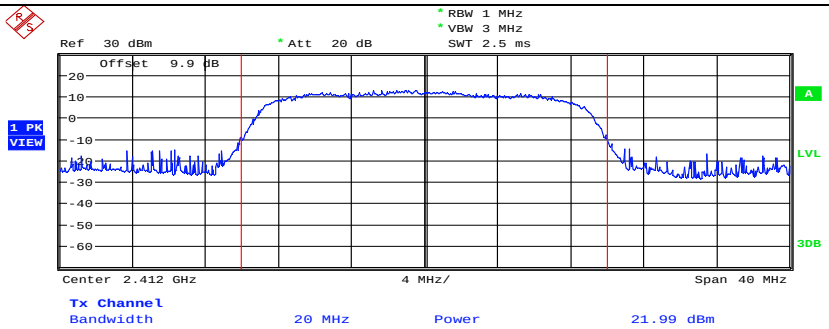

Date: 20.MAR.2018 11:20:12

11N20MIMO_ANT1_2437

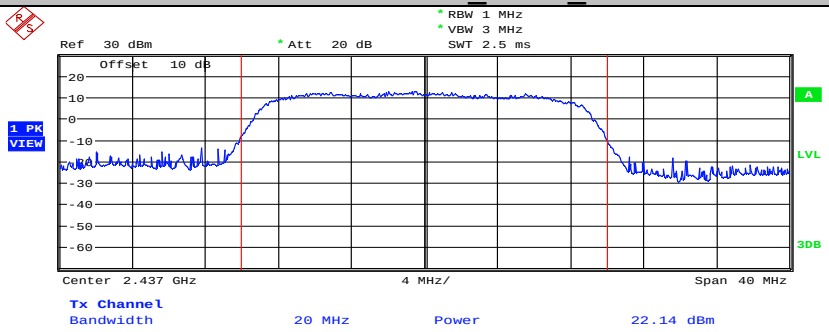

Date: 20.MAR.2018 13:37:43

11N20MIMO_ANT2_2437

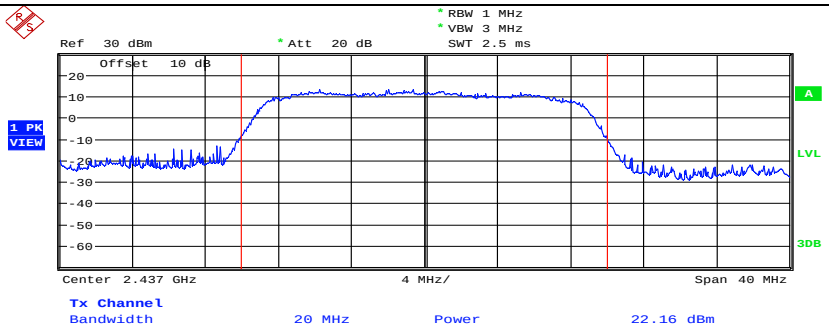

Date: 20.MAR.2018 15:44:01

11N20MIMO_ANT1_2462

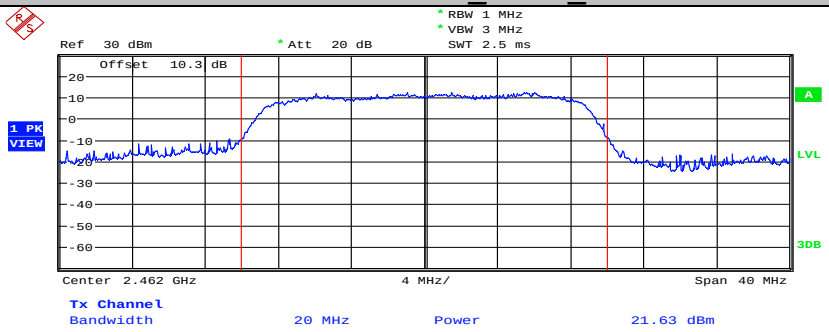

Date: 20.MAR.2018 15:51:26

11N20MIMO_ANT2_2462

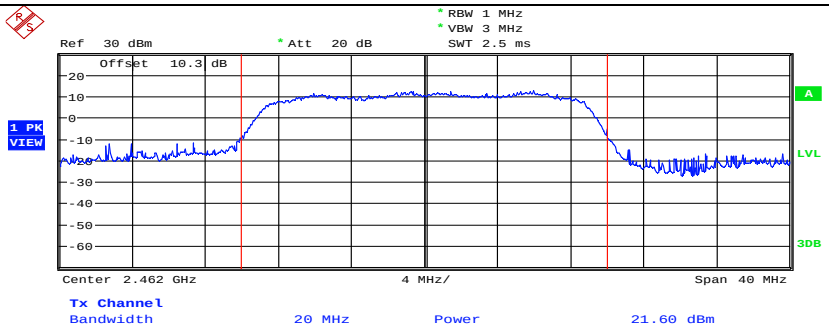

Date: 20.MAR.2018 15:53:37

11N40MIMO_ANT1_2422

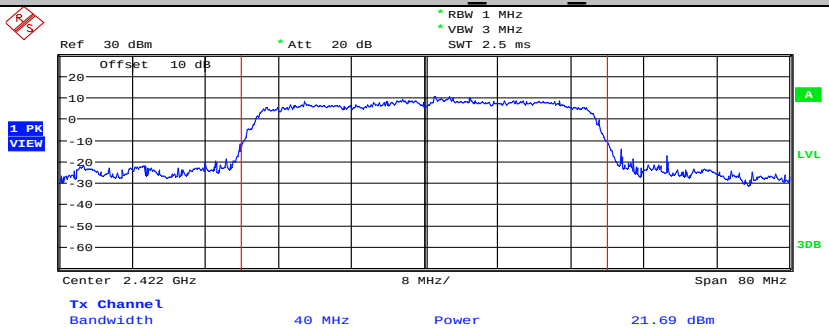

Date: 20.MAR.2018 15:59:17

11N40MIMO_ANT2_2422

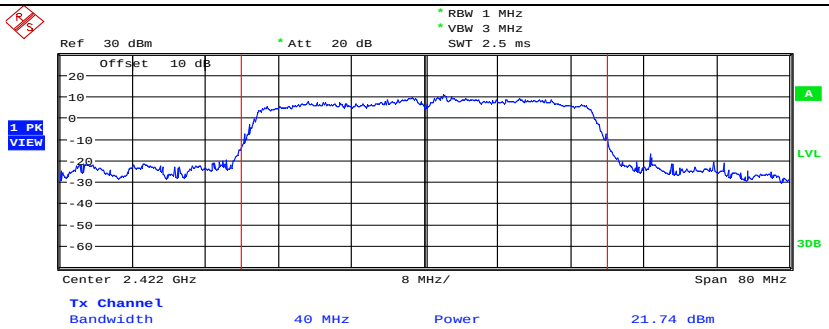

Date: 20.MAR.2018 16:01:45

11N40MIMO_ANT1_2437

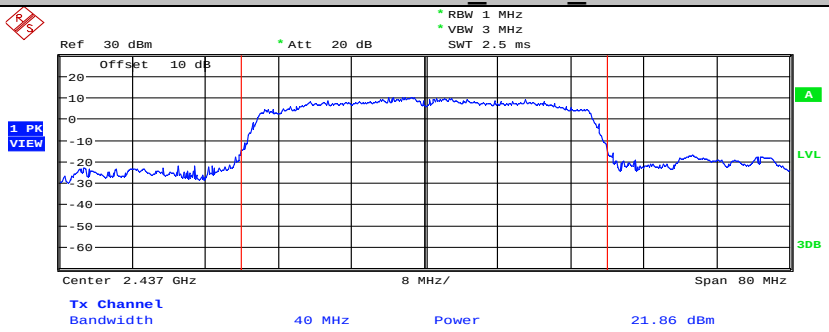

Date: 20.MAR.2018 16:04:30

11N40MIMO_ANT2_2437

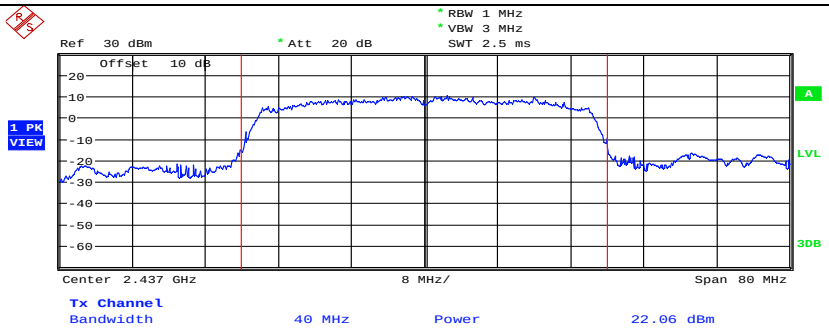

Date: 20.MAR.2018 16:06:24

11N40MIMO_ANT1_2452

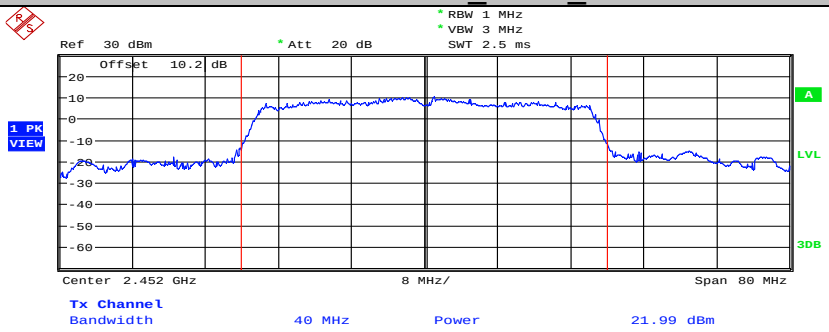

Date: 20.MAR.2018 16:09:01

11N40MIMO_ANT2_2452

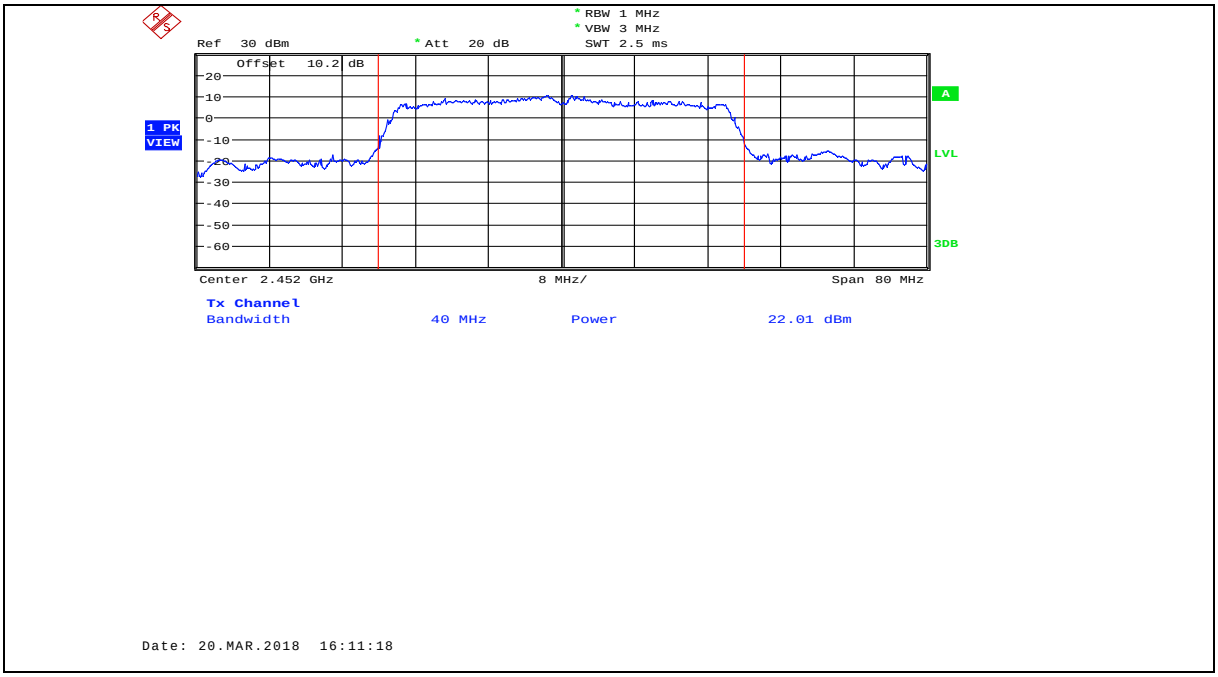

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	3 kHz ≤ RBW ≤ 100 kHz
VBW:	≥ 3RBW
Span	1.5times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test Result

Test Mode	Antenna	Freq. [MHz]	PSD[dBm]	Limit[dBm/kHz]	Verdict
11B	ANT1	2412	4.35	8.00	PASS
11B	ANT1	2437	5.02	8.00	PASS
11B	ANT1	2462	4.43	8.00	PASS
11G	ANT1	2412	-0.83	8.00	PASS
11G	ANT2	2412	-0.08	8.00	PASS
11G	ANT1	2437	0.18	8.00	PASS
11G	ANT2	2437	-1.13	8.00	PASS
11G	ANT1	2462	-1.66	8.00	PASS
11G	ANT2	2462	-1.72	8.00	PASS
11N20 MIMO	ANT1	2412	-0.93	8.00	PASS
11N20 MIMO	ANT2	2412	-1.12	8.00	PASS
11N20 MIMO	total	2412	1.99	8.00	PASS
11N20 MIMO	ANT1	2437	-1.19	8.00	PASS
11N20 MIMO	ANT2	2437	-1.13	8.00	PASS
11N20 MIMO	total	2437	1.85	8.00	PASS
11N20 MIMO	ANT1	2462	-1.10	8.00	PASS
11N20 MIMO	ANT2	2462	-1.95	8.00	PASS
11N20 MIMO	total	2462	1.51	8.00	PASS
11N40 MIMO	ANT1	2422	-4.61	8.00	PASS
11N40 MIMO	ANT2	2422	-5.04	8.00	PASS
11N40 MIMO	total	2422	-1.81	8.00	PASS
11N40 MIMO	ANT1	2437	-4.40	8.00	PASS
11N40 MIMO	ANT2	2437	-4.48	8.00	PASS
11N40 MIMO	total	2437	-1.43	8.00	PASS
11N40 MIMO	ANT1	2452	-4.68	8.00	PASS
11N40 MIMO	ANT2	2452	-4.57	8.00	PASS
11N40 MIMO	total	2452	-1.61	8.00	PASS

6.5. original test data

11B_ANT1_2412

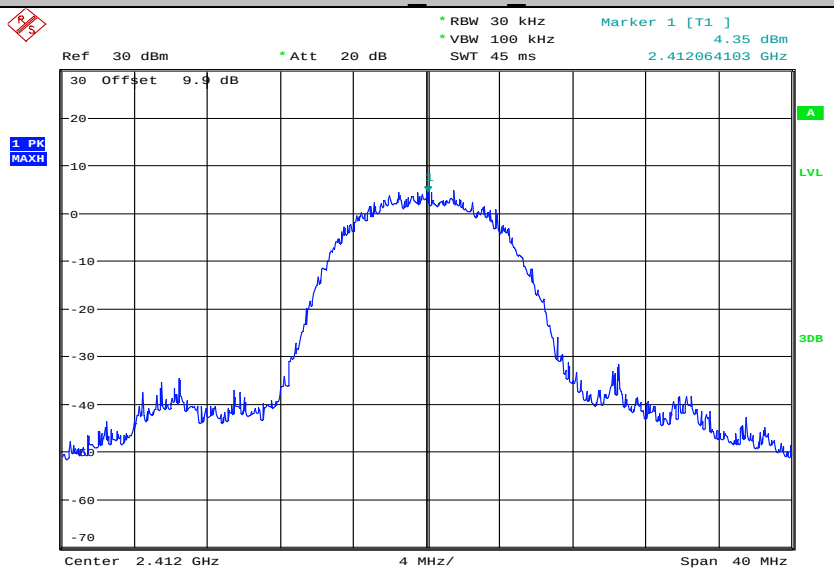

Date: 20.MAR.2018 09:48:50

11B_ANT1_2437

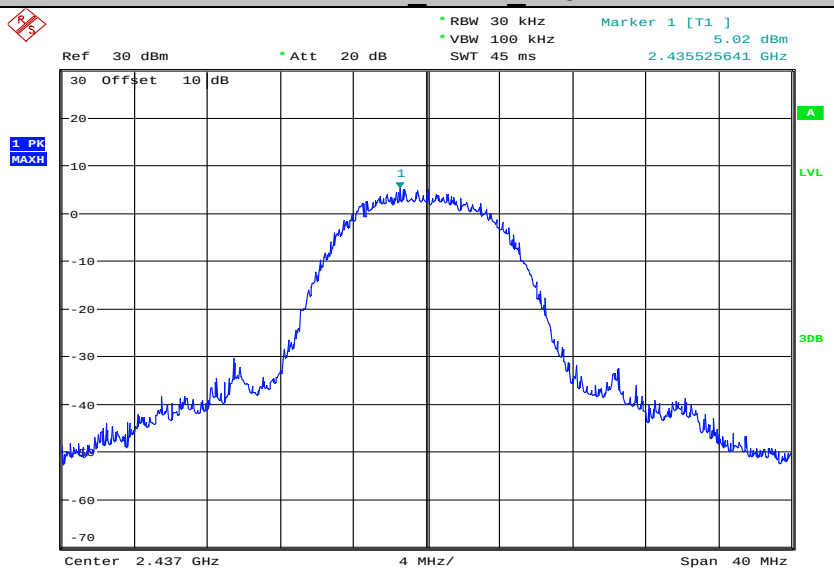

Date: 20.MAR.2018 10:01:32

11B_ANT1_2462

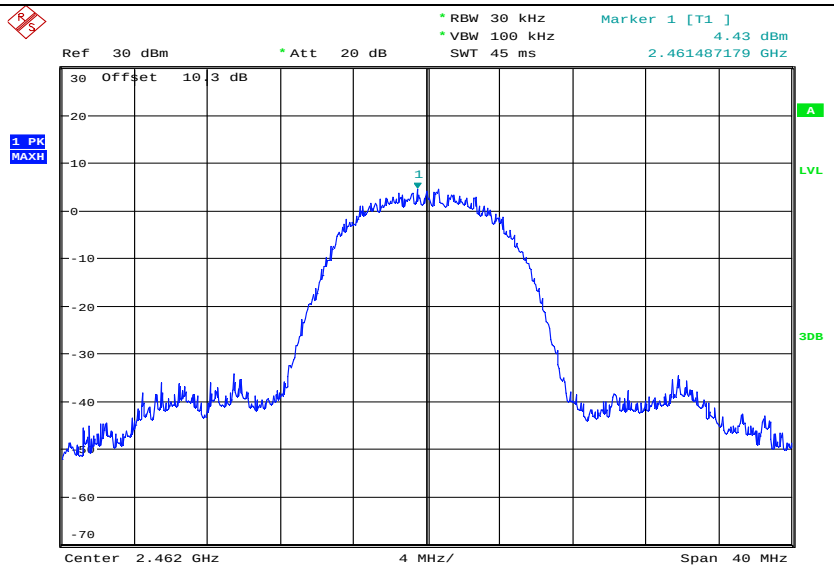

Date: 20.MAR.2018 10:05:00

11G_ANT1_2412

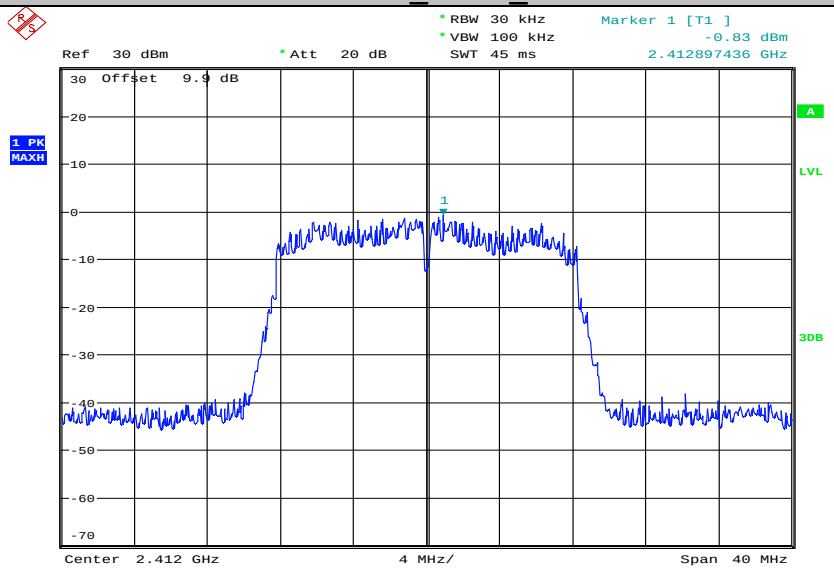

Date: 20.MAR.2018 10:17:56

11G_ANT2_2412

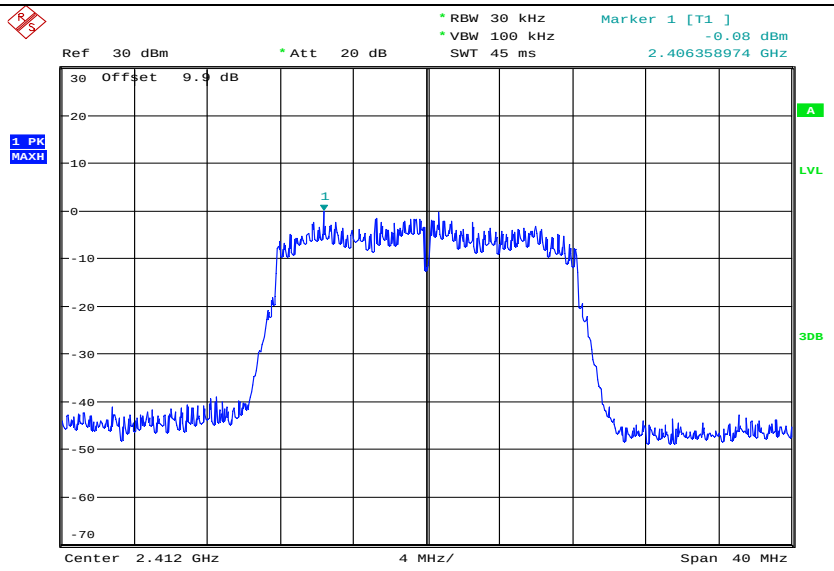

Date: 20.MAR.2018 10:43:04

11G_ANT1_2437

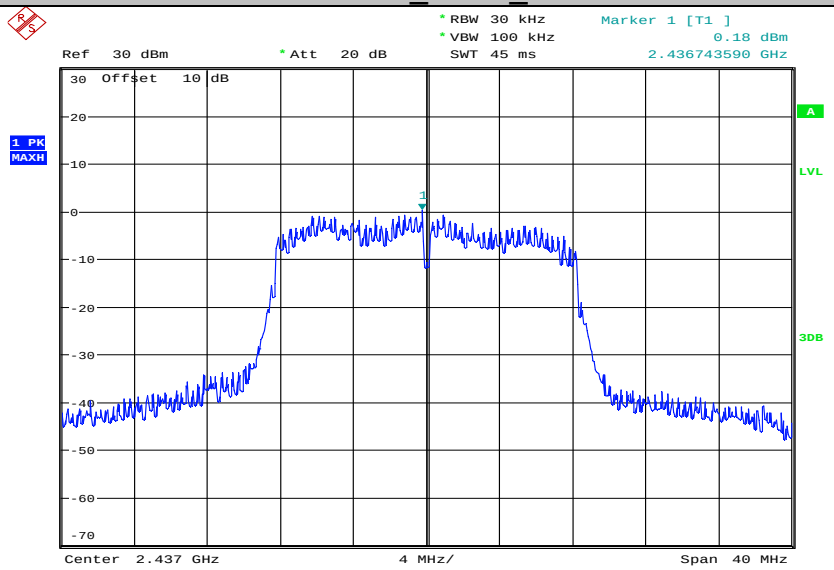

Date: 20.MAR.2018 10:23:19

11G_ANT2_2437

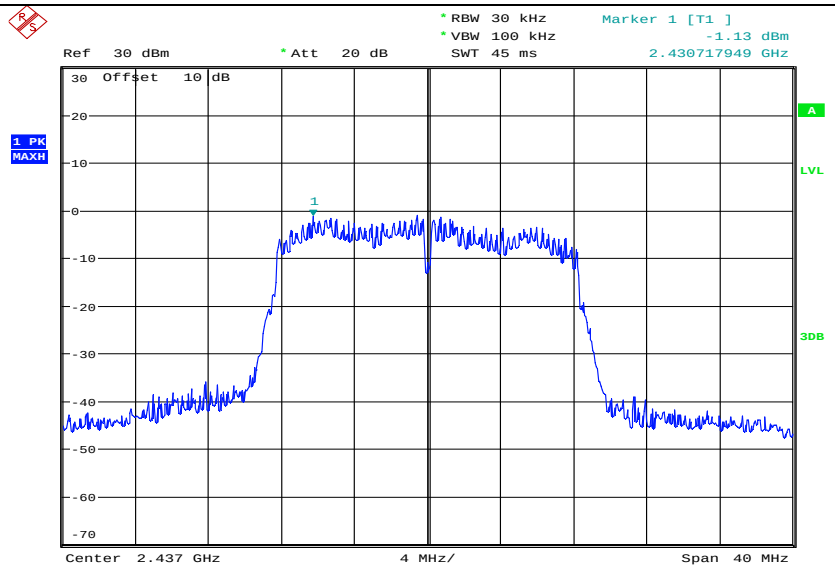

Date: 20.MAR.2018 10:50:24

11G_ANT1_2462

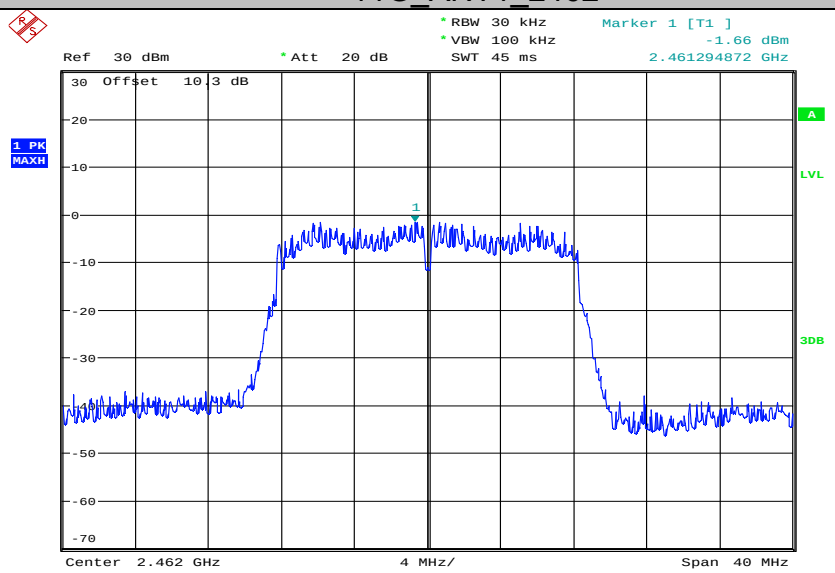

Date: 20.MAR.2018 10:32:00

11G_ANT2_2462

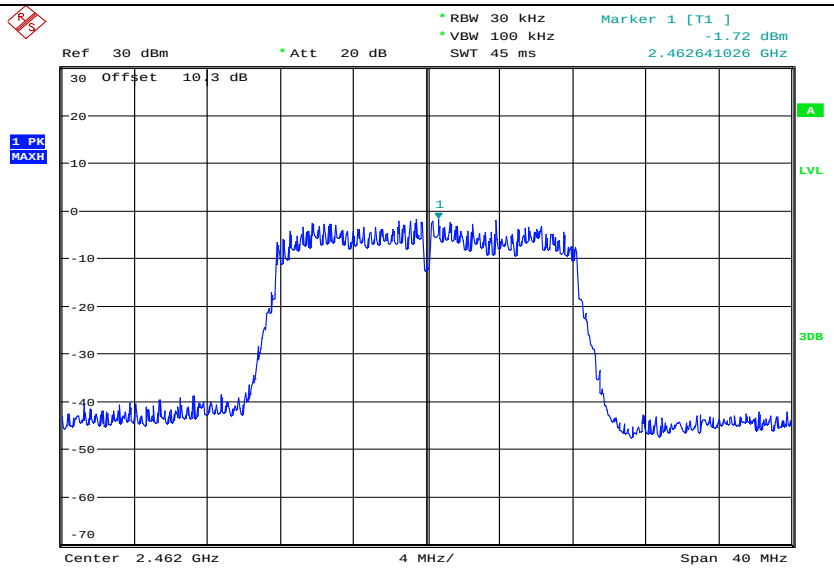

Date: 20.MAR.2018 10:52:53

11N20MIMO_ANT1_2412

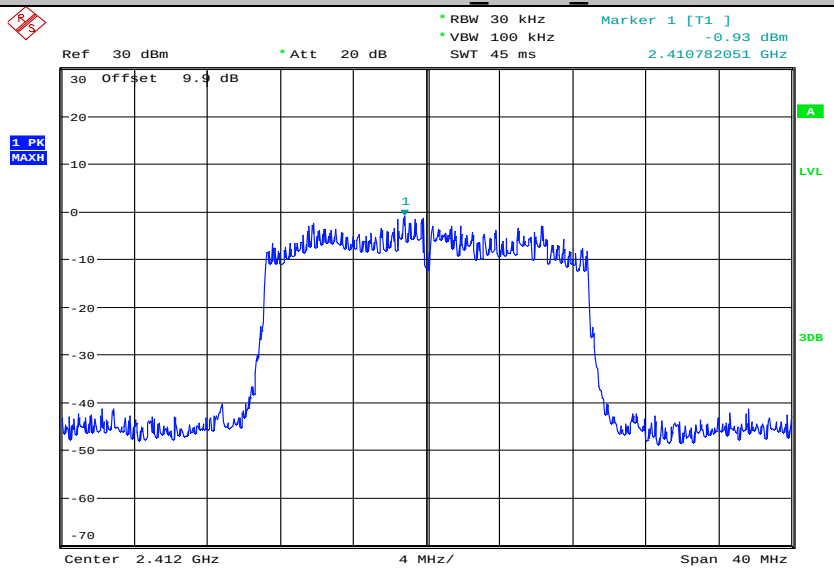

Date: 20.MAR.2018 11:18:13

11N20MIMO_ANT2_2412

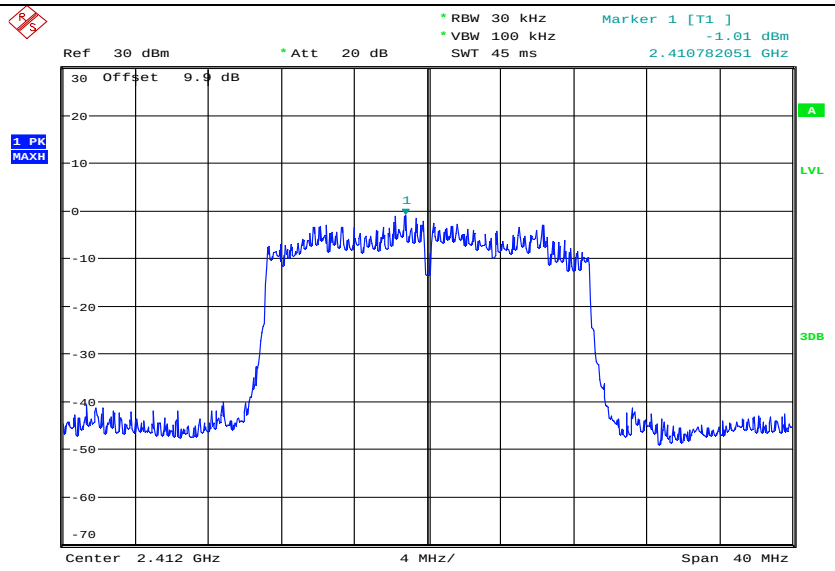

Date: 20.MAR.2018 11:20:24

11N20MIMO_ANT1_2437

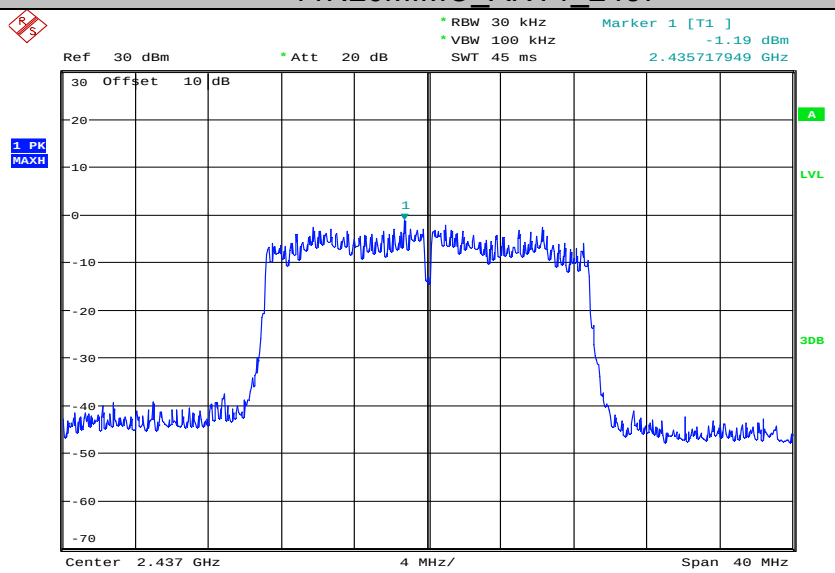

Date: 20.MAR.2018 13:37:54

11N20MIMO_ANT2_2437

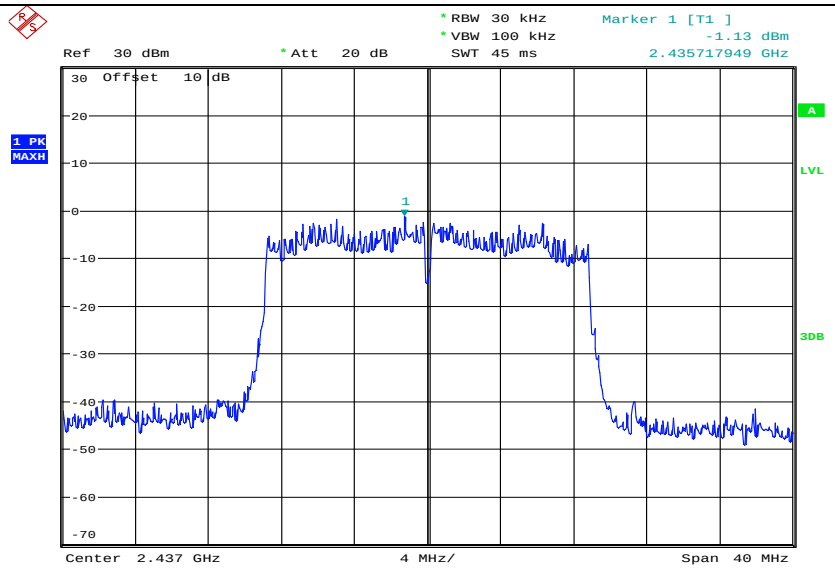

Date: 20.MAR.2018 15:44:13

11N20MIMO_ANT1_2462

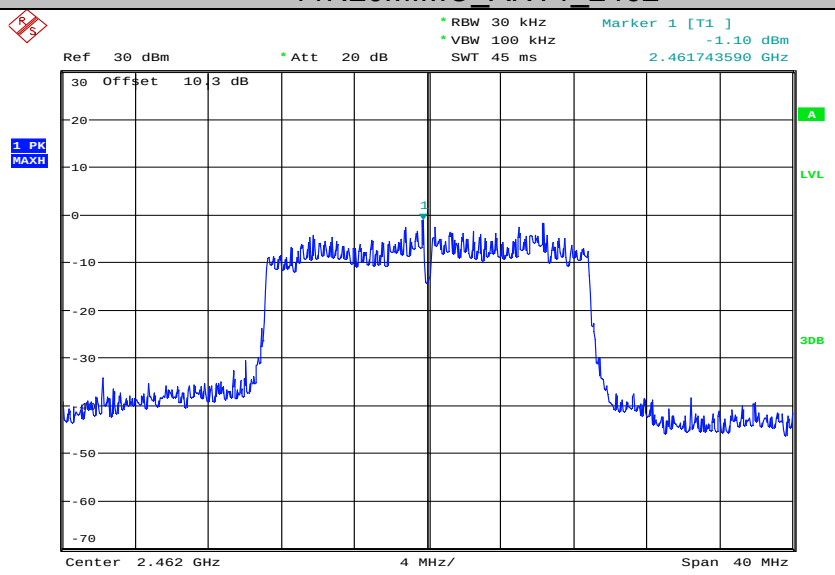

Date: 20.MAR.2018 15:51:37

11N20MIMO_ANT2_2462

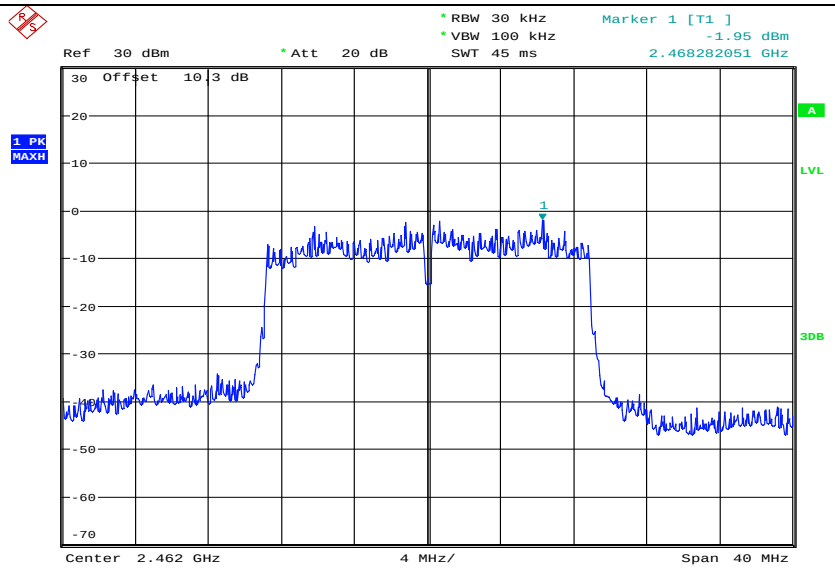

Date: 20.MAR.2018 15:53:48

11N40MIMO_ANT1_2422

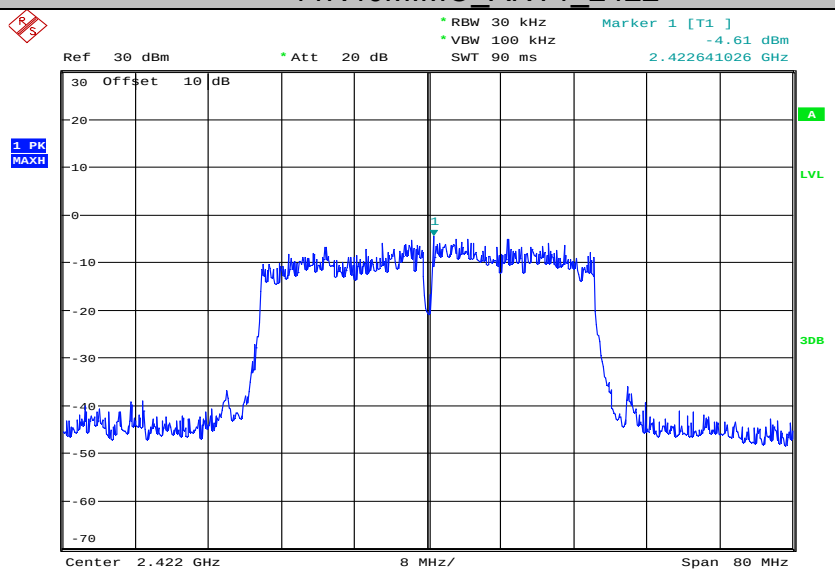

Date: 20.MAR.2018 15:59:31

11N40MIMO_ANT2_2422

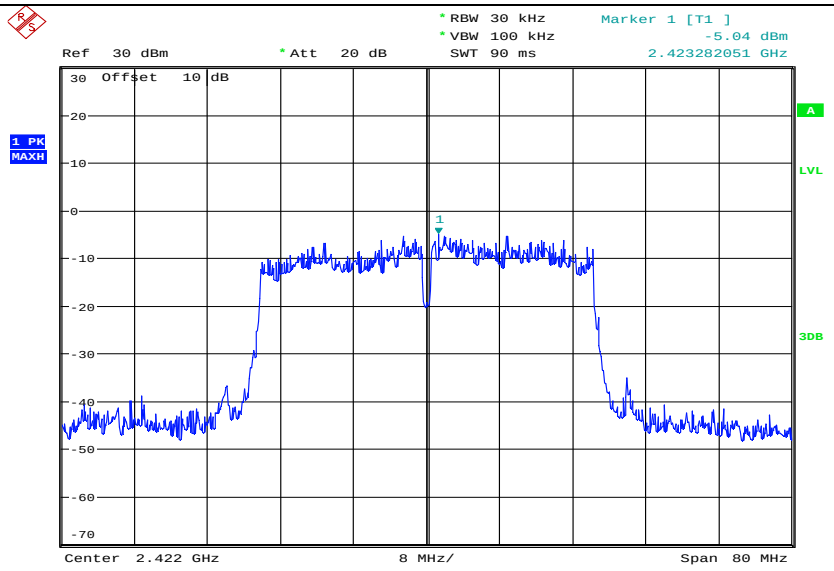

Date: 20.MAR.2018 16:01:56

11N40MIMO_ANT1_2437

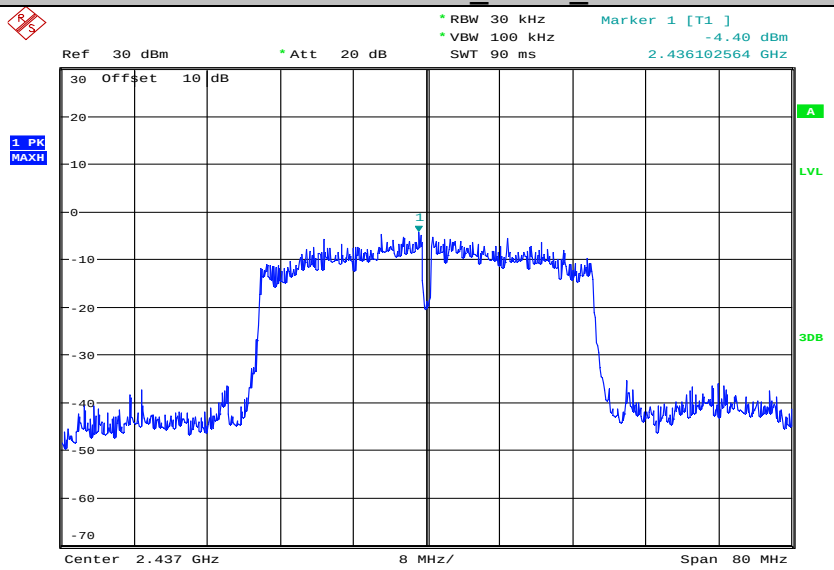

Date: 20.MAR.2018 16:04:41

11N40MIMO_ANT2_2437

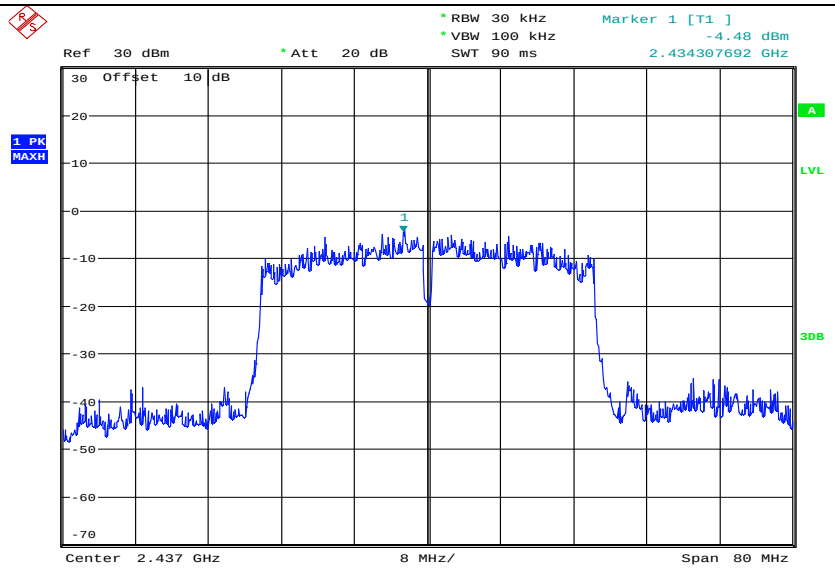

Date: 20.MAR.2018 16:06:35

11N40MIMO_ANT1_2452

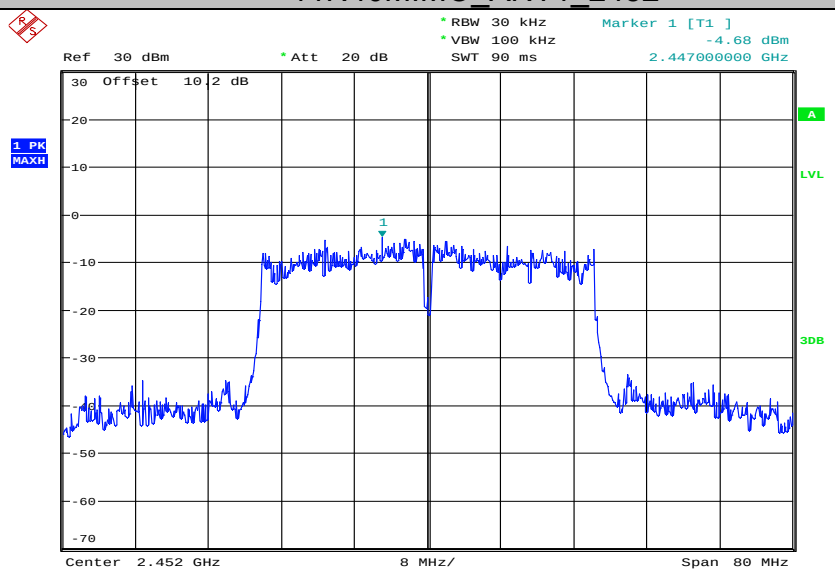

Date: 20.MAR.2018 16:09:11

11N40MIMO_ANT2_2452

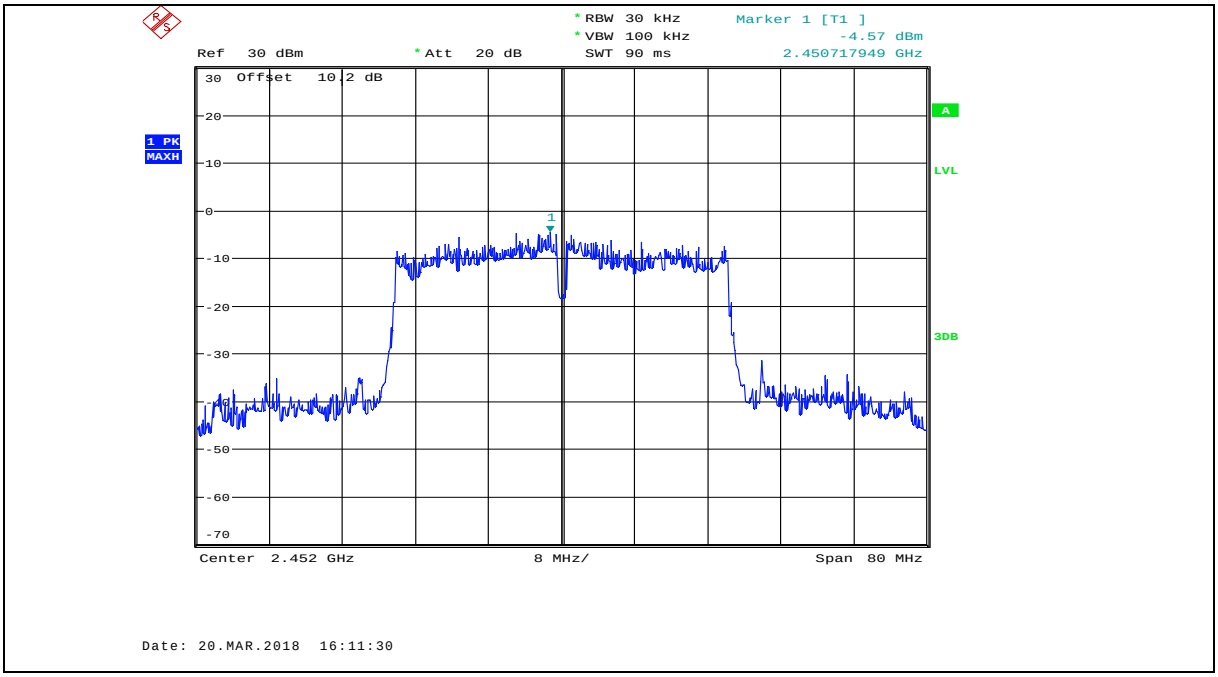
RBW 30 kHz
VBW 100 kHz
SWT 90 ms
Marker 1 [T1]
-4.57 dBm
2.450717949 GHz
Ref 30 dBm
Att 20 dB
Offset 10.2 dB
1 PK
MAXH
A
LVL
3DB
Center 2.452 GHz
8 MHz/
Span 80 MHz
Date: 20.MAR.2018 16:11:30

7. Band Edge and Spurious Emissions (Conducted)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100kHz
VBW:	300kHz
Span	1.5times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100kHz
VBW:	300kHz
Span	Encompass frequency range to be measured
Number of measurement points	≥span/RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

7.4. Test Result

EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result Result (dBm)
11b	CH1	PASS	11n HT 20	CH1	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH11	PASS
11g	CH1	PASS	11n HT 40	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS

EUT Set Mode	CH or Frequency	Ant2 Result (dBm)	EUT Set Mode	CH or Frequency	Ant2 Result (dBm)
11b	CH1	/	11n HT 20	CH1	PASS
	CH6	/		CH6	PASS
	CH11	/		CH11	PASS
11g	CH1	PASS	11n HT 40	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS

7.5. original test data

Band Edge

11B_ANT1_Low

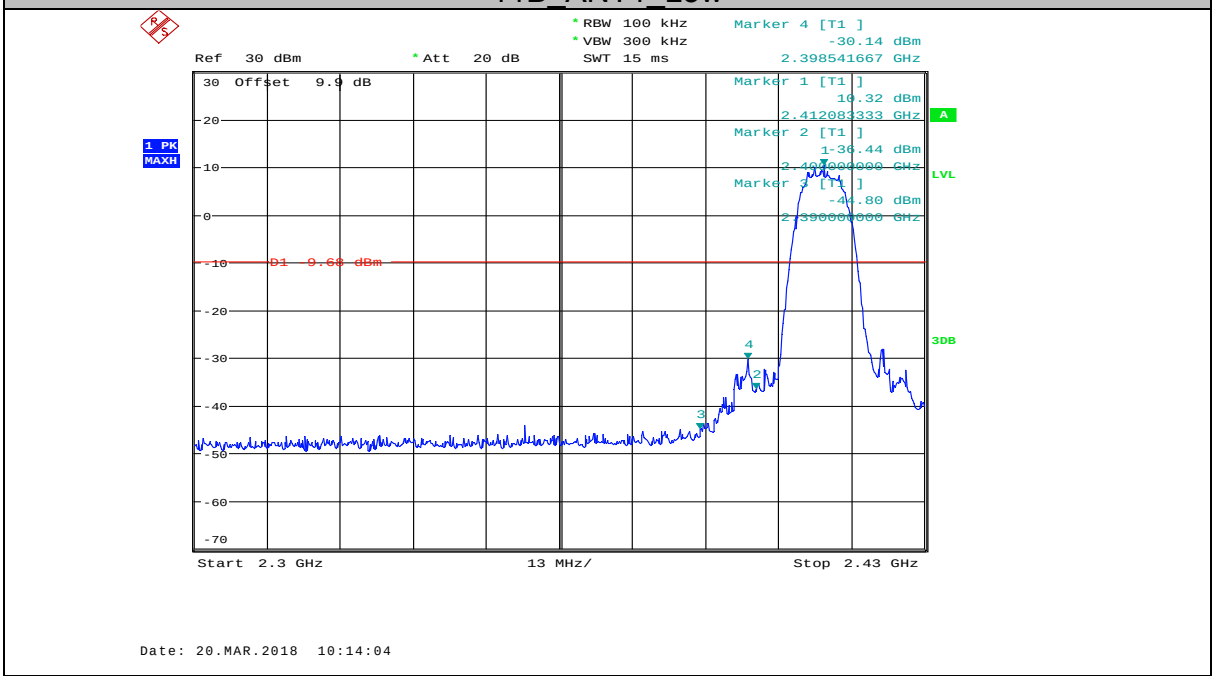

11B_ANT1_High

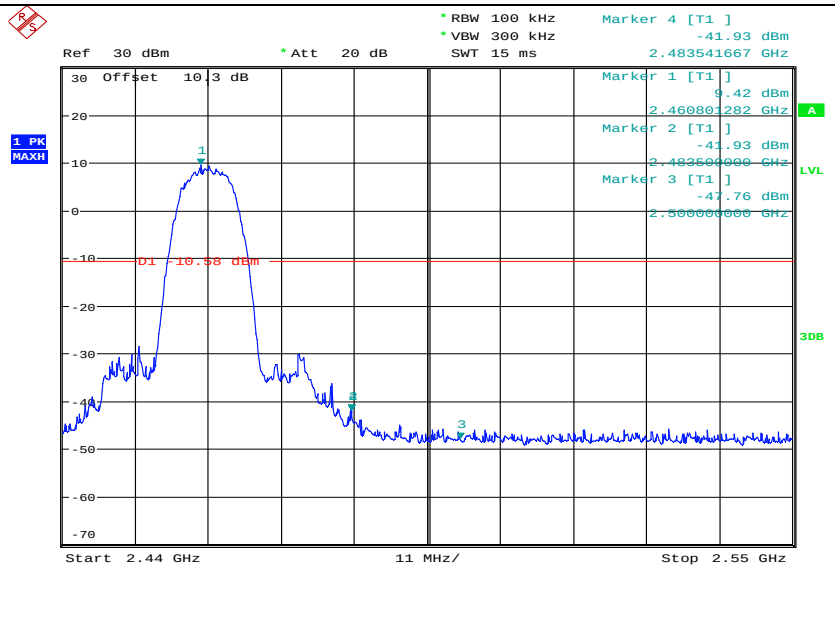

11G_ANT1_Low

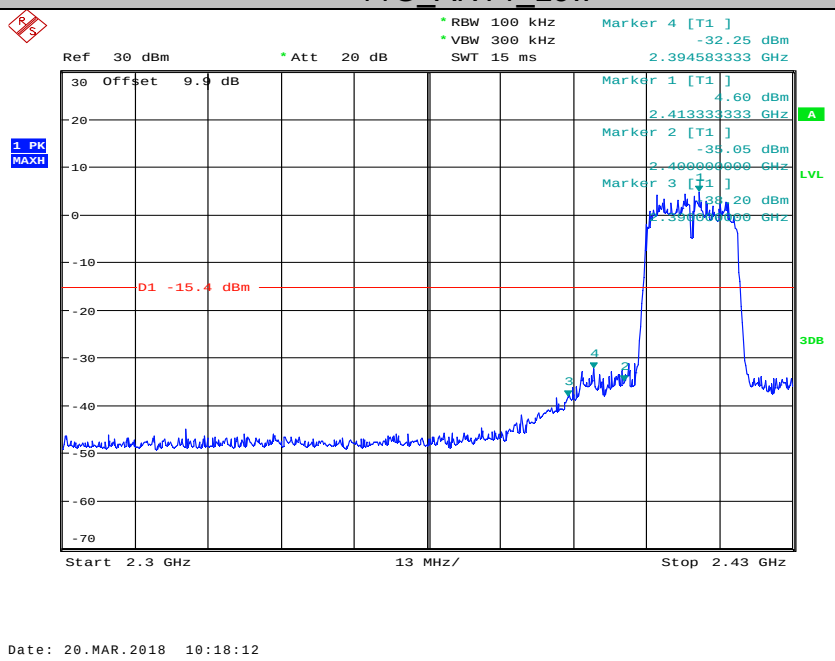

11G_ANT2_Low

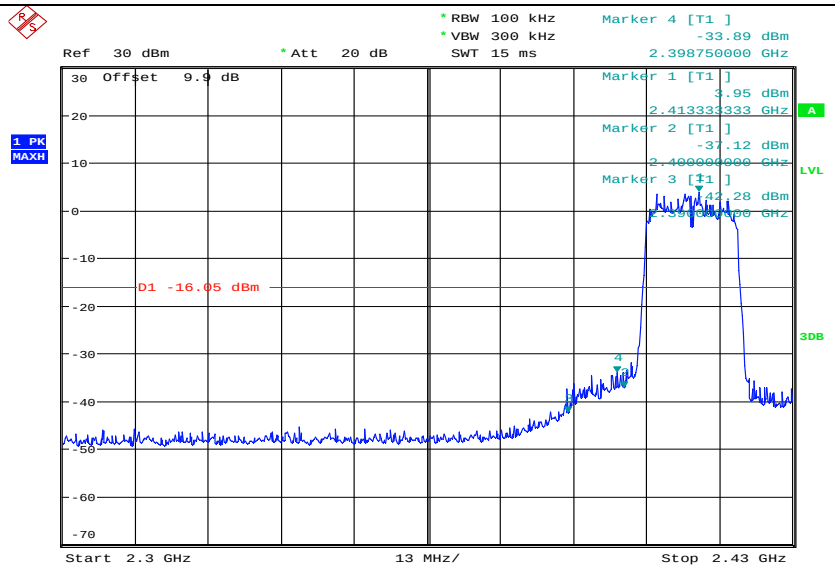

Date: 20.MAR.2018 10:43:19

11G_ANT1_High

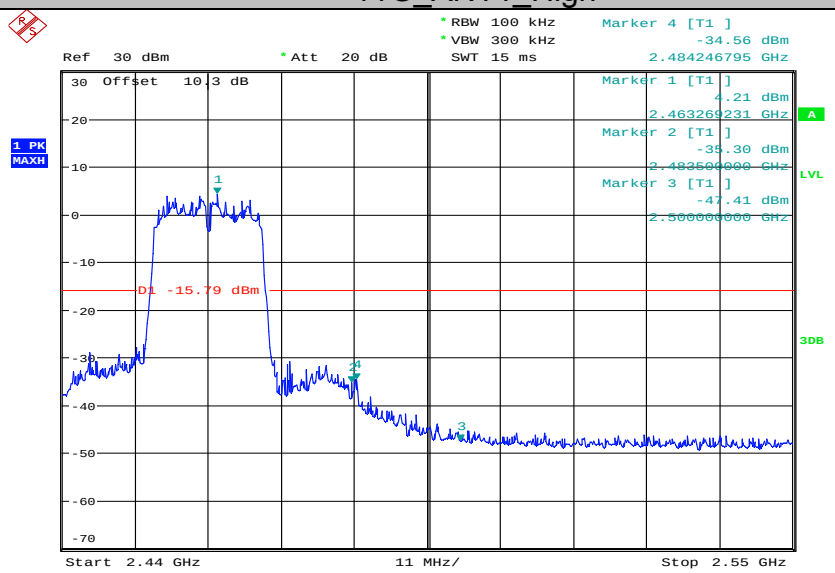

Date: 20.MAR.2018 10:32:16

11G_ANT2_High

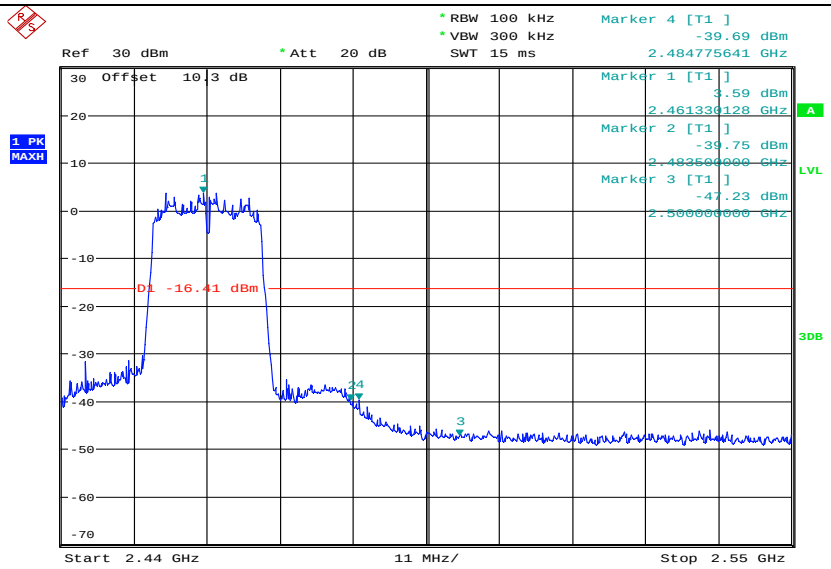

Date: 20.MAR.2018 10:53:09

11N20MIMO_ANT1_Low

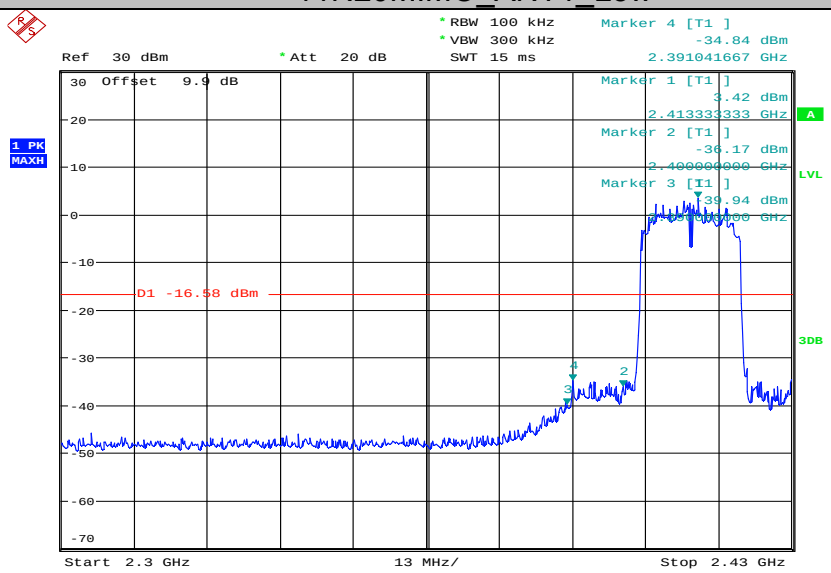

Date: 20.MAR.2018 11:18:29

11N20MIMO_ANT2_Low

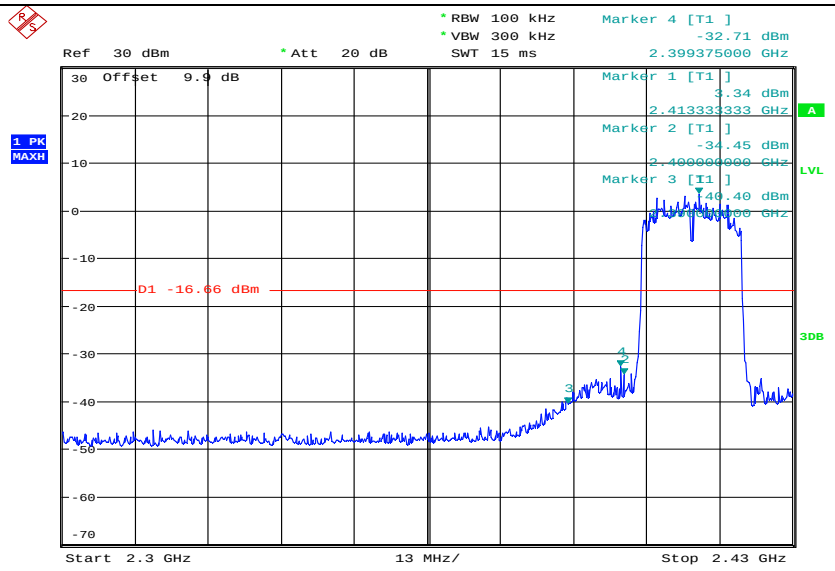

Date: 20.MAR.2018 11:20:40

11N20MIMO_ANT1_High

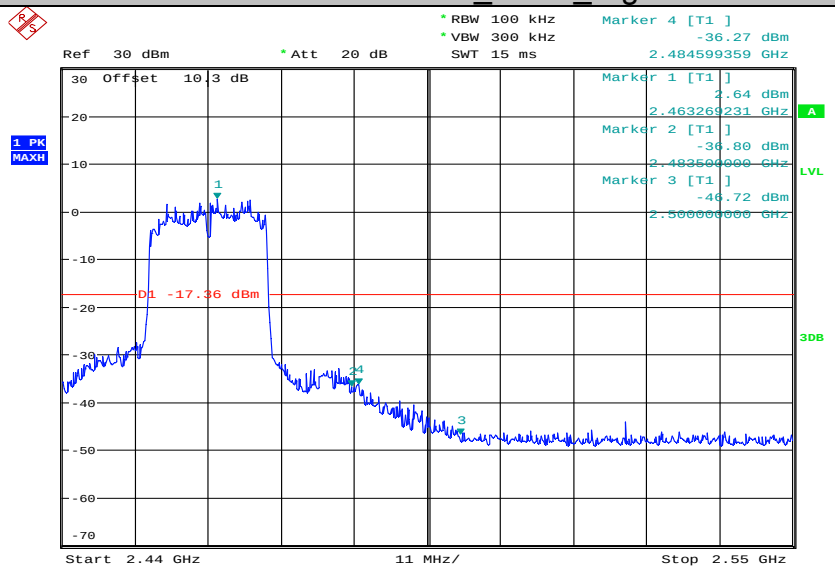

Date: 20.MAR.2018 15:51:53

11N20MIMO_ANT2_High

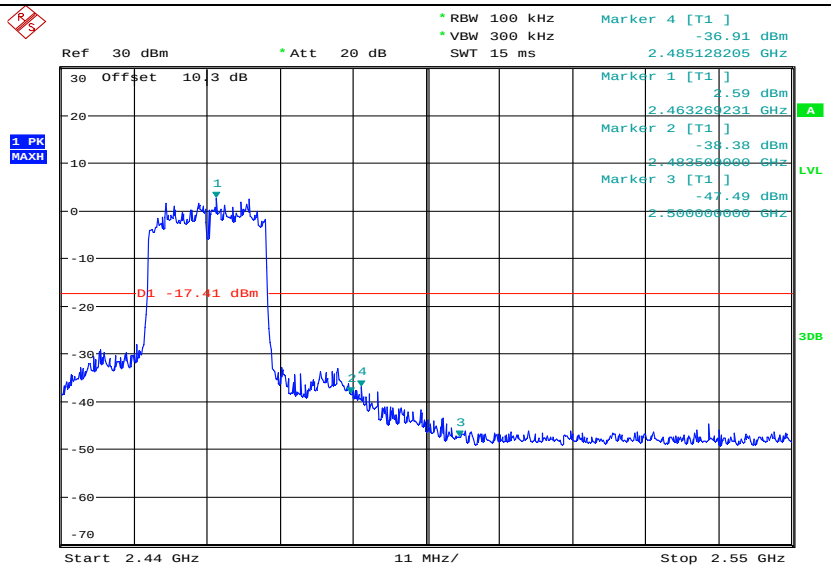

Date: 20.MAR.2018 15:54:04

11N40MIMO_ANT1_Low

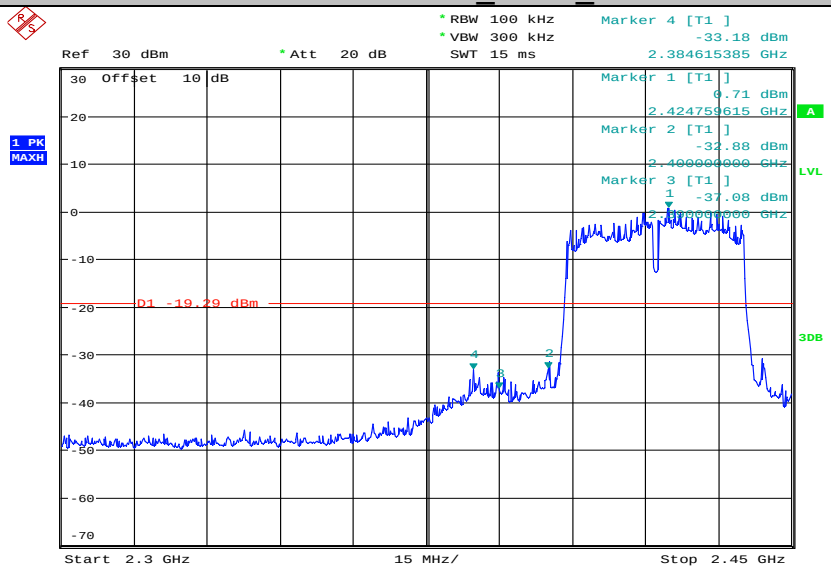

Date: 20.MAR.2018 16:00:04

11N40MIMO_ANT2_Low

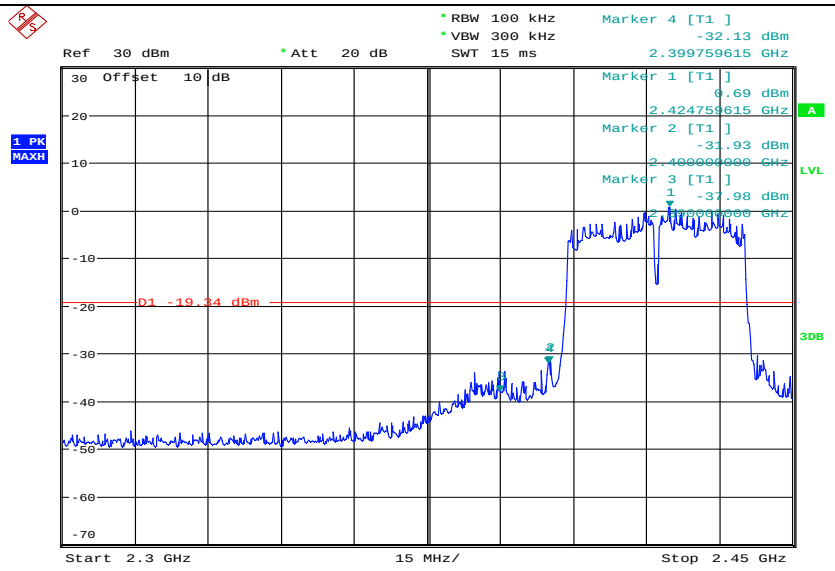

Date: 20.MAR.2018 16:02:12

11N40MIMO_ANT1_High

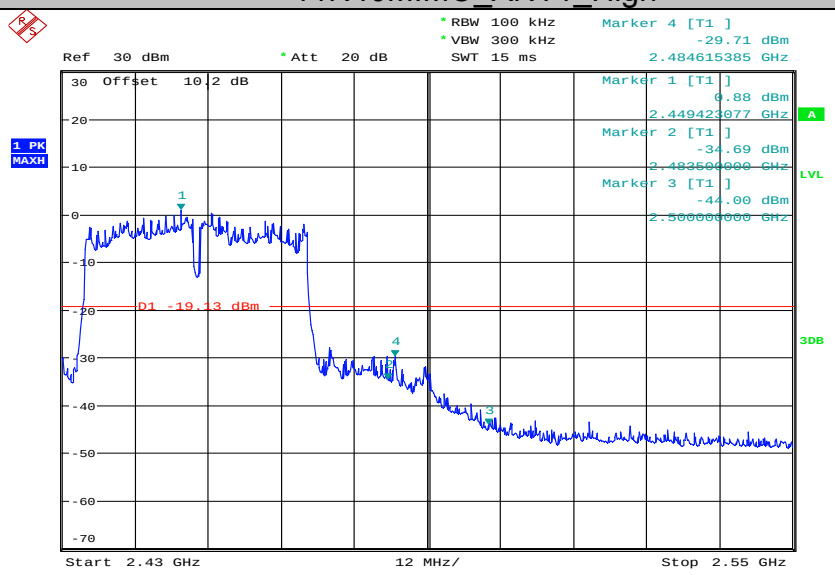

Date: 20.MAR.2018 16:09:27

11N40MIMO_ANT2_High

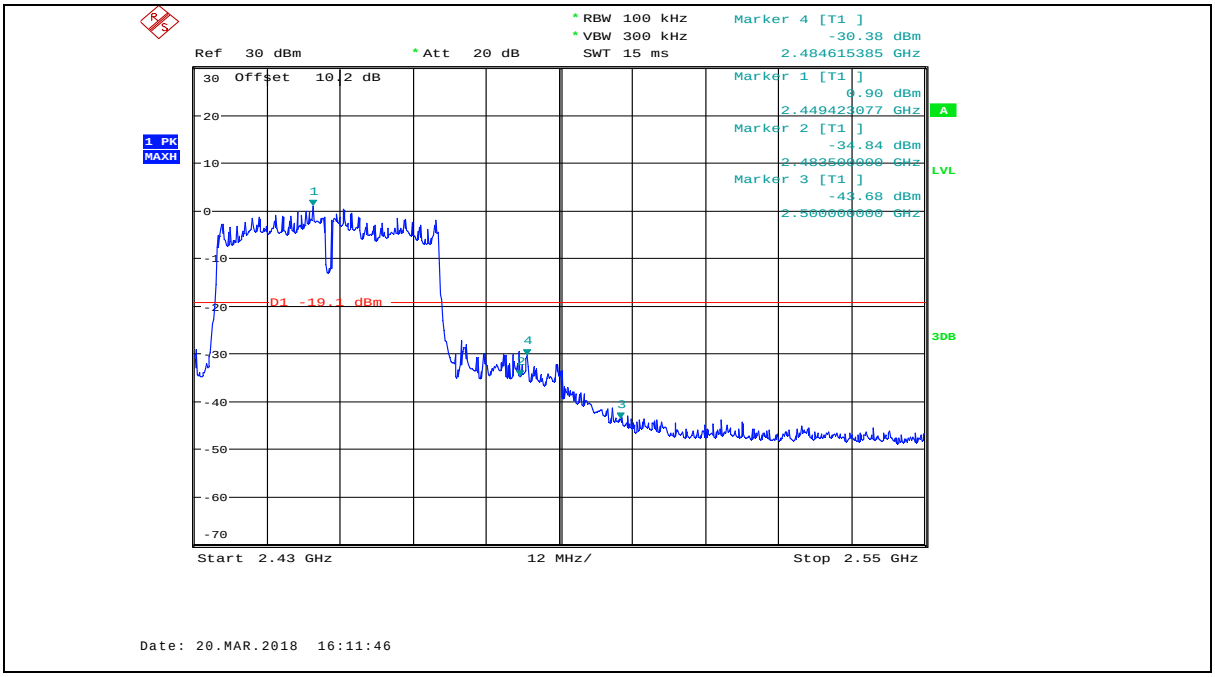

Spurious Emissions

11B_ANT1_2412_Ref

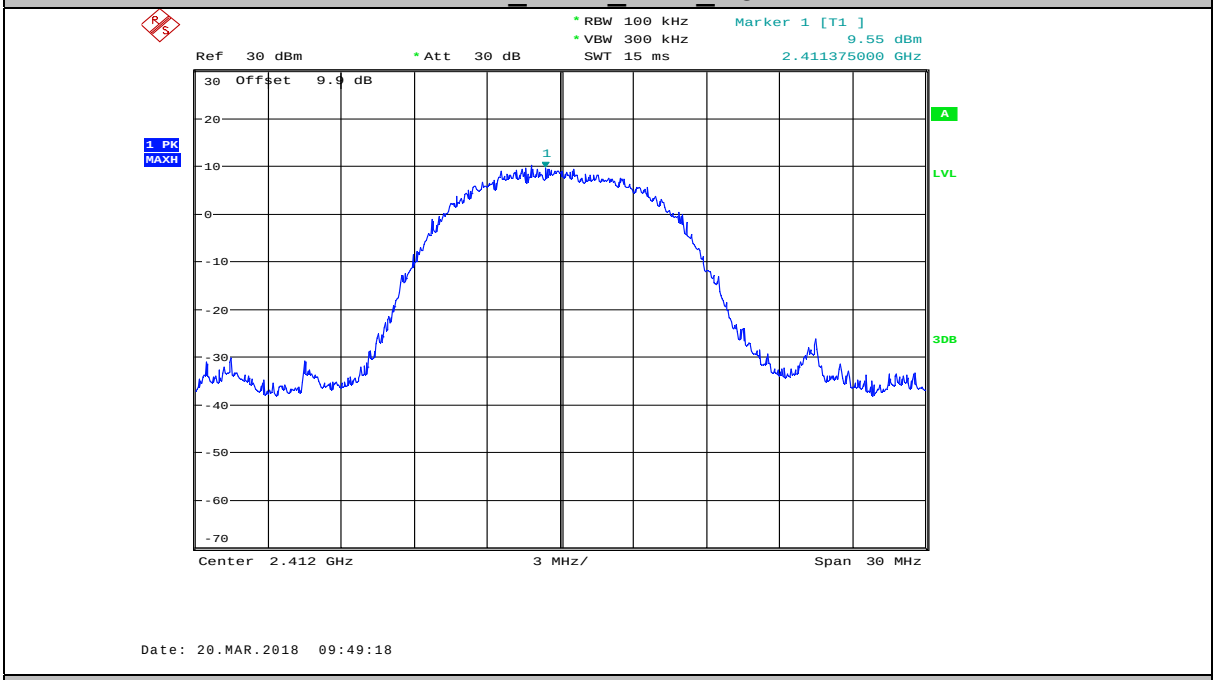

11B_ANT1_2412_30~1000

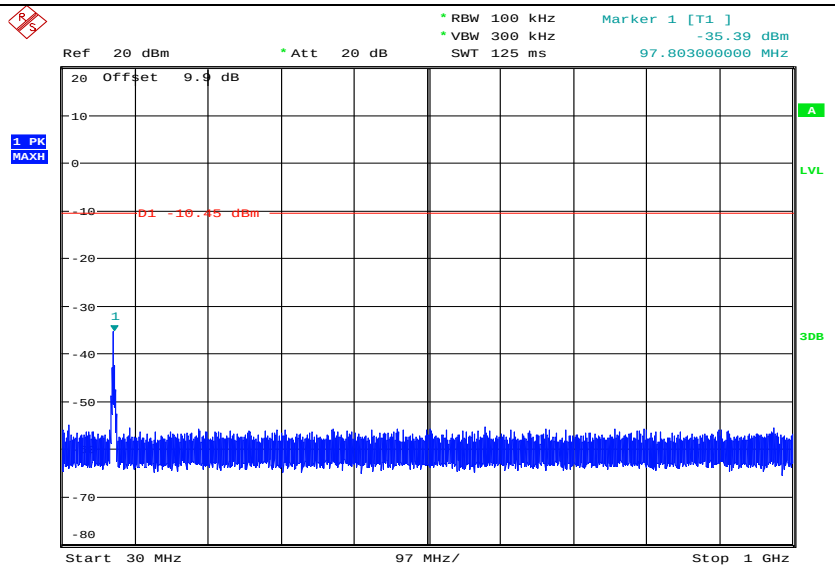

Date: 20.MAR.2018 09:49:27

11B_ANT1_2412_1000~26500

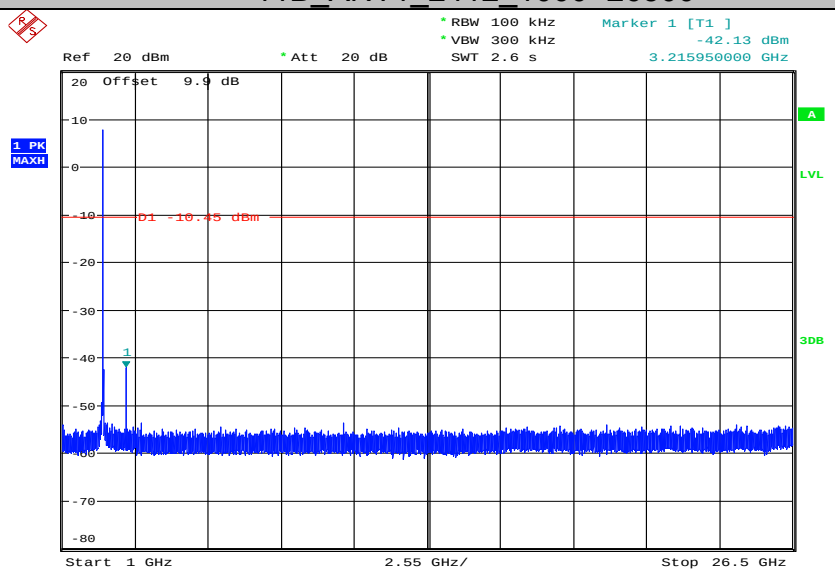

Date: 20.MAR.2018 09:50:10

11B_ANT1_2437_Ref

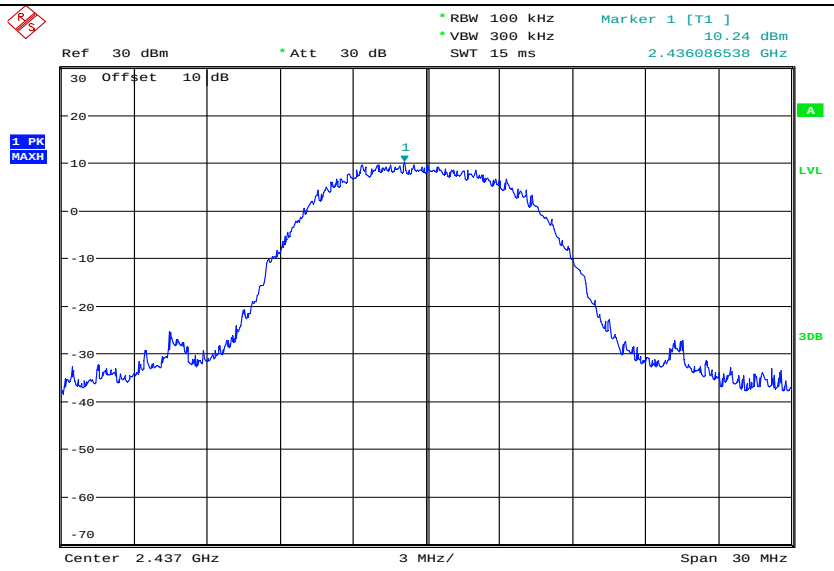

Date: 20.MAR.2018 10:01:44

11B_ANT1_2437_30~1000

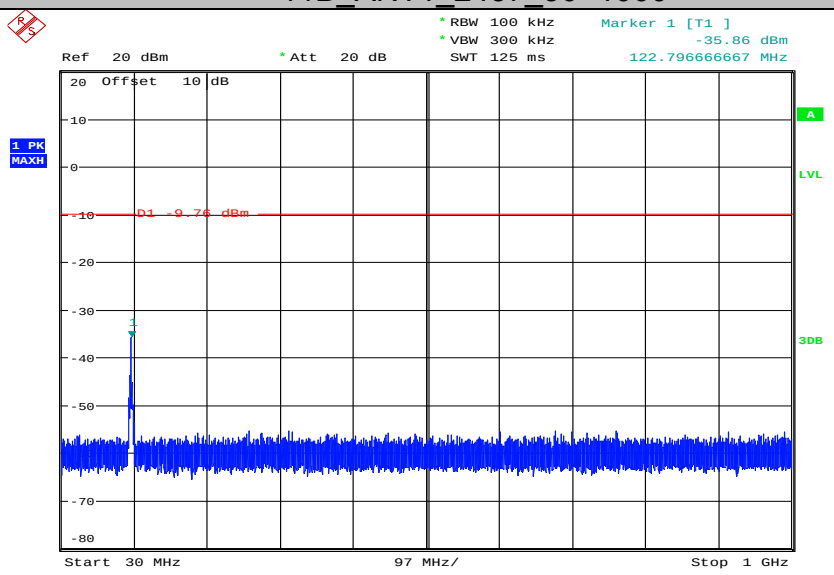

Date: 20.MAR.2018 10:01:52

11B_ANT1_2437_1000~26500

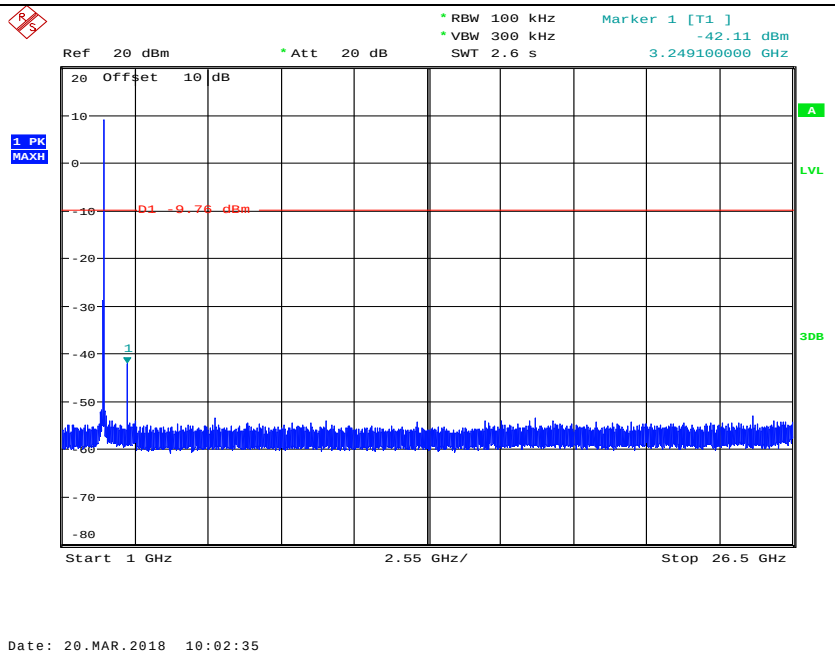

11B_ANT1_2462_Ref

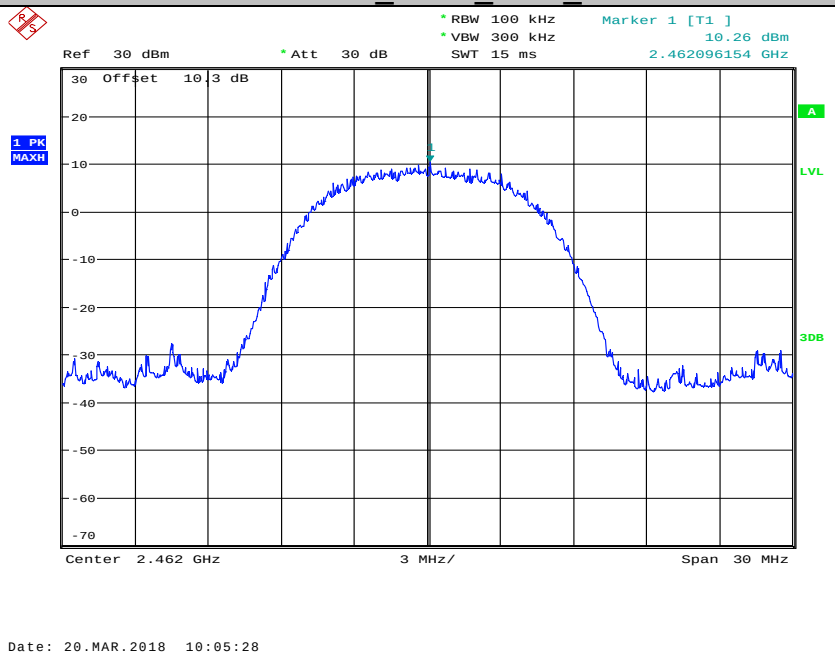

11B_ANT1_2462_30~1000

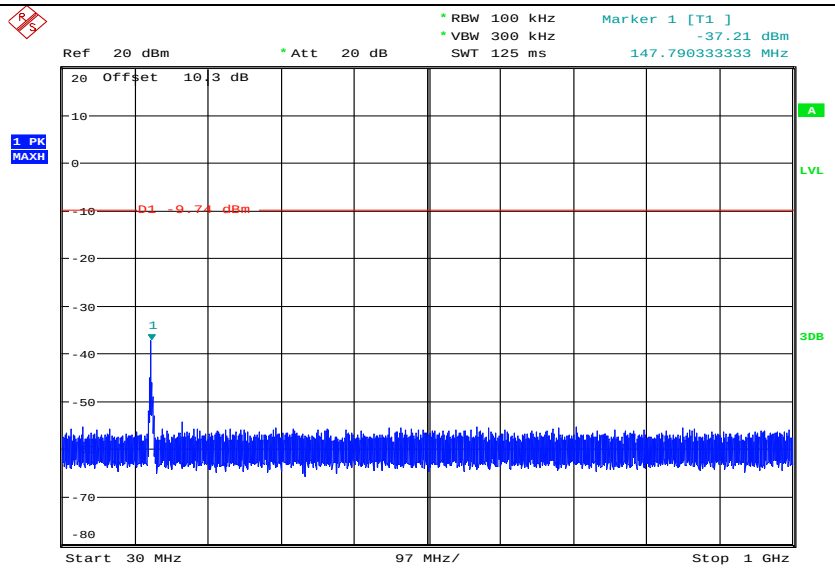

Date: 20.MAR.2018 10:05:37

11B_ANT1_2462_1000~26500

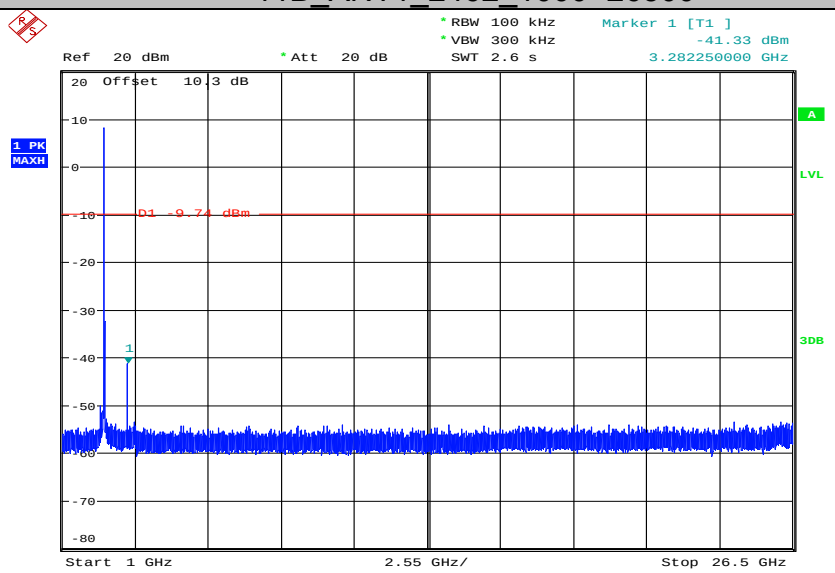

Date: 20.MAR.2018 10:06:20

11G_ANT1_2412_Ref

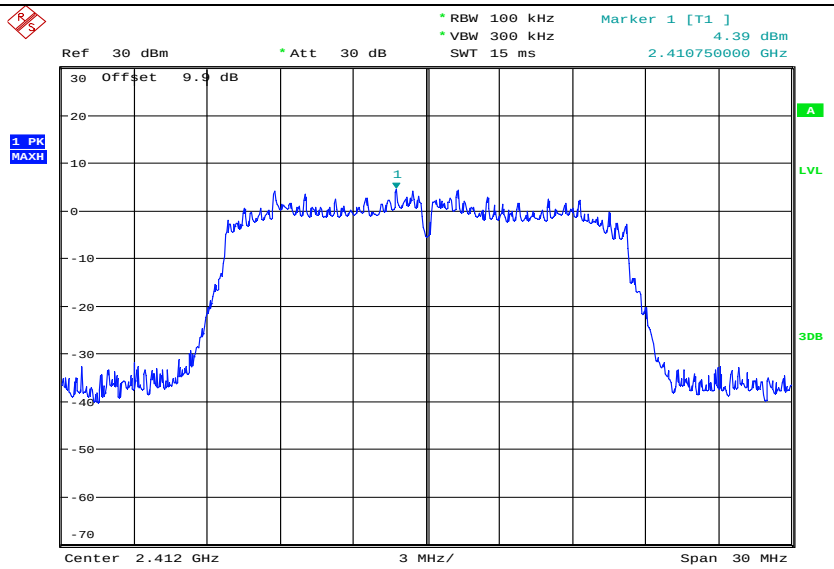

Date: 20.MAR.2018 10:18:24

11G_ANT1_2412_30~1000

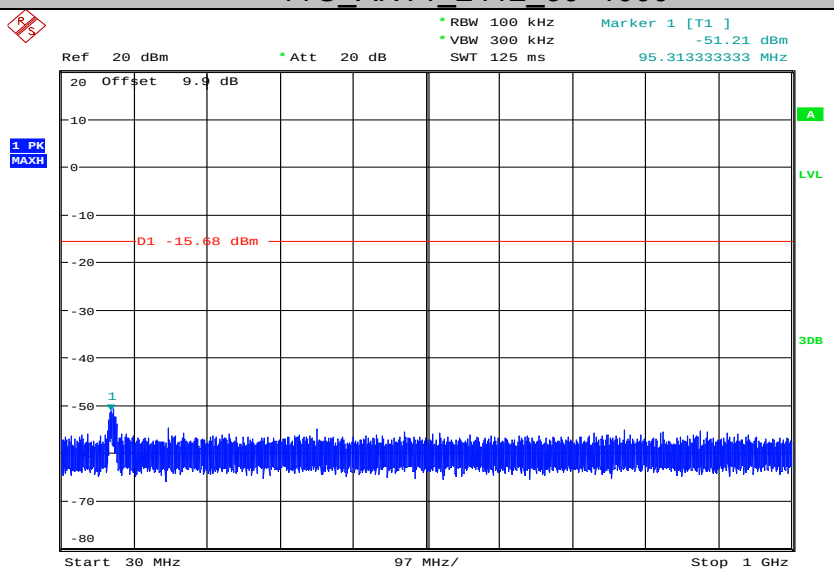

Date: 20.MAR.2018 10:18:33

11G_ANT1_2412_1000~26500

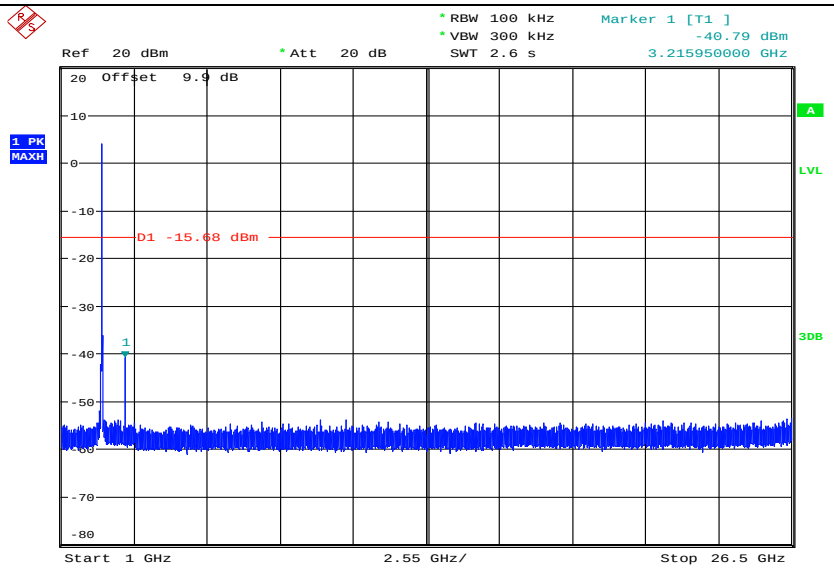

Date: 20.MAR.2018 10:19:16

11G_ANT2_2412_Ref

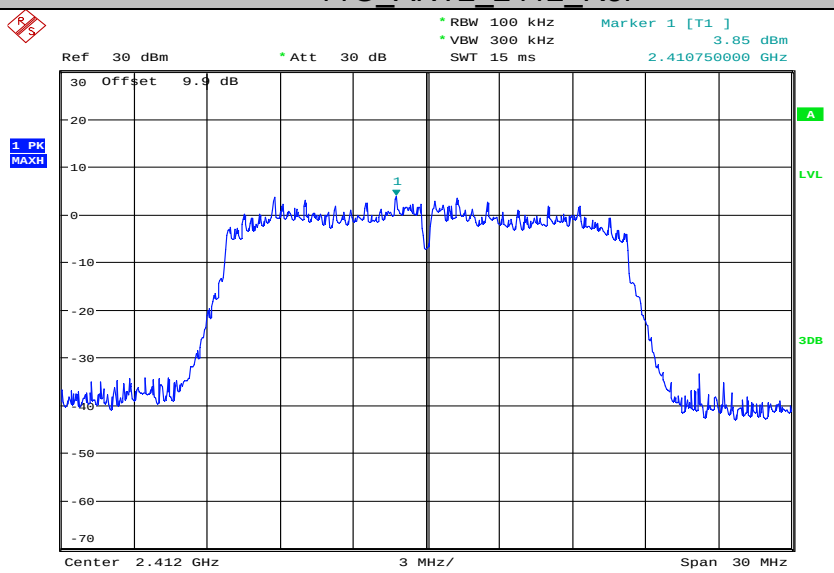

Date: 20.MAR.2018 10:43:32

11G_ANT2_2412_30~1000

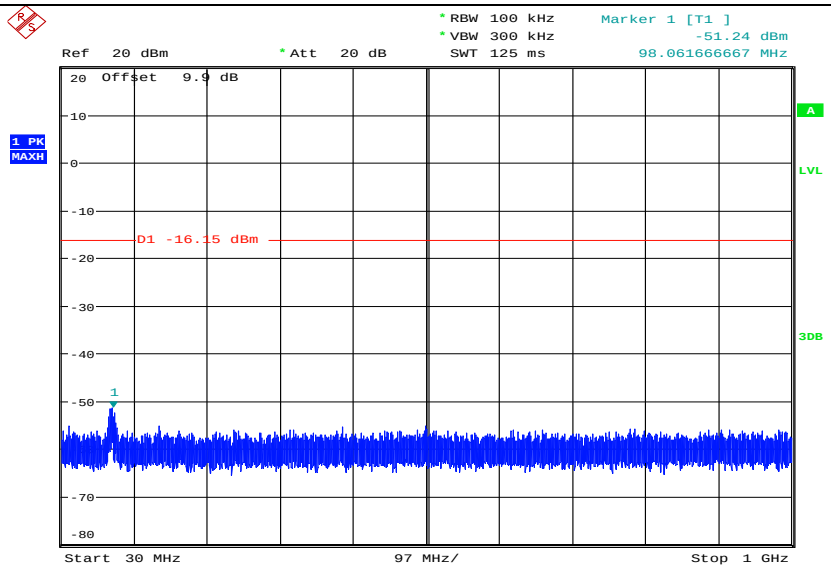

Date: 20.MAR.2018 10:43:40

11G_ANT2_2412_1000~26500

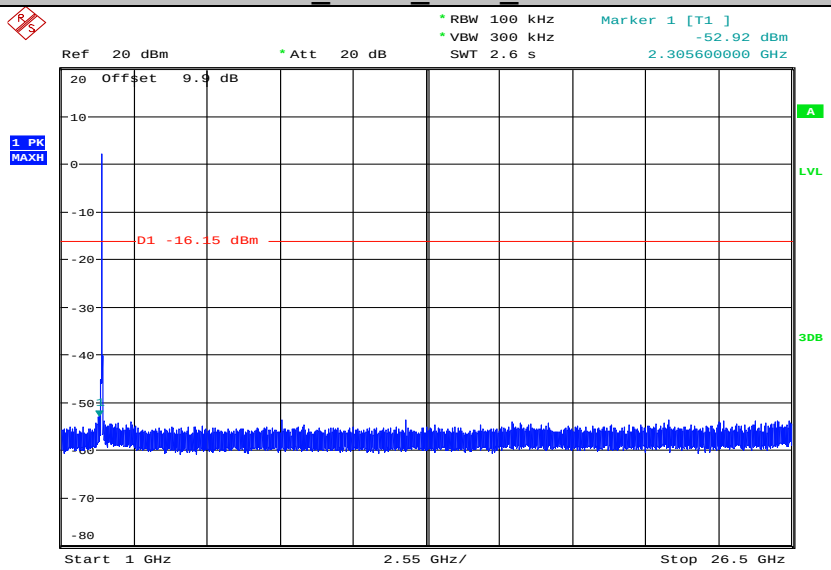

Date: 20.MAR.2018 10:44:24

11G_ANT1_2437_Ref

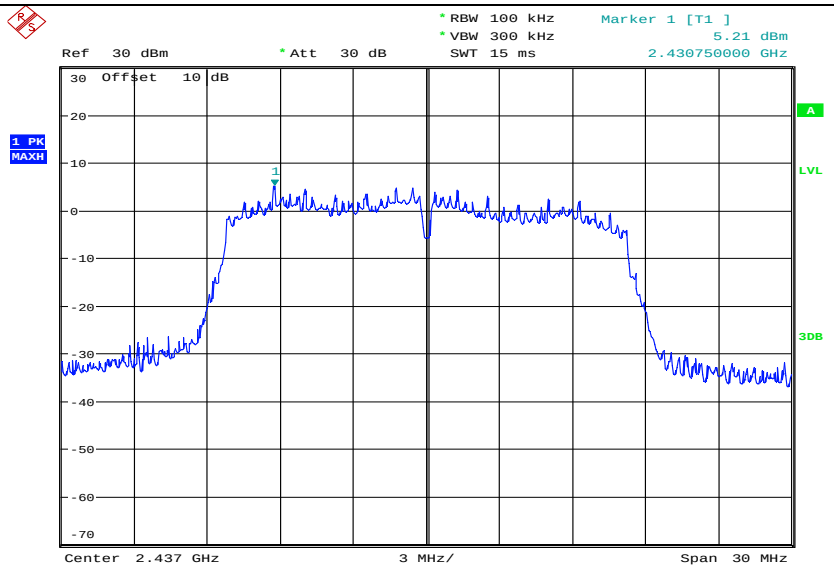

Date: 20.MAR.2018 10:23:31

11G_ANT1_2437_30~1000

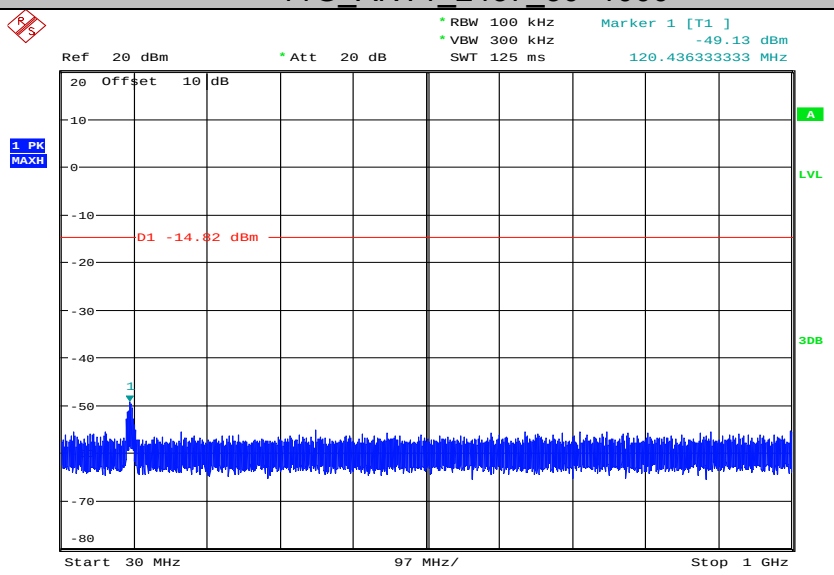

Date: 20.MAR.2018 10:23:40

11G_ANT1_2437_1000~26500

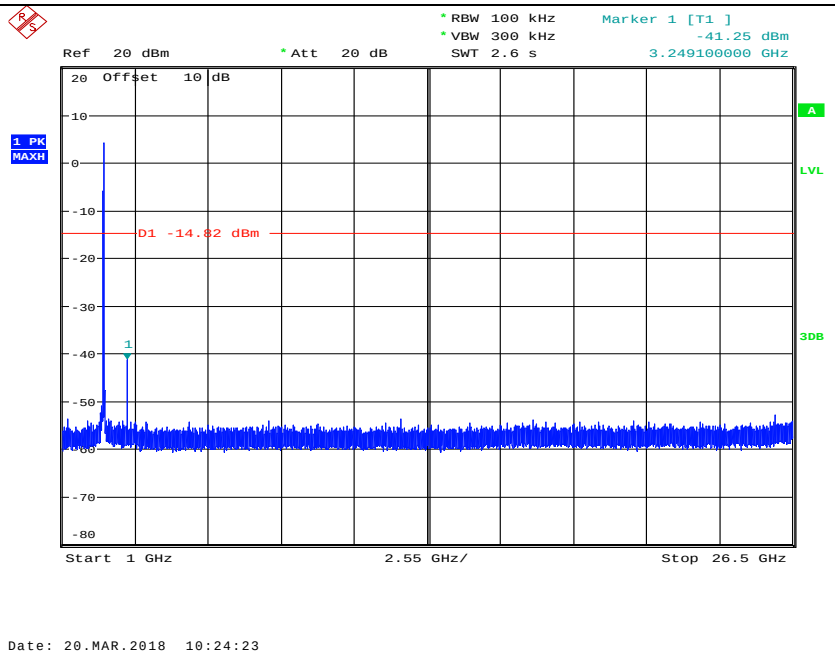

11G_ANT2_2437_Ref

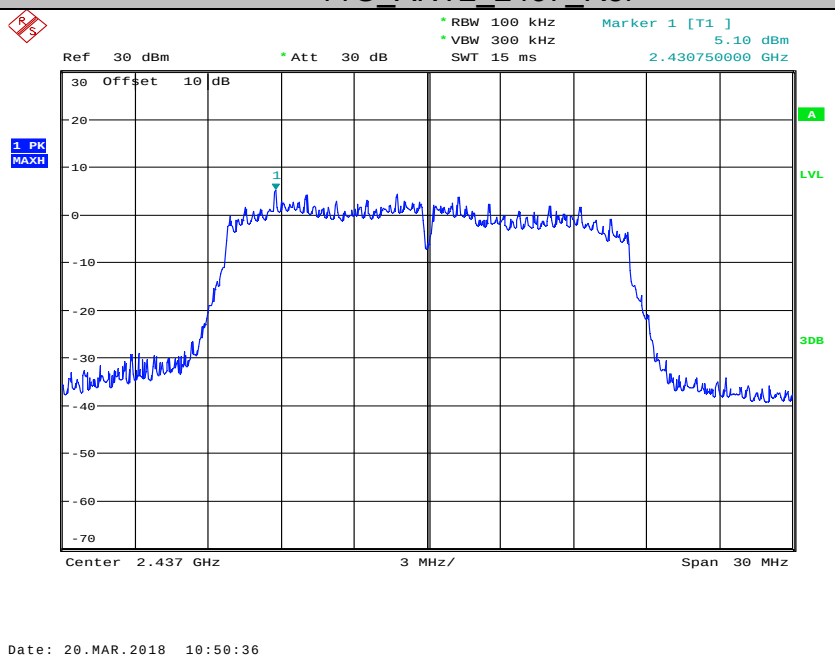

11G_ANT2_2437_30~1000

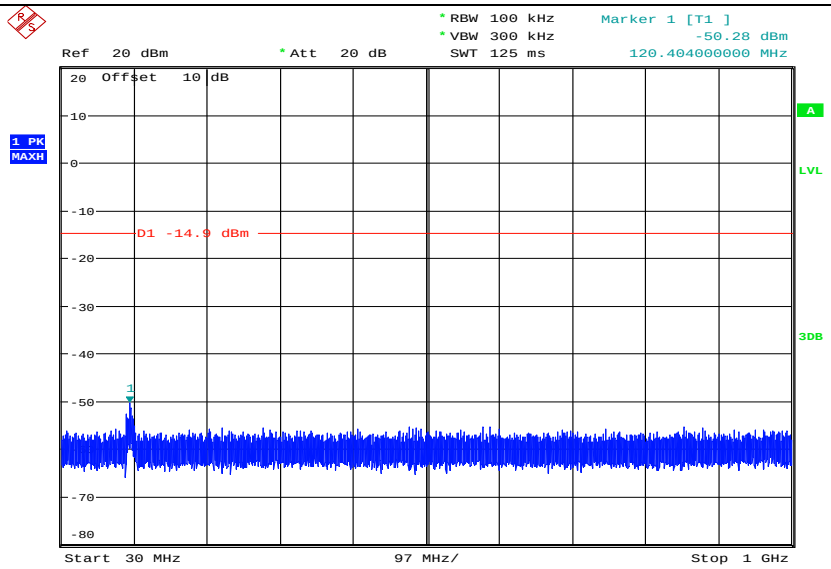

Date: 20.MAR.2018 10:50:45

11G_ANT2_2437_1000~26500

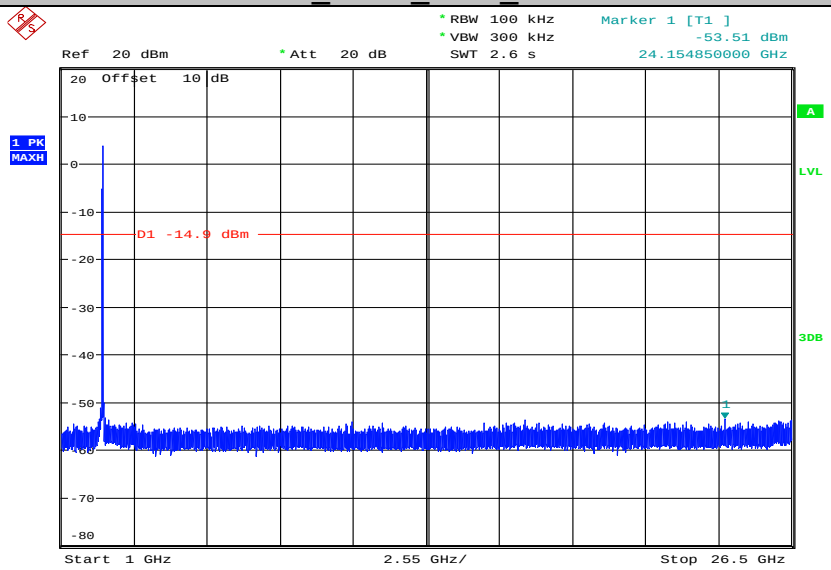

Date: 20.MAR.2018 10:51:28

11G_ANT1_2462_Ref

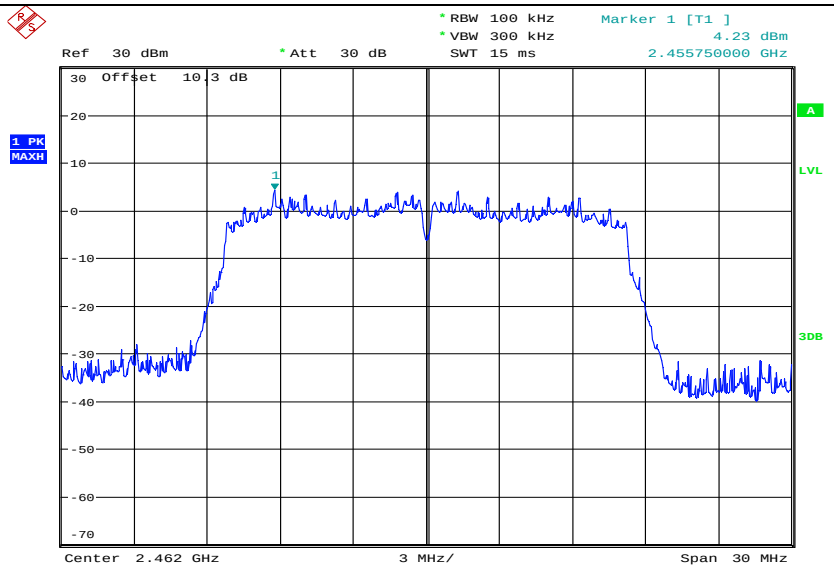

11G_ANT1_2462_30~1000

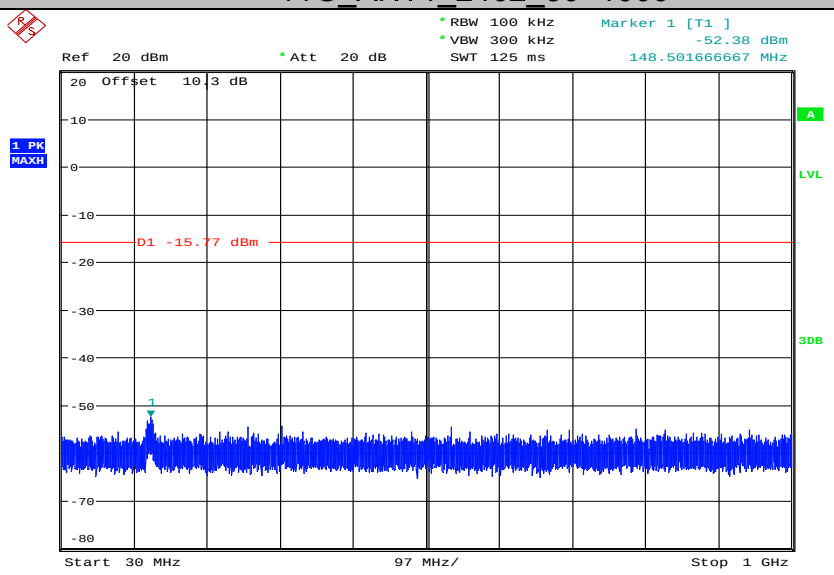

11G_ANT1_2462_1000~26500

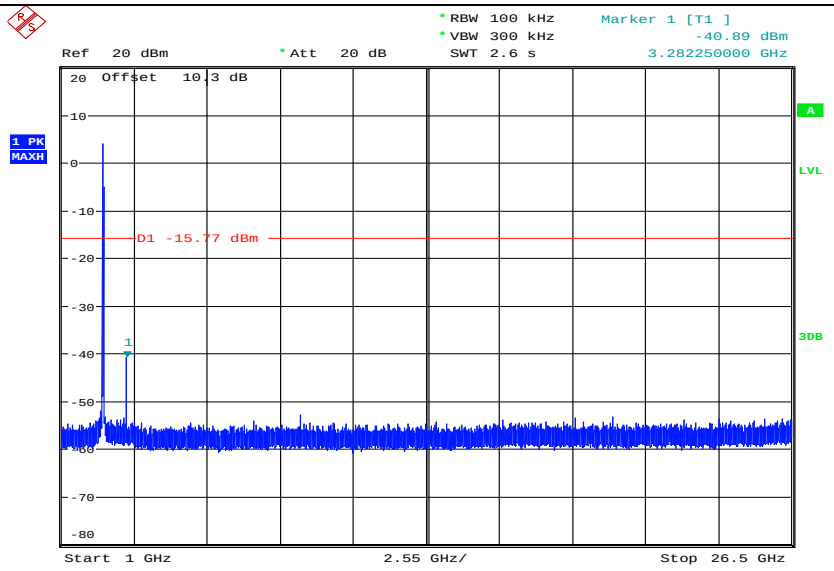

Date: 20.MAR.2018 10:33:20

11G_ANT2_2462_Ref

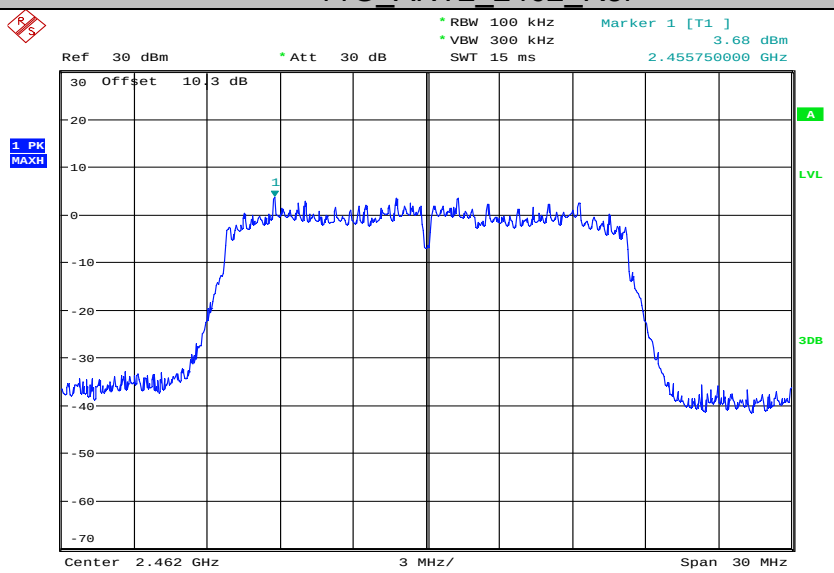

Date: 20.MAR.2018 10:53:21

11G_ANT2_2462_30~1000

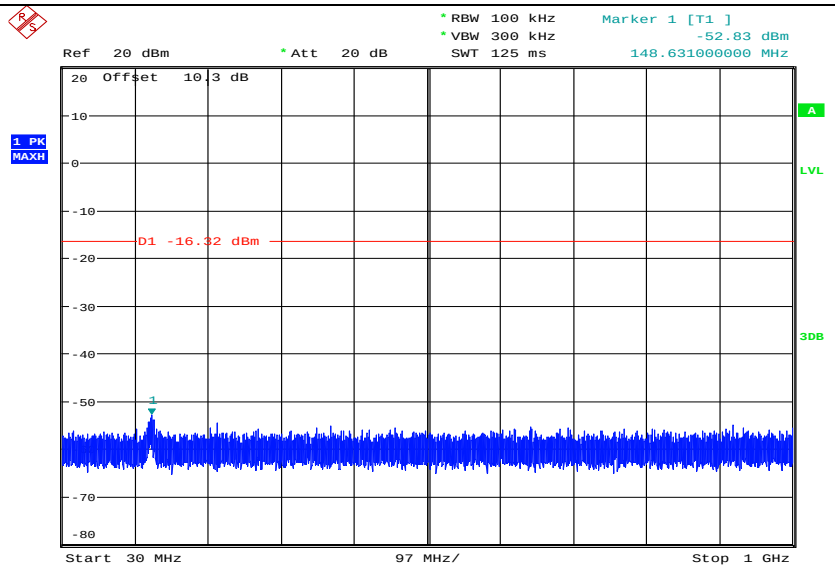

11G_ANT2_2462_1000~26500

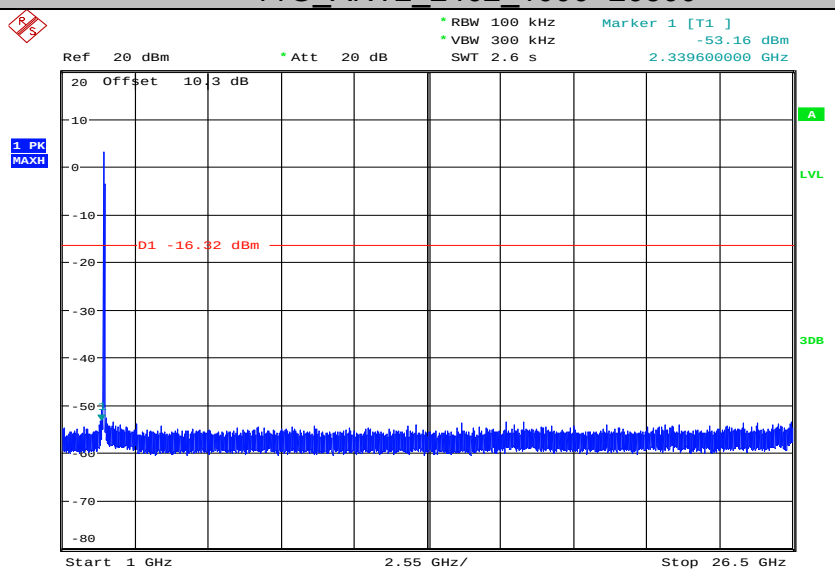

11N20MIMO_ANT1_2412_Ref

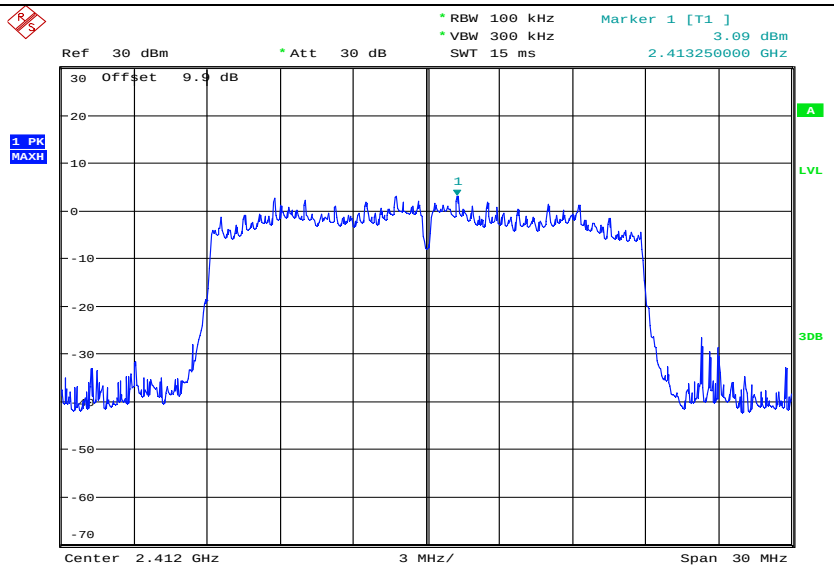

Date: 20.MAR.2018 11:18:41

11N20MIMO_ANT1_2412_30~1000

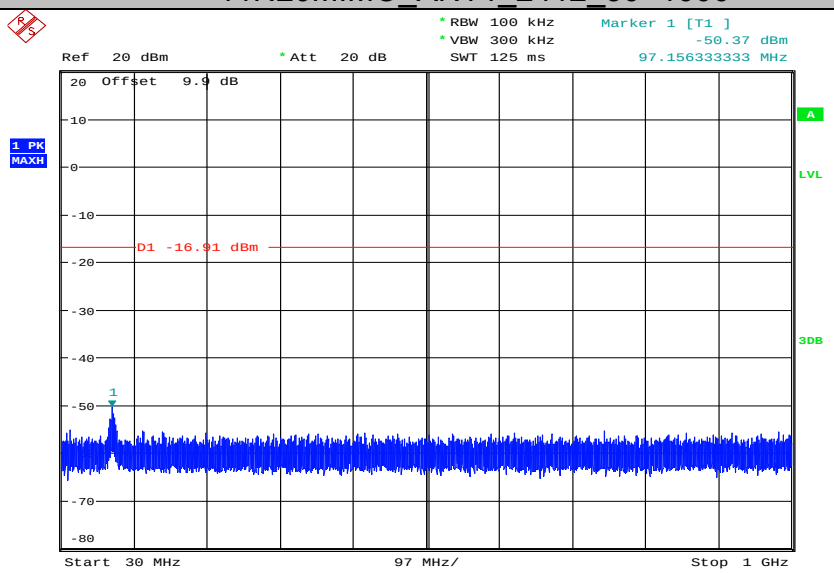

Date: 20.MAR.2018 11:18:50

11N20MIMO_ANT1_2412_1000~26500

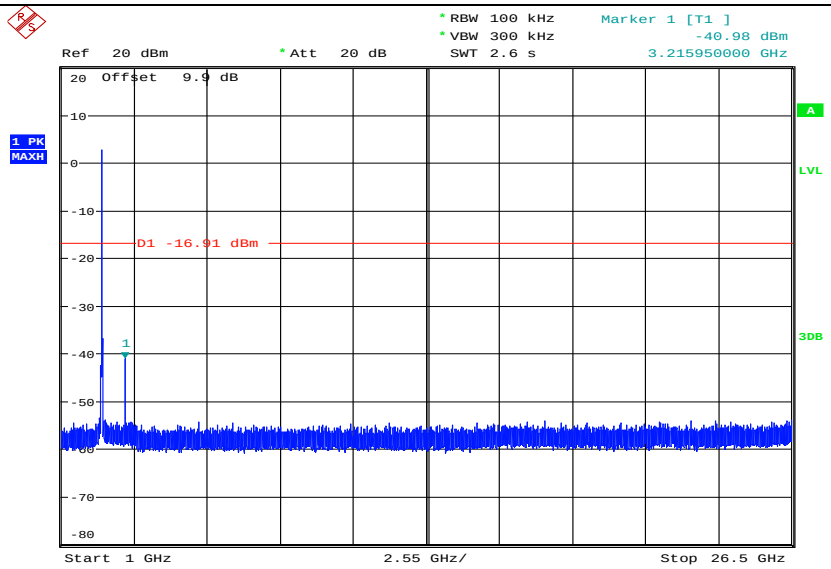

Date: 20.MAR.2018 11:19:34

11N20MIMO_ANT2_2412_Ref

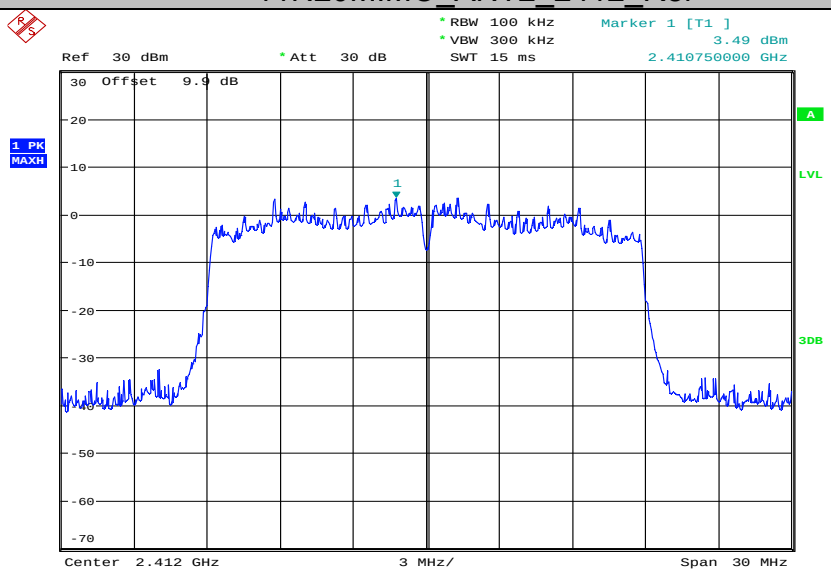

Date: 20.MAR.2018 11:20:52

11N20MIMO_ANT2_2412_30~1000

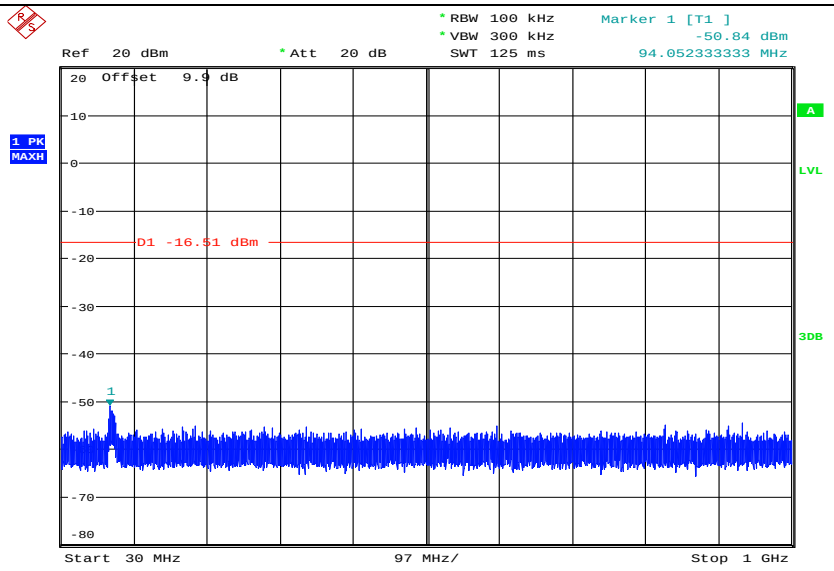

Date: 20.MAR.2018 11:21:01

11N20MIMO_ANT2_2412_1000~26500

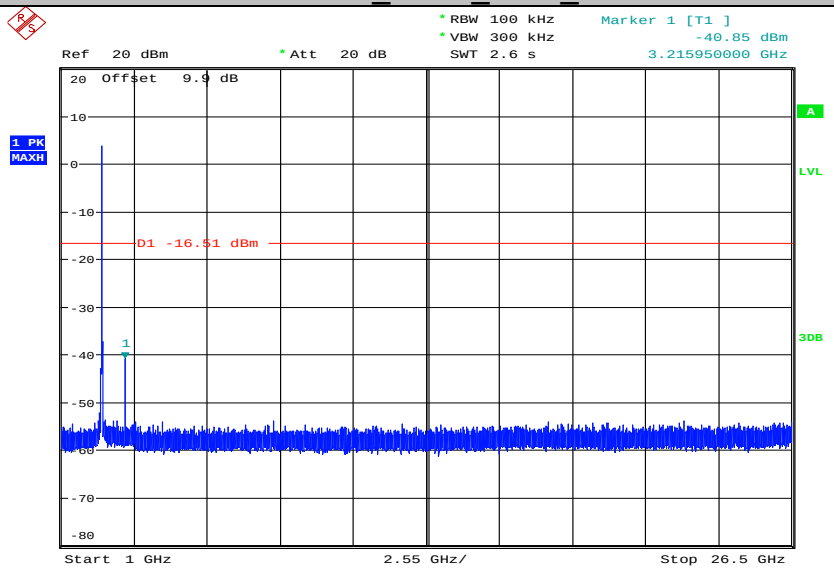

Date: 20.MAR.2018 11:21:44

11N20MIMO_ANT1_2437_Ref

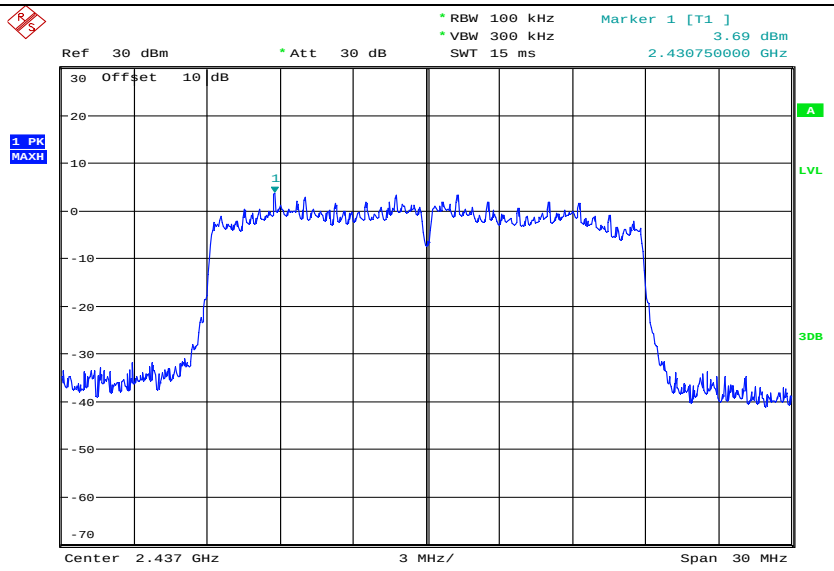

Date: 20.MAR.2018 13:38:05

11N20MIMO_ANT1_2437_30~1000

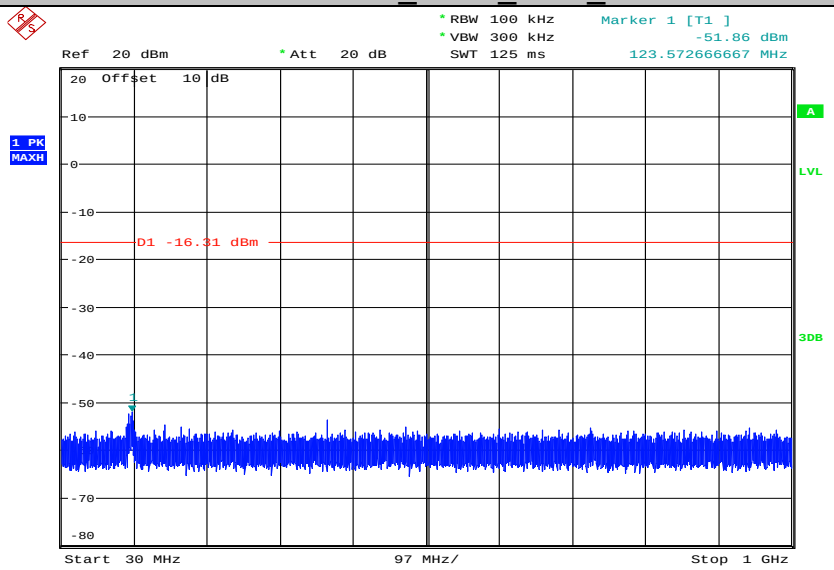

Date: 20.MAR.2018 13:38:14

11N20MIMO_ANT1_2437_1000~26500

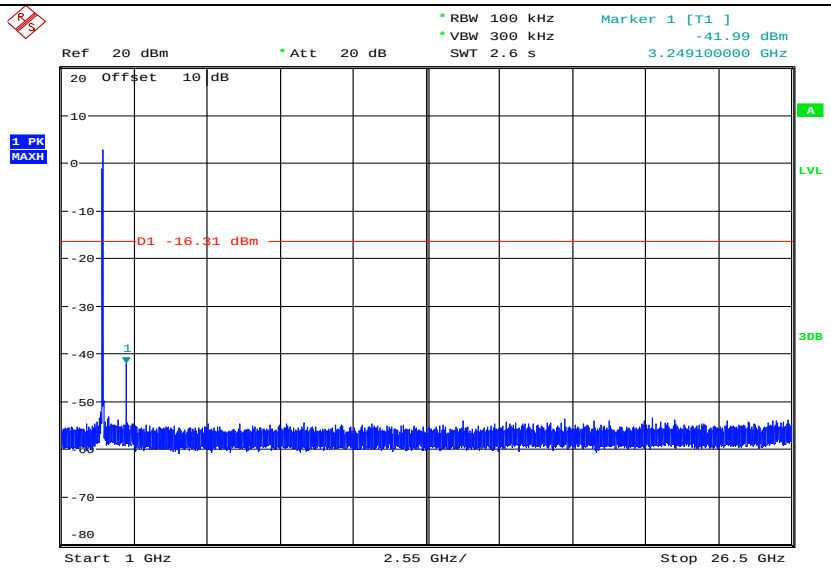

Date: 20.MAR.2018 13:38:57

11N20MIMO_ANT2_2437_Ref

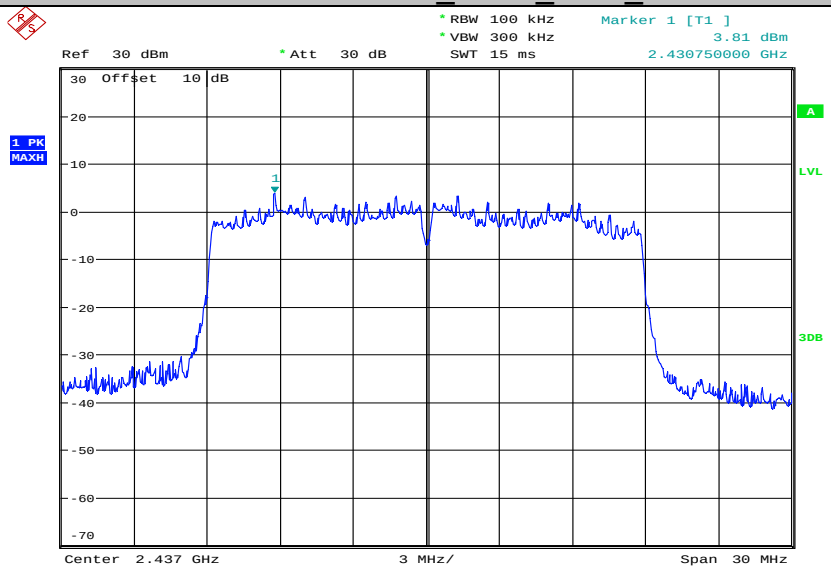

Date: 20.MAR.2018 15:44:25

11N20MIMO_ANT2_2437_30~1000

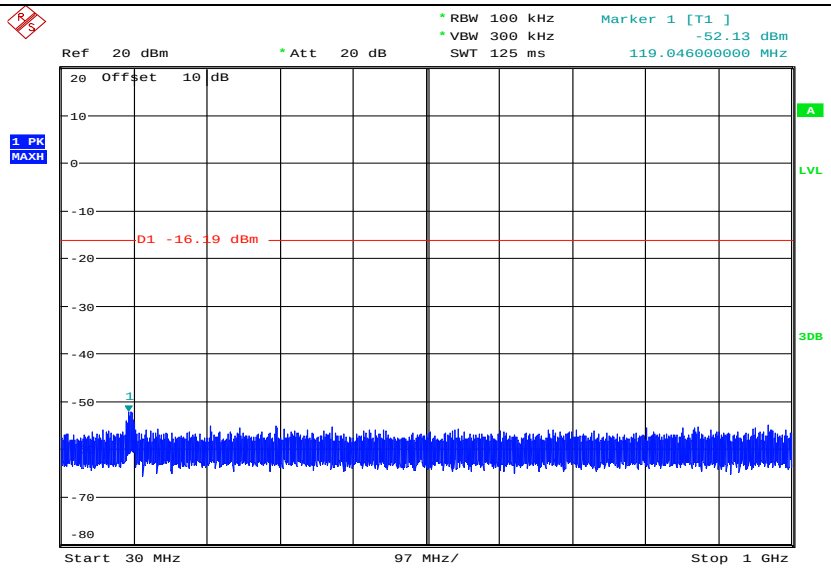

Date: 20.MAR.2018 15:44:33

11N20MIMO_ANT2_2437_1000~26500

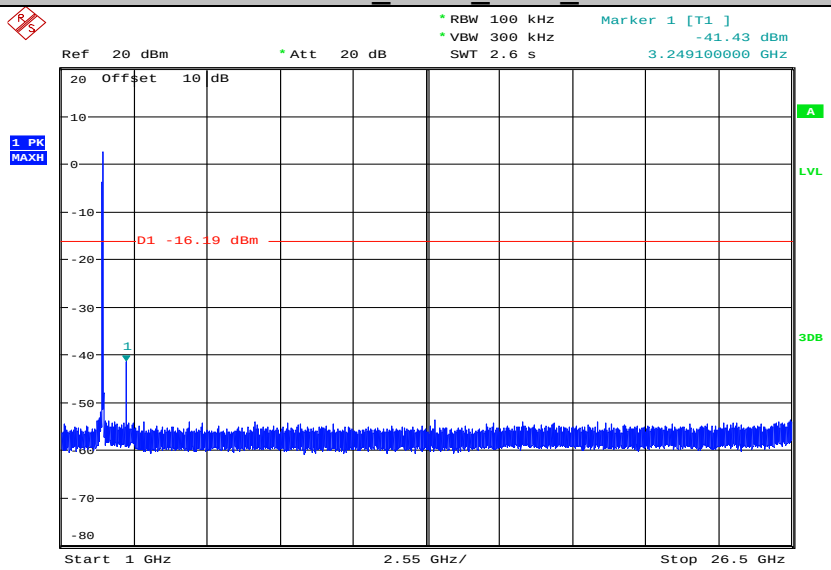

Date: 20.MAR.2018 15:45:17

11N20MIMO_ANT1_2462_Ref

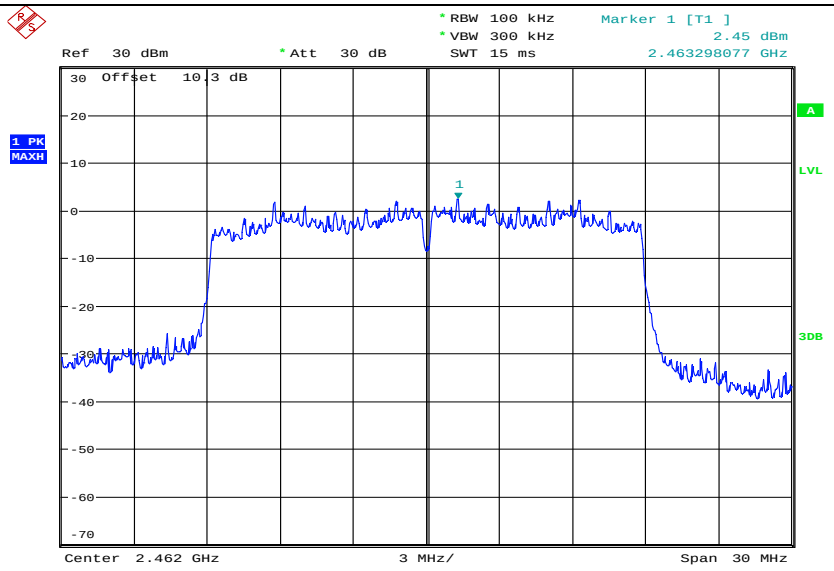

11N20MIMO_ANT1_2462_30~1000

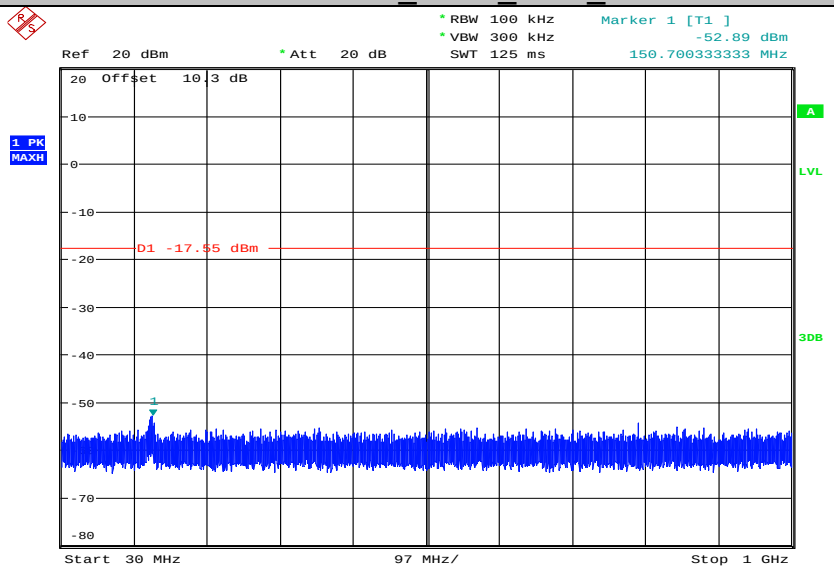

11N20MIMO_ANT1_2462_1000~26500

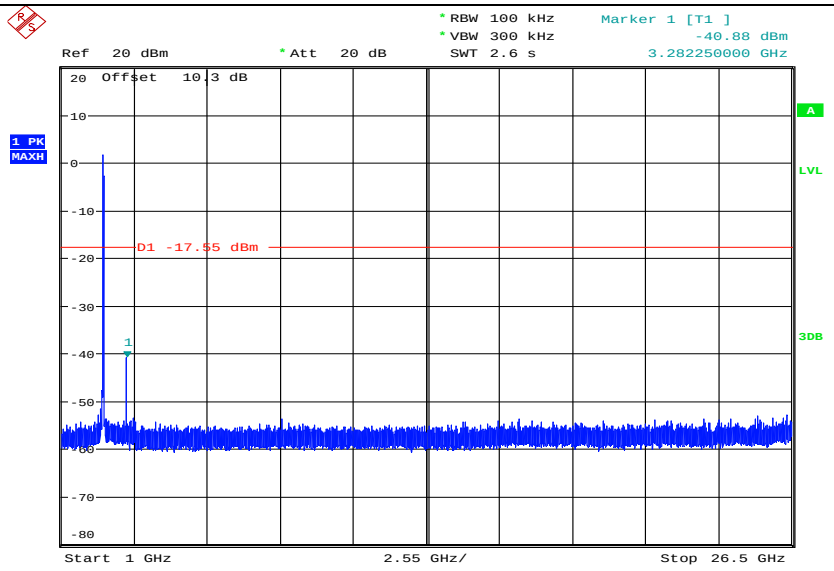

Date: 20.MAR.2018 15:52:57

11N20MIMO_ANT2_2462_Ref

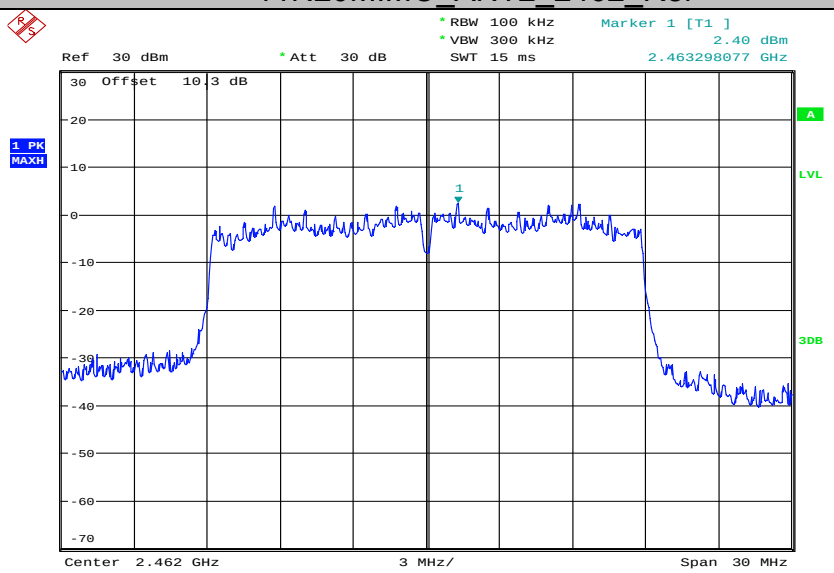

Date: 20.MAR.2018 15:54:16

11N20MIMO_ANT2_2462_30~1000

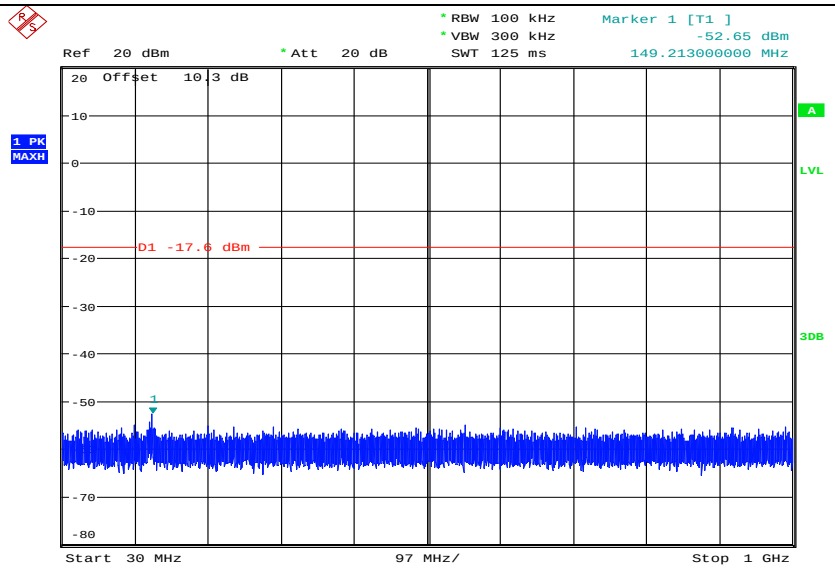

Date: 20.MAR.2018 15:54:25

11N20MIMO_ANT2_2462_1000~26500

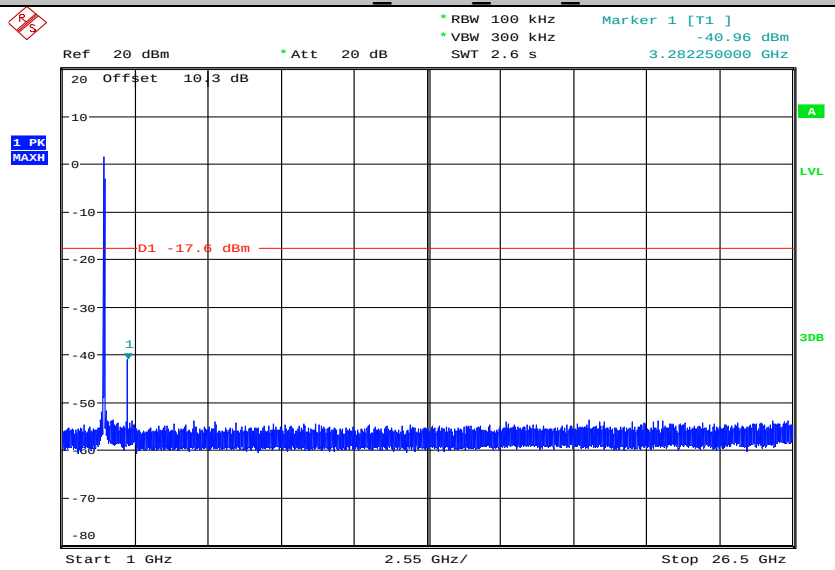

Date: 20.MAR.2018 15:55:08

11N40MIMO_ANT1_2422_Ref

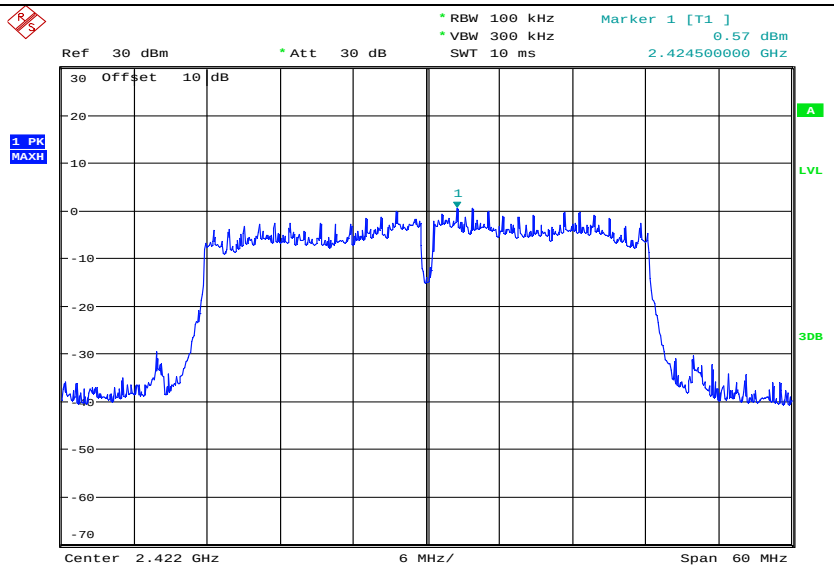

Date: 20.MAR.2018 16:00:16

11N40MIMO_ANT1_2422_30~1000

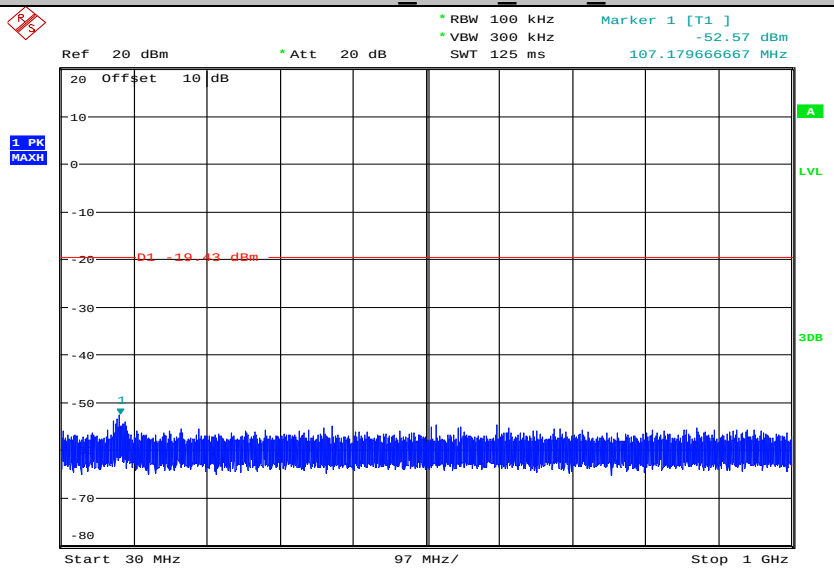

Date: 20.MAR.2018 16:00:25

11N40MIMO_ANT1_2422_1000~26500

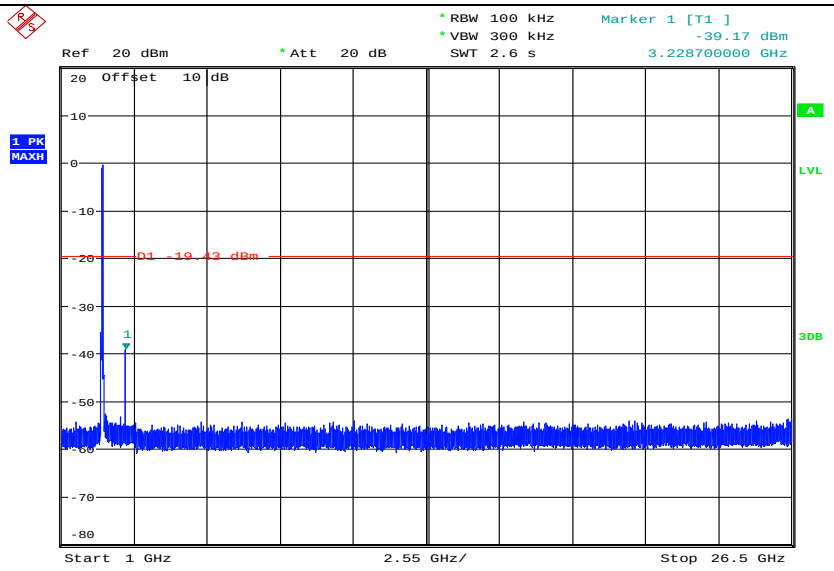

Date: 20.MAR.2018 16:01:08

11N40MIMO_ANT2_2422_Ref

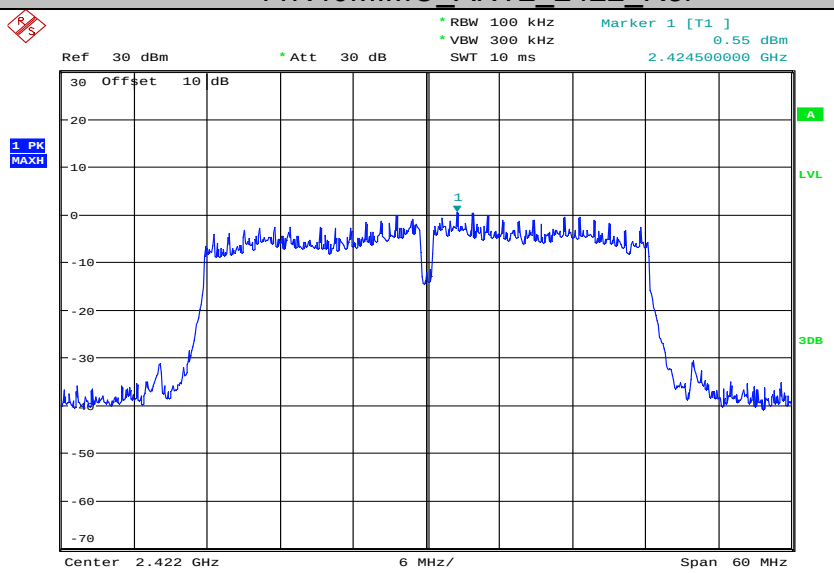

Date: 20.MAR.2018 16:02:24

11N40MIMO_ANT2_2422_30~1000

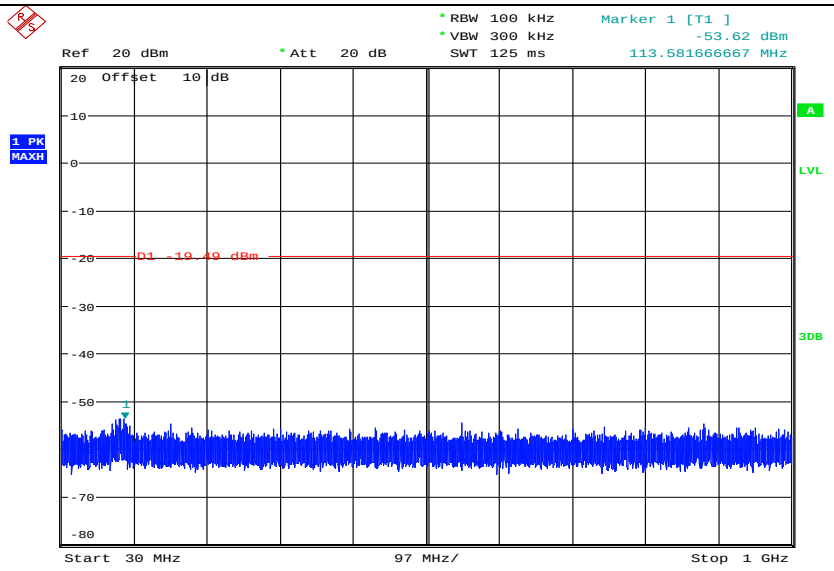

Date: 20.MAR.2018 16:02:33

11N40MIMO_ANT2_2422_1000~26500

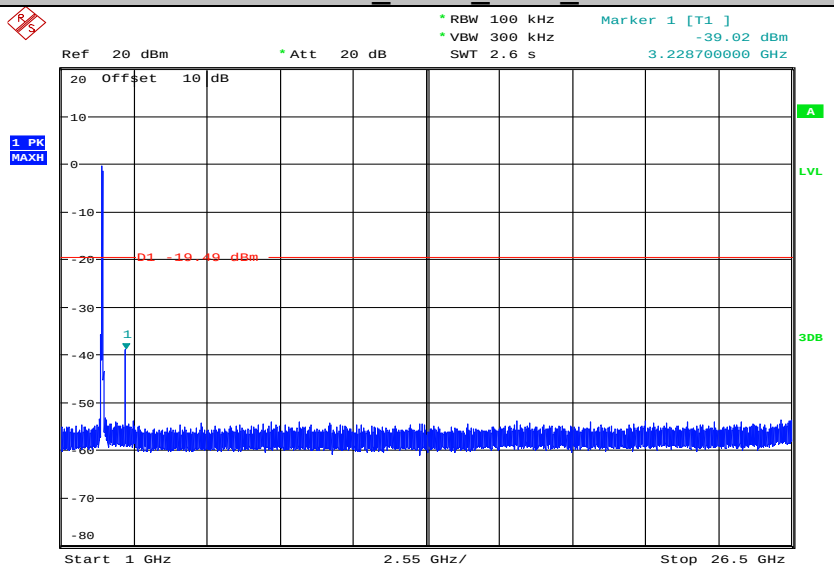

Date: 20.MAR.2018 16:03:16

11N40MIMO_ANT1_2437_Ref

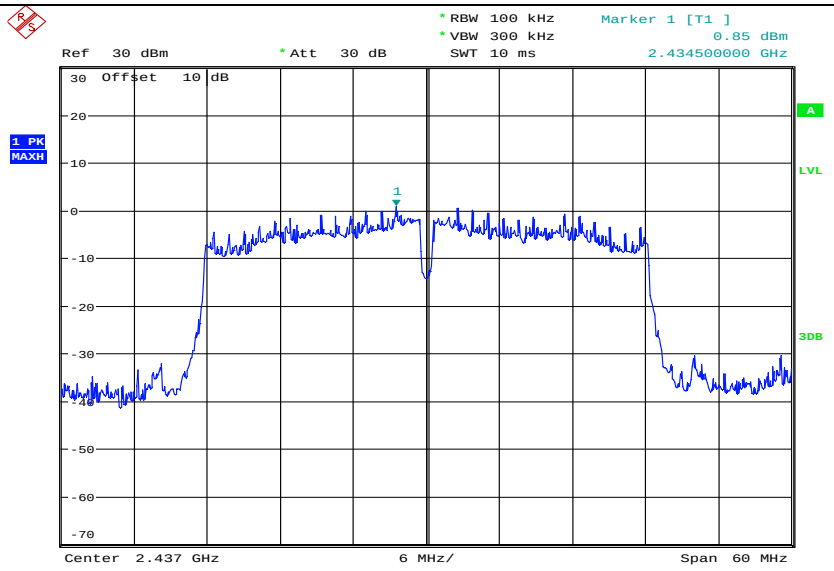

Date: 20.MAR.2018 16:04:52

11N40MIMO_ANT1_2437_30~1000

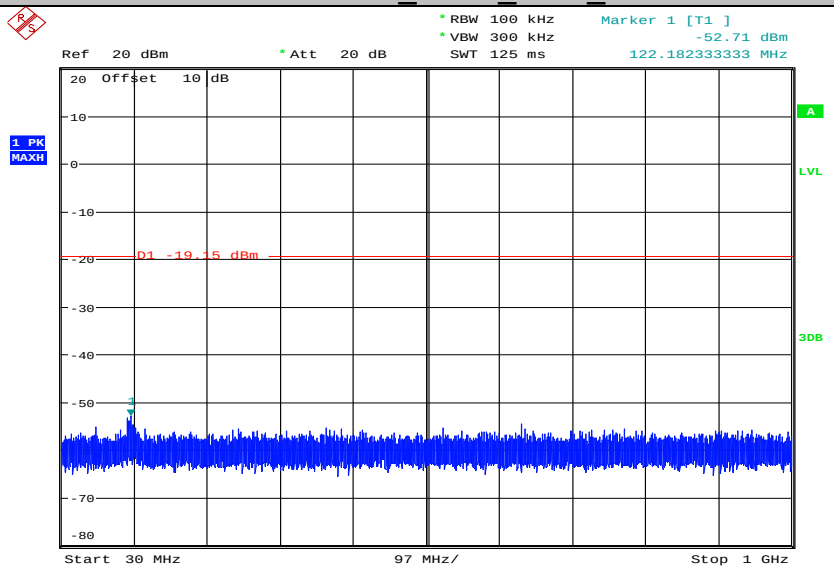

Date: 20.MAR.2018 16:05:01

11N40MIMO_ANT1_2437_1000~26500

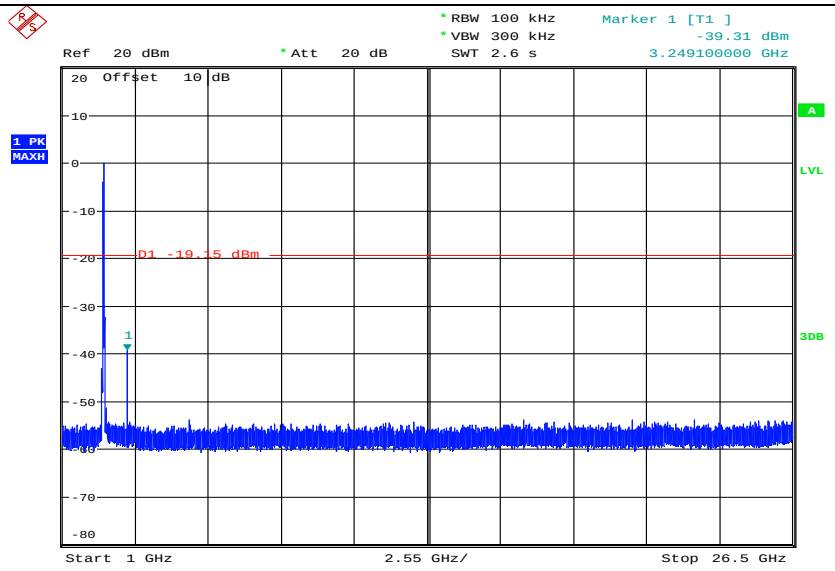

Date: 20.MAR.2018 16:05:44

11N40MIMO_ANT2_2437_Ref

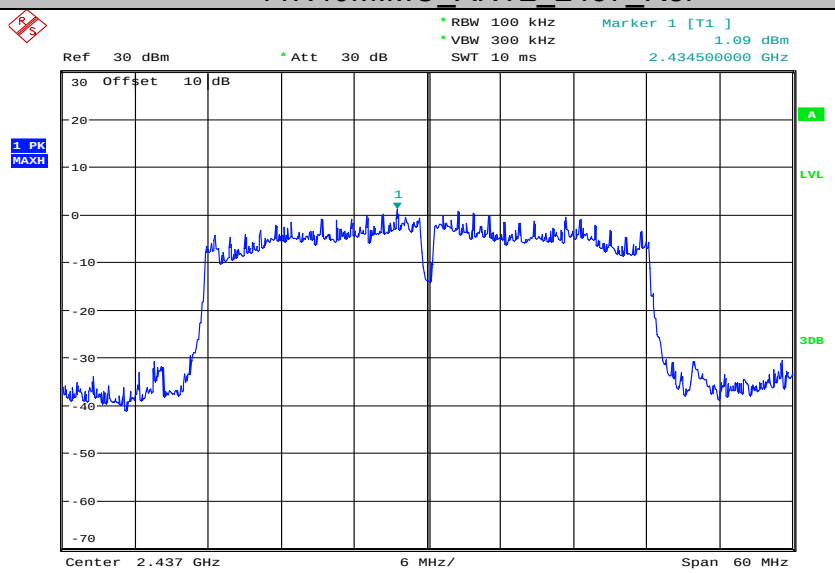

Date: 20.MAR.2018 16:06:47

11N40MIMO_ANT2_2437_30~1000

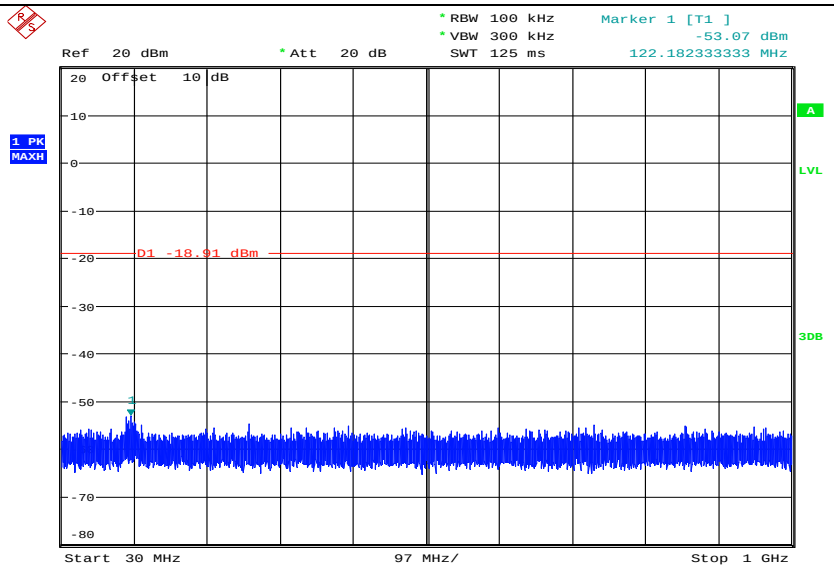

Date: 20.MAR.2018 16:06:56

11N40MIMO_ANT2_2437_1000~26500

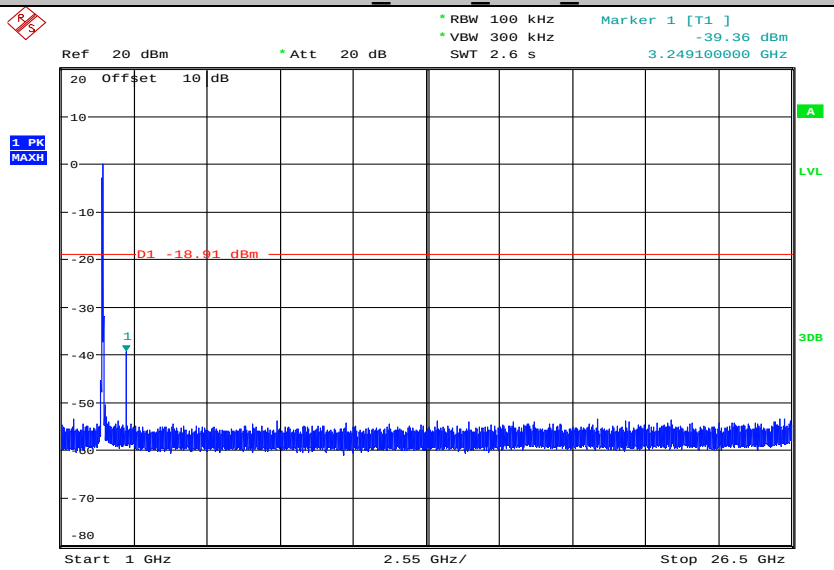

Date: 20.MAR.2018 16:07:39

11N40MIMO_ANT1_2452_Ref

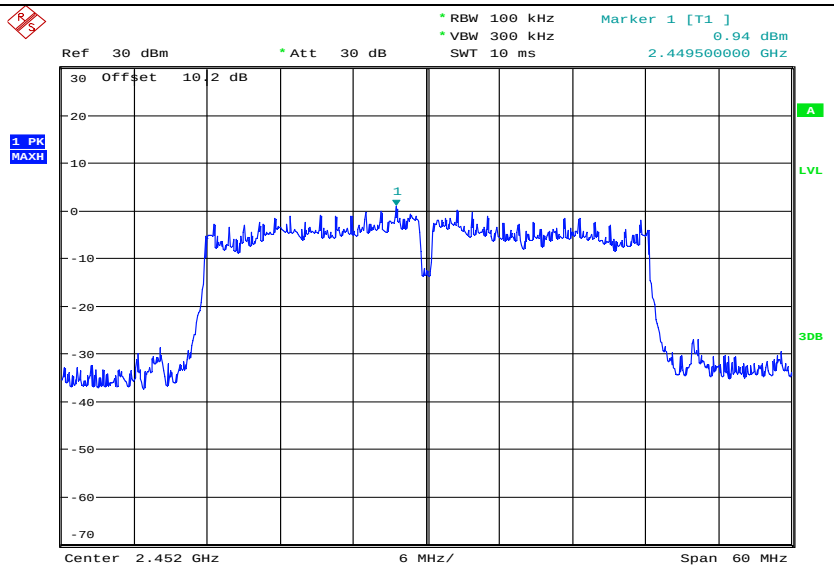

Date: 20.MAR.2018 16:09:39

11N40MIMO_ANT1_2452_30~1000

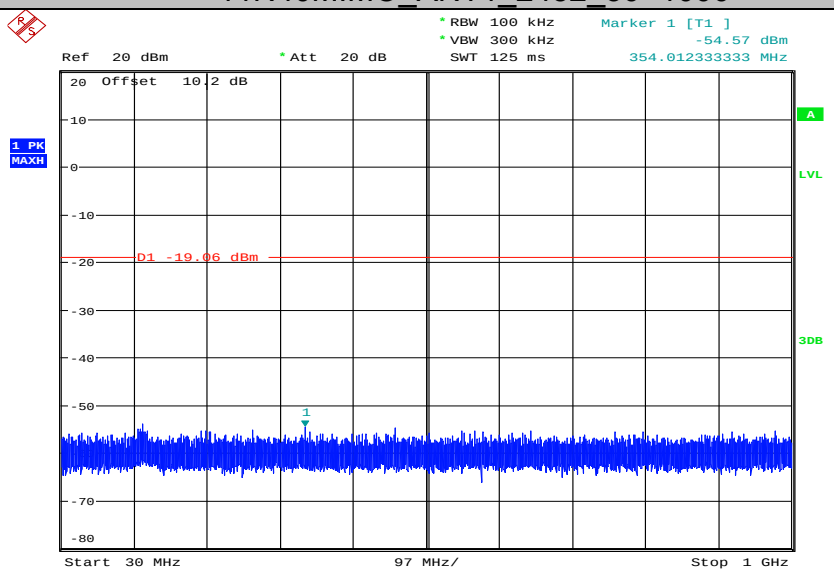

Date: 20.MAR.2018 16:09:48

11N40MIMO_ANT1_2452_1000~26500

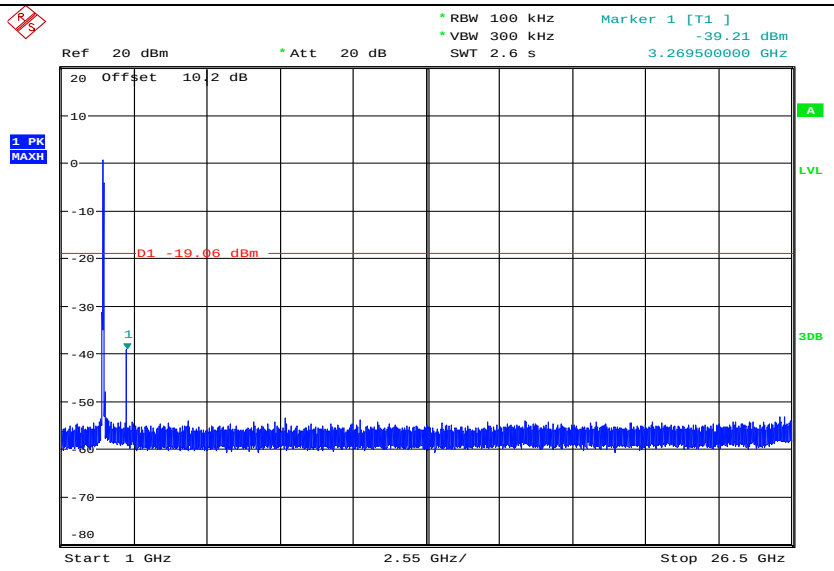

Date: 20.MAR.2018 16:10:31

11N40MIMO_ANT2_2452_Ref

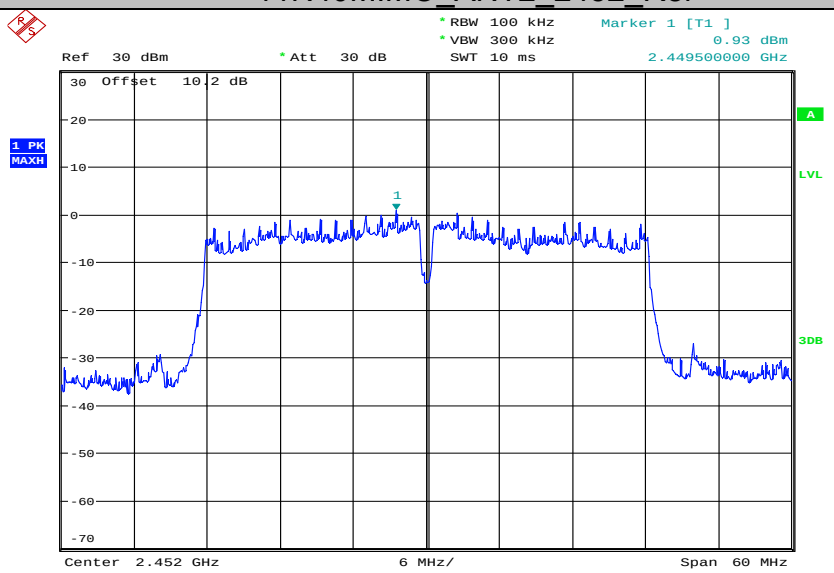

Date: 20.MAR.2018 16:11:57

11N40MIMO_ANT2_2452_30~1000

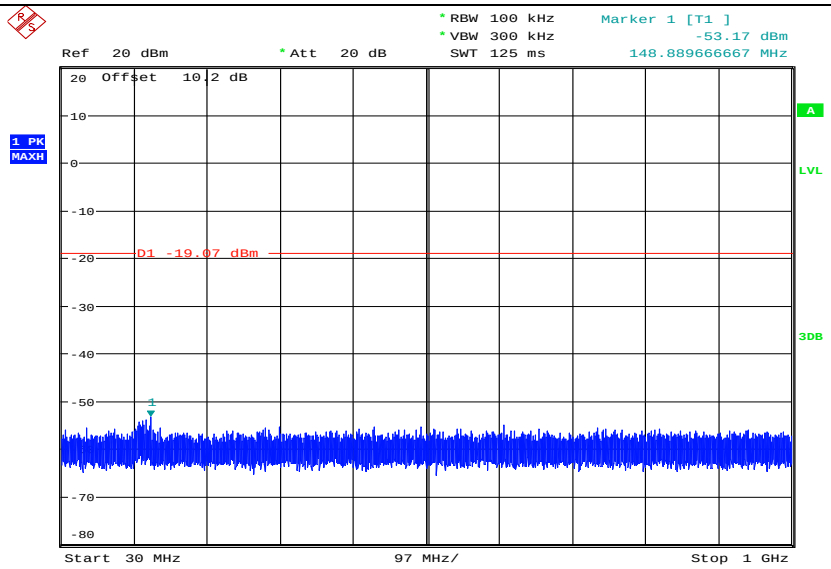

Date: 20.MAR.2018 16:12:06

11N40MIMO_ANT2_2452_1000~26500

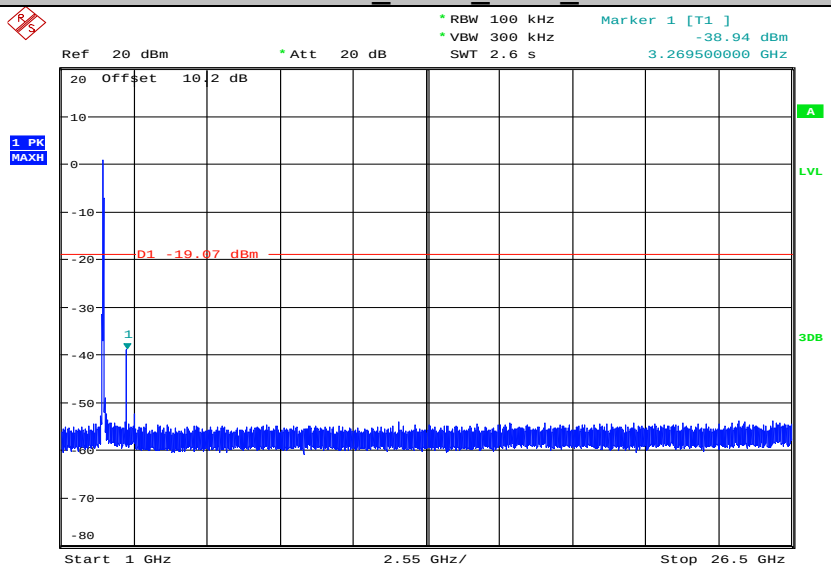

Date: 20.MAR.2018 16:12:49

8. Radiated Spurious Emissions

8.1. Block diagram of test setup

In 3m Anechoic Chamber Test Setup Diagram for 9kHz-30MHz

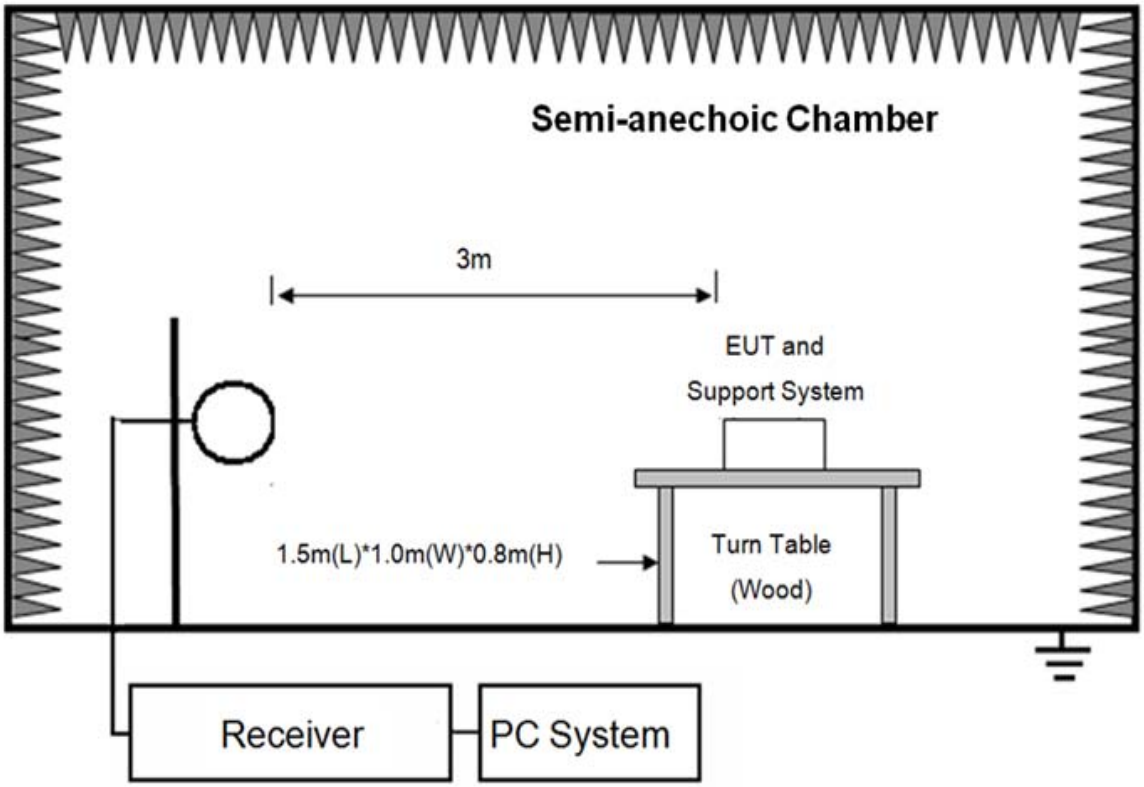

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

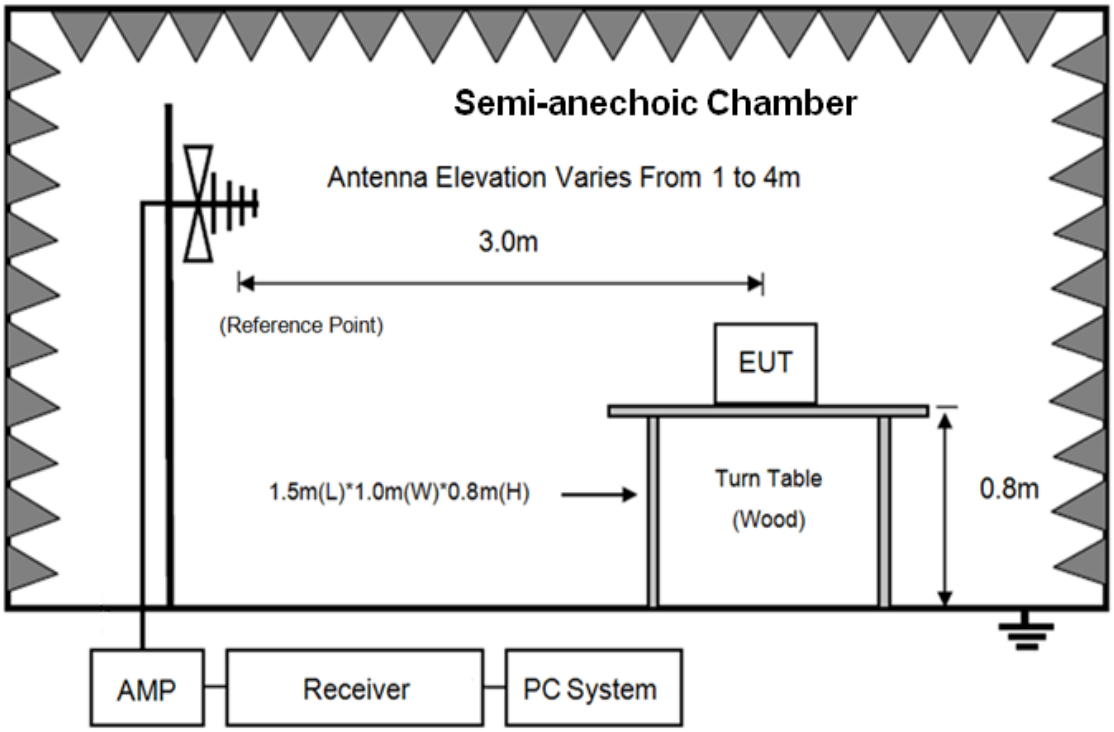

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

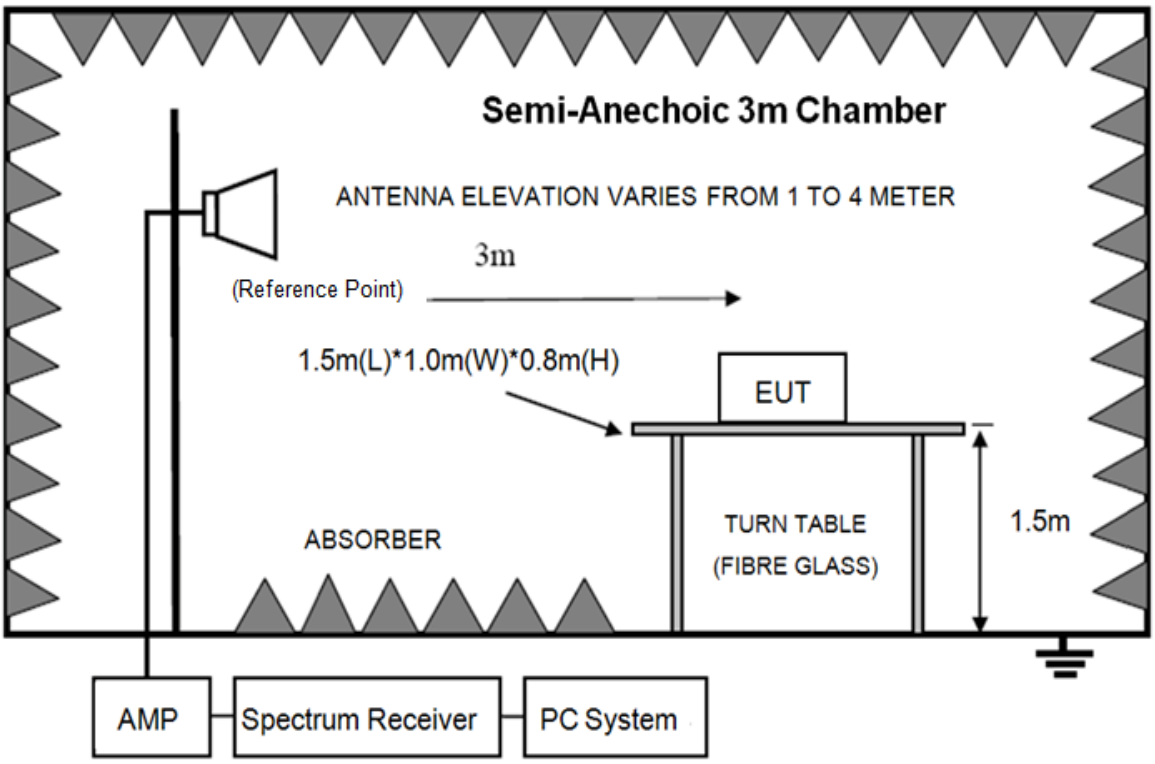

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.G
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	([2])
13.36-13.41			

8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1)The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz.Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer then that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$Limit_{3m}(dBuV/m)= Limit_{30m}(dBuV/m) + 40Log(30m/3m)$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

8.3. Test Procedure

(1) EUT height should be 0.8m for below 1GHz at a semi‐anechoic chamber while EUT height should be 1.5m for above 1GHz at full chamber or semi‐anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9kHz-30MHz	Active Loop antenna	3 m
30MHz-1GHz	Trilog Broadband Antenna	3 m
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18GHz-40GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6,5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the

loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9kHz to 25GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9kHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9kHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz, for emissions from 9kHz-90kHz,110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9kHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9kHz-150kHz	200Hz
150kHz-30MHz	9kHz
30MHz-1GHz	120kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure(according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

8.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9kHz to 25GHz were comply with 15.209 limit.
Note1: According exploratory test no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in ANT1, 11b, Tx CH6 mode.
Note3: For emissions above 1GHz,Scan with 11b mode ANT 1, 11g mode ANT 1 and ANT 2, 11n HT20 mode ANT 1 and ANT 2, 11n HT40 mode ANT 1 and ANT 2, the worst case is 11b ANT 1 mode

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 VULB 9163 1#/3m/HORIZONTAL
Memo	:		

Data: 2

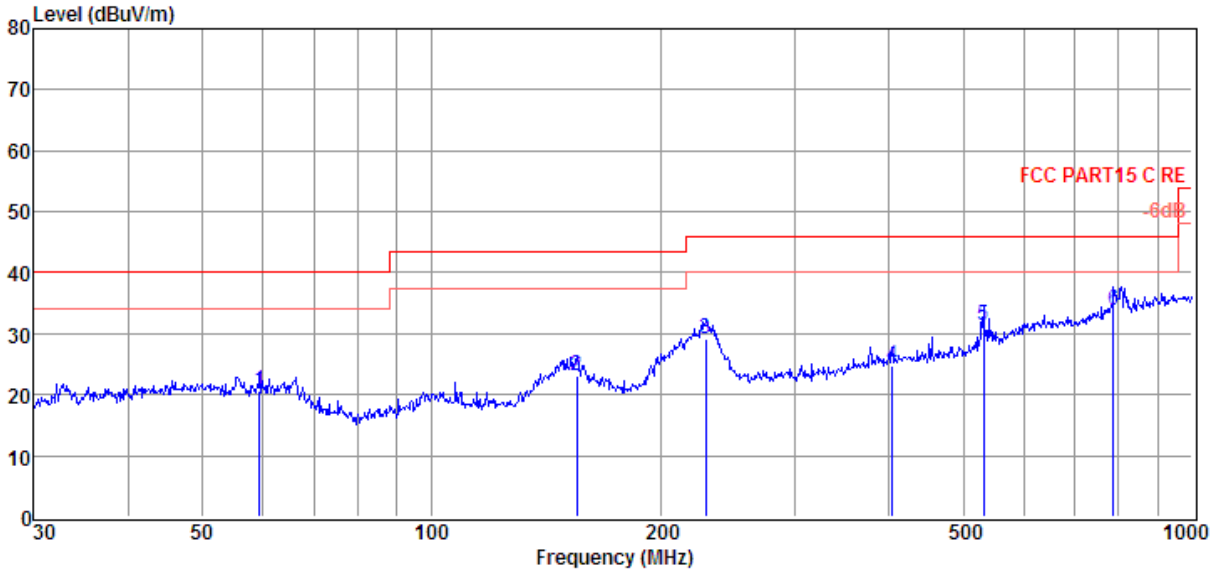

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	59.44	4.94	11.52	4.09	20.55	40.00	-19.45	QP	HORIZONTAL
2	155.36	9.94	8.34	4.80	23.08	43.50	-20.42	QP	HORIZONTAL
3	229.29	11.84	12.11	5.19	29.14	46.00	-16.86	QP	HORIZONTAL
4	403.25	3.59	15.28	5.93	24.80	46.00	-21.20	QP	HORIZONTAL
5	531.96	7.52	18.15	5.78	31.45	46.00	-14.55	QP	HORIZONTAL
6	787.85	5.32	21.12	7.28	33.72	46.00	-12.28	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 VULB 9163 1#/3m/VERTICAL
Memo	:		

Data: 1

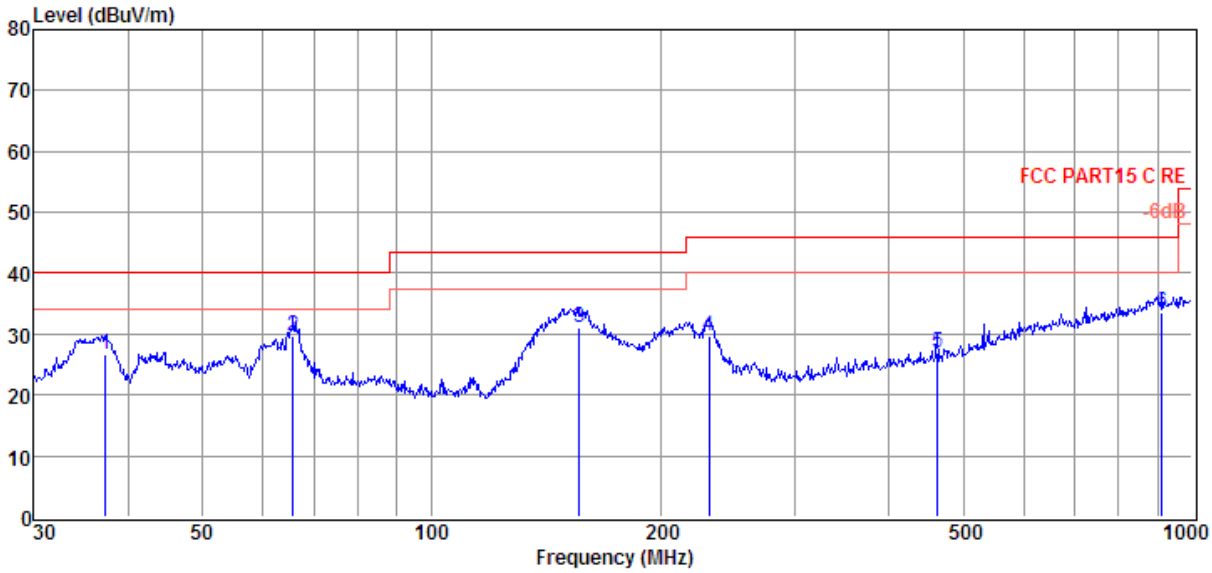

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	37.29	10.76	12.06	3.85	26.67	40.00	-13.33	QP	VERTICAL
2	65.80	15.39	10.08	4.14	29.61	40.00	-10.39	QP	VERTICAL
3	156.46	18.00	8.40	4.80	31.20	43.50	-12.30	QP	VERTICAL
4	231.72	12.33	12.15	5.20	29.68	46.00	-16.32	QP	VERTICAL
5	462.35	4.65	16.69	5.54	26.88	46.00	-19.12	QP	VERTICAL
6	912.86	3.46	22.57	7.64	33.67	46.00	-12.33	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

Freq (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor(dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
11b CH1									
4825.00	43.03	34.72	43.91	7.40	41.24	74.00	-32.76	Peak	HORIZONTAL
6525.00	41.00	35.76	43.36	8.27	41.67	74.00	-32.33	Peak	HORIZONTAL
8939.00	40.83	37.48	44.08	10.30	44.53	74.00	-29.47	Peak	HORIZONTAL
11506.00	39.09	38.60	44.17	11.01	44.53	74.00	-29.47	Peak	HORIZONTAL
13121.00	41.03	39.42	44.38	11.47	47.54	74.00	-26.46	Peak	HORIZONTAL
14889.00	40.06	41.58	44.29	12.81	50.16	74.00	-23.84	Peak	HORIZONTAL
4774.00	41.82	34.64	43.94	7.35	39.87	74.00	-34.13	Peak	VERTICAL
6389.00	40.04	35.70	43.32	8.26	40.68	74.00	-33.32	Peak	VERTICAL
8599.00	39.14	37.34	43.98	9.91	42.41	74.00	-31.59	Peak	VERTICAL
10095.00	40.88	38.26	44.39	10.91	45.66	74.00	-28.34	Peak	VERTICAL
12050.00	39.57	38.89	44.11	10.99	45.34	74.00	-28.66	Peak	VERTICAL
14821.00	39.85	41.56	44.31	12.78	49.88	74.00	-24.12	Peak	VERTICAL
11b CH6									
4774.00	41.29	34.64	43.94	7.35	39.34	74.00	-34.66	Peak	HORIZONTAL
6525.00	40.20	35.76	43.36	8.27	40.87	74.00	-33.13	Peak	HORIZONTAL
9024.00	39.70	37.51	44.11	10.38	43.48	74.00	-30.52	Peak	HORIZONTAL
10979.00	40.37	38.79	44.25	11.06	45.97	74.00	-28.03	Peak	HORIZONTAL
13121.00	38.49	39.42	44.38	11.47	45.00	74.00	-29.00	Peak	HORIZONTAL
13954.00	39.77	39.98	44.59	12.31	47.47	74.00	-26.53	Peak	HORIZONTAL
4825.00	43.92	34.72	43.91	7.40	42.13	74.00	-31.87	Peak	VERTICAL
5981.00	39.68	35.69	43.21	8.20	40.36	74.00	-33.64	Peak	VERTICAL
8956.00	39.61	37.48	44.09	10.32	43.32	74.00	-30.68	Peak	VERTICAL
10894.00	40.59	38.74	44.27	11.04	46.10	74.00	-27.90	Peak	VERTICAL
14141.00	39.96	40.42	44.55	12.43	48.26	74.00	-25.74	Peak	VERTICAL
15569.00	39.67	42.63	44.05	13.23	51.48	74.00	-22.52	Peak	VERTICAL
11b CH11									
4740.00	41.99	34.58	43.96	7.32	39.93	74.00	-34.07	Peak	HORIZONTAL
5760.00	40.81	35.60	43.34	8.06	41.13	74.00	-32.87	Peak	HORIZONTAL
7630.00	39.79	37.05	43.69	8.90	42.05	74.00	-31.95	Peak	HORIZONTAL
9194.00	40.43	37.58	44.16	10.47	44.32	74.00	-29.68	Peak	HORIZONTAL
10945.00	39.21	38.77	44.26	11.05	44.77	74.00	-29.23	Peak	HORIZONTAL
13410.00	39.04	39.71	44.45	11.76	46.06	74.00	-27.94	Peak	HORIZONTAL
4825.00	43.81	34.72	43.91	7.40	42.02	74.00	-31.98	Peak	VERTICAL
6440.00	40.57	35.70	43.33	8.26	41.20	74.00	-32.80	Peak	VERTICAL
7936.00	40.24	37.17	43.78	9.17	42.80	74.00	-31.20	Peak	VERTICAL
9959.00	40.77	38.16	44.39	10.87	45.41	74.00	-28.59	Peak	VERTICAL
12050.00	39.69	38.89	44.11	10.99	45.46	74.00	-28.54	Peak	VERTICAL
15552.00	39.34	42.62	44.06	13.22	51.12	74.00	-22.88	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

3: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

9. Radiated Band Edge Compliance

9.1. Block diagram of test setup

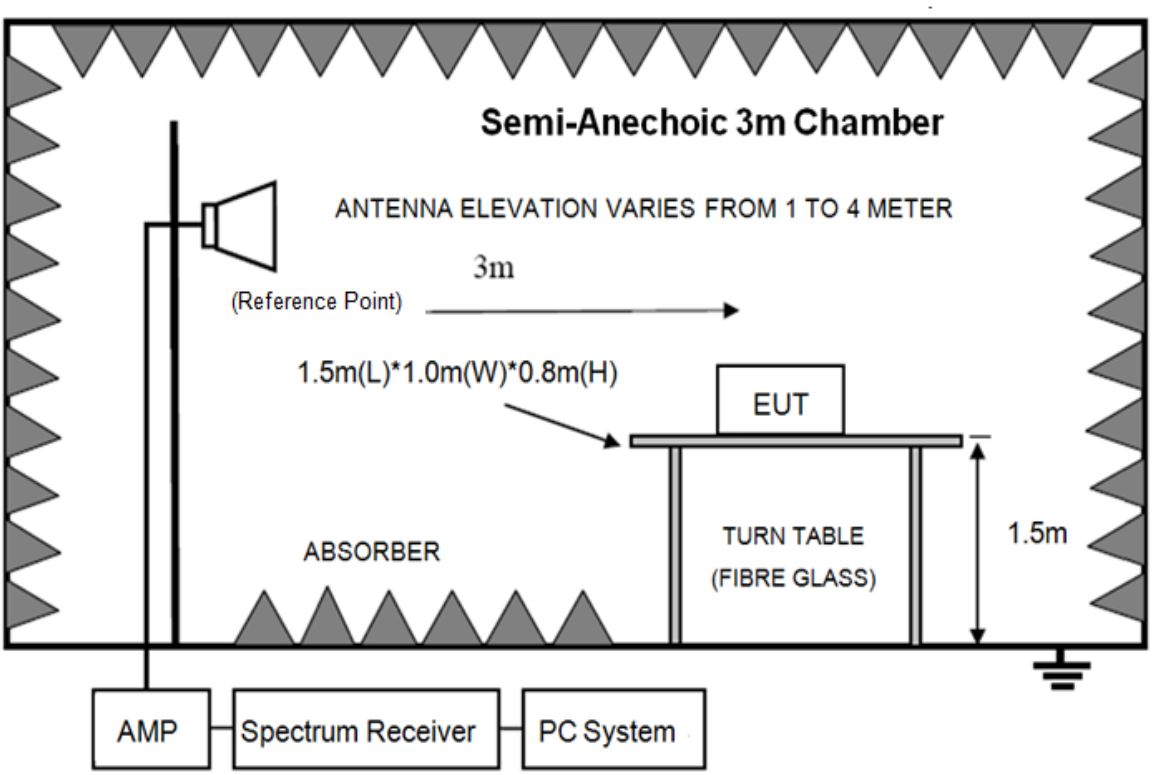

9.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

9.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2310MHz to 2422MHz and 2450MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worse case is shown in report.

9.4. Test result

PASS. (See below detailed test result)

Note: 11b ANT1, 11g ANT 1/2, n20 ANT 1/2, n40 ANT 1/2 mode all have been tested, only ANT 1 mode is worse case and reported.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/HORIZONTAL
Memo	: 11B 2412MHz		

Data: 6

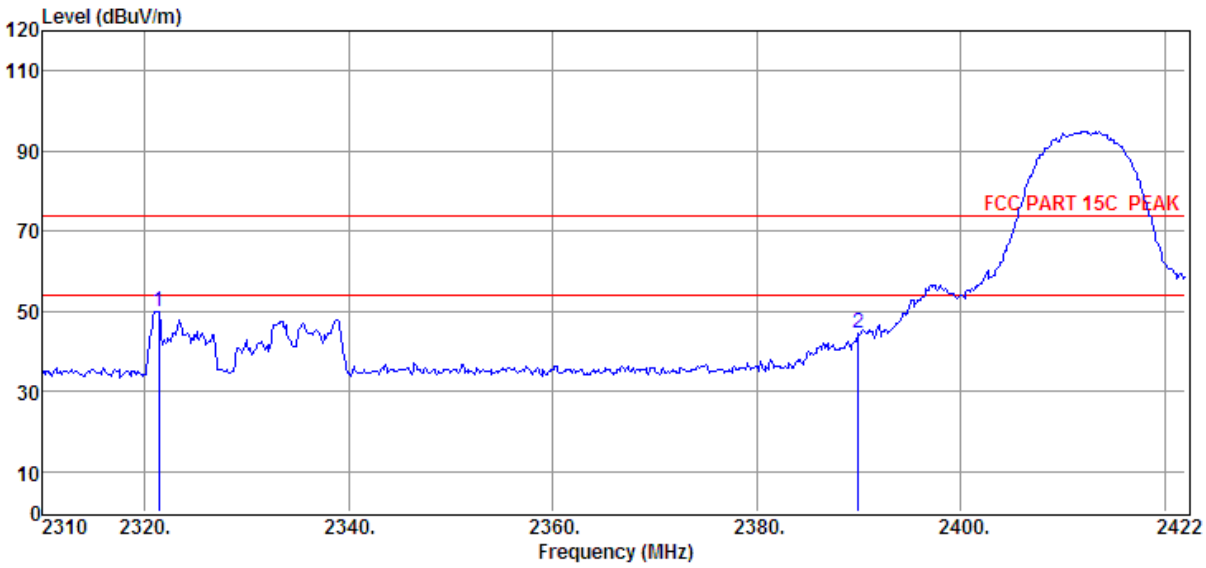

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2321.42	62.37	26.76	44.32	5.03	49.84	74.00	-24.16	Peak	HORIZONTAL
2	2389.97	56.63	27.00	44.32	5.11	44.42	74.00	-29.58	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/VERTICAL
Memo	: 11B 2412MHz		

Data: 5

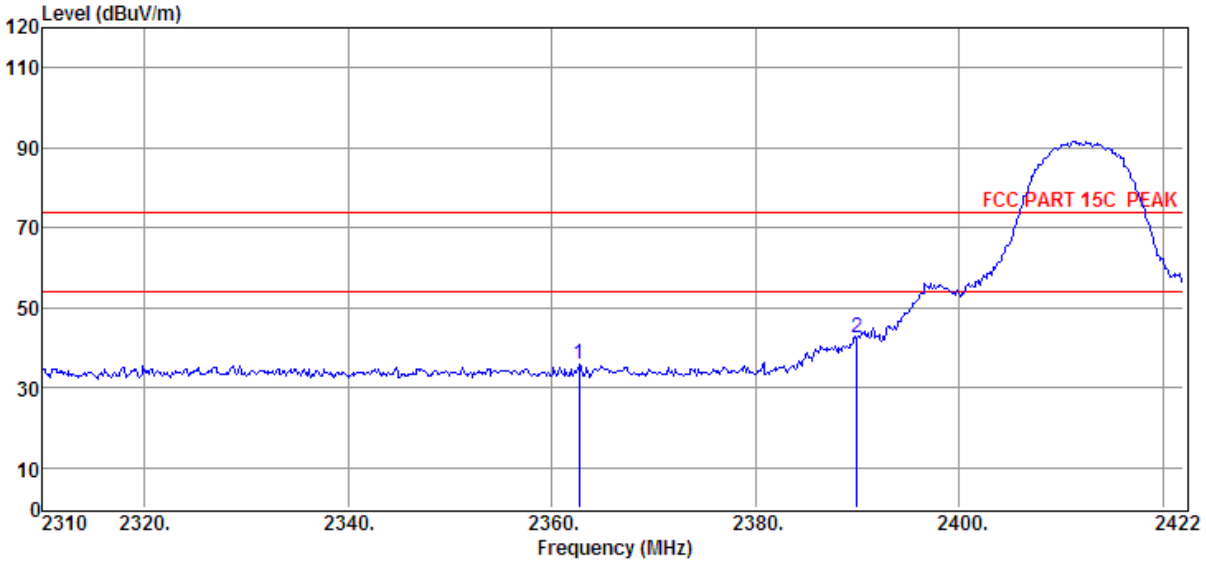

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2362.64	48.04	26.91	44.32	5.08	35.71	74.00	-38.29	Peak	VERTICAL
2	2389.97	54.71	27.00	44.32	5.11	42.50	74.00	-31.50	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/HORIZONTAL
Memo	: 11B 2462MHz		

Data: 14

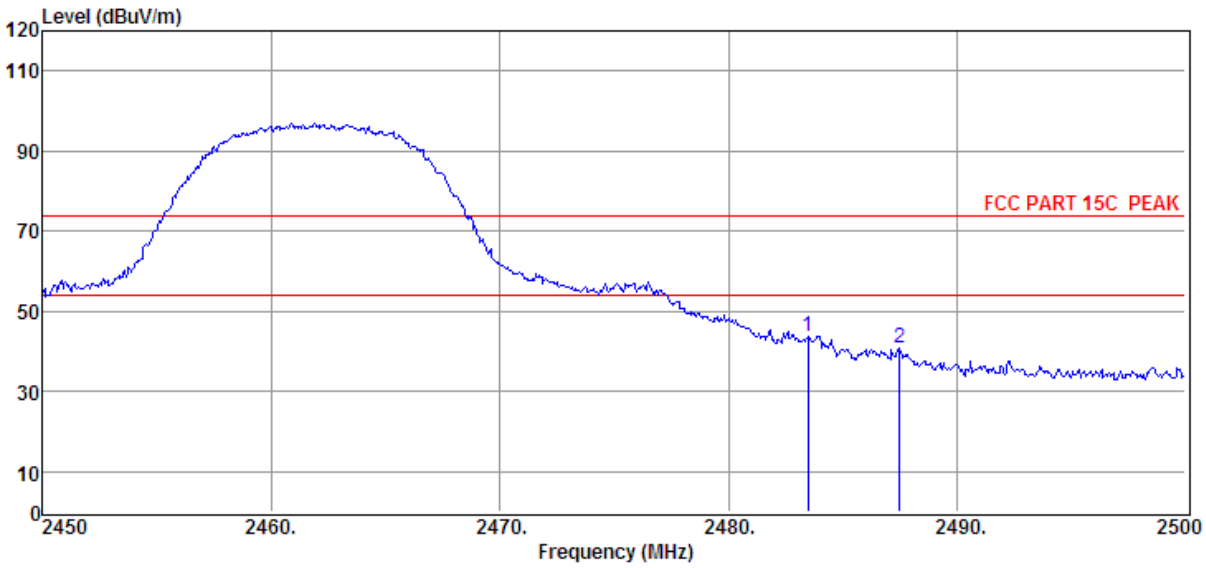

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	55.29	27.34	44.32	5.21	43.52	74.00	-30.48	Peak	HORIZONTAL
2	2487.50	52.50	27.35	44.32	5.22	40.75	74.00	-33.25	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/VERTICAL
Memo	: 11B 2462MHz		

Data: 13

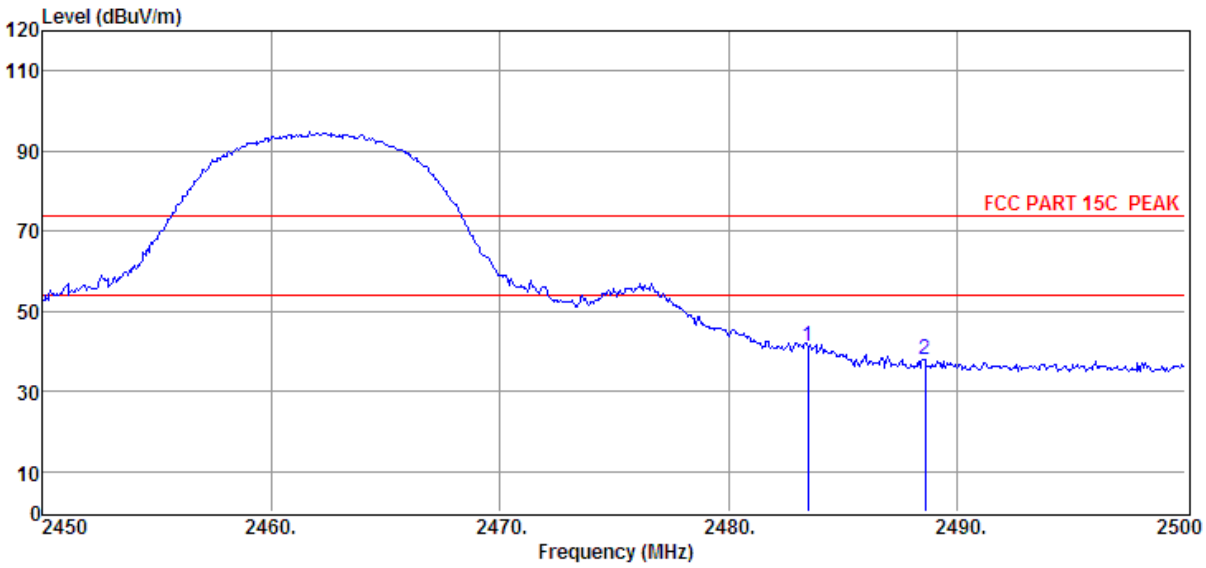

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	52.99	27.34	44.32	5.21	41.22	74.00	-32.78	Peak	VERTICAL
2	2488.60	49.82	27.36	44.32	5.22	38.08	74.00	-35.92	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/HORIZONTAL
Memo	: 11G 2412MHz		

Data: 15

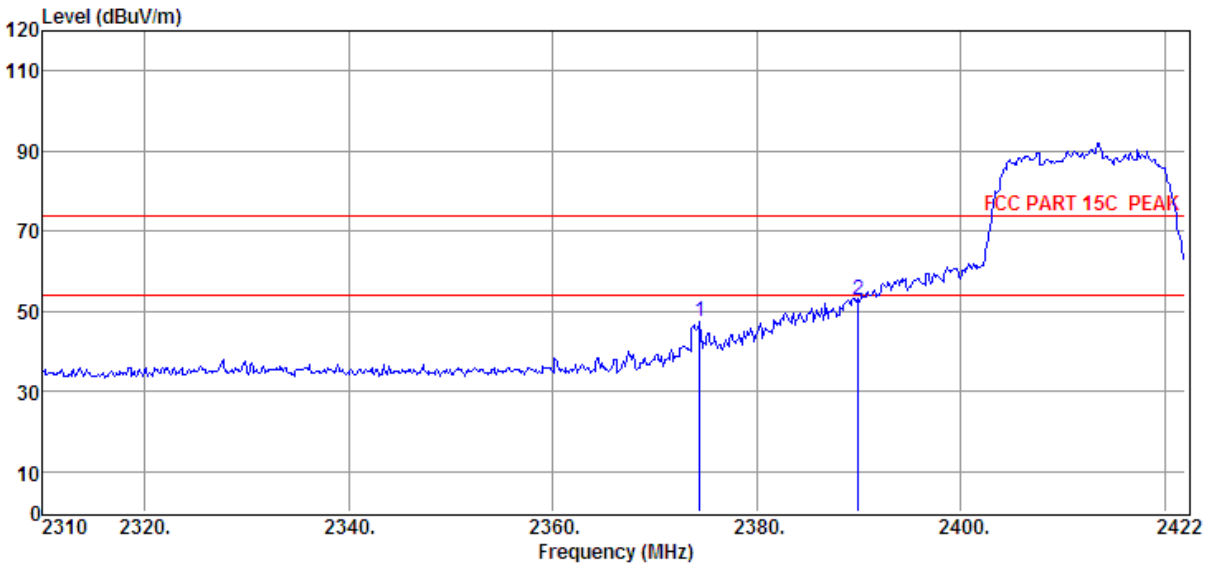

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2374.40	59.86	26.95	44.32	5.09	47.58	74.00	-26.42	Peak	HORIZONTAL
2	2389.97	64.97	27.00	44.32	5.11	52.76	74.00	-21.24	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/VERTICAL
Memo	: 11G 2412MHz		

Data: 16

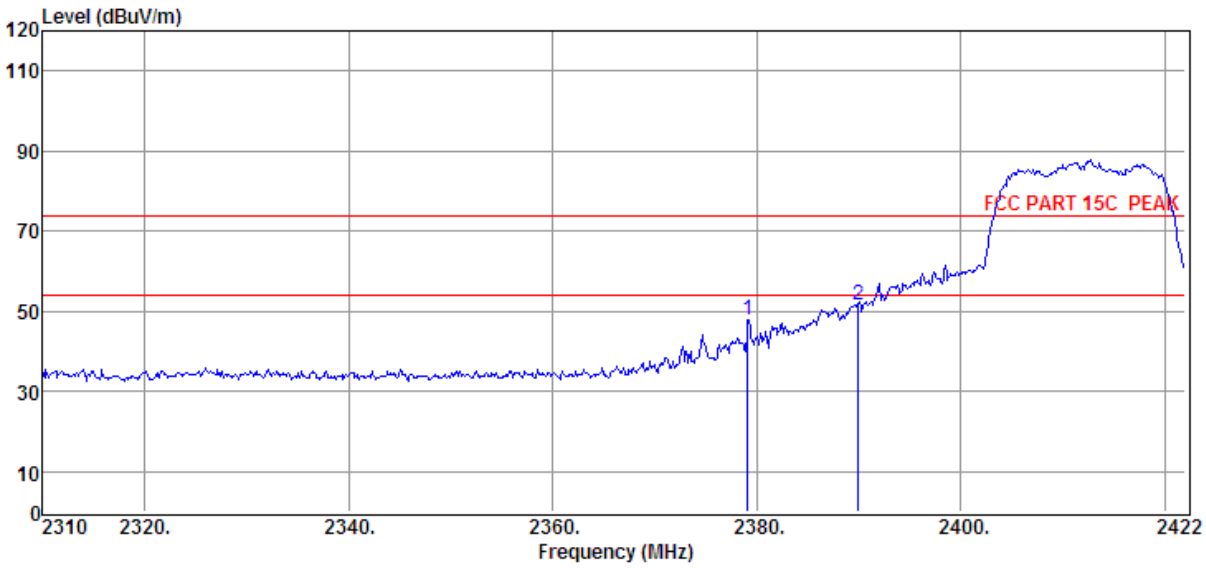

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2379.10	59.96	26.96	44.32	5.10	47.70	74.00	-26.30	Peak	VERTICAL
2	2389.97	63.55	27.00	44.32	5.11	51.34	74.00	-22.66	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/HORIZONTAL
Memo	: 11G 2462MHz		

Data: 18

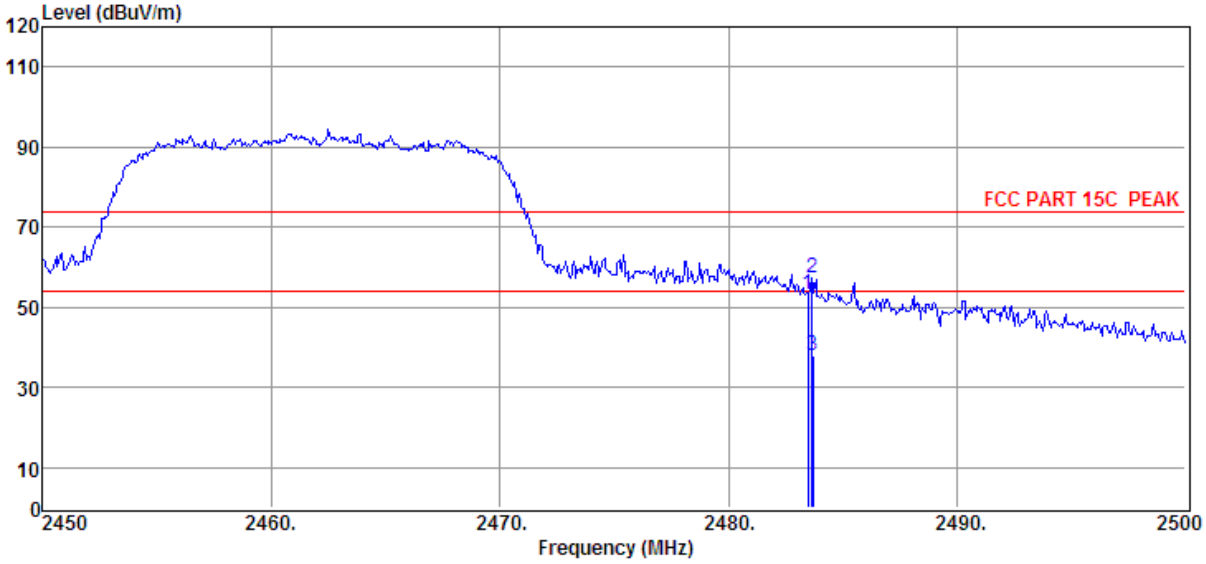

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	65.03	27.34	44.32	5.21	53.26	74.00	-20.74	Peak	HORIZONTAL
2	2483.65	69.08	27.34	44.32	5.21	57.31	74.00	-16.69	Peak	HORIZONTAL
3	2483.71	49.55	27.34	44.32	5.21	37.78	54.00	-16.22	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Test setup: RBW: 1 MHz, VBW: 10 Hz, Sweep time: auto for average measure.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/VERTICAL
Memo	: 11G 2462MHz		

Data: 17

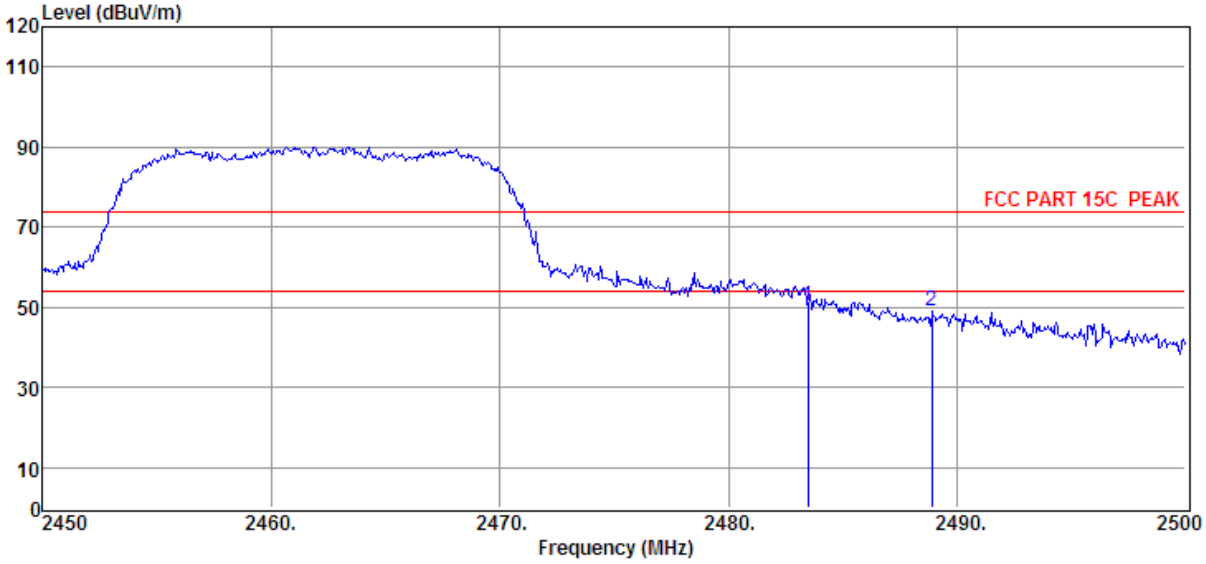

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	62.17	27.34	44.32	5.21	50.40	74.00	-23.60	Peak	VERTICAL
2	2488.90	60.61	27.36	44.32	5.22	48.87	74.00	-25.13	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/HORIZONTAL
Memo	: 11N20 2412MHz		

Data: 19

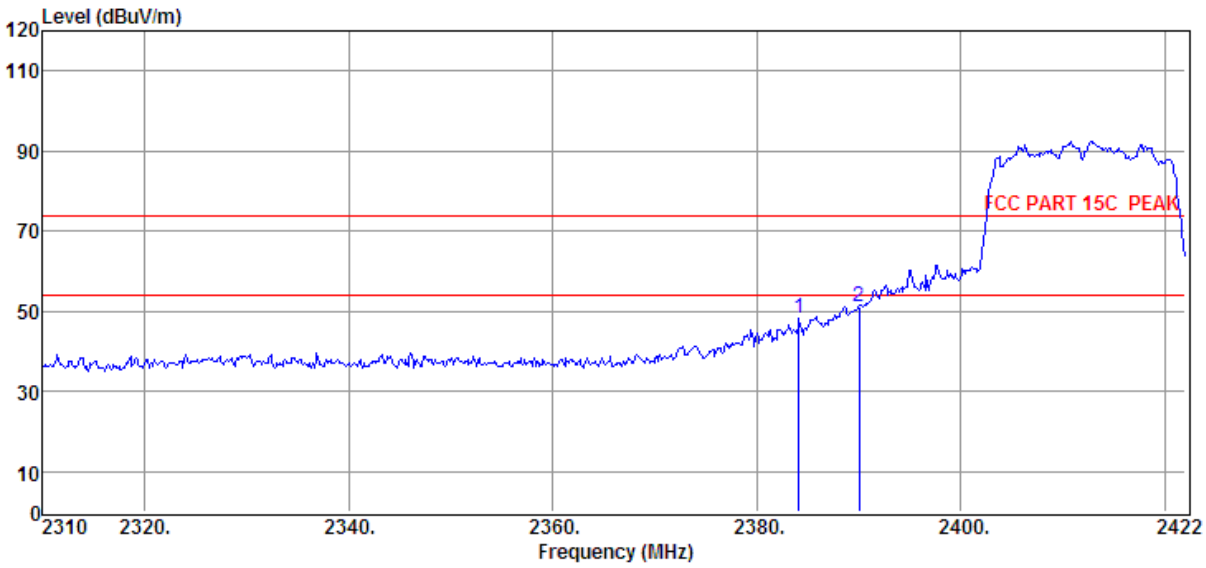

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2384.14	60.54	26.98	44.32	5.10	48.30	74.00	-25.70	Peak	HORIZONTAL
2	2390.00	63.46	27.00	44.32	5.11	51.25	74.00	-22.75	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/VERTICAL
Memo	: 11N20 2412MHz		

Data: 20

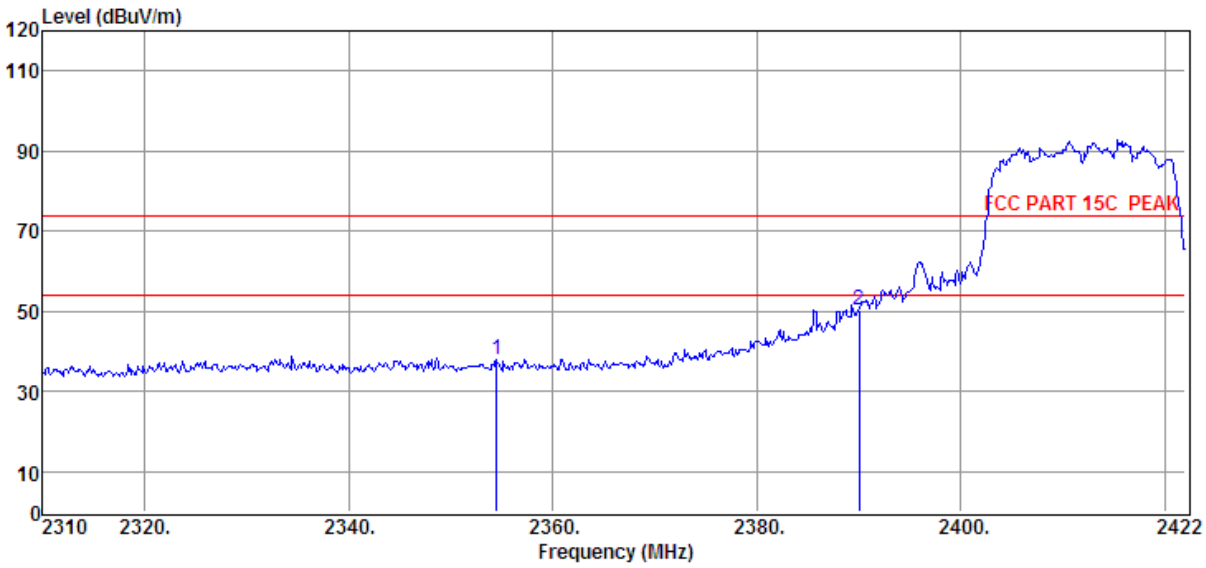

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2354.46	50.15	26.88	44.32	5.07	37.78	74.00	-36.22	Peak	VERTICAL
2	2390.00	62.57	27.00	44.32	5.11	50.36	74.00	-23.64	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/HORIZONTAL
Memo	: 11N20 2412MHz		

Data: 22

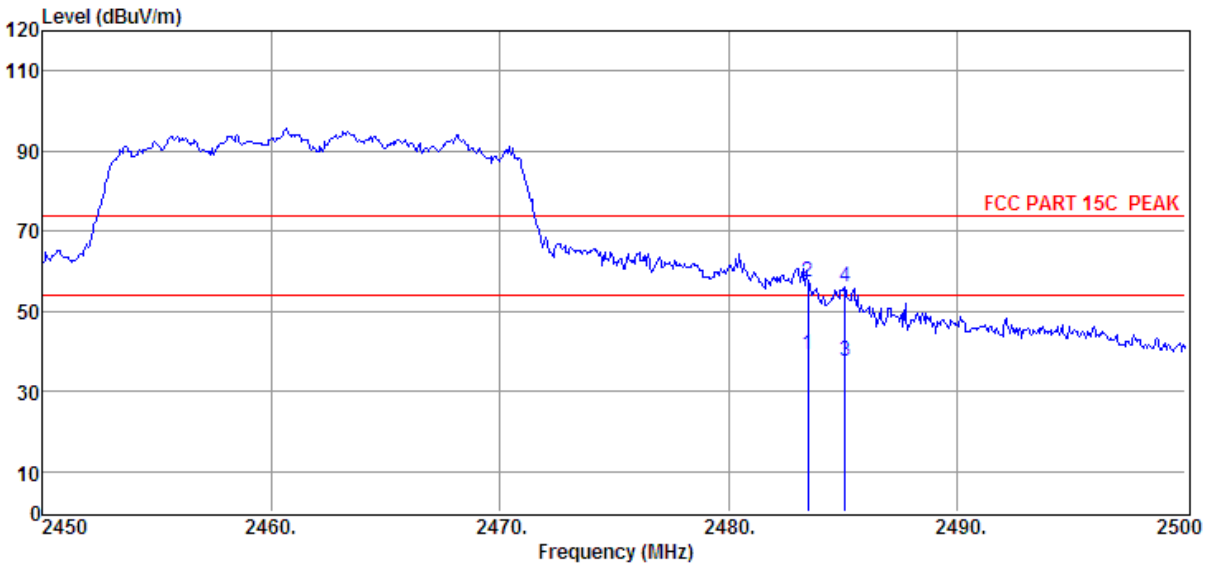

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	51.14	27.34	44.32	5.21	39.37	54.00	-14.63	Average	HORIZONTAL
2	2483.50	68.99	27.34	44.32	5.21	57.22	74.00	-16.78	Peak	HORIZONTAL
3	2485.10	49.32	27.35	44.32	5.21	37.56	54.00	-16.44	Average	HORIZONTAL
4	2485.10	67.67	27.35	44.32	5.21	55.91	74.00	-18.09	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Test setup: RBW: 1 MHz, VBW: 10 Hz, Sweep time: auto for average measure.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/VERTICAL
Memo	: 11N20 2412MHz		

Data: 21

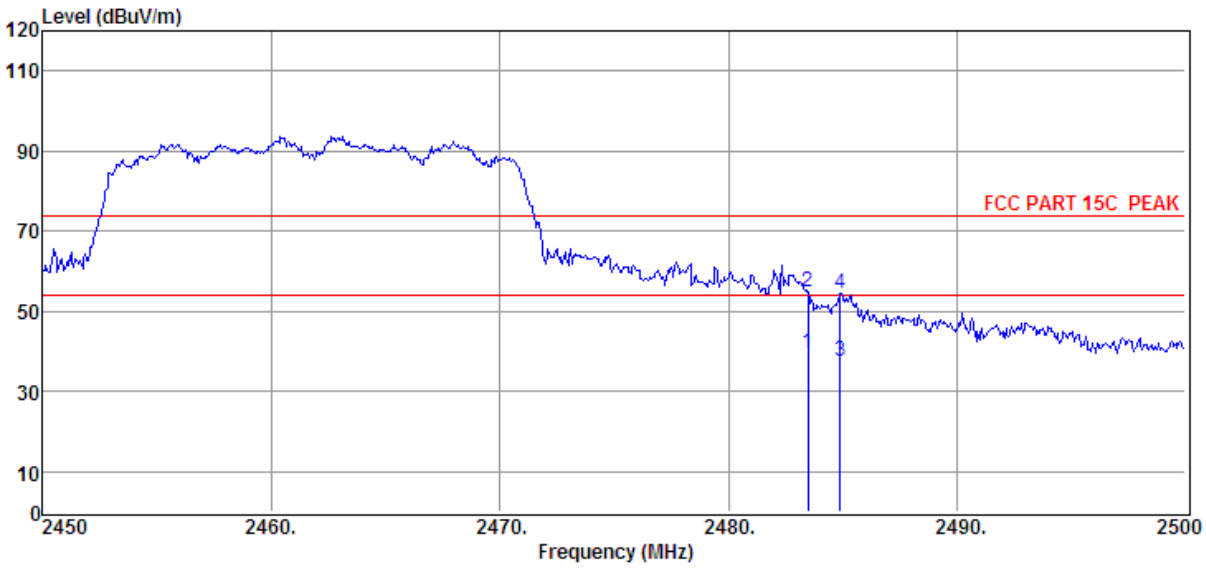

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	51.36	27.34	44.32	5.21	39.59	54.00	-14.41	Average	VERTICAL
2	2483.50	66.43	27.34	44.32	5.21	54.66	74.00	-19.34	Peak	VERTICAL
3	2484.90	49.14	27.35	44.32	5.21	37.38	54.00	-16.62	Average	VERTICAL
4	2484.90	66.32	27.35	44.32	5.21	54.56	74.00	-19.44	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Test setup: RBW: 1 MHz, VBW: 10 Hz, Sweep time: auto for average measure.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/HORIZONTAL
Memo	: 11N40 2422MHz		

Data: 23

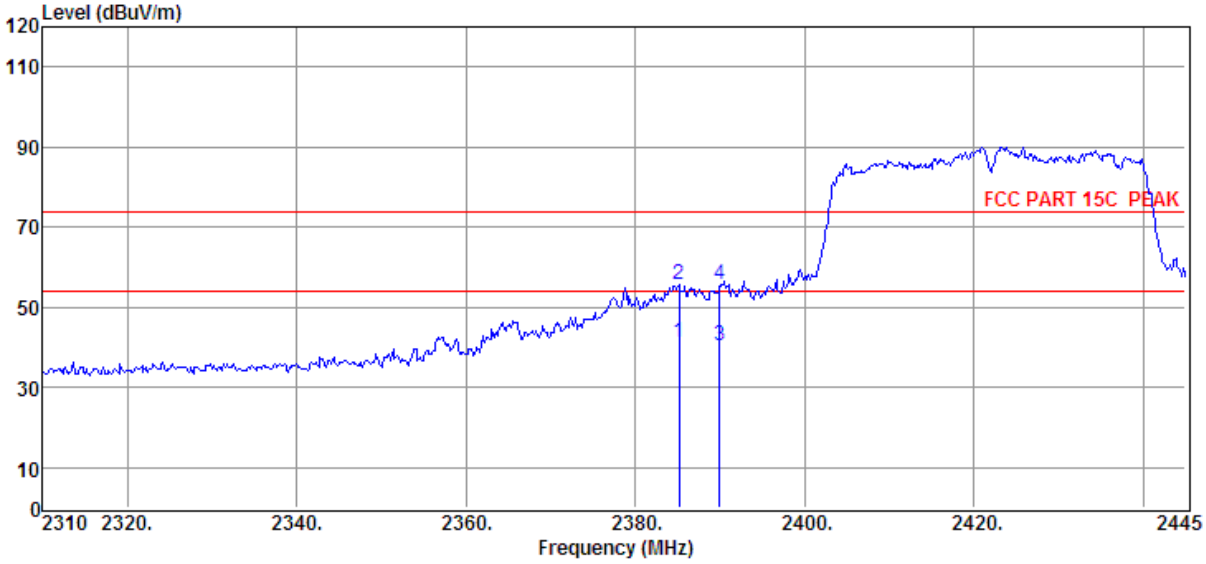

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2385.20	53.36	26.99	44.32	5.10	41.13	54.00	-12.87	Average	HORIZONTAL
2	2385.20	68.04	26.99	44.32	5.10	55.81	74.00	-18.19	Peak	HORIZONTAL
3	2390.00	52.45	27.00	44.32	5.11	40.24	54.00	-13.76	Average	HORIZONTAL
4	2390.00	67.76	27.00	44.32	5.11	55.55	74.00	-18.45	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Test setup: RBW: 1 MHz, VBW: 10 Hz, Sweep time: auto for average measure.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/VERTICAL
Memo	: 11N40 2422MHz		

Data: 24

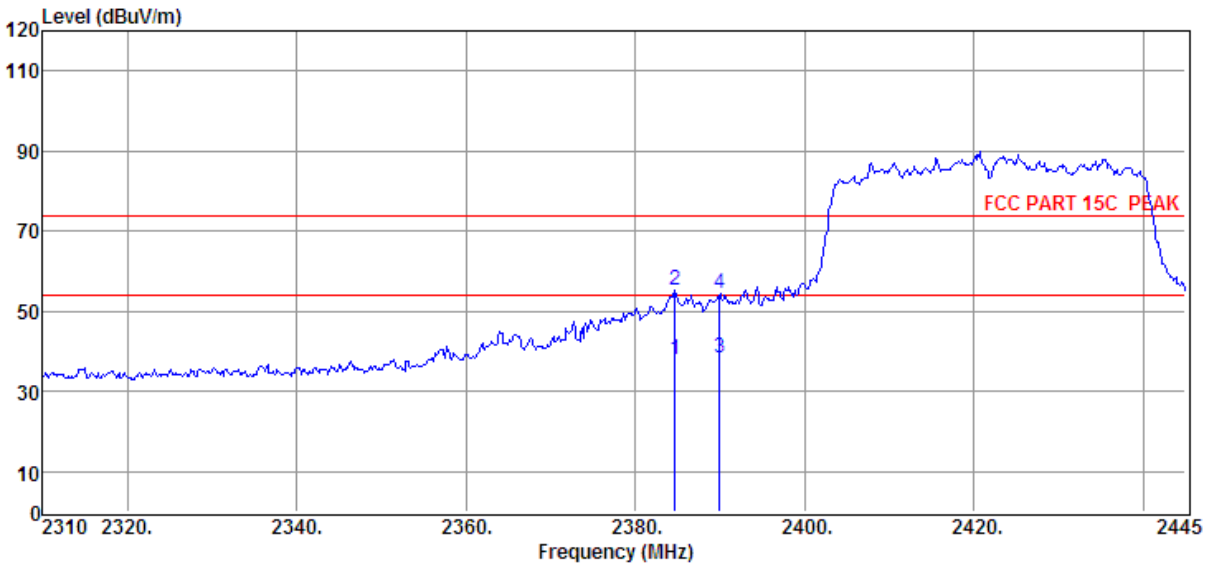

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2384.66	50.32	26.98	44.32	5.10	38.08	54.00	-15.92	Average	VERTICAL
2	2384.66	67.56	26.98	44.32	5.10	55.32	74.00	-18.68	Peak	VERTICAL
3	2390.00	50.74	27.00	44.32	5.11	38.53	54.00	-15.47	Average	VERTICAL
4	2390.00	66.67	27.00	44.32	5.11	54.46	74.00	-19.54	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Test setup: RBW: 1 MHz, VBW: 10 Hz, Sweep time: auto for average measure.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/HORIZONTAL
Memo	: 11N40 2452MHz		

Data: 26

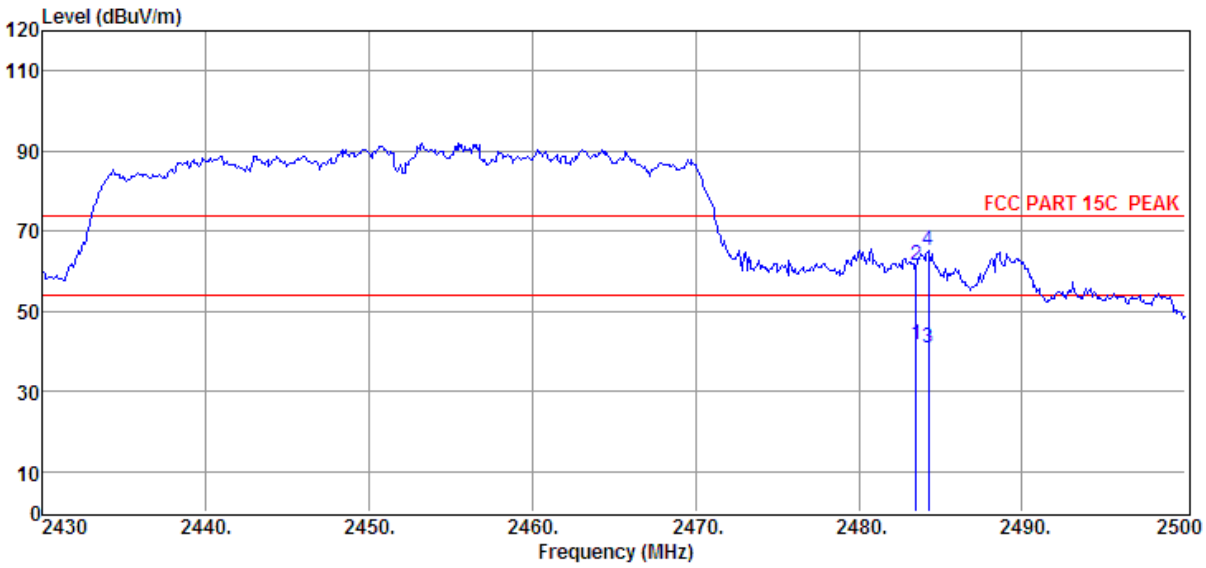

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	53.35	27.34	44.32	5.21	41.58	54.00	-12.42	Average	HORIZONTAL
2	2483.50	73.13	27.34	44.32	5.21	61.36	74.00	-12.64	Peak	HORIZONTAL
3	2484.25	52.43	27.34	44.32	5.21	40.66	54.00	-13.34	Average	HORIZONTAL
4	2484.25	76.92	27.34	44.32	5.21	65.15	74.00	-8.85	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Test setup: RBW: 1 MHz, VBW: 10 Hz, Sweep time: auto for average measure.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18030203-1E GPON SFU ONT\RF.EM6	
Test Date	: 2018-03-22	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**Antenna/Distance**	: 2017 HF907/3m/VERTICAL
Memo	: 11N40 2452MHz		

Data: 25

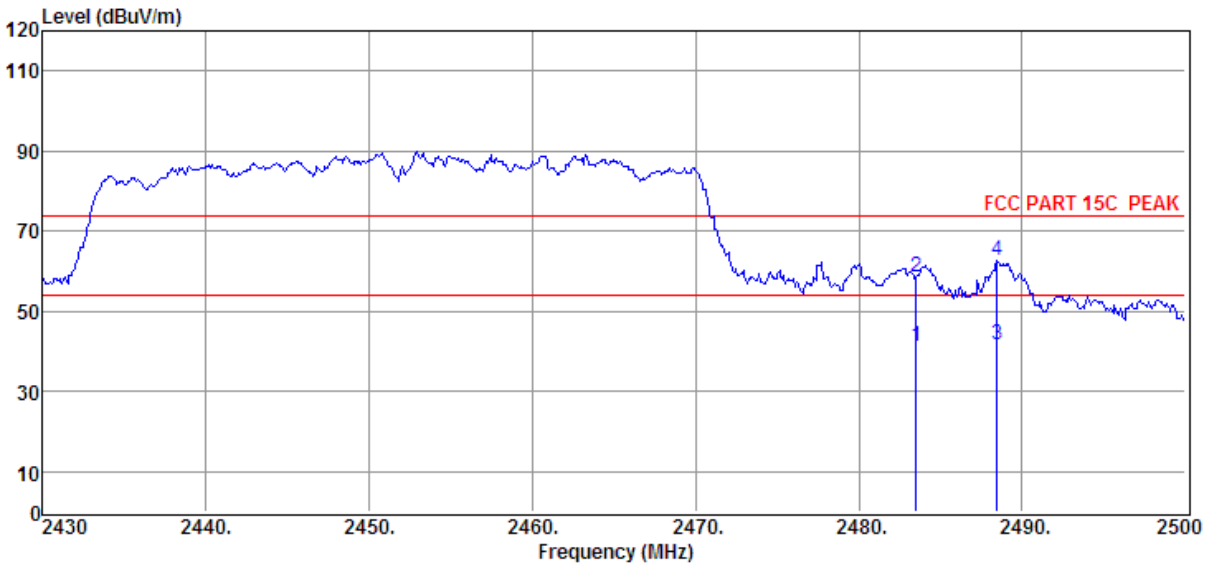

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	53.12	27.34	44.32	5.21	41.35	54.00	-12.65	Average	VERTICAL
2	2483.50	70.31	27.34	44.32	5.21	58.54	74.00	-15.46	Peak	VERTICAL
3	2488.45	53.25	27.36	44.32	5.22	41.51	54.00	-12.49	Average	VERTICAL
4	2488.45	74.34	27.36	44.32	5.22	62.60	74.00	-11.40	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Test setup: RBW: 1 MHz, VBW: 10 Hz, Sweep time: auto for average measure.

10. Power Line Conducted Emission

10.1. Block diagram of test setup

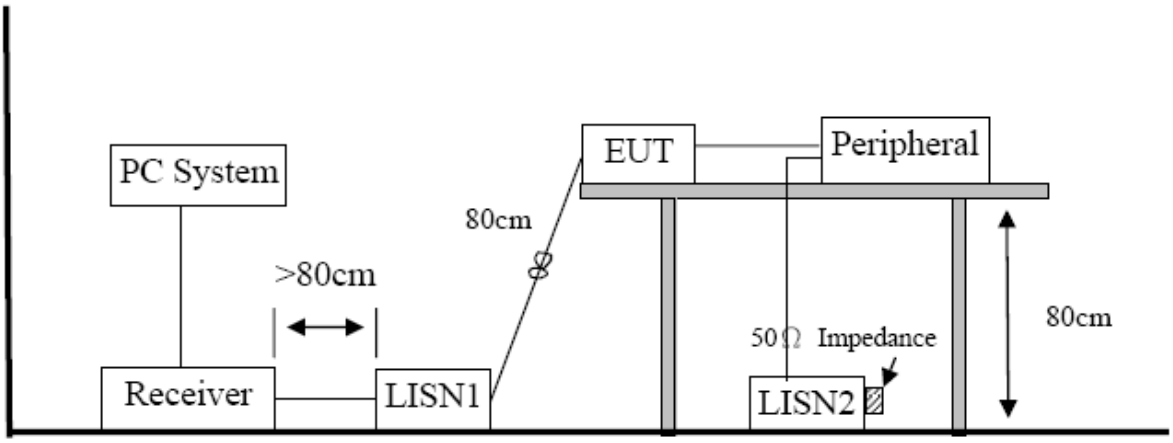

10.2. Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

10.4. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.
Note2: "-----" means peak detection; "-----" means average detection
Note3:Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case (AC 120V/60Hz).

TR-4-E-010 Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	D:\2018 CE report data\CE.EM6	
Test Date	: 2018-04-16	**Tested By**	: Sunny
EUT	: GPON SFU ONT	**Model Number**	: 7285G
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**LISN**	: 2017 ENV216/LINE
Memo	:		

Data: 2

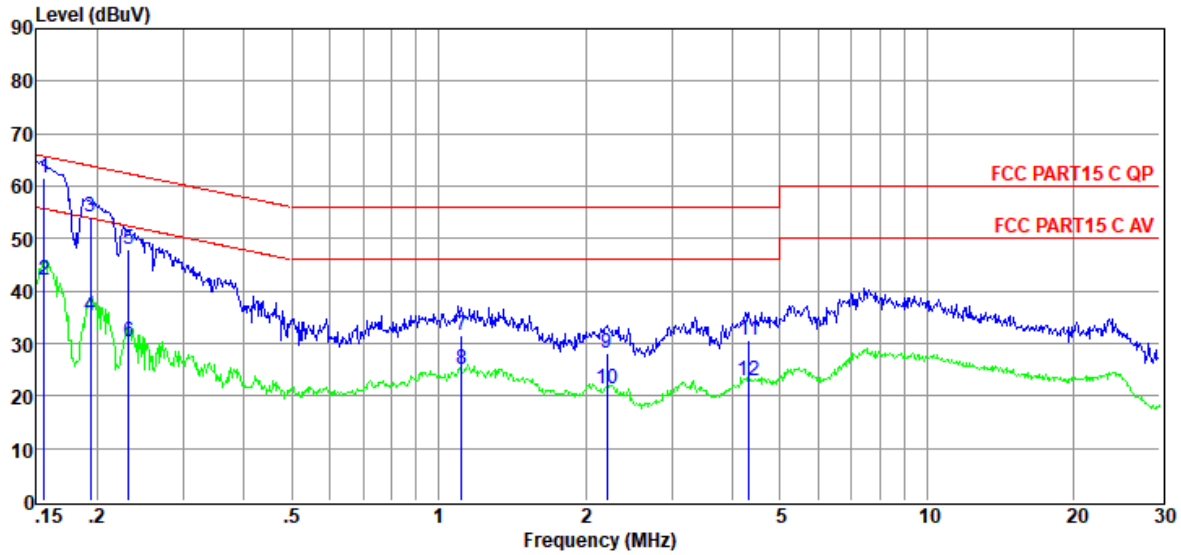

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Over Limit (dB)	Detector	Phase
1	0.16	42.05	9.52	0.04	9.86	61.47	65.69	-4.22	QP	LINE
2	0.16	22.58	9.52	0.04	9.86	42.00	55.69	-13.69	Average	LINE
3	0.19	34.68	9.51	0.04	9.86	54.09	63.89	-9.80	QP	LINE
4	0.19	15.76	9.51	0.04	9.86	35.17	53.89	-18.72	Average	LINE
5	0.23	28.43	9.52	0.04	9.86	47.85	62.39	-14.54	QP	LINE
6	0.23	10.81	9.52	0.04	9.86	30.23	52.39	-22.16	Average	LINE
7	1.12	12.13	9.57	0.14	9.86	31.70	56.00	-24.30	QP	LINE
8	1.12	5.46	9.57	0.14	9.86	25.03	46.00	-20.97	Average	LINE
9	2.21	8.45	9.60	0.12	9.87	28.04	56.00	-27.96	QP	LINE
10	2.21	1.68	9.60	0.12	9.87	21.27	46.00	-24.73	Average	LINE
11	4.32	11.15	9.64	0.10	9.87	30.76	56.00	-25.24	QP	LINE
12	4.32	3.20	9.64	0.10	9.87	22.81	46.00	-23.19	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	D:\2018 CE report data\CE.EM6			
Test Date	: 2018-04-16	**Tested By**	: Sunny		
EUT	: GPON SFU ONT	**Model Number**	: 7285G		
Power Supply	: AC 120V/60Hz	**Test Mode**	: Tx mode		
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	**LISN**	: 2017 ENV216/NEUTRAL		
Memo	:				

Data: 4

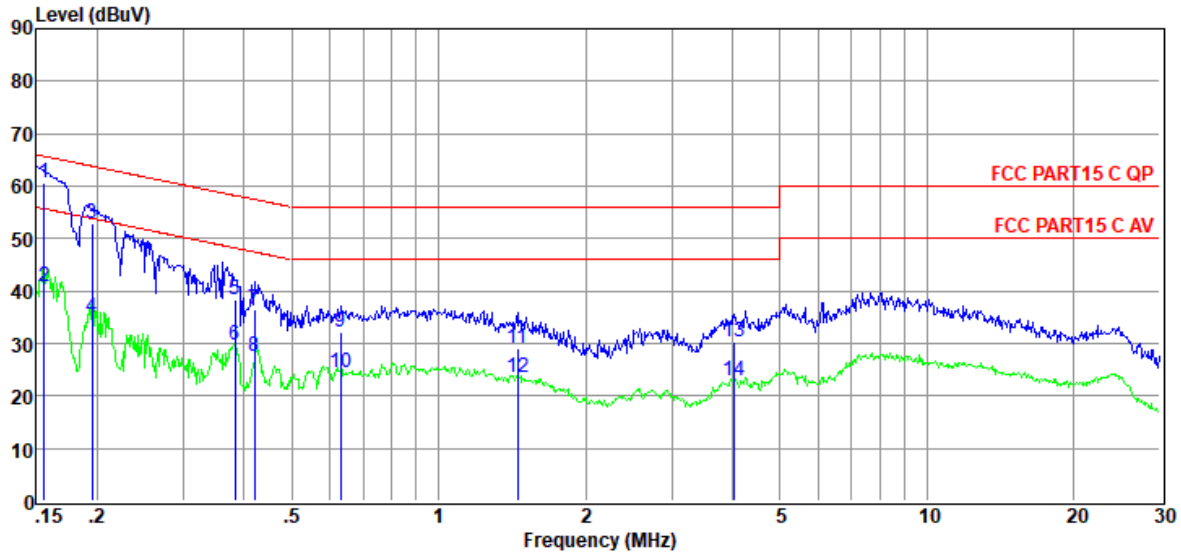

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Over Limit (dB)	Detector	Phase
1	0.16	41.34	9.48	0.04	9.86	60.72	65.69	-4.97	QP	NEUTRAL
2	0.16	21.33	9.48	0.04	9.86	40.71	55.69	-14.98	Average	NEUTRAL
3	0.20	33.60	9.45	0.04	9.86	52.95	63.80	-10.85	QP	NEUTRAL
4	0.20	15.69	9.45	0.04	9.86	35.04	53.80	-18.76	Average	NEUTRAL
5	0.38	19.00	9.37	0.04	9.83	38.24	58.21	-19.97	QP	NEUTRAL
6	0.38	10.50	9.37	0.04	9.83	29.74	48.21	-18.47	Average	NEUTRAL
7	0.42	17.19	9.37	0.04	9.82	36.42	57.44	-21.02	QP	NEUTRAL
8	0.42	8.21	9.37	0.04	9.82	27.44	47.44	-20.00	Average	NEUTRAL
9	0.63	12.80	9.33	0.07	9.84	32.04	56.00	-23.96	QP	NEUTRAL
10	0.63	5.34	9.33	0.07	9.84	24.58	46.00	-21.42	Average	NEUTRAL
11	1.45	9.90	9.28	0.13	9.86	29.17	56.00	-26.83	QP	NEUTRAL
12	1.45	4.30	9.28	0.13	9.86	23.57	46.00	-22.43	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The antennas used for this product are integrated antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 5.64dBi.

END OF REPORT