



EMC MEASUREMENT REPORT

Applicant: ALE USA Inc.
Address: 2000 Corporate Center Drive Thousand Oaks, CA 91320
Product: OmniAccess Stellar
Model No.: OAW-AP1541
Brand Name: Alcatel-Lucent Enterprise
FCC Rule Part(s): FCC Part 15 Subpart B
ISED Rule(s): ICES-003 Issue 7 (October 15, 2020)
RSS-Gen Issue 5 (February 11, 2021)
Test Procedure: ANSI C63.4-2014
Result: Complies
Received Date: 2025-11-25
Test Date: 2025-12-15 ~ 2026-04-14

Reviewed By:

Vincent Yu

Vincent Yu

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1060119-U101	V01	Initial Report	2026-05-22	Valid

CONTENTS

Description	Page
1. General Information	4
1.1. Applicant.....	4
1.2. Manufacturer	4
1.3. Testing Facility.....	4
1.4. Product Information	5
2. Test Configuration	6
2.1. Test Mode	6
2.2. Configuration of Tested System.....	6
2.3. EMI Suppression Device(s)/Modifications	8
3. Measuring Instrument	9
4. Decision Rules and Measurement Uncertainty.....	10
4.1. Decision Rules	10
4.2. Measurement Uncertainty	10
5. Test Result	11
5.1. Summary	11
5.2. Conducted Emission	12
5.2.1. Test Limit	12
5.2.2. Test Setup	12
5.2.3. Test Result.....	13
5.3. Radiated Emission	45
5.3.1. Test Limit	45
5.3.2. Test Setup	46
5.3.3. Test Result.....	47
Appendix A - Test Setup Photograph	95
Appendix B - EUT Photograph	96

1. General Information

1.1. Applicant

ALE USA Inc.

2000 Corporate Center Drive Thousand Oaks, CA 91320

1.2. Manufacturer

ALE USA Inc.

2000 Corporate Center Drive Thousand Oaks, CA 91320

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China
	Laboratory Accreditations
	A2LA: 3628.01 FCC: CN1166
☐	Test Site - MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 FCC: CN1284
☐	Test Site - MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261

1.4. Product Information

Product Name	OmniAccess Stellar
Model No.	OAW-AP1541
Brand Name	Alcatel-Lucent Enterprise
EUT Identification	20251125Sample#02 & 20251125Sample#01
Bluetooth Specification	Bluetooth_LE
ZigBee Specification	802.15.4
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
GNSS Specification	GPS, GLONASS, Beidou, Galileo, SBAS
Operating Temperature	0 °C ~ 50 °C
Antenna Information	Refer to section 1.5
Power Type	AC/DC Adapter or PoE Injector
Accessory(ies)	
AC/DC Adapter	Model No.: AA65U-540A Input Power: 100-240 V ~ 50/60 Hz, 1.6 A Output Power: 54 V = 1.2 A, 64.8 W
PoE Injector	Model: POE60U-1BT-X Input: 100-240 V ~ 50/60 Hz, 1.5 A Output: 56 V, 0.535 A, 30 W PIN 3, 6+ PIN 1, 2 Return Output: 56 V, 0.535 A, 30 W PIN 4, 5+ PIN 7, 8 Return
Remarks: 1. The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer. 2. The Adapter and PoE Injector are not sold with product.	


2. Test Configuration

2.1. Test Mode


Mode 1: Dual PoE power supply + ping 2.4G, 5G, 6G Wi-Fi + ping Fiber to Network Port + ping Eth0 + ping Eth1 + USB reading and writing + Zigbee connection + GPS monitoring (built-in).
Mode 2: Adapter power supply + ping 2.4G, 5G, 6G Wi-Fi + ping Fiber to Network Port + ping Eth0 + ping Eth1 + USB reading and writing + BLE connection + GPS monitoring (external).
Mode 3: Receive by 802.11n-HT20 at 2437 MHz.
Mode 4: Receive by Zigbee at 2405 MHz.
Mode 5: Receive by BLE 1M at 2480 MHz.
Mode 6: Receive by 802.11ac-VHT80 at 5690 MHz. (5 GHz Full Band)
Mode 7: Receive by 802.11be-EHT80 at 5690 MHz H band. (5 GHz High Band)
Mode 8: Receive by 802.11be-EHT320 at 6585 MHz.

2.2. Configuration of Tested System


The measurement procedures and appropriate EUT setup described in the ANSI C63.4-2014 was used in the measurement.

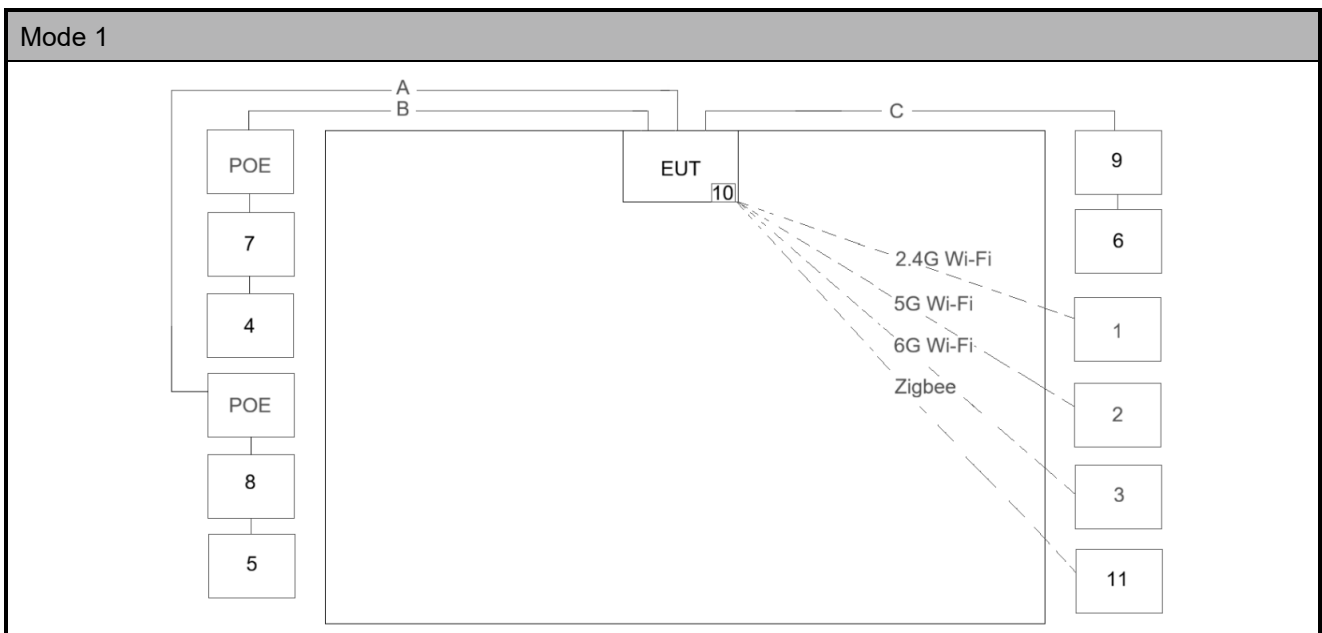

Mode 2

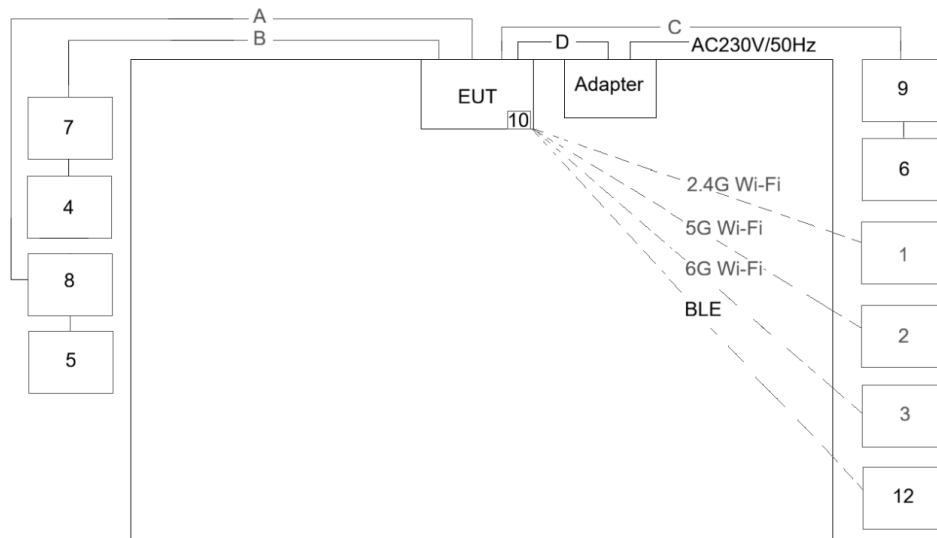

Mode 3 ~ 8

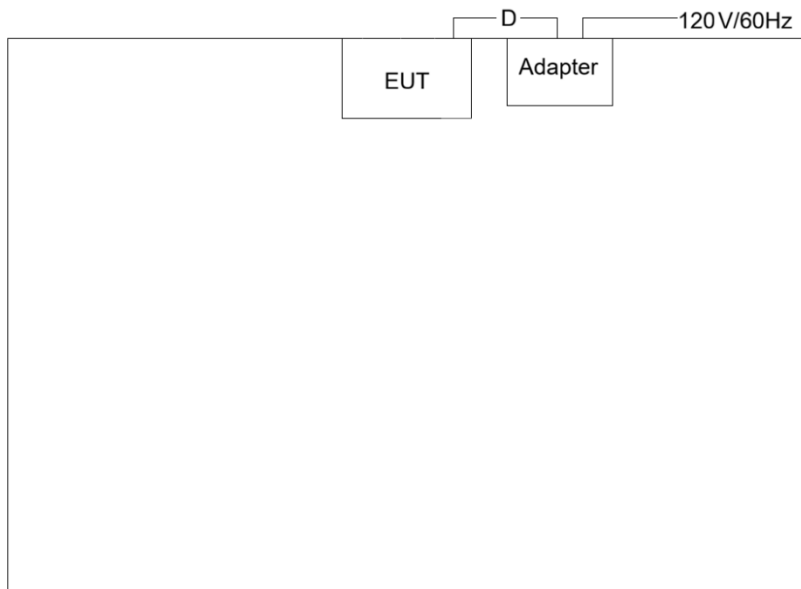

No.	Cable Type	Cable Spec.	Length
A	Power Cable	Shielding	> 10.0 m
B	LAN Cable	Shielding	> 10.0 m
C	Optical fiber Cable	Non-Shielding	> 10.0 m
D	Power Cable	Non-Shielding	1.5 m
No.	Product	Manufacturer	Model No.
1	PC	HP	6J7D8PA#AB2
2	PC	HP	487D69A#AB2
3	PC	DELL	Latitude 5440
4	PC	Lenovo	ThinkBook 16G5 IRH

5	PC	Lenovo	ThinkBook 16G5 IRH
6	PC	HP	Desktop M01-F375rcn PC
7	Switch	TP-LINK	TL-SL1005
8	Switch	TP-LINK	TL-SL2005
9	Fiber Optical Transceiver	Guangbida	FT-W10G-F
10	U disk	SanDisk	SDDDC3-128G-Z46P
11	AP	Huaxin Aotian Network	AP 1541
12	Phone	vivo	Iqoo Neo8 V2301A

2.3. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

3. Measuring Instrument

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE11315	1 year	2026-06-16	WJ-AC2
Anechoic Chamber	TDK	WJ-AC2	MRTSUE07117	1 year	2026-05-12	WJ-AC2
TRILOG Broad Band Antenna	Schwarzbeck	VULB 9163	MRTSUE07097	1 year	2026-04-20	WJ-AC2
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2026-04-19	WJ-AC2
Horn Antenna	RFSPIN	DRH18-E	MRTSUE07105	1 year	2026-05-12	WJ-AC2
Pre-Amplifier	EMCI	EMC118A45SEE	MRTSUE07102	1 year	2026-04-09 2027-04-08	WJ-AC2
Broadband Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE07100	1 year	2026-04-09 2027-04-08	WJ-AC2
Pre-Amplifier	EMCI	EMC184045SEE	MRTSUE07103	1 year	2026-04-09 2027-04-08	WJ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE07285	1 year	2026-02-18 2027-02-17	WJ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE07285	1 year	2026-02-18 2027-02-17	WJ-AC2
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2026-04-19	WJ-SR5
Two-Line V-Network	R&S	ENV216	MRTSUE07201	1 year	2026-05-26	WJ-SR5
Two-Line V-Network	R&S	ENV216	MRTSUE07202	1 year	2026-05-26	WJ-SR5
EMC Cable	HUBER+SUHNER	RG 233/U	MRTSUE11310	1 year	2026-05-24	WJ-SR5
Thermohygrometer	R&S	608-H1	MRTSUE11317	1 year	2026-06-05	WJ-SR5
Impedance Stabilisation Network	Schwarzbeck	CDN ISN S8 RJ45	MRTSUE07186	1 year	2026-05-29	WJ-SR5

Software	Version	Function
e3	230711	RE+CE
CONTROLLER CO3000	1.03.02	RE Antenna & Turntable
ELEKTRA	5.20.1	RE+CE

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9 kHz ~ 150 kHz: 3.59 dB 150 kHz ~ 30 MHz: 3.20 dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Horizontal: 30 MHz ~ 200 MHz: 3.48 dB 200 MHz ~ 1 GHz: 4.17 dB 1 GHz ~ 40 GHz: 5.01 dB Vertical: 30 MHz ~ 200 MHz: 4.09 dB 200 MHz ~ 1 GHz: 5.30 dB 1 GHz ~ 40 GHz: 4.85 dB

5. Test Result

5.1. Summary

FCC Part Section(s)	ISED Section(s)	Test Description	Result
15.107	ICES-003 - 3.2.1 RSS-Gen - 7.2	Conducted Emission	Pass
15.109	ICES-003 - 3.2.2 RSS-Gen - 7.3	Radiated Emission	Pass

5.2. Conducted Emission


5.2.1. Test Limit

FCC Part 15.107 / ICES-003 Conducted Emission Limits				
Frequency Range (MHz)	Class A Limits		Class B Limits	
	QP dB(μV)	AV dB(μV)	QP dB(μV)	AV dB(μV)
0.15 ~ 0.5	79	66	66 to 56	56 to 46
0.5 ~ 5	73	60	56	46
5 ~ 30	73	60	60	50

RSS-Gen Receiver Conducted Emission Limits		
Frequency Range (MHz)	QP dB(μV)	AV dB(μV)
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

Note: Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.


5.2.2. Test Setup

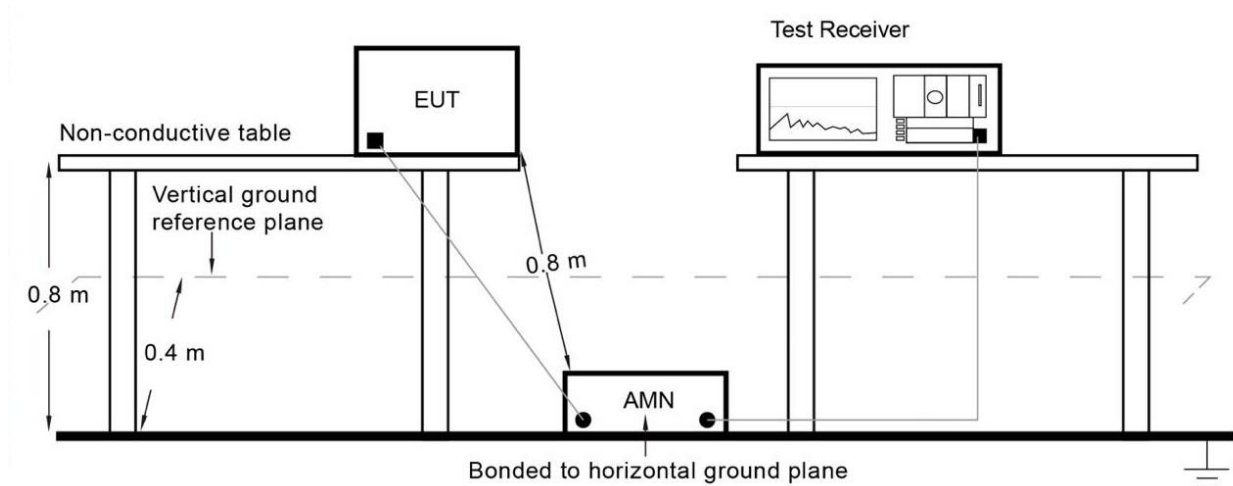

5.2.3. Test Result

EUT	OmniAccess Stellar
Note	Mode 1
Test Voltage	AC 120 V/60 Hz
Test Engineer	Cora Wang
Test Date	2025-12-15
Temp	19.7 °C
Humi	33.7%
Polarity	L
Test Site	WJ-SR5

Spectrum Overview

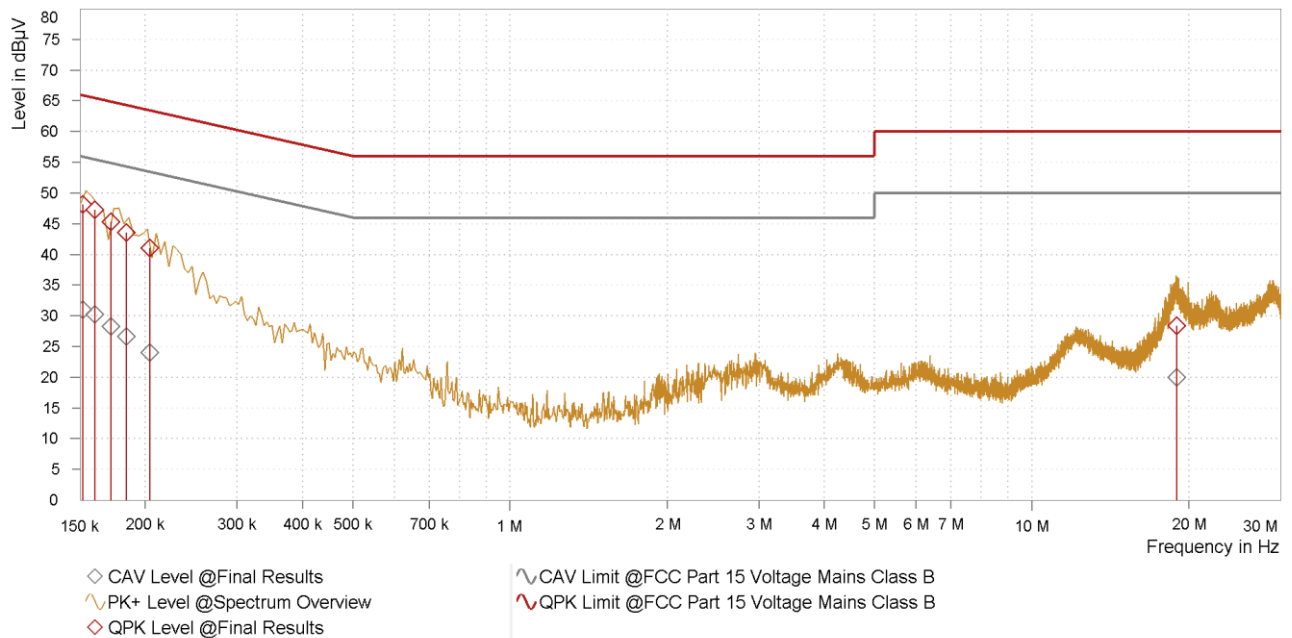

Final Results


Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.152	48.15	65.89	17.74	38.42	31.04	55.89	24.85	21.31	9.73	L1
0.160	47.23	65.46	18.23	37.50	30.21	55.46	25.25	20.48	9.73	L1
0.172	45.31	64.86	19.56	35.56	28.32	54.86	26.54	18.58	9.74	L1
0.184	43.57	64.30	20.73	33.83	26.61	54.30	27.69	16.86	9.75	L1
0.204	41.02	63.45	22.43	31.26	24.06	53.45	29.39	14.30	9.76	L1
18.945	28.37	60.00	31.63	17.98	19.98	50.00	30.02	9.59	10.39	L1

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT	OmniAccess Stellar
Note	Mode 1
Test Voltage	AC 120 V/60 Hz
Test Engineer	Cora Wang
Test Date	2025-12-15
Temp	19.7 °C
Humi	33.7%
Polarity	N
Test Site	WJ-SR5

Spectrum Overview

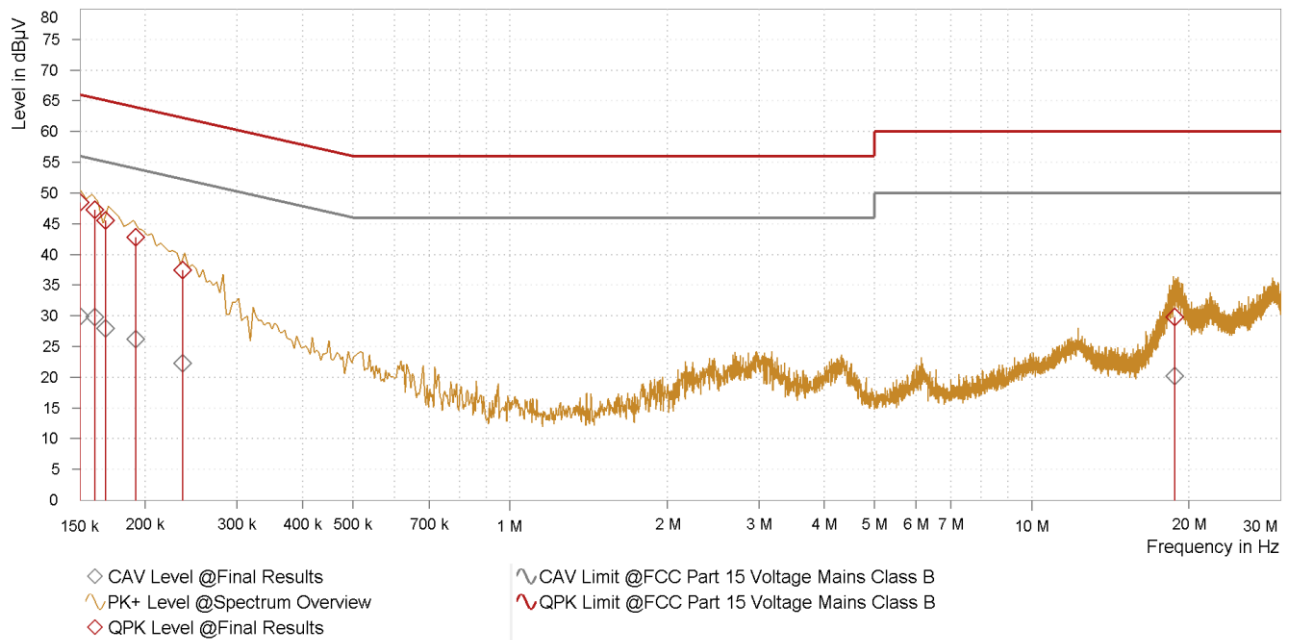

Final Results


Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	QPK Raw Lvl [dBµV]	CAV Level [dBµV]	CAV Limit [dBµV]	CAV Margin [dB]	CAV Raw Lvl [dBµV]	Correction [dB]	Line
0.150	48.44	66.00	17.56	38.77	29.93	56.00	26.07	20.26	9.67	N
0.160	47.26	65.46	18.20	37.59	29.84	55.46	25.62	20.16	9.68	N
0.168	45.53	65.06	19.53	35.85	27.95	55.06	27.11	18.26	9.69	N
0.192	42.77	63.95	21.18	33.06	26.16	53.95	27.79	16.45	9.71	N
0.236	37.43	62.24	24.81	27.70	22.28	52.24	29.96	12.56	9.72	N
18.815	29.83	60.00	30.17	19.35	20.22	50.00	29.78	9.74	10.48	N

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT	OmniAccess Stellar
Note	Mode 2
Test Voltage	AC 120 V/60 Hz
Test Engineer	Daisy Zhou
Test Date	2025-12-15
Temp	19.7 °C
Humi	33.7%
Polarity	L
Test Site	WJ-SR5

Spectrum Overview

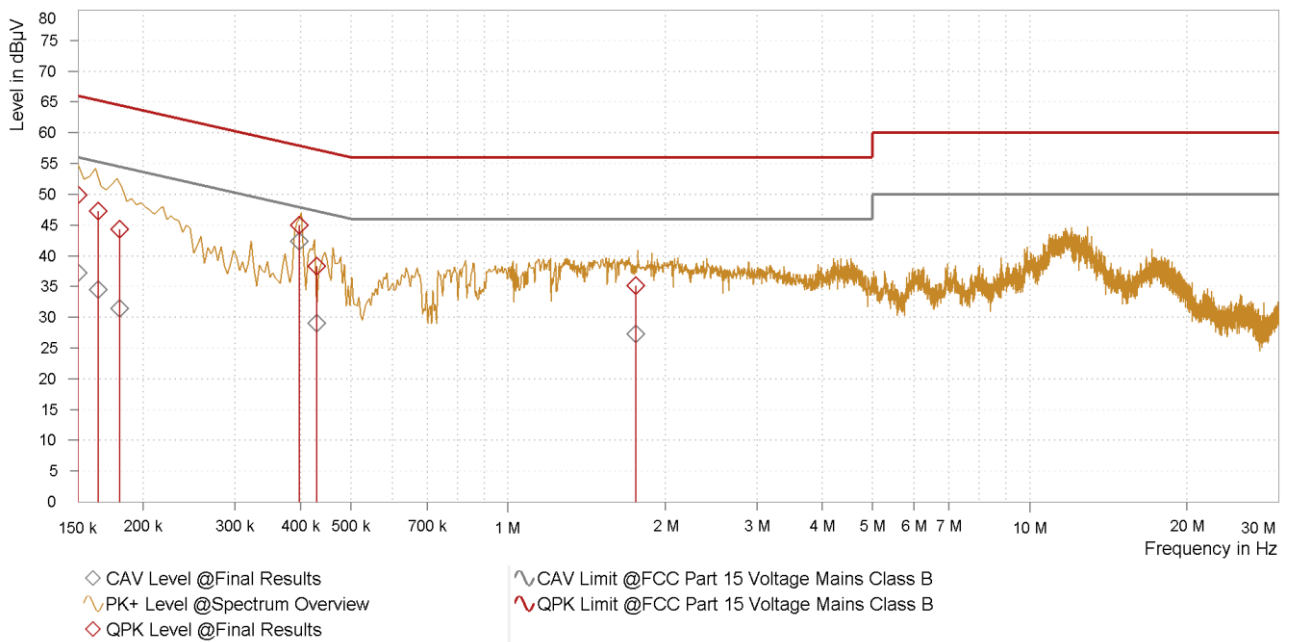

Final Results


Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.150	49.83	66.00	16.17	40.10	37.20	56.00	18.80	27.47	9.73	L1
0.164	47.22	65.26	18.04	37.49	34.45	55.26	20.81	24.71	9.74	L1
0.180	44.27	64.49	20.21	34.53	31.44	54.49	23.05	21.69	9.75	L1
0.398	44.94	57.90	12.95	35.16	42.29	47.90	5.60	32.51	9.78	L1
0.430	38.35	57.25	18.91	28.56	29.03	47.25	18.22	19.24	9.79	L1
1.756	35.09	56.00	20.91	24.98	27.29	46.00	18.71	17.18	10.11	L1

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT	OmniAccess Stellar
Note	Mode 2
Test Voltage	AC 120 V/60 Hz
Test Engineer	Daisy Zhou
Test Date	2025-12-15
Temp	19.7 °C
Humi	33.7%
Polarity	N
Test Site	WJ-SR5

Spectrum Overview

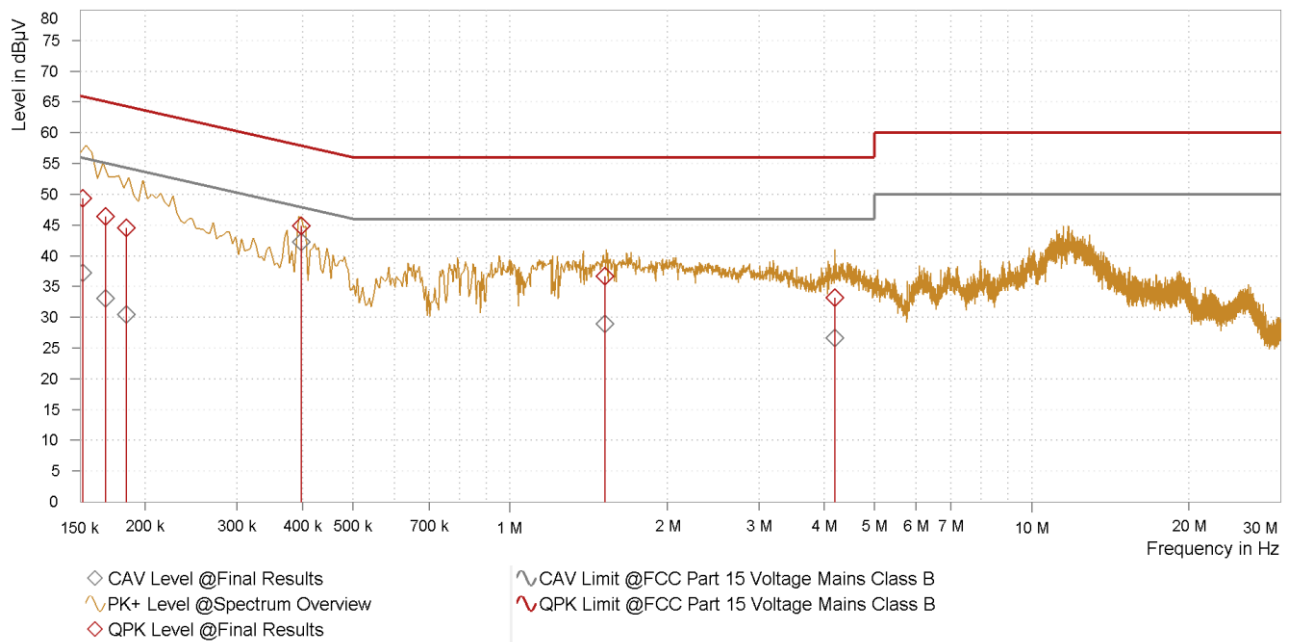

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.152	49.33	65.89	16.56	39.66	37.22	55.89	18.67	27.55	9.67	N
0.168	46.34	65.06	18.72	36.65	33.08	55.06	21.98	23.39	9.69	N
0.184	44.55	64.30	19.76	34.84	30.41	54.30	23.90	20.70	9.70	N
0.398	44.89	57.90	13.01	35.11	42.27	47.90	5.63	32.49	9.78	N
1.519	36.69	56.00	19.31	26.61	28.97	46.00	17.03	18.88	10.09	N
4.192	33.20	56.00	22.80	23.08	26.65	46.00	19.35	16.53	10.12	N

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT OmniAccess Stellar

Note Mode 3

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-27


Temp 15.3°C

Humi 49.3%

Polarity L

Test Site WJ-SR5

Spectrum Overview

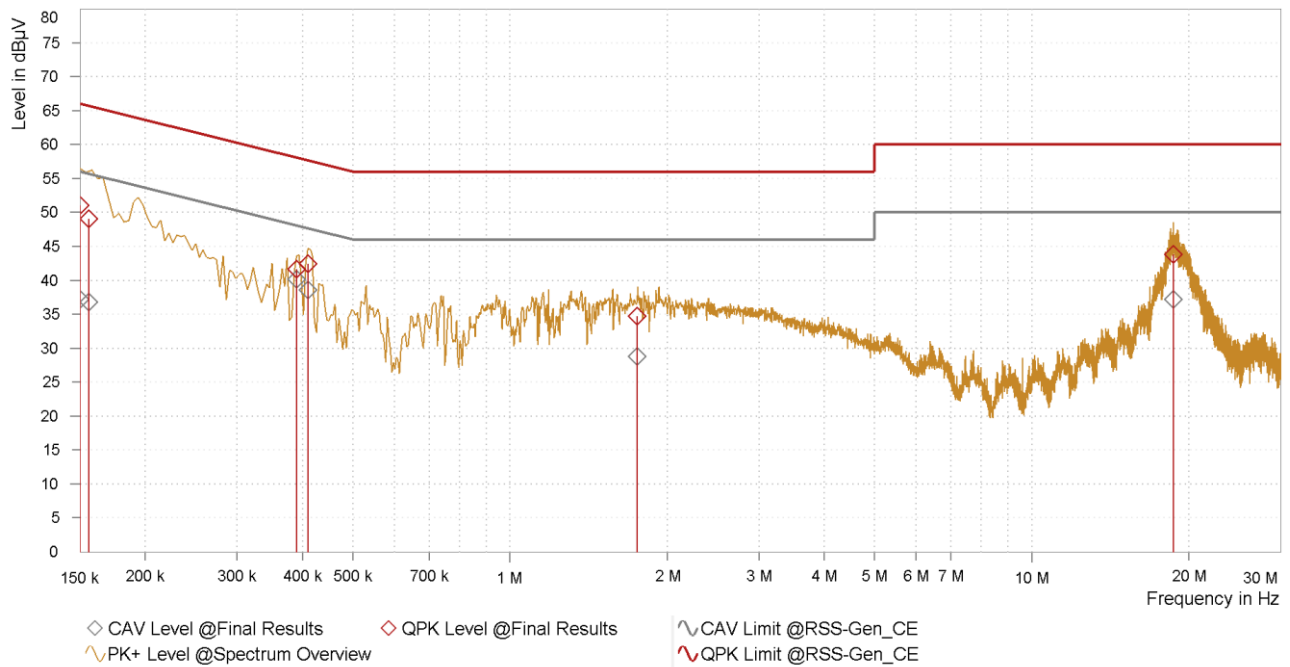

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.150	51.01	66.00	14.99	41.31	37.14	56.00	18.86	27.45	9.70	L1
0.156	49.09	65.67	16.59	39.38	36.82	55.67	18.85	27.12	9.70	L1
0.390	41.68	58.06	16.39	32.00	40.11	48.06	7.96	30.43	9.68	L1
0.410	42.38	57.65	15.27	32.70	38.58	47.65	9.07	28.91	9.68	L1
1.752	34.67	56.00	21.33	24.90	28.73	46.00	17.27	18.95	9.78	L1
18.695	43.78	60.00	16.22	33.69	37.18	50.00	12.82	27.09	10.09	L1

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT OmniAccess Stellar

Note Mode 3

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-27


Temp 15.3°C

Humi 49.3%

Polarity N

Test Site WJ-SR5

Spectrum Overview

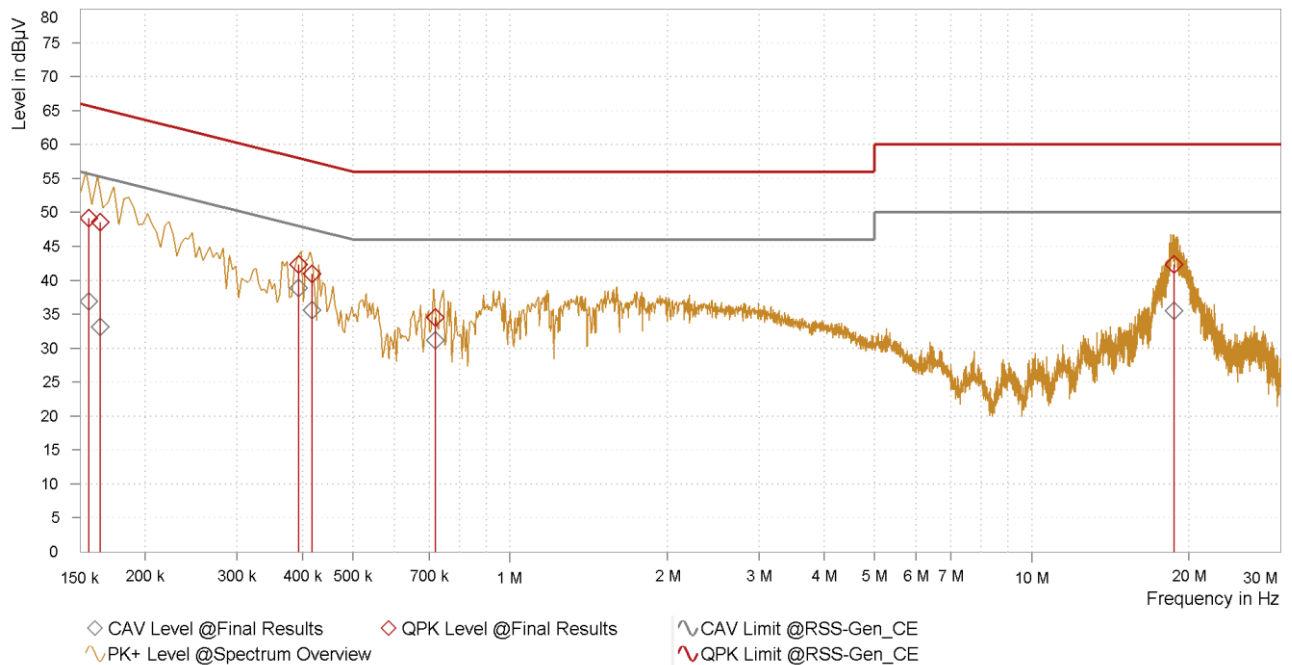

Final Results


Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.156	49.18	65.67	16.49	39.52	36.89	55.67	18.79	27.22	9.66	N
0.164	48.59	65.26	16.67	38.92	33.09	55.26	22.17	23.42	9.67	N
0.394	42.31	57.98	15.67	32.61	38.89	47.98	9.09	29.18	9.70	N
0.418	40.98	57.49	16.51	31.27	35.64	47.49	11.85	25.93	9.70	N
0.719	34.48	56.00	21.52	24.77	31.15	46.00	14.85	21.44	9.71	N
18.731	42.33	60.00	17.67	32.16	35.55	50.00	14.45	25.39	10.16	N

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT	OmniAccess Stellar
Note	Mode 4
Test Voltage	AC 120 V/60 Hz
Test Engineer	Carl Jiang
Test Date	2026-01-29
Temp	16.8°C
Humi	41.1%
Polarity	L
Test Site	WJ-SR5

Spectrum Overview

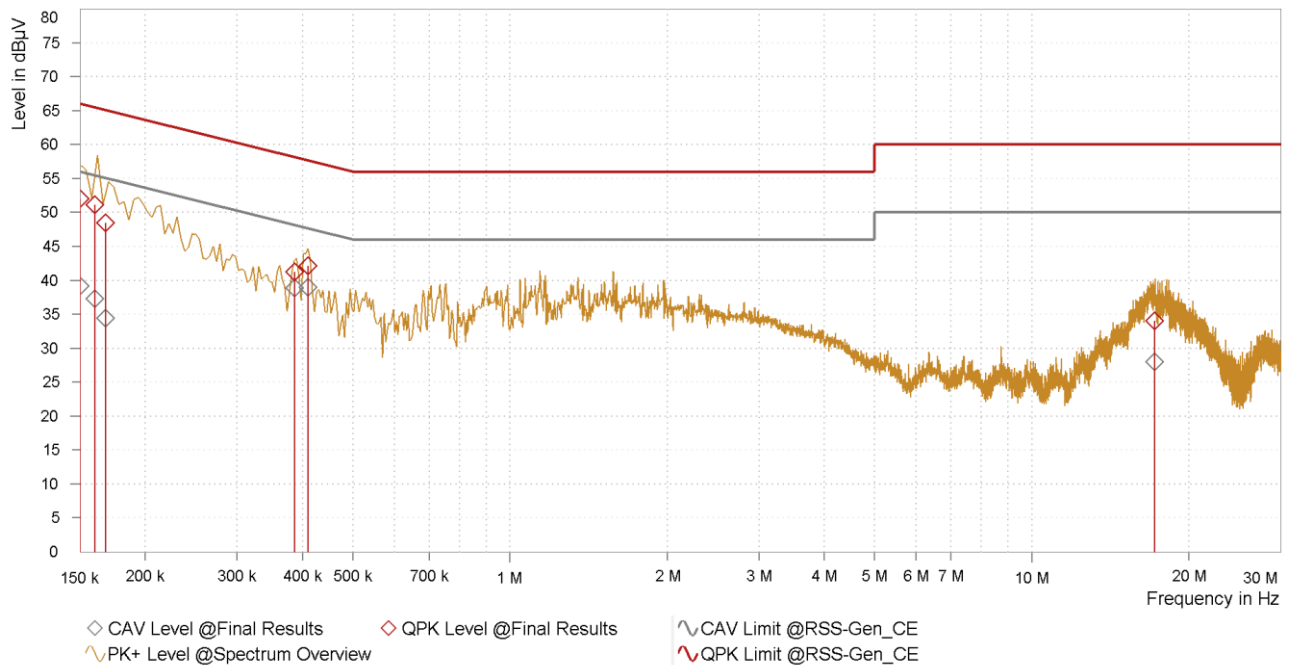

Final Results


Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.150	52.04	66.00	13.96	42.34	39.15	56.00	16.85	29.45	9.70	L1
0.160	51.11	65.46	14.36	41.40	37.26	55.46	18.20	27.56	9.70	L1
0.168	48.41	65.06	16.65	38.71	34.40	55.06	20.66	24.70	9.70	L1
0.386	41.21	58.15	16.94	31.53	38.88	48.15	9.27	29.20	9.68	L1
0.410	42.13	57.65	15.52	32.45	38.93	47.65	8.72	29.26	9.68	L1
17.202	33.99	60.00	26.01	23.92	28.01	50.00	21.99	17.94	10.07	L1

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT	OmniAccess Stellar
Note	Mode 4
Test Voltage	AC 120 V/60 Hz
Test Engineer	Carl Jiang
Test Date	2026-01-29
Temp	16.8°C
Humi	41.1%
Polarity	N
Test Site	WJ-SR5

Spectrum Overview

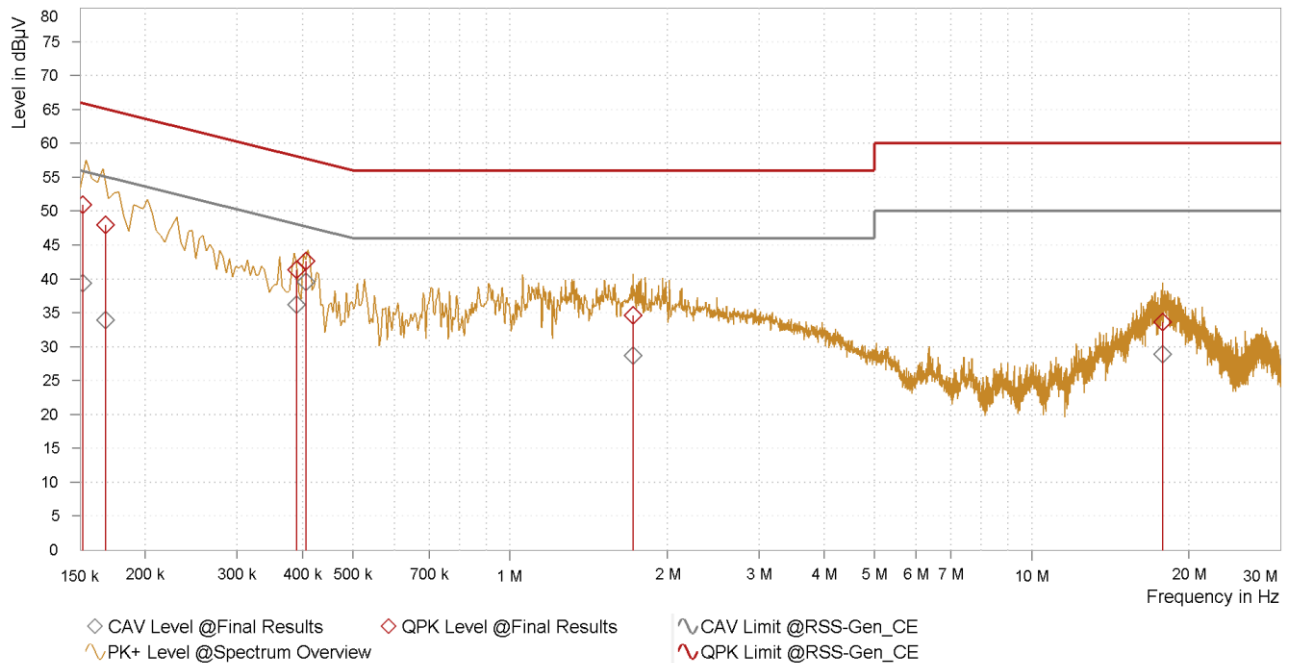

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.152	50.92	65.89	14.97	41.28	39.32	55.89	16.57	29.68	9.64	N
0.168	47.94	65.06	17.12	38.29	33.90	55.06	21.16	24.25	9.65	N
0.390	41.32	58.06	16.74	31.65	36.15	48.06	11.92	26.47	9.68	N
0.406	42.58	57.73	15.15	32.91	39.60	47.73	8.13	29.93	9.68	N
1.721	34.61	56.00	21.39	24.85	28.70	46.00	17.30	18.94	9.75	N
17.844	33.62	60.00	26.38	23.46	28.90	50.00	21.10	18.74	10.16	N

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT OmniAccess Stellar

Note Mode 5

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-27


Temp 15.3°C

Humi 49.3%

Polarity L

Test Site WJ-SR5

Spectrum Overview

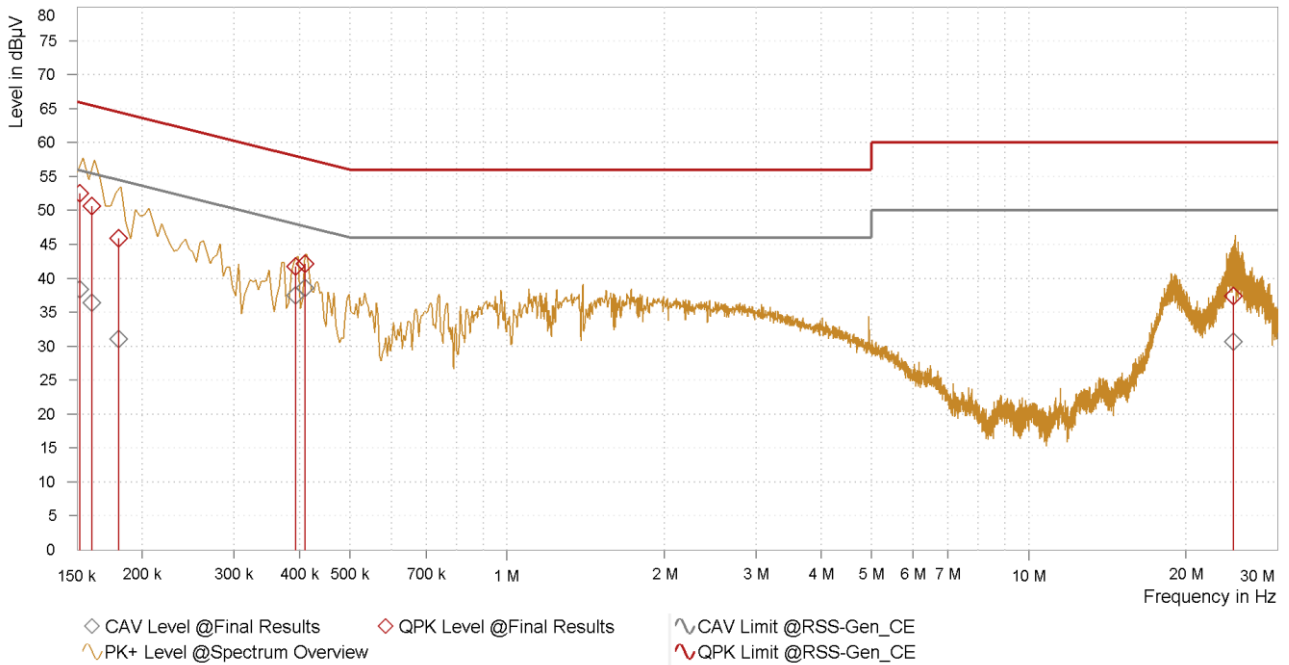

Final Results


Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.152	52.55	65.89	13.34	42.85	38.33	55.89	17.56	28.63	9.70	L1
0.160	50.61	65.46	14.85	40.91	36.37	55.46	19.09	26.67	9.70	L1
0.180	45.86	64.49	18.62	36.15	31.10	54.49	23.39	21.39	9.71	L1
0.394	41.71	57.98	16.27	32.03	37.47	47.98	10.51	27.79	9.68	L1
0.410	42.11	57.65	15.54	32.43	38.60	47.65	9.05	28.92	9.68	L1
24.685	37.39	60.00	22.61	27.14	30.70	50.00	19.30	20.45	10.24	L1

Notes

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT	OmniAccess Stellar
Note	Mode 5
Test Voltage	AC 120 V/60 Hz
Test Engineer	Carl Jiang
Test Date	2026-01-27
Temp	15.3°C
Humi	49.3%
Polarity	N
Test Site	WJ-SR5

Spectrum Overview

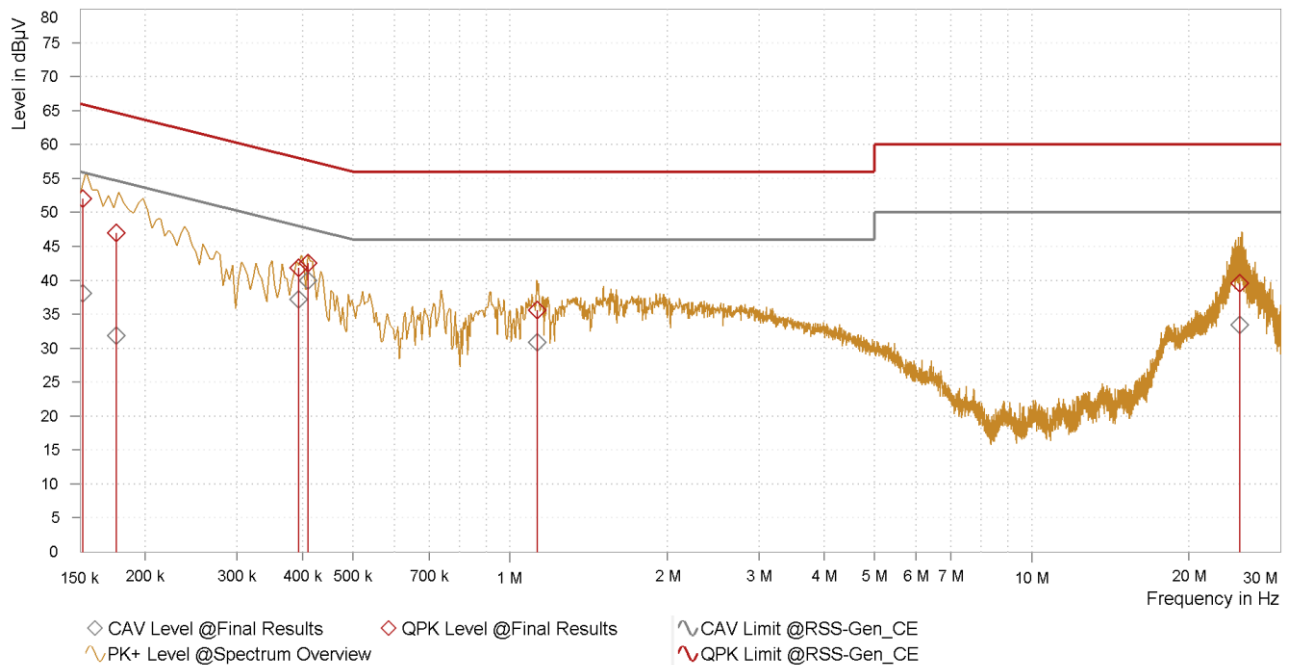

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.152	52.01	65.89	13.88	42.34	38.06	55.89	17.83	28.40	9.66	N
0.176	46.96	64.67	17.71	37.29	31.86	54.67	22.81	22.18	9.68	N
0.394	41.81	57.98	16.17	32.10	37.18	47.98	10.80	27.47	9.70	N
0.410	42.52	57.65	15.13	32.82	39.96	47.65	7.68	30.26	9.70	N
1.127	35.64	56.00	20.36	25.91	30.88	46.00	15.12	21.14	9.73	N
25.073	39.53	60.00	20.47	29.11	33.47	50.00	16.53	23.05	10.42	N

Notes

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT OmniAccess Stellar

Note Mode 6

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-27


Temp 15.3°C

Humi 49.3%

Polarity L

Test Site WJ-SR5

Spectrum Overview

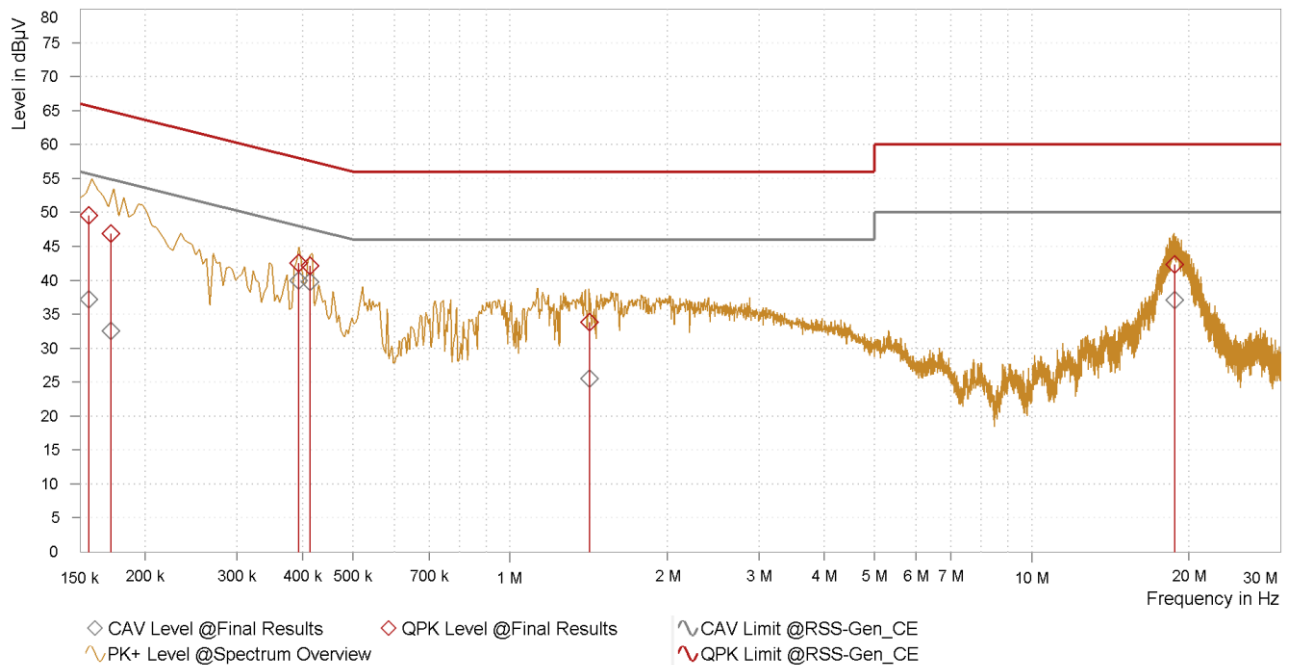

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.156	49.55	65.67	16.13	39.84	37.21	55.67	18.47	27.51	9.70	L1
0.172	46.87	64.86	17.99	37.17	32.55	54.86	22.31	22.84	9.71	L1
0.394	42.47	57.98	15.50	32.80	40.00	47.98	7.98	30.32	9.68	L1
0.414	42.16	57.57	15.41	32.49	39.76	47.57	7.81	30.08	9.68	L1
1.420	33.84	56.00	22.16	24.07	25.55	46.00	20.45	15.79	9.76	L1
18.807	42.31	60.00	17.69	32.22	37.09	50.00	12.91	27.00	10.09	L1

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT OmniAccess Stellar

Note Mode 6

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-27


Temp 15.3°C

Humi 49.3%

Polarity N

Test Site WJ-SR5

Spectrum Overview

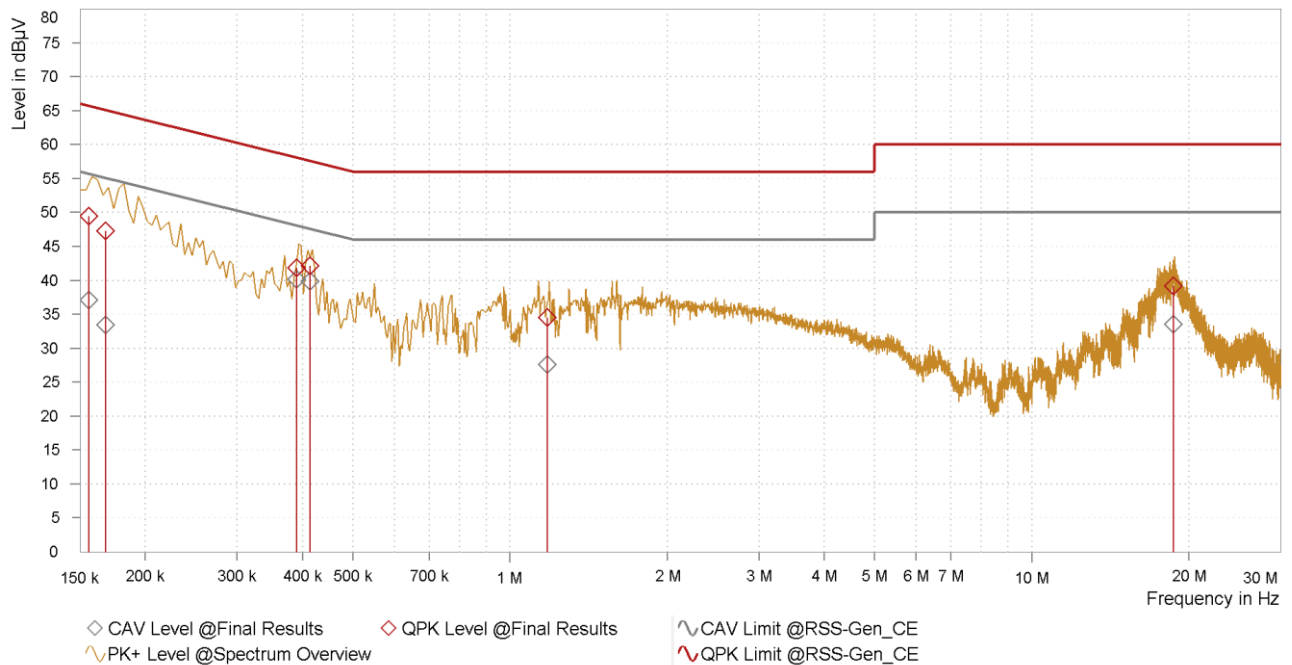

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.156	49.42	65.67	16.25	39.76	37.13	55.67	18.54	27.47	9.66	N
0.168	47.23	65.06	17.83	37.56	33.42	55.06	21.64	23.74	9.67	N
0.390	41.78	58.06	16.28	32.08	40.10	48.06	7.96	30.40	9.70	N
0.414	42.16	57.57	15.41	32.46	39.82	47.57	7.75	30.11	9.70	N
1.178	34.50	56.00	21.50	24.76	27.56	46.00	18.44	17.82	9.73	N
18.710	39.12	60.00	20.88	28.95	33.53	50.00	16.47	23.36	10.16	N

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT OmniAccess Stellar

Note Mode 7

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-27


Temp 15.3°C

Humi 49.3%

Polarity L

Test Site WJ-SR5

Spectrum Overview

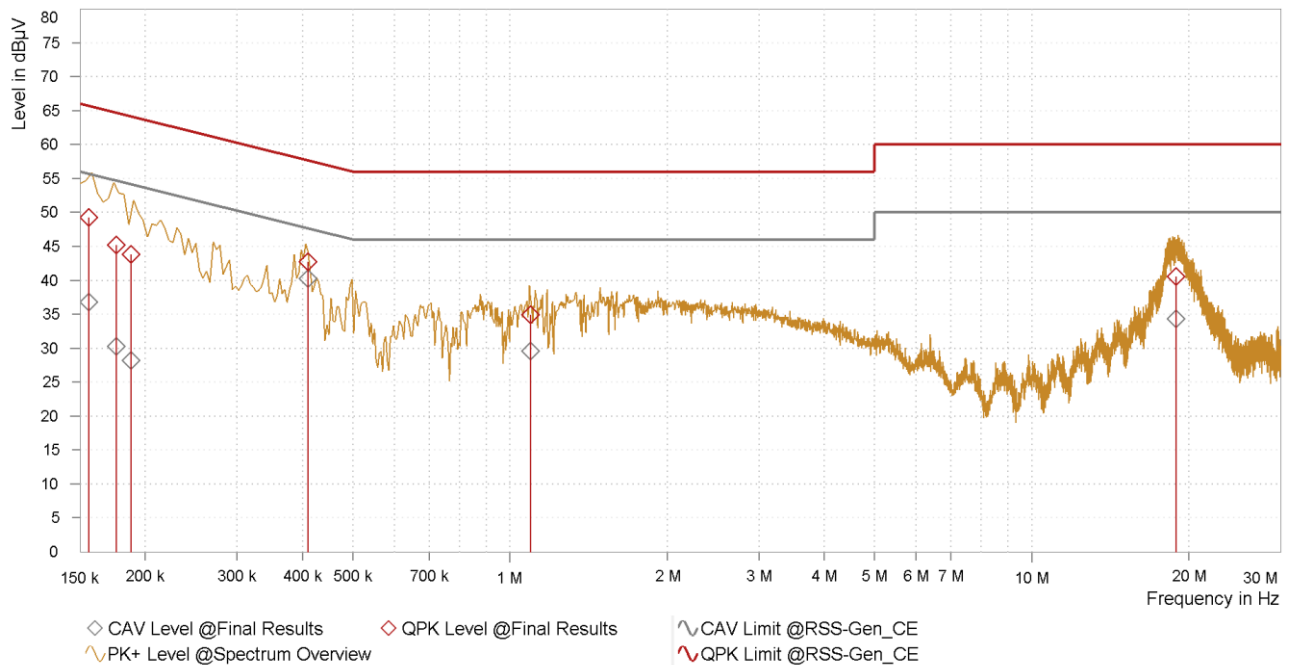

Final Results


Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.156	49.25	65.67	16.43	39.54	36.81	55.67	18.86	27.11	9.70	L1
0.176	45.17	64.67	19.51	35.46	30.22	54.67	24.45	20.52	9.71	L1
0.188	43.76	64.12	20.36	34.05	28.22	54.12	25.90	18.51	9.71	L1
0.410	42.71	57.65	14.94	33.03	40.29	47.65	7.36	30.61	9.68	L1
1.095	34.94	56.00	21.06	25.19	29.60	46.00	16.40	19.85	9.75	L1
18.919	40.53	60.00	19.47	30.43	34.35	50.00	15.65	24.25	10.09	L1

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT	OmniAccess Stellar
Note	Mode 7
Test Voltage	AC 120 V/60 Hz
Test Engineer	Carl Jiang
Test Date	2026-01-27
Temp	15.3°C
Humi	49.3%
Polarity	N
Test Site	WJ-SR5

Spectrum Overview

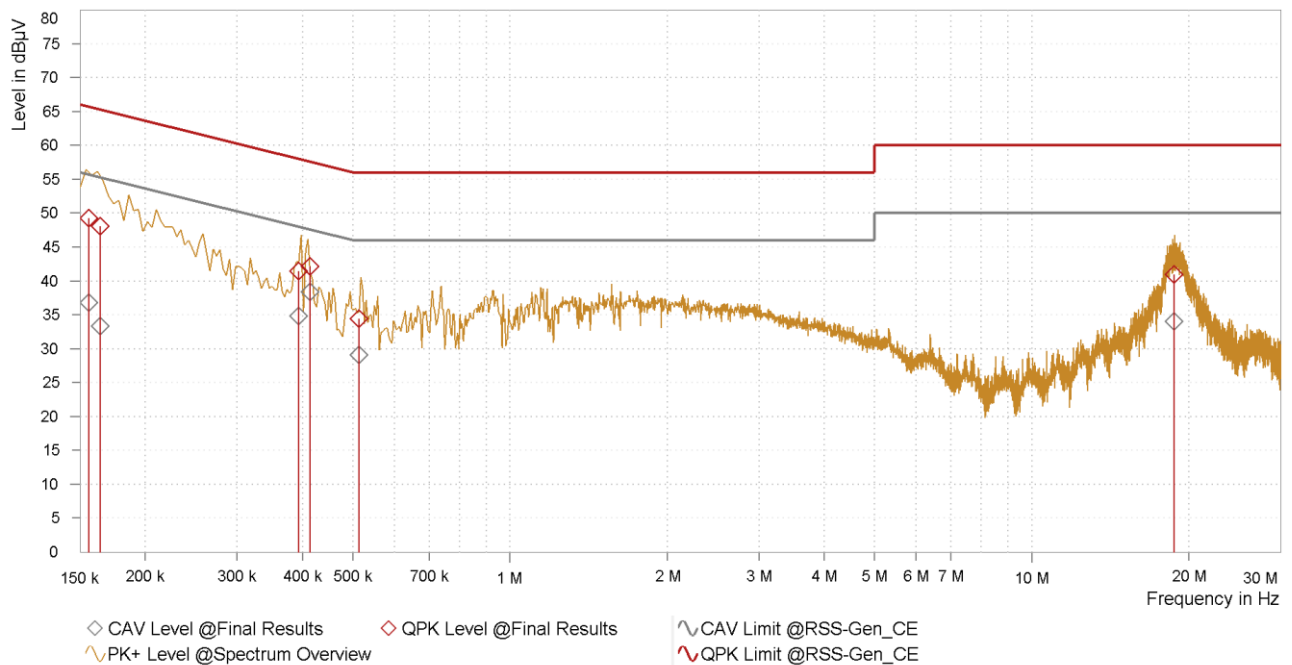

Final Results


Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.156	49.29	65.67	16.38	39.63	36.81	55.67	18.87	27.14	9.66	N
0.164	48.03	65.26	17.23	38.36	33.30	55.26	21.96	23.63	9.67	N
0.394	41.42	57.98	16.56	31.71	34.80	47.98	13.18	25.10	9.70	N
0.414	42.09	57.57	15.48	32.39	38.34	47.57	9.23	28.63	9.70	N
0.513	34.40	56.00	21.60	24.69	29.08	46.00	16.92	19.37	9.70	N
18.742	40.98	60.00	19.02	30.81	34.01	50.00	15.99	23.84	10.16	N

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT	OmniAccess Stellar
Note	Mode 8
Test Voltage	AC 120 V/60 Hz
Test Engineer	Carl Jiang
Test Date	2026-01-27
Temp	15.3°C
Humi	49.3%
Polarity	L
Test Site	WJ-SR5

Spectrum Overview

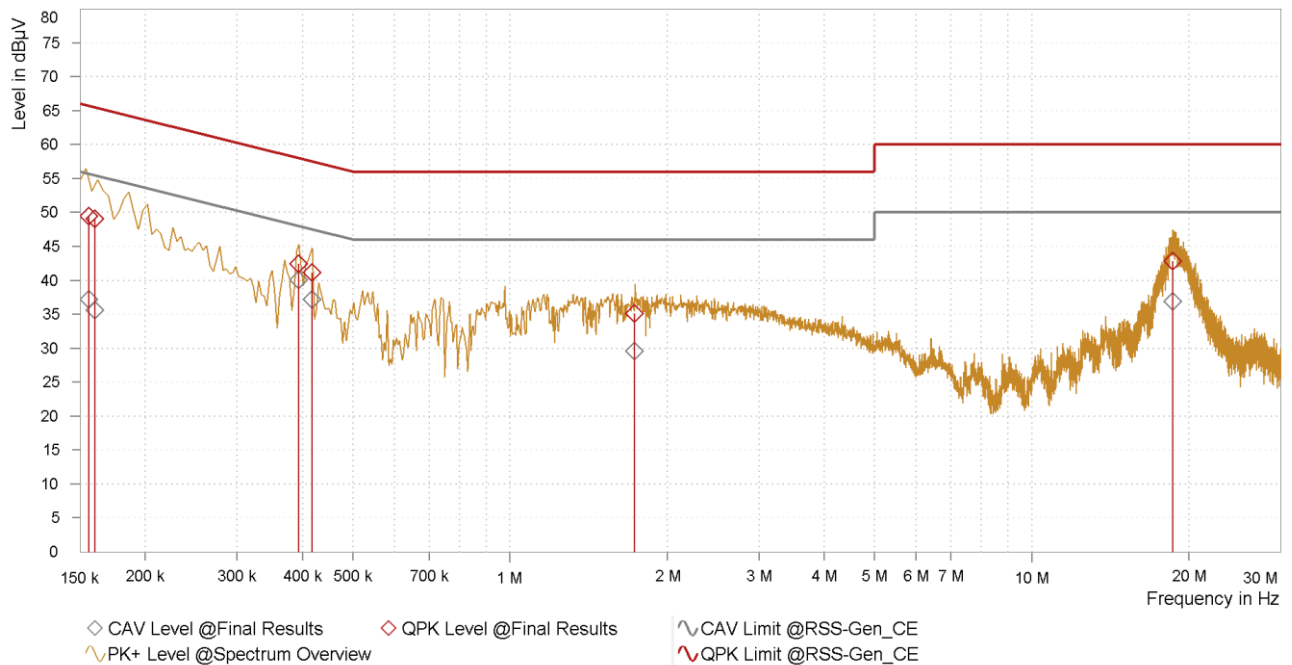

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.156	49.45	65.67	16.22	39.75	37.20	55.67	18.47	27.50	9.70	L1
0.160	49.04	65.46	16.43	39.34	35.63	55.46	19.83	25.93	9.70	L1
0.394	42.41	57.98	15.57	32.73	40.01	47.98	7.97	30.33	9.68	L1
0.418	41.16	57.49	16.33	31.49	37.17	47.49	10.31	27.50	9.68	L1
1.733	35.10	56.00	20.90	25.33	29.59	46.00	16.41	19.82	9.78	L1
18.640	42.77	60.00	17.23	32.68	36.93	50.00	13.07	26.84	10.09	L1

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

EUT OmniAccess Stellar

Note Mode 8

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-27


Temp 15.3°C

Humi 49.3%

Polarity N

Test Site WJ-SR5

Spectrum Overview

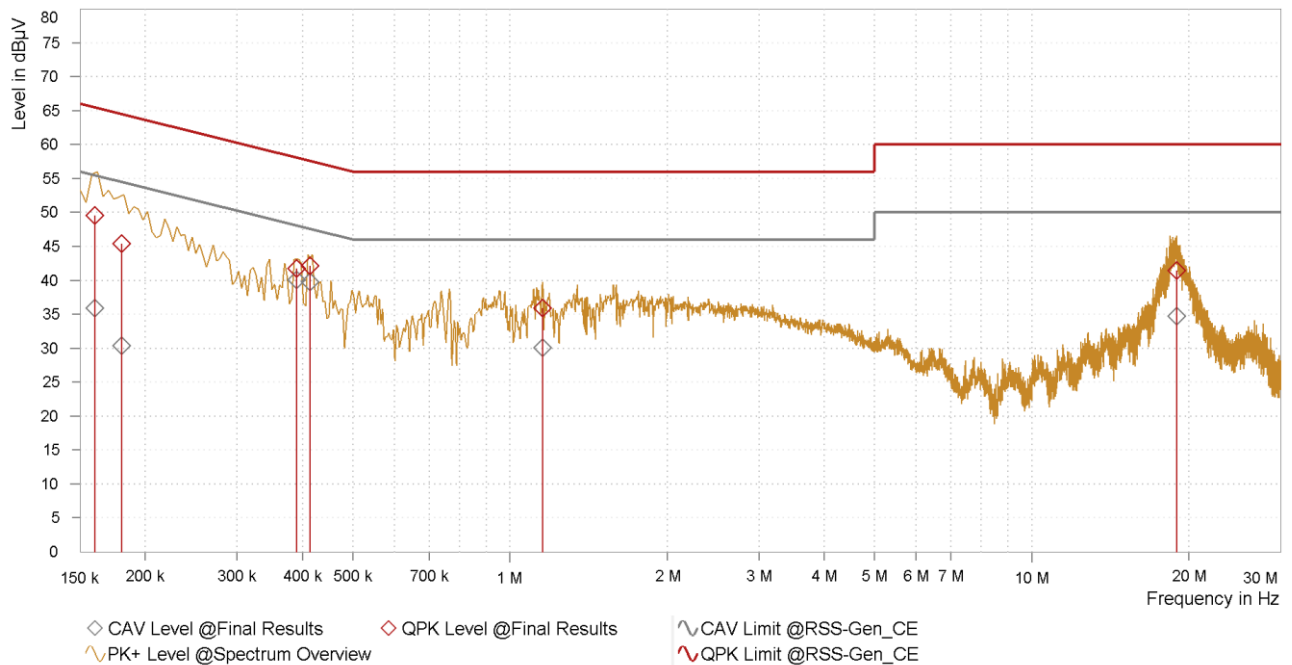

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.160	49.52	65.46	15.94	39.85	35.85	55.46	19.61	26.18	9.67	N
0.180	45.34	64.49	19.14	35.66	30.33	54.49	24.16	20.65	9.68	N
0.390	41.77	58.06	16.30	32.06	40.05	48.06	8.01	30.35	9.70	N
0.414	42.14	57.57	15.43	32.44	39.80	47.57	7.77	30.10	9.70	N
1.154	35.90	56.00	20.10	26.17	30.09	46.00	15.91	20.36	9.73	N
18.984	41.45	60.00	18.55	31.28	34.75	50.00	15.25	24.58	10.17	N

Notes

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

5.3. Radiated Emission

5.3.1. Test Limit

FCC Part 15.109 / RSS-Gen / ICES-003 Issue 7 - 3.2.2 Class B Limits			
Frequency (MHz)	Distance (m)	Level (dB μ V/m)	Detector Function
30 ~ 88	3	40	Quasi-peak
88 ~ 216	3	43.5	Quasi-peak
216 ~ 230	3	46	Quasi-peak
230 ~ 960	3	46 / 47 Note 3	Quasi-peak
960 ~ 1000	3	54	Quasi-peak
Above 1000	3	54	Average
		74	Peak


Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance (in meters) between the antenna of the measuring instrument and the closest point of any part of the device or system.


Note 3: Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

5.3.2. Test Setup

Below 1 GHz Test Setup:

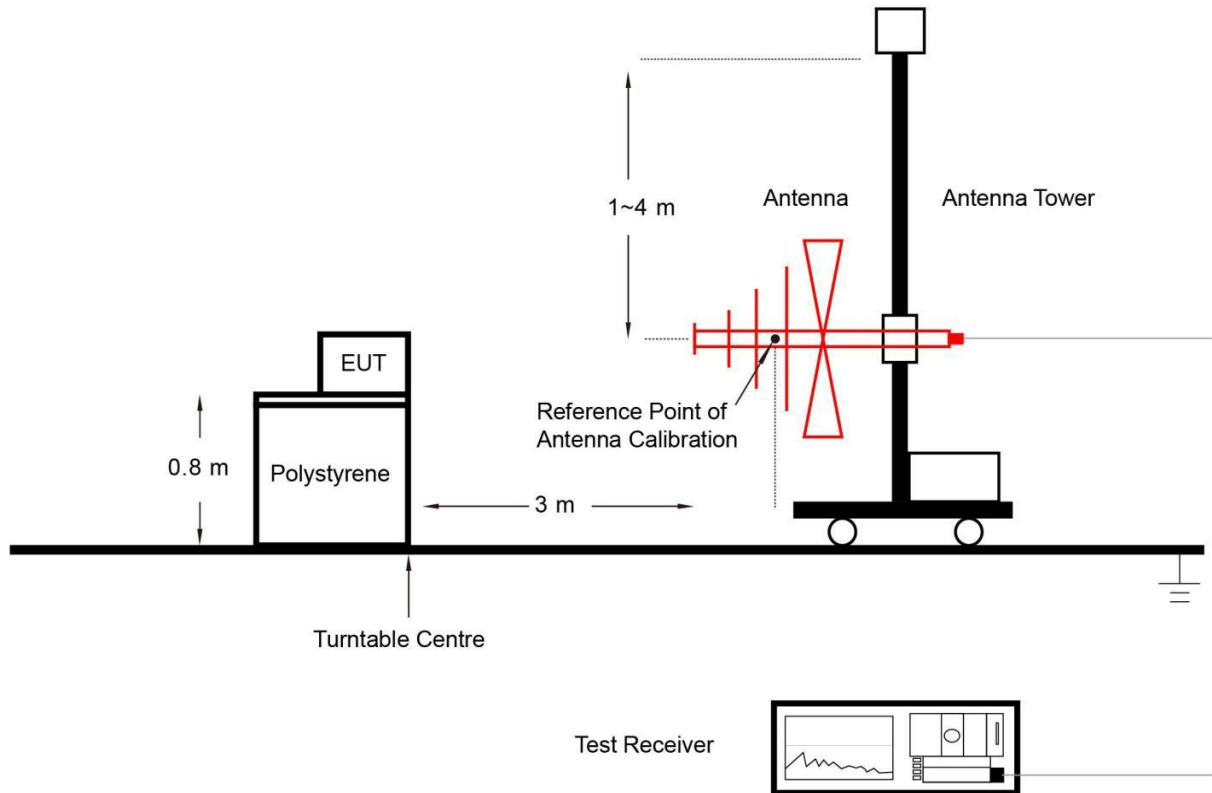


Above 1 GHz Test Setup:

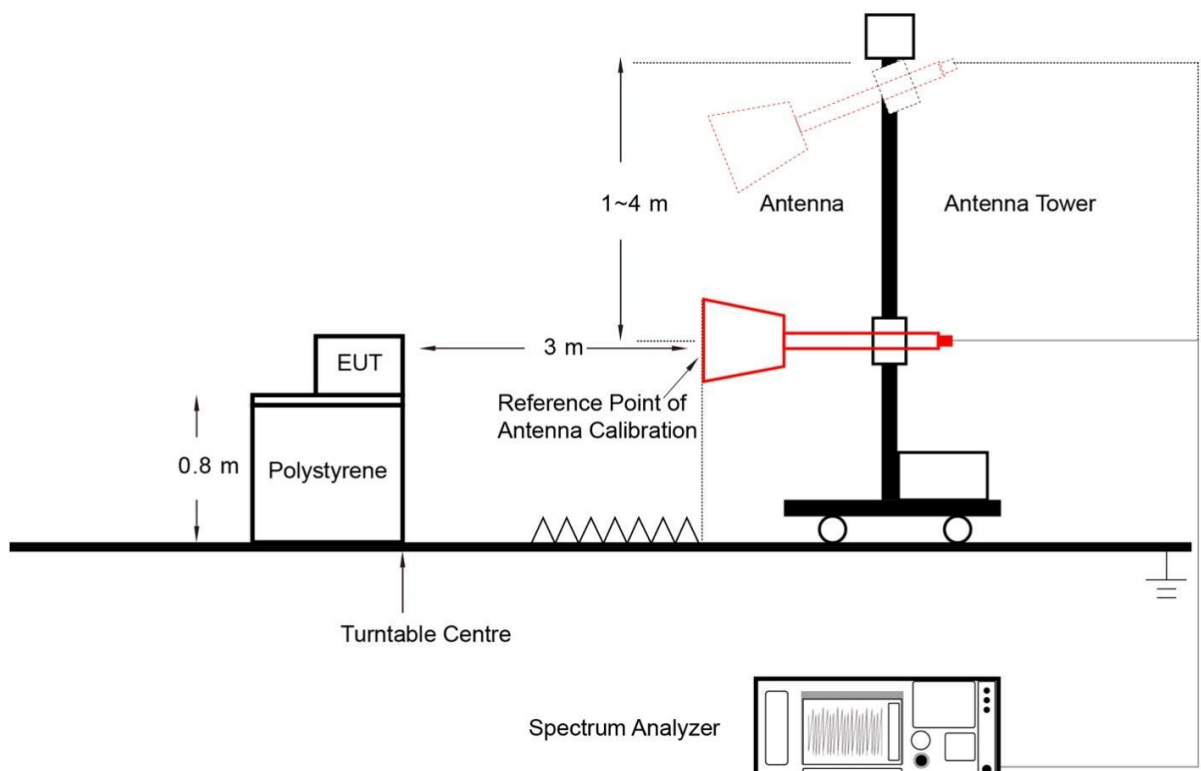

5.3.3. Test Result

Site	WJ-AC2	Test Date	2025-12-17
Temperature	25.7 °C	Humidity	25.3%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	By POE	Polarity	Horizontal
Test Mode	Mode 1		

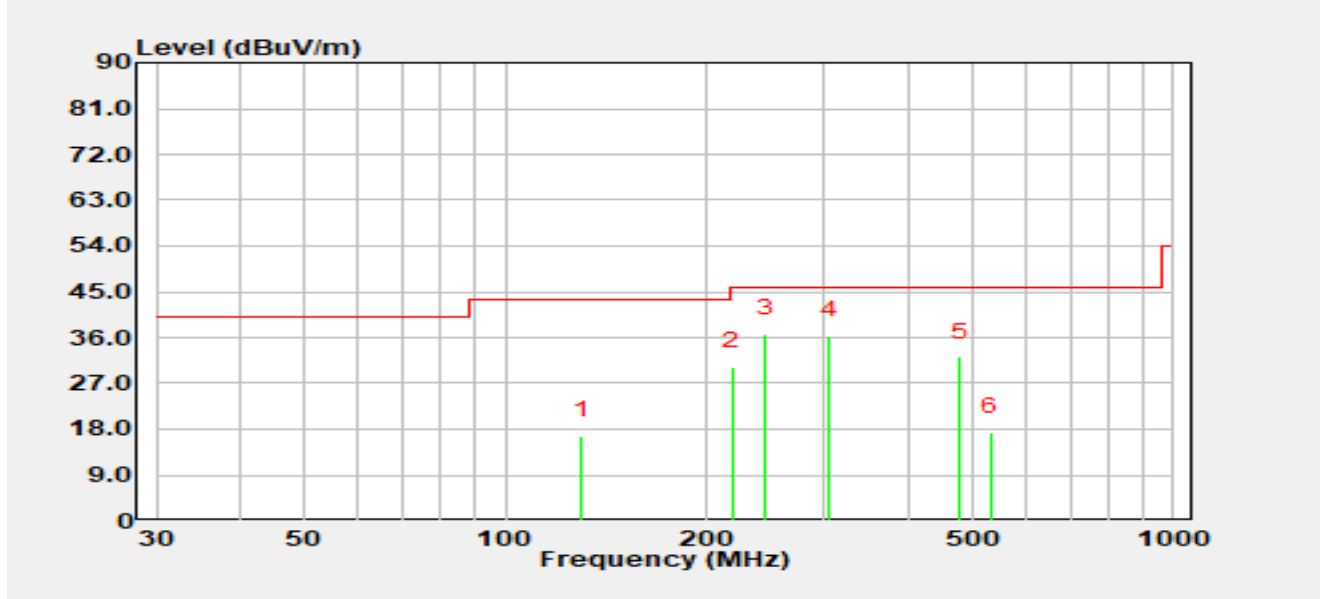


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		129.70	1.60	15.05	16.65	-26.85	43.50	QP
2		218.39	12.50	17.82	30.32	-15.68	46.00	QP
3	*	244.49	17.60	19.09	36.69	-9.31	46.00	QP
4		305.79	16.40	20.10	36.50	-9.50	46.00	QP
5		479.35	8.50	23.70	32.20	-13.80	46.00	QP
6		531.96	-7.20	24.65	17.45	-28.55	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC2	Test Date	2025-12-17
Temperature	25.7 °C	Humidity	25.3%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	By POE	Polarity	Vertical
Test Mode	Mode 1		

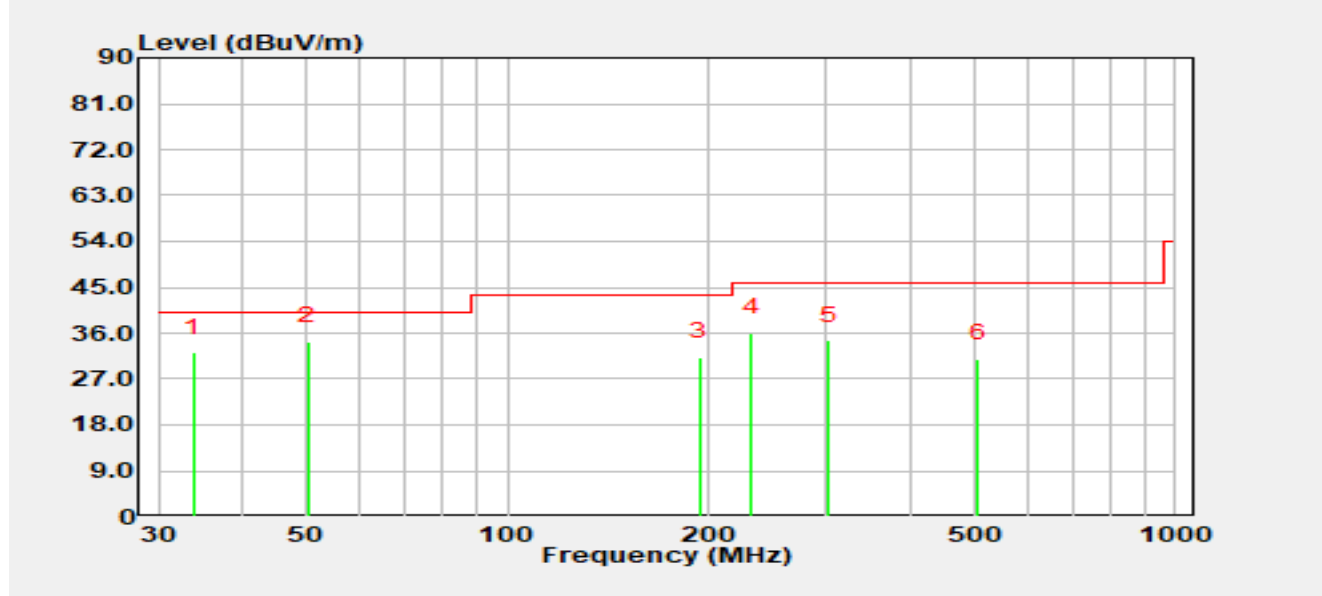


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		33.81	14.90	17.31	32.21	-7.79	40.00	QP
2	*	50.14	14.50	19.95	34.45	-5.55	40.00	QP
3		193.70	13.40	17.85	31.25	-12.25	43.50	QP
4		231.39	17.50	18.55	36.05	-9.95	46.00	QP
5		302.59	14.50	20.05	34.55	-11.45	46.00	QP
6		507.01	6.60	24.35	30.95	-15.05	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC2	Test Date	2026-04-14
Temperature	23.2 °C	Humidity	60.5%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 2		

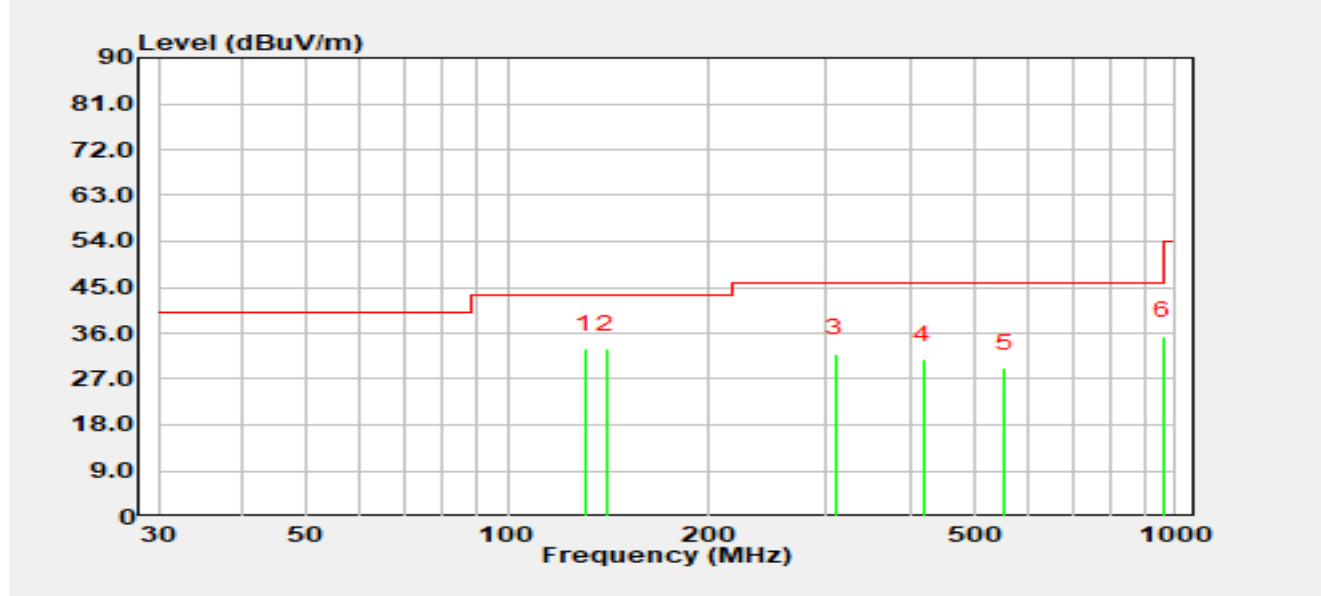


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	130.88	17.95	14.96	32.91	-10.59	43.50	QP
2		140.74	18.70	14.20	32.90	-10.60	43.50	QP
3		309.56	11.94	20.05	31.99	-14.01	46.00	QP
4		419.99	8.10	22.73	30.83	-15.17	46.00	QP
5		555.02	4.33	24.83	29.15	-16.85	46.00	QP
6		960.14	5.74	29.69	35.43	-18.57	54.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC2	Test Date	2026-04-14
Temperature	23.2 °C	Humidity	60.5%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 2		

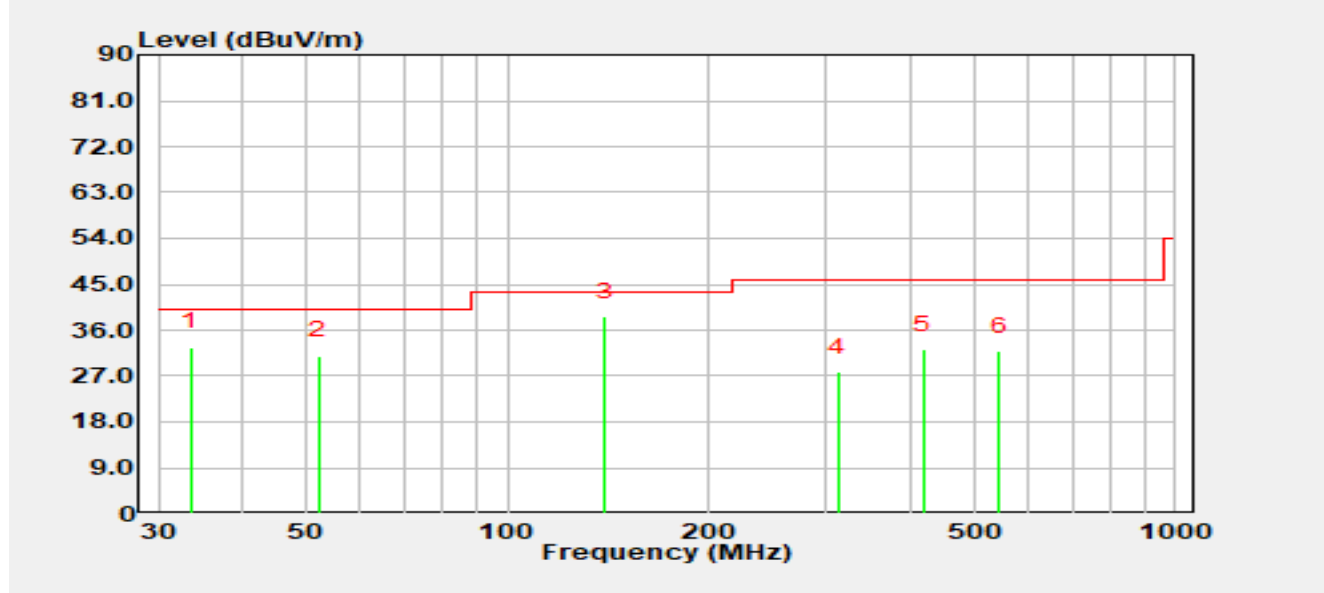


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		33.48	16.20	16.52	32.72	-7.28	40.00	QP
2		52.04	11.37	19.68	31.05	-8.95	40.00	QP
3	*	139.65	24.30	14.26	38.56	-4.94	43.50	QP
4		313.06	7.70	20.14	27.84	-18.16	46.00	QP
5		420.14	9.37	22.73	32.10	-13.90	46.00	QP
6		545.37	7.17	24.63	31.80	-14.20	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 3		

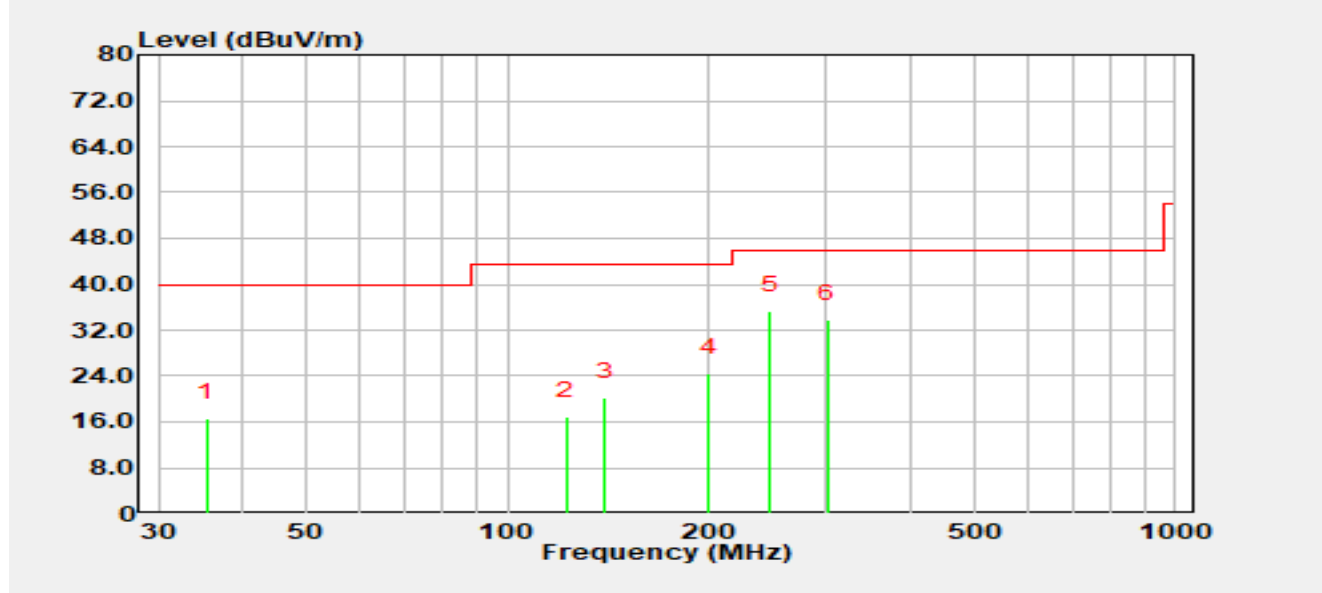


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		35.49	-0.70	17.44	16.74	-23.26	40.00	QP
2		122.23	1.00	16.04	17.04	-26.46	43.50	QP
3		139.70	5.40	14.86	20.26	-23.24	43.50	QP
4		199.99	6.20	18.34	24.54	-18.96	43.50	QP
5	*	247.25	15.50	19.89	35.39	-10.61	46.00	QP
6		301.42	13.20	20.67	33.87	-12.13	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 3		

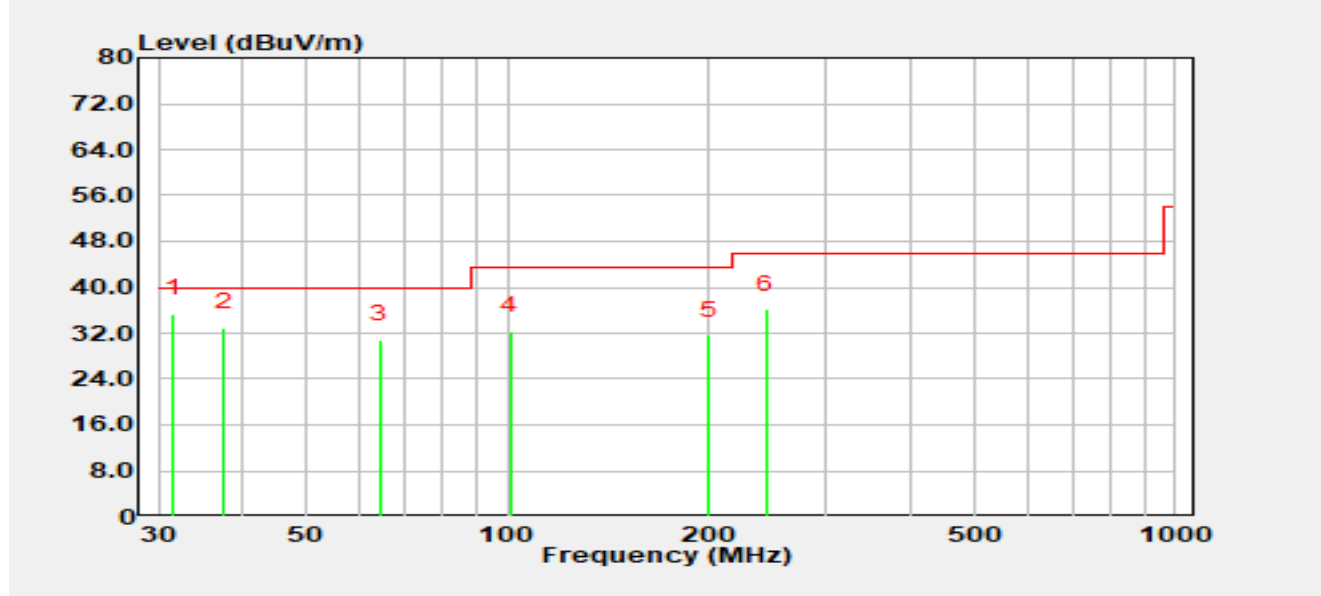


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	31.65	19.20	16.14	35.34	-4.66	40.00	QP
2		37.67	14.50	18.41	32.91	-7.09	40.00	QP
3		64.43	12.80	18.05	30.85	-9.15	40.00	QP
4		100.76	13.60	18.73	32.33	-11.17	43.50	QP
5		199.99	13.30	18.34	31.64	-11.86	43.50	QP
6		243.46	16.40	19.80	36.20	-9.80	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 4		

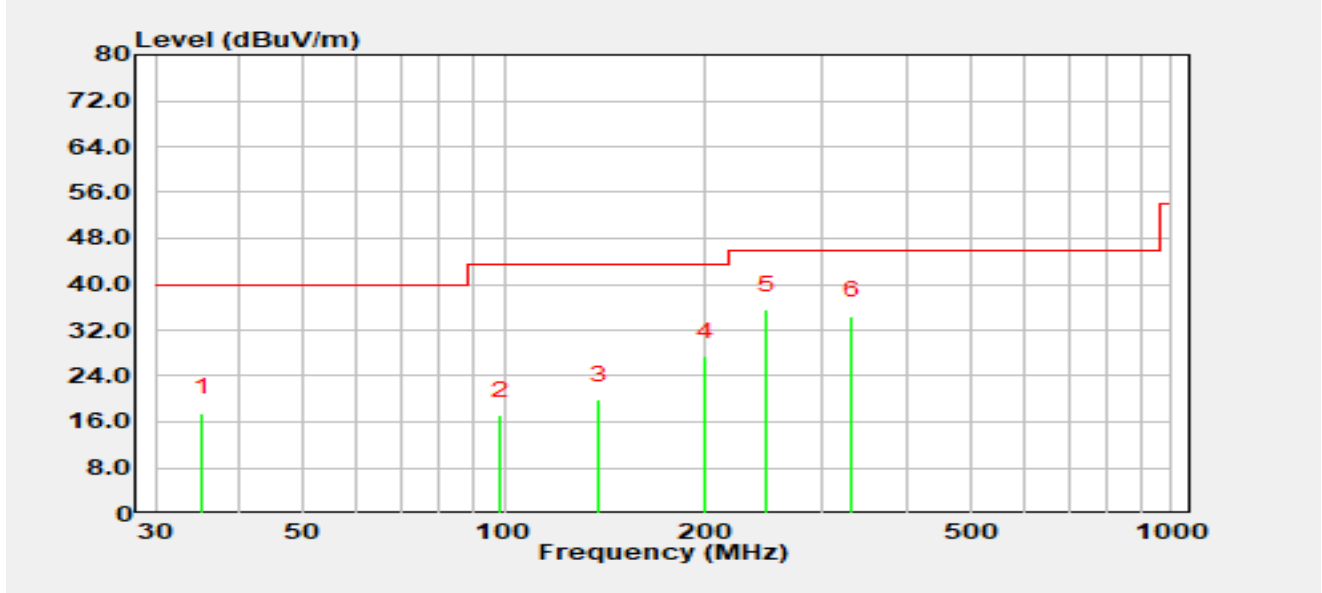


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		35.24	0.20	17.32	17.52	-22.48	40.00	QP
2		98.69	-1.40	18.57	17.17	-26.33	43.50	QP
3		138.73	4.90	14.91	19.81	-23.69	43.50	QP
4		200.06	9.00	18.33	27.33	-16.17	43.50	QP
5	*	247.77	15.70	19.89	35.59	-10.41	46.00	QP
6		331.35	12.70	21.72	34.42	-11.58	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 4		

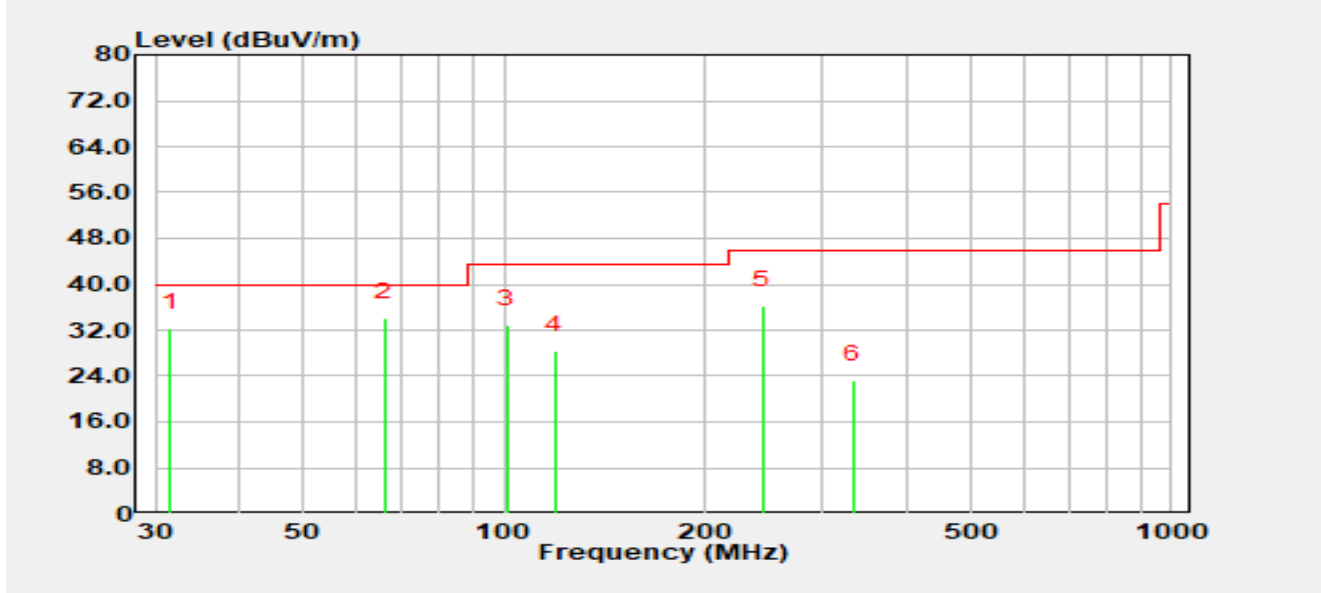


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		31.65	16.20	16.14	32.34	-7.66	40.00	QP
2	*	66.24	16.80	17.44	34.24	-5.76	40.00	QP
3		100.79	14.20	18.73	32.93	-10.57	43.50	QP
4		118.85	11.90	16.50	28.40	-15.10	43.50	QP
5		244.15	16.40	19.83	36.23	-9.77	46.00	QP
6		333.10	1.50	21.82	23.32	-22.68	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 5		

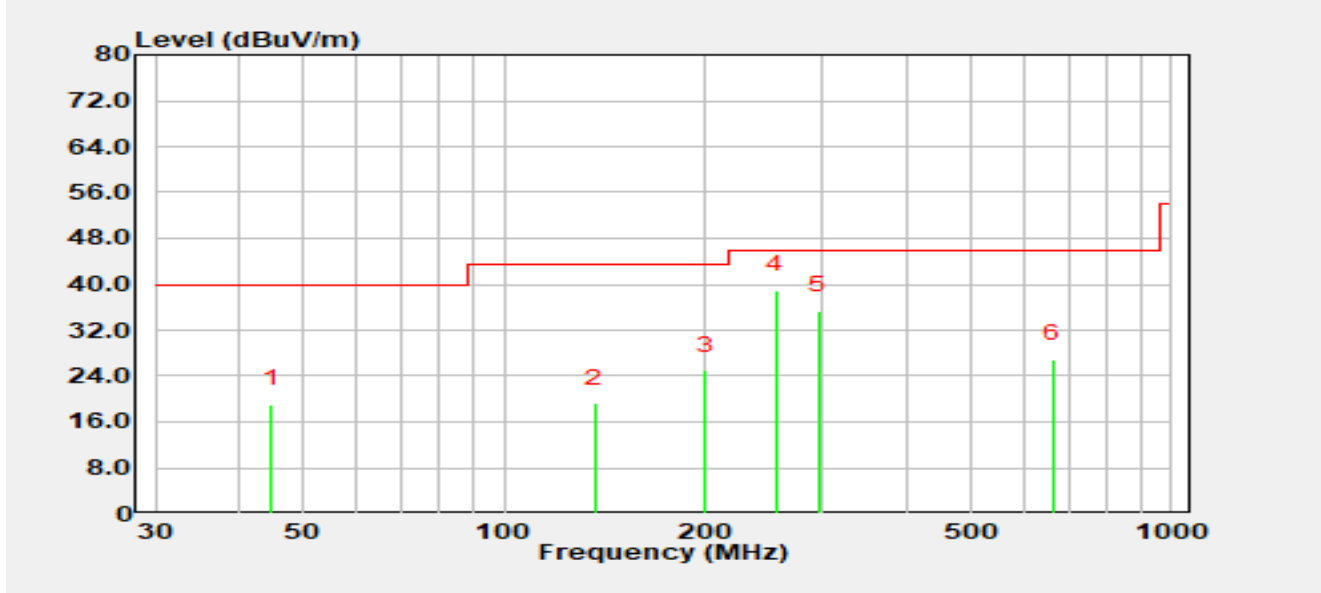


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		44.79	-1.20	20.29	19.09	-20.91	40.00	QP
2		136.46	4.20	14.99	19.19	-24.31	43.50	QP
3		199.99	6.70	18.34	25.04	-18.46	43.50	QP
4	*	254.82	19.00	20.05	39.05	-6.95	46.00	QP
5		295.35	14.80	20.56	35.36	-10.64	46.00	QP
6		664.87	-0.60	27.54	26.94	-19.06	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 5		

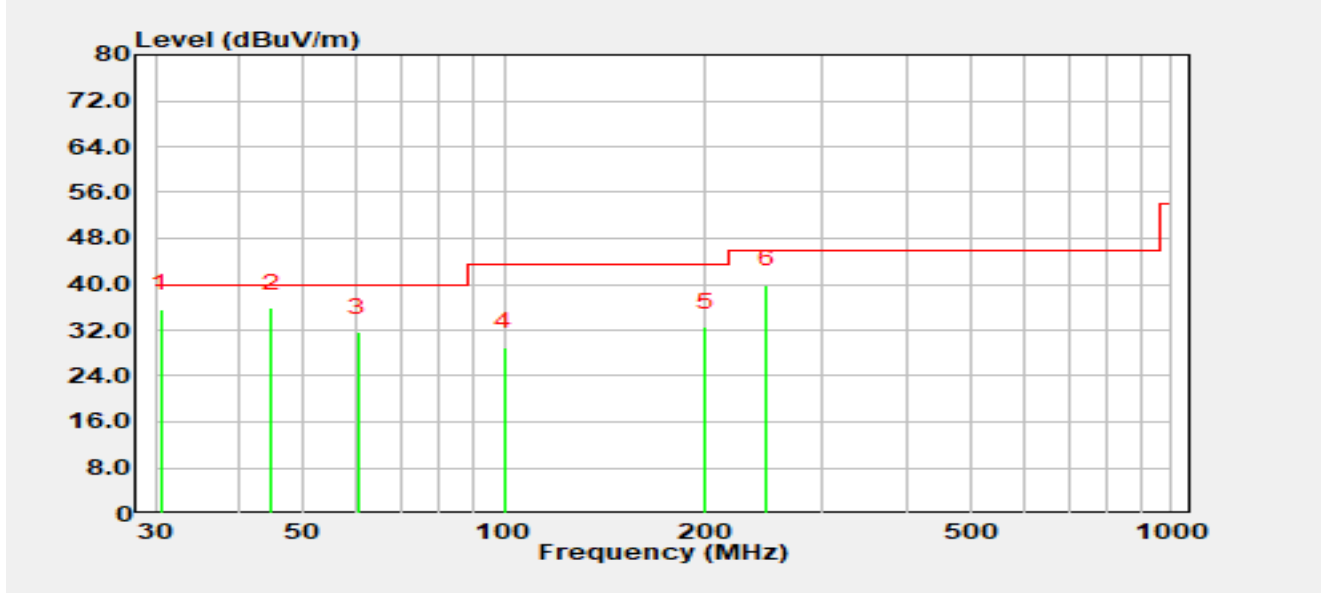


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		30.63	19.40	16.28	35.68	-4.32	40.00	QP
2	*	44.70	15.60	20.28	35.88	-4.12	40.00	QP
3		60.39	12.50	19.12	31.62	-8.38	40.00	QP
4		99.84	10.40	18.68	29.08	-14.42	43.50	QP
5		199.99	14.20	18.34	32.54	-10.96	43.50	QP
6		246.90	20.00	19.89	39.89	-6.11	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 6		

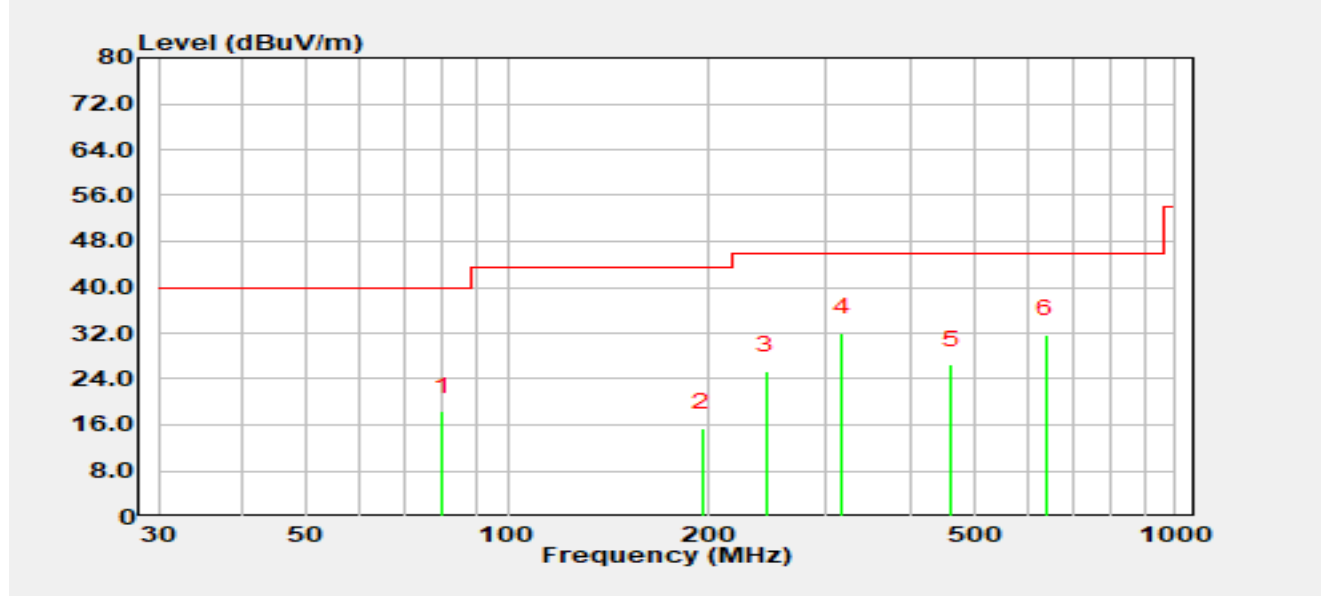


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		79.74	4.90	13.49	18.39	-21.61	40.00	QP
2		195.48	-3.40	18.92	15.52	-27.98	43.50	QP
3		243.55	5.60	19.81	25.41	-20.59	46.00	QP
4	*	316.37	11.00	21.07	32.07	-13.93	46.00	QP
5		460.73	2.30	24.16	26.46	-19.54	46.00	QP
6		640.84	4.30	27.44	31.74	-14.26	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 6		

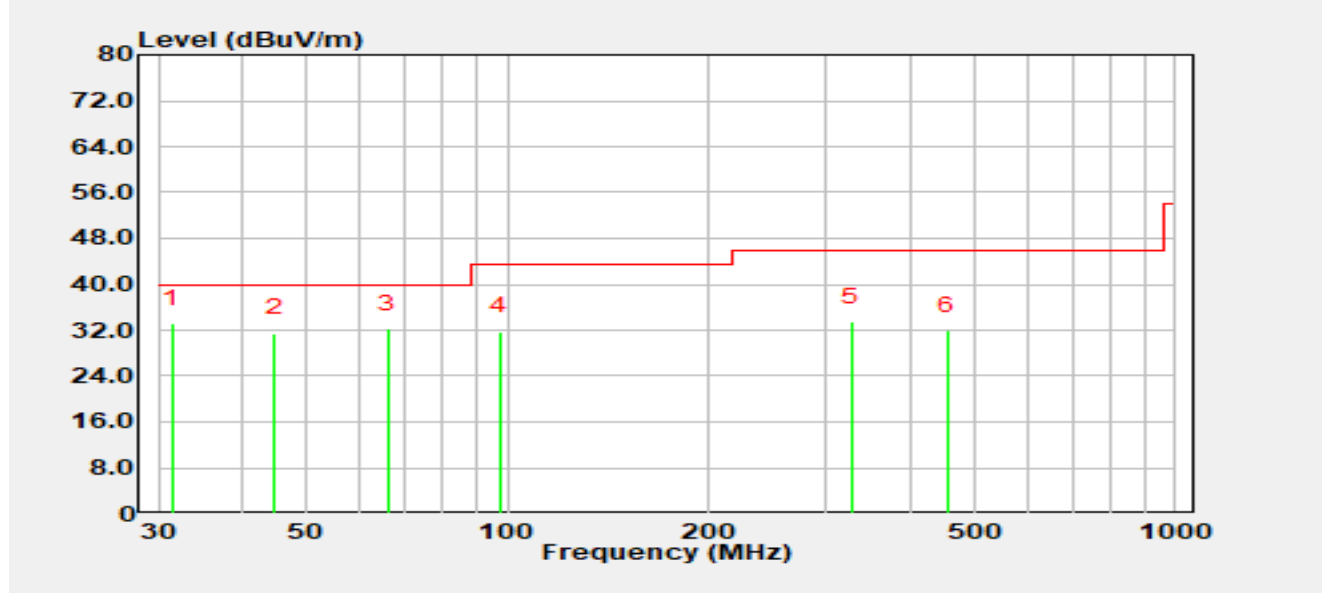


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	31.44	16.90	16.16	33.06	-6.94	40.00	QP
2		44.70	11.20	20.28	31.48	-8.52	40.00	QP
3		66.17	14.80	17.47	32.27	-7.73	40.00	QP
4		97.35	13.40	18.36	31.76	-11.74	43.50	QP
5		327.20	11.90	21.51	33.41	-12.59	46.00	QP
6		455.91	7.90	24.04	31.94	-14.06	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 7		

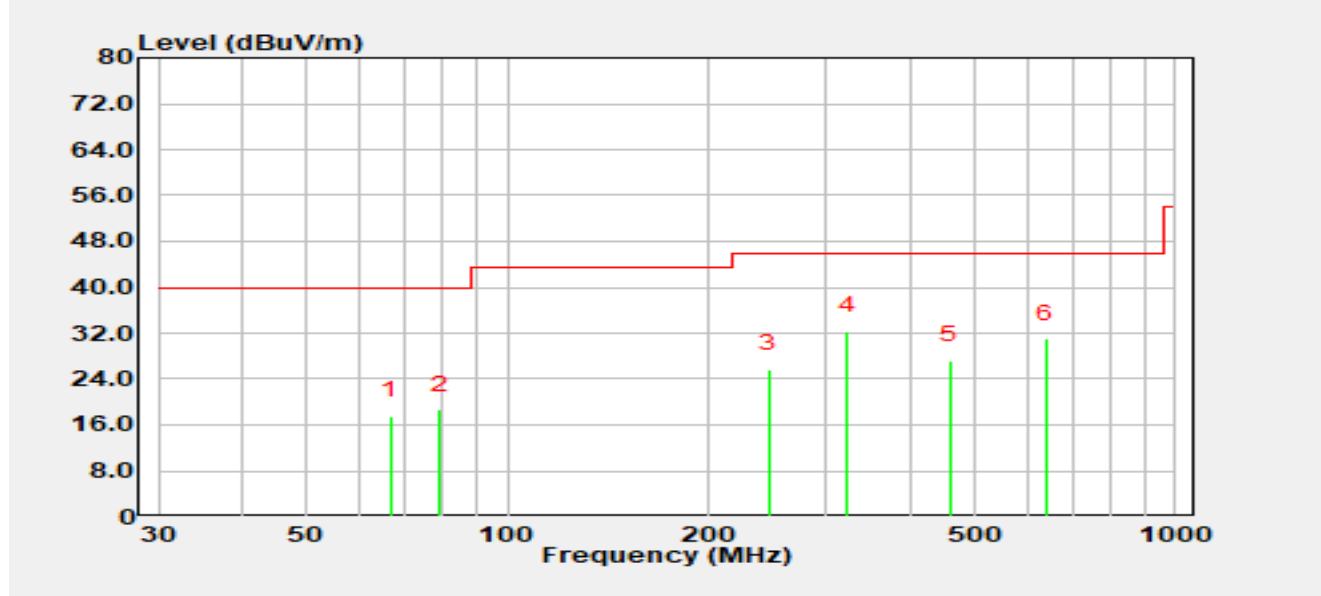


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		66.90	0.40	17.16	17.56	-22.44	40.00	QP
2		79.13	5.10	13.48	18.58	-21.42	40.00	QP
3		246.56	5.90	19.89	25.79	-20.21	46.00	QP
4	*	322.98	11.10	21.29	32.39	-13.61	46.00	QP
5		459.11	3.10	24.16	27.26	-18.74	46.00	QP
6		639.71	3.50	27.46	30.96	-15.04	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 7		

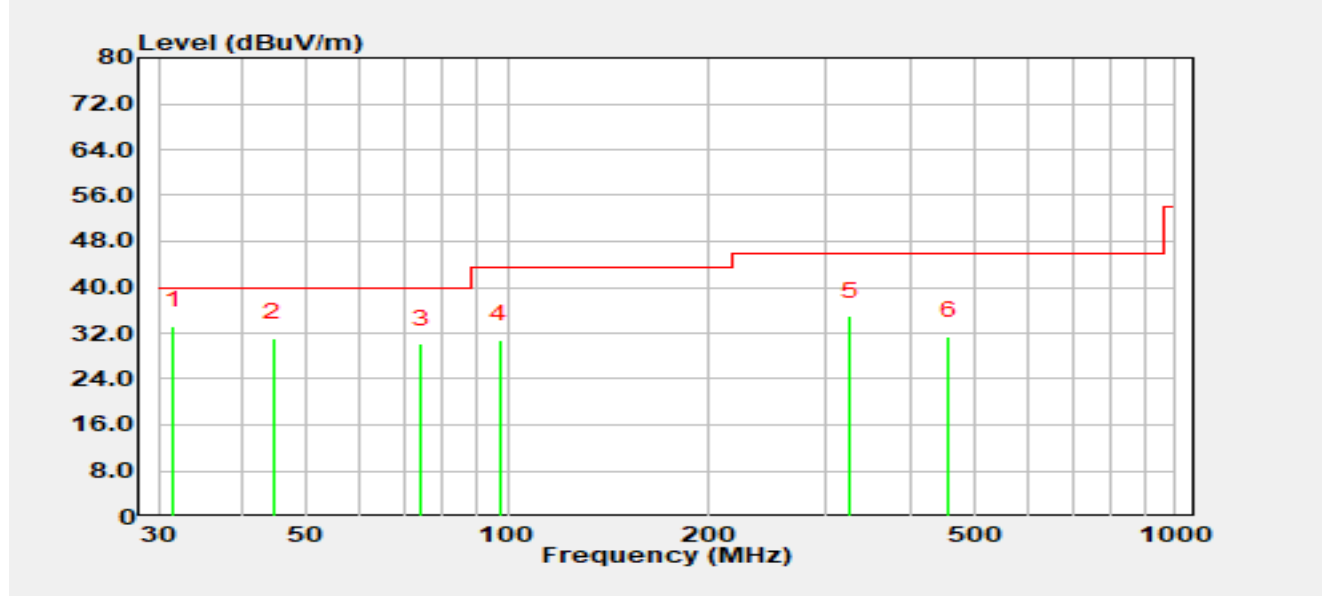


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	31.59	17.10	16.15	33.25	-6.75	40.00	QP
2		44.52	10.90	20.25	31.15	-8.85	40.00	QP
3		74.08	15.40	14.65	30.05	-9.95	40.00	QP
4		97.46	12.50	18.38	30.88	-12.62	43.50	QP
5		326.28	13.50	21.47	34.97	-11.03	46.00	QP
6		457.19	7.30	24.10	31.40	-14.60	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 8		

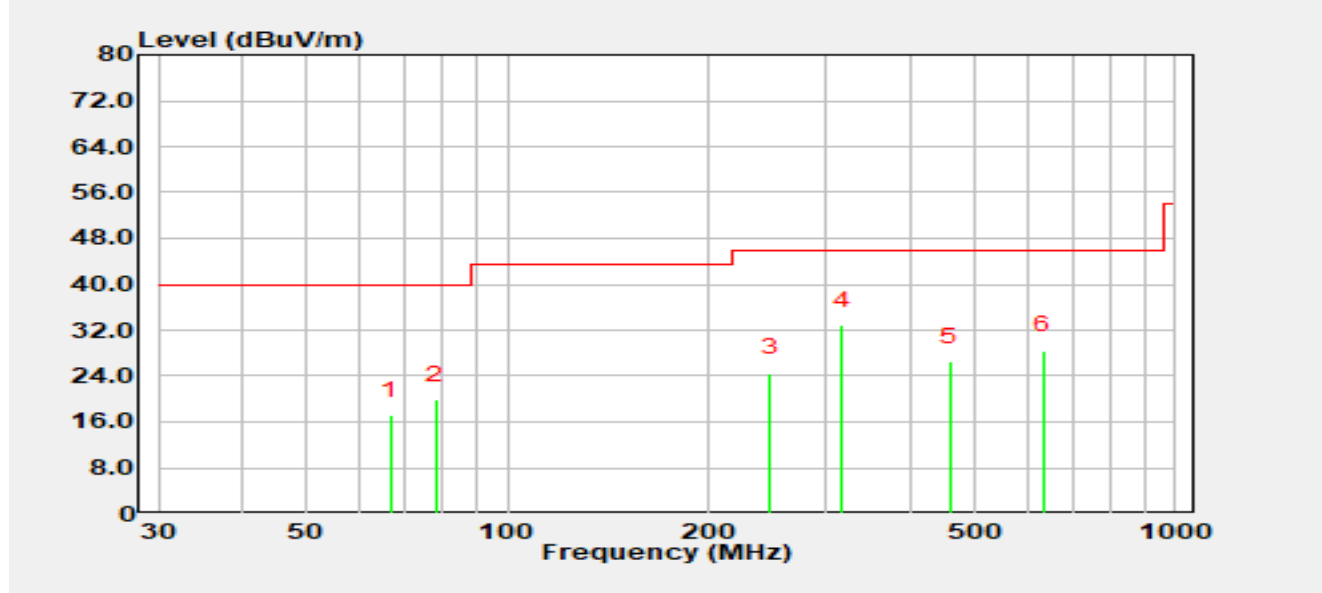


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		66.78	-0.10	17.21	17.11	-22.89	40.00	QP
2		78.19	6.30	13.55	19.85	-20.15	40.00	QP
3		246.73	4.70	19.89	24.59	-21.41	46.00	QP
4	*	317.14	11.70	21.10	32.80	-13.20	46.00	QP
5		459.76	2.30	24.17	26.47	-19.53	46.00	QP
6		632.58	0.80	27.71	28.51	-17.49	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC1	Test Date	2026-02-05
Temperature	17.2 °C	Humidity	37.2%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 8		

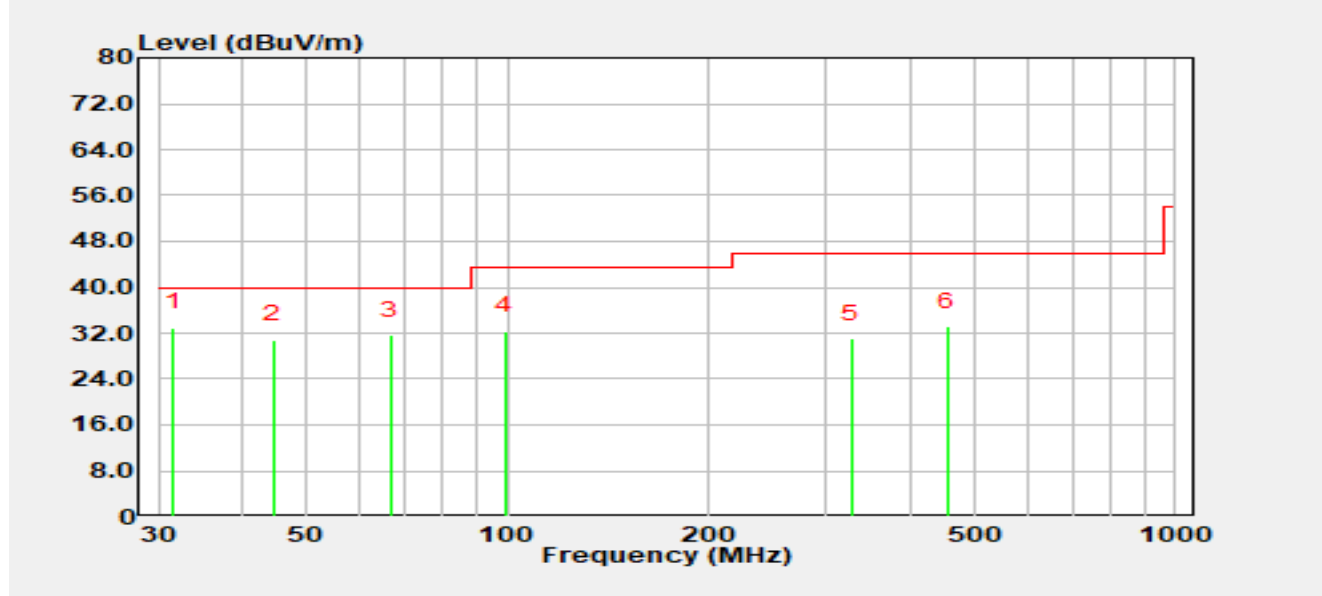


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	31.59	16.80	16.15	32.95	-7.05	40.00	QP
2		44.59	10.60	20.26	30.86	-9.14	40.00	QP
3		66.69	14.40	17.25	31.65	-8.35	40.00	QP
4		99.21	13.80	18.63	32.43	-11.07	43.50	QP
5		327.66	9.50	21.52	31.02	-14.98	46.00	QP
6		456.23	9.10	24.05	33.15	-12.85	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Within the frequency range of 230 MHz to 960 MHz, the limit specified in FCC Part 15.109 is more stringent than that in ICES-003 Issue 7; therefore, only the FCC Part 15.109 limit is presented in the test data.

Site	WJ-AC2	Test Date	2025-12-17
Temperature	25.7 °C	Humidity	25.3%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	By POE	Polarity	Horizontal
Test Mode	Mode 1		

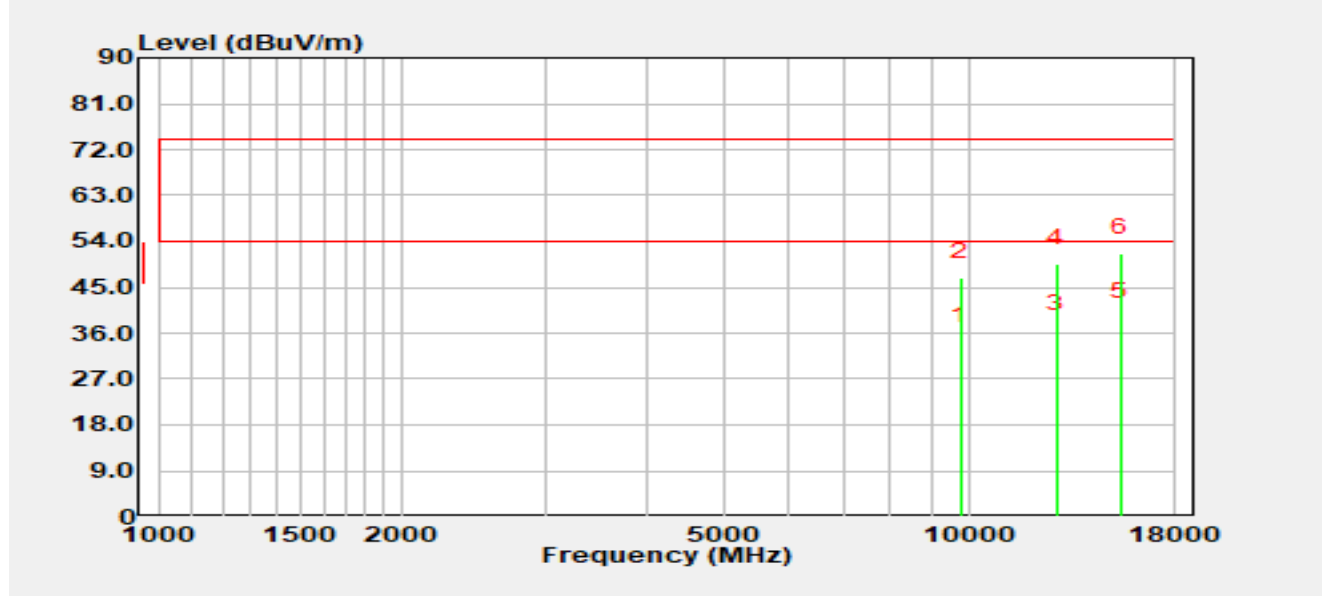


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		9775.40	27.99	6.47	34.46	-19.54	54.00	Average
2		9775.40	40.51	6.47	46.98	-27.02	74.00	Peak
3		12821.80	31.44	5.45	36.89	-17.11	54.00	Average
4		12821.80	44.28	5.45	49.73	-24.27	74.00	Peak
5	*	15376.90	32.68	6.53	39.21	-14.79	54.00	Average
6		15376.90	45.26	6.53	51.78	-22.22	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-17
Temperature	25.7 °C	Humidity	25.3%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	By POE	Polarity	Vertical
Test Mode	Mode 1		

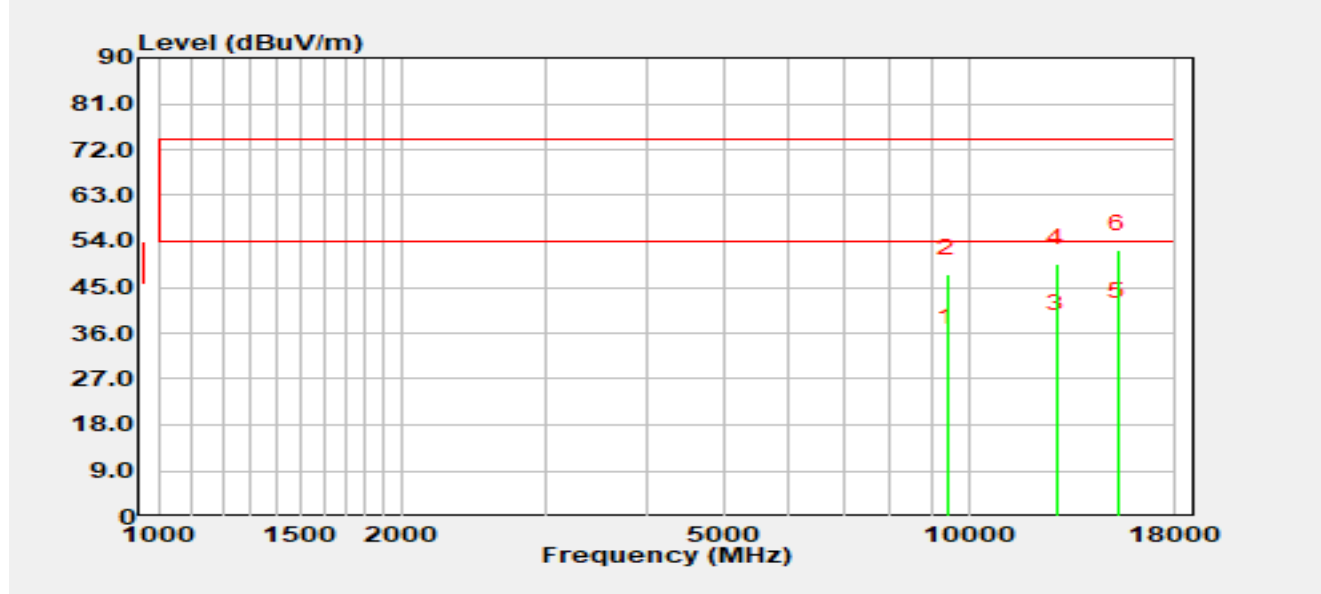


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		9411.60	27.47	6.53	34.00	-20.00	54.00	Average
2		9411.60	41.13	6.53	47.66	-26.34	74.00	Peak
3		12849.00	31.52	5.50	37.02	-16.98	54.00	Average
4		12849.00	44.14	5.50	49.63	-24.37	74.00	Peak
5	*	15286.80	32.74	6.52	39.26	-14.74	54.00	Average
6		15286.80	45.92	6.52	52.45	-21.55	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-04-14
Temperature	19.7 °C	Humidity	27.9%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 2		

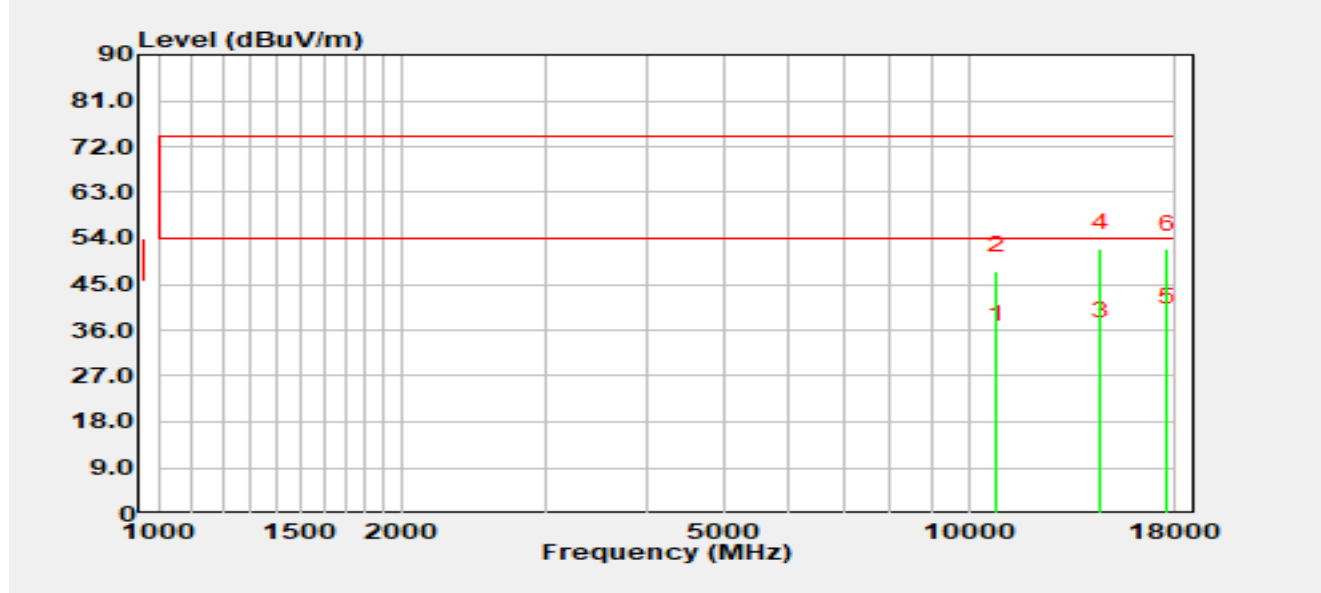


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		10822.60	28.66	5.49	34.15	-19.85	54.00	Average
2		10822.60	42.20	5.49	47.70	-26.30	74.00	Peak
3		14549.00	28.96	5.99	34.95	-19.05	54.00	Average
4		14549.00	46.07	5.99	52.05	-21.95	74.00	Peak
5	*	17602.20	33.64	3.93	37.57	-16.43	54.00	Average
6		17602.20	47.89	3.93	51.82	-22.18	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-04-14
Temperature	19.7 °C	Humidity	27.9%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 2		

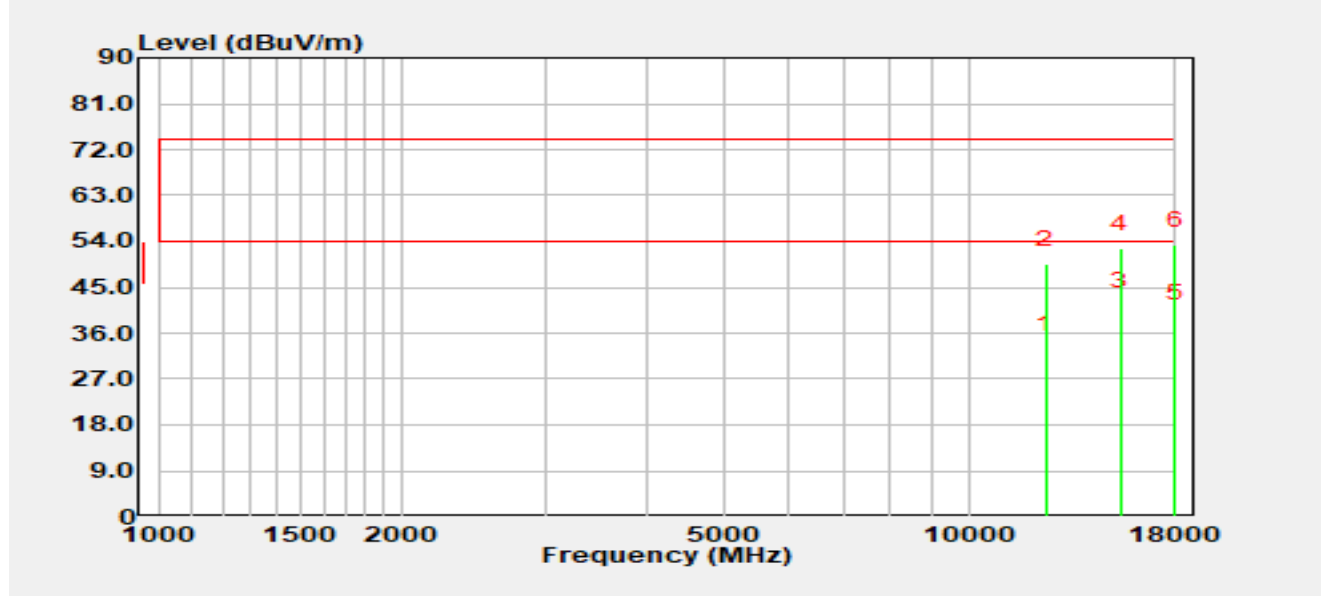


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		12451.20	27.79	5.06	32.86	-21.14	54.00	Average
2		12451.20	44.52	5.06	49.58	-24.42	74.00	Peak
3	*	15390.50	34.66	6.56	41.21	-12.79	54.00	Average
4		15390.50	46.03	6.56	52.58	-21.42	74.00	Peak
5		17962.60	33.84	5.04	38.88	-15.12	54.00	Average
6		17962.60	48.13	5.04	53.18	-20.82	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 3		

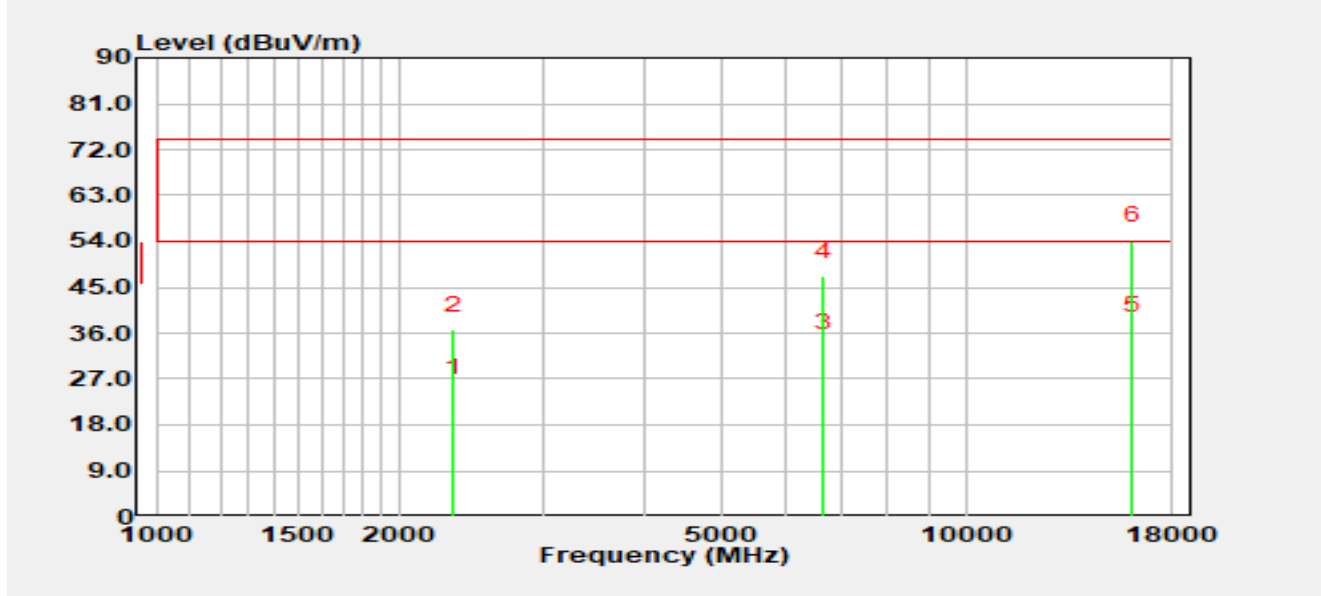


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2326.00	29.22	-4.96	24.26	-29.74	54.00	Average
2		2326.00	41.53	-4.96	36.57	-37.43	74.00	Peak
3		6657.60	28.44	4.77	33.21	-20.79	54.00	Average
4		6657.60	42.43	4.77	47.20	-26.80	74.00	Peak
5	*	16041.60	29.54	7.12	36.66	-17.34	54.00	Average
6		16041.60	46.89	7.12	54.01	-19.99	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 3		

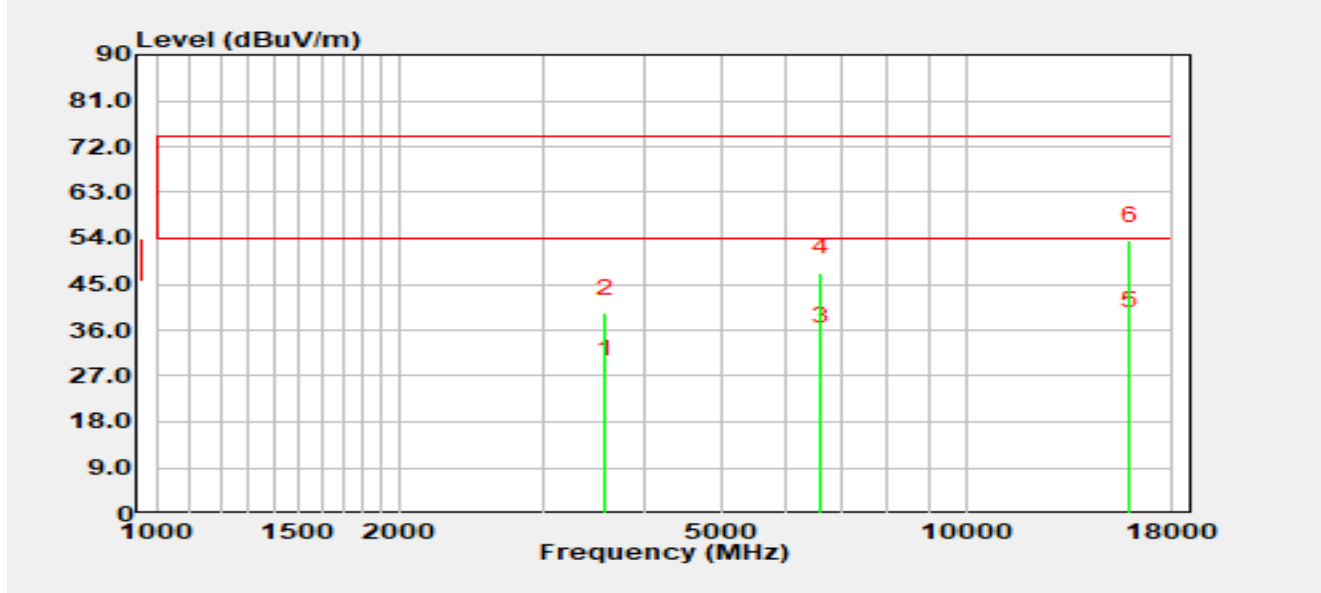


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		3585.70	29.41	-2.19	27.22	-26.78	54.00	Average
2		3585.70	41.51	-2.19	39.32	-34.68	74.00	Peak
3		6628.70	29.29	4.44	33.73	-20.27	54.00	Average
4		6628.70	42.87	4.44	47.31	-26.69	74.00	Peak
5	*	15939.60	29.71	7.12	36.83	-17.17	54.00	Average
6		15939.60	46.42	7.12	53.54	-20.46	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 4		

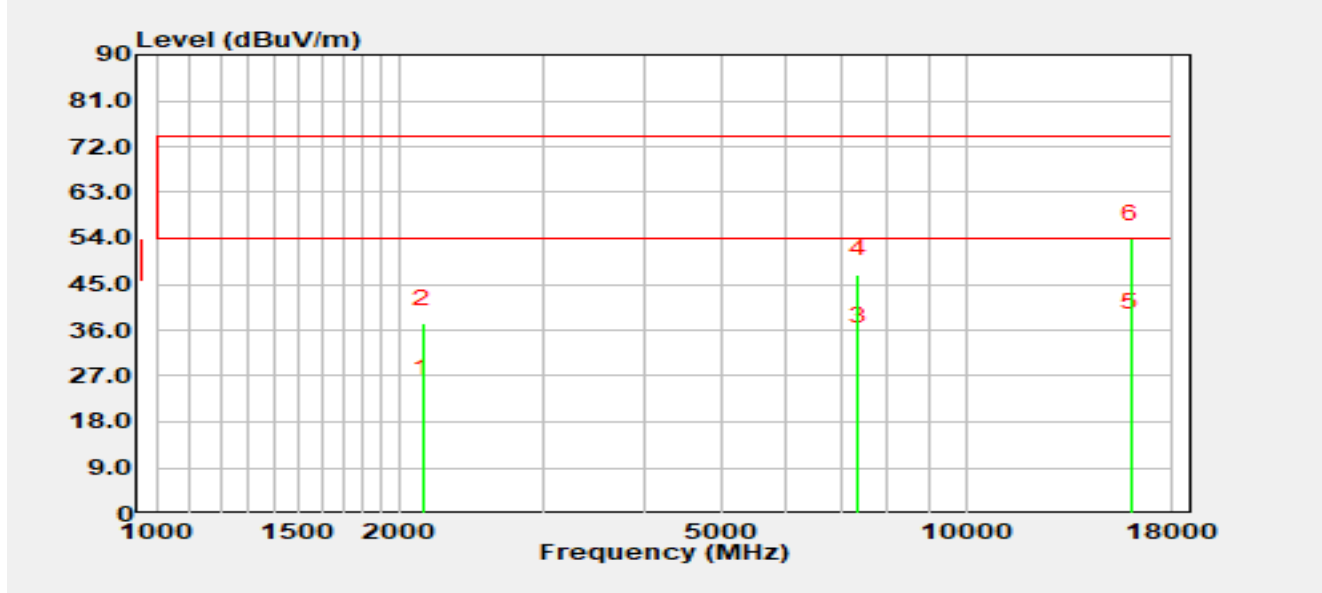


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		2135.60	29.26	-5.49	23.77	-30.23	54.00	Average
2		2135.60	42.81	-5.49	37.32	-36.68	74.00	Peak
3		7347.80	28.52	5.27	33.79	-20.21	54.00	Average
4		7347.80	41.61	5.27	46.88	-27.12	74.00	Peak
5	*	15975.30	29.63	6.87	36.50	-17.50	54.00	Average
6		15975.30	47.05	6.87	53.92	-20.08	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 4		

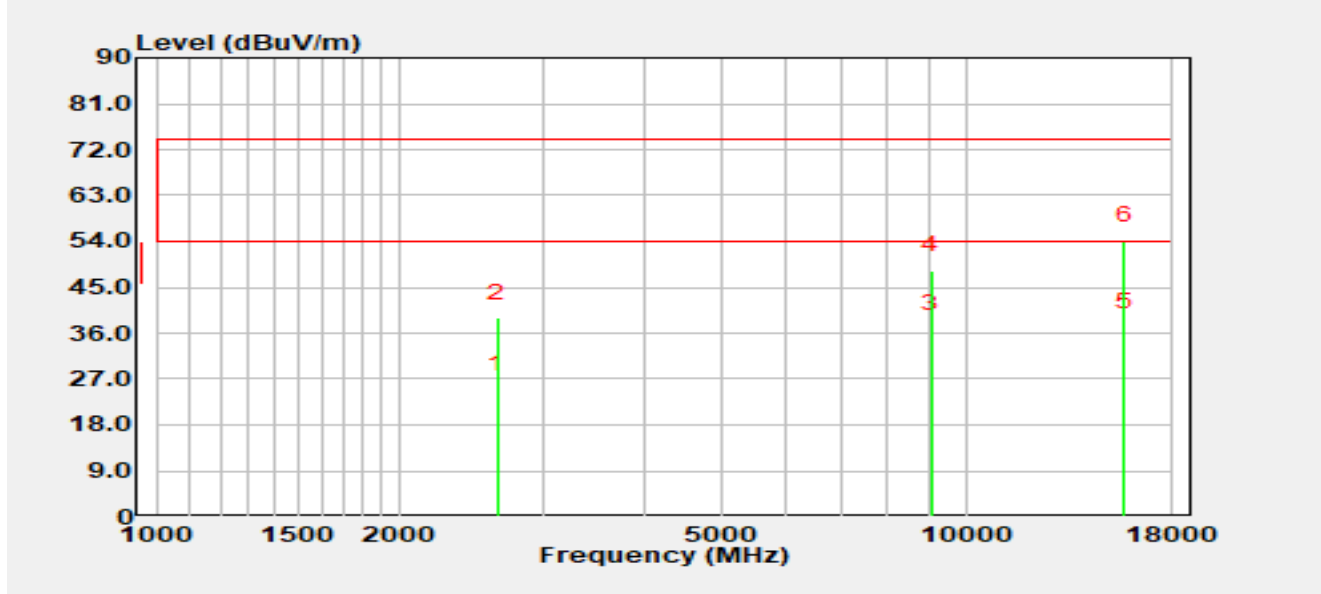


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		2633.70	29.26	-4.15	25.11	-28.89	54.00	Average
2		2633.70	43.18	-4.15	39.03	-34.97	74.00	Peak
3		9076.70	30.20	6.61	36.81	-17.19	54.00	Average
4		9076.70	41.73	6.61	48.34	-25.66	74.00	Peak
5	*	15677.80	30.44	6.83	37.27	-16.73	54.00	Average
6		15677.80	47.25	6.83	54.08	-19.92	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 5		

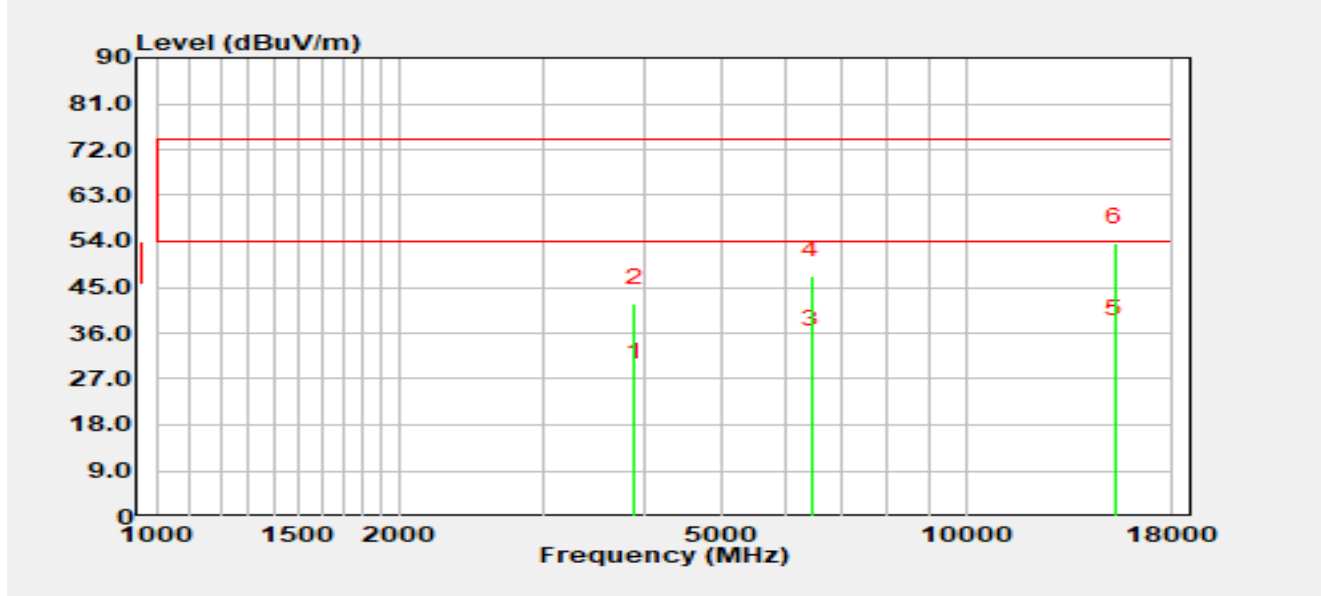


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		3893.40	28.41	-0.96	27.45	-26.55	54.00	Average
2		3893.40	42.81	-0.96	41.85	-32.15	74.00	Peak
3		6448.50	29.63	4.01	33.64	-20.36	54.00	Average
4		6448.50	43.30	4.01	47.31	-26.69	74.00	Peak
5	*	15280.00	29.26	6.46	35.72	-18.28	54.00	Average
6		15280.00	47.28	6.46	53.74	-20.26	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 5		

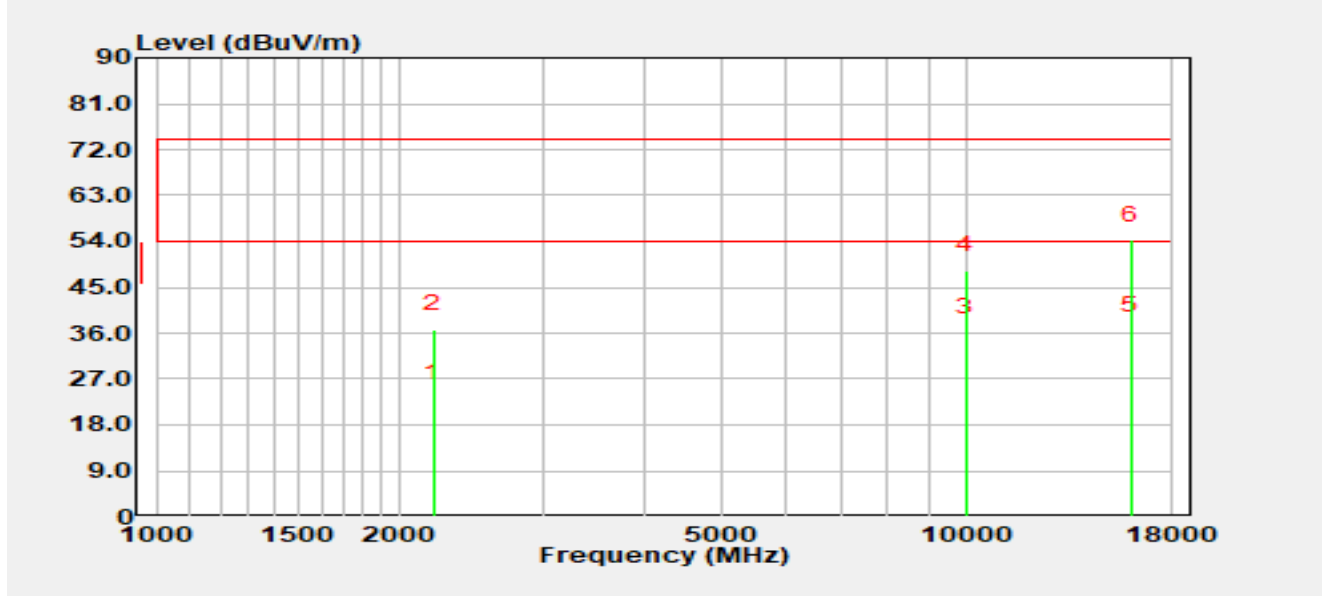


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2201.90	28.42	-5.12	23.30	-30.70	54.00	Average
2		2201.90	41.96	-5.12	36.85	-37.15	74.00	Peak
3		10004.90	29.94	6.38	36.32	-17.68	54.00	Average
4		10004.90	41.99	6.38	48.37	-25.63	74.00	Peak
5	*	15963.40	29.52	7.08	36.60	-17.40	54.00	Average
6		15963.40	47.19	7.08	54.27	-19.73	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 6		

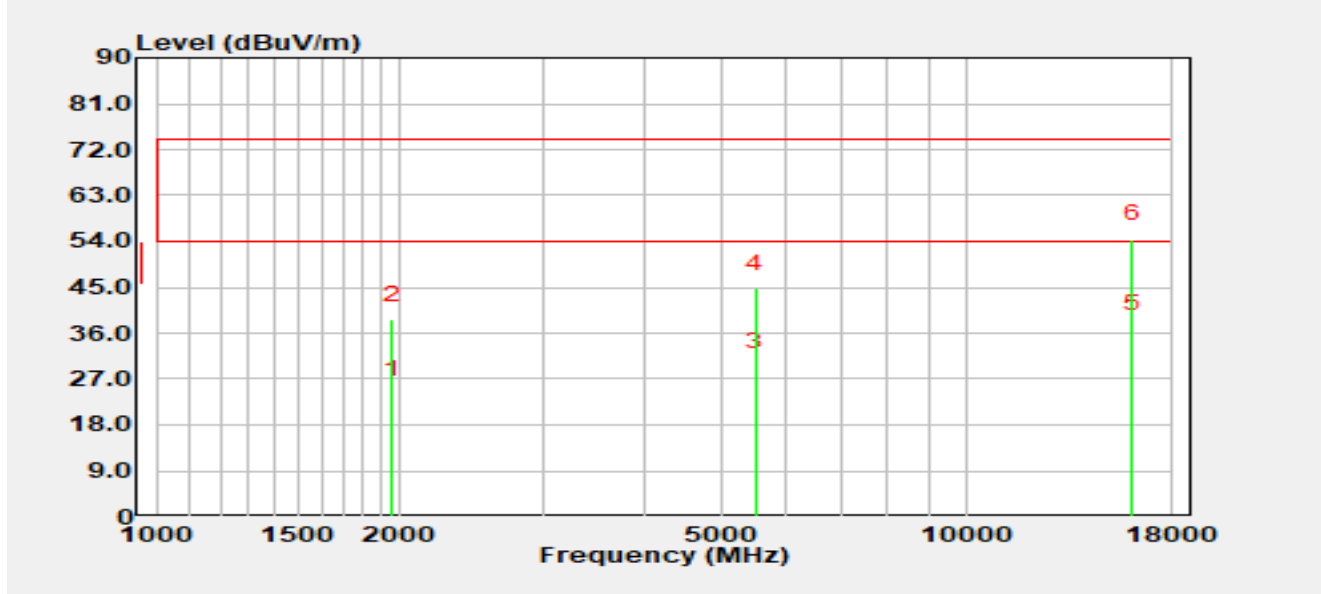


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		1958.80	29.78	-5.84	23.94	-30.06	54.00	Average
2		1958.80	44.52	-5.84	38.67	-35.33	74.00	Peak
3		5498.20	29.06	0.32	29.38	-24.62	54.00	Average
4		5498.20	44.45	0.32	44.77	-29.23	74.00	Peak
5	*	16026.30	29.66	7.16	36.82	-17.18	54.00	Average
6		16026.30	47.34	7.16	54.50	-19.50	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 6		

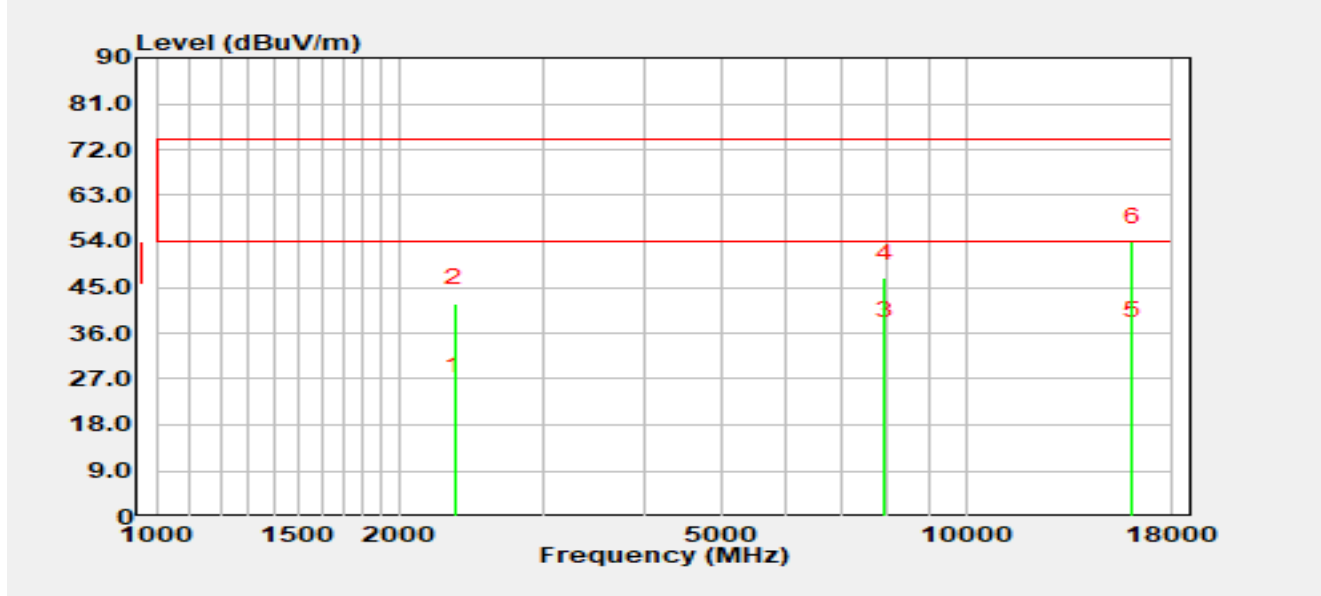


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2337.90	29.71	-4.96	24.75	-29.25	54.00	Average
2		2337.90	46.74	-4.96	41.78	-32.22	74.00	Peak
3		7944.50	29.78	5.59	35.37	-18.63	54.00	Average
4		7944.50	41.27	5.59	46.87	-27.13	74.00	Peak
5	*	16031.40	28.44	7.17	35.61	-18.39	54.00	Average
6		16031.40	46.74	7.17	53.91	-20.09	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 7		

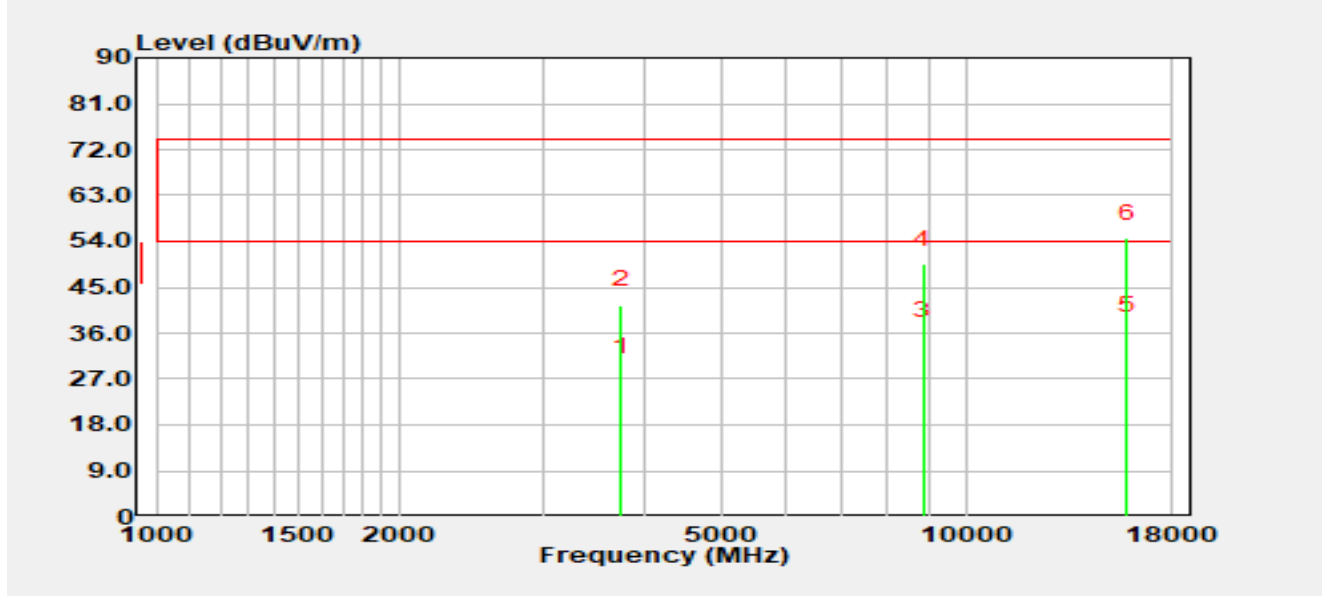


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		3750.60	29.98	-1.46	28.52	-25.48	54.00	Average
2		3750.60	42.99	-1.46	41.53	-32.47	74.00	Peak
3		8865.90	29.14	6.44	35.58	-18.42	54.00	Average
4		8865.90	43.14	6.44	49.58	-24.42	74.00	Peak
5	*	15790.00	29.52	7.09	36.61	-17.39	54.00	Average
6		15790.00	47.52	7.09	54.61	-19.39	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 7		

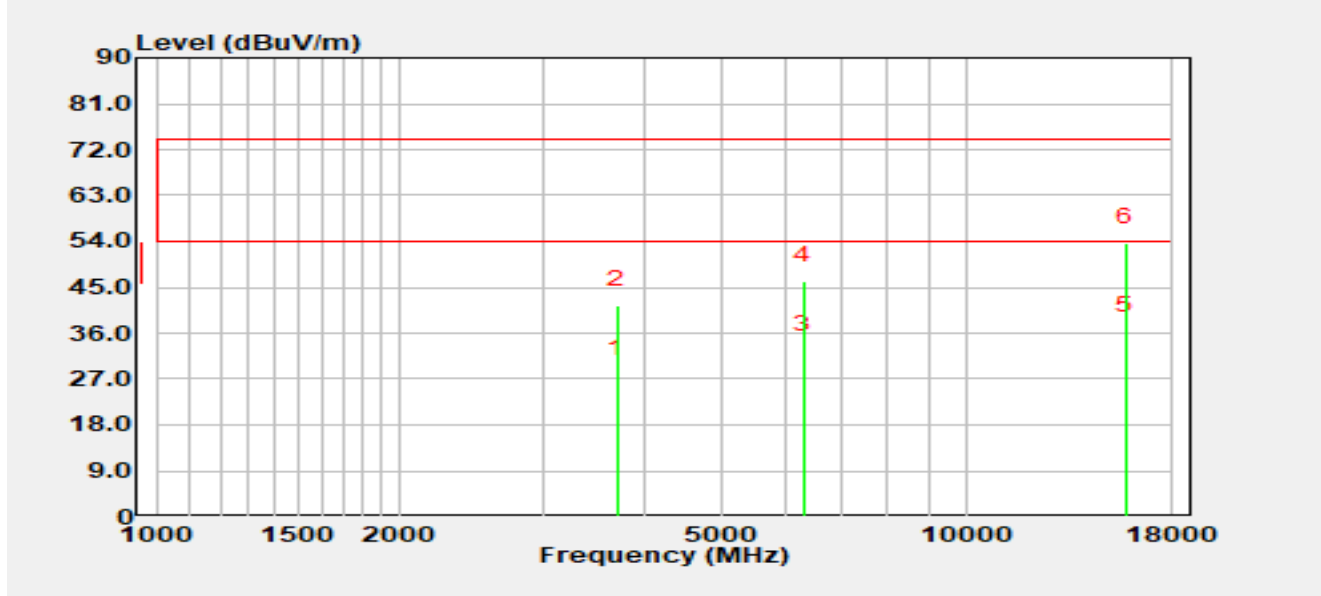


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		3709.80	29.71	-1.58	28.13	-25.87	54.00	Average
2		3709.80	43.03	-1.58	41.45	-32.55	74.00	Peak
3		6295.50	29.24	3.40	32.64	-21.36	54.00	Average
4		6295.50	42.89	3.40	46.29	-27.71	74.00	Peak
5	*	15769.60	29.57	7.07	36.64	-17.36	54.00	Average
6		15769.60	46.72	7.07	53.79	-20.21	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 8		

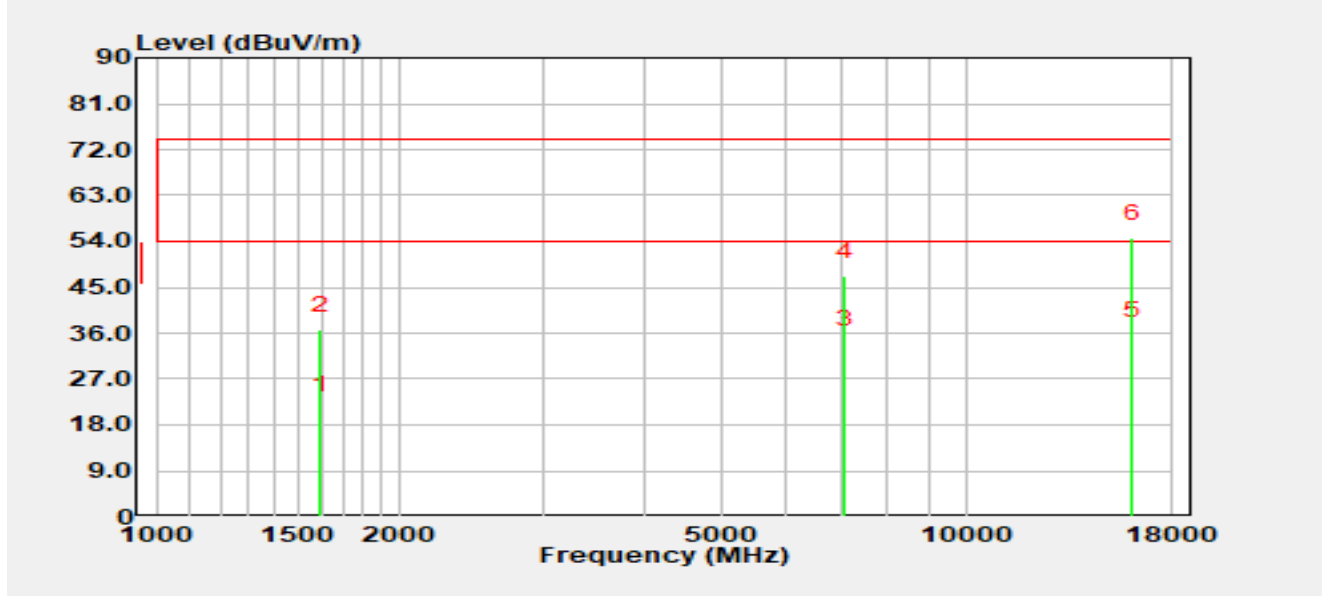


No	Mark	Frequency (MHz)	Reading (dBUV/m)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		1596.70	28.26	-7.54	20.72	-33.28	54.00	Average
2		1596.70	44.08	-7.54	36.54	-37.46	74.00	Peak
3		7077.50	29.42	4.53	33.95	-20.05	54.00	Average
4		7077.50	42.57	4.53	47.10	-26.90	74.00	Peak
5	*	16038.20	28.44	7.18	35.62	-18.38	54.00	Average
6		16038.20	47.45	7.18	54.63	-19.37	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 8		

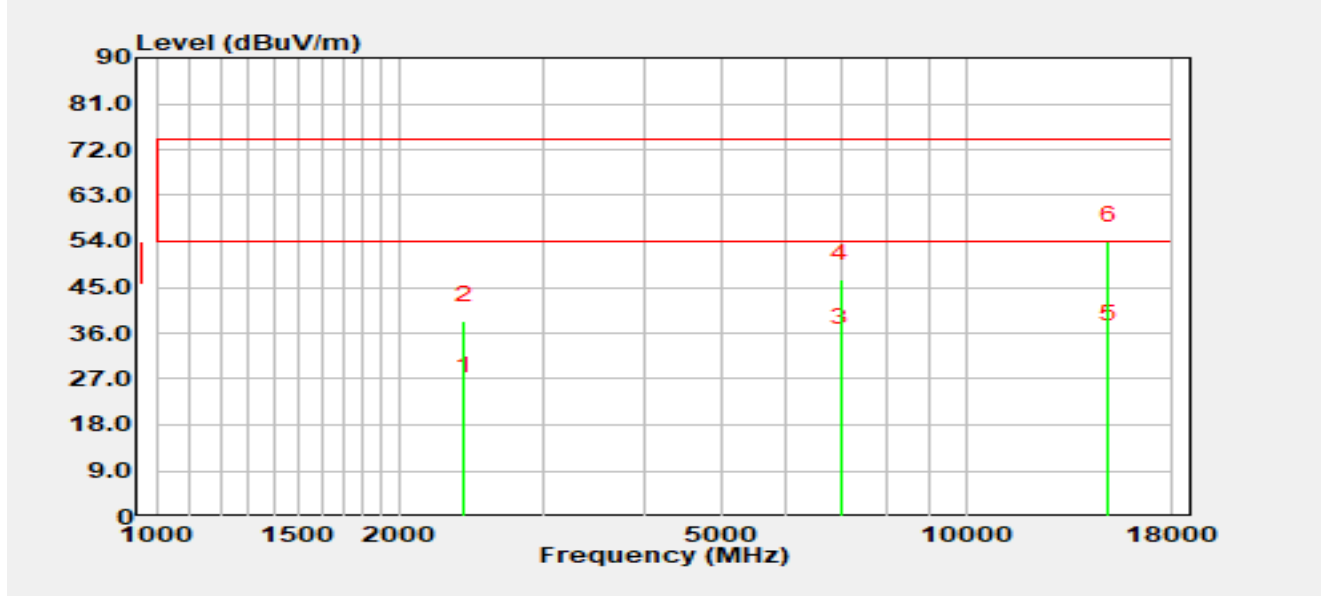


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2402.50	29.47	-4.93	24.54	-29.46	54.00	Average
2		2402.50	43.47	-4.93	38.54	-35.46	74.00	Peak
3		7001.00	29.64	4.38	34.02	-19.98	54.00	Average
4		7001.00	42.17	4.38	46.55	-27.45	74.00	Peak
5	*	14987.60	28.99	5.94	34.93	-19.07	54.00	Average
6		14987.60	48.19	5.94	54.13	-19.87	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-18
Temperature	25.7 °C	Humidity	25.3%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	By POE	Polarity	Horizontal
Test Mode	Mode 1		

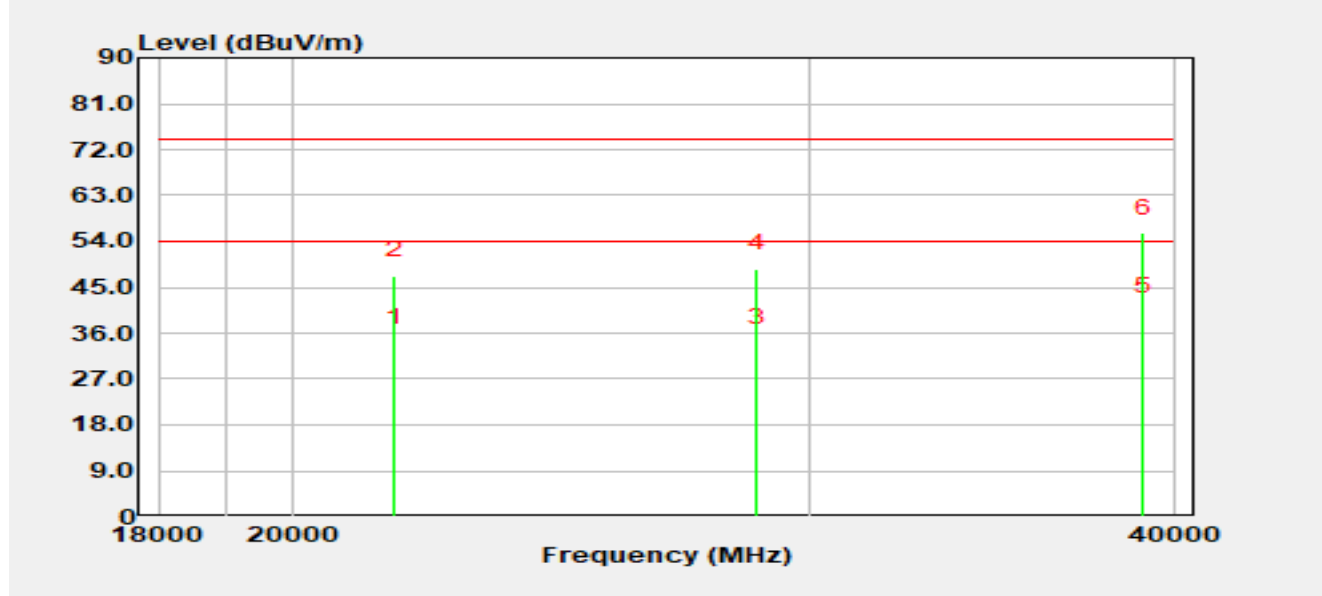


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		21674.00	39.22	-4.94	34.28	-19.72	54.00	Average
2		21674.00	52.20	-4.94	47.27	-26.73	74.00	Peak
3		28791.00	37.44	-3.46	33.98	-20.02	54.00	Average
4		28791.00	52.13	-3.46	48.67	-25.33	74.00	Peak
5	*	38979.20	37.44	2.78	40.22	-13.78	54.00	Average
6		38979.20	52.89	2.78	55.67	-18.33	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-18
Temperature	25.7 °C	Humidity	25.3%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	By POE	Polarity	Vertical
Test Mode	Mode 1		

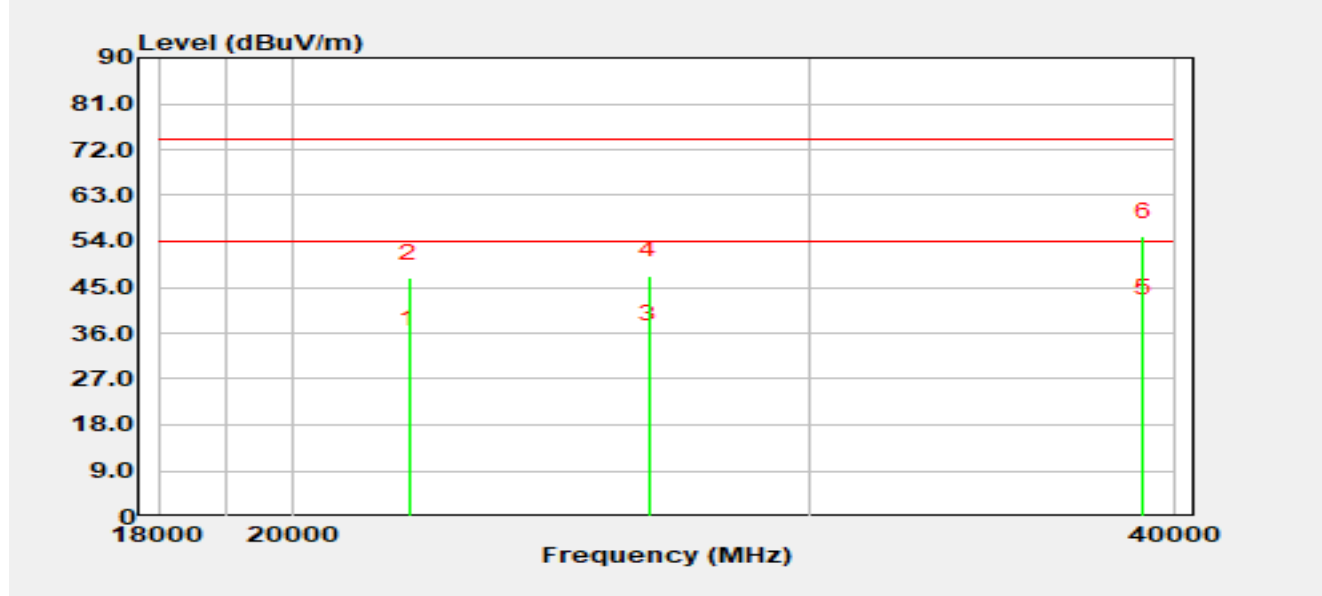


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		21927.00	38.44	-4.74	33.70	-20.30	54.00	Average
2		21927.00	51.50	-4.74	46.76	-27.24	74.00	Peak
3		26450.20	38.02	-3.27	34.75	-19.25	54.00	Average
4		26450.20	50.62	-3.27	47.35	-26.65	74.00	Peak
5	*	39014.40	37.11	2.72	39.83	-14.17	54.00	Average
6		39014.40	52.30	2.72	55.02	-18.98	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-04-14
Temperature	19.7 °C	Humidity	27.9%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 2		

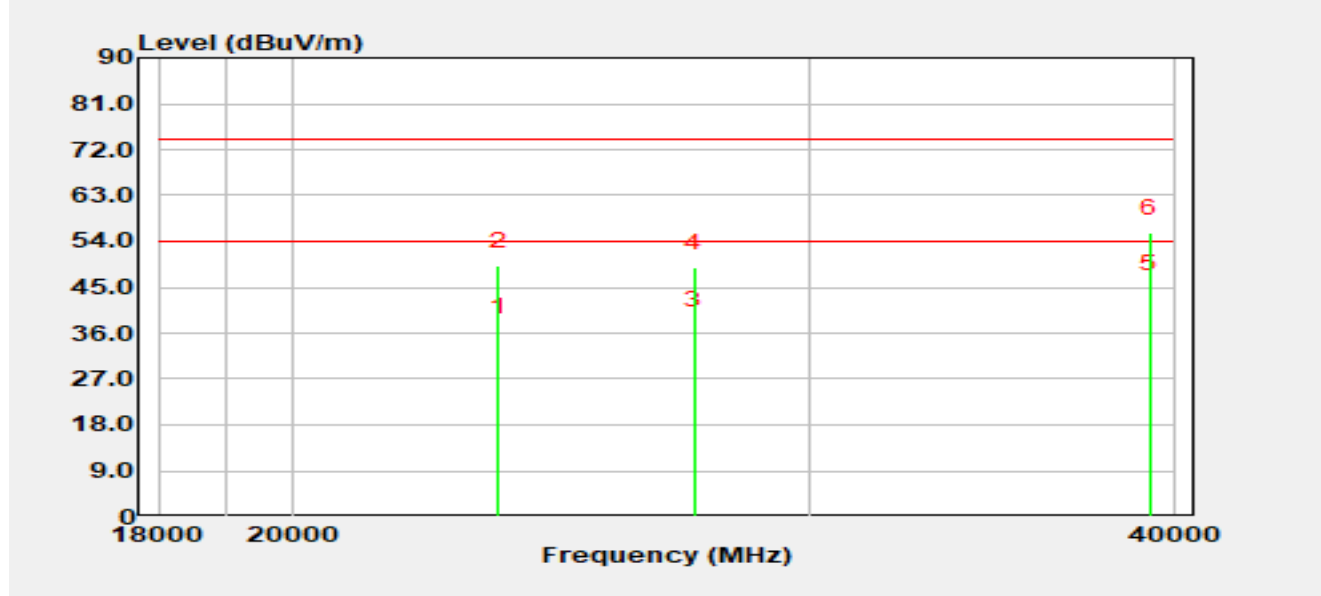


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		23504.40	40.37	-4.14	36.23	-17.77	54.00	Average
2		23504.40	53.30	-4.14	49.16	-24.84	74.00	Peak
3		27427.00	41.27	-3.85	37.42	-16.58	54.00	Average
4		27427.00	52.65	-3.85	48.80	-25.20	74.00	Peak
5	*	39197.00	42.35	2.18	44.53	-9.47	54.00	Average
6		39197.00	53.46	2.18	55.64	-18.36	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-04-14
Temperature	19.7 °C	Humidity	27.9%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 2		

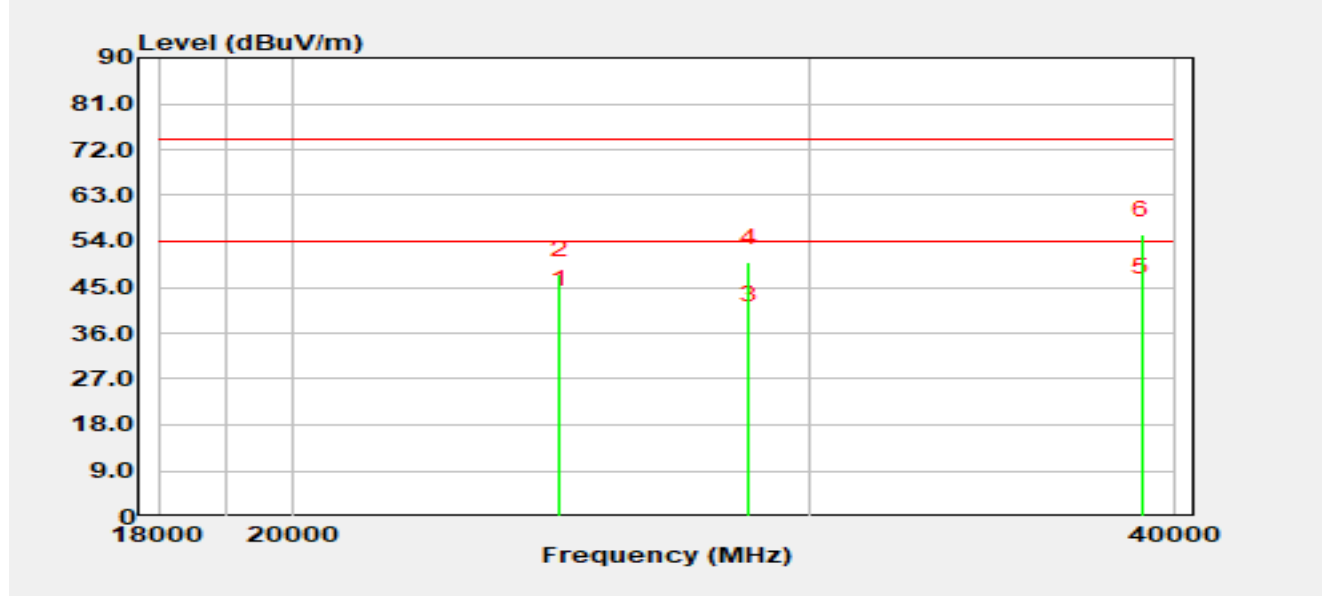


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		24668.20	45.27	-3.73	41.53	-12.47	54.00	Average
2		24668.20	51.18	-3.73	47.44	-26.56	74.00	Peak
3		28630.40	42.14	-3.73	38.41	-15.59	54.00	Average
4		28630.40	53.51	-3.73	49.78	-24.22	74.00	Peak
5	*	38959.40	42.77	1.34	44.10	-9.90	54.00	Average
6		38959.40	53.90	1.34	55.23	-18.77	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 3		

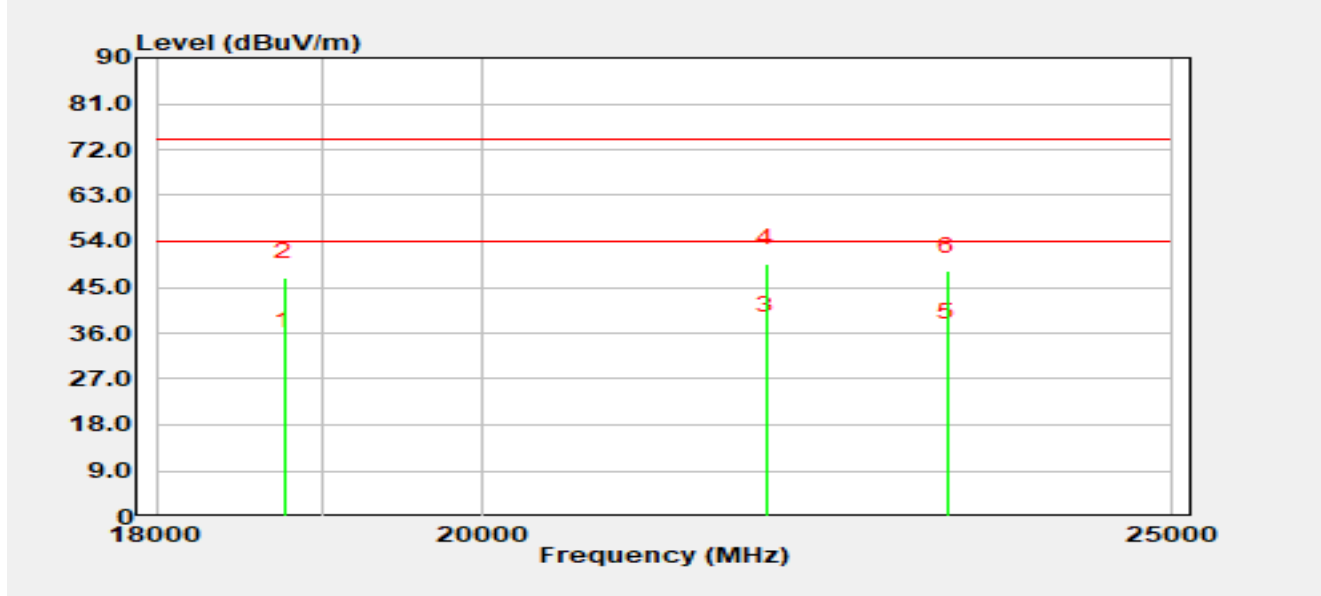


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18759.50	42.55	-9.10	33.45	-20.55	54.00	Average
2		18759.50	56.12	-9.10	47.02	-26.98	74.00	Peak
3	*	21920.70	41.22	-4.77	36.45	-17.55	54.00	Average
4		21920.70	54.49	-4.77	49.72	-24.28	74.00	Peak
5		23246.50	39.22	-4.11	35.11	-18.89	54.00	Average
6		23246.50	52.19	-4.11	48.07	-25.93	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 3		

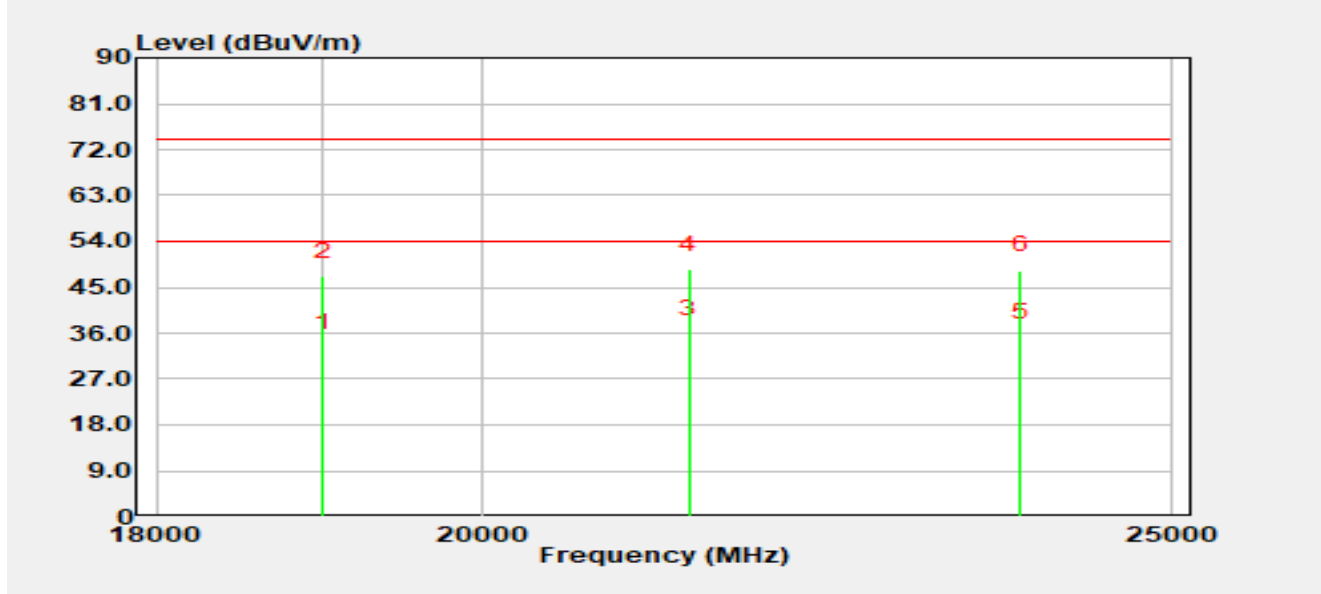


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18995.40	42.11	-9.16	32.95	-21.05	54.00	Average
2		18995.40	56.26	-9.16	47.10	-26.90	74.00	Peak
3	*	21381.00	41.26	-5.52	35.74	-18.26	54.00	Average
4		21381.00	54.00	-5.52	48.48	-25.52	74.00	Peak
5		23800.90	39.33	-4.04	35.29	-18.71	54.00	Average
6		23800.90	52.39	-4.04	48.35	-25.65	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 4		

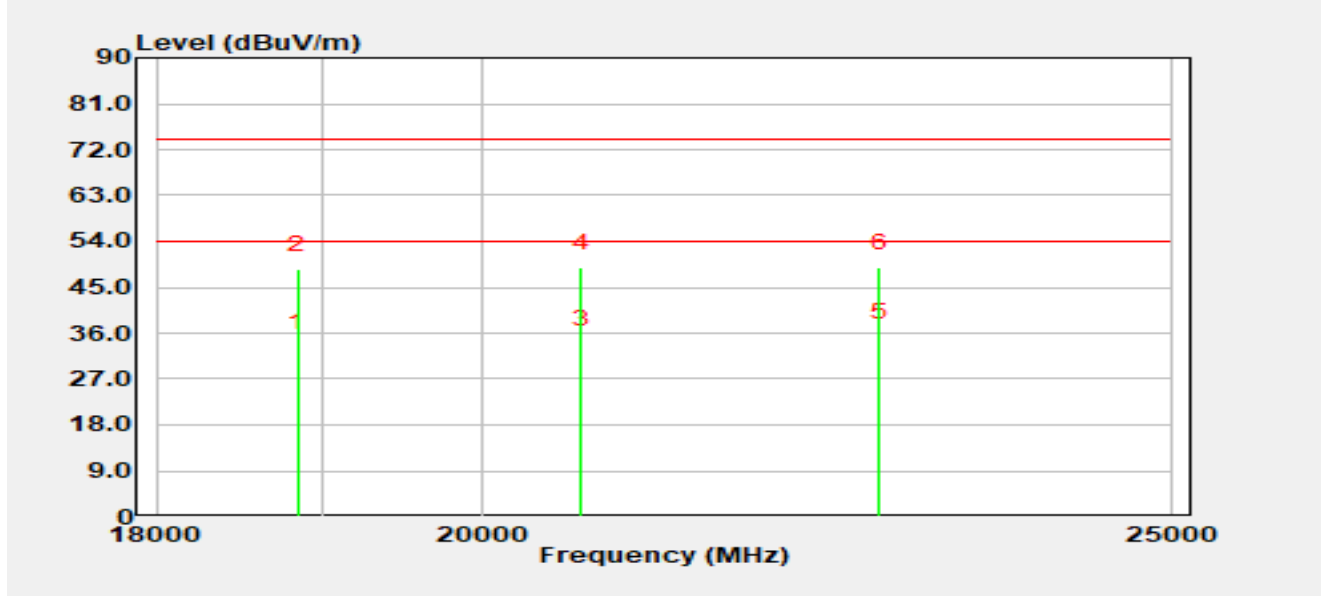


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18845.60	42.33	-9.07	33.26	-20.74	54.00	Average
2		18845.60	57.60	-9.07	48.53	-25.47	74.00	Peak
3		20650.20	41.26	-7.41	33.85	-20.15	54.00	Average
4		20650.20	56.19	-7.41	48.78	-25.22	74.00	Peak
5	*	22736.20	39.55	-4.42	35.13	-18.87	54.00	Average
6		22736.20	53.16	-4.42	48.75	-25.25	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 4		

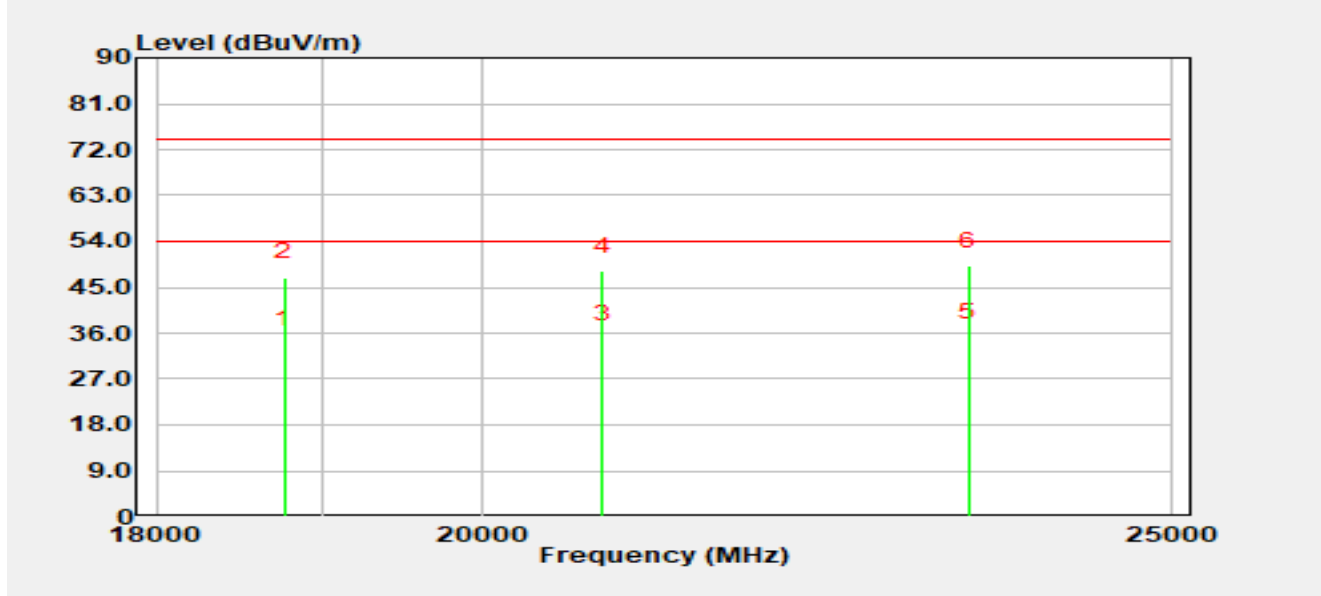


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18757.40	42.85	-9.10	33.75	-20.25	54.00	Average
2		18757.40	56.12	-9.10	47.03	-26.97	74.00	Peak
3		20795.80	41.62	-6.78	34.84	-19.16	54.00	Average
4		20795.80	54.95	-6.78	48.17	-25.83	74.00	Peak
5	*	23401.90	39.55	-4.25	35.30	-18.70	54.00	Average
6		23401.90	53.36	-4.25	49.11	-24.89	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 5		

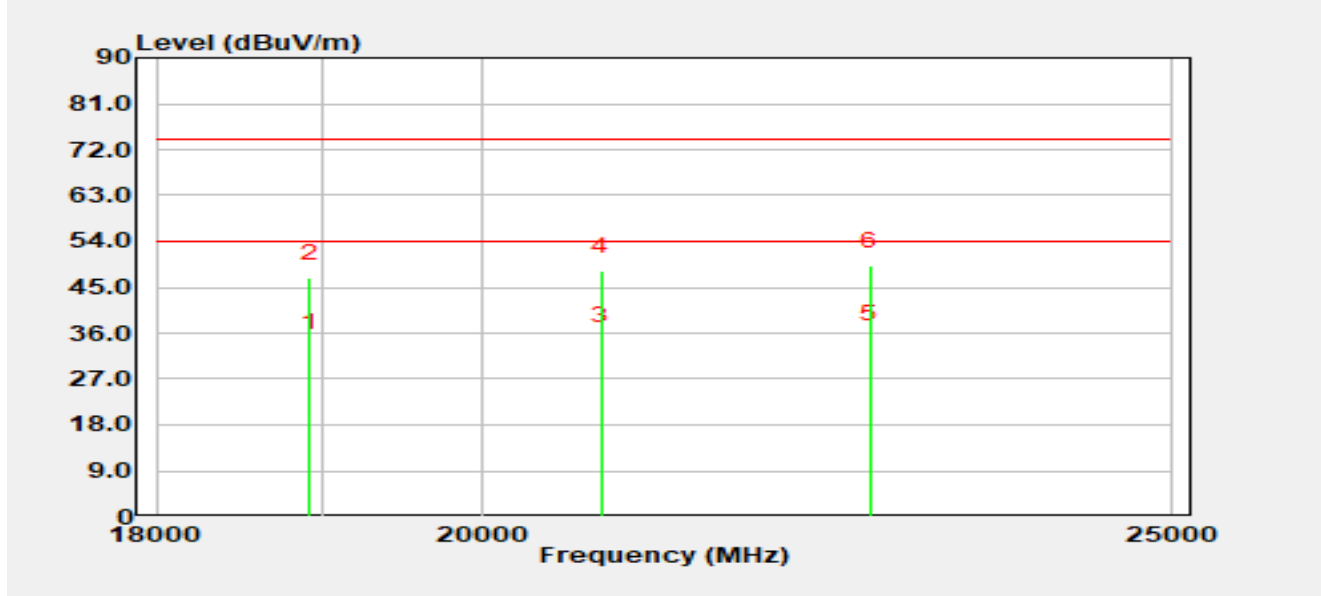


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18917.00	42.33	-9.09	33.24	-20.76	54.00	Average
2		18917.00	55.84	-9.09	46.76	-27.24	74.00	Peak
3		20783.90	41.25	-6.77	34.48	-19.52	54.00	Average
4		20783.90	54.94	-6.77	48.17	-25.83	74.00	Peak
5	*	22668.30	39.22	-4.33	34.89	-19.11	54.00	Average
6		22668.30	53.50	-4.33	49.18	-24.82	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 5		

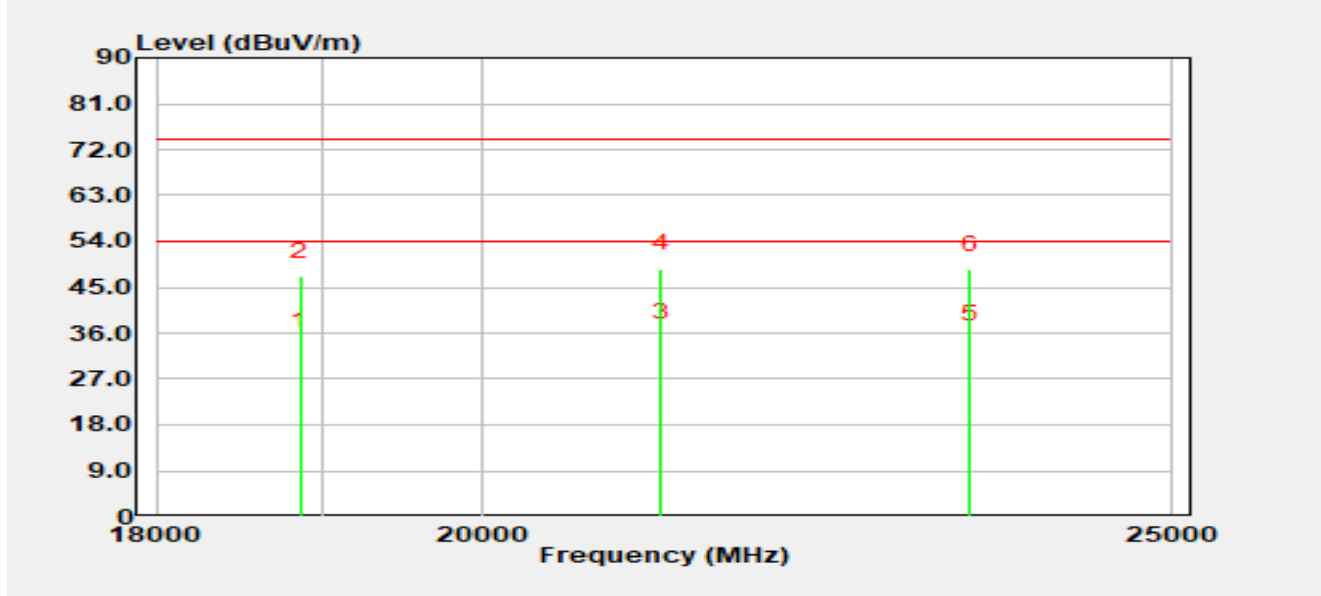


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18857.50	42.33	-8.94	33.39	-20.61	54.00	Average
2		18857.50	56.13	-8.94	47.19	-26.81	74.00	Peak
3	*	21190.60	41.22	-6.14	35.08	-18.92	54.00	Average
4		21190.60	54.83	-6.14	48.70	-25.30	74.00	Peak
5		23415.90	39.26	-4.29	34.97	-19.03	54.00	Average
6		23415.90	52.80	-4.29	48.51	-25.49	74.00	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 6		

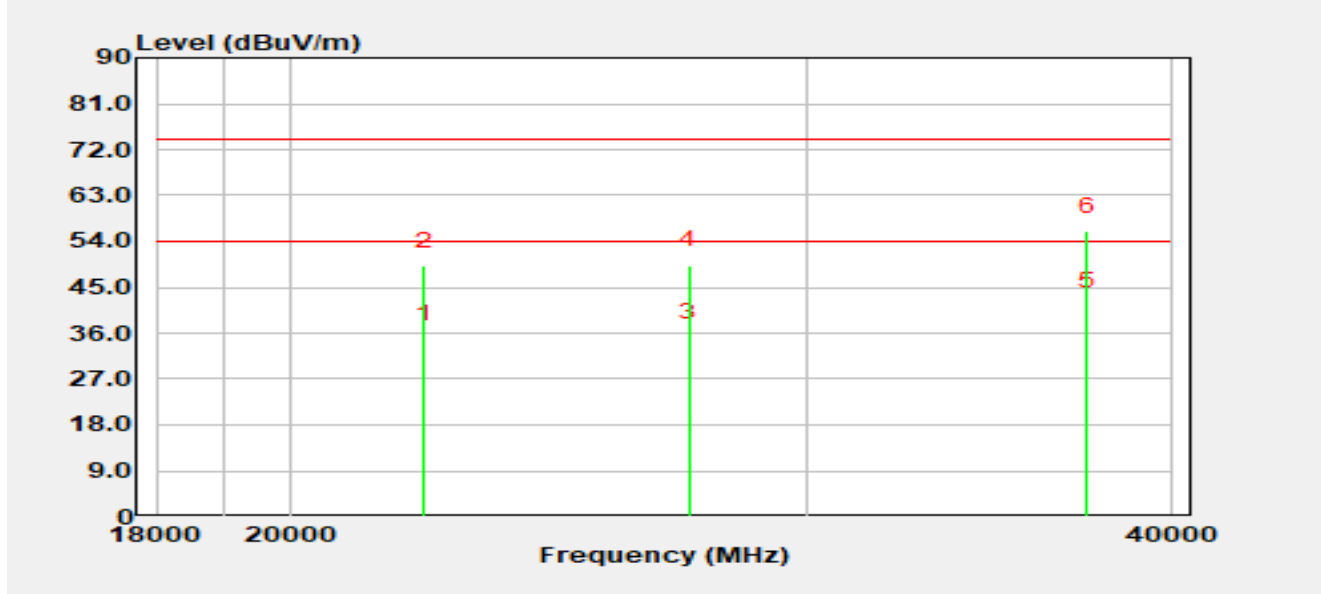


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		22213.00	39.26	-4.49	34.77	-19.23	54.00	Average
2		22213.00	53.58	-4.49	49.09	-24.91	74.00	Peak
3		27345.60	39.19	-3.92	35.27	-18.73	54.00	Average
4		27345.60	53.32	-3.92	49.40	-24.60	74.00	Peak
5	*	37386.40	42.02	-0.69	41.33	-12.67	54.00	Average
6		37386.40	56.60	-0.69	55.91	-18.09	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 6		

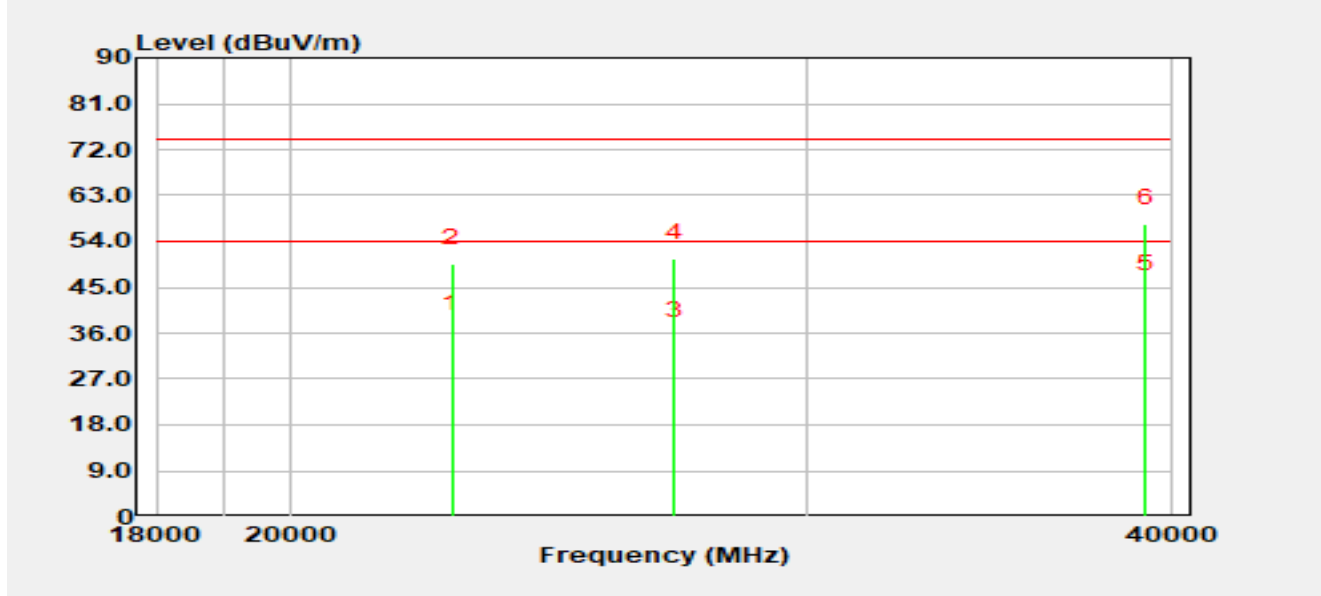


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		22701.40	41.40	-4.44	36.96	-17.04	54.00	Average
2		22701.40	54.07	-4.44	49.63	-24.37	74.00	Peak
3		27053.00	39.26	-3.73	35.53	-18.47	54.00	Average
4		27053.00	54.39	-3.73	50.66	-23.34	74.00	Peak
5	*	39146.40	42.15	2.62	44.77	-9.23	54.00	Average
6		39146.40	54.88	2.62	57.50	-16.50	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 7		

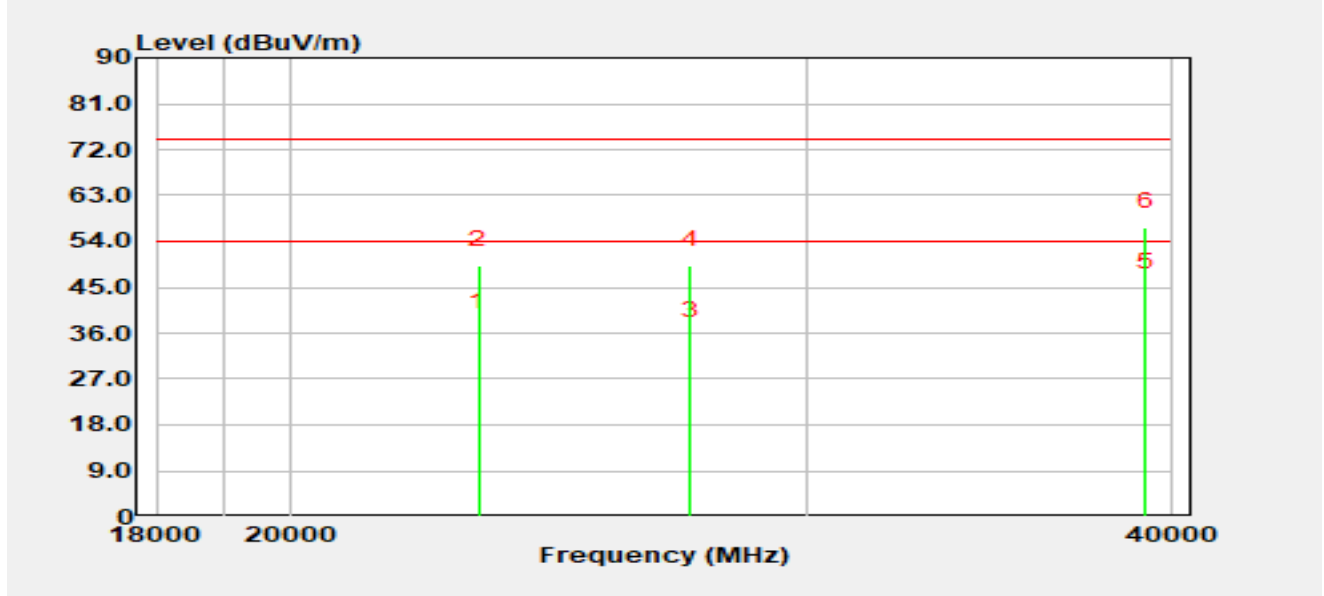


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		23181.00	41.43	-4.22	37.21	-16.79	54.00	Average
2		23181.00	53.54	-4.22	49.32	-24.68	74.00	Peak
3		27380.80	39.26	-3.77	35.49	-18.51	54.00	Average
4		27380.80	53.16	-3.77	49.39	-24.61	74.00	Peak
5	*	39161.80	42.01	2.96	44.97	-9.03	54.00	Average
6		39161.80	53.88	2.96	56.84	-17.16	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 7		

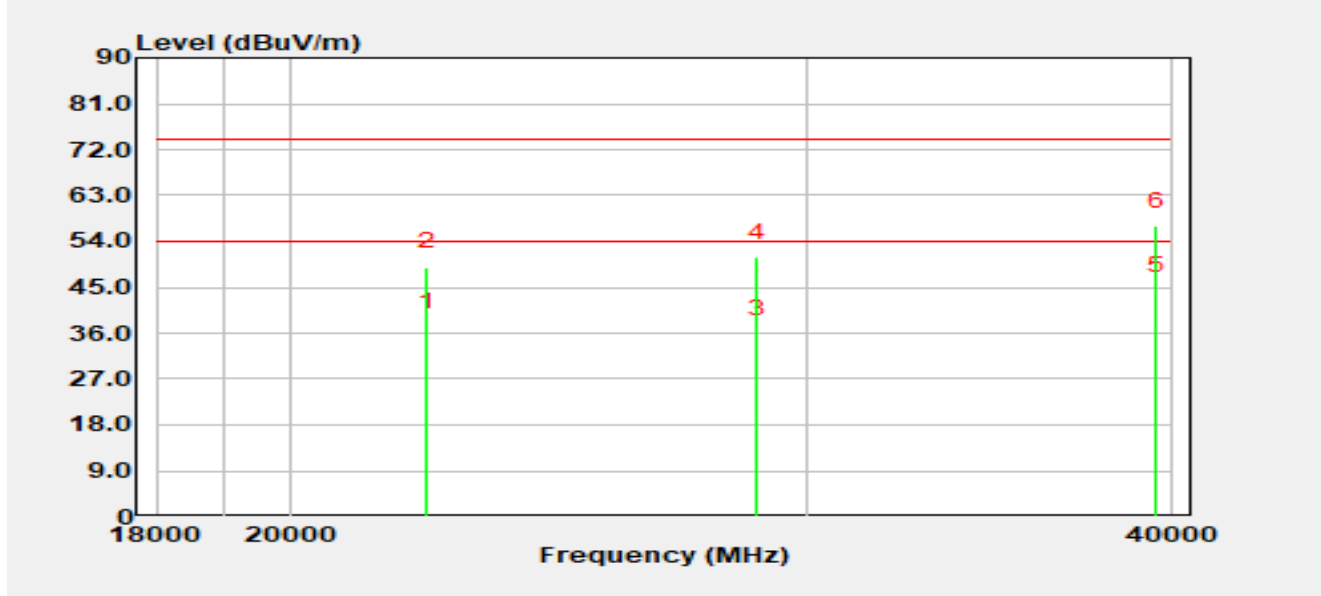


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		22257.00	41.75	-4.73	37.02	-16.98	54.00	Average
2		22257.00	53.75	-4.73	49.02	-24.98	74.00	Peak
3		28850.40	39.26	-3.48	35.78	-18.22	54.00	Average
4		28850.40	54.35	-3.48	50.87	-23.13	74.00	Peak
5	*	39498.40	42.22	2.23	44.45	-9.55	54.00	Average
6		39498.40	54.74	2.23	56.97	-17.03	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode 8		

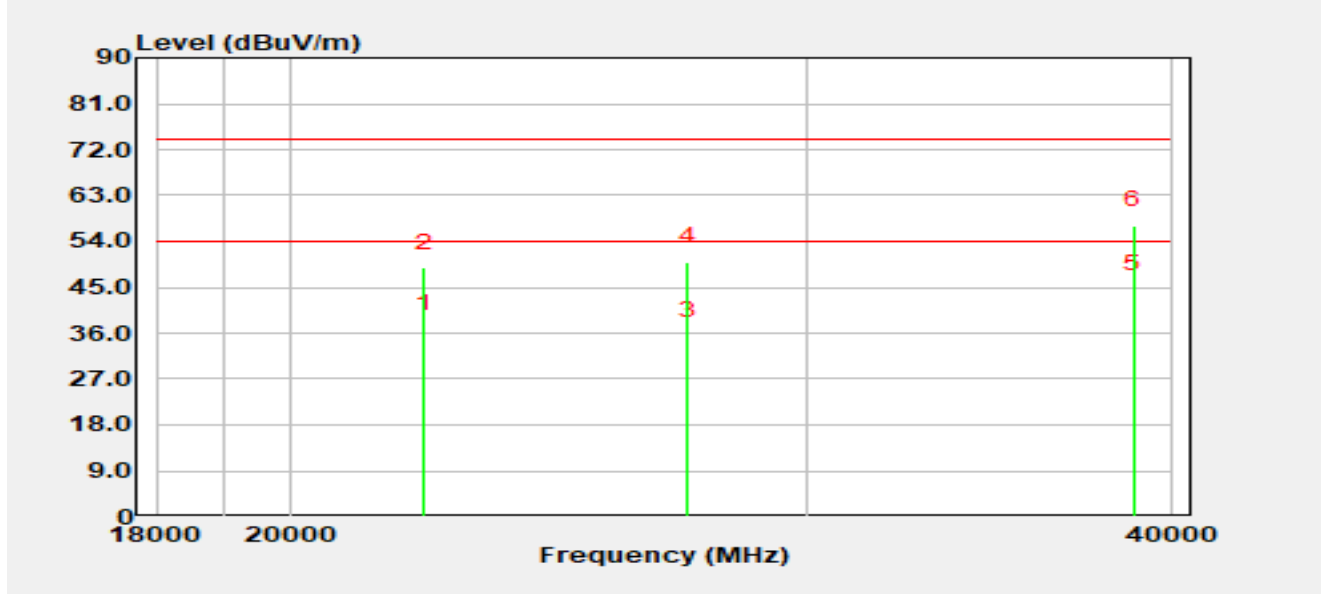


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		22226.20	41.26	-4.58	36.68	-17.32	54.00	Average
2		22226.20	53.46	-4.58	48.88	-25.12	74.00	Peak
3		27317.00	39.41	-4.06	35.35	-18.65	54.00	Average
4		27317.00	54.04	-4.06	49.99	-24.01	74.00	Peak
5	*	38814.20	42.66	2.13	44.79	-9.21	54.00	Average
6		38814.20	55.05	2.13	57.18	-16.82	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-08
Temperature	29.5 °C	Humidity	42.6%
Limit	FCC_Part 15.109_RE (3 m)_Class B	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode 8		

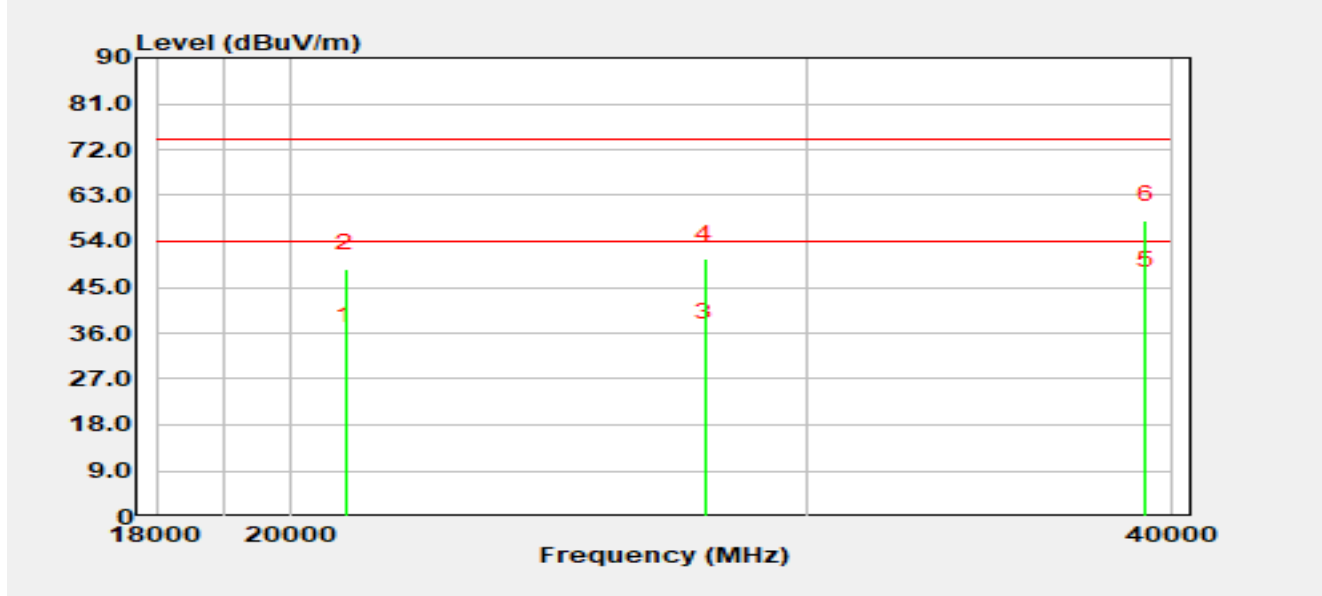

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		20897.40	41.02	-6.58	34.44	-19.56	54.00	Average
2		20897.40	55.24	-6.58	48.66	-25.34	74.00	Peak
3		27708.60	39.22	-4.12	35.10	-18.90	54.00	Average
4		27708.60	54.58	-4.12	50.46	-23.54	74.00	Peak
5	*	39150.80	42.62	2.71	45.33	-8.67	54.00	Average
6		39150.80	55.50	2.71	58.22	-15.78	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Appendix A - Test Setup Photograph

Refer to "R25S1060119-UT" file.

Appendix B - EUT Photograph

Refer to "R25S1060119-UE" file.

The End