


Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

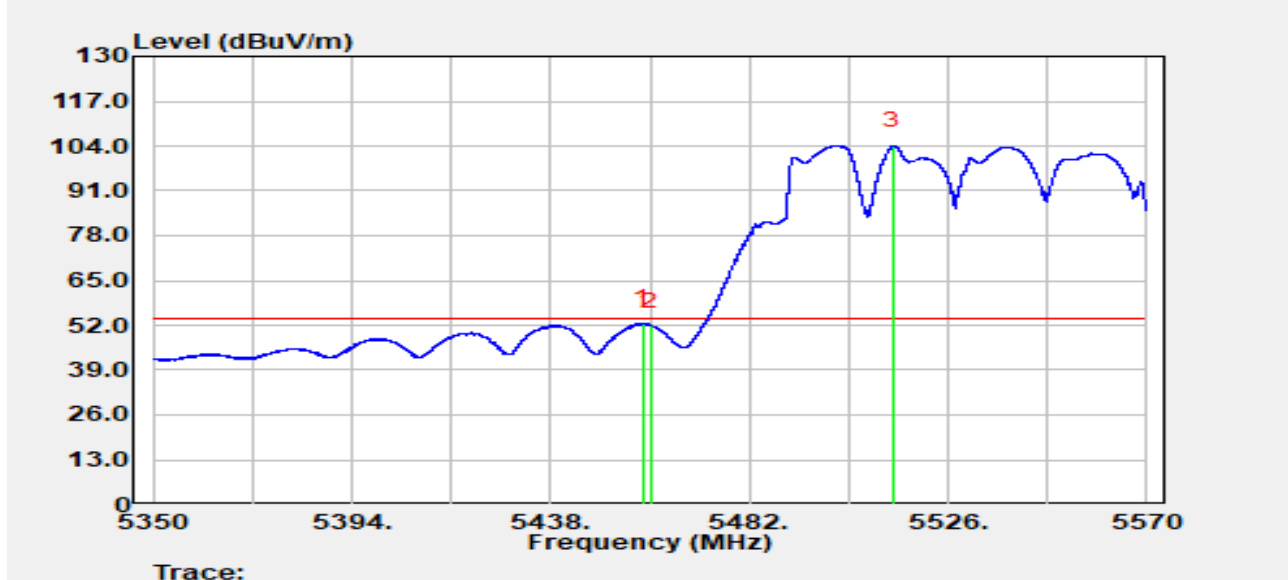


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.372	53.38	-0.79	52.59	-1.41	54.00	Average
2		5460.000	52.62	-0.69	51.92	-2.08	54.00	Average
3		5513.878	59.37	44.86	104.23	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

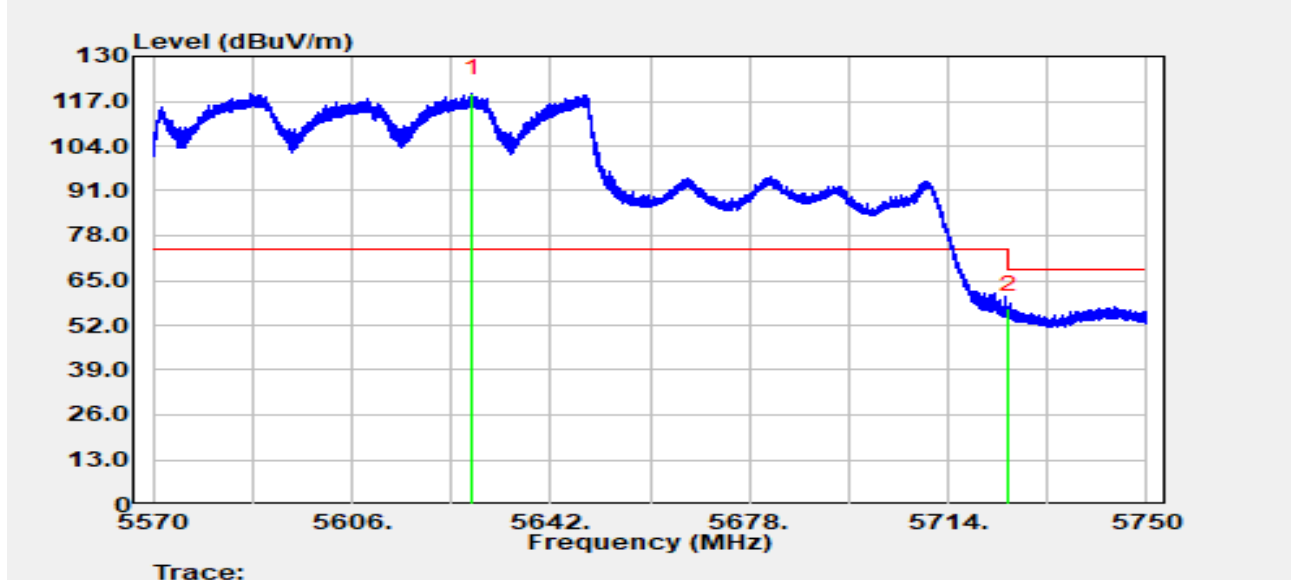


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5627.906	75.36	43.95	119.31	N/A	N/A	Peak
2	*	5725.000	55.77	1.01	56.78	-11.42	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

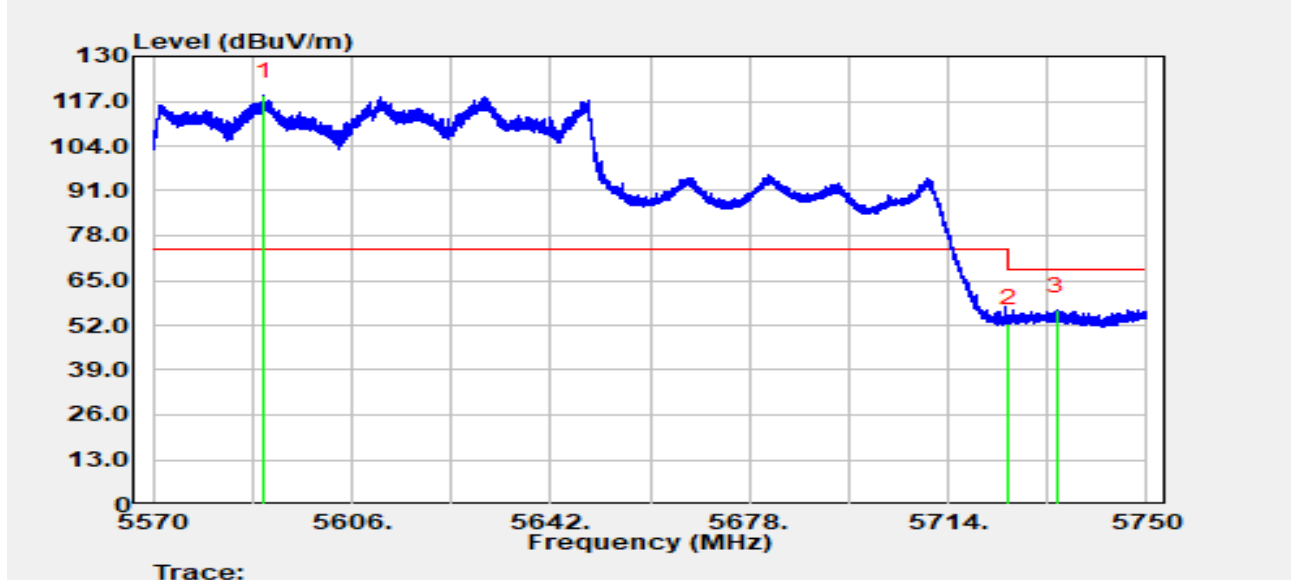


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5590.034	70.80	47.78	118.58	N/A	N/A	Peak
2		5725.000	51.67	1.01	52.68	-15.52	68.20	Peak
3	*	5733.656	57.43	-1.26	56.17	-12.03	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

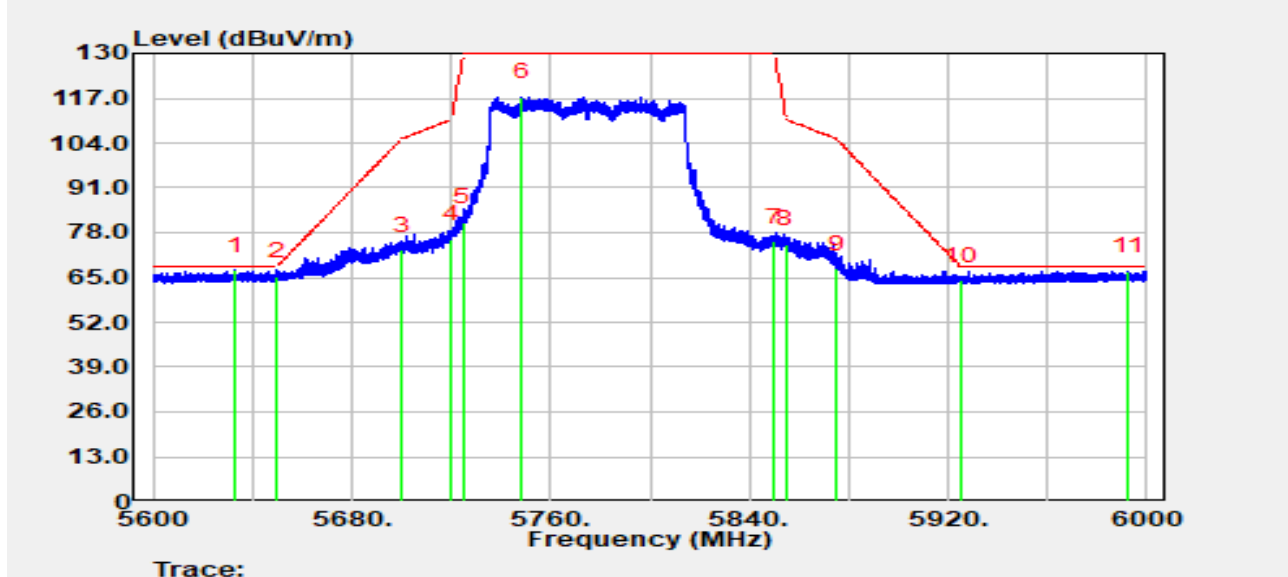


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5633.040	70.65	-3.50	67.15	-1.05	68.20	Peak
2		5650.000	69.06	-3.65	65.42	-2.78	68.20	Peak
3		5700.000	76.51	-3.47	73.04	-32.16	105.20	Peak
4		5720.000	79.51	-3.45	76.06	-34.74	110.80	Peak
5		5725.000	84.45	-3.47	80.98	-49.02	130.00	Peak
6		5748.560	120.95	-3.65	117.30	N/A	N/A	Peak
7		5850.000	79.10	-3.75	75.34	-54.66	130.00	Peak
8		5855.000	78.56	-3.75	74.81	-35.99	110.80	Peak
9		5875.000	71.46	-3.82	67.63	-37.57	105.20	Peak
10		5925.000	67.86	-3.71	64.15	-4.05	68.20	Peak
11		5992.800	70.62	-3.71	66.92	-1.28	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

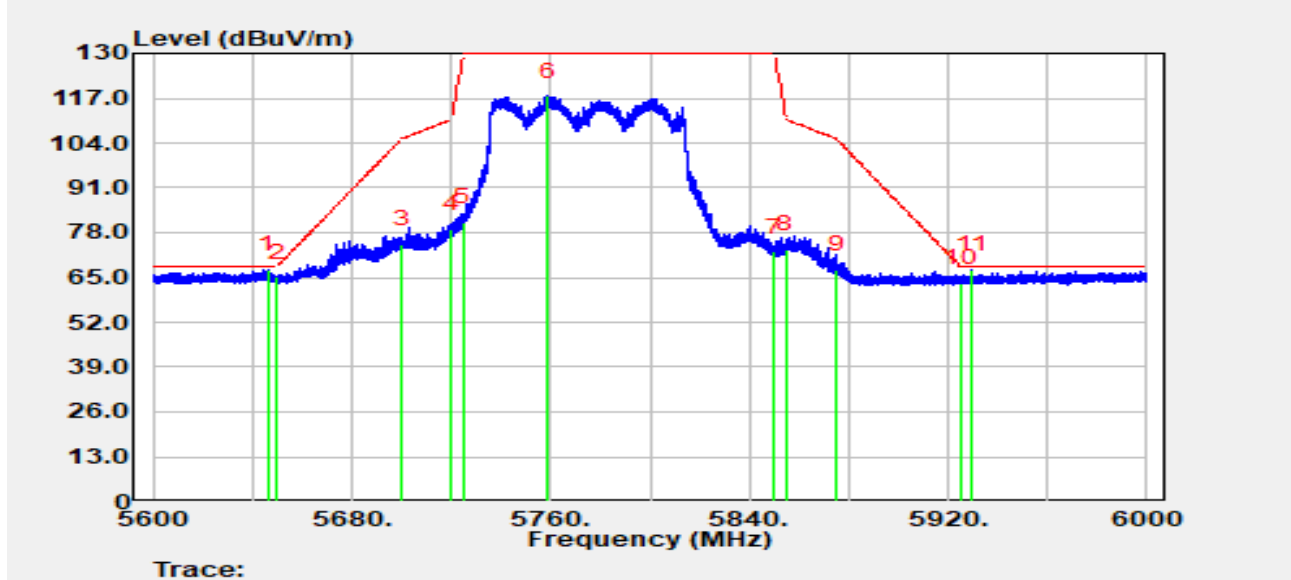


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5646.320	71.07	-3.65	67.42	-0.78	68.20	Peak
2		5650.000	68.68	-3.65	65.03	-3.17	68.20	Peak
3		5700.000	78.07	-3.47	74.60	-30.60	105.20	Peak
4		5720.000	82.48	-3.45	79.02	-31.78	110.80	Peak
5		5725.000	84.66	-3.47	81.19	-48.81	130.00	Peak
6		5758.880	121.23	-3.65	117.58	N/A	N/A	Peak
7		5850.000	76.18	-3.75	72.42	-57.58	130.00	Peak
8		5855.000	76.99	-3.75	73.24	-37.56	110.80	Peak
9		5875.000	71.23	-3.82	67.41	-37.79	105.20	Peak
10		5925.000	67.14	-3.71	63.44	-4.76	68.20	Peak
11		5929.520	71.04	-3.66	67.37	-0.83	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

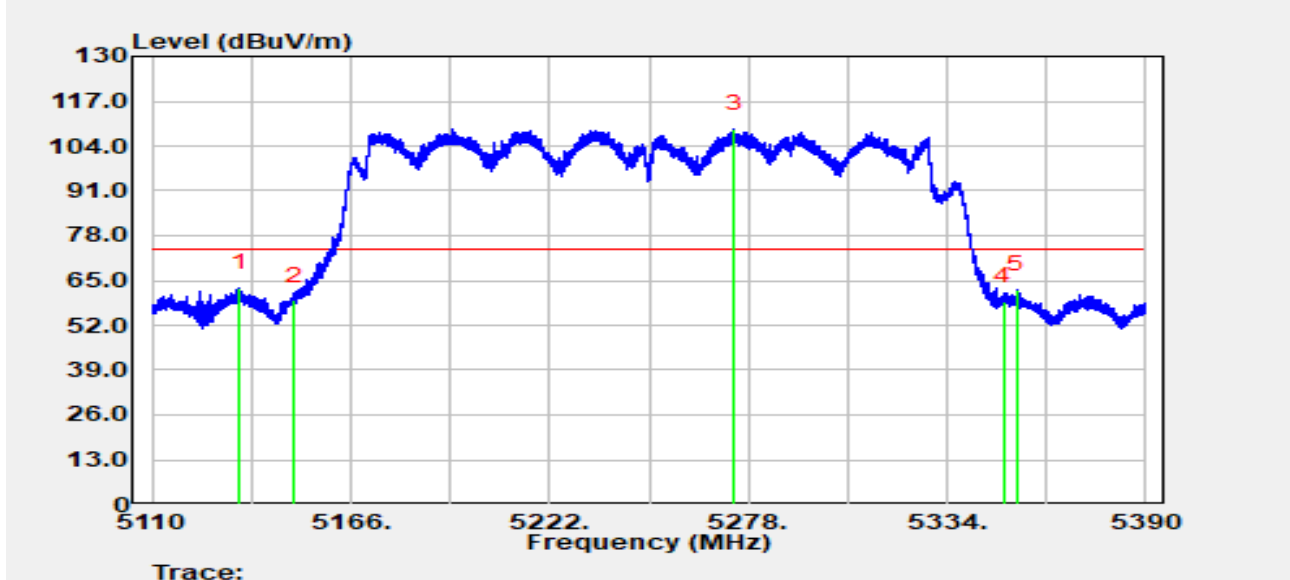


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5134.612	65.51	-2.51	63.00	-11.00	74.00	Peak
2		5150.000	59.75	-0.54	59.21	-14.79	74.00	Peak
3		5274.136	67.64	41.41	109.05	N/A	N/A	Peak
4		5350.000	56.59	2.28	58.88	-15.12	74.00	Peak
5		5353.628	61.98	0.40	62.39	-11.61	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

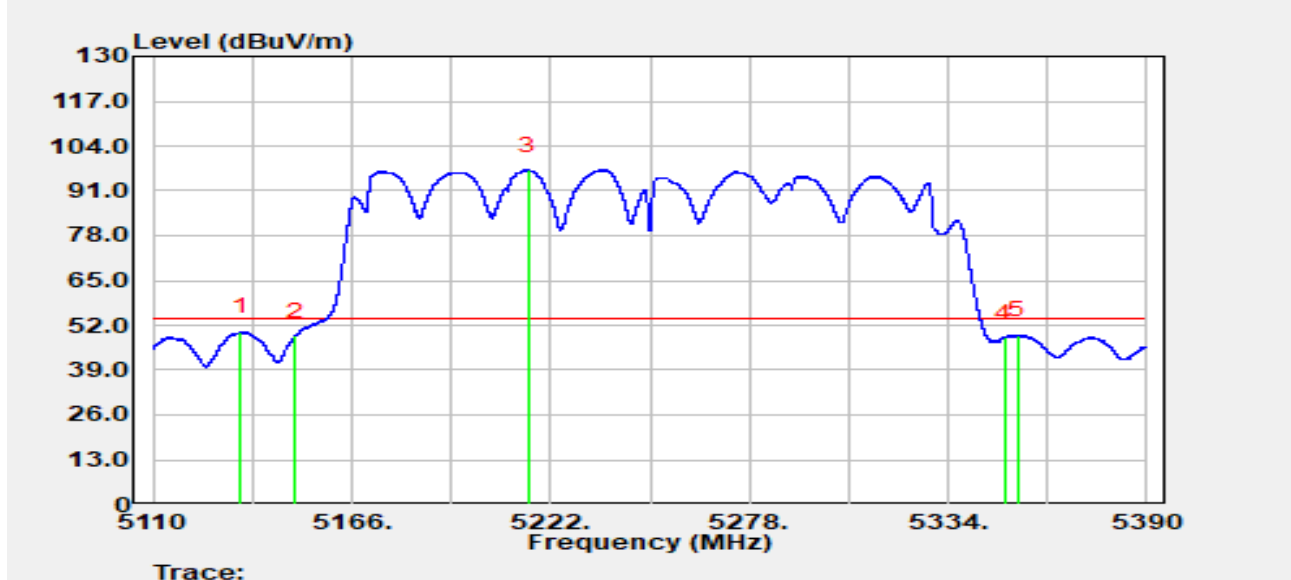


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5134.528	52.69	-2.53	50.16	-3.84	54.00	Average
2		5150.000	49.40	-0.54	48.86	-5.14	54.00	Average
3		5215.532	57.14	39.97	97.11	N/A	N/A	Average
4		5350.000	46.21	2.28	48.49	-5.51	54.00	Average
5		5353.544	48.76	0.42	49.18	-4.82	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

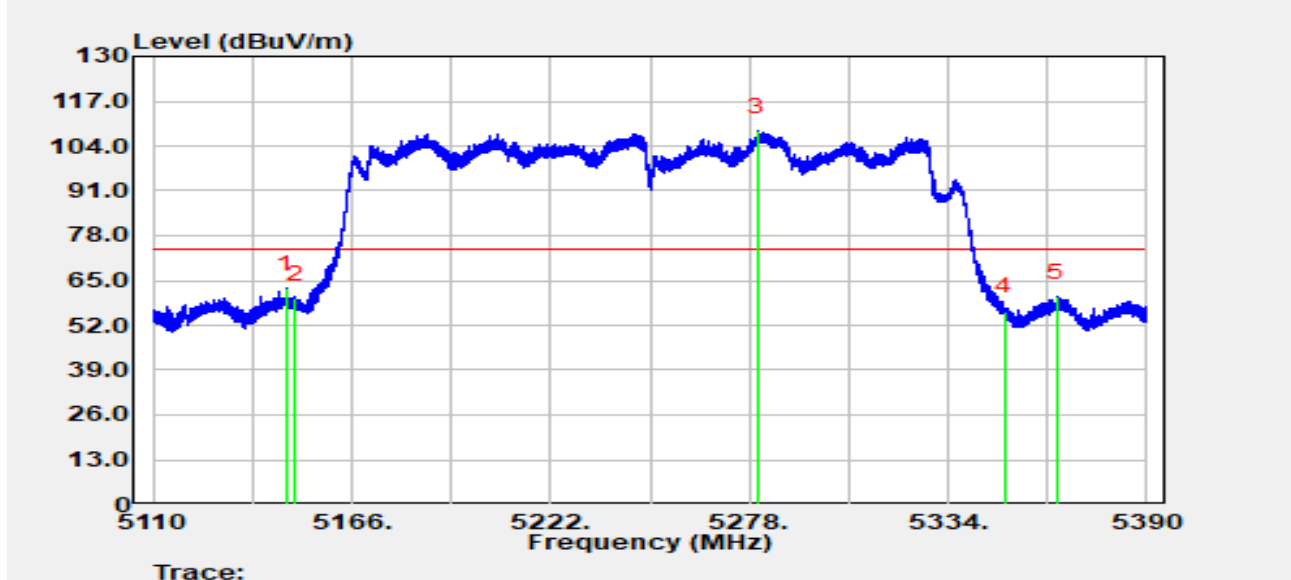


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.520	63.69	-1.05	62.64	-11.36	74.00	Peak
2		5150.000	60.35	-0.54	59.81	-14.19	74.00	Peak
3		5280.184	60.40	47.94	108.33	N/A	N/A	Peak
4		5350.000	53.87	2.28	56.15	-17.85	74.00	Peak
5		5364.632	61.44	-1.33	60.11	-13.89	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

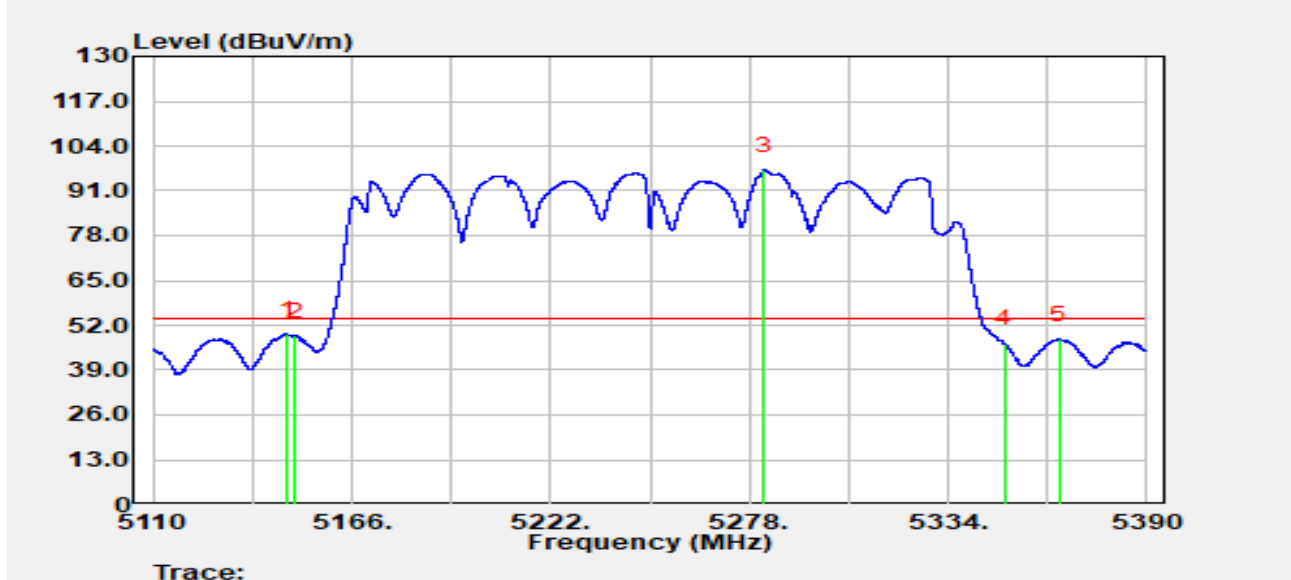


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.968	50.43	-0.97	49.46	-4.54	54.00	Average
2		5150.000	49.46	-0.54	48.92	-5.08	54.00	Average
3		5282.116	46.10	50.94	97.03	N/A	N/A	Average
4		5350.000	44.41	2.28	46.69	-7.31	54.00	Average
5		5365.276	49.31	-1.39	47.92	-6.08	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

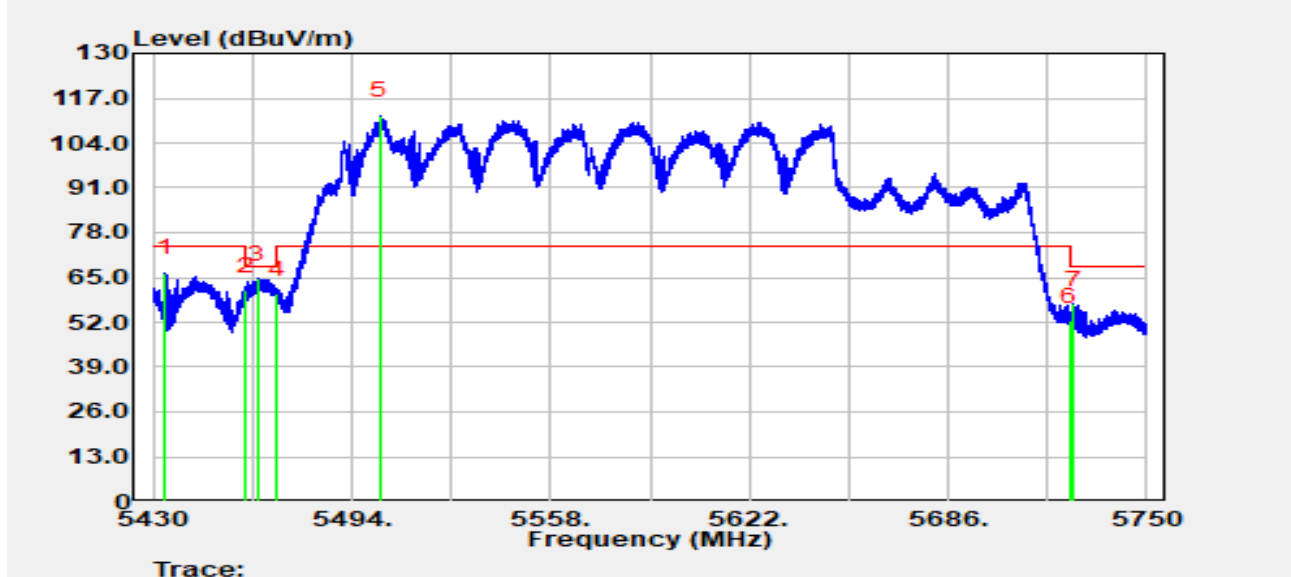


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5434.064	68.30	-1.85	66.44	-7.56	74.00	Peak
2		5460.000	61.84	-0.69	61.14	-7.06	68.20	Peak
3	*	5463.792	65.04	-0.41	64.63	-3.57	68.20	Peak
4		5470.000	59.20	1.00	60.20	-8.00	68.20	Peak
5		5503.024	67.31	44.69	112.00	N/A	N/A	Peak
6		5725.000	51.42	1.01	52.43	-15.77	68.20	Peak
7		5726.512	57.04	0.26	57.30	-10.90	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

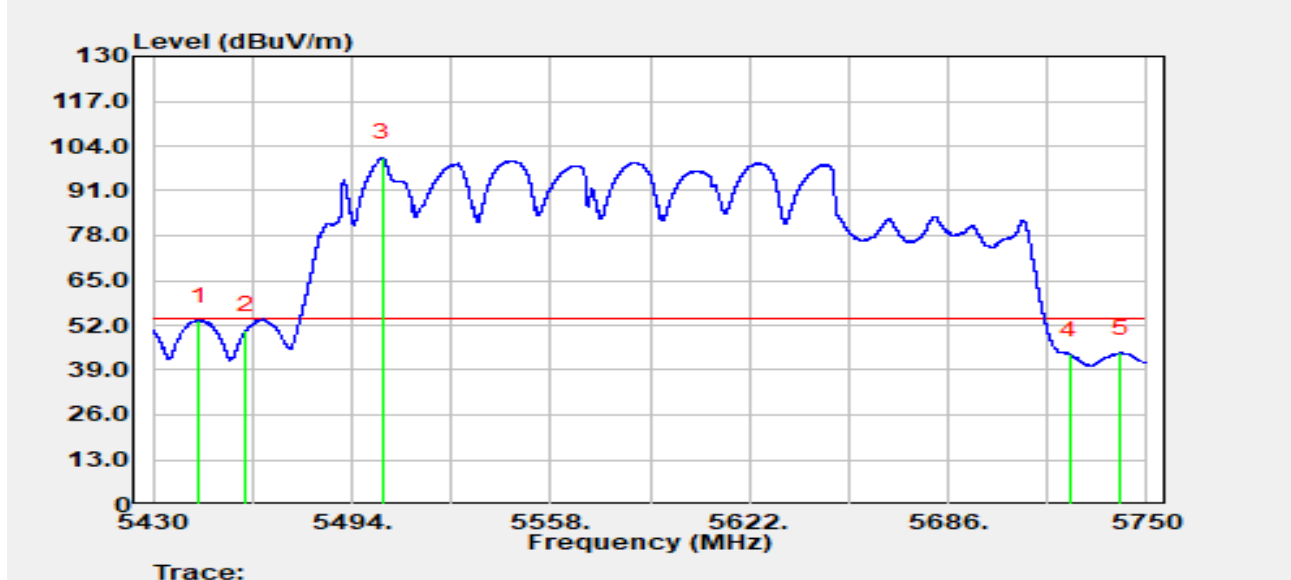


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5444.720	54.98	-1.57	53.41	-0.59	54.00	Average
2		5460.000	51.35	-0.69	50.66	-3.34	54.00	Average
3		5503.760	54.78	45.91	100.69	N/A	N/A	Average
4		5725.000	42.49	1.01	43.50	-10.50	54.00	Average
5		5741.392	45.81	-1.76	44.05	-9.95	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

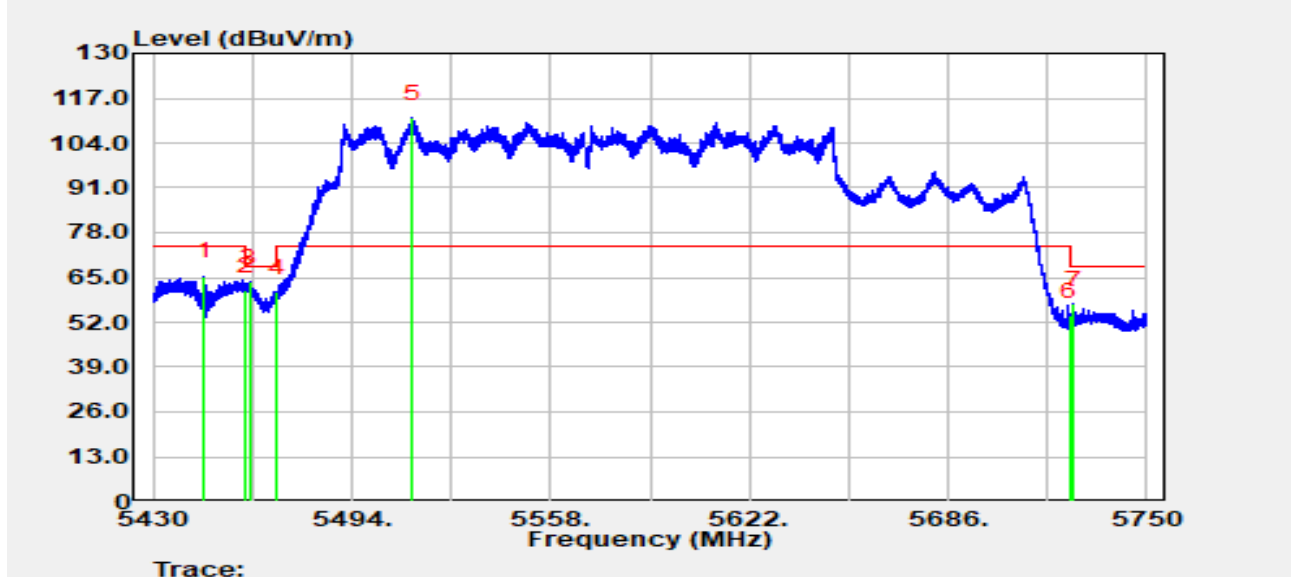


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5446.544	66.92	-1.50	65.42	-8.58	74.00	Peak
2		5460.000	61.99	-0.69	61.30	-6.90	68.20	Peak
3	*	5461.168	64.19	-0.65	63.55	-4.65	68.20	Peak
4		5470.000	59.64	1.00	60.64	-7.56	68.20	Peak
5		5513.392	66.62	44.53	111.15	N/A	N/A	Peak
6		5725.000	52.84	1.01	53.85	-14.35	68.20	Peak
7		5726.352	57.06	0.33	57.39	-10.81	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

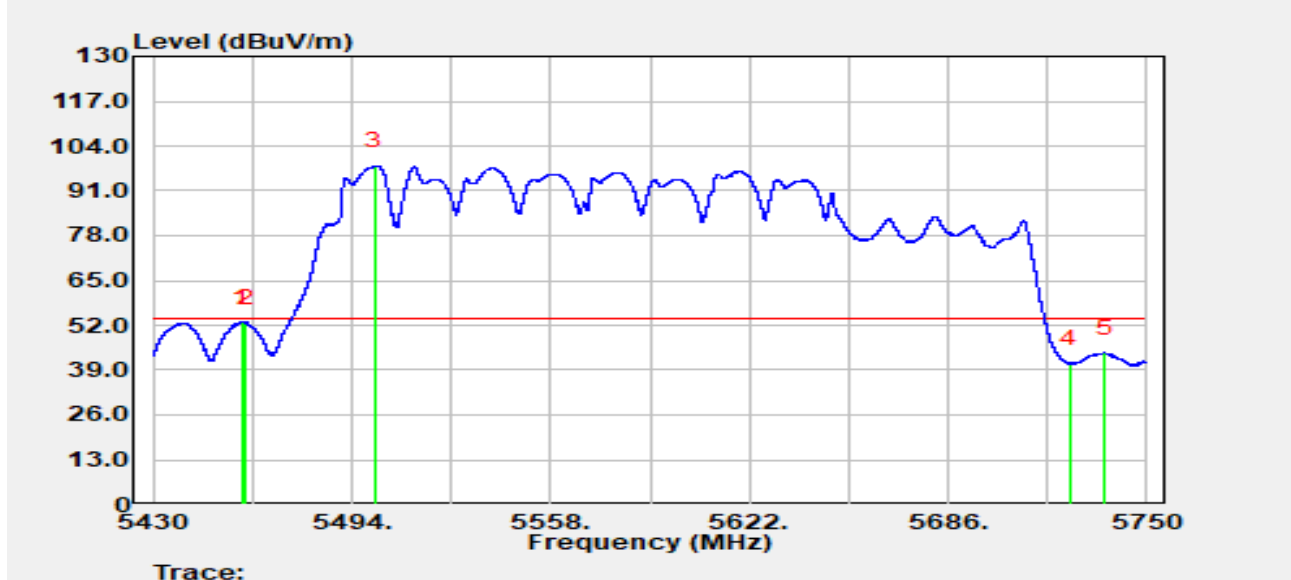


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.480	53.71	-0.79	52.92	-1.08	54.00	Average
2		5460.000	53.33	-0.69	52.64	-1.36	54.00	Average
3		5501.200	56.26	41.87	98.13	N/A	N/A	Average
4		5725.000	39.81	1.01	40.82	-13.18	54.00	Average
5		5736.528	45.42	-1.48	43.94	-10.06	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

WLAN Config 2:

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

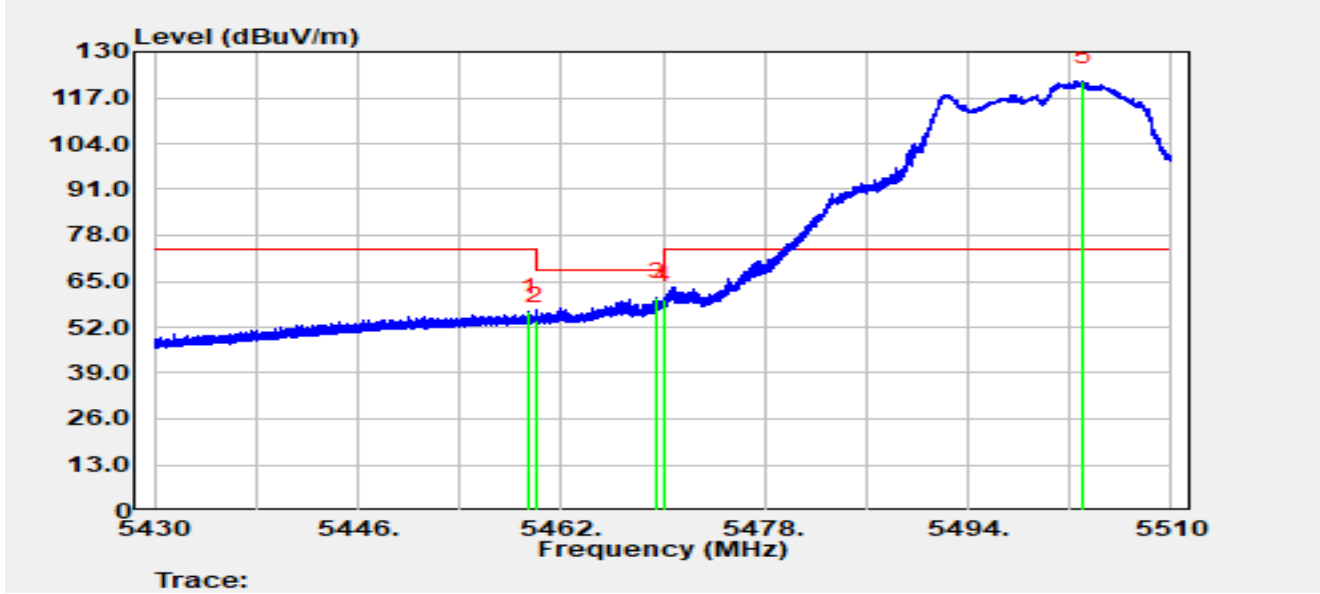


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.432	56.97	-0.76	56.21	-17.79	74.00	Peak
2		5460.000	54.43	-0.69	53.73	-14.47	68.20	Peak
3	*	5469.512	59.50	0.85	60.35	-7.85	68.20	Peak
4		5470.000	58.75	1.00	59.75	-8.45	68.20	Peak
5		5503.104	76.75	44.86	121.61	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

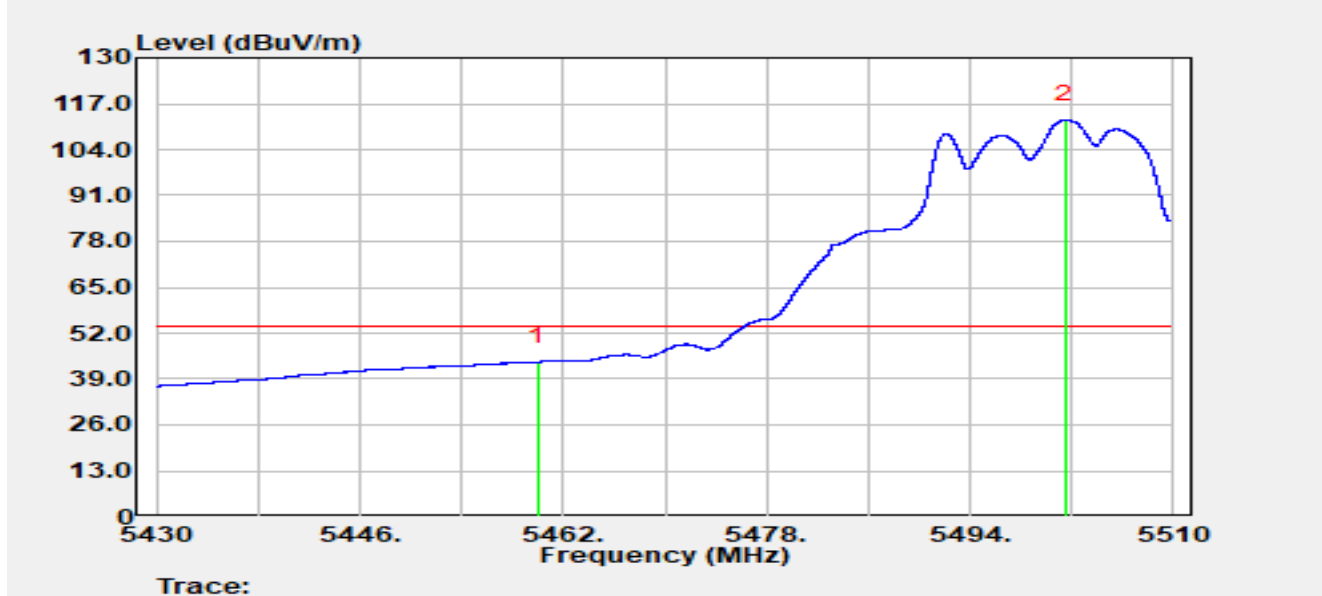


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	44.56	-0.69	43.87	-10.13	54.00	Average
2		5501.496	70.28	42.13	112.41	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

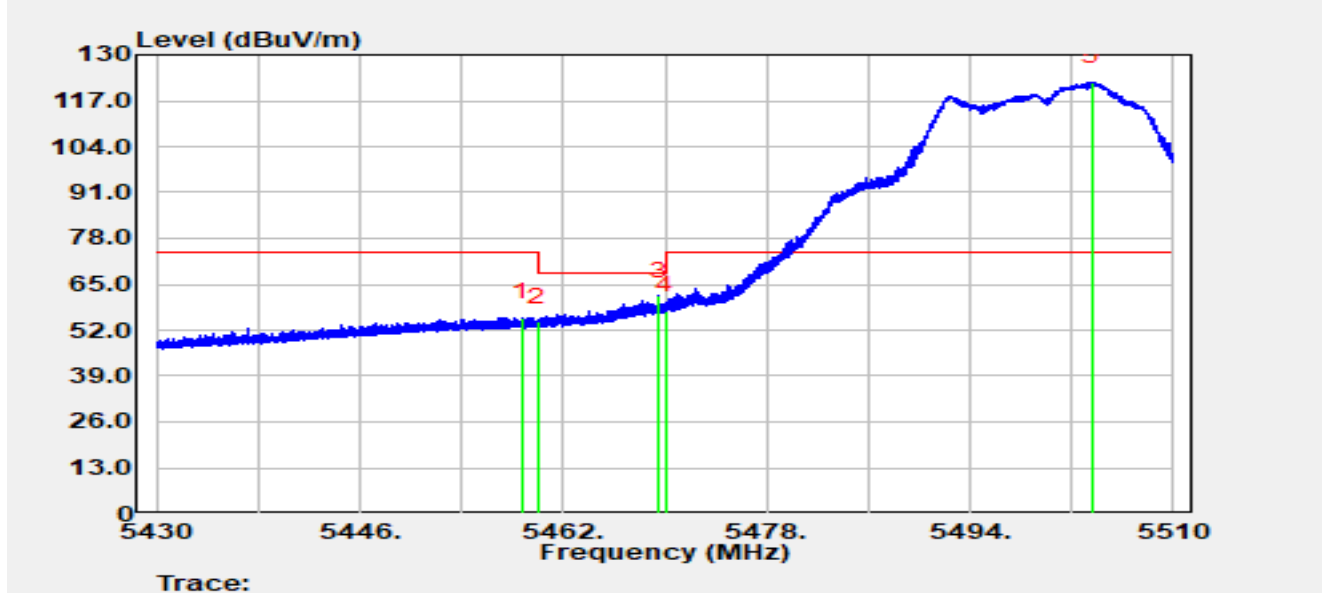


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.736	56.44	-0.82	55.63	-18.37	74.00	Peak
2		5460.000	55.14	-0.69	54.45	-13.75	68.20	Peak
3	*	5469.488	60.80	0.84	61.65	-6.55	68.20	Peak
4		5470.000	56.53	1.00	57.53	-10.67	68.20	Peak
5		5503.624	76.55	45.75	122.31	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

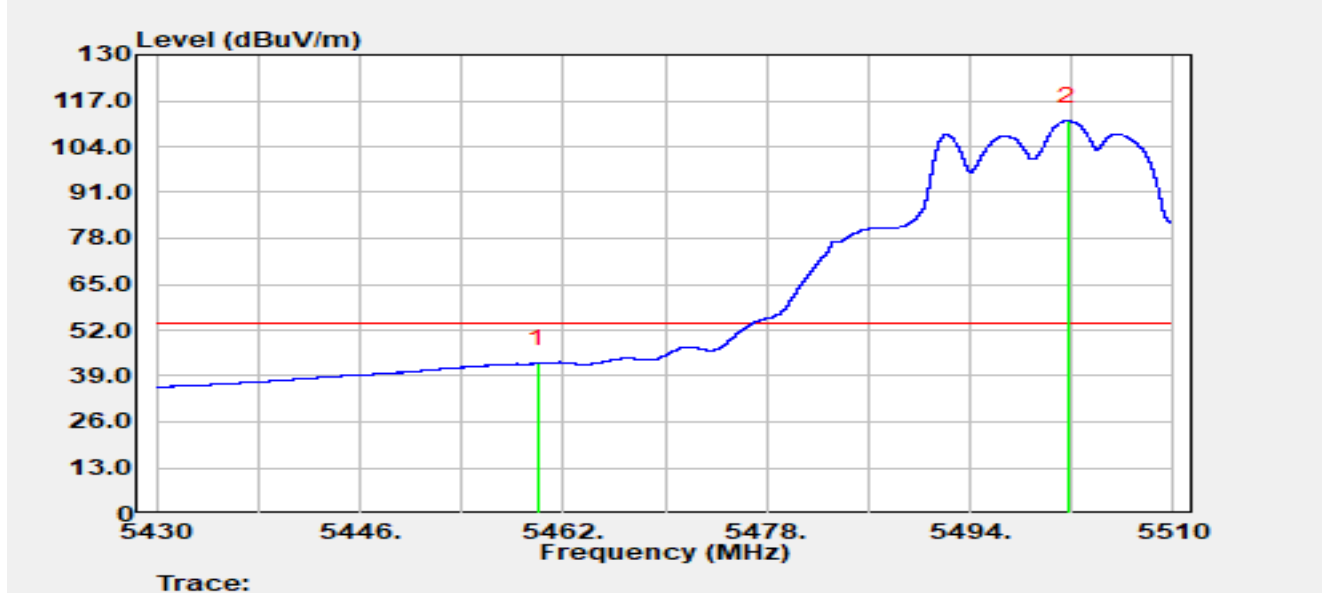


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	43.20	-0.69	42.51	-11.49	54.00	Average
2		5501.648	69.05	42.27	111.32	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

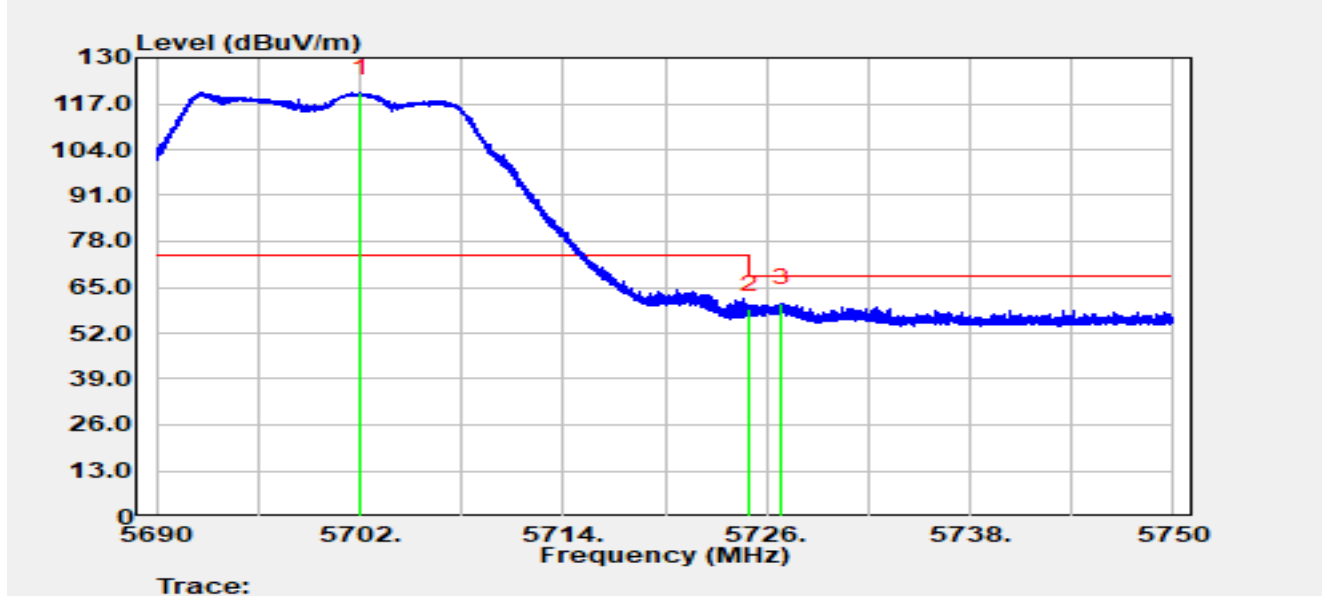


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.048	80.34	39.81	120.15	N/A	N/A	Peak
2		5725.000	57.71	1.01	58.72	-9.48	68.20	Peak
3	*	5726.876	60.29	0.10	60.38	-7.82	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

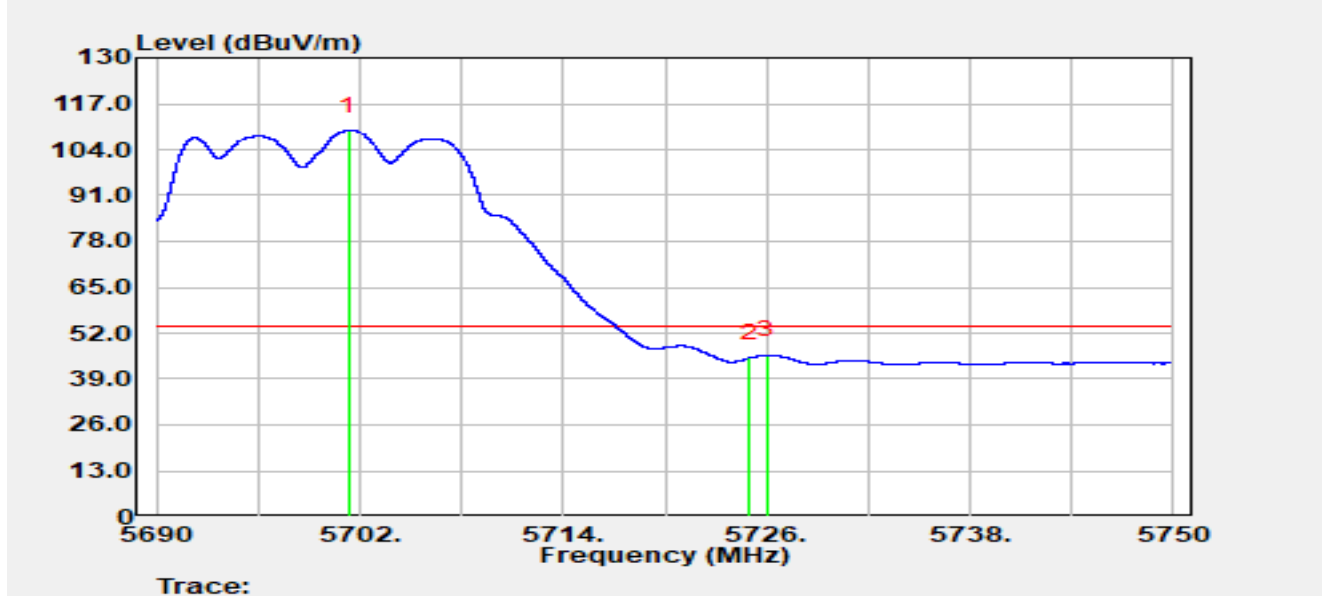


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.358	70.33	39.04	109.37	N/A	N/A	Average
2		5725.000	43.93	1.01	44.94	-9.06	54.00	Average
3	*	5726.042	45.33	0.43	45.76	-8.24	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

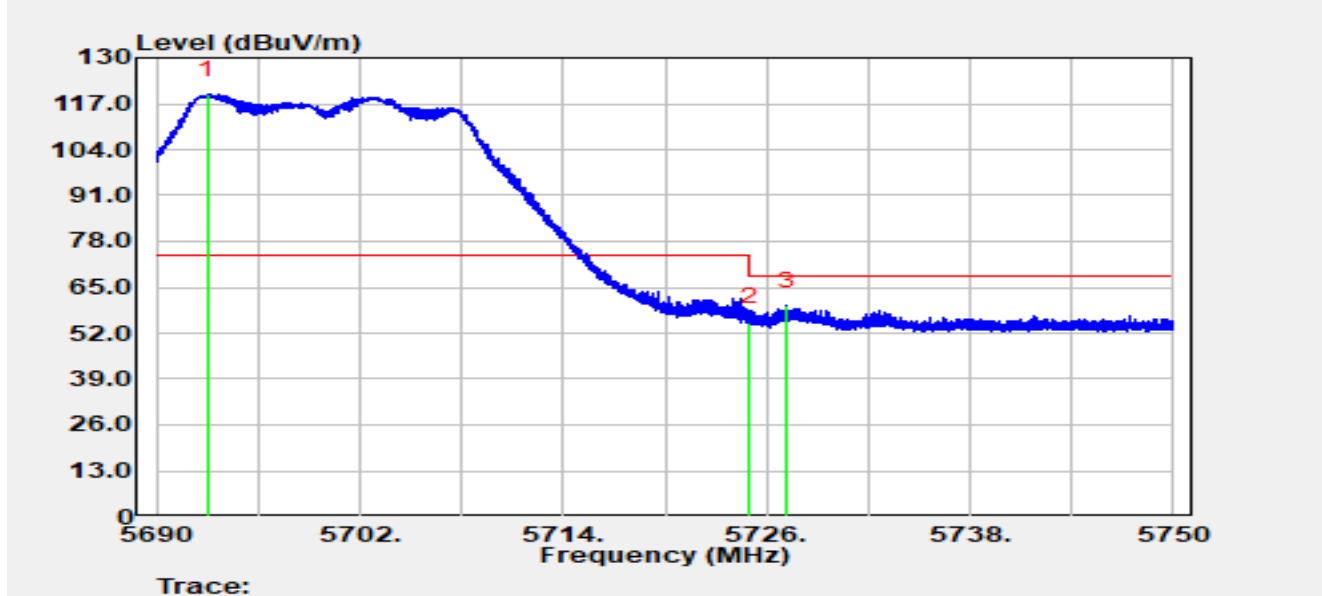


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.988	75.73	43.89	119.62	N/A	N/A	Peak
2		5725.000	54.14	1.01	55.15	-13.05	68.20	Peak
3	*	5727.206	59.75	-0.05	59.71	-8.49	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

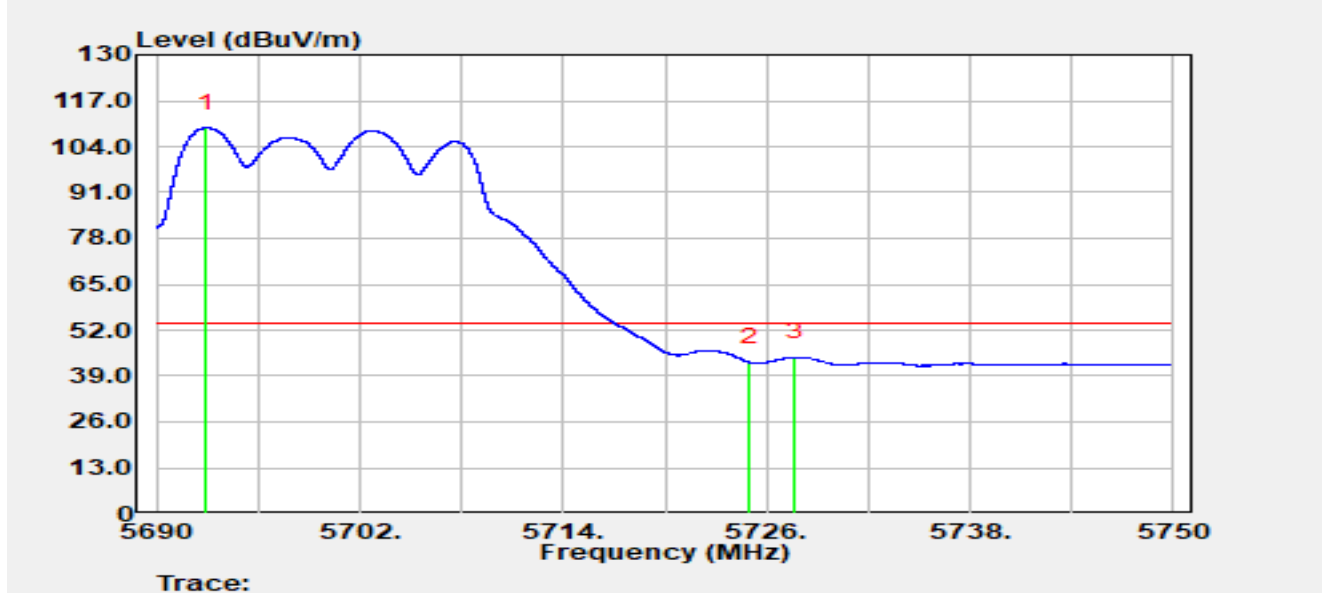


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.928	65.41	43.86	109.27	N/A	N/A	Average
2		5725.000	41.89	1.01	42.89	-11.11	54.00	Average
3	*	5727.638	44.53	-0.14	44.39	-9.61	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5745 MHz		

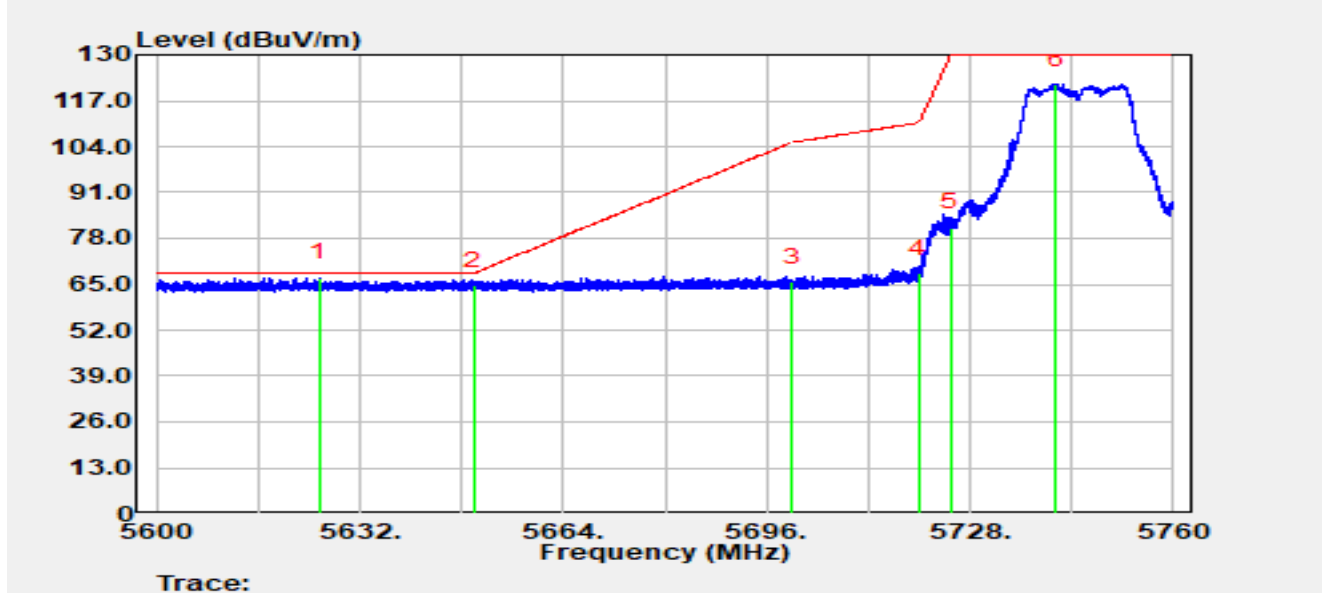


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5625.600	70.22	-3.37	66.85	-1.35	68.20	Peak
2		5650.000	68.19	-3.65	64.54	-3.66	68.20	Peak
3		5700.000	69.05	-3.47	65.57	-39.63	105.20	Peak
4		5720.000	71.59	-3.45	68.14	-42.66	110.80	Peak
5		5725.000	84.62	-3.47	81.15	-48.85	130.00	Peak
6		5741.408	125.24	-3.62	121.62	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5745 MHz		

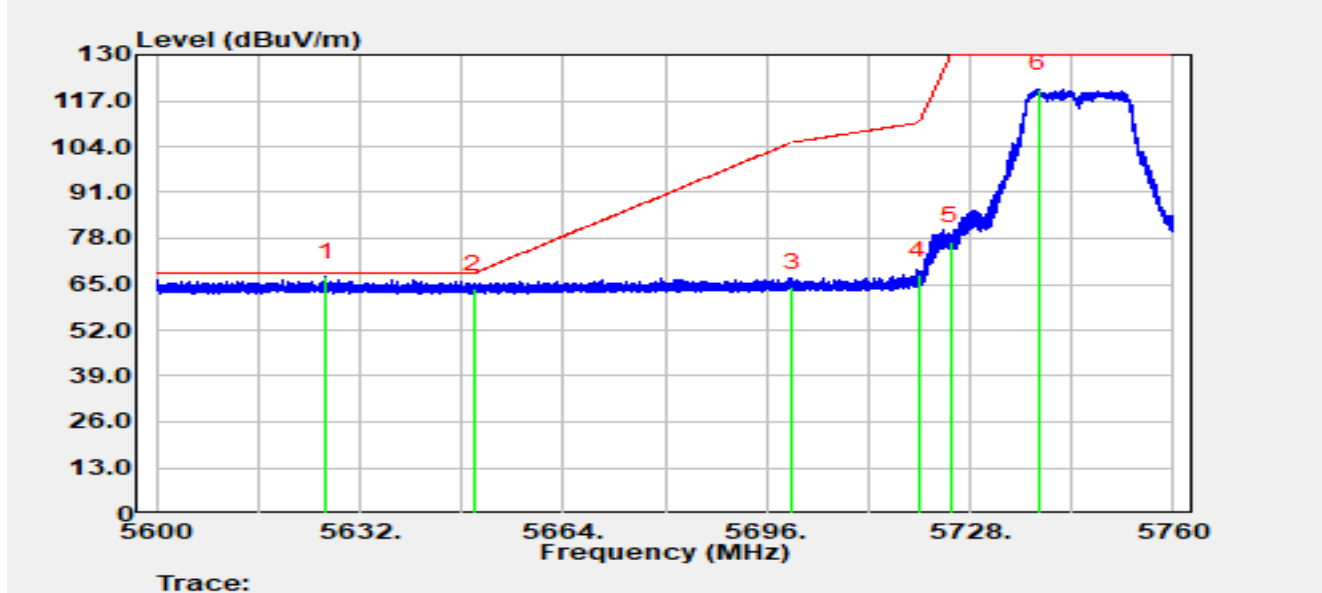


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5626.752	70.43	-3.39	67.03	-1.17	68.20	Peak
2		5650.000	67.26	-3.65	63.62	-4.58	68.20	Peak
3		5700.000	67.55	-3.47	64.08	-41.12	105.20	Peak
4		5720.000	71.09	-3.45	67.63	-43.17	110.80	Peak
5		5725.000	80.61	-3.47	77.14	-52.86	130.00	Peak
6		5738.688	123.93	-3.59	120.33	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

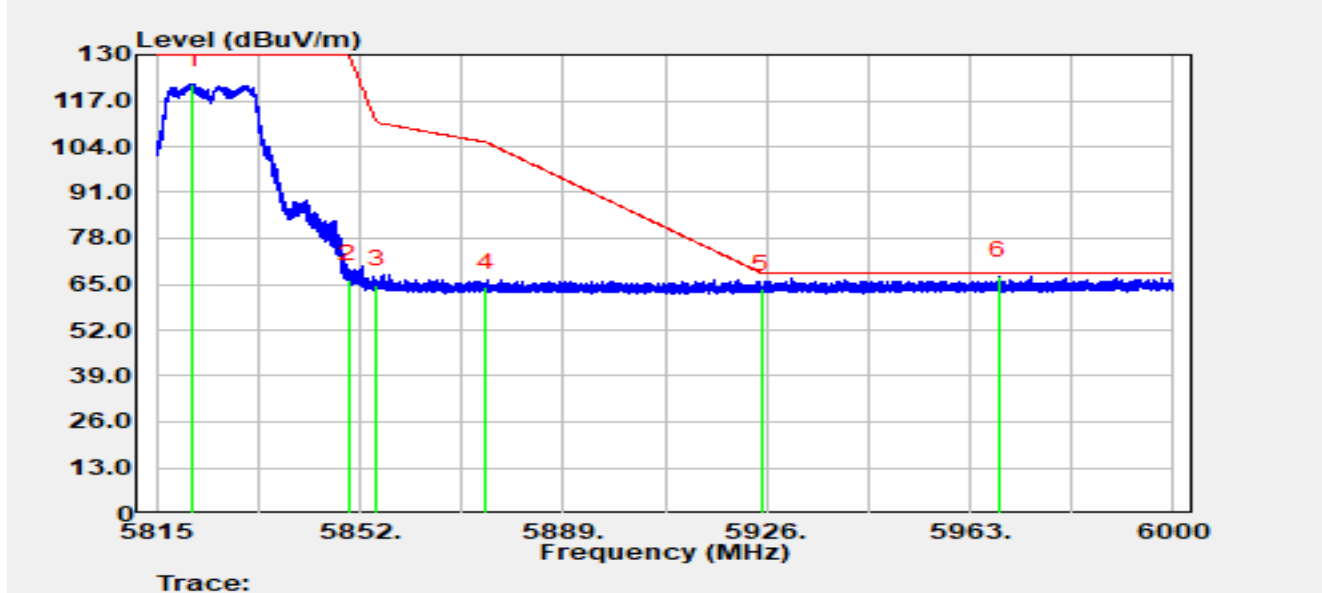


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5821.604	125.37	-3.77	121.60	N/A	N/A	Peak
2		5850.000	70.15	-3.75	66.40	-63.60	130.00	Peak
3		5855.000	68.61	-3.75	64.86	-45.94	110.80	Peak
4		5875.000	67.89	-3.82	64.06	-41.14	105.20	Peak
5		5925.000	67.24	-3.71	63.54	-4.66	68.20	Peak
6	*	5968.291	70.91	-3.64	67.27	-0.93	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

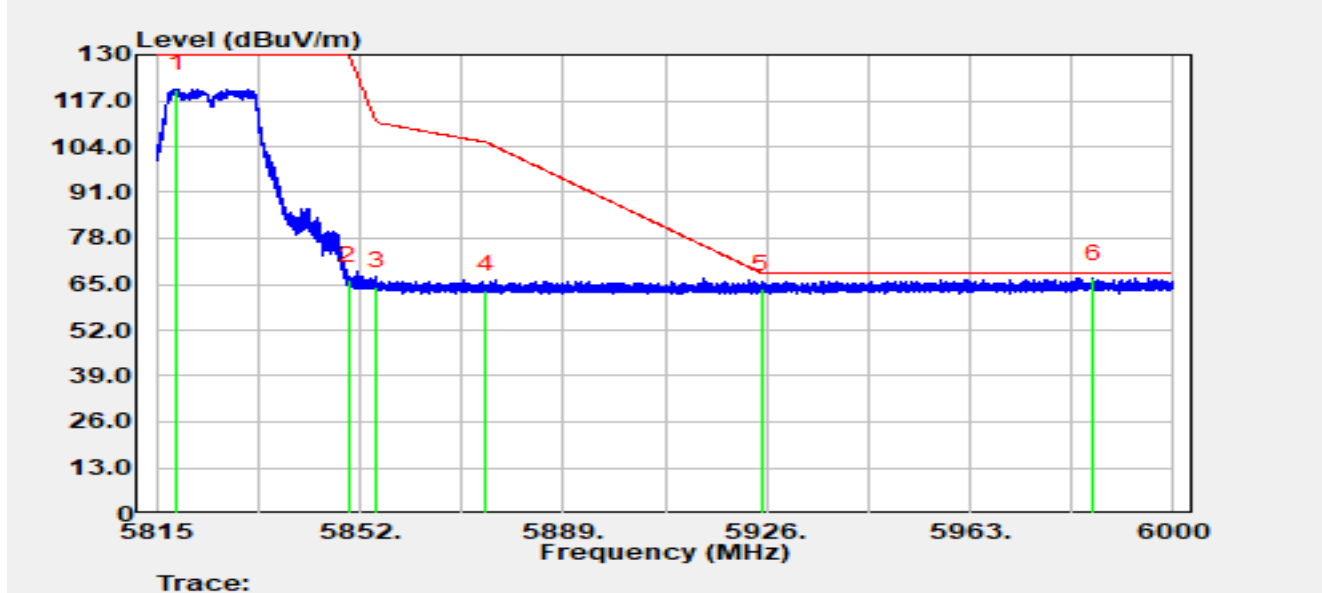


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5818.737	124.22	-3.79	120.43	N/A	N/A	Peak
2		5850.000	69.91	-3.75	66.15	-63.85	130.00	Peak
3		5855.000	68.21	-3.75	64.46	-46.34	110.80	Peak
4		5875.000	67.28	-3.82	63.46	-41.74	105.20	Peak
5		5925.000	67.28	-3.71	63.57	-4.63	68.20	Peak
6	*	5985.311	70.29	-3.68	66.62	-1.58	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

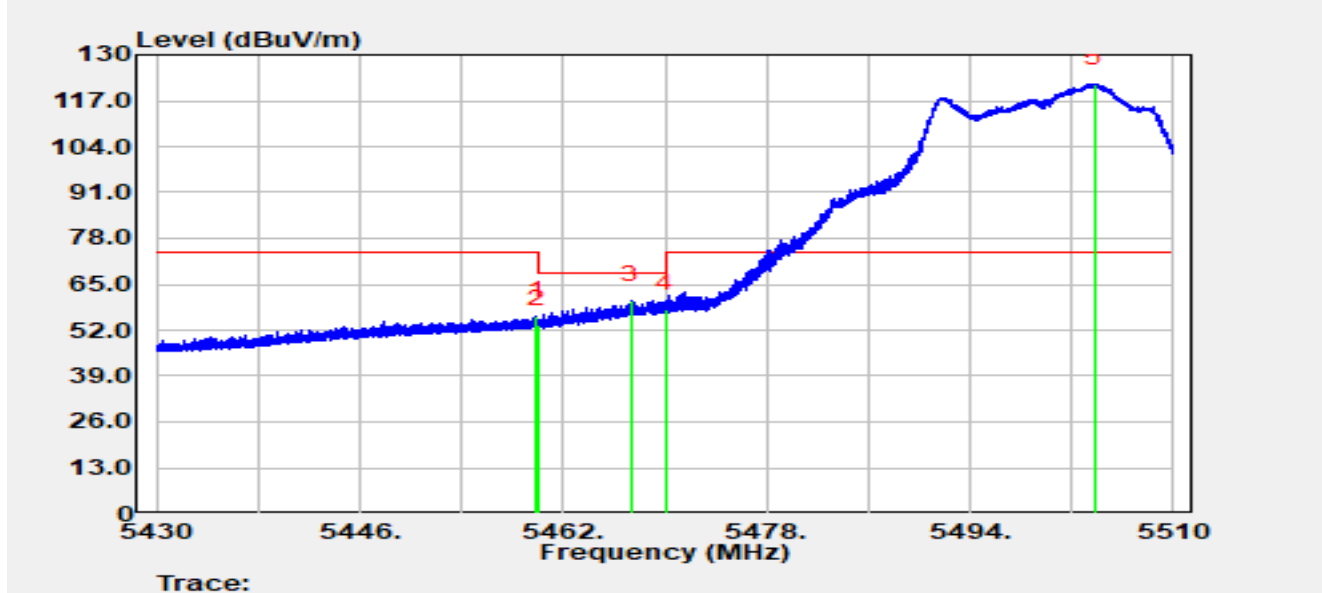


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.904	56.64	-0.71	55.94	-18.06	74.00	Peak
2		5460.000	54.29	-0.69	53.59	-14.61	68.20	Peak
3	*	5467.328	60.18	0.19	60.37	-7.83	68.20	Peak
4		5470.000	57.08	1.00	58.08	-10.12	68.20	Peak
5		5503.768	75.79	45.92	121.71	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

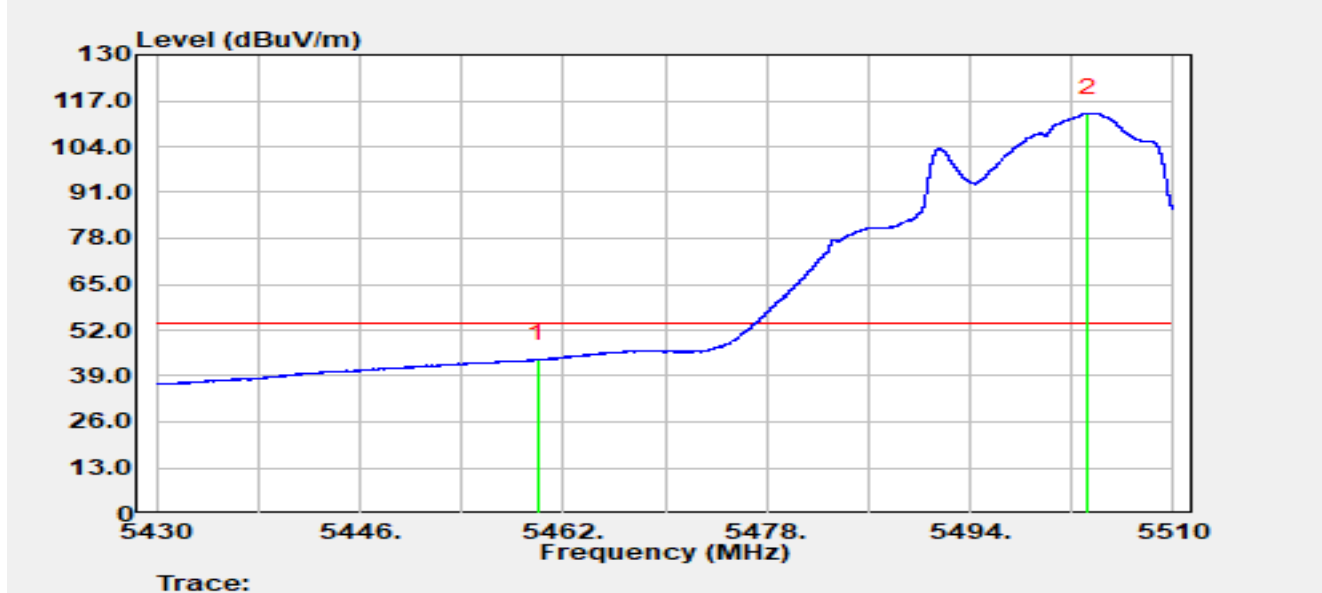


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	44.39	-0.69	43.69	-10.31	54.00	Average
2		5503.304	68.21	45.24	113.45	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

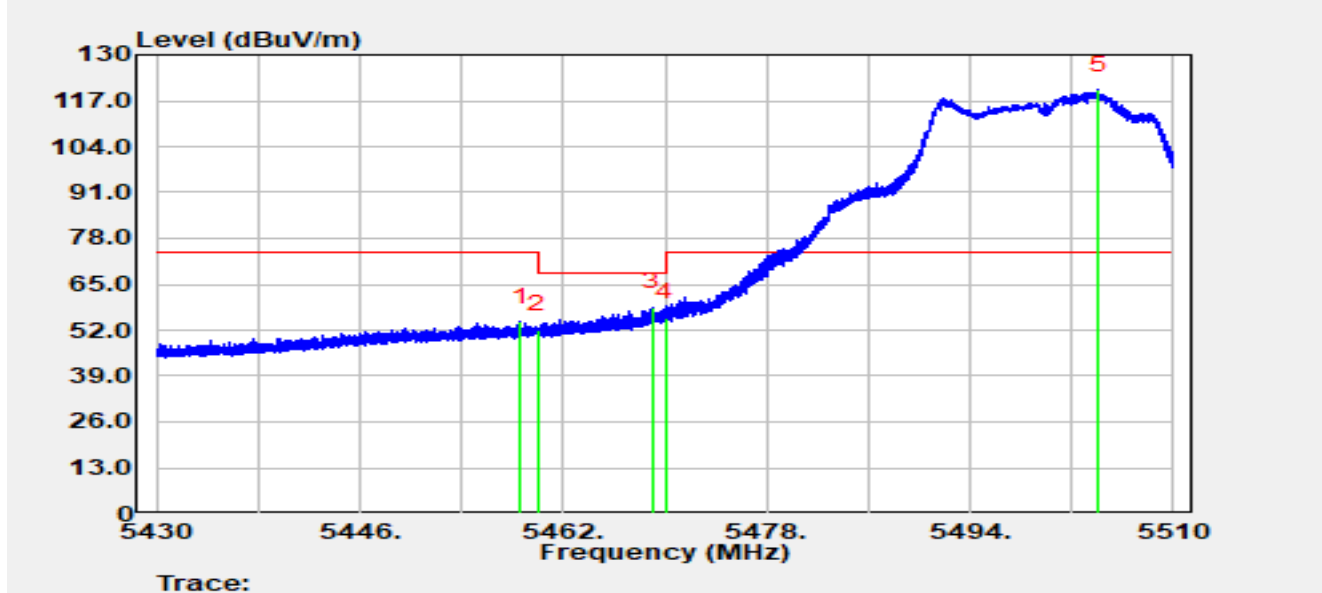


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.592	55.05	-0.80	54.25	-19.75	74.00	Peak
2		5460.000	52.76	-0.69	52.06	-16.14	68.20	Peak
3	*	5468.984	57.72	0.67	58.39	-9.81	68.20	Peak
4		5470.000	54.60	1.00	55.60	-12.60	68.20	Peak
5		5504.120	73.78	46.29	120.07	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

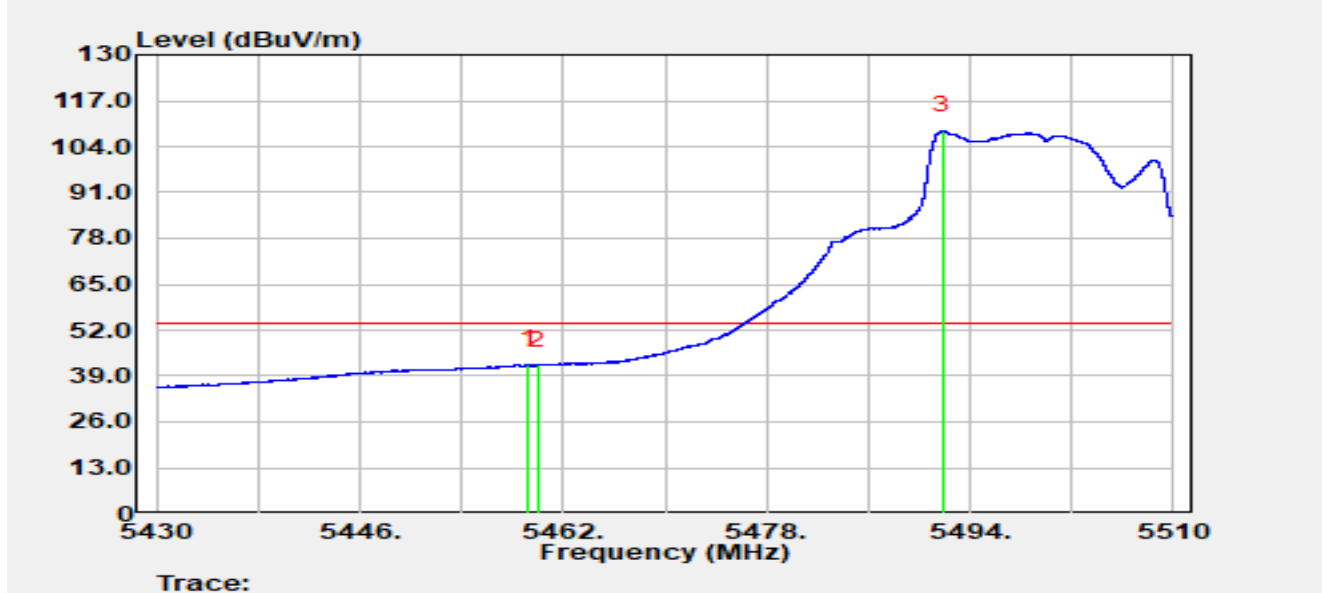


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.224	42.98	-0.79	42.20	-11.80	54.00	Average
2		5460.000	42.83	-0.69	42.14	-11.86	54.00	Average
3		5491.872	60.73	47.73	108.46	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

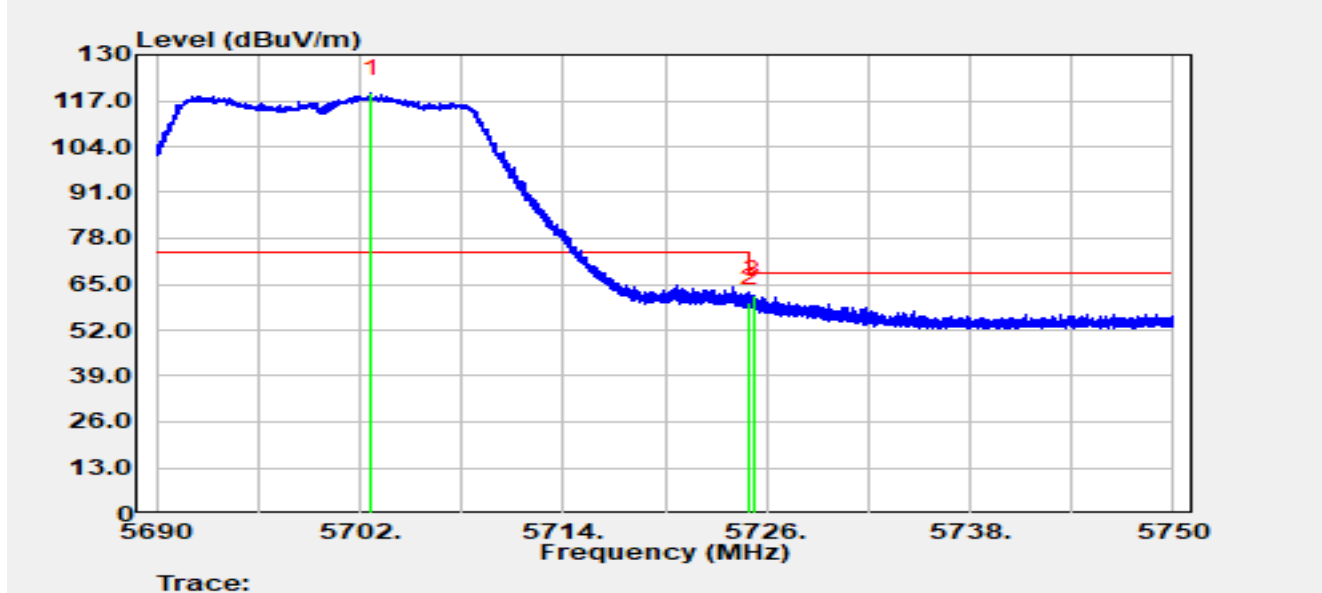


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.696	78.73	40.34	119.07	N/A	N/A	Peak
2		5725.000	58.61	1.01	59.61	-8.59	68.20	Peak
3	*	5725.196	61.14	0.89	62.03	-6.17	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

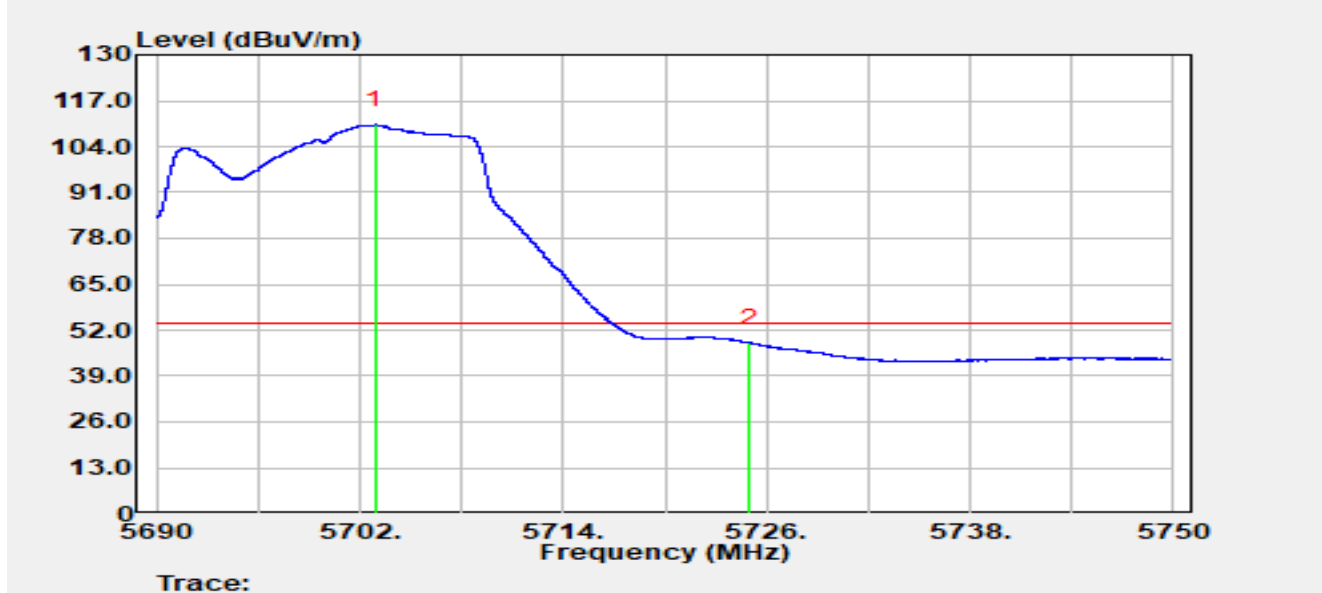


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.882	69.66	40.47	110.13	N/A	N/A	Average
2	*	5725.000	47.46	1.01	48.47	-5.53	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

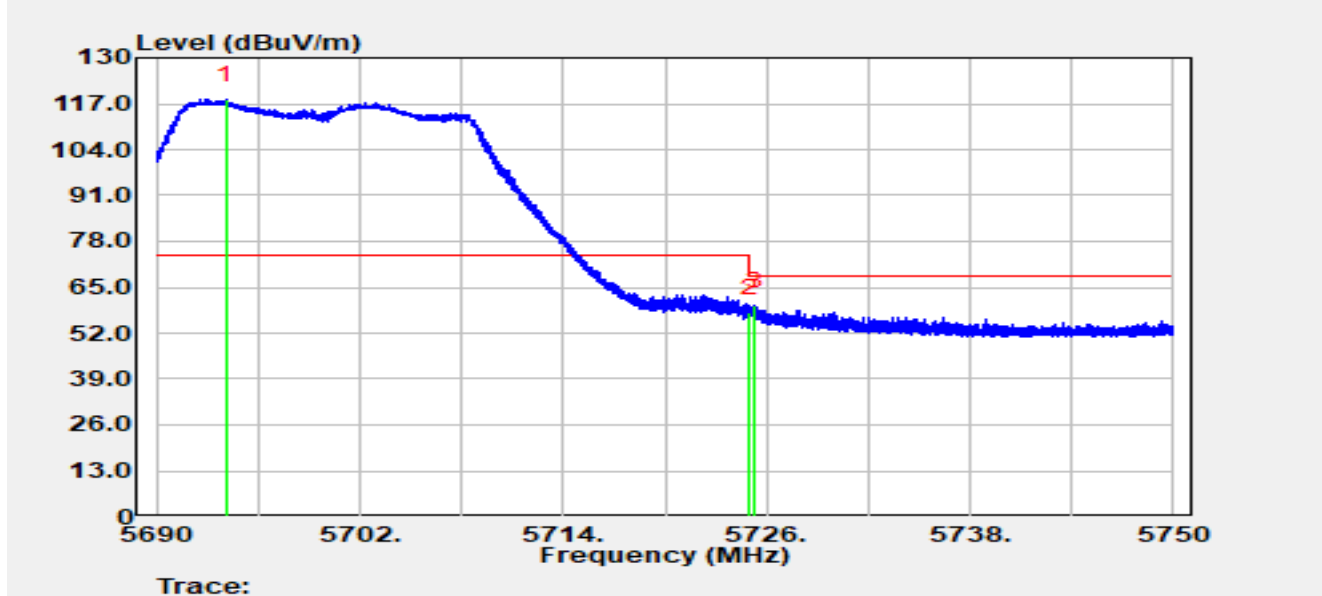


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5694.134	74.24	43.94	118.18	N/A	N/A	Peak
2		5725.000	56.65	1.01	57.66	-10.54	68.20	Peak
3	*	5725.316	58.95	0.83	59.78	-8.42	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

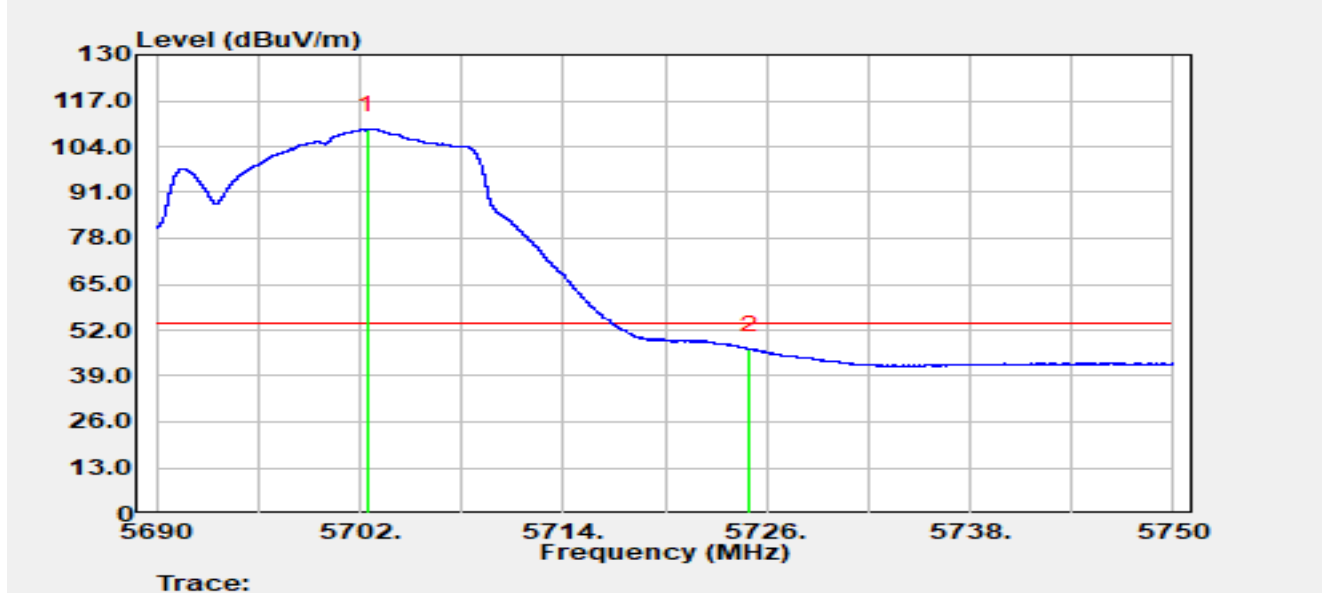


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.420	68.67	40.13	108.80	N/A	N/A	Average
2	*	5725.000	45.59	1.01	46.60	-7.40	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

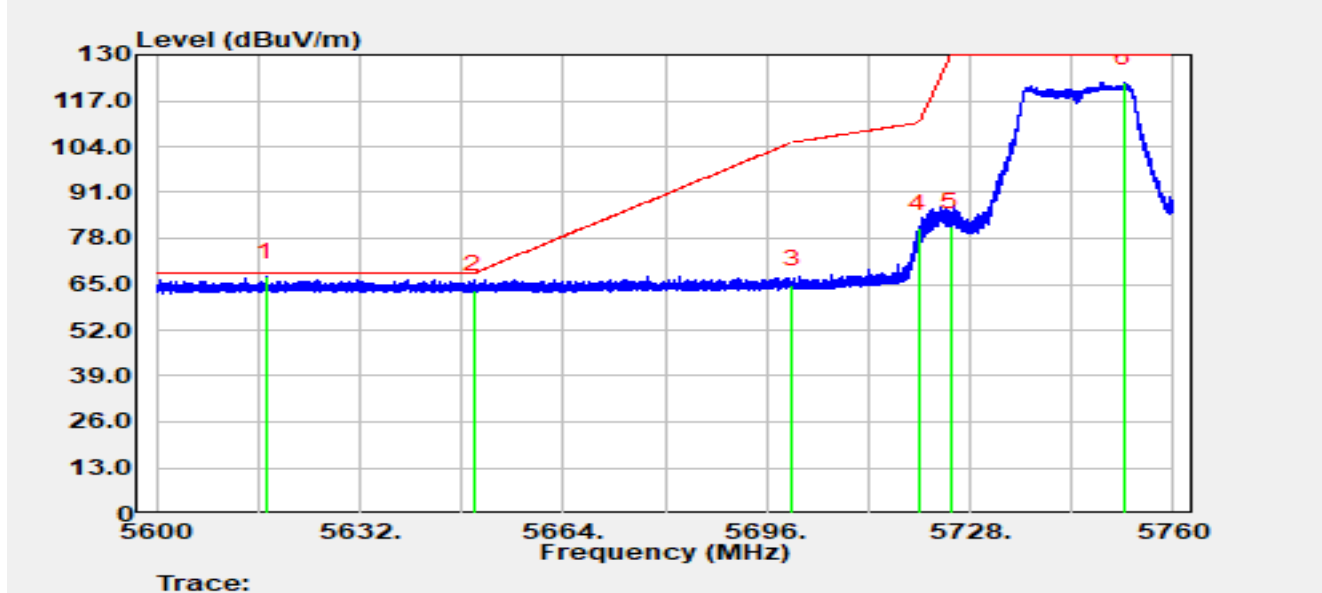


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5617.152	70.55	-3.42	67.14	-1.06	68.20	Peak
2		5650.000	67.00	-3.65	63.35	-4.85	68.20	Peak
3		5700.000	68.27	-3.47	64.79	-40.41	105.20	Peak
4		5720.000	84.34	-3.45	80.88	-29.92	110.80	Peak
5		5725.000	84.75	-3.47	81.28	-48.72	130.00	Peak
6		5752.224	125.75	-3.65	122.09	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

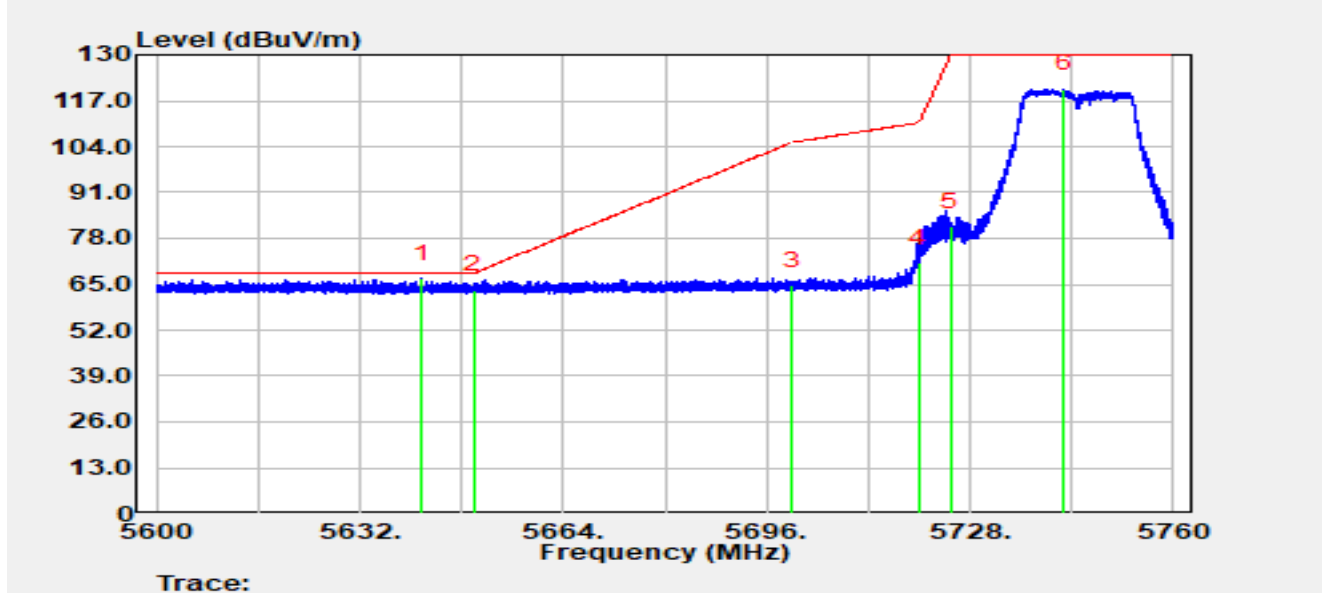


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.808	70.19	-3.65	66.54	-1.66	68.20	Peak
2		5650.000	67.13	-3.65	63.49	-4.71	68.20	Peak
3		5700.000	68.02	-3.47	64.55	-40.65	105.20	Peak
4		5720.000	74.42	-3.45	70.96	-39.84	110.80	Peak
5		5725.000	84.84	-3.47	81.38	-48.62	130.00	Peak
6		5742.672	123.87	-3.63	120.24	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

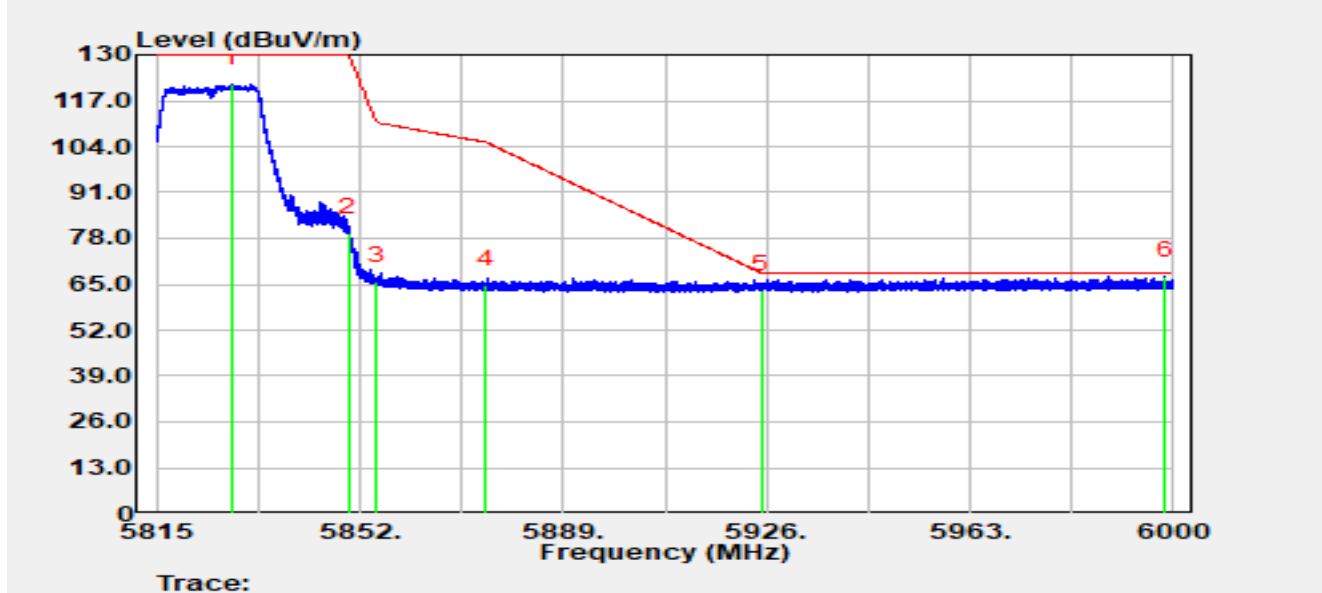


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5828.727	125.57	-3.74	121.83	N/A	N/A	Peak
2		5850.000	83.37	-3.75	79.61	-50.39	130.00	Peak
3		5855.000	69.69	-3.75	65.94	-44.86	110.80	Peak
4		5875.000	68.70	-3.82	64.88	-40.32	105.20	Peak
5		5925.000	67.13	-3.71	63.43	-4.77	68.20	Peak
6	*	5998.409	70.97	-3.72	67.25	-0.95	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

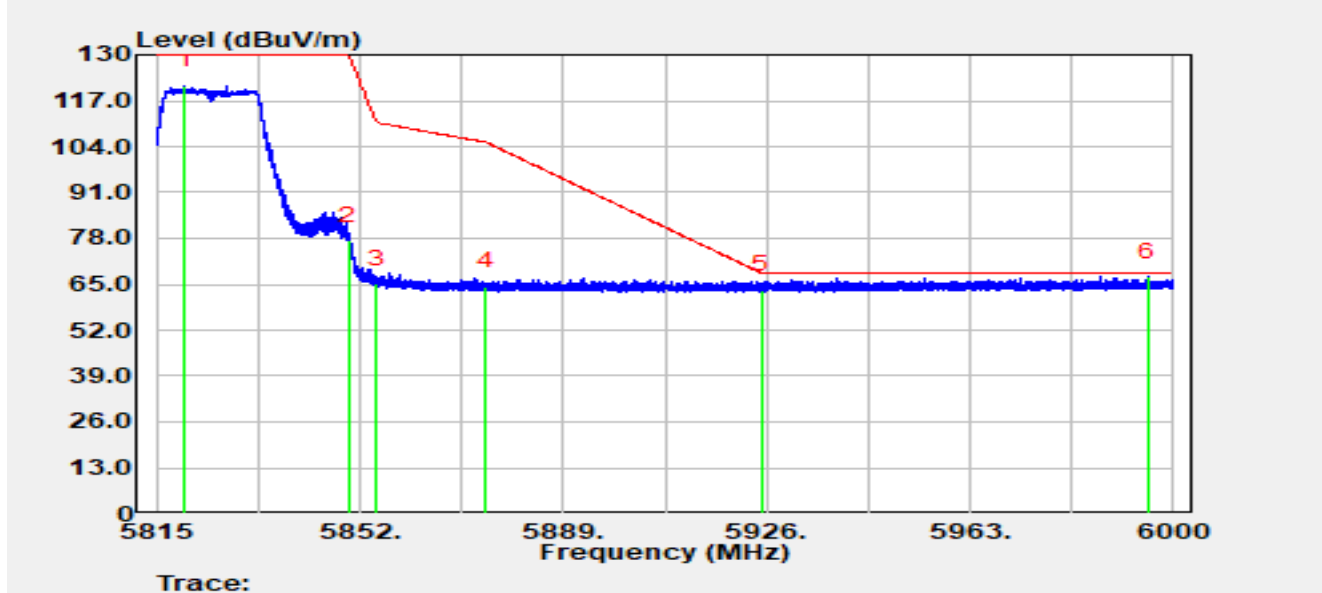


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5820.199	125.13	-3.78	121.34	N/A	N/A	Peak
2		5850.000	81.22	-3.75	77.47	-52.53	130.00	Peak
3		5855.000	68.99	-3.75	65.24	-45.56	110.80	Peak
4		5875.000	68.17	-3.82	64.34	-40.86	105.20	Peak
5		5925.000	67.07	-3.71	63.37	-4.83	68.20	Peak
6	*	5995.283	70.90	-3.72	67.19	-1.01	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

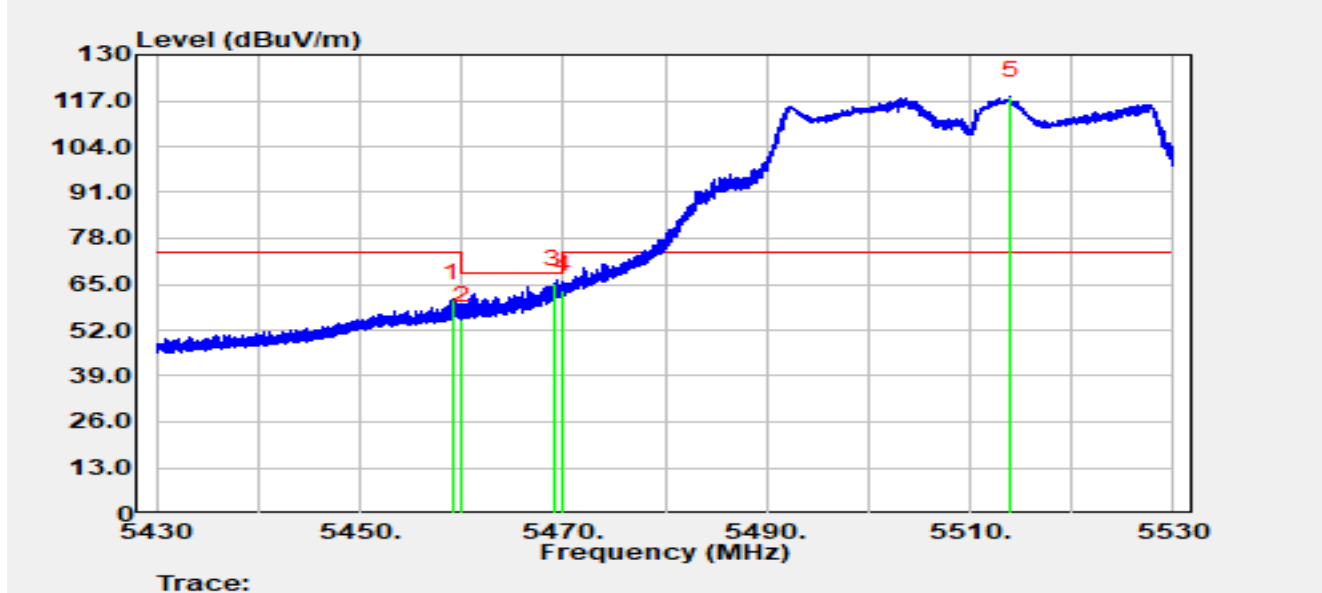


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.150	61.68	-0.79	60.89	-13.11	74.00	Peak
2		5460.000	55.51	-0.69	54.82	-13.38	68.20	Peak
3	*	5469.100	64.49	0.73	65.23	-2.97	68.20	Peak
4		5470.000	62.31	1.00	63.31	-4.89	68.20	Peak
5		5513.960	73.57	44.89	118.45	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

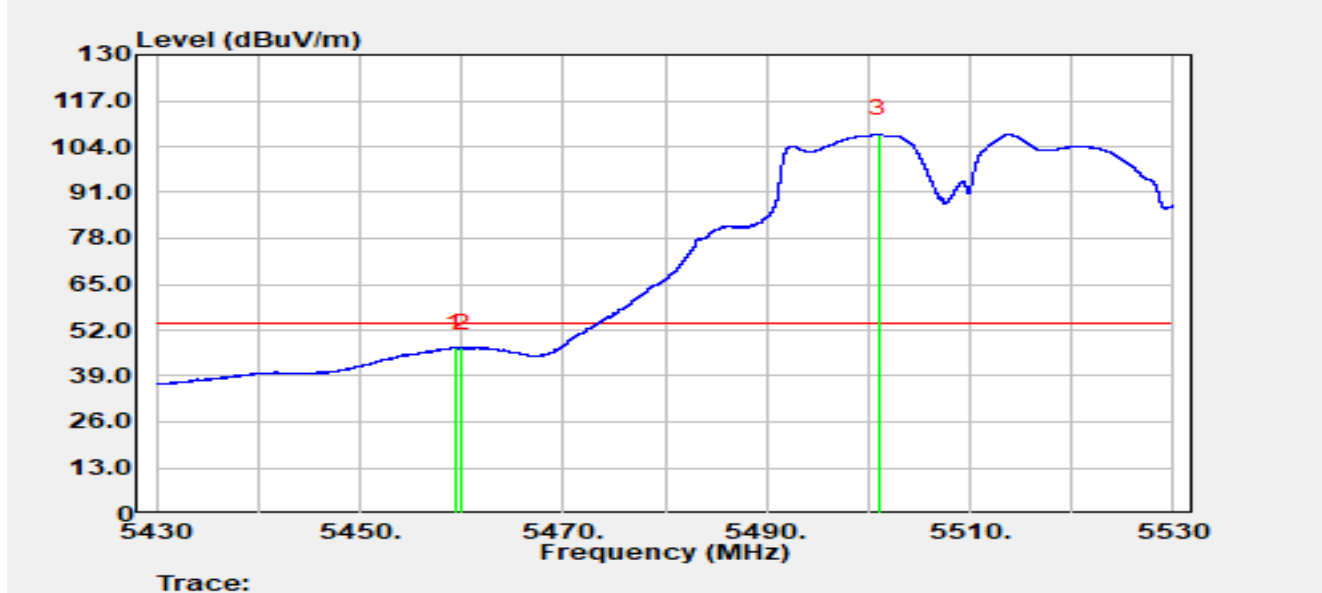


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.370	47.86	-0.77	47.09	-6.91	54.00	Average
2		5460.000	47.67	-0.69	46.98	-7.02	54.00	Average
3		5500.990	65.83	41.63	107.46	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

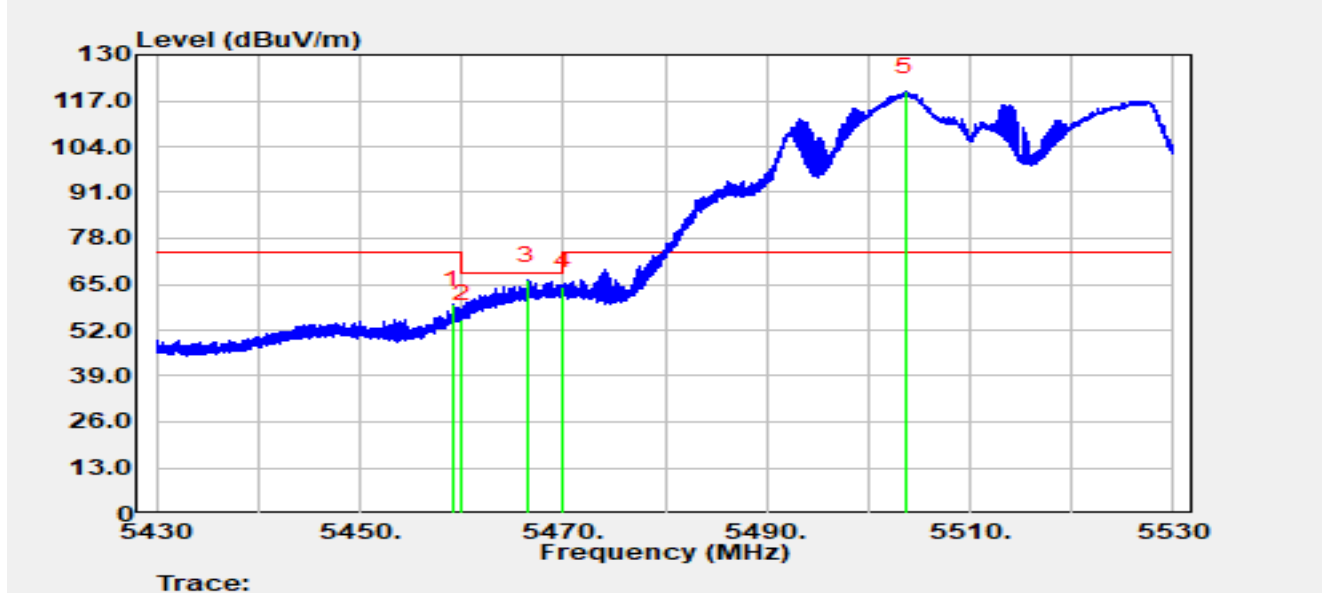


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.110	59.99	-0.80	59.19	-14.81	74.00	Peak
2		5460.000	55.75	-0.69	55.05	-13.15	68.20	Peak
3	*	5466.440	66.15	-0.01	66.15	-2.05	68.20	Peak
4		5470.000	63.28	1.00	64.29	-3.91	68.20	Peak
5		5503.660	73.82	45.80	119.62	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

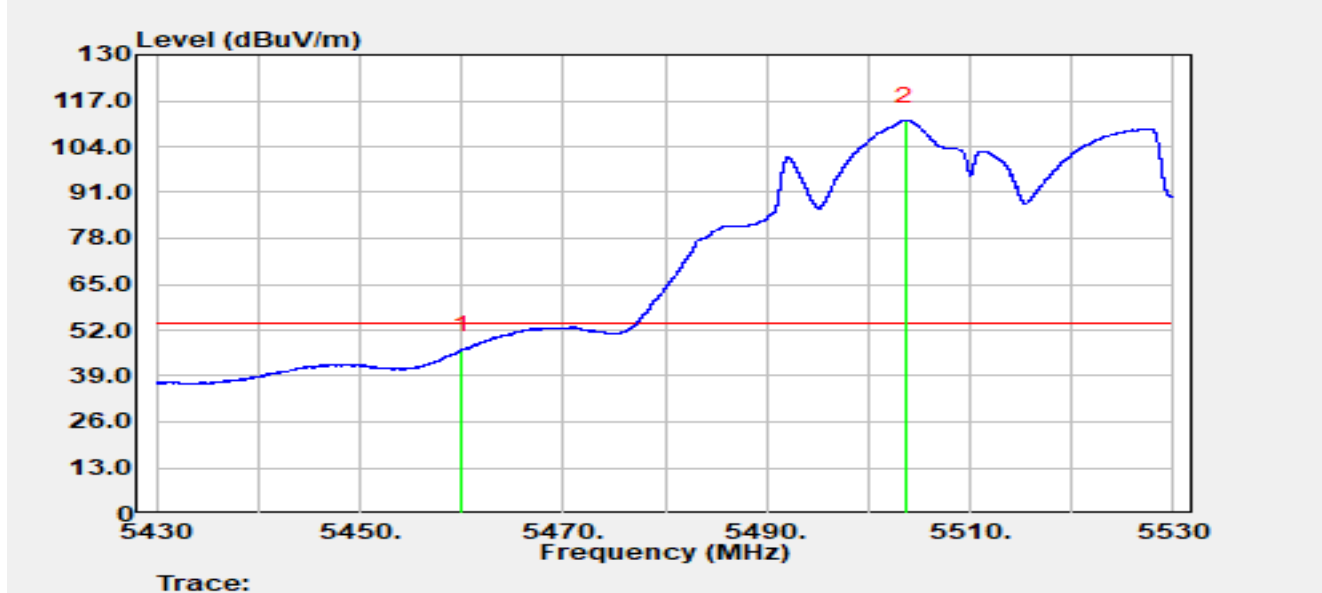


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	46.94	-0.69	46.25	-7.75	54.00	Average
2		5503.660	65.54	45.80	111.33	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

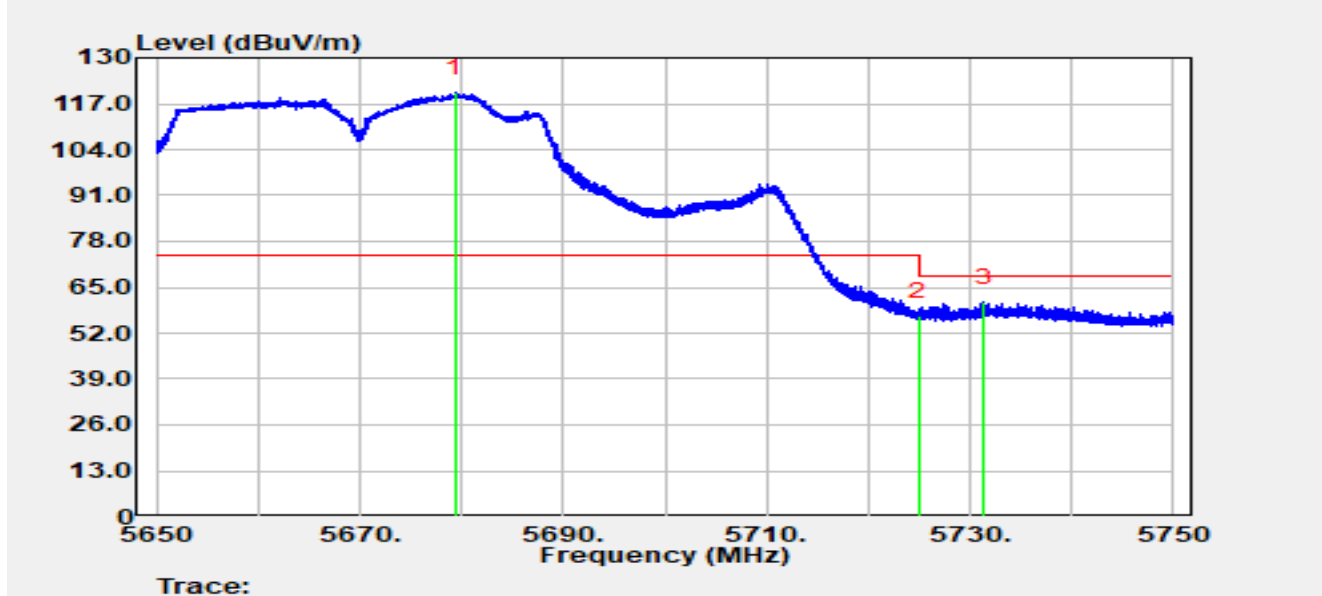


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5679.340	74.95	45.07	120.02	N/A	N/A	Peak
2		5725.000	55.89	1.01	56.89	-11.31	68.20	Peak
3	*	5731.340	61.65	-1.00	60.65	-7.55	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

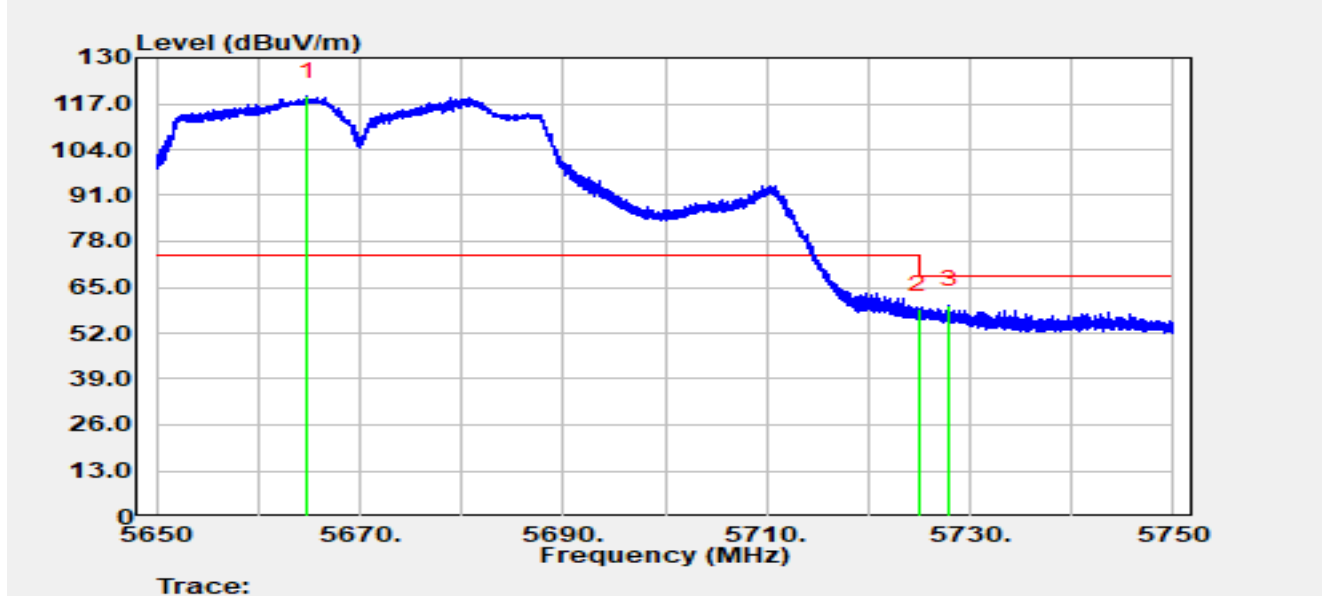


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5664.790	74.86	44.23	119.09	N/A	N/A	Peak
2		5725.000	57.76	1.01	58.76	-9.44	68.20	Peak
3	*	5727.960	60.22	-0.27	59.95	-8.25	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

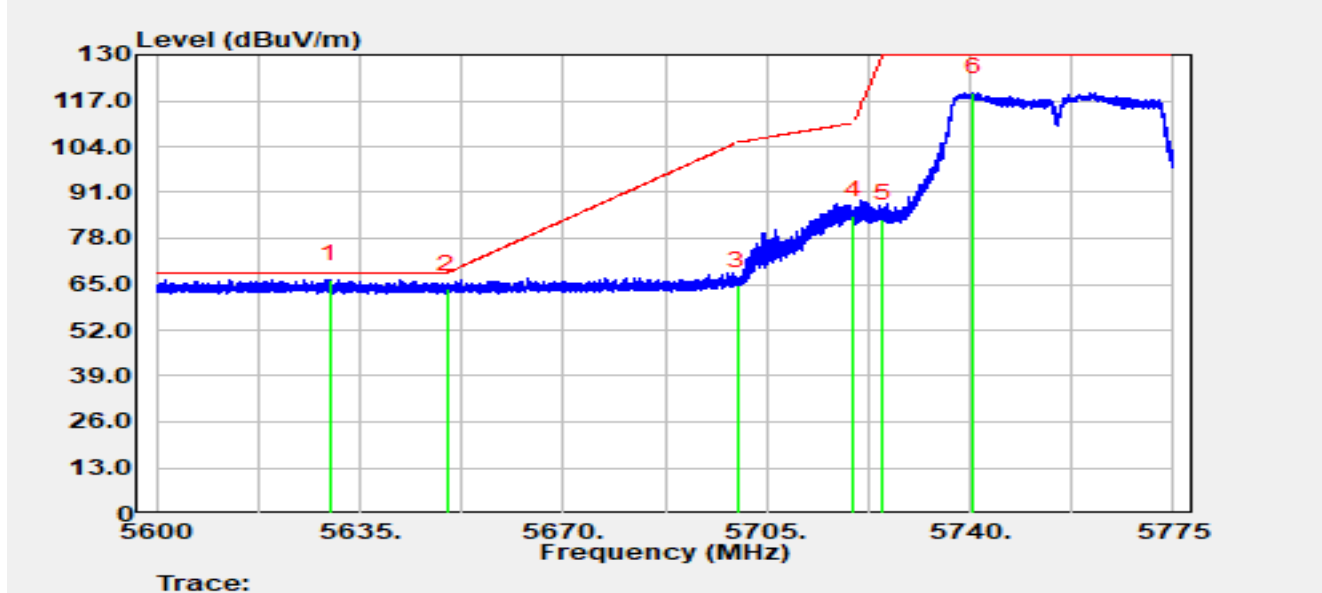


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5629.820	69.77	-3.45	66.33	-1.87	68.20	Peak
2		5650.000	67.29	-3.65	63.65	-4.55	68.20	Peak
3		5700.000	68.02	-3.47	64.55	-40.65	105.20	Peak
4		5720.000	88.01	-3.45	84.56	-26.24	110.80	Peak
5		5725.000	87.02	-3.47	83.55	-46.45	130.00	Peak
6		5740.630	123.03	-3.61	119.41	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

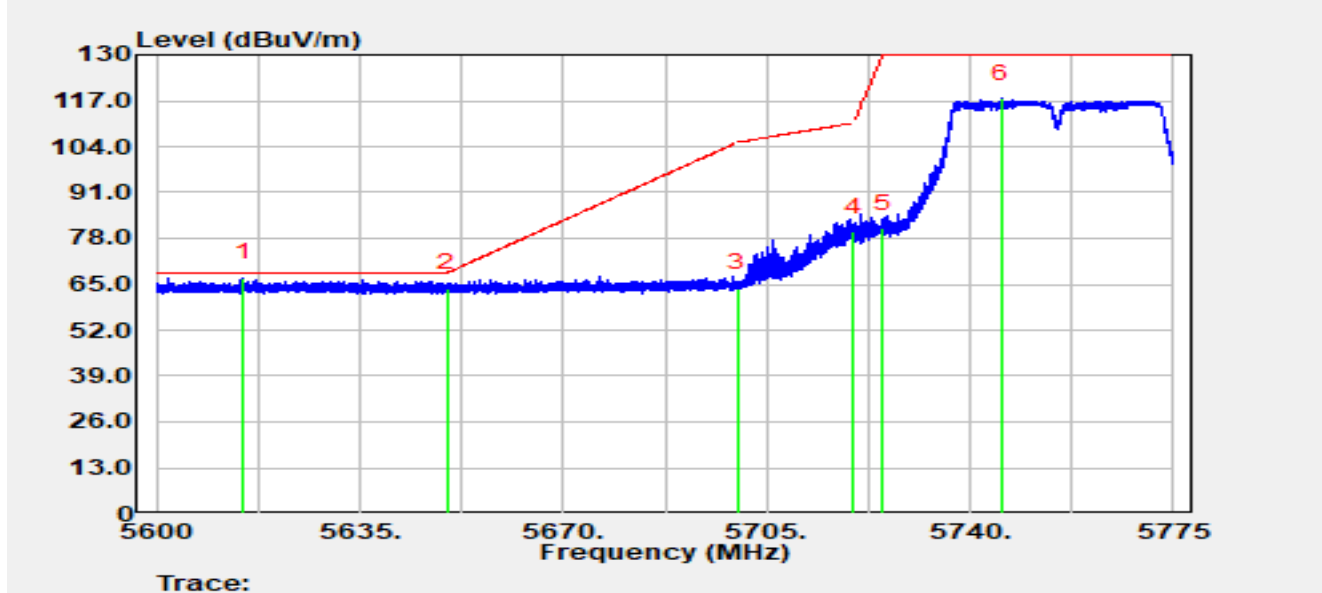


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5615.050	70.22	-3.44	66.78	-1.42	68.20	Peak
2		5650.000	67.44	-3.65	63.79	-4.41	68.20	Peak
3		5700.000	67.33	-3.47	63.86	-41.34	105.20	Peak
4		5720.000	83.18	-3.45	79.72	-31.08	110.80	Peak
5		5725.000	84.18	-3.47	80.71	-49.29	130.00	Peak
6		5745.285	121.25	-3.64	117.61	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

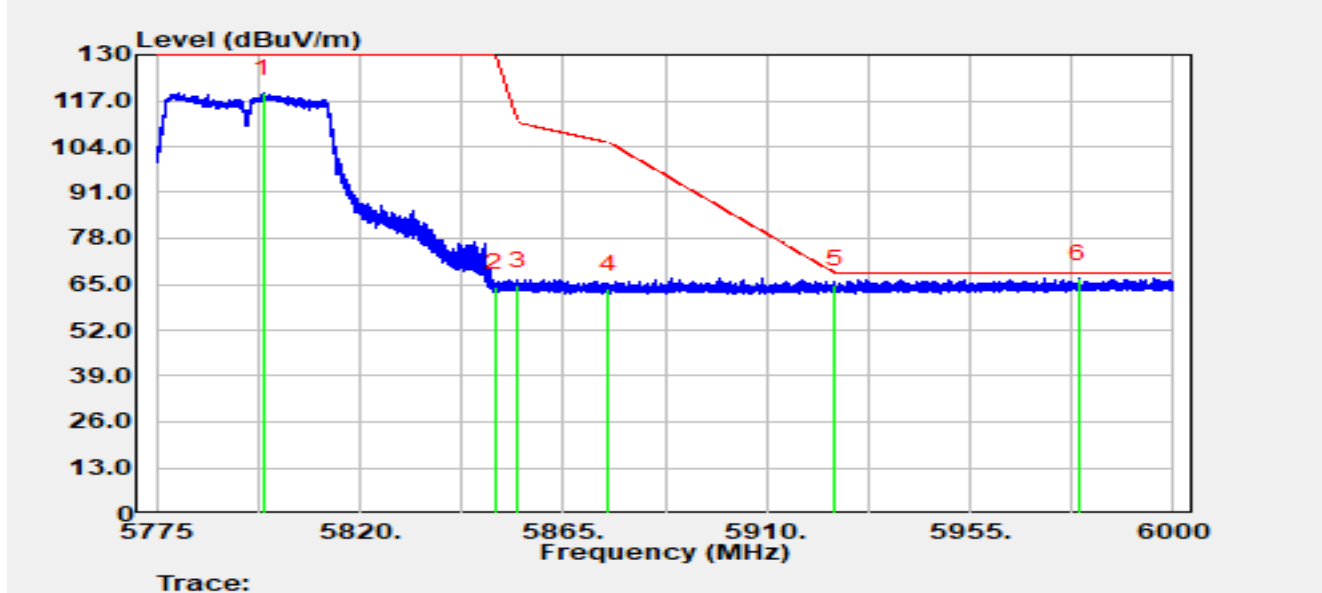


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5798.737	122.76	-3.73	119.03	N/A	N/A	Peak
2		5850.000	67.79	-3.75	64.03	-65.97	130.00	Peak
3		5855.010	68.32	-3.75	64.57	-46.23	110.80	Peak
4		5875.000	67.36	-3.82	63.53	-41.67	105.20	Peak
5		5925.000	68.52	-3.71	64.82	-3.38	68.20	Peak
6	*	5979.075	70.27	-3.66	66.61	-1.59	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

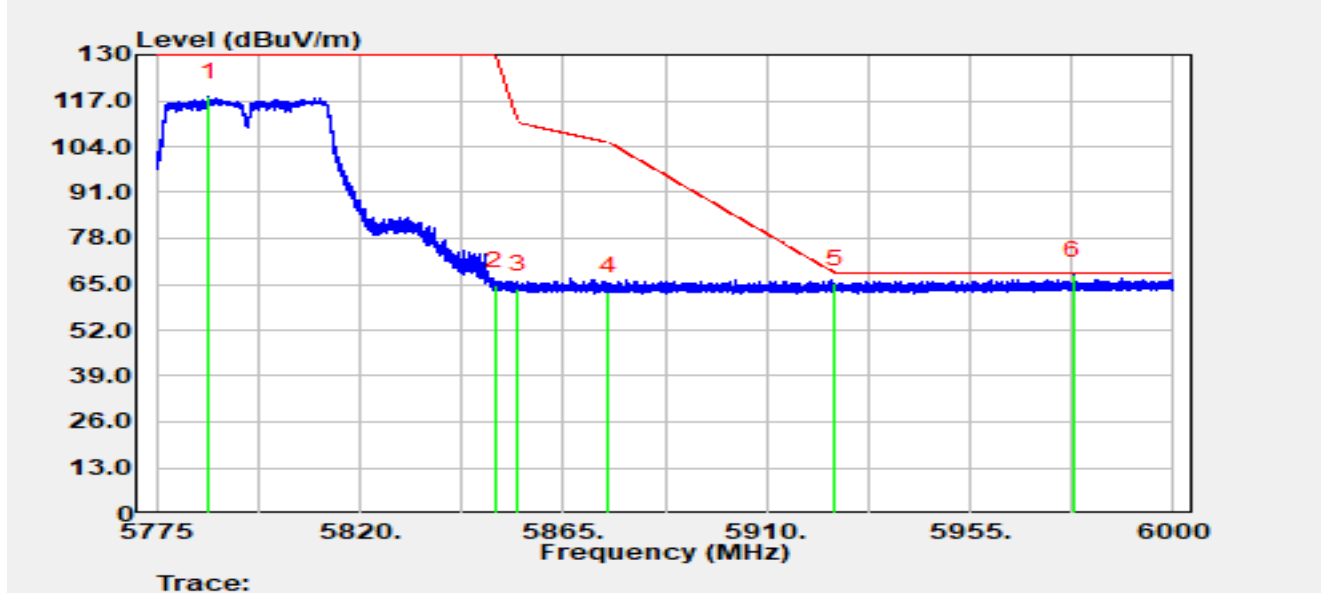


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5786.453	121.83	-3.69	118.14	N/A	N/A	Peak
2		5850.000	68.40	-3.75	64.65	-65.35	130.00	Peak
3		5855.000	67.32	-3.75	63.57	-47.23	110.80	Peak
4		5875.000	66.77	-3.82	62.95	-42.25	105.20	Peak
5		5925.000	68.92	-3.71	65.21	-2.99	68.20	Peak
6	*	5977.770	71.21	-3.65	67.55	-0.65	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

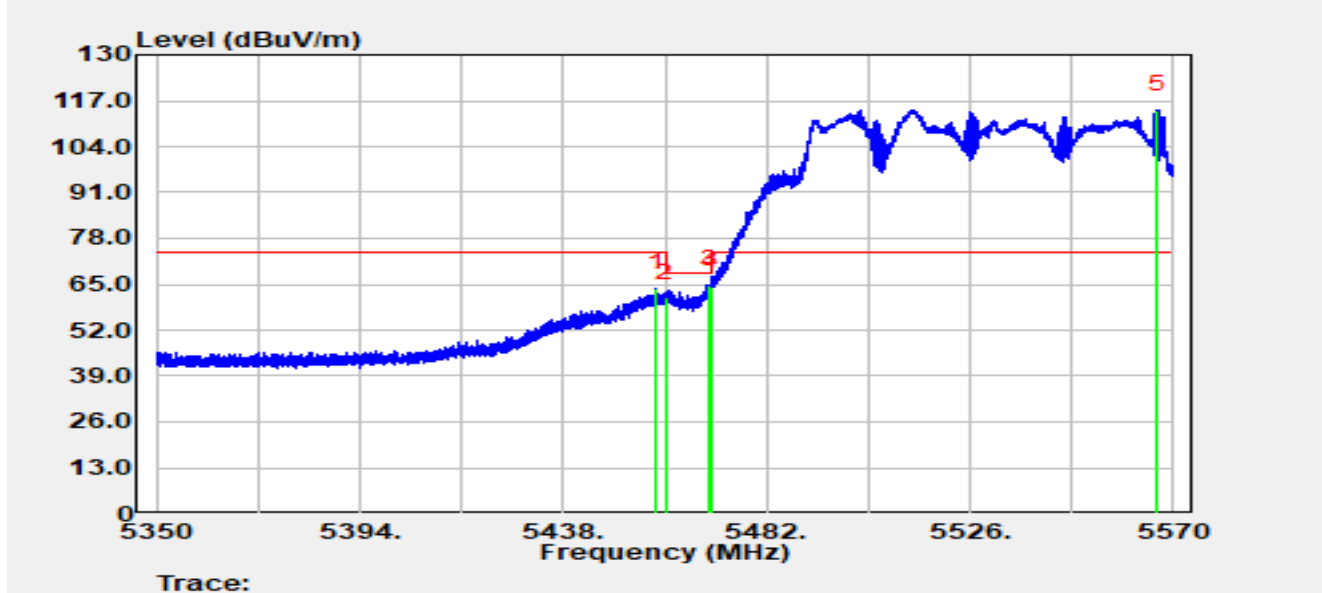


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.064	64.64	-0.83	63.81	-10.19	74.00	Peak
2		5460.000	61.81	-0.69	61.12	-7.08	68.20	Peak
3	*	5469.614	63.99	0.87	64.86	-3.34	68.20	Peak
4		5470.000	63.46	1.00	64.46	-3.74	68.20	Peak
5		5566.524	70.78	43.74	114.53	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

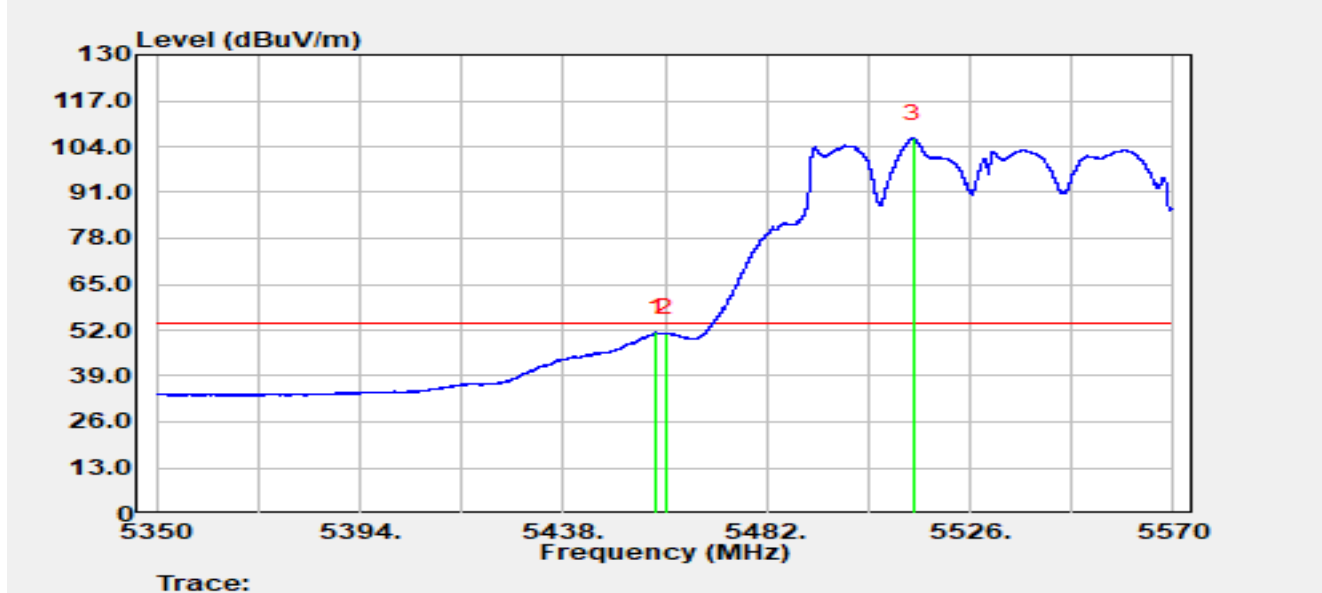


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.262	52.09	-0.80	51.28	-2.72	54.00	Average
2		5460.000	51.75	-0.69	51.06	-2.94	54.00	Average
3		5513.614	61.63	44.76	106.40	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

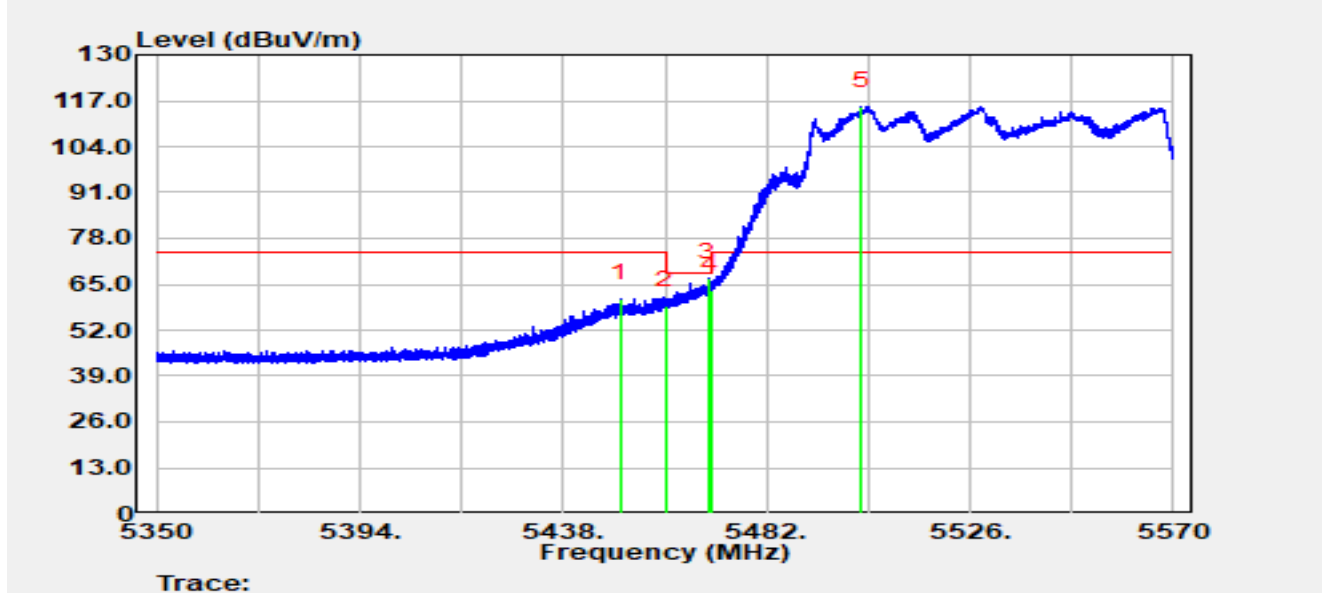


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.276	62.32	-1.26	61.06	-12.94	74.00	Peak
2		5460.000	59.61	-0.69	58.92	-9.28	68.20	Peak
3	*	5469.416	65.96	0.83	66.78	-1.42	68.20	Peak
4		5470.000	62.52	1.00	63.53	-4.67	68.20	Peak
5		5502.460	71.84	43.50	115.34	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

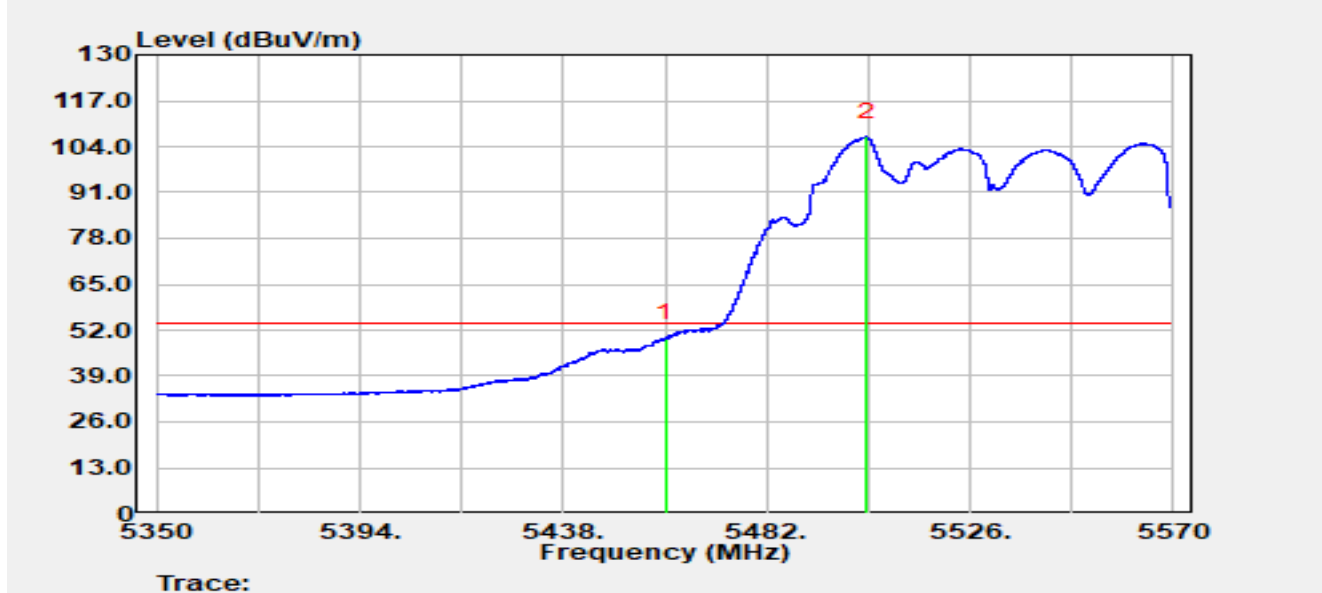


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	50.35	-0.69	49.66	-4.34	54.00	Average
2		5503.626	60.98	45.76	106.74	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

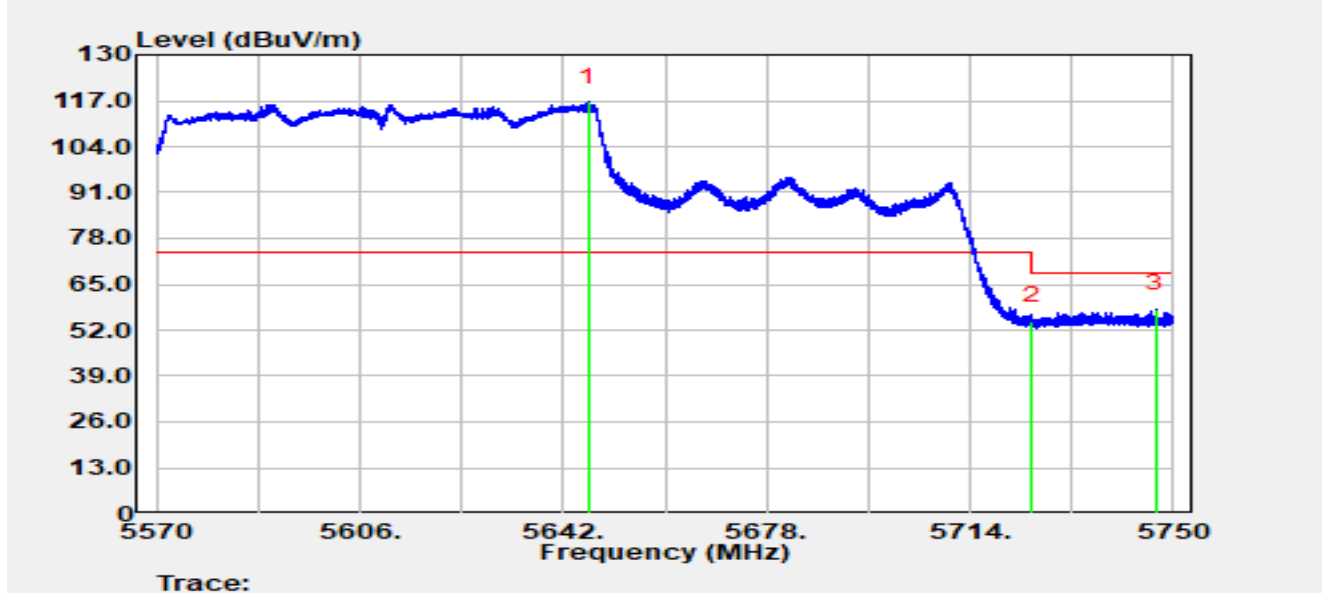


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5646.536	72.56	44.10	116.66	N/A	N/A	Peak
2		5725.000	53.47	1.01	54.48	-13.72	68.20	Peak
3	*	5746.832	60.23	-2.10	58.13	-10.07	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

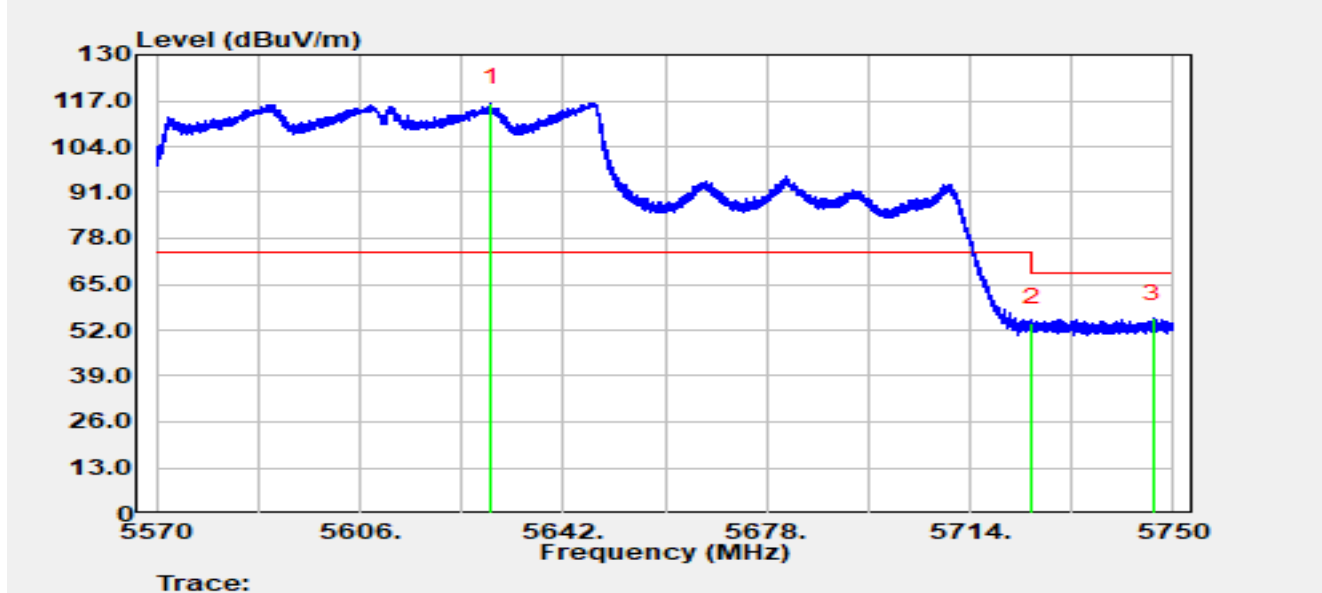


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5629.220	70.66	45.75	116.42	N/A	N/A	Peak
2		5725.000	52.96	1.01	53.97	-14.23	68.20	Peak
3	*	5746.364	57.27	-2.04	55.23	-12.97	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

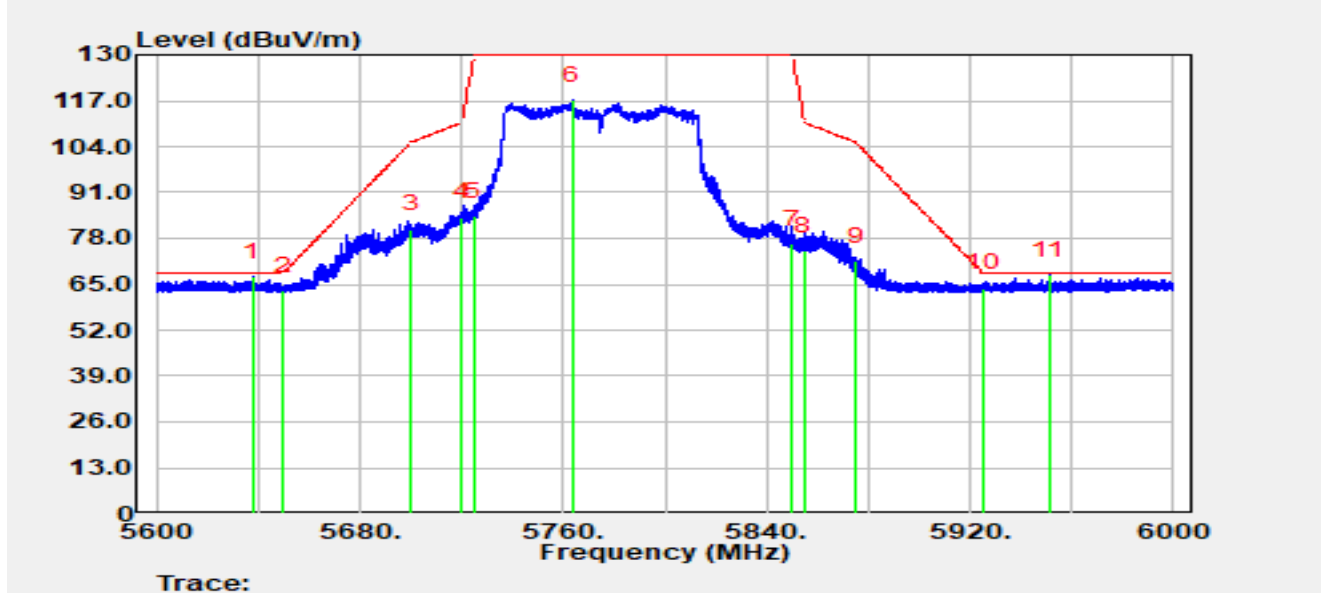


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5637.680	70.64	-3.59	67.05	-1.15	68.20	Peak
2		5650.000	66.72	-3.65	63.07	-5.13	68.20	Peak
3		5700.000	84.16	-3.47	80.68	-24.52	105.20	Peak
4		5720.000	87.58	-3.45	84.12	-26.68	110.80	Peak
5		5725.000	87.77	-3.47	84.30	-45.70	130.00	Peak
6		5763.600	120.83	-3.66	117.17	N/A	N/A	Peak
7		5850.000	80.04	-3.75	76.29	-53.71	130.00	Peak
8		5855.000	78.13	-3.75	74.38	-36.42	110.80	Peak
9		5875.000	75.22	-3.82	71.39	-33.81	105.20	Peak
10		5925.000	67.63	-3.71	63.92	-4.28	68.20	Peak
11	*	5951.360	71.26	-3.68	67.58	-0.62	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

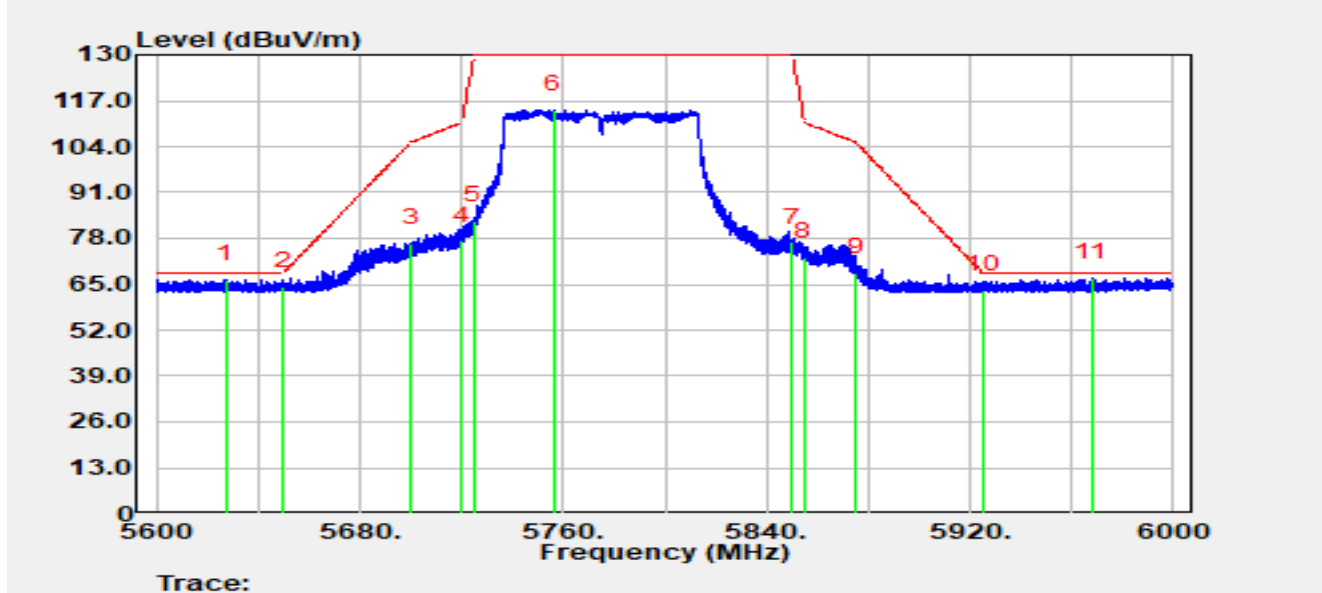


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5627.560	69.88	-3.41	66.47	-1.73	68.20	Peak
2		5650.000	67.93	-3.65	64.28	-3.92	68.20	Peak
3		5700.000	80.16	-3.47	76.69	-28.51	105.20	Peak
4		5720.000	80.88	-3.45	77.43	-33.37	110.80	Peak
5		5725.000	86.44	-3.47	82.97	-47.03	130.00	Peak
6		5756.000	118.13	-3.65	114.48	N/A	N/A	Peak
7		5850.000	80.77	-3.75	77.02	-52.98	130.00	Peak
8		5855.000	76.55	-3.75	72.80	-38.00	110.80	Peak
9		5875.000	72.18	-3.82	68.35	-36.85	105.20	Peak
10		5925.000	66.99	-3.71	63.29	-4.91	68.20	Peak
11	*	5967.840	70.44	-3.64	66.80	-1.40	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

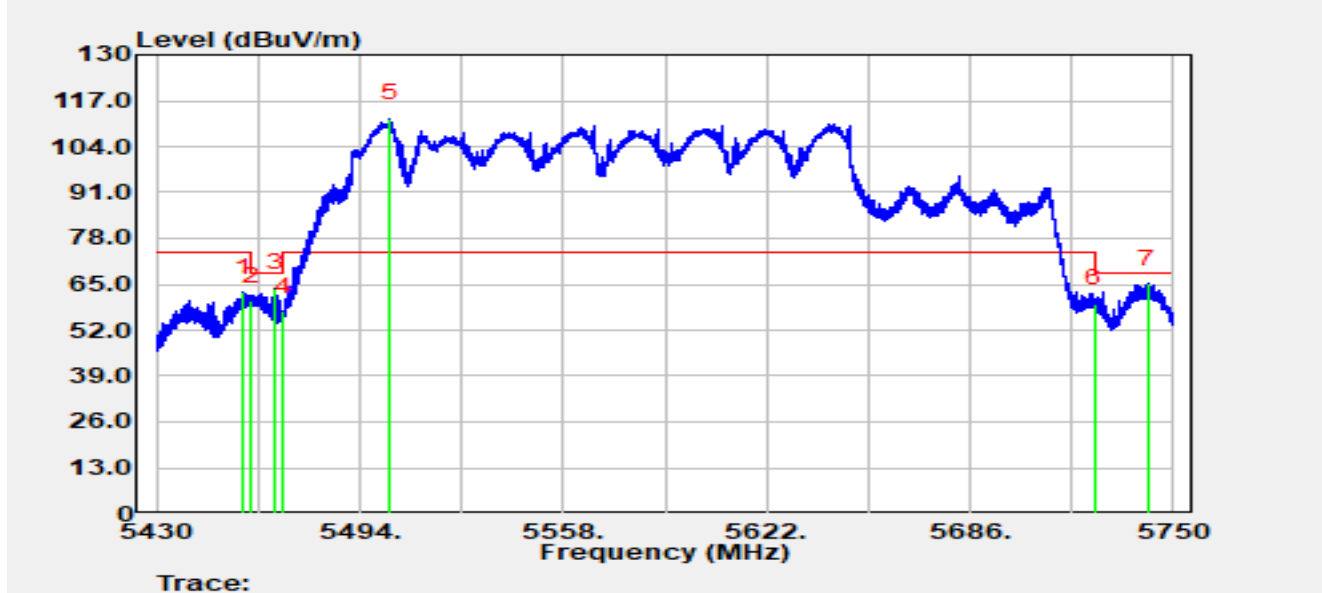


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.136	63.46	-0.91	62.56	-11.44	74.00	Peak
2		5460.000	60.93	-0.69	60.23	-7.97	68.20	Peak
3		5467.280	63.72	0.18	63.90	-4.30	68.20	Peak
4		5470.000	56.18	1.00	57.18	-11.02	68.20	Peak
5		5503.280	66.84	45.20	112.04	N/A	N/A	Peak
6		5725.000	58.52	1.01	59.53	-8.67	68.20	Peak
7	*	5741.776	66.81	-1.78	65.03	-3.17	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

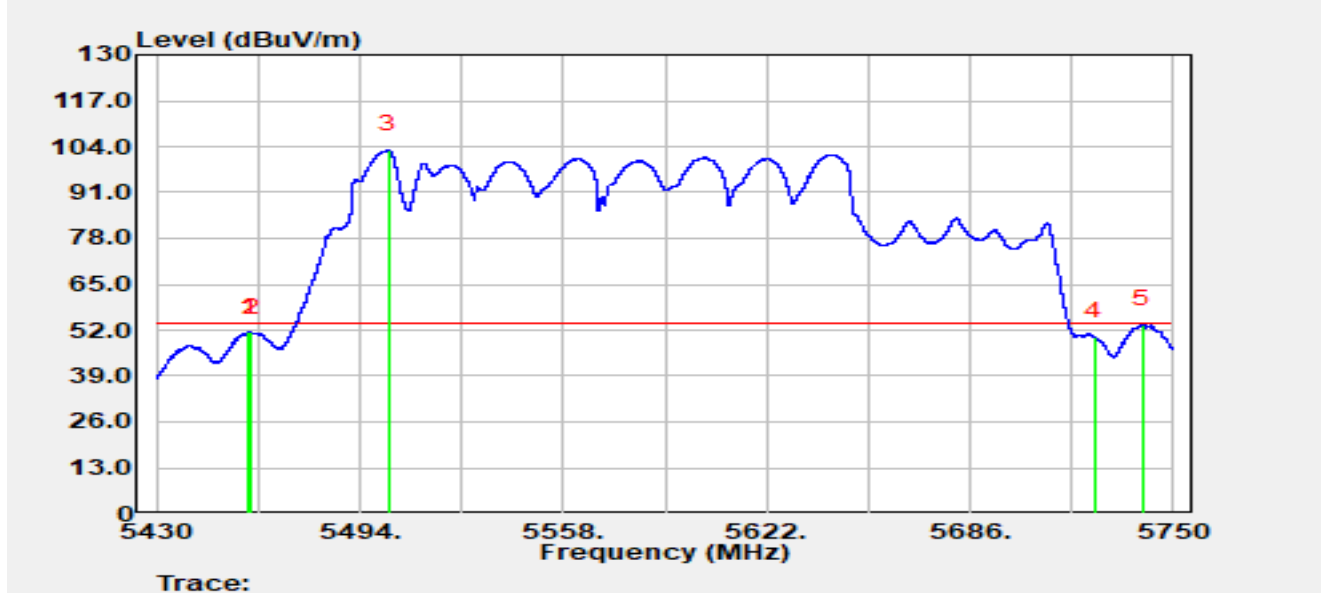


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.184	52.11	-0.79	51.32	-2.68	54.00	Average
2		5460.000	51.97	-0.69	51.27	-2.73	54.00	Average
3		5503.120	58.17	44.90	103.07	N/A	N/A	Average
4		5725.000	49.09	1.01	50.10	-3.90	54.00	Average
5	*	5740.336	55.35	-1.70	53.66	-0.34	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

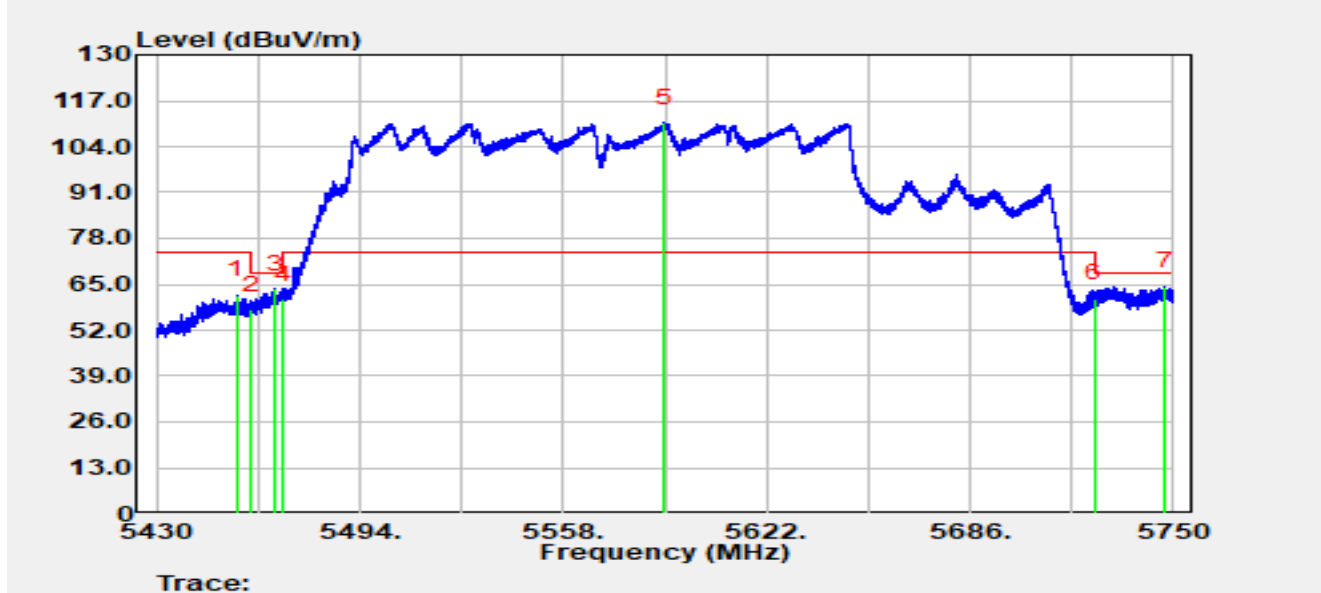


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.408	62.98	-1.01	61.97	-12.03	74.00	Peak
2		5460.000	58.42	-0.69	57.73	-10.47	68.20	Peak
3		5467.344	63.53	0.19	63.72	-4.48	68.20	Peak
4		5470.000	59.71	1.00	60.71	-7.49	68.20	Peak
5		5589.680	63.49	47.22	110.71	N/A	N/A	Peak
6		5725.000	60.00	1.01	61.01	-7.19	68.20	Peak
7	*	5747.248	66.57	-2.10	64.47	-3.73	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

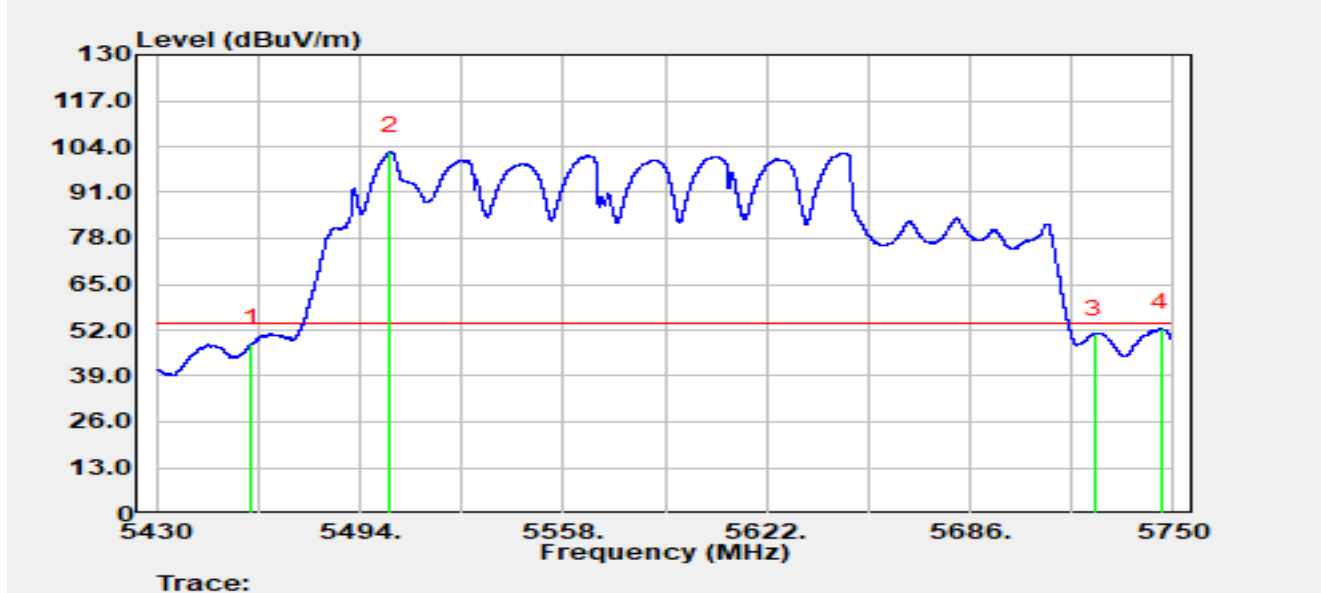


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5460.000	48.94	-0.69	48.24	-5.76	54.00	Average
2		5503.472	57.22	45.52	102.73	N/A	N/A	Average
3		5725.000	49.87	1.01	50.88	-3.12	54.00	Average
4	*	5745.936	54.53	-2.01	52.52	-1.48	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

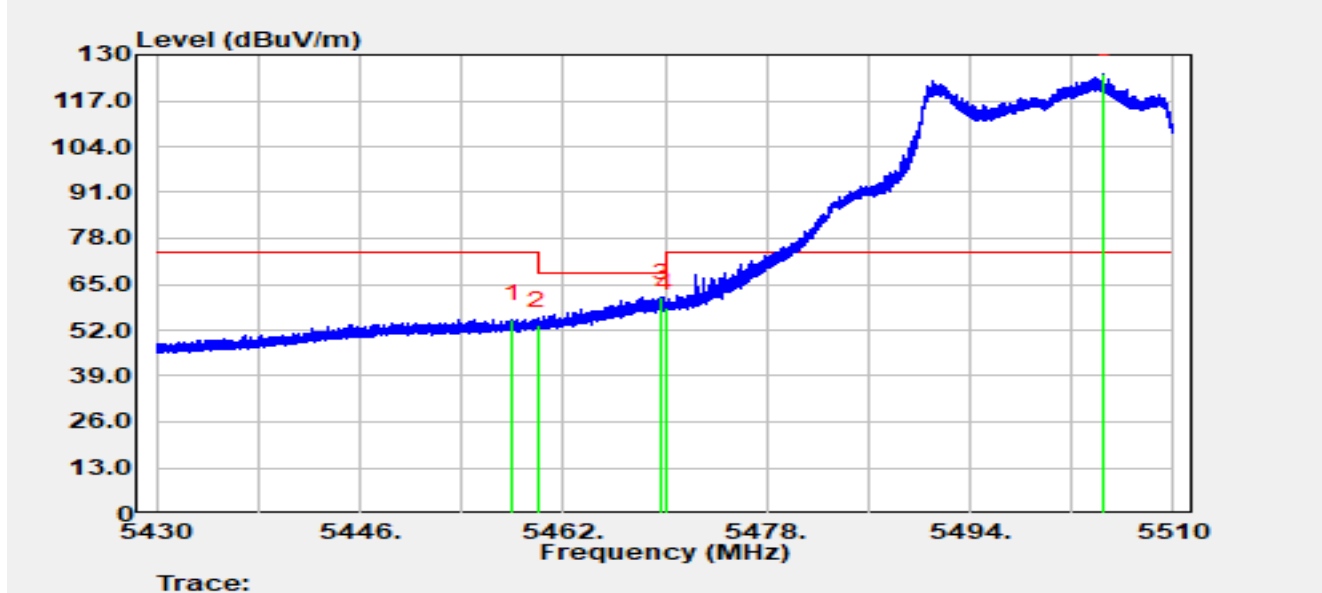


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.992	55.96	-0.85	55.11	-18.89	74.00	Peak
2		5460.000	53.97	-0.69	53.28	-14.92	68.20	Peak
3	*	5469.760	60.29	0.92	61.21	-6.99	68.20	Peak
4		5470.000	57.16	1.00	58.16	-10.04	68.20	Peak
5		5504.480	77.88	46.55	124.43	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

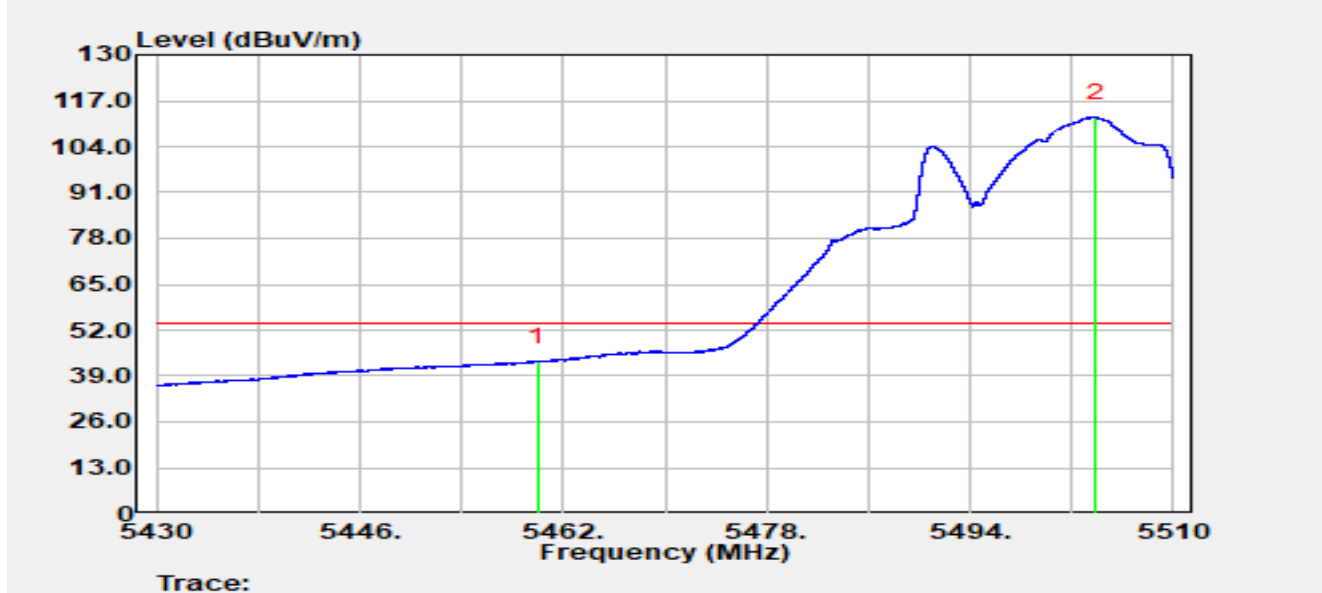


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	43.78	-0.69	43.09	-10.91	54.00	Average
2		5503.904	66.17	46.08	112.24	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

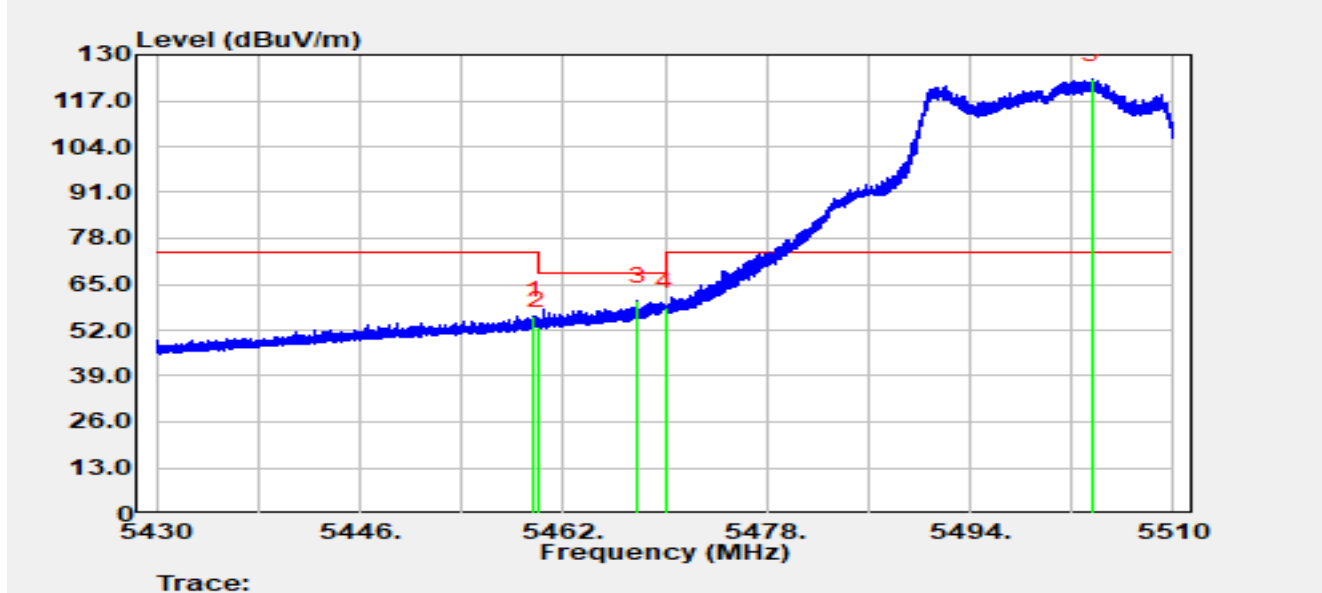


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.640	56.69	-0.74	55.95	-18.05	74.00	Peak
2		5460.000	53.82	-0.69	53.13	-15.07	68.20	Peak
3	*	5467.840	60.00	0.31	60.30	-7.90	68.20	Peak
4		5470.000	57.61	1.00	58.62	-9.58	68.20	Peak
5		5503.600	77.20	45.73	122.92	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

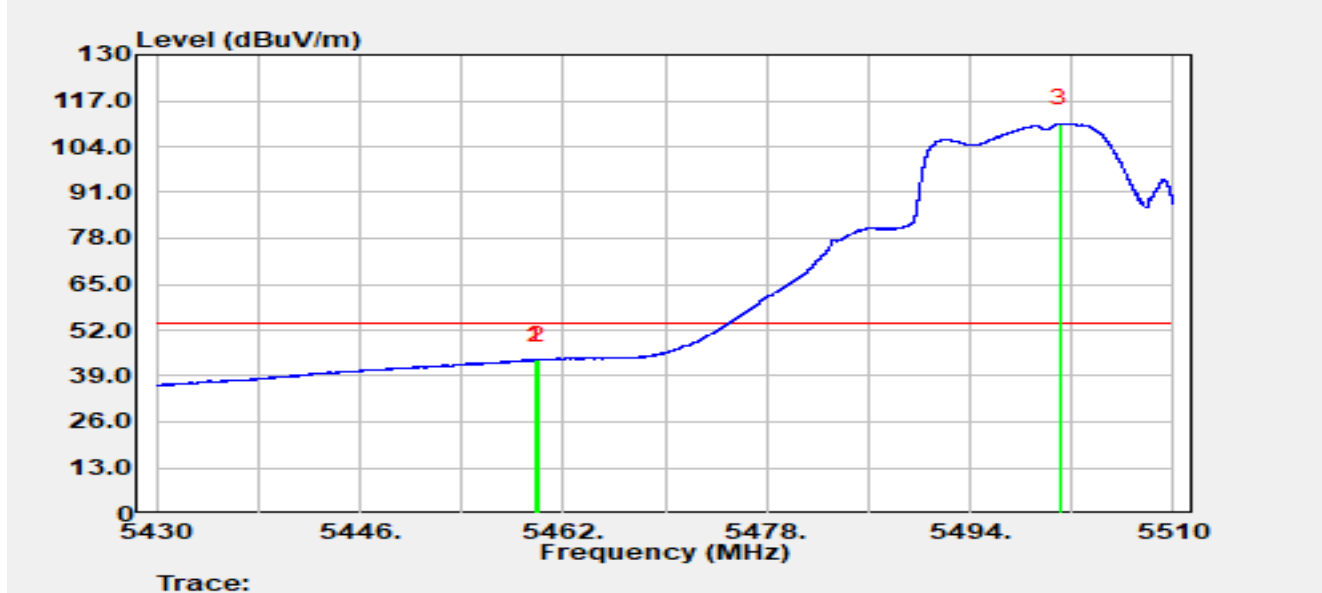


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.744	44.34	-0.73	43.61	-10.39	54.00	Average
2		5460.000	44.21	-0.69	43.52	-10.48	54.00	Average
3		5501.032	68.85	41.68	110.53	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

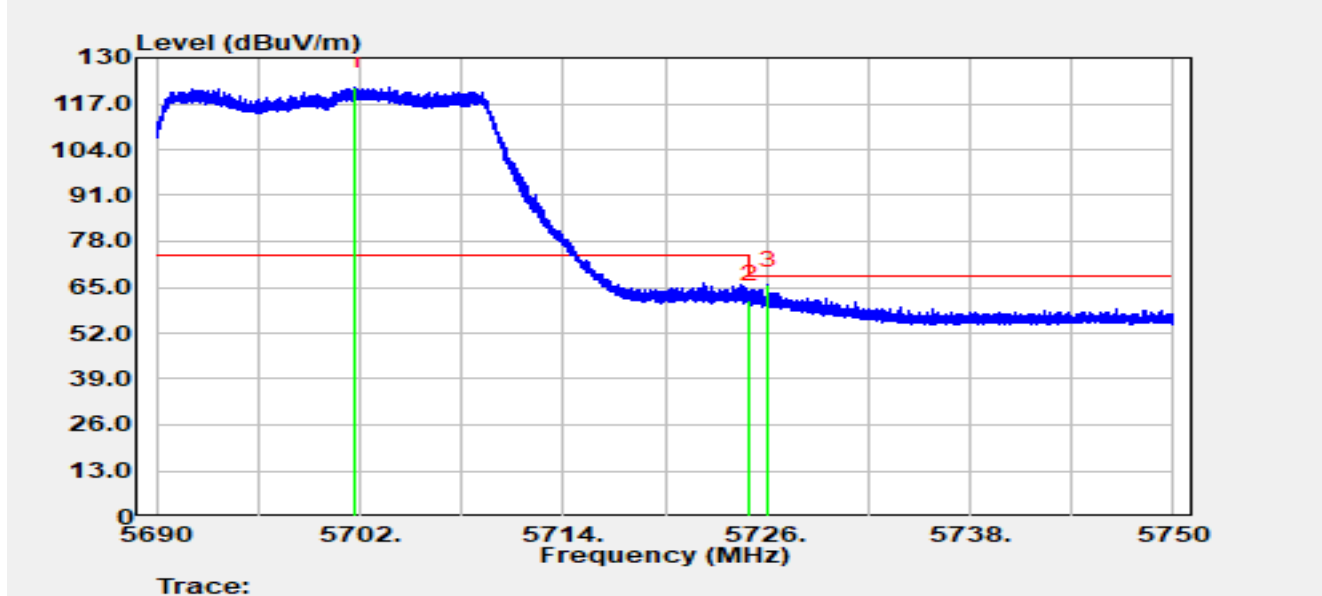


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.760	82.33	39.48	121.81	N/A	N/A	Peak
2		5725.000	60.42	1.01	61.42	-6.78	68.20	Peak
3	*	5726.102	65.13	0.41	65.54	-2.66	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

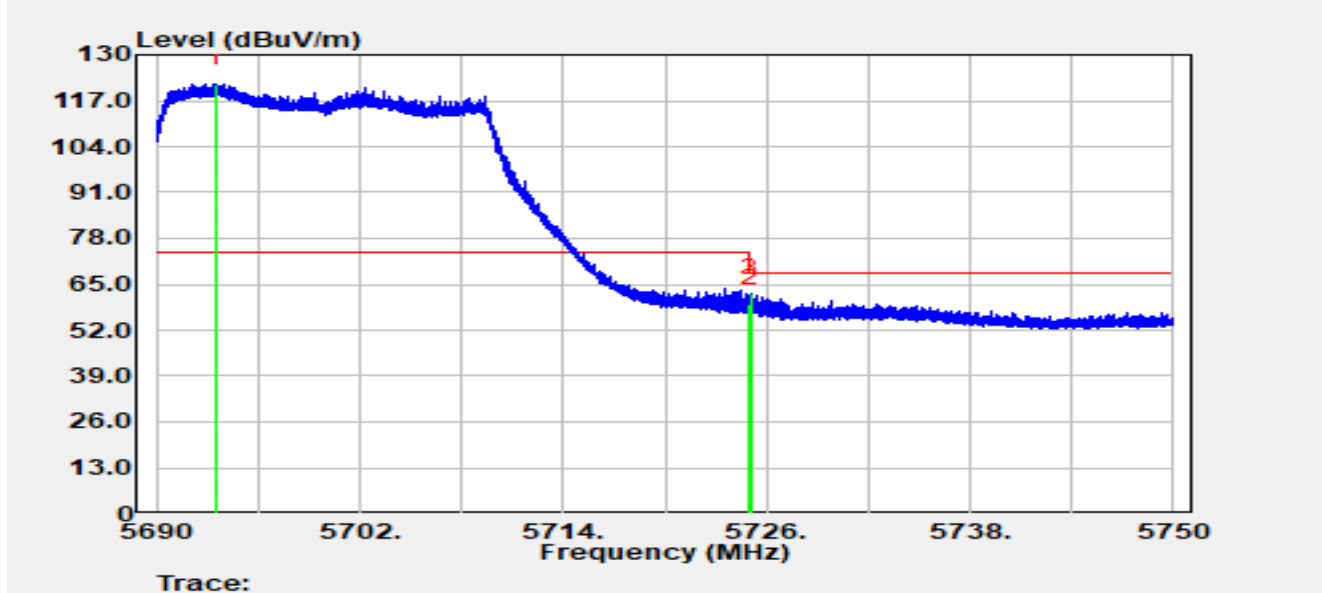


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5693.462	77.73	44.07	121.80	N/A	N/A	Peak
2		5725.000	58.45	1.01	59.45	-8.75	68.20	Peak
3	*	5725.100	61.59	0.95	62.54	-5.66	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

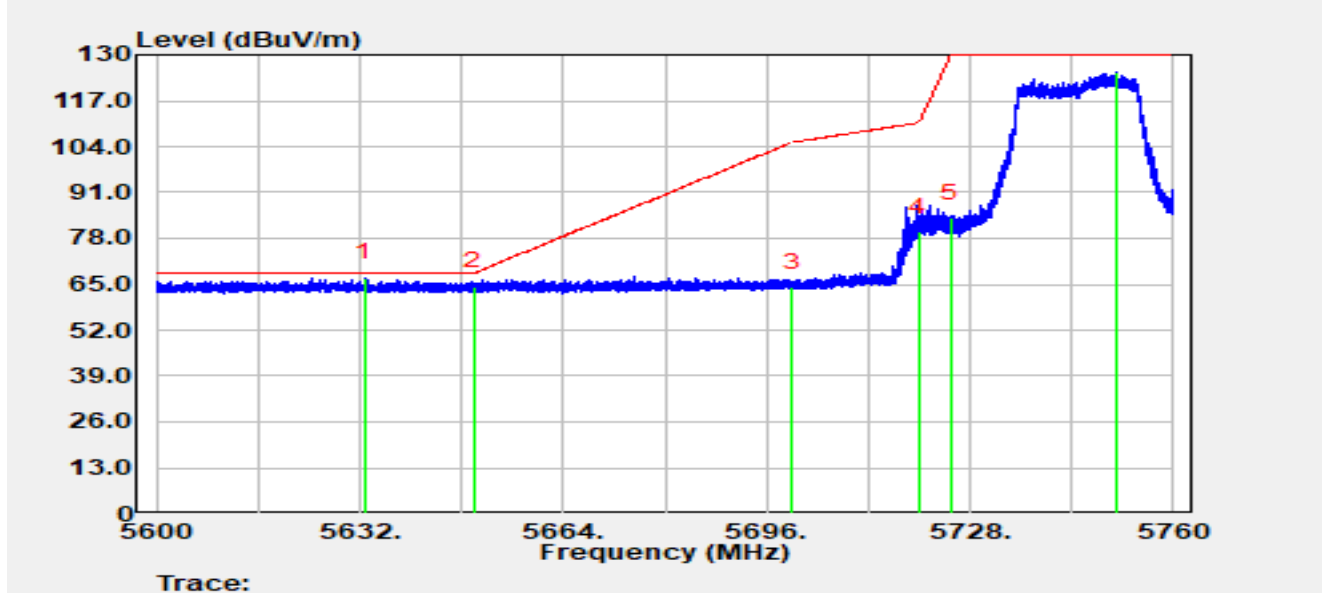


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5632.784	70.33	-3.50	66.83	-1.37	68.20	Peak
2		5650.000	68.10	-3.65	64.45	-3.75	68.20	Peak
3		5700.000	67.64	-3.47	64.17	-41.03	105.20	Peak
4		5720.000	83.22	-3.45	79.76	-31.04	110.80	Peak
5		5725.000	87.22	-3.47	83.76	-46.24	130.00	Peak
6		5751.056	128.59	-3.65	124.94	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

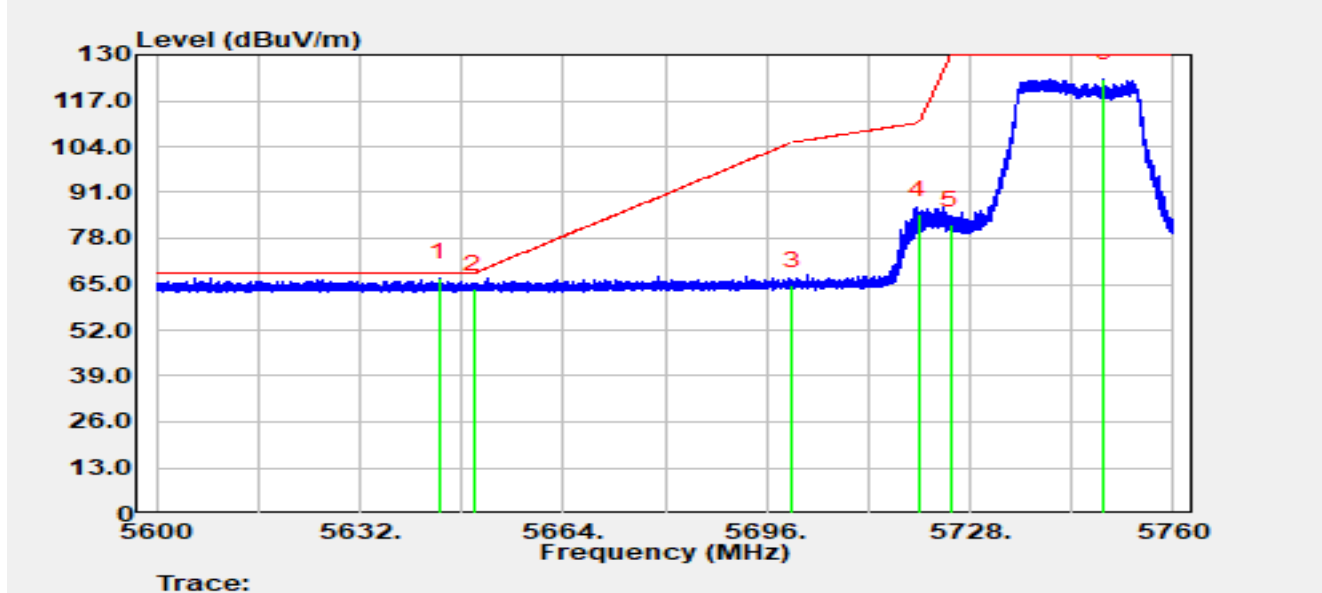


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.544	70.55	-3.65	66.90	-1.30	68.20	Peak
2		5650.000	67.27	-3.65	63.63	-4.57	68.20	Peak
3		5700.000	68.17	-3.47	64.70	-40.50	105.20	Peak
4		5720.000	88.23	-3.45	84.78	-26.02	110.80	Peak
5		5725.000	85.36	-3.47	81.90	-48.10	130.00	Peak
6		5749.024	126.85	-3.65	123.20	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

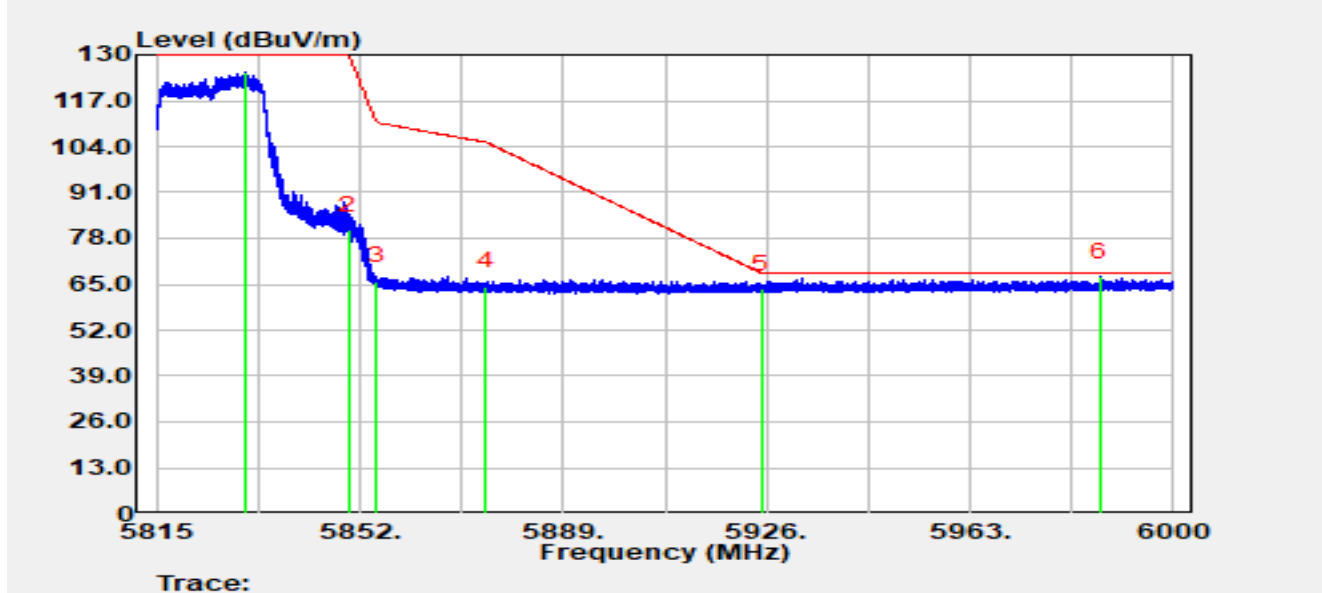


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5831.058	128.80	-3.74	125.06	N/A	N/A	Peak
2		5850.000	84.14	-3.75	80.38	-49.62	130.00	Peak
3		5855.000	69.67	-3.75	65.92	-44.88	110.80	Peak
4		5875.000	68.29	-3.82	64.47	-40.73	105.20	Peak
5		5925.000	67.37	-3.71	63.67	-4.53	68.20	Peak
6	*	5986.680	70.75	-3.68	67.07	-1.13	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

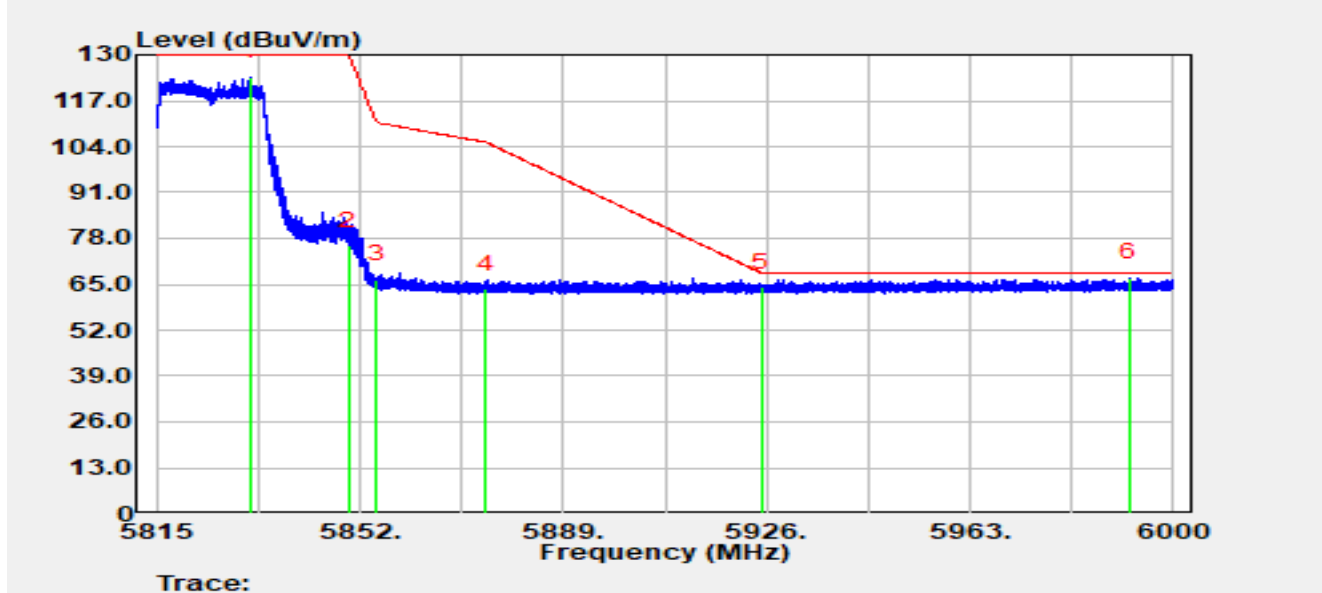


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5832.020	127.40	-3.74	123.66	N/A	N/A	Peak
2		5850.000	79.67	-3.75	75.92	-54.08	130.00	Peak
3		5855.000	70.03	-3.75	66.28	-44.52	110.80	Peak
4		5875.000	67.40	-3.82	63.58	-41.62	105.20	Peak
5		5925.000	67.83	-3.71	64.12	-4.08	68.20	Peak
6	*	5992.063	70.47	-3.70	66.77	-1.43	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

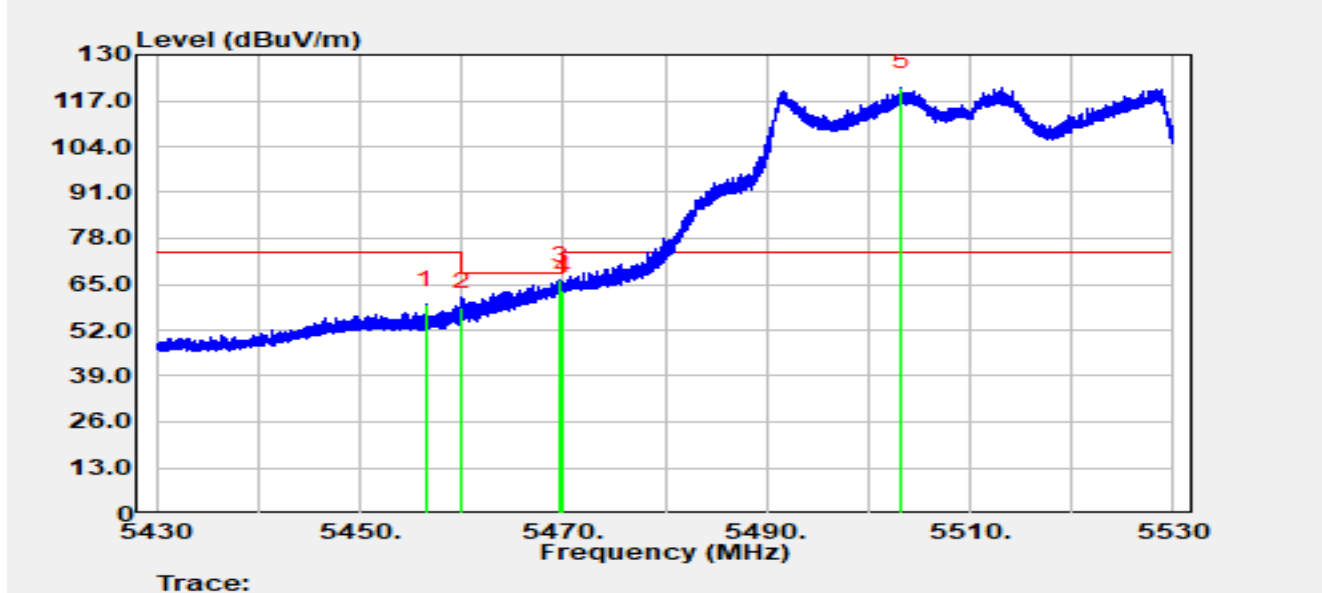


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.550	60.33	-0.97	59.36	-14.64	74.00	Peak
2		5460.000	59.12	-0.69	58.43	-9.77	68.20	Peak
3	*	5469.700	65.18	0.90	66.08	-2.12	68.20	Peak
4		5470.000	62.19	1.00	63.19	-5.01	68.20	Peak
5		5503.230	75.78	45.12	120.90	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

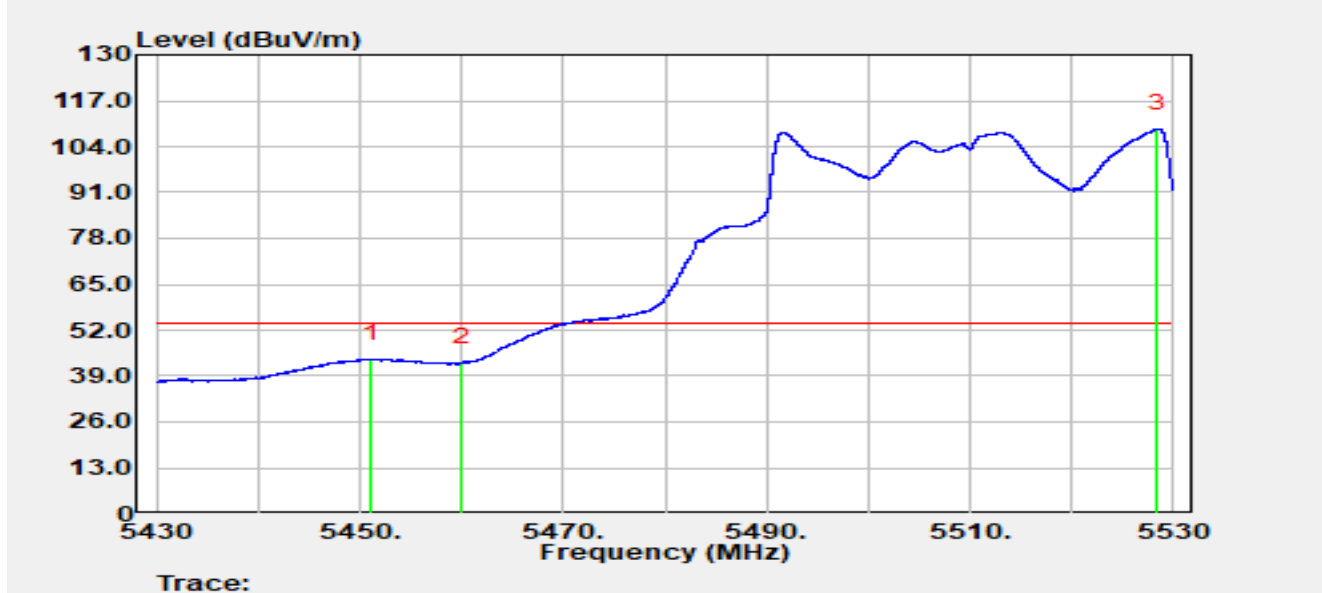


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5451.140	45.01	-1.22	43.79	-10.21	54.00	Average
2		5460.000	43.41	-0.69	42.72	-11.28	54.00	Average
3		5528.460	60.83	48.17	109.01	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

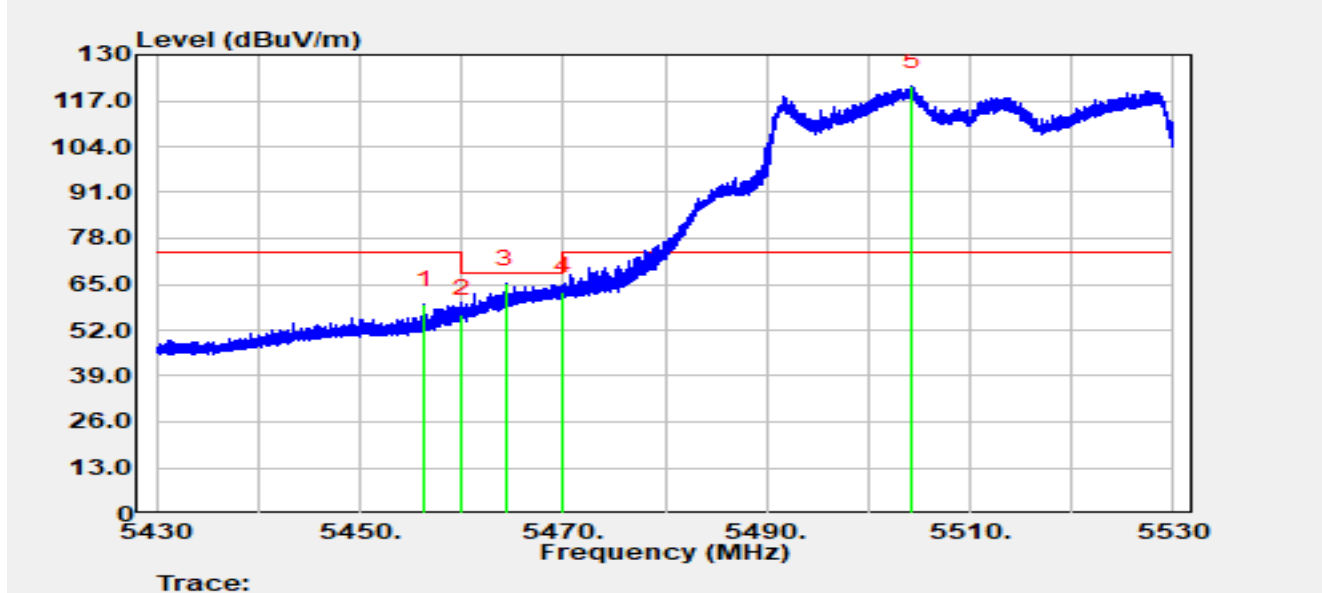


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.370	60.34	-1.00	59.34	-14.66	74.00	Peak
2		5460.000	57.17	-0.69	56.48	-11.72	68.20	Peak
3	*	5464.310	65.46	-0.33	65.13	-3.07	68.20	Peak
4		5470.000	61.97	1.00	62.97	-5.23	68.20	Peak
5		5504.310	74.69	46.45	121.15	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

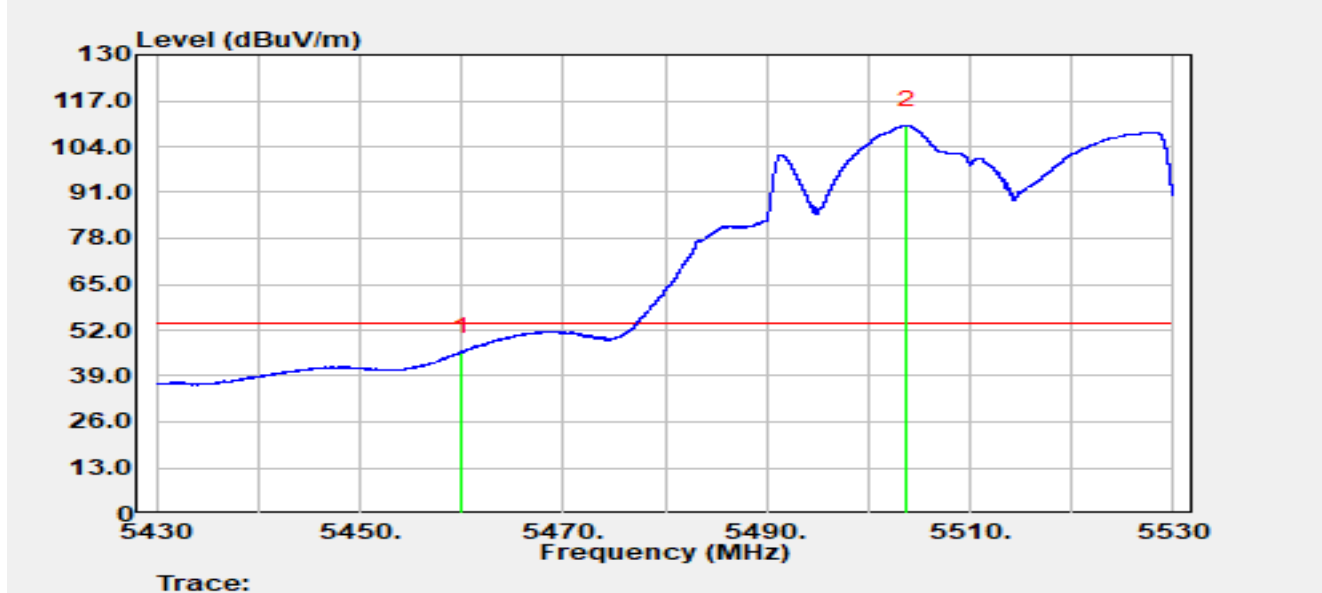


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	46.37	-0.69	45.67	-8.33	54.00	Average
2		5503.740	64.06	45.89	109.95	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

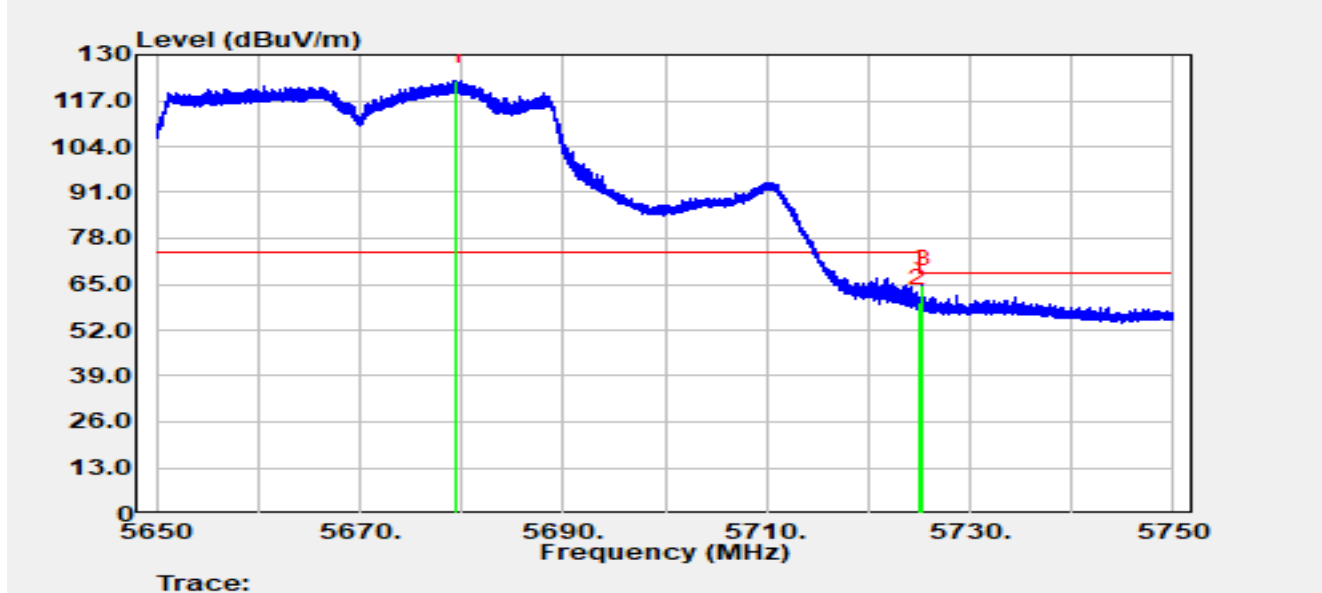


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5679.560	77.09	45.44	122.53	N/A	N/A	Peak
2		5725.000	58.65	1.01	59.66	-8.54	68.20	Peak
3	*	5725.320	64.01	0.83	64.84	-3.36	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

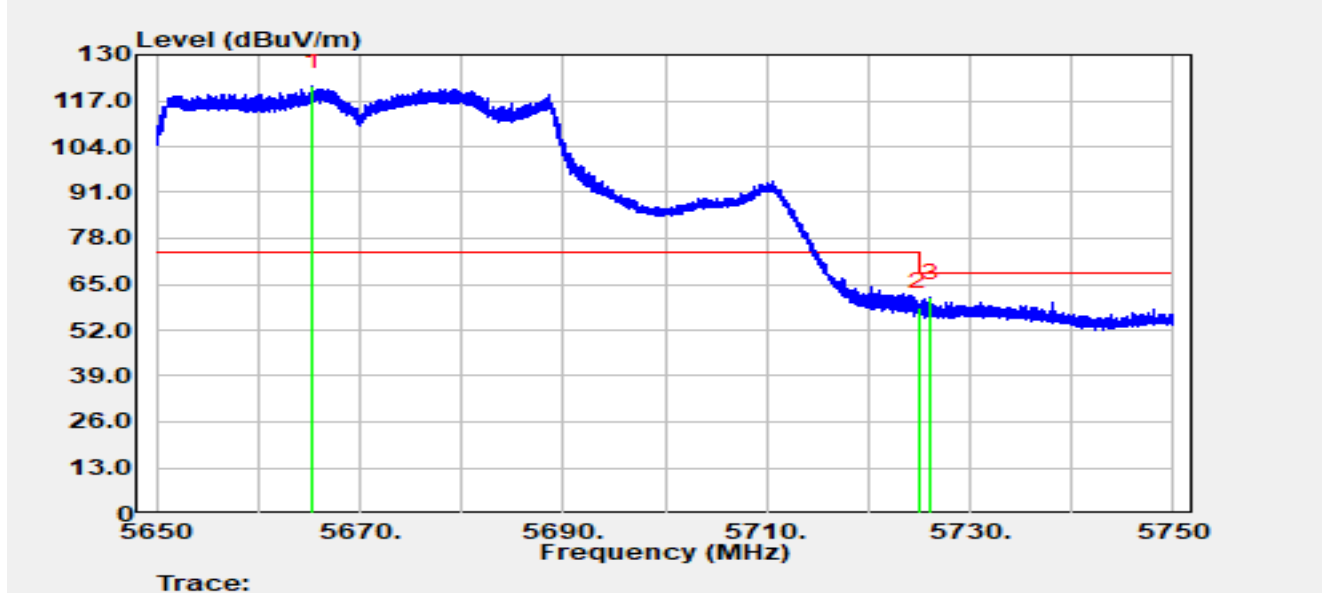


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5665.390	76.01	45.08	121.10	N/A	N/A	Peak
2		5725.000	57.43	1.01	58.43	-9.77	68.20	Peak
3	*	5726.120	60.83	0.40	61.24	-6.96	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

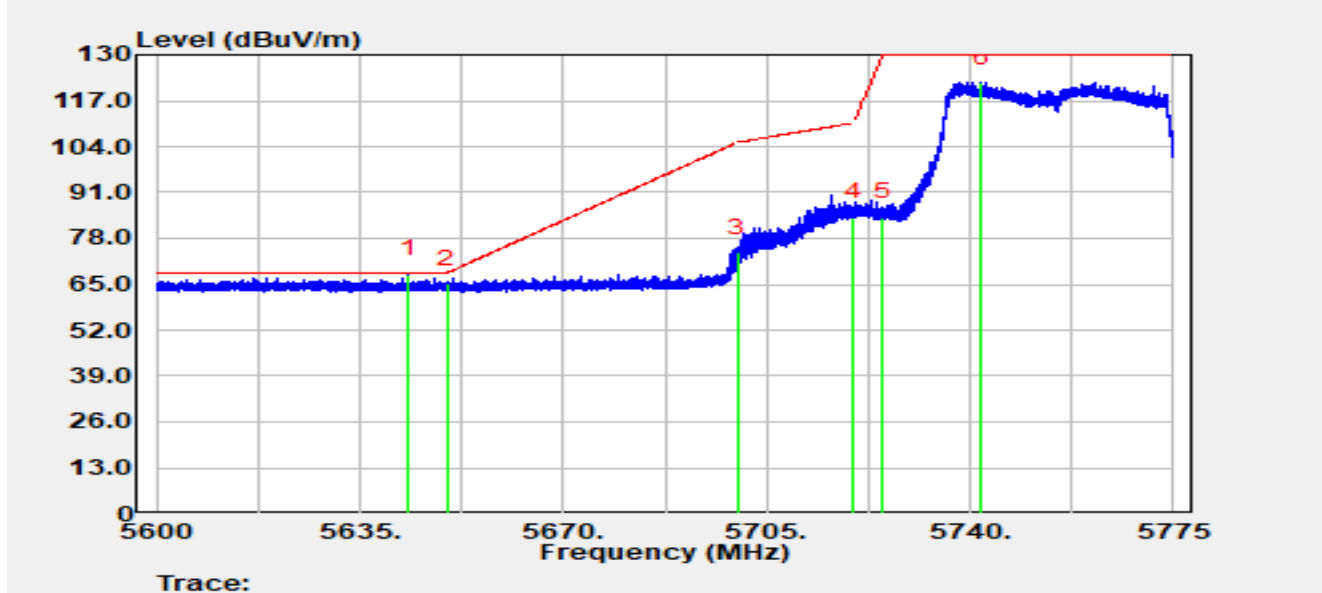


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5643.435	71.38	-3.65	67.73	-0.47	68.20	Peak
2		5650.000	68.84	-3.65	65.19	-3.01	68.20	Peak
3		5700.000	77.54	-3.47	74.07	-31.13	105.20	Peak
4		5720.000	87.40	-3.45	83.95	-26.85	110.80	Peak
5		5725.000	87.57	-3.47	84.10	-45.90	130.00	Peak
6		5741.960	125.75	-3.63	122.12	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

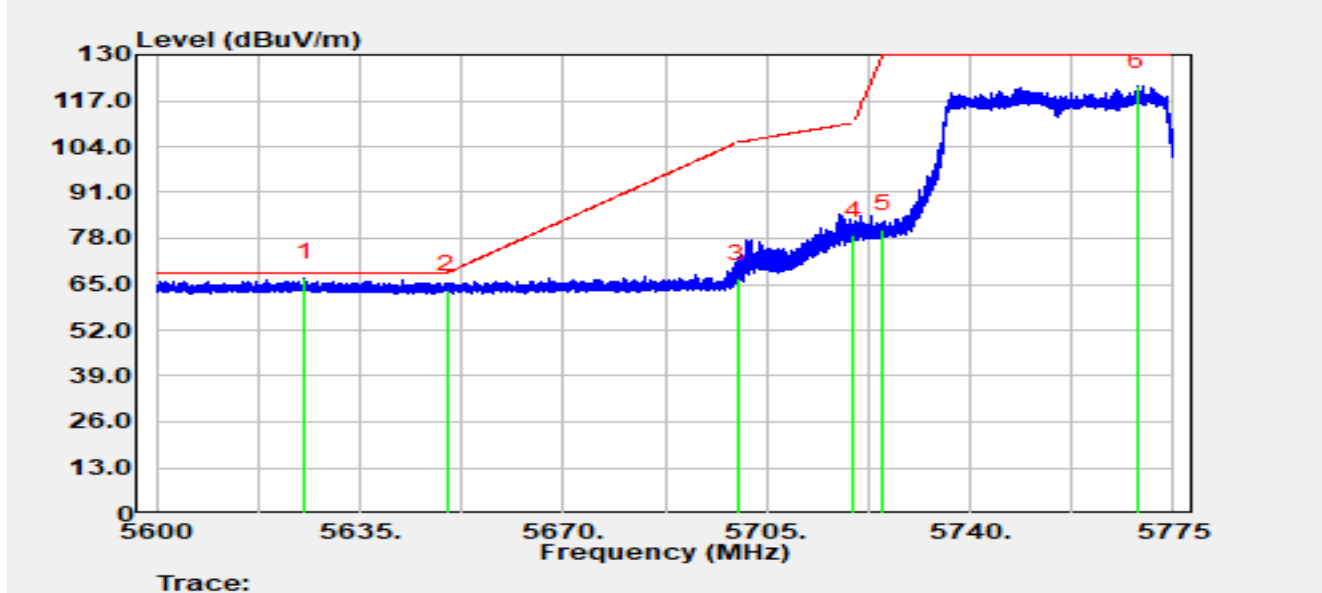


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5625.550	70.15	-3.37	66.79	-1.41	68.20	Peak
2		5650.000	67.09	-3.65	63.44	-4.76	68.20	Peak
3		5700.000	70.18	-3.47	66.71	-38.49	105.20	Peak
4		5720.000	82.22	-3.45	78.77	-32.03	110.80	Peak
5		5725.000	83.96	-3.47	80.49	-49.51	130.00	Peak
6		5768.840	124.66	-3.67	120.99	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

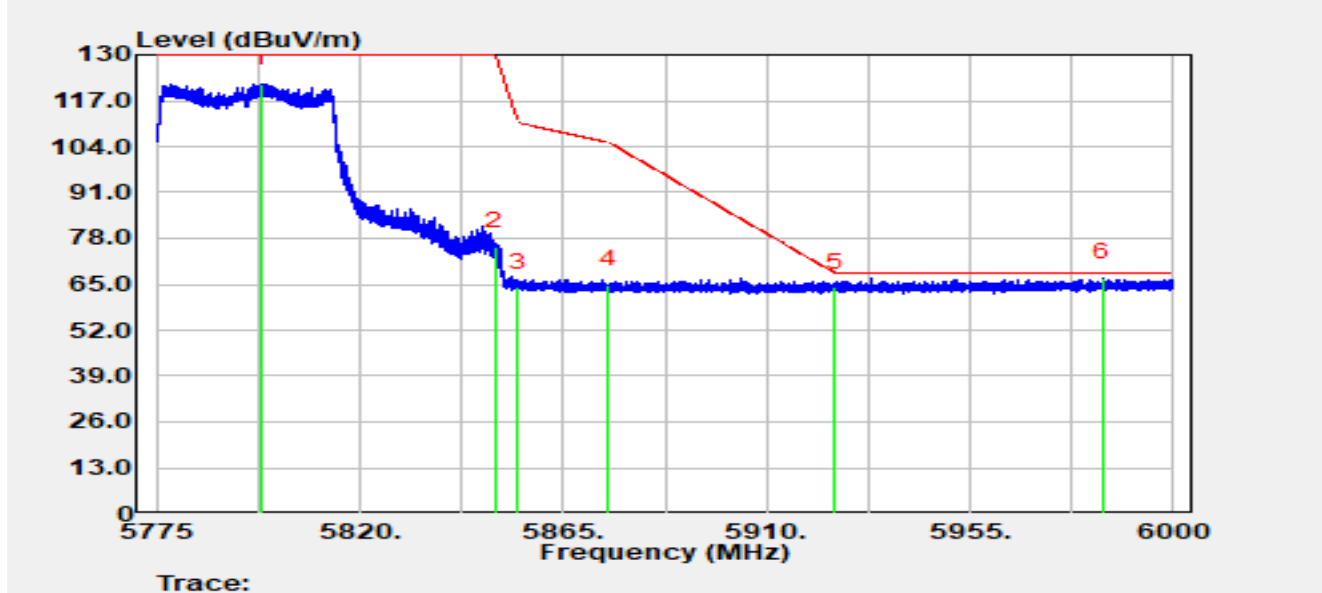


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5797.973	125.39	-3.72	121.67	N/A	N/A	Peak
2		5850.000	79.46	-3.75	75.71	-54.29	130.00	Peak
3		5855.000	67.90	-3.75	64.15	-46.65	110.80	Peak
4		5875.000	68.59	-3.82	64.77	-40.43	105.20	Peak
5		5925.000	67.86	-3.71	64.16	-4.04	68.20	Peak
6	*	5984.250	70.53	-3.67	66.86	-1.34	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

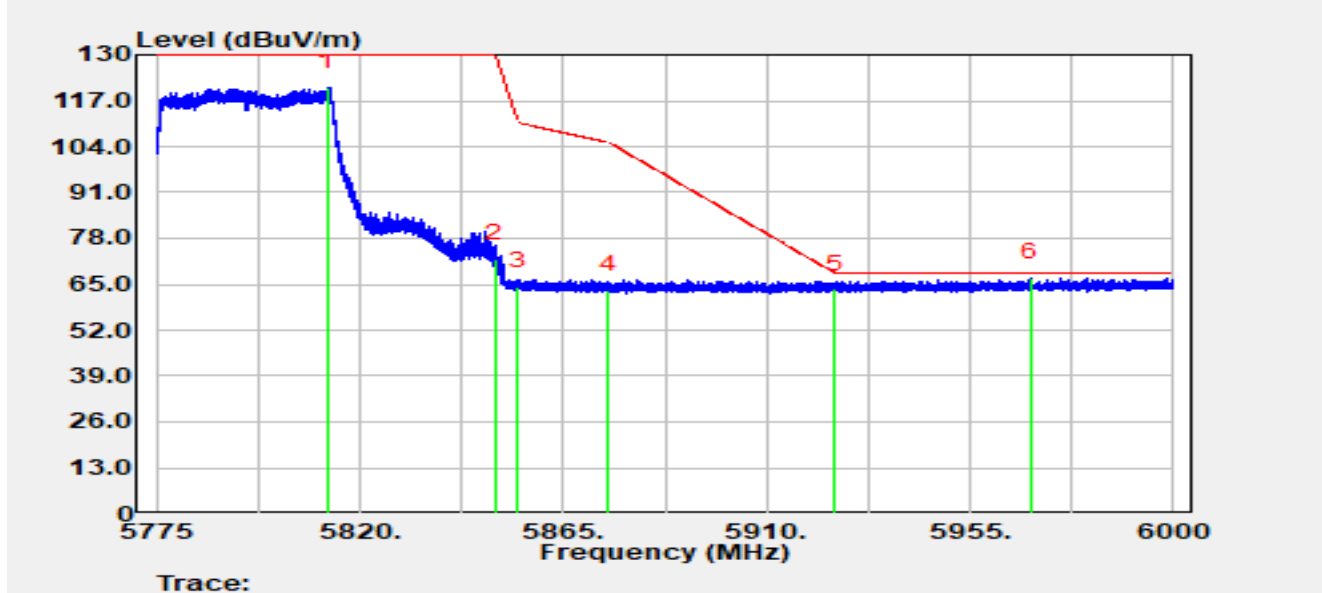


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5812.822	124.52	-3.83	120.69	N/A	N/A	Peak
2		5850.000	75.99	-3.75	72.23	-57.77	130.00	Peak
3		5855.000	68.08	-3.75	64.33	-46.47	110.80	Peak
4		5875.000	67.16	-3.82	63.33	-41.87	105.20	Peak
5		5925.000	67.35	-3.71	63.65	-4.55	68.20	Peak
6	*	5968.433	70.37	-3.64	66.73	-1.47	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

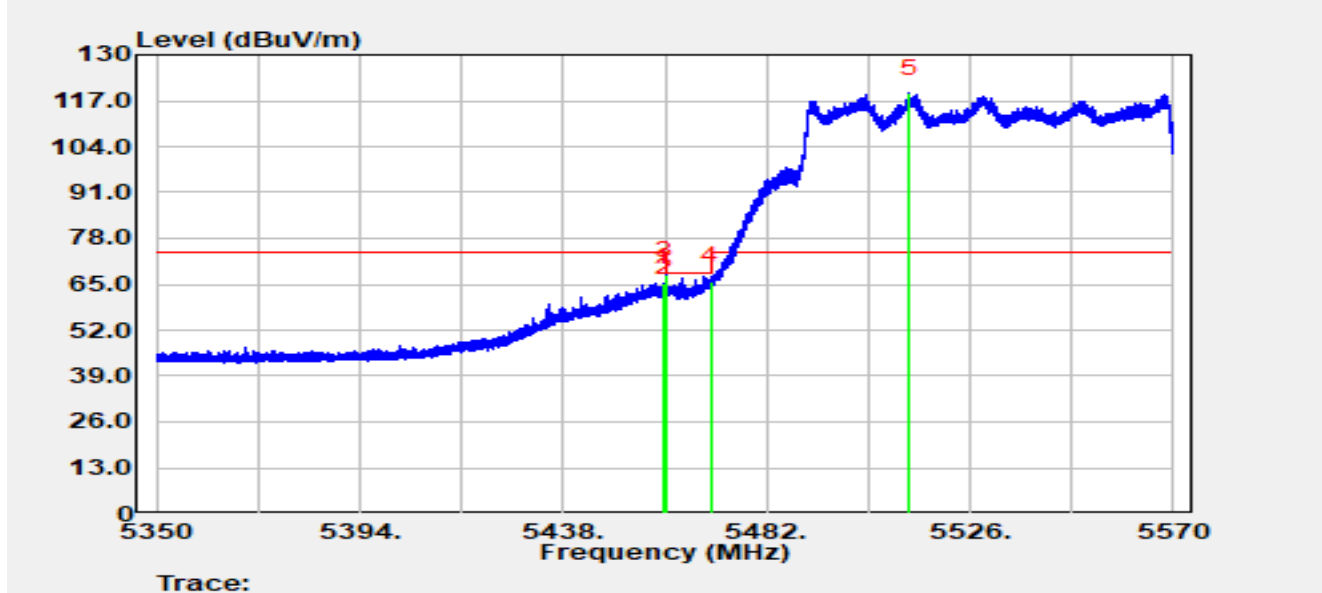


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.516	66.05	-0.76	65.30	-8.70	74.00	Peak
2		5460.000	63.14	-0.69	62.45	-5.75	68.20	Peak
3	*	5460.110	68.20	-0.70	67.49	-0.71	68.20	Peak
4		5470.000	64.81	1.00	65.82	-2.38	68.20	Peak
5		5512.778	75.41	43.76	119.17	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

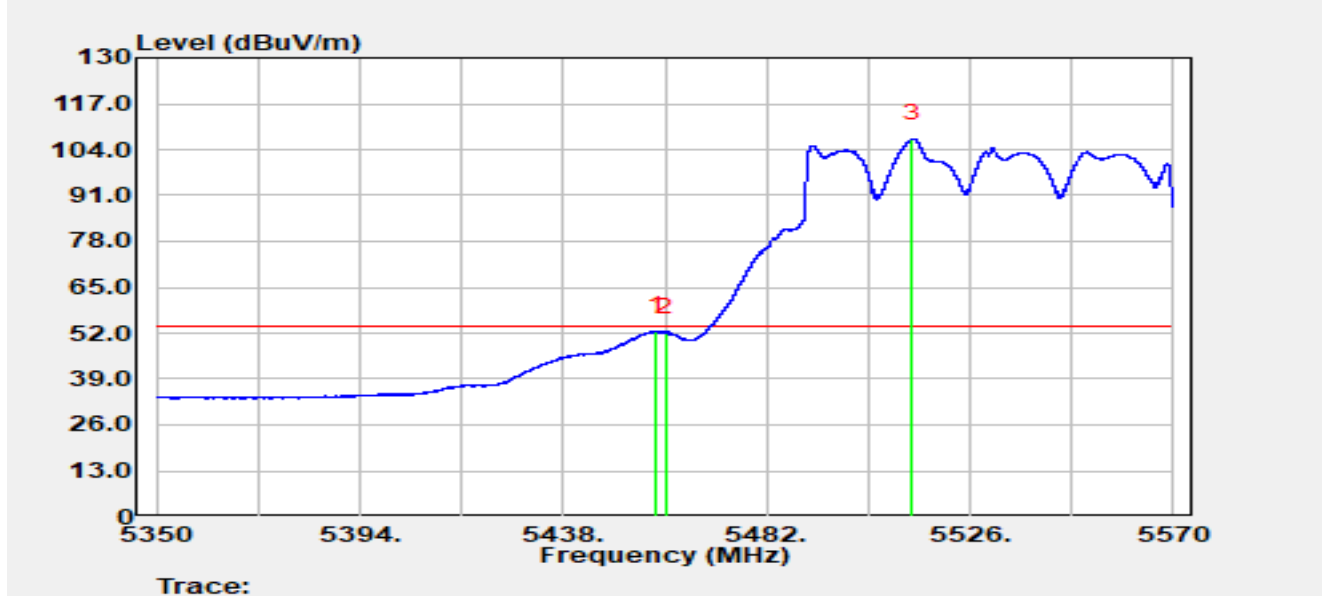


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.240	53.48	-0.81	52.67	-1.33	54.00	Average
2		5460.000	52.83	-0.69	52.13	-1.87	54.00	Average
3		5513.592	62.43	44.75	107.18	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

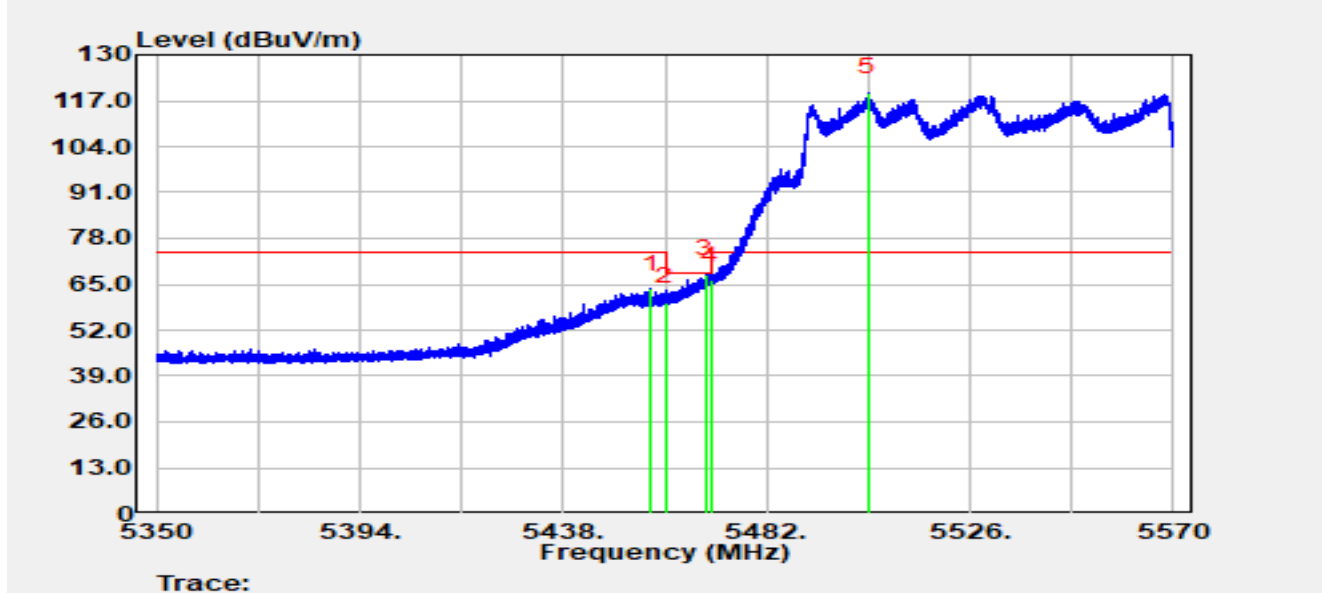


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.030	64.52	-0.91	63.60	-10.40	74.00	Peak
2		5460.000	60.55	-0.69	59.86	-8.34	68.20	Peak
3	*	5468.712	67.38	0.56	67.94	-0.26	68.20	Peak
4		5470.000	65.07	1.00	66.07	-2.13	68.20	Peak
5		5503.824	73.34	45.99	119.32	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

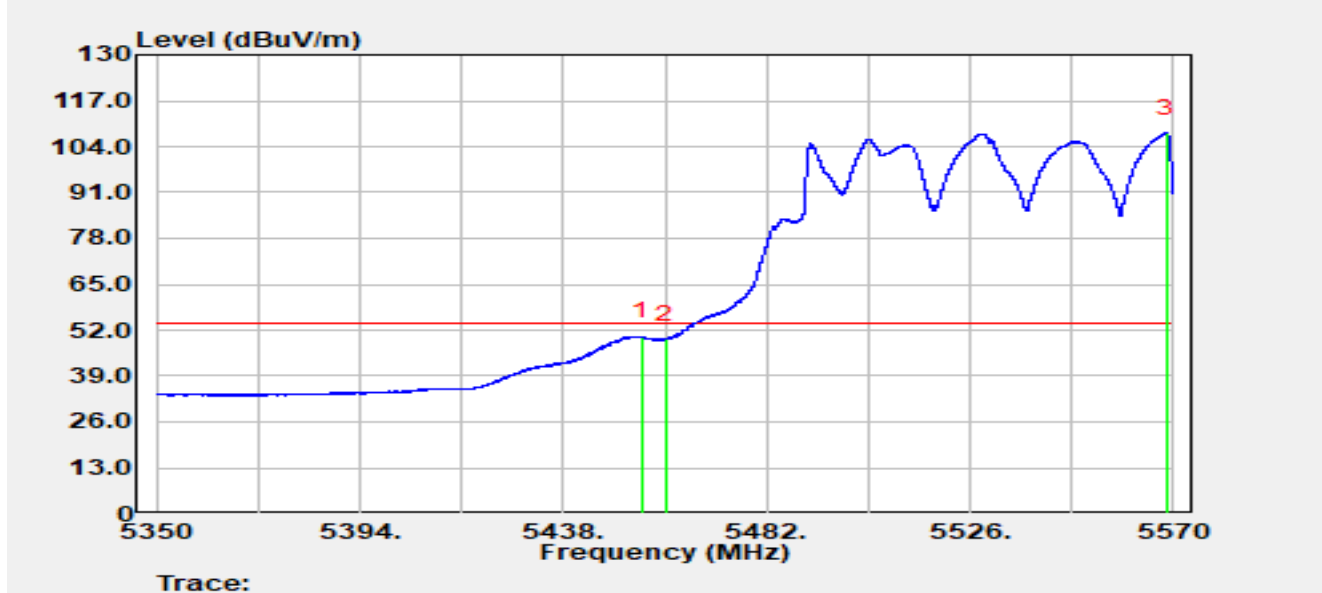


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.896	51.26	-1.02	50.24	-3.76	54.00	Average
2		5460.000	50.21	-0.69	49.51	-4.49	54.00	Average
3		5568.372	61.24	46.67	107.91	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

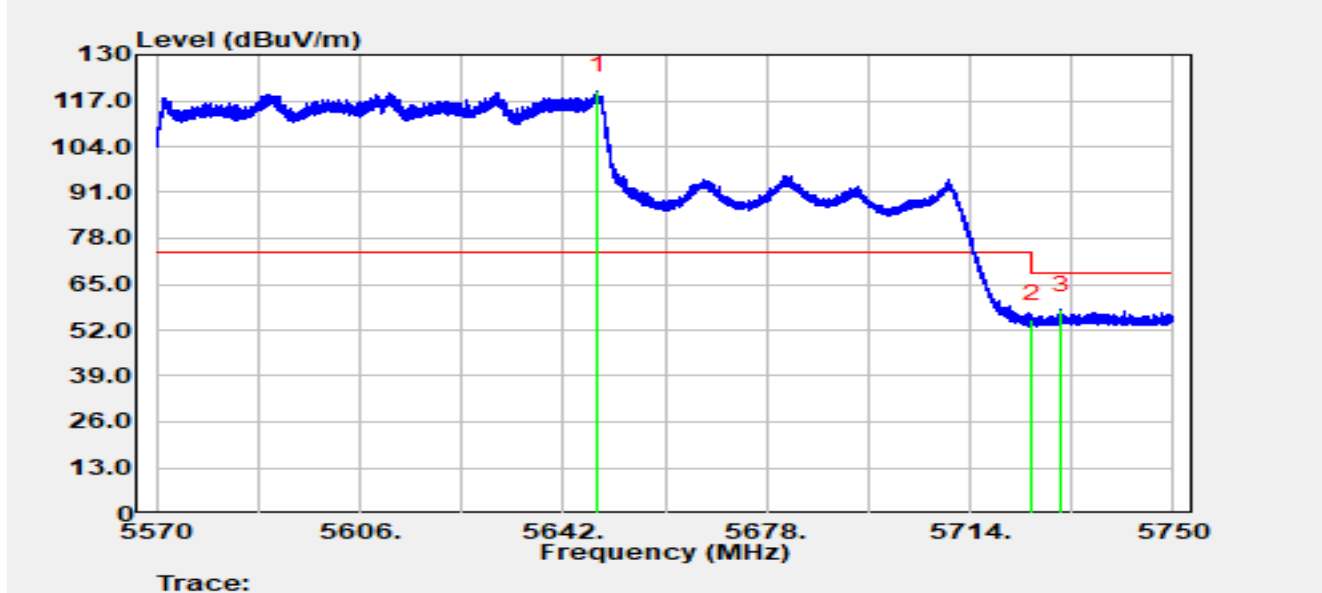


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5648.156	72.92	46.92	119.84	N/A	N/A	Peak
2		5725.000	54.06	1.01	55.07	-13.13	68.20	Peak
3	*	5730.092	58.43	-0.77	57.66	-10.54	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

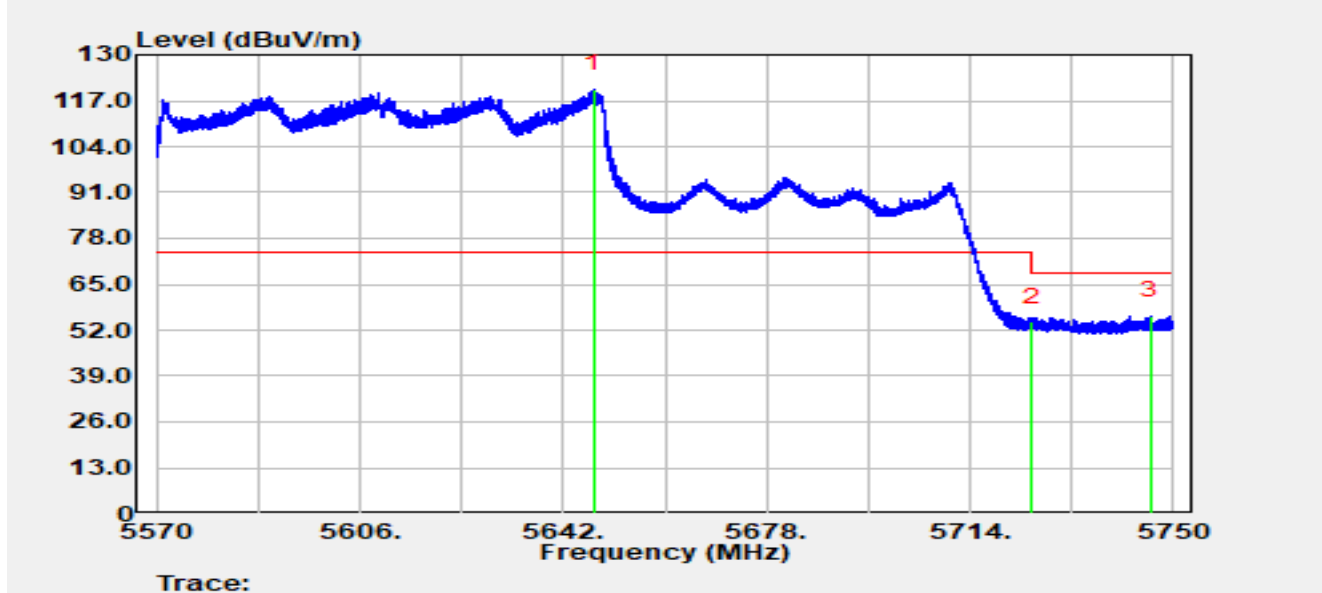


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5647.382	74.49	45.71	120.20	N/A	N/A	Peak
2		5725.000	53.24	1.01	54.25	-13.95	68.20	Peak
3	*	5745.932	58.11	-2.01	56.10	-12.10	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

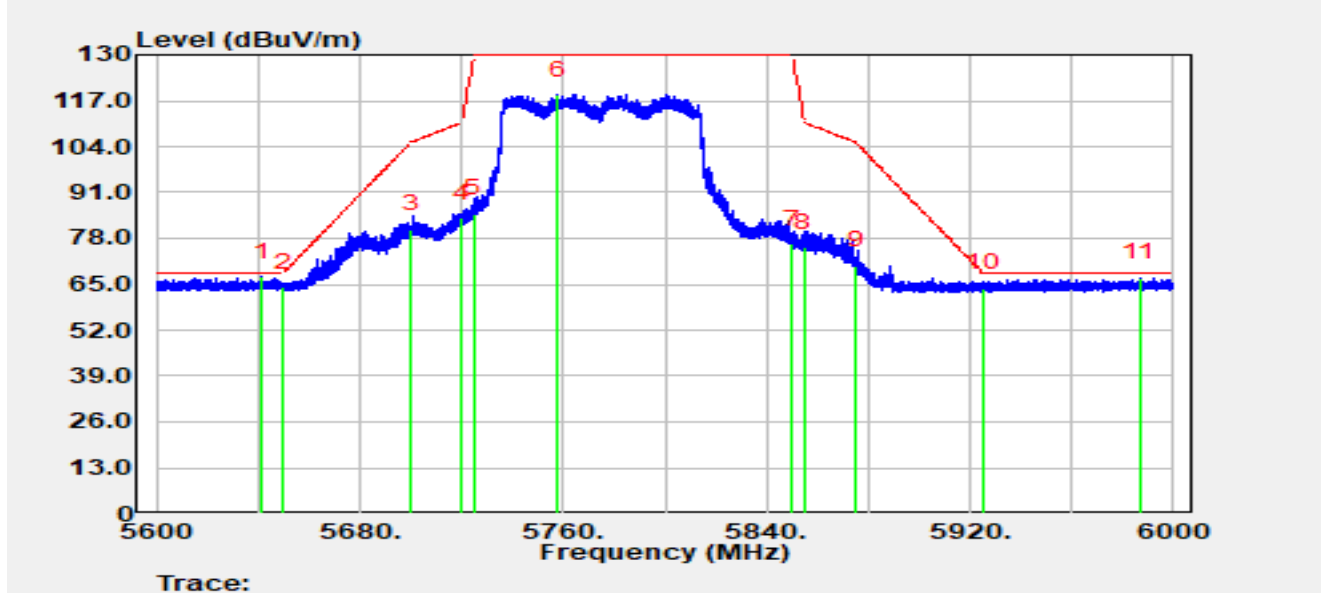


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.560	70.85	-3.65	67.20	-1.00	68.20	Peak
2		5650.000	67.87	-3.65	64.23	-3.97	68.20	Peak
3		5700.000	84.09	-3.47	80.62	-24.58	105.20	Peak
4		5720.000	87.23	-3.45	83.78	-27.02	110.80	Peak
5		5725.000	88.36	-3.47	84.89	-45.11	130.00	Peak
6		5757.960	122.34	-3.65	118.69	N/A	N/A	Peak
7		5850.000	80.18	-3.75	76.42	-53.58	130.00	Peak
8		5855.000	79.27	-3.75	75.52	-35.28	110.80	Peak
9		5875.000	74.05	-3.82	70.22	-34.98	105.20	Peak
10		5925.000	67.58	-3.71	63.87	-4.33	68.20	Peak
11		5986.920	70.64	-3.68	66.96	-1.24	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

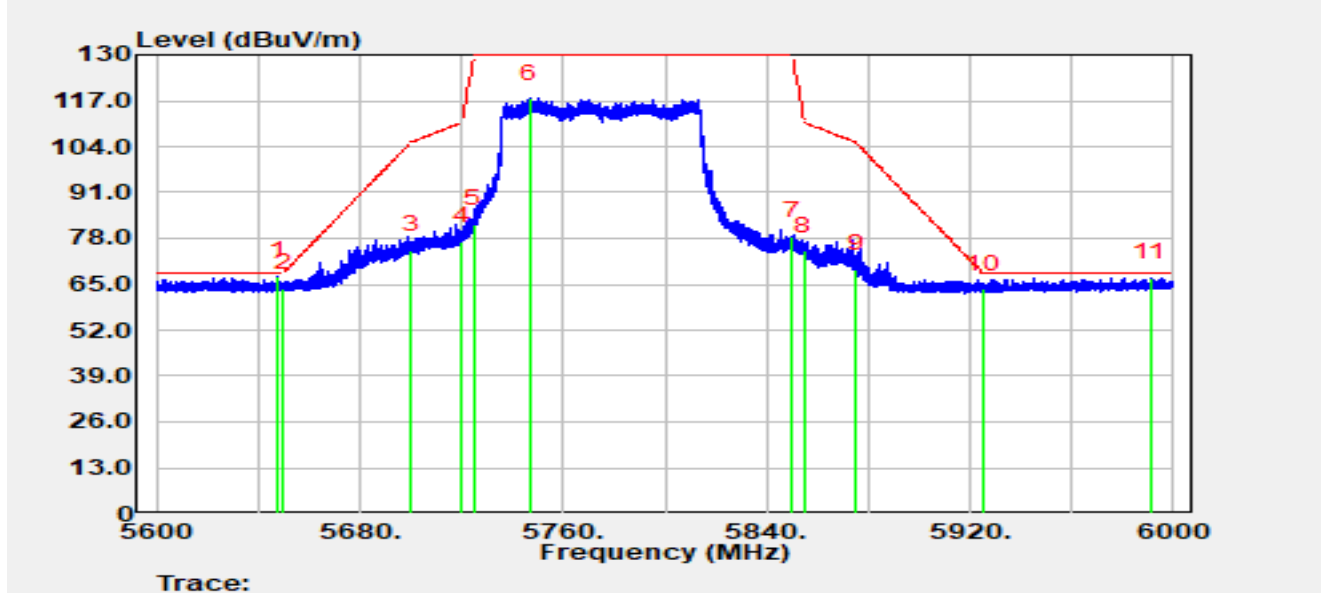


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.840	70.90	-3.65	67.25	-0.95	68.20	Peak
2		5650.000	67.54	-3.65	63.89	-4.31	68.20	Peak
3		5700.000	78.15	-3.47	74.68	-30.52	105.20	Peak
4		5720.000	80.58	-3.45	77.13	-33.67	110.80	Peak
5		5725.000	85.41	-3.47	81.94	-48.06	130.00	Peak
6		5746.800	121.35	-3.65	117.70	N/A	N/A	Peak
7		5850.000	82.36	-3.75	78.60	-51.40	130.00	Peak
8		5855.000	78.27	-3.75	74.52	-36.28	110.80	Peak
9		5875.000	73.12	-3.82	69.29	-35.91	105.20	Peak
10		5925.000	67.39	-3.71	63.69	-4.51	68.20	Peak
11		5990.840	70.56	-3.70	66.87	-1.33	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

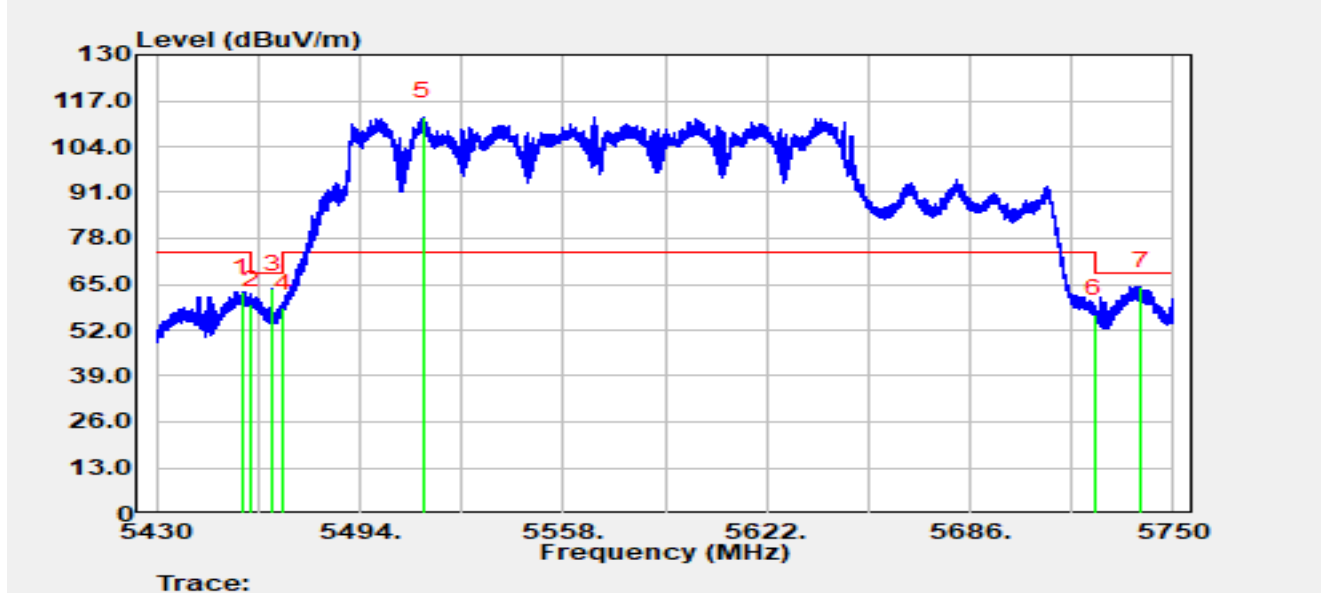


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.848	63.71	-0.92	62.78	-11.22	74.00	Peak
2		5460.000	59.83	-0.69	59.13	-9.07	68.20	Peak
3		5466.640	63.64	0.04	63.68	-4.52	68.20	Peak
4		5470.000	57.31	1.00	58.31	-9.89	68.20	Peak
5		5514.000	67.45	44.90	112.35	N/A	N/A	Peak
6		5725.000	55.62	1.01	56.63	-11.57	68.20	Peak
7	*	5739.728	66.12	-1.69	64.42	-3.78	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

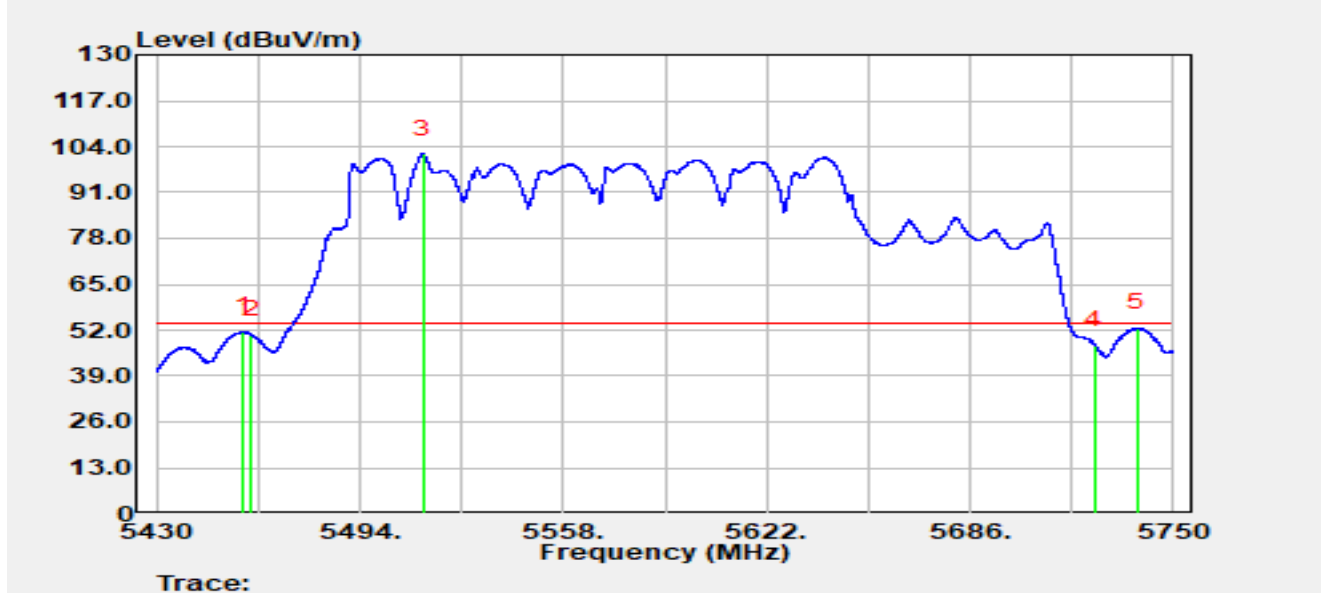


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.232	52.48	-0.90	51.57	-2.43	54.00	Average
2		5460.000	51.45	-0.69	50.76	-3.24	54.00	Average
3		5513.744	57.14	44.81	101.95	N/A	N/A	Average
4		5725.000	46.80	1.01	47.80	-6.20	54.00	Average
5	*	5738.576	54.18	-1.61	52.57	-1.43	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

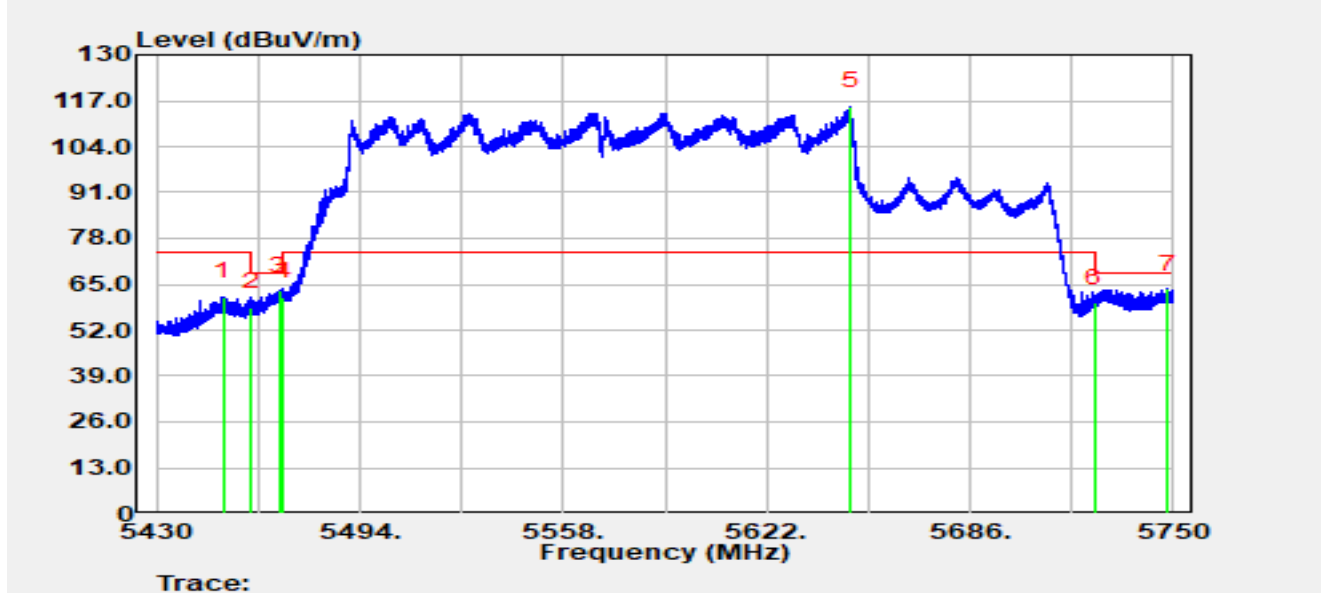


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.024	62.66	-1.23	61.43	-12.57	74.00	Peak
2		5460.000	59.17	-0.69	58.48	-9.72	68.20	Peak
3		5468.816	62.64	0.59	63.22	-4.98	68.20	Peak
4		5470.000	60.40	1.00	61.40	-6.80	68.20	Peak
5		5648.304	68.35	47.17	115.52	N/A	N/A	Peak
6		5725.000	58.61	1.01	59.61	-8.59	68.20	Peak
7	*	5748.048	65.61	-2.08	63.54	-4.66	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

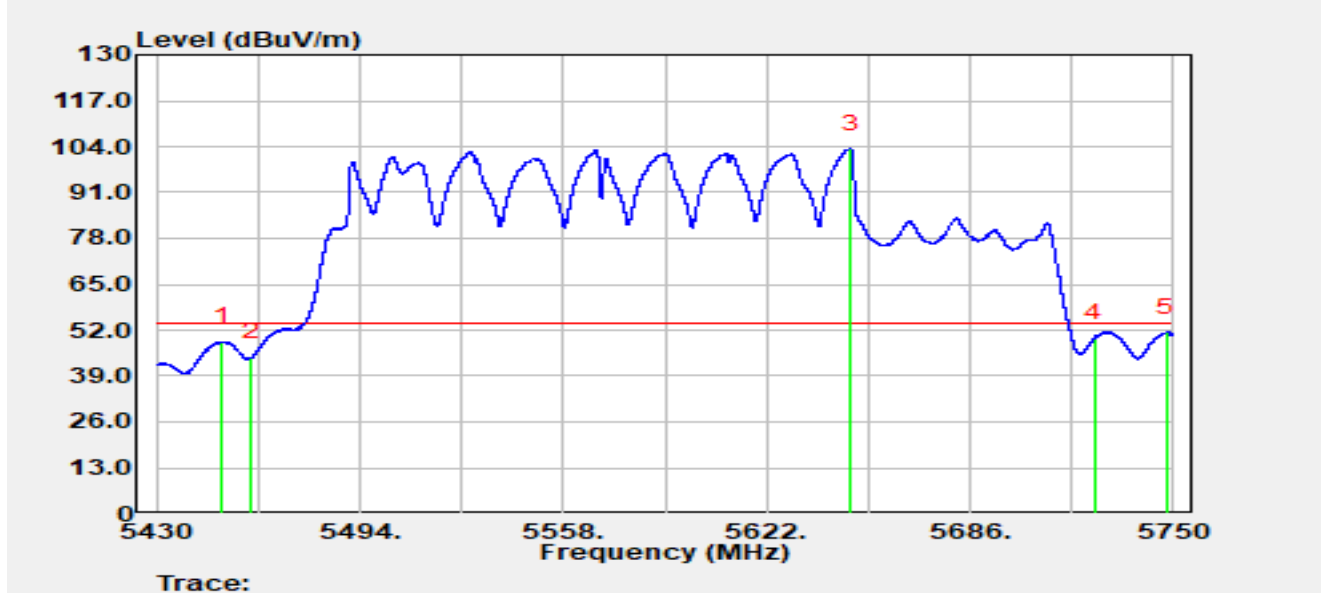


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.512	50.04	-1.25	48.79	-5.21	54.00	Average
2		5460.000	44.89	-0.69	44.20	-9.80	54.00	Average
3		5648.400	55.99	47.33	103.32	N/A	N/A	Average
4		5725.000	48.62	1.01	49.62	-4.38	54.00	Average
5	*	5748.016	53.49	-2.07	51.42	-2.58	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-10-28
Temperature	23.5 °C	Humidity	48.9%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11be-EHT20 at 5785 MHz		

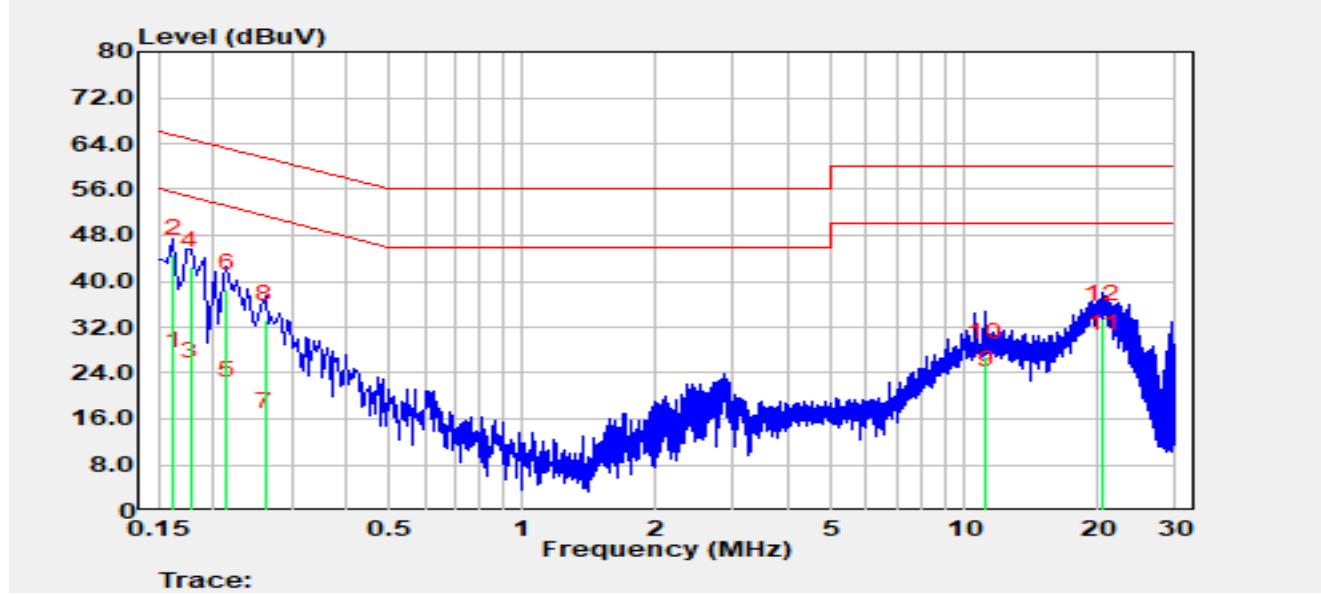


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	15.45	9.64	25.08	-30.28	55.36	Average
2	*	0.162	35.17	9.64	44.80	-20.56	65.36	QP
3		0.178	13.73	9.64	23.37	-31.21	54.58	Average
4		0.178	32.97	9.64	42.61	-21.97	64.58	QP
5		0.214	10.25	9.68	19.93	-33.12	53.05	Average
6		0.214	29.03	9.68	38.72	-24.33	63.05	QP
7		0.262	4.83	9.70	14.53	-36.83	51.37	Average
8		0.262	23.51	9.70	33.22	-28.15	61.37	QP
9		11.150	11.52	10.26	21.78	-28.22	50.00	Average
10		11.150	16.60	10.26	26.86	-33.14	60.00	QP
11		20.640	17.86	10.49	28.35	-21.65	50.00	Average
12		20.640	22.88	10.49	33.37	-26.63	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	SIP-SR2	Test Date	2025-10-28
Temperature	23.5 °C	Humidity	48.9%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11be-EHT20 at 5785 MHz		

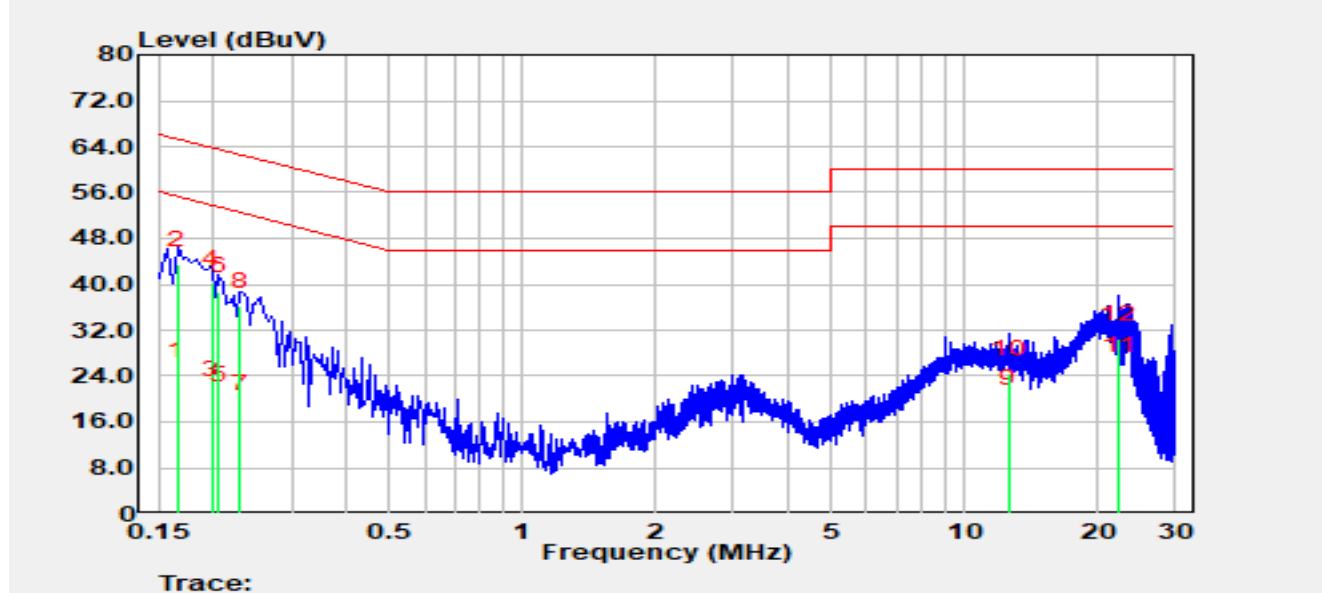

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.166	14.52	9.61	24.13	-31.03	55.16	Average
2	*	0.166	33.86	9.61	43.47	-21.69	65.16	QP
3		0.198	10.98	9.64	20.63	-33.07	53.69	Average
4		0.198	30.39	9.64	40.03	-23.66	63.69	QP
5		0.206	10.23	9.66	19.88	-33.48	53.37	Average
6		0.206	29.03	9.66	38.68	-24.68	63.37	QP
7		0.230	8.73	9.67	18.41	-34.04	52.45	Average
8		0.230	26.41	9.67	36.08	-26.37	62.45	QP
9		12.570	8.74	10.34	19.08	-30.92	50.00	Average
10		12.570	14.06	10.34	24.39	-35.61	60.00	QP
11		22.380	14.55	10.51	25.06	-24.94	50.00	Average
12		22.380	19.91	10.51	30.42	-29.58	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1065098-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1065098-UE" file.

_____ The End _____