

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BT-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-14_18.33.24

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#02

R:Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

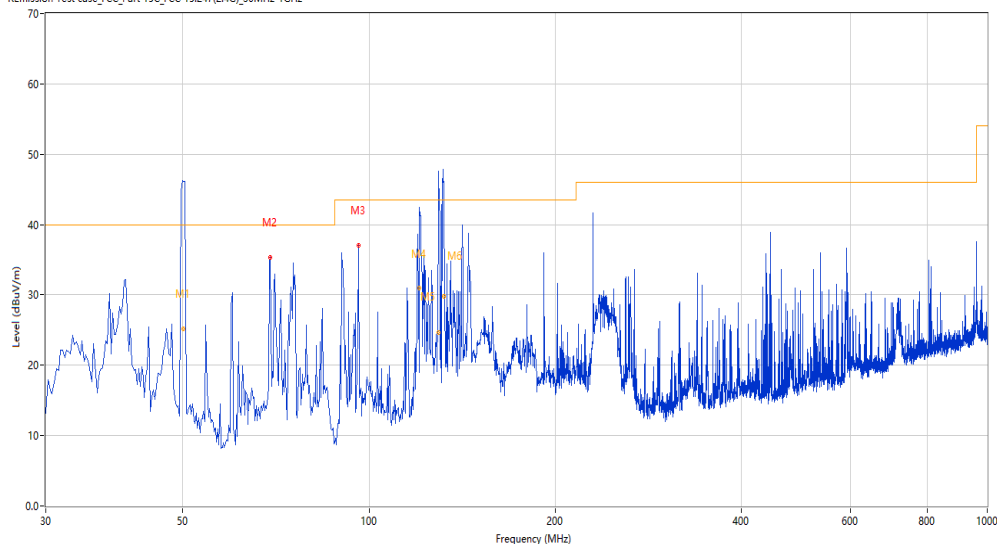

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.118	44.23	-23.98	40.0	-4.23	Peak	156.90	150	Horizontal	N/A
1*	50.118	25.20	-23.98	40.0	14.80	QP	156.90	150	Horizontal	Pass
2	69.275	35.28	-28.41	40.0	4.72	Peak	189.40	150	Horizontal	Pass
3	96.186	37.10	-26.22	43.5	6.40	Peak	134.40	150	Horizontal	Pass
4	120.672	42.38	-27.46	43.5	1.12	Peak	360.00	150	Horizontal	Pass
4*	120.672	30.99	-27.46	43.5	12.51	QP	360.00	150	Horizontal	Pass
5	129.435	46.16	-28.52	43.5	-2.66	Peak	360.00	150	Horizontal	N/A
5*	129.435	24.71	-28.52	43.5	18.79	QP	360.00	150	Horizontal	Pass
6	131.990	48.63	-28.64	43.5	-5.13	Peak	360.00	150	Horizontal	N/A
6*	131.990	29.78	-28.64	43.5	13.72	QP	360.00	150	Horizontal	Pass

BT-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_17.49.04

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.2

Hum.: 53%

Test Engineer: CJY

Test Standard: FCC


Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

st Engineer: LYG

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

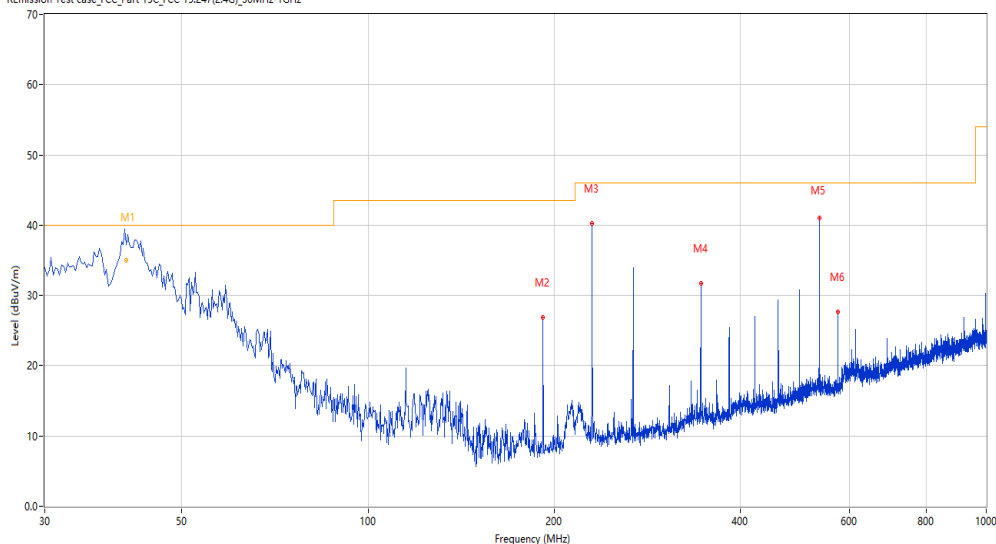

No.	Frequen cy (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.600	40.66	-25.23	40.0	-0.66	Peak	304.30	104	Vertical	N/A
1*	40.600	34.98	-25.23	40.0	5.02	QP	304.30	104	Vertical	Pass
2	191.950	26.83	-26.07	43.5	16.67	Peak	234.60	100	Vertical	Pass
3	230.255	40.18	-24.34	46.0	5.82	Peak	189.20	100	Vertical	Pass
4	345.414	31.70	-20.52	46.0	14.30	Peak	203.40	100	Vertical	Pass
5	537.426	41.08	-16.22	46.0	4.92	Peak	60.40	100	Vertical	Pass
6	575.974	27.62	-15.89	46.0	18.38	Peak	95.00	100	Vertical	Pass

1-18G

BT-Low channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_15.50.11

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

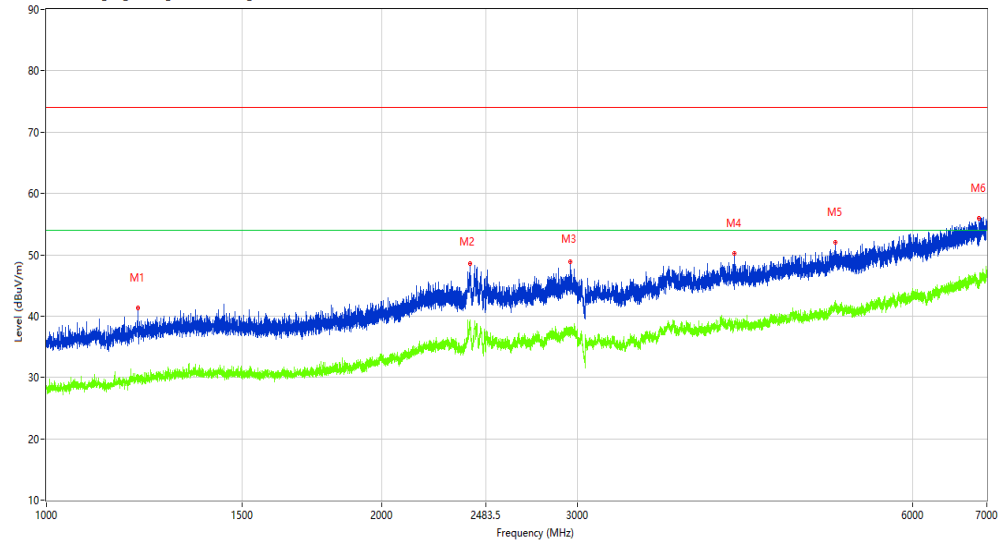

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1208.000	41.27	-13.74	74.0	32.73	Peak	115.10	100	Horizontal	Pass
1**	1208.000	30.52	-13.74	54.0	23.48	AV	115.10	100	Horizontal	Pass
2	2401.750	48.61	-4.70	74.0	25.39	Peak	216.30	100	Horizontal	Pass
2**	2401.750	39.33	-4.70	54.0	14.67	AV	216.30	100	Horizontal	Pass
3	2954.750	48.89	-3.91	74.0	25.11	Peak	131.50	100	Horizontal	Pass
3**	2954.750	37.41	-3.91	54.0	16.59	AV	131.50	100	Horizontal	Pass
4	4151.000	50.25	-2.03	74.0	23.75	Peak	54.20	100	Horizontal	Pass
4**	4151.000	38.63	-2.03	54.0	15.37	AV	54.20	100	Horizontal	Pass
5	5113.500	52.00	0.40	74.0	22.00	Peak	37.90	100	Horizontal	Pass
5**	5113.500	41.89	0.40	54.0	12.11	AV	37.90	100	Horizontal	Pass
6	6891.500	55.92	4.15	74.0	18.08	Peak	326.60	100	Horizontal	Pass
6**	6891.500	45.71	4.15	54.0	8.29	AV	326.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.17.52

EUT Name:

N.A

Test Engineer:

CJY

Manufacturer:

N.A

Test Standard:

FCC

Model:

N.A

Work Addition:

TX

Temp.(oC):

24.5

Load:

Full load


Hum.:

52%

Remark:

DR-RSE01-E23060106-01#02

R Emission Test case_FCC_Part 15C_FCC 15.249_7GHz-18GHz

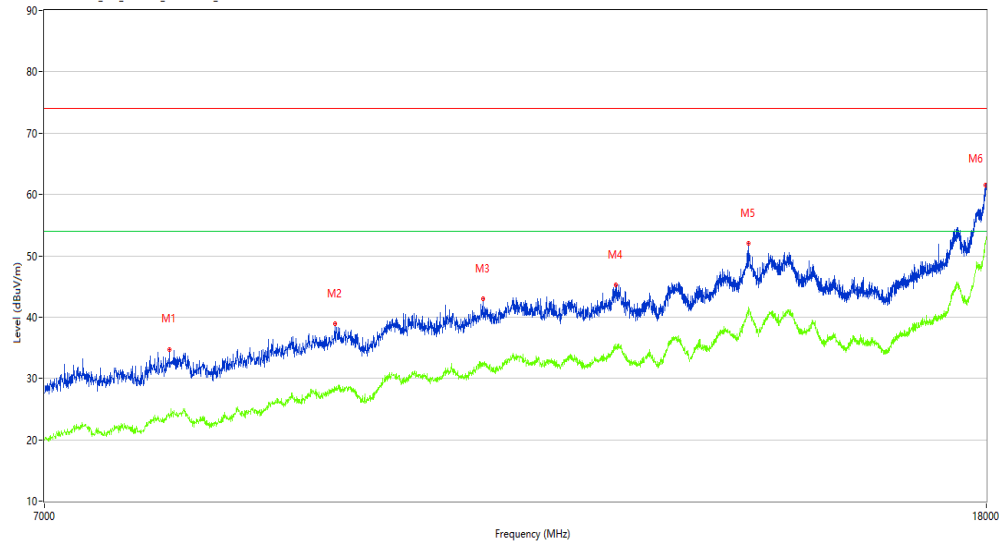

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7935.000	34.76	2.54	74.0	39.24	Peak	193.20	100	Horizontal	Pass
1**	7935.000	24.08	2.54	54.0	29.92	AV	193.20	100	Horizontal	Pass
2	9367.750	38.89	6.64	74.0	35.11	Peak	36.50	100	Horizontal	Pass
2**	9367.750	28.25	6.64	54.0	25.75	AV	36.50	100	Horizontal	Pass
3	10866.500	42.98	10.20	74.0	31.02	Peak	292.20	100	Horizontal	Pass
3**	10866.500	32.49	10.20	54.0	21.51	AV	292.20	100	Horizontal	Pass
4	12412.000	45.21	11.81	74.0	28.79	Peak	307.80	100	Horizontal	Pass
4**	12412.000	35.18	11.81	54.0	18.82	AV	307.80	100	Horizontal	Pass
5	14180.250	52.04	18.41	74.0	21.96	Peak	339.50	100	Horizontal	Pass
5**	14180.250	41.35	18.41	54.0	12.65	AV	339.50	100	Horizontal	Pass
6	17991.750	61.53	29.49	74.0	12.47	Peak	355.80	100	Horizontal	Pass
6**	17991.750	52.56	29.49	54.0	1.44	AV	355.80	100	Horizontal	Pass

BT-Low channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_13.49.25

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

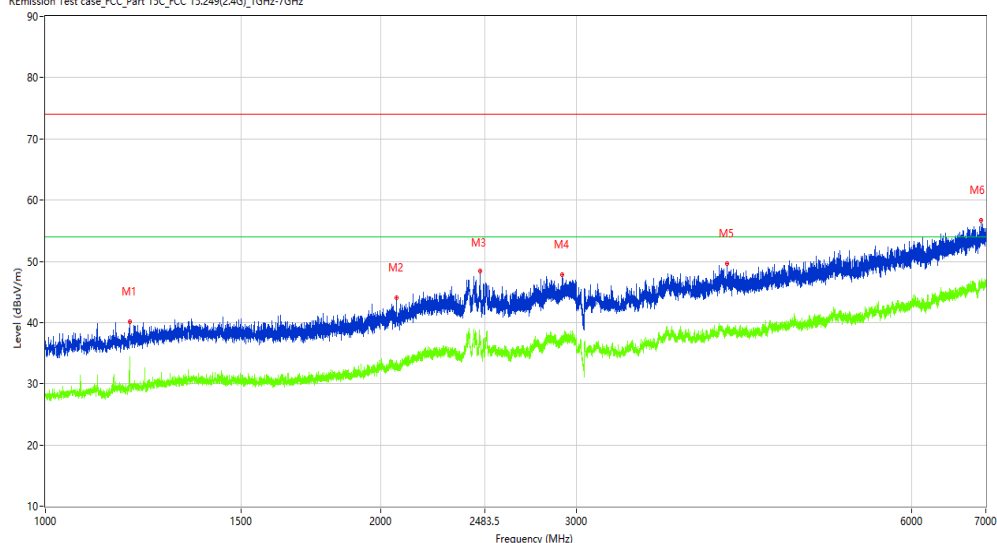

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1190.250	40.20	-13.69	74.0	33.80	Peak	313.00	100	Vertical	Pass
1**	1190.250	34.35	-13.69	54.0	19.65	AV	313.00	100	Vertical	Pass
2	2066.750	44.06	-9.86	74.0	29.94	Peak	0.00	100	Vertical	Pass
2**	2066.750	33.22	-9.86	54.0	20.78	AV	0.00	100	Vertical	Pass
3	2458.750	48.41	-5.82	74.0	25.59	Peak	360.00	100	Vertical	Pass
3**	2458.750	37.58	-5.82	54.0	16.42	AV	360.00	100	Vertical	Pass
4	2914.500	47.83	-4.51	74.0	26.17	Peak	60.00	100	Vertical	Pass
4**	2914.500	37.04	-4.51	54.0	16.96	AV	60.00	100	Vertical	Pass
5	4099.500	49.63	-1.52	74.0	24.37	Peak	152.40	100	Vertical	Pass
5**	4099.500	38.68	-1.52	54.0	15.32	AV	152.40	100	Vertical	Pass
6	6937.000	56.75	4.21	74.0	17.25	Peak	249.90	100	Vertical	Pass
6**	6937.000	46.51	4.21	54.0	7.49	AV	249.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_16.52.51

EUT Name:

N.A

Test Engineer:

CJY

Manufacturer:

N.A

Test Standard:

FCC

Model:

N.A

Work Addition:

TX

Temp.(oC):

24.5

Load:

Full load


Hum.:

52%

Remark:

DR-RSE01-E23060106-01#02

R Emission Test case_FCC_Part 15C_FCC 15.249_7GHz-18GHz

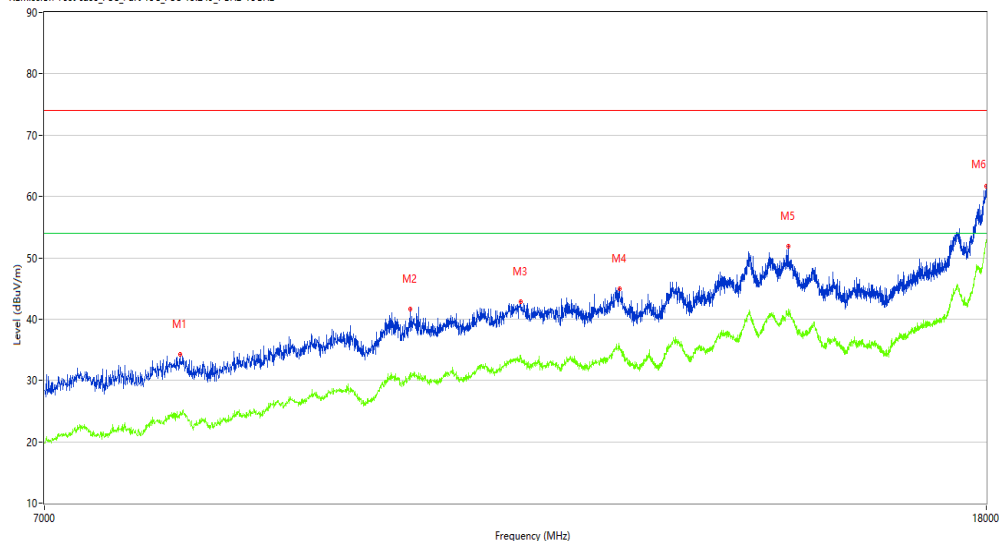

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8020.250	34.29	3.45	74.0	39.71	Peak	313.00	100	Vertical	Pass
1**	8020.250	24.97	3.45	54.0	29.03	AV	313.00	100	Vertical	Pass
2	10099.250	41.70	8.54	74.0	32.30	Peak	343.90	100	Vertical	Pass
2**	10099.250	31.26	8.54	54.0	22.74	AV	343.90	100	Vertical	Pass
3	11287.250	42.84	11.53	74.0	31.16	Peak	343.90	100	Vertical	Pass
3**	11287.250	33.69	11.53	54.0	20.31	AV	343.90	100	Vertical	Pass
4	12458.750	44.95	11.90	74.0	29.05	Peak	1.00	100	Vertical	Pass
4**	12458.750	35.60	11.90	54.0	18.40	AV	1.00	100	Vertical	Pass
5	14757.750	51.83	17.91	74.0	22.17	Peak	157.30	100	Vertical	Pass
5**	14757.750	41.67	17.91	54.0	12.33	AV	157.30	100	Vertical	Pass
6	17997.251	61.67	29.85	74.0	12.33	Peak	1.00	100	Vertical	Pass
6**	17997.251	52.94	29.85	54.0	1.06	AV	1.00	100	Vertical	Pass

BT-Middle channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_15.53.05

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

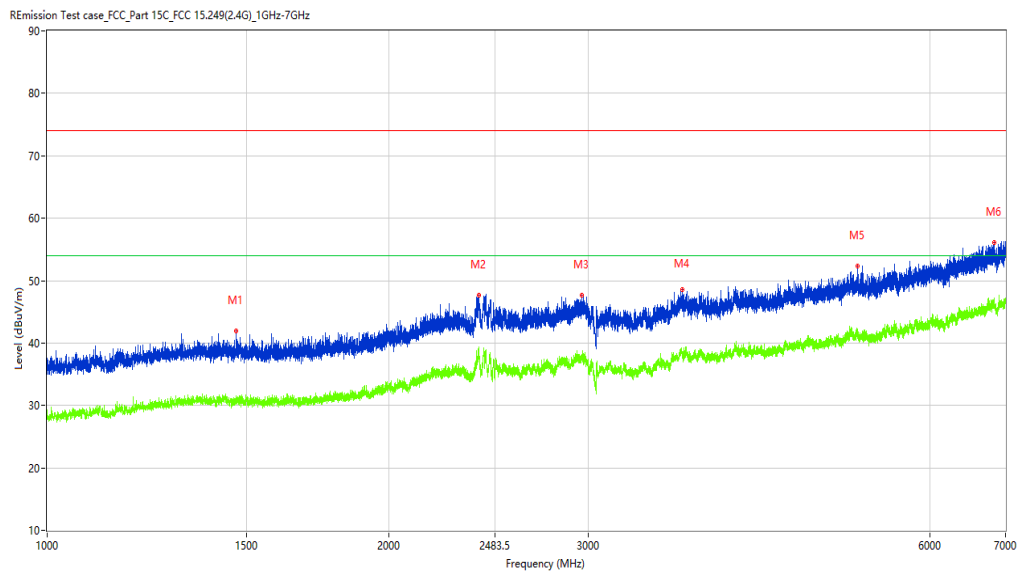

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1466.750	41.91	-12.94	74.0	32.09	Peak	154.80	100	Horizontal	Pass
1**	1466.750	31.44	-12.94	54.0	22.56	AV	154.80	100	Horizontal	Pass
2	2402.750	47.71	-4.72	74.0	26.29	Peak	170.80	100	Horizontal	Pass
2**	2402.750	38.32	-4.72	54.0	15.68	AV	170.80	100	Horizontal	Pass
3	2961.750	47.70	-3.78	74.0	26.30	Peak	170.80	100	Horizontal	Pass
3**	2961.750	37.76	-3.78	54.0	16.24	AV	170.80	100	Horizontal	Pass
4	3630.000	48.63	-2.22	74.0	25.37	Peak	155.80	100	Horizontal	Pass
4**	3630.000	38.21	-2.22	54.0	15.79	AV	155.80	100	Horizontal	Pass
5	5187.500	52.36	0.22	74.0	21.64	Peak	0.00	100	Horizontal	Pass
5**	5187.500	41.34	0.22	54.0	12.66	AV	0.00	100	Horizontal	Pass
6	6841.500	56.07	4.06	74.0	17.93	Peak	341.40	100	Horizontal	Pass
6**	6841.500	45.79	4.06	54.0	8.21	AV	341.40	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.21.09

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249_7GHz-18GHz

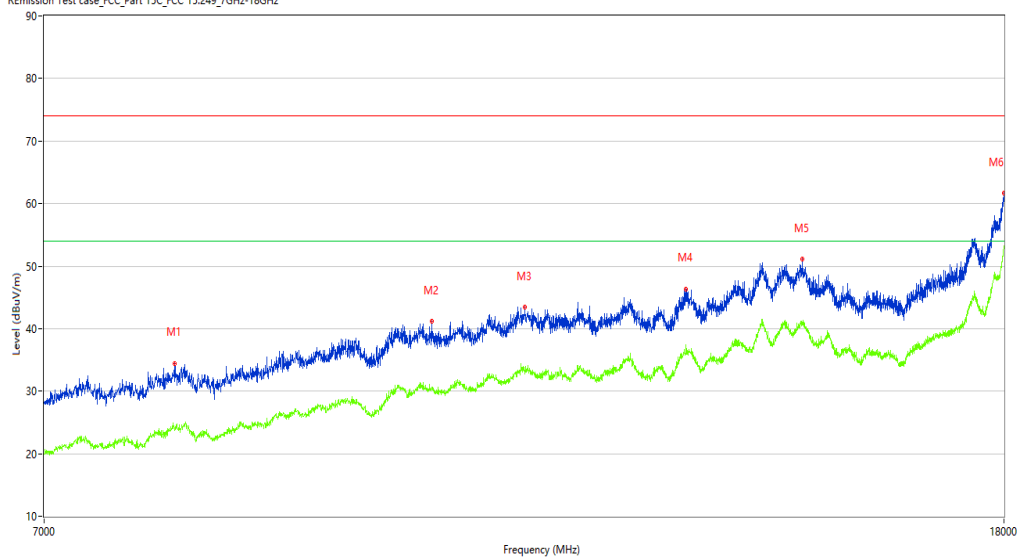

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7957.000	34.48	2.75	74.0	39.52	Peak	0.00	100	Horizontal	Pass
1**	7957.000	24.20	2.75	54.0	29.80	AV	0.00	100	Horizontal	Pass
2	10247.750	41.23	8.39	74.0	32.77	Peak	91.90	100	Horizontal	Pass
2**	10247.750	30.40	8.39	54.0	23.60	AV	91.90	100	Horizontal	Pass
3	11237.750	43.46	10.89	74.0	30.54	Peak	219.60	100	Horizontal	Pass
3**	11237.750	32.70	10.89	54.0	21.30	AV	219.60	100	Horizontal	Pass
4	13157.250	46.37	13.12	74.0	27.63	Peak	154.40	100	Horizontal	Pass
4**	13157.250	36.21	13.12	54.0	17.79	AV	154.40	100	Horizontal	Pass
5	14760.500	51.14	17.94	74.0	22.86	Peak	327.50	100	Horizontal	Pass
5**	14760.500	40.91	17.94	54.0	13.09	AV	327.50	100	Horizontal	Pass
6	17994.500	61.70	29.67	74.0	12.30	Peak	327.50	100	Horizontal	Pass
6**	17994.500	52.84	29.67	54.0	1.16	AV	327.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_13.52.17

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

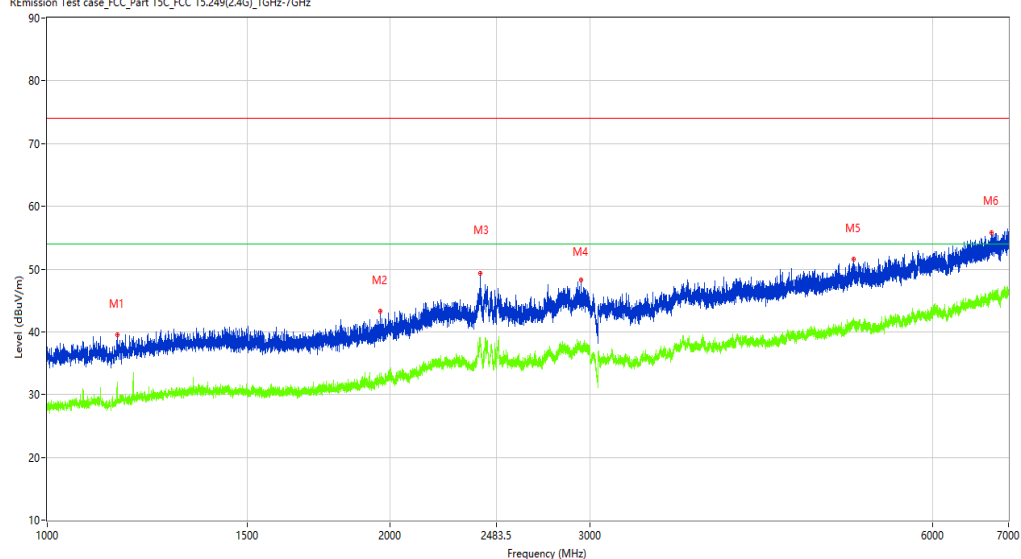

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1152.000	39.51	-14.10	74.0	34.49	Peak	145.90	100	Vertical	Pass
1**	1152.000	32.00	-14.10	54.0	22.00	AV	145.90	100	Vertical	Pass
2	1963.250	43.22	-11.23	74.0	30.78	Peak	282.70	100	Vertical	Pass
2**	1963.250	32.08	-11.23	54.0	21.92	AV	282.70	100	Vertical	Pass
3	2402.250	49.27	-4.71	74.0	24.73	Peak	360.00	100	Vertical	Pass
3**	2402.250	38.65	-4.71	54.0	15.35	AV	360.00	100	Vertical	Pass
4	2948.750	48.30	-4.08	74.0	25.70	Peak	33.50	100	Vertical	Pass
4**	2948.750	37.36	-4.08	54.0	16.64	AV	33.50	100	Vertical	Pass
5	5115.500	51.55	0.39	74.0	22.45	Peak	221.60	100	Vertical	Pass
5**	5115.500	41.53	0.39	54.0	12.47	AV	221.60	100	Vertical	Pass
6	6764.000	55.77	3.95	74.0	18.23	Peak	285.30	100	Vertical	Pass
6**	6764.000	45.55	3.95	54.0	8.45	AV	285.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_16.54.50

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

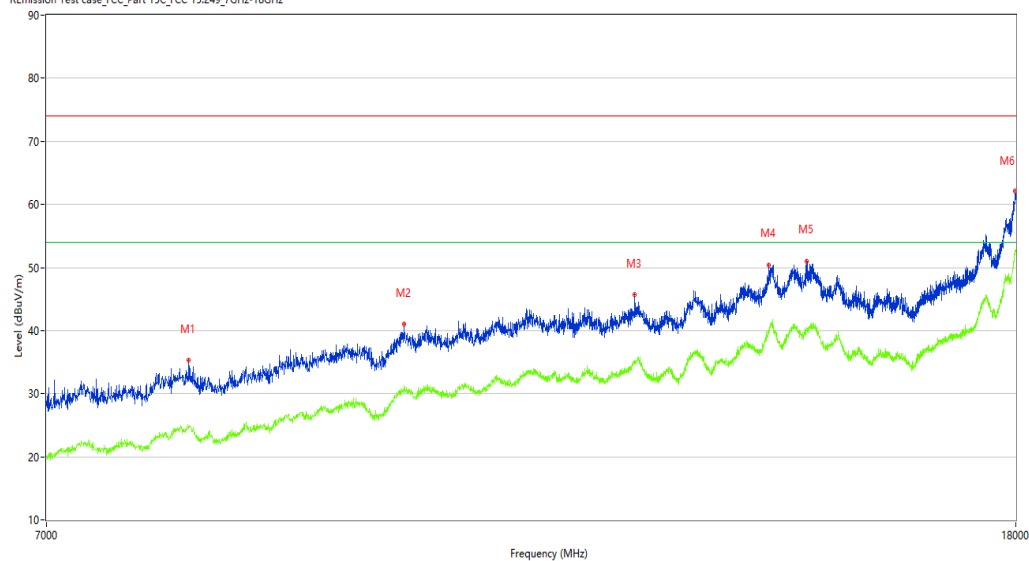

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8039.500	35.32	3.77	74.0	38.68	Peak	222.40	100	Vertical	Pass
1**	8039.500	24.72	3.77	54.0	29.28	AV	222.40	100	Vertical	Pass
2	9915.000	41.07	8.98	74.0	32.93	Peak	222.40	100	Vertical	Pass
2**	9915.000	30.51	8.98	54.0	23.49	AV	222.40	100	Vertical	Pass
3	12417.500	45.65	11.82	74.0	28.35	Peak	349.00	100	Vertical	Pass
3**	12417.500	35.30	11.82	54.0	18.70	AV	349.00	100	Vertical	Pass
4	14152.750	50.30	17.51	74.0	23.70	Peak	222.40	100	Vertical	Pass
4**	14152.750	40.19	17.51	54.0	13.81	AV	222.40	100	Vertical	Pass
5	14683.500	51.05	17.07	74.0	22.95	Peak	0.00	100	Vertical	Pass
5**	14683.500	40.08	17.07	54.0	13.92	AV	0.00	100	Vertical	Pass
6	17988.999	62.14	29.31	74.0	11.86	Peak	190.00	100	Vertical	Pass
6**	17988.999	52.56	29.31	54.0	1.44	AV	190.00	100	Vertical	Pass

BT-High channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_16.03.04

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

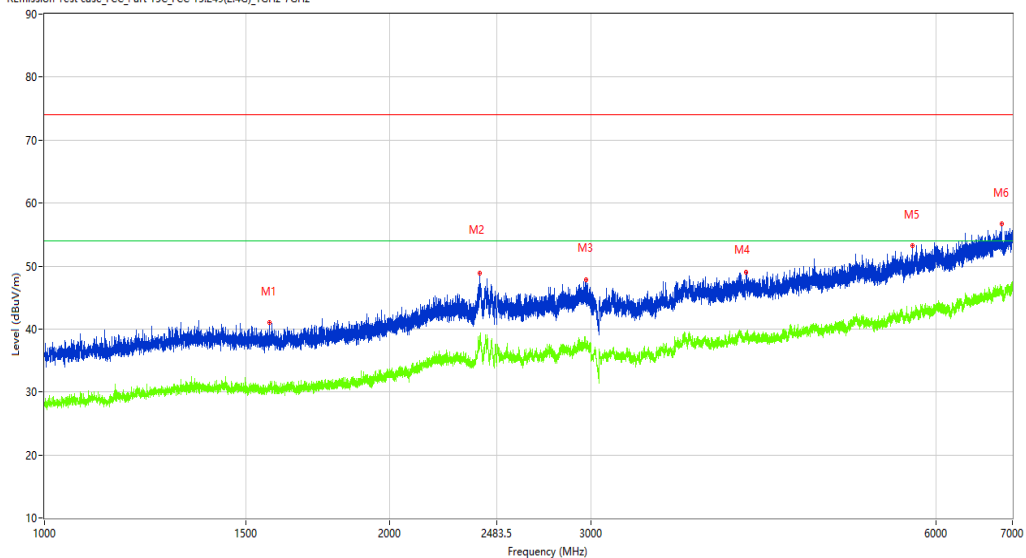

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1571.750	41.04	-13.02	74.0	32.96	Peak	147.40	100	Horizontal	Pass
1**	1571.750	30.40	-13.02	54.0	23.60	AV	147.40	100	Horizontal	Pass
2	2400.750	48.91	-4.68	74.0	25.09	Peak	147.40	100	Horizontal	Pass
2**	2400.750	38.76	-4.68	54.0	15.24	AV	147.40	100	Horizontal	Pass
3	2970.750	47.87	-3.71	74.0	26.13	Peak	147.40	100	Horizontal	Pass
3**	2970.750	36.68	-3.71	54.0	17.32	AV	147.40	100	Horizontal	Pass
4	4099.000	49.08	-1.50	74.0	24.92	Peak	349.60	100	Horizontal	Pass
4**	4099.000	38.65	-1.50	54.0	15.35	AV	349.60	100	Horizontal	Pass
5	5724.500	53.24	0.70	74.0	20.76	Peak	332.90	100	Horizontal	Pass
5**	5724.500	42.08	0.70	54.0	11.92	AV	332.90	100	Horizontal	Pass
6	6848.000	56.70	4.05	74.0	17.30	Peak	187.00	100	Horizontal	Pass
6**	6848.000	46.02	4.05	54.0	7.98	AV	187.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.19.05

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY

Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9414.500	39.99	6.71	74.0	34.01	Peak	94.20	100	Horizontal	Pass
1**	9414.500	28.44	6.71	54.0	25.56	AV	94.20	100	Horizontal	Pass
2	11350.500	44.75	11.07	74.0	29.25	Peak	360.00	100	Horizontal	Pass
2**	11350.500	32.94	11.07	54.0	21.06	AV	360.00	100	Horizontal	Pass
3	13129.750	45.69	13.04	74.0	28.31	Peak	360.00	100	Horizontal	Pass
3**	13129.750	36.18	13.04	54.0	17.82	AV	360.00	100	Horizontal	Pass
4	14188.500	50.33	18.65	74.0	23.67	Peak	360.00	100	Horizontal	Pass
4**	14188.500	41.53	18.65	54.0	12.47	AV	360.00	100	Horizontal	Pass
5	14733.000	52.04	17.62	74.0	21.96	Peak	352.10	100	Horizontal	Pass
5**	14733.000	40.73	17.62	54.0	13.27	AV	352.10	100	Horizontal	Pass
6	17988.999	62.14	29.31	74.0	11.86	Peak	272.10	100	Horizontal	Pass
6**	17988.999	53.09	29.31	54.0	0.91	AV	272.10	100	Horizontal	Pass

BT-High channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_13.55.59

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

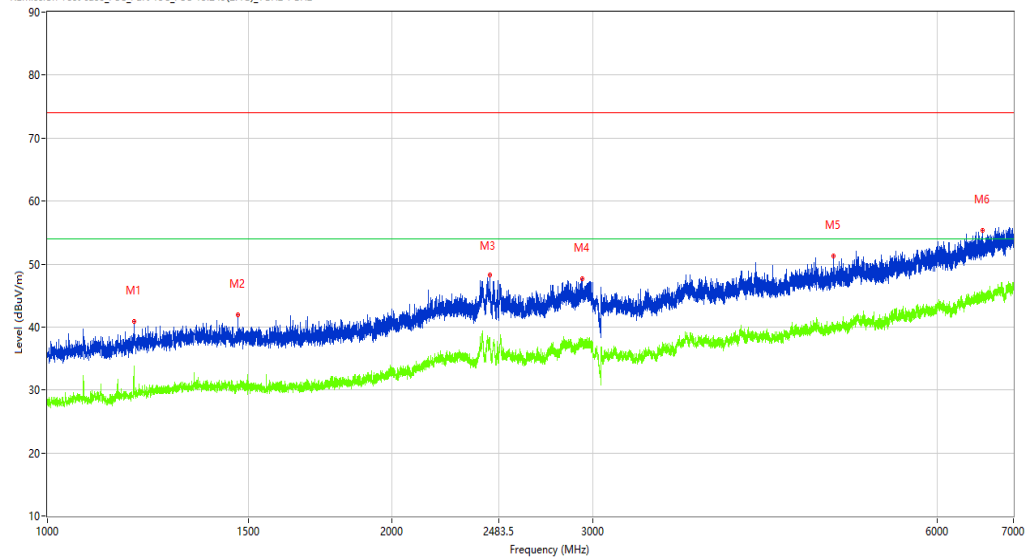

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1190.750	40.86	-13.68	74.0	33.14	Peak	176.00	100	Vertical	Pass
1**	1190.750	31.56	-13.68	54.0	22.44	AV	176.00	100	Vertical	Pass
2	1468.250	41.87	-12.93	74.0	32.13	Peak	302.90	100	Vertical	Pass
2**	1468.250	30.40	-12.93	54.0	23.60	AV	302.90	100	Vertical	Pass
3	2438.750	48.34	-5.45	74.0	25.66	Peak	110.20	100	Vertical	Pass
3**	2438.750	38.30	-5.45	54.0	15.70	AV	110.20	100	Vertical	Pass
4	2935.000	47.63	-4.51	74.0	26.37	Peak	302.90	100	Vertical	Pass
4**	2935.000	37.24	-4.51	54.0	16.76	AV	302.90	100	Vertical	Pass
5	4875.000	51.22	-0.84	74.0	22.78	Peak	360.00	100	Vertical	Pass
5**	4875.000	40.44	-0.84	54.0	13.56	AV	360.00	100	Vertical	Pass
6	6577.000	55.38	3.23	74.0	18.62	Peak	205.20	100	Vertical	Pass
6**	6577.000	44.87	3.23	54.0	9.13	AV	205.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_16.56.42

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

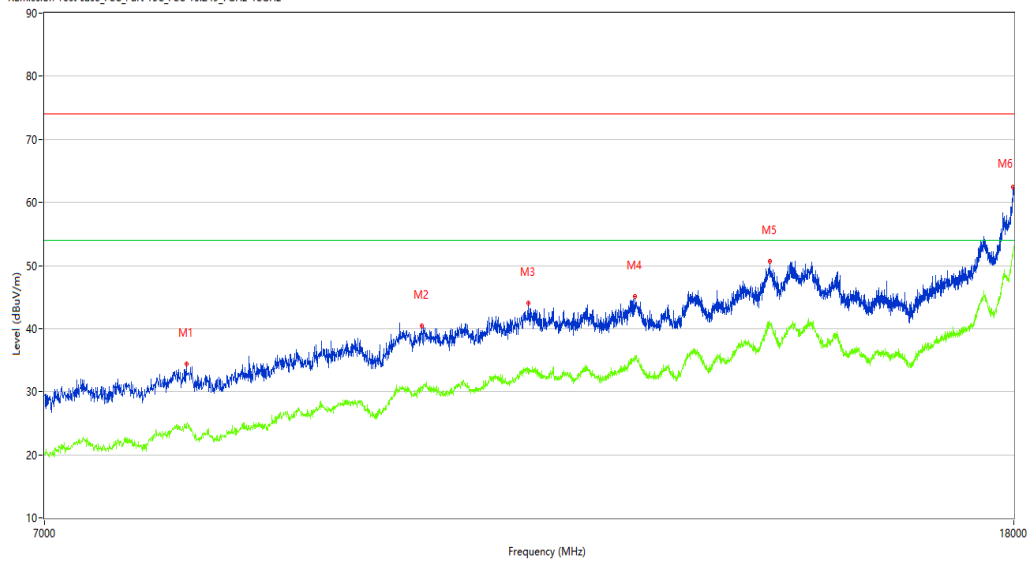

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8039.500	34.42	3.77	74.0	39.58	Peak	360.00	100	Vertical	Pass
1**	8039.500	24.12	3.77	54.0	29.88	AV	360.00	100	Vertical	Pass
2	10107.500	40.37	8.58	74.0	33.63	Peak	4.70	100	Vertical	Pass
2**	10107.500	30.75	8.58	54.0	23.25	AV	4.70	100	Vertical	Pass
3	11215.750	43.99	10.61	74.0	30.01	Peak	4.70	100	Vertical	Pass
3**	11215.750	33.65	10.61	54.0	20.35	AV	4.70	100	Vertical	Pass
4	12447.750	45.15	11.87	74.0	28.85	Peak	360.00	100	Vertical	Pass
4**	12447.750	35.35	11.87	54.0	18.65	AV	360.00	100	Vertical	Pass
5	14194.000	50.69	18.53	74.0	23.31	Peak	4.70	100	Vertical	Pass
5**	14194.000	40.86	18.53	54.0	13.14	AV	4.70	100	Vertical	Pass
6	17986.251	62.47	29.13	74.0	11.53	Peak	254.10	100	Vertical	Pass
6**	17986.251	52.28	29.13	54.0	1.72	AV	254.10	100	Vertical	Pass

BT-Bandedge -Low channel- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2023-08-12_16.14.29

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_bandedge

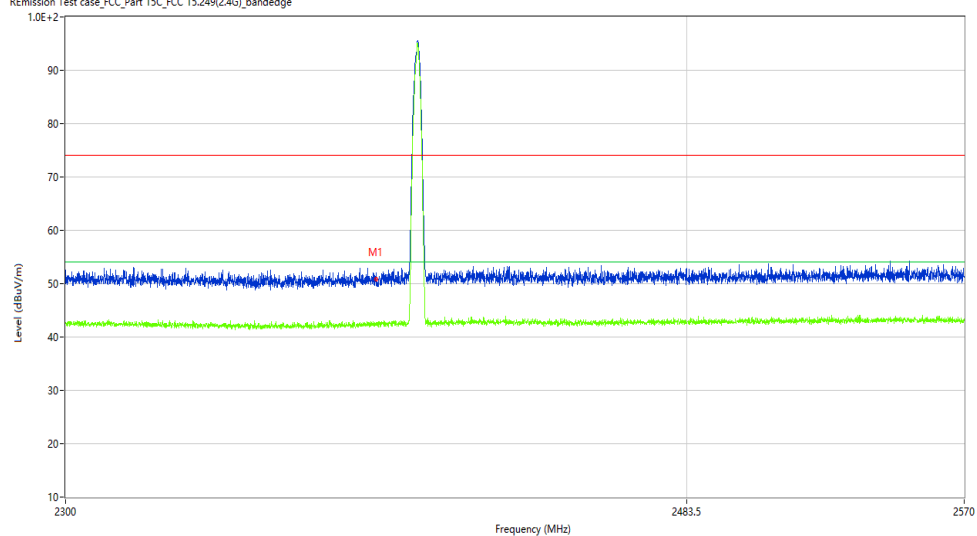

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.92	-10.27	74.0	23.08	Peak	291.72	100	H	Pass
1**	2390.000	42.28	-10.27	54.0	11.72	AV	291.72	100	H	Pass

BT-Bandedge -Low channel- Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2023-08-12_13.20.59

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_bandedge

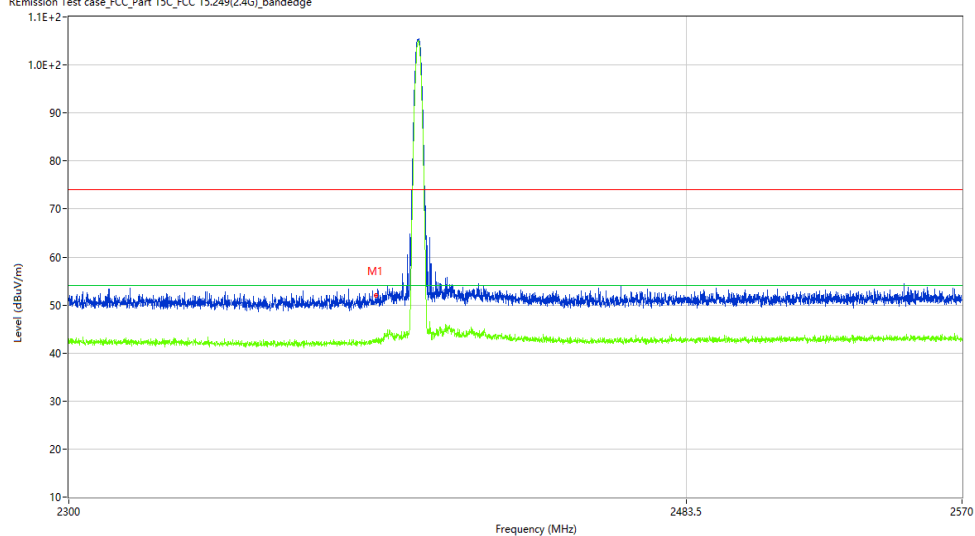

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.44	-10.27	74.0	21.56	Peak	271.40	100	V	Pass
1**	2390.000	42.42	-10.27	54.0	11.58	AV	271.40	100	V	Pass

BT-Bandedge -High channel- Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_16.12.33

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

R/Emission Test case_FCC_Part 15C_FCC 15.249(2.4G)_bandedge

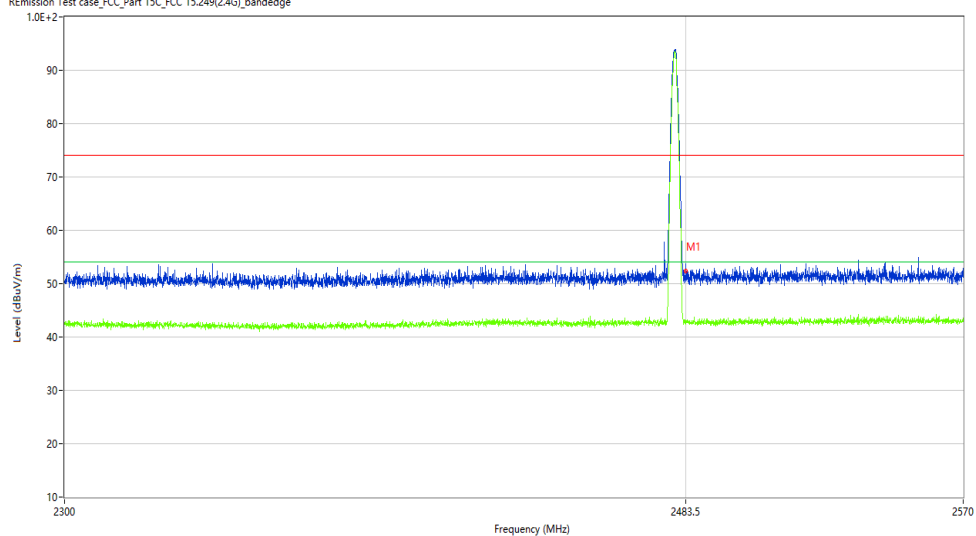

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.38	-9.82	74.0	21.62	Peak	115.20	100	H	Pass
1**	2483.500	42.88	-9.82	54.0	11.12	AV	115.20	100	H	Pass

BT-Bandedge -High channel- Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_13.23.19

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_bandedge

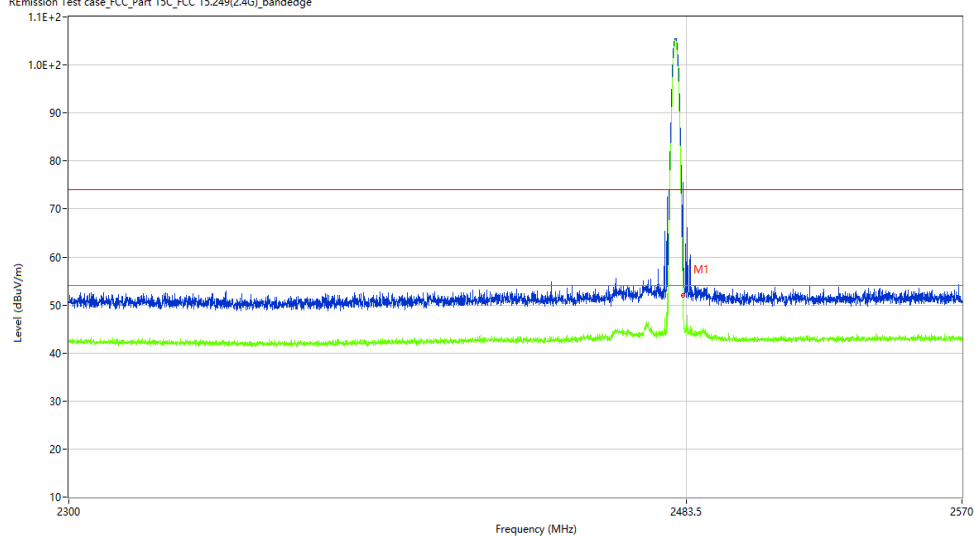

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.51	-9.82	74.0	21.49	Peak	278.77	100	V	Pass
1**	2483.500	44.20	-9.82	54.0	9.80	AV	278.77	100	V	Pass

30M-1G

BT-Hopping-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2023-08-14_18.38.32

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

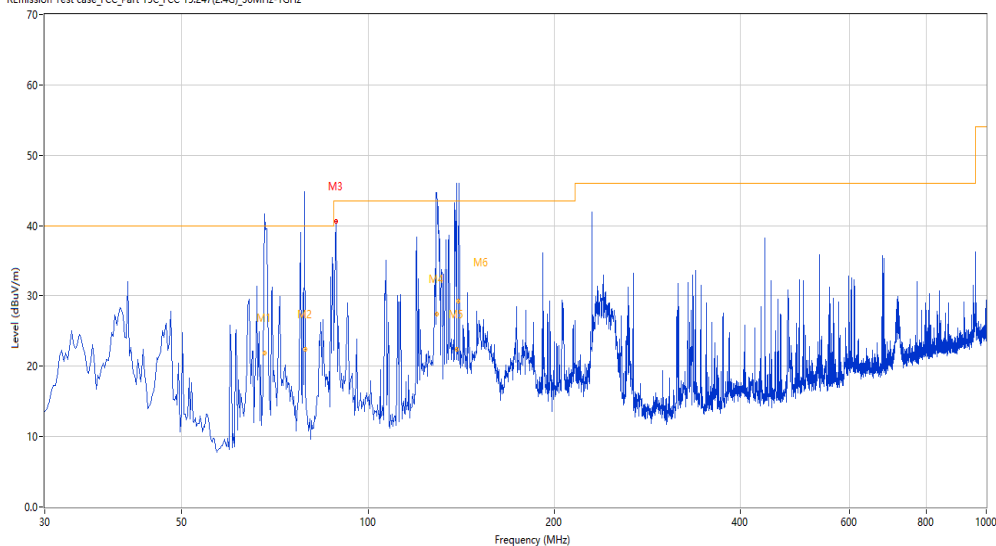

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	68.081	37.87	-27.93	40.0	2.13	Peak	345.60	150	Horizontal	Pass
1*	68.081	21.85	-27.93	40.0	18.15	QP	345.60	150	Horizontal	Pass
2	79.220	28.10	-30.85	40.0	11.90	Peak	286.40	150	Horizontal	Pass
2*	79.220	22.45	-30.85	40.0	17.55	QP	286.40	150	Horizontal	Pass
3	88.670	40.63	-28.08	43.5	2.87	Peak	35.80	150	Horizontal	Pass
4	129.132	46.65	-28.48	43.5	-3.15	Peak	134.00	150	Horizontal	N/A
4*	129.132	27.39	-28.48	43.5	16.11	QP	134.00	150	Horizontal	Pass
5	139.192	35.97	-29.09	43.5	7.53	Peak	37.10	150	Horizontal	Pass
5*	139.192	22.45	-29.09	43.5	21.05	QP	37.10	150	Horizontal	Pass
6	140.064	48.84	-29.15	43.5	-5.34	Peak	37.10	150	Horizontal	N/A
6*	140.064	29.26	-29.15	43.5	14.24	QP	37.10	150	Horizontal	Pass

BT-Hopping -Vertical-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_17.41.49

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.2

Hum.: 53%

Test Engineer: CJY

Test Standard: FCC


Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

st Engineer: LYG

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

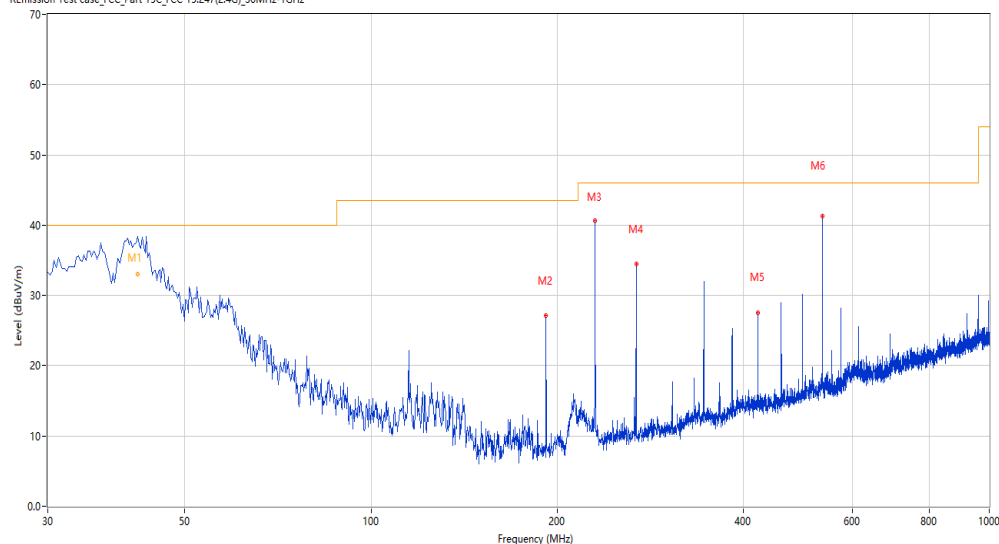

No.	Frequen cy (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	41.946	37.77	-24.82	40.0	2.23	Peak	176.00	103	Vertical	Pass
1*	41.946	33.05	-24.82	40.0	6.95	QP	176.00	103	Vertical	Pass
2	191.950	27.08	-26.07	43.5	16.42	Peak	225.80	100	Vertical	Pass
3	230.255	40.58	-24.34	46.0	5.42	Peak	182.00	100	Vertical	Pass
4	268.803	34.51	-23.50	46.0	11.49	Peak	192.40	100	Vertical	Pass
5	422.267	27.58	-19.01	46.0	18.42	Peak	183.10	100	Vertical	Pass
6	537.426	41.29	-16.22	46.0	4.71	Peak	56.20	100	Vertical	Pass

1-18G

BT-Hopping -Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_15.58.01

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

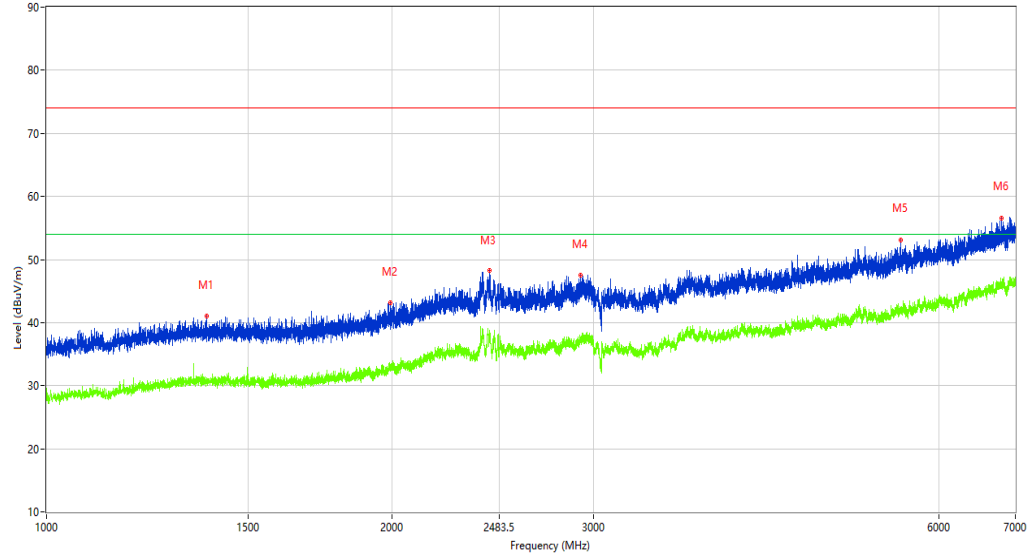

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1378.750	41.01	-12.80	74.0	32.99	Peak	284.80	100	Horizontal	Pass
1**	1378.750	30.99	-12.80	54.0	23.01	AV	284.80	100	Horizontal	Pass
2	1994.500	43.18	-11.00	74.0	30.82	Peak	207.70	100	Horizontal	Pass
2**	1994.500	33.41	-11.00	54.0	20.59	AV	207.70	100	Horizontal	Pass
3	2435.000	48.20	-5.37	74.0	25.80	Peak	192.50	100	Horizontal	Pass
3**	2435.000	37.66	-5.37	54.0	16.34	AV	192.50	100	Horizontal	Pass
4	2921.250	47.52	-4.59	74.0	26.48	Peak	284.80	100	Horizontal	Pass
4**	2921.250	36.95	-4.59	54.0	17.05	AV	284.80	100	Horizontal	Pass
5	5559.000	53.08	0.31	74.0	20.92	Peak	226.80	100	Horizontal	Pass
5**	5559.000	42.38	0.31	54.0	11.62	AV	226.80	100	Horizontal	Pass
6	6805.500	56.51	4.11	74.0	17.49	Peak	41.60	100	Horizontal	Pass
6**	6805.500	46.24	4.11	54.0	7.76	AV	41.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.22.37

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

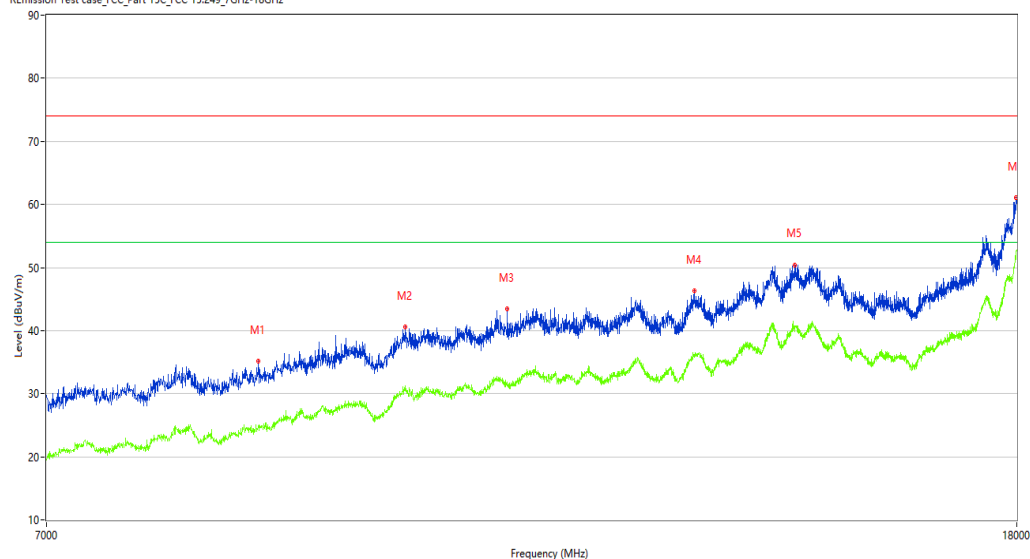

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8603.250	35.17	3.54	74.0	38.83	Peak	280.90	100	Horizontal	Pass
1**	8603.250	24.70	3.54	54.0	29.30	AV	280.90	100	Horizontal	Pass
2	9926.000	40.60	8.92	74.0	33.40	Peak	231.40	100	Horizontal	Pass
2**	9926.000	30.52	8.92	54.0	23.48	AV	231.40	100	Horizontal	Pass
3	10962.750	43.47	10.16	74.0	30.53	Peak	344.10	100	Horizontal	Pass
3**	10962.750	31.80	10.16	54.0	22.20	AV	344.10	100	Horizontal	Pass
4	13151.750	46.25	13.10	74.0	27.75	Peak	344.10	100	Horizontal	Pass
4**	13151.750	35.79	13.10	54.0	18.21	AV	344.10	100	Horizontal	Pass
5	14504.750	50.44	16.77	74.0	23.56	Peak	2.70	100	Horizontal	Pass
5**	14504.750	40.79	16.77	54.0	13.21	AV	2.70	100	Horizontal	Pass
6	17986.251	61.05	29.13	74.0	12.95	Peak	280.90	100	Horizontal	Pass
6**	17986.251	51.91	29.13	54.0	2.09	AV	280.90	100	Horizontal	Pass

BT-Hopping -Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_13.43.34

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

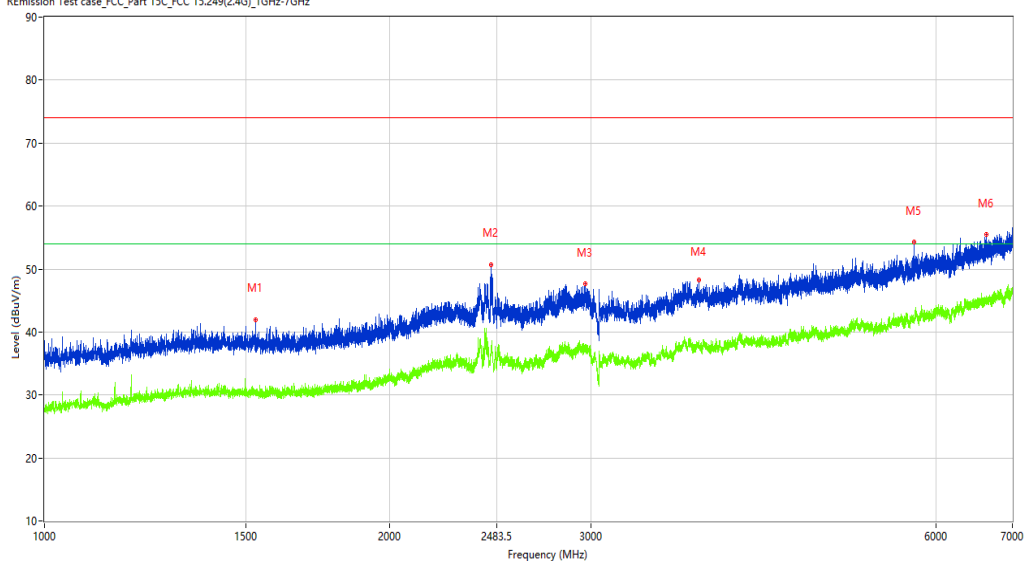

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1528.500	42.01	-13.02	74.0	31.99	Peak	62.20	100	Vertical	Pass
1**	1528.500	30.84	-13.02	54.0	23.16	AV	62.20	100	Vertical	Pass
2	2453.000	50.73	-5.73	74.0	23.27	Peak	266.10	100	Vertical	Pass
2**	2453.000	36.30	-5.73	54.0	17.70	AV	266.10	100	Vertical	Pass
3	2966.750	47.63	-3.74	74.0	26.37	Peak	62.20	100	Vertical	Pass
3**	2966.750	37.30	-3.74	54.0	16.70	AV	62.20	100	Vertical	Pass
4	3726.000	48.25	-2.67	74.0	25.75	Peak	319.10	100	Vertical	Pass
4**	3726.000	38.06	-2.67	54.0	15.94	AV	319.10	100	Vertical	Pass
5	5748.500	54.33	1.04	74.0	19.67	Peak	208.20	100	Vertical	Pass
5**	5748.500	41.96	1.04	54.0	12.04	AV	208.20	100	Vertical	Pass
6	6638.500	55.48	3.54	74.0	18.52	Peak	84.70	100	Vertical	Pass
6**	6638.500	44.56	3.54	54.0	9.44	AV	84.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.06.40

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

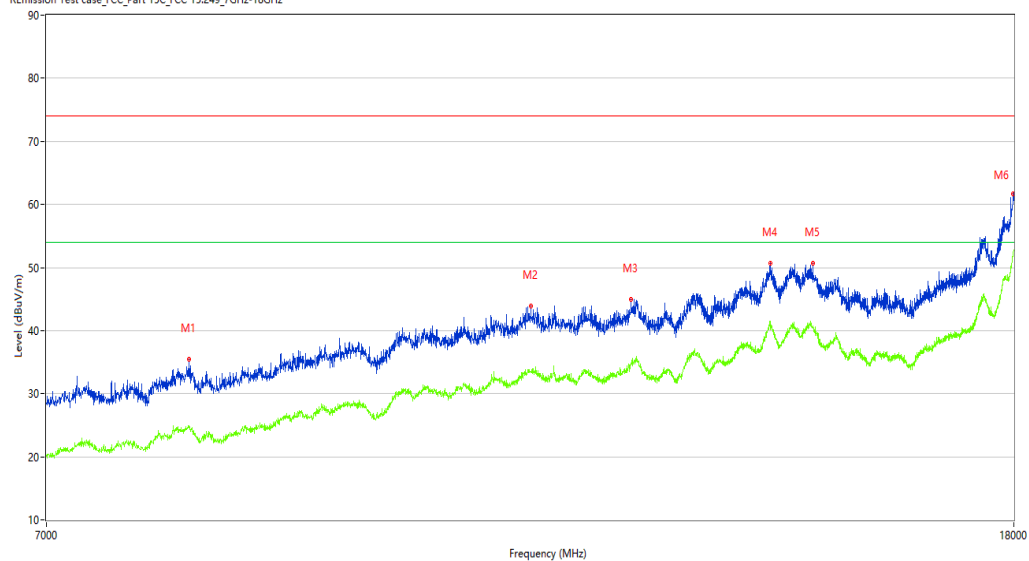

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8047.750	35.40	3.85	74.0	38.60	Peak	0.00	100	Vertical	Pass
1**	8047.750	24.89	3.85	54.0	29.11	AV	0.00	100	Vertical	Pass
2	11235.000	43.90	10.85	74.0	30.10	Peak	0.00	100	Vertical	Pass
2**	11235.000	33.33	10.85	54.0	20.67	AV	0.00	100	Vertical	Pass
3	12384.500	44.92	11.70	74.0	29.08	Peak	46.60	100	Vertical	Pass
3**	12384.500	34.76	11.70	54.0	19.24	AV	46.60	100	Vertical	Pass
4	14191.250	50.63	18.59	74.0	23.37	Peak	0.00	100	Vertical	Pass
4**	14191.250	40.75	18.59	54.0	13.25	AV	0.00	100	Vertical	Pass
5	14796.250	50.61	17.52	74.0	23.39	Peak	0.00	100	Vertical	Pass
5**	14796.250	40.74	17.52	54.0	13.26	AV	0.00	100	Vertical	Pass
6	17983.500	61.71	28.95	74.0	12.29	Peak	63.40	100	Vertical	Pass
6**	17983.500	51.85	28.95	54.0	2.15	AV	63.40	100	Vertical	Pass

BT-Bandedge-Hopping- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2023-08-12_16.20.45

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(24G)_bandedge

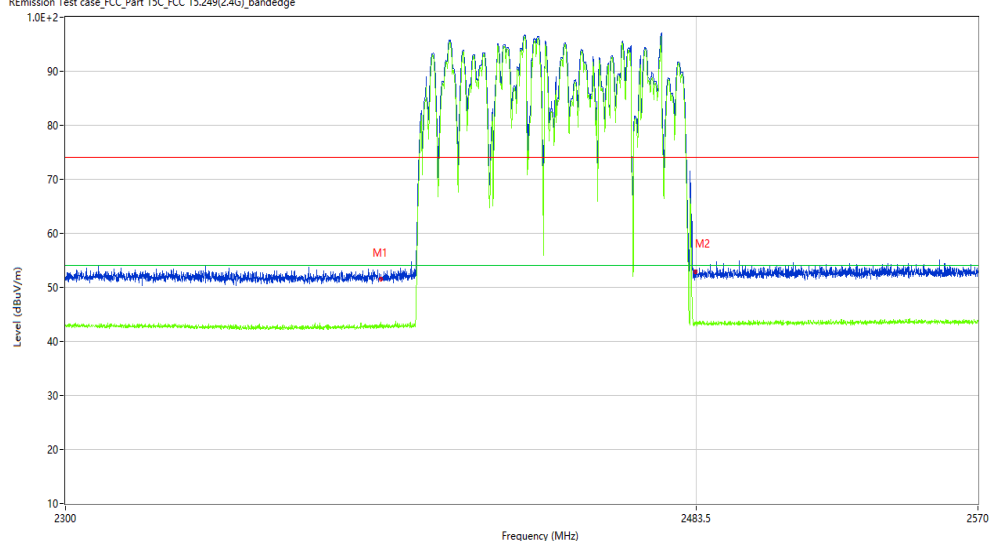

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.52	-10.27	74.0	22.48	Peak	253.40	100	H	Pass
1**	2390.000	43.07	-10.27	54.0	10.93	AV	253.40	100	H	Pass
2	2483.500	52.87	-9.82	74.0	21.13	Peak	28.93	100	H	Pass
2**	2483.500	43.56	-9.82	54.0	10.44	AV	28.93	100	H	Pass

BT-Bandedge-Hopping-Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2023-08-12_13.32.11

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

R Emission Test case FCC_Part 15C_FCC 15.249(2.4G)_bandedge

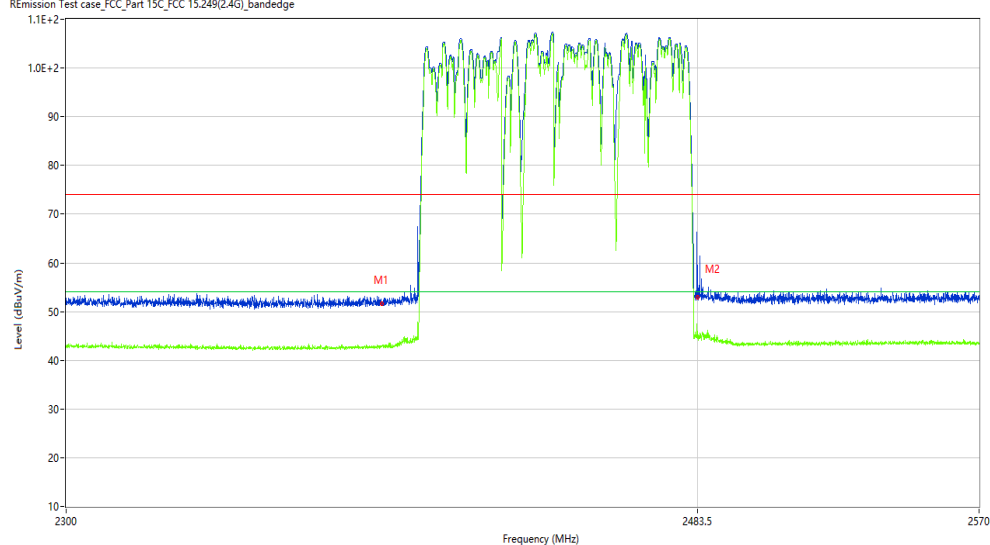

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.79	-10.27	74.0	22.21	Peak	276.67	100	V	Pass
1**	2390.000	42.78	-10.27	54.0	11.22	AV	276.67	100	V	Pass
2	2483.500	52.97	-9.82	74.0	21.03	Peak	113.21	100	V	Pass
2**	2483.500	44.67	-9.82	54.0	9.33	AV	113.21	100	V	Pass

30M-1G

BT 3M-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-14_18.46.13

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

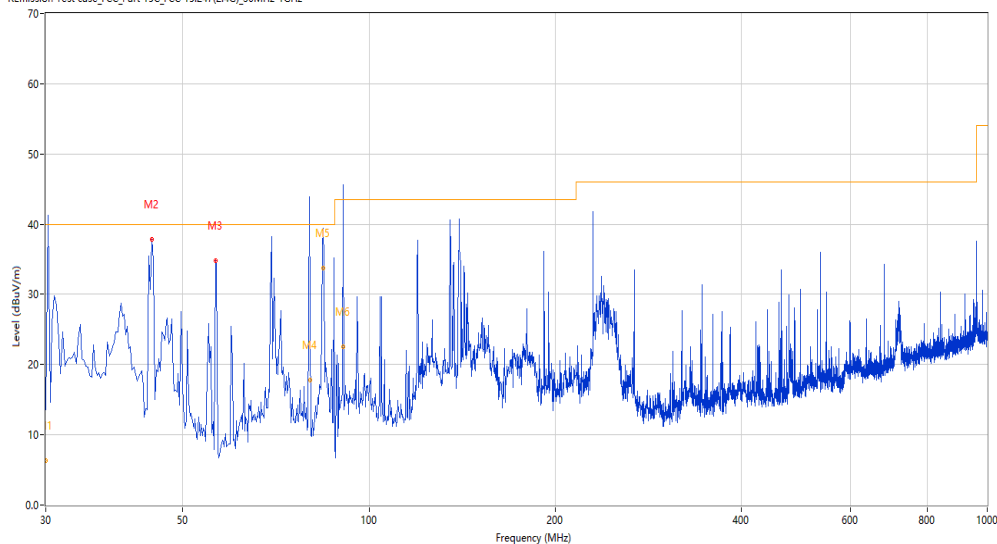

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	29.999	26.97	-28.64	40.0	13.03	Peak	179.20	150	Horizontal	Pass
1*	29.999	6.37	-28.64	40.0	33.63	QP	179.20	150	Horizontal	Pass
1**	29.999	-10.88	-28.64	--	10.88	AV	179.20	150	Horizontal	Pass
2	44.546	37.85	-24.37	40.0	2.15	Peak	198.60	150	Horizontal	Pass
3	56.426	34.81	-24.64	40.0	5.19	Peak	198.60	150	Horizontal	Pass
4	80.304	32.64	-30.73	40.0	7.36	Peak	360.40	150	Horizontal	N/A
4*	80.304	17.74	-30.73	40.0	22.26	QP	360.40	150	Horizontal	Pass
5	84.306	39.36	-29.69	40.0	0.64	Peak	360.40	150	Horizontal	Pass
5*	84.306	33.81	-29.69	40.0	6.19	QP	360.40	150	Horizontal	Pass
6	90.856	32.88	-27.55	43.5	10.62	Peak	16.60	150	Horizontal	N/A
6*	90.856	22.49	-27.55	43.5	21.01	QP	16.60	150	Horizontal	Pass

BT 3M -Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_17.58.01

EUT Name:

N.A

Manufacturer:

N.A

Model:

N.A

Temp.(oC):

25.2

Hum.:

53%

Test Engineer:

CJY

Test Standard:

FCC

Work Addition:

TX

Load:

Full load


Remark:

DR-RSE01-E23060106-01#02

st Engineer:

LYG

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

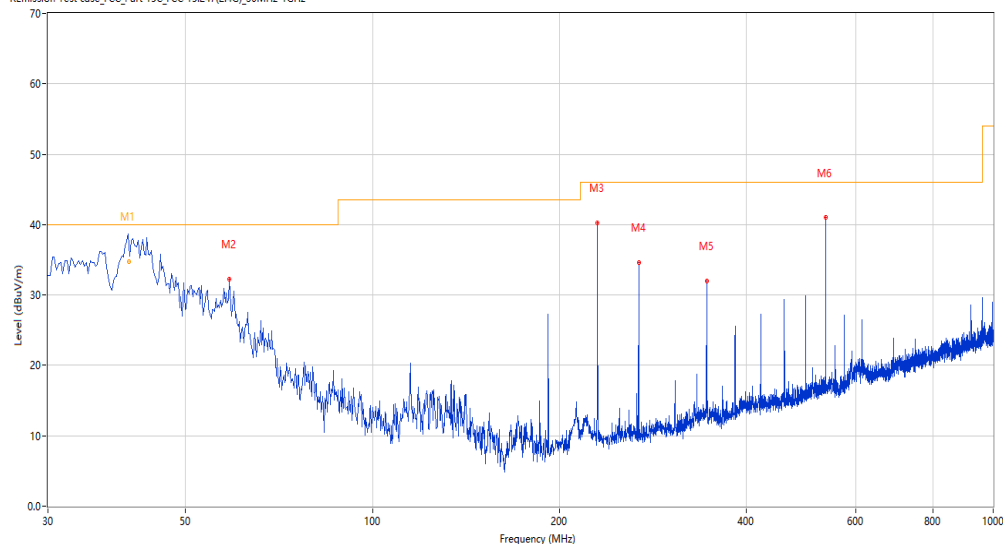

No.	Frequen cy (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.563	38.73	-25.23	40.0	1.27	Peak	330.60	100	Vertical	Pass
1*	40.563	34.74	-25.23	40.0	5.26	QP	330.60	100	Vertical	Pass
2	58.850	32.21	-25.12	40.0	7.79	Peak	213.00	100	Vertical	Pass
3	230.255	40.21	-24.34	46.0	5.79	Peak	176.90	100	Vertical	Pass
4	268.803	34.58	-23.50	46.0	11.42	Peak	187.30	100	Vertical	Pass
5	345.414	32.03	-20.52	46.0	13.97	Peak	195.50	100	Vertical	Pass
6	537.426	41.01	-16.22	46.0	4.99	Peak	58.20	100	Vertical	Pass

1-18G

BT 3M -Low channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_15.38.49

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

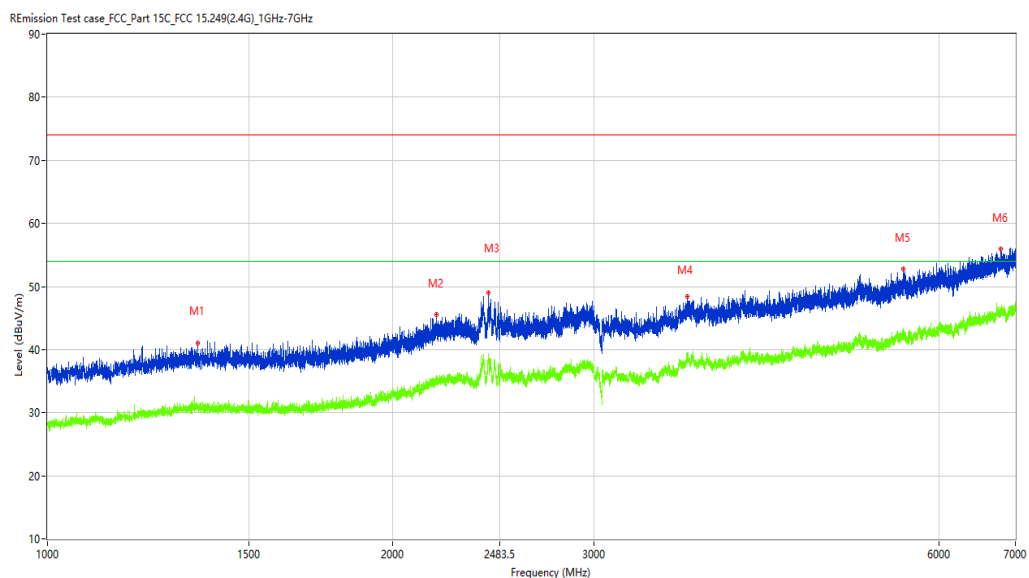

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1352.250	41.11	-12.73	74.0	32.89	Peak	190.40	100	Horizontal	Pass
1**	1352.250	30.61	-12.73	54.0	23.39	AV	190.40	100	Horizontal	Pass
2	2187.000	45.54	-8.13	74.0	28.46	Peak	157.60	100	Horizontal	Pass
2**	2187.000	34.92	-8.13	54.0	19.08	AV	157.60	100	Horizontal	Pass
3	2425.500	48.98	-5.17	74.0	25.02	Peak	190.40	100	Horizontal	Pass
3**	2425.500	38.48	-5.17	54.0	15.52	AV	190.40	100	Horizontal	Pass
4	3617.500	48.45	-2.42	74.0	25.55	Peak	342.00	100	Horizontal	Pass
4**	3617.500	39.20	-2.42	54.0	14.80	AV	342.00	100	Horizontal	Pass
5	5589.000	52.74	0.59	74.0	21.26	Peak	214.80	100	Horizontal	Pass
5**	5589.000	42.03	0.59	54.0	11.97	AV	214.80	100	Horizontal	Pass
6	6801.500	55.91	4.12	74.0	18.09	Peak	342.00	100	Horizontal	Pass
6**	6801.500	45.97	4.12	54.0	8.03	AV	342.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.23.51

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

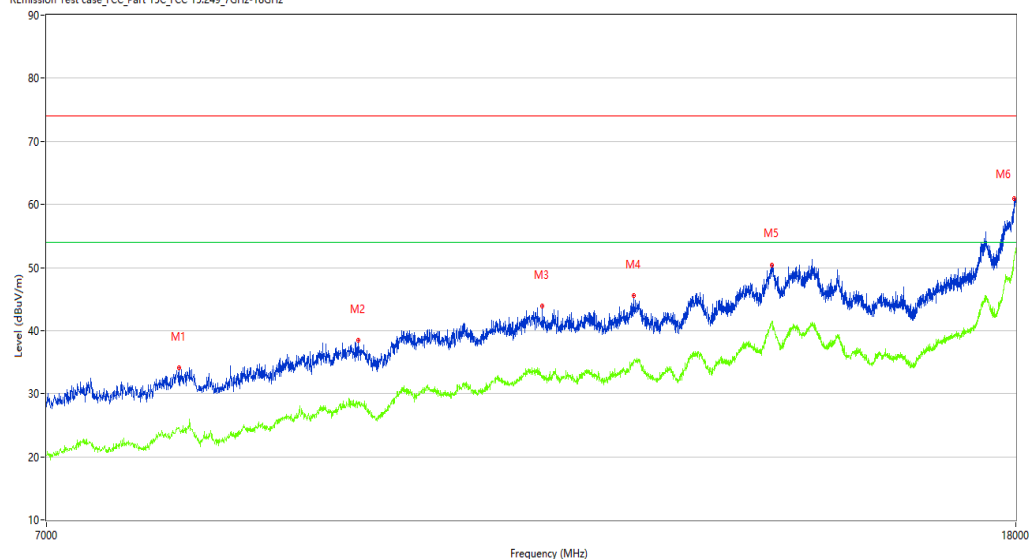

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7968.000	34.15	2.84	74.0	39.85	Peak	96.40	100	Horizontal	Pass
1**	7968.000	24.54	2.84	54.0	29.46	AV	96.40	100	Horizontal	Pass
2	9483.250	38.44	6.92	74.0	35.56	Peak	226.70	100	Horizontal	Pass
2**	9483.250	28.68	6.92	54.0	25.32	AV	226.70	100	Horizontal	Pass
3	11345.000	43.85	11.12	74.0	30.15	Peak	274.00	100	Horizontal	Pass
3**	11345.000	32.64	11.12	54.0	21.36	AV	274.00	100	Horizontal	Pass
4	12401.000	45.55	11.79	74.0	28.45	Peak	112.40	100	Horizontal	Pass
4**	12401.000	35.26	11.79	54.0	18.74	AV	112.40	100	Horizontal	Pass
5	14196.750	50.37	18.48	74.0	23.63	Peak	112.40	100	Horizontal	Pass
5**	14196.750	41.34	18.48	54.0	12.66	AV	112.40	100	Horizontal	Pass
6	17975.251	60.85	28.42	74.0	13.15	Peak	360.00	100	Horizontal	Pass
6**	17975.251	51.52	28.42	54.0	2.48	AV	360.00	100	Horizontal	Pass

BT 3M -Low channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_13.58.32

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

R Emission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

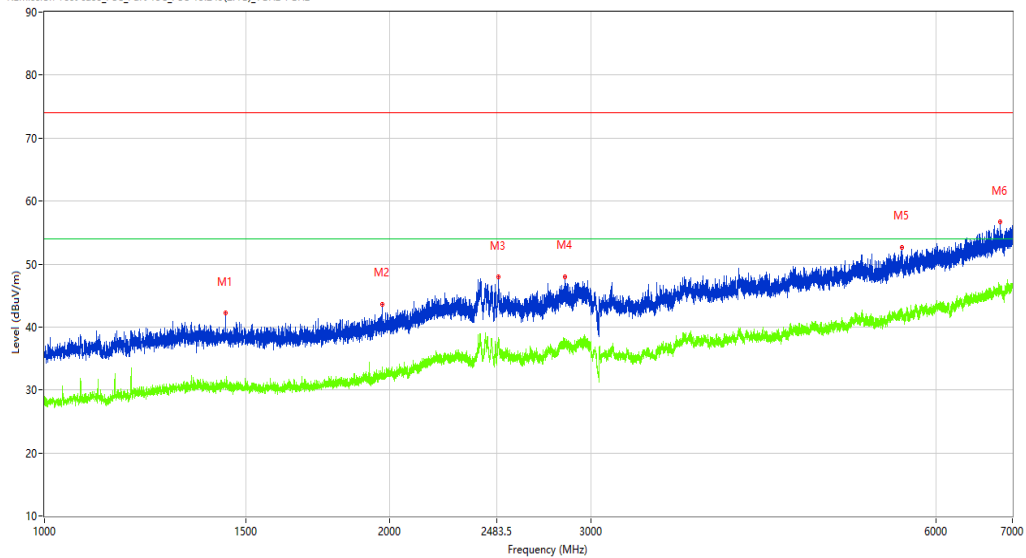

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1438.750	42.21	-12.68	74.0	31.79	Peak	233.30	100	Vertical	Pass
1**	1438.750	30.80	-12.68	54.0	23.20	AV	233.30	100	Vertical	Pass
2	1970.750	43.61	-11.22	74.0	30.39	Peak	360.00	100	Vertical	Pass
2**	1970.750	32.11	-11.22	54.0	21.89	AV	360.00	100	Vertical	Pass
3	2490.250	47.93	-6.41	74.0	26.07	Peak	16.40	100	Vertical	Pass
3**	2490.250	37.83	-6.41	54.0	16.17	AV	16.40	100	Vertical	Pass
4	2846.750	47.95	-4.28	74.0	26.05	Peak	0.00	100	Vertical	Pass
4**	2846.750	37.51	-4.28	54.0	16.49	AV	0.00	100	Vertical	Pass
5	5607.000	52.59	0.81	74.0	21.41	Peak	0.00	100	Vertical	Pass
5**	5607.000	41.78	0.81	54.0	12.22	AV	0.00	100	Vertical	Pass
6	6835.000	56.72	4.07	74.0	17.28	Peak	2.90	100	Vertical	Pass
6**	6835.000	45.74	4.07	54.0	8.26	AV	2.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.03.43

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

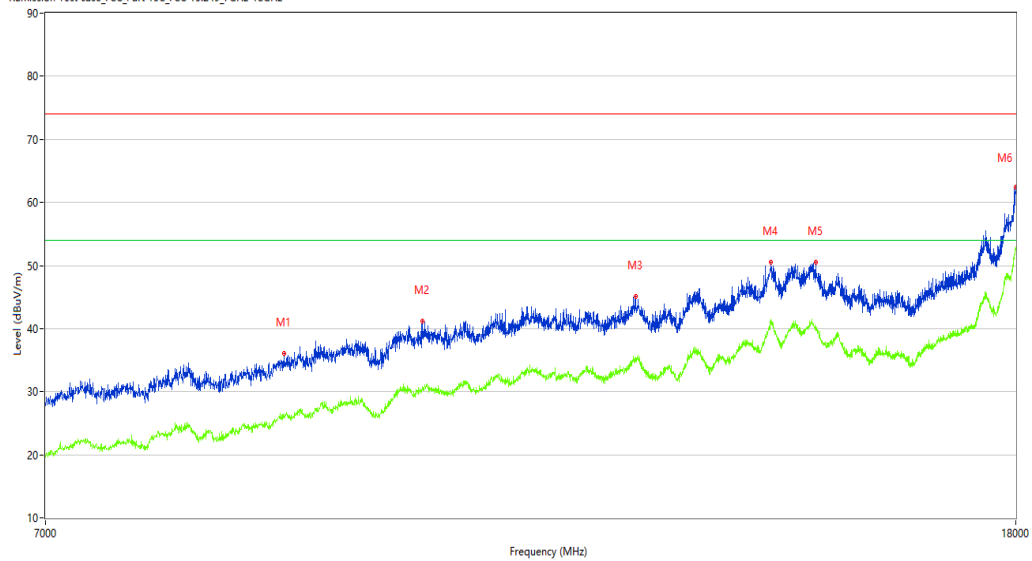

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8828.750	36.04	4.33	74.0	37.96	Peak	284.30	100	Vertical	Pass
1**	8828.750	26.18	4.33	54.0	27.82	AV	284.30	100	Vertical	Pass
2	10099.250	41.13	8.54	74.0	32.87	Peak	0.00	100	Vertical	Pass
2**	10099.250	30.43	8.54	54.0	23.57	AV	0.00	100	Vertical	Pass
3	12434.000	45.08	11.85	74.0	28.92	Peak	33.90	100	Vertical	Pass
3**	12434.000	34.99	11.85	54.0	19.01	AV	33.90	100	Vertical	Pass
4	14180.250	50.48	18.41	74.0	23.52	Peak	0.00	100	Vertical	Pass
4**	14180.250	41.04	18.41	54.0	12.96	AV	0.00	100	Vertical	Pass
5	14818.250	50.51	17.23	74.0	23.49	Peak	4.00	100	Vertical	Pass
5**	14818.250	40.26	17.23	54.0	13.74	AV	4.00	100	Vertical	Pass
6	17999.999	62.36	30.03	74.0	11.64	Peak	96.10	100	Vertical	Pass
6**	17999.999	52.92	30.03	54.0	1.08	AV	96.10	100	Vertical	Pass

BT 3M -Middle channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_15.44.18

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

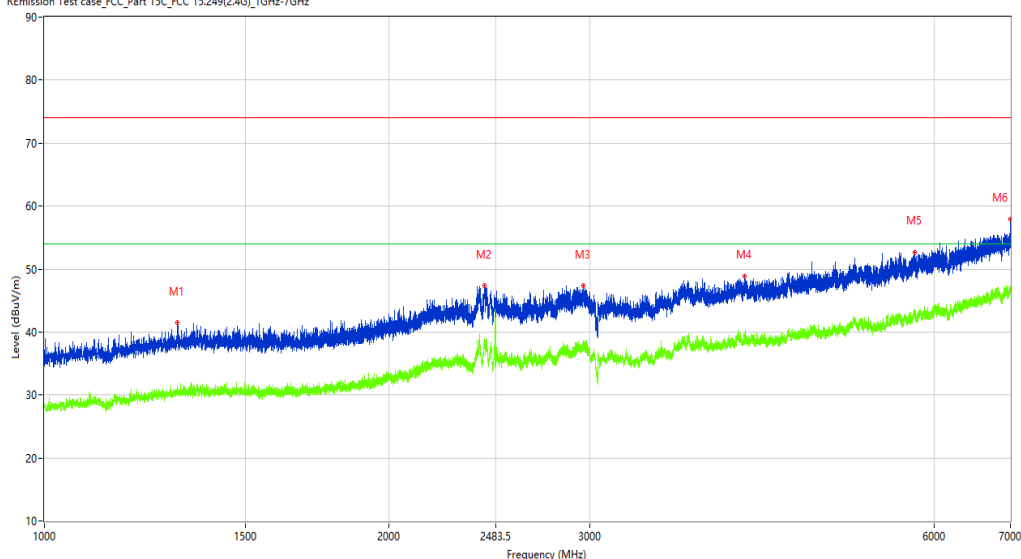

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1307.500	41.44	-12.77	74.0	32.56	Peak	140.60	100	Horizontal	Pass
1**	1307.500	30.38	-12.77	54.0	23.62	AV	140.60	100	Horizontal	Pass
2	2424.750	47.30	-5.16	74.0	26.70	Peak	157.70	100	Horizontal	Pass
2**	2424.750	37.44	-5.16	54.0	16.56	AV	157.70	100	Horizontal	Pass
3	2959.500	47.41	-3.80	74.0	26.59	Peak	63.20	100	Horizontal	Pass
3**	2959.500	37.57	-3.80	54.0	16.43	AV	63.20	100	Horizontal	Pass
4	4098.000	48.87	-1.48	74.0	25.13	Peak	243.40	100	Horizontal	Pass
4**	4098.000	39.07	-1.48	54.0	14.93	AV	243.40	100	Horizontal	Pass
5	5771.000	52.70	1.39	74.0	21.30	Peak	348.00	100	Horizontal	Pass
5**	5771.000	42.80	1.39	54.0	11.20	AV	348.00	100	Horizontal	Pass
6	6997.500	57.95	4.73	74.0	16.05	Peak	243.40	100	Horizontal	Pass
6**	6997.500	46.62	4.73	54.0	7.38	AV	243.40	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.27.27

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

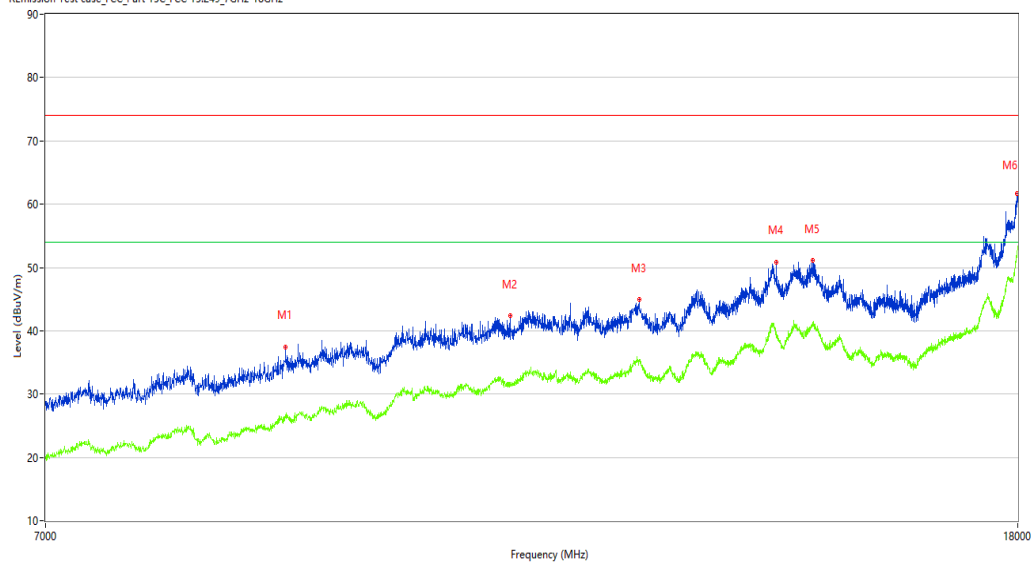

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8837.000	37.48	4.38	74.0	36.52	Peak	36.90	100	Horizontal	Pass
1**	8837.000	26.46	4.38	54.0	27.54	AV	36.90	100	Horizontal	Pass
2	10990.250	42.33	9.96	74.0	31.67	Peak	36.90	100	Horizontal	Pass
2**	10990.250	31.54	9.96	54.0	22.46	AV	36.90	100	Horizontal	Pass
3	12458.750	44.95	11.90	74.0	29.05	Peak	360.00	100	Horizontal	Pass
3**	12458.750	35.39	11.90	54.0	18.61	AV	360.00	100	Horizontal	Pass
4	14235.250	50.88	17.68	74.0	23.12	Peak	309.30	100	Horizontal	Pass
4**	14235.250	39.82	17.68	54.0	14.18	AV	309.30	100	Horizontal	Pass
5	14746.750	51.10	17.78	74.0	22.90	Peak	246.40	100	Horizontal	Pass
5**	14746.750	41.27	17.78	54.0	12.73	AV	246.40	100	Horizontal	Pass
6	17991.750	61.65	29.49	74.0	12.35	Peak	150.40	100	Horizontal	Pass
6**	17991.750	52.45	29.49	54.0	1.55	AV	150.40	100	Horizontal	Pass

BT 3M -Middle channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_14.01.03

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

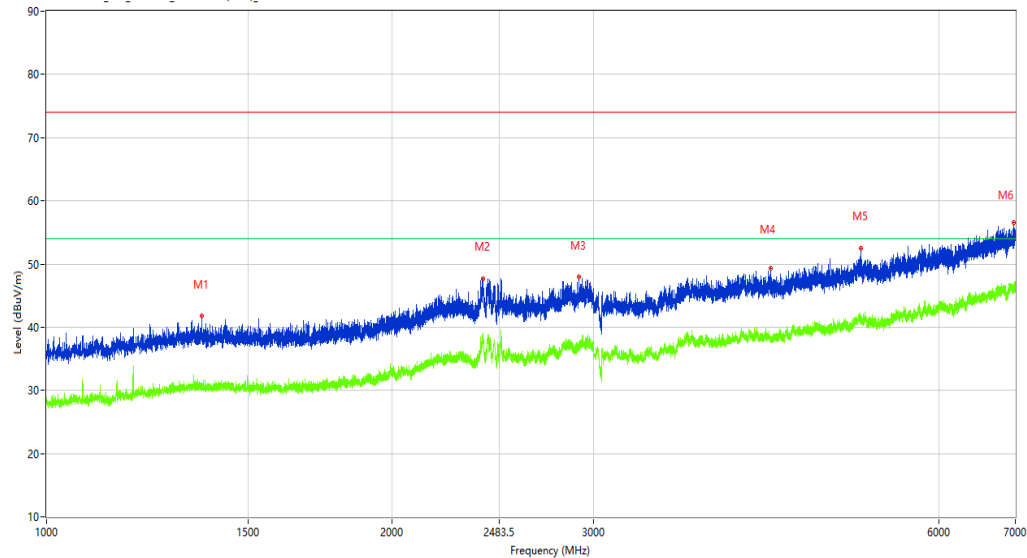

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1365.000	41.77	-12.65	74.0	32.23	Peak	325.20	100	Vertical	Pass
1**	1365.000	30.38	-12.65	54.0	23.62	AV	325.20	100	Vertical	Pass
2	2403.000	47.71	-4.73	74.0	26.29	Peak	325.20	100	Vertical	Pass
2**	2403.000	38.40	-4.73	54.0	15.60	AV	325.20	100	Vertical	Pass
3	2911.750	47.98	-4.48	74.0	26.02	Peak	244.90	100	Vertical	Pass
3**	2911.750	37.57	-4.48	54.0	16.43	AV	244.90	100	Vertical	Pass
4	4281.000	49.39	-2.20	74.0	24.61	Peak	305.30	100	Vertical	Pass
4**	4281.000	38.32	-2.20	54.0	15.68	AV	305.30	100	Vertical	Pass
5	5129.500	52.54	0.33	74.0	21.46	Peak	174.30	100	Vertical	Pass
5**	5129.500	41.12	0.33	54.0	12.88	AV	174.30	100	Vertical	Pass
6	6981.500	56.54	4.48	74.0	17.46	Peak	57.90	100	Vertical	Pass
6**	6981.500	46.04	4.48	54.0	7.96	AV	57.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.00.28

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

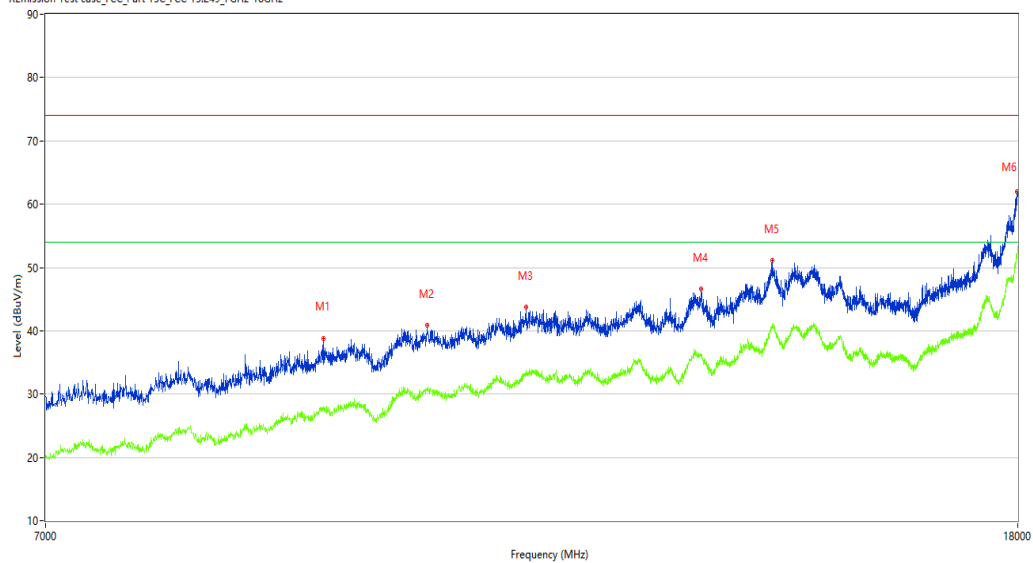

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9167.000	38.85	6.30	74.0	35.15	Peak	39.00	100	Vertical	Pass
1**	9167.000	28.07	6.30	54.0	25.93	AV	39.00	100	Vertical	Pass
2	10137.750	40.90	8.47	74.0	33.10	Peak	39.00	100	Vertical	Pass
2**	10137.750	30.75	8.47	54.0	23.25	AV	39.00	100	Vertical	Pass
3	11160.750	43.75	10.07	74.0	30.25	Peak	295.40	100	Vertical	Pass
3**	11160.750	33.40	10.07	54.0	20.60	AV	295.40	100	Vertical	Pass
4	13231.500	46.64	13.29	74.0	27.36	Peak	183.40	100	Vertical	Pass
4**	13231.500	36.42	13.29	54.0	17.58	AV	183.40	100	Vertical	Pass
5	14183.000	51.11	18.50	74.0	22.89	Peak	360.00	100	Vertical	Pass
5**	14183.000	40.87	18.50	54.0	13.13	AV	360.00	100	Vertical	Pass
6	17986.251	62.03	29.13	74.0	11.97	Peak	295.40	100	Vertical	Pass
6**	17986.251	51.97	29.13	54.0	2.03	AV	295.40	100	Vertical	Pass

BT 3M -High channel-Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_16.08.21

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

R Emission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

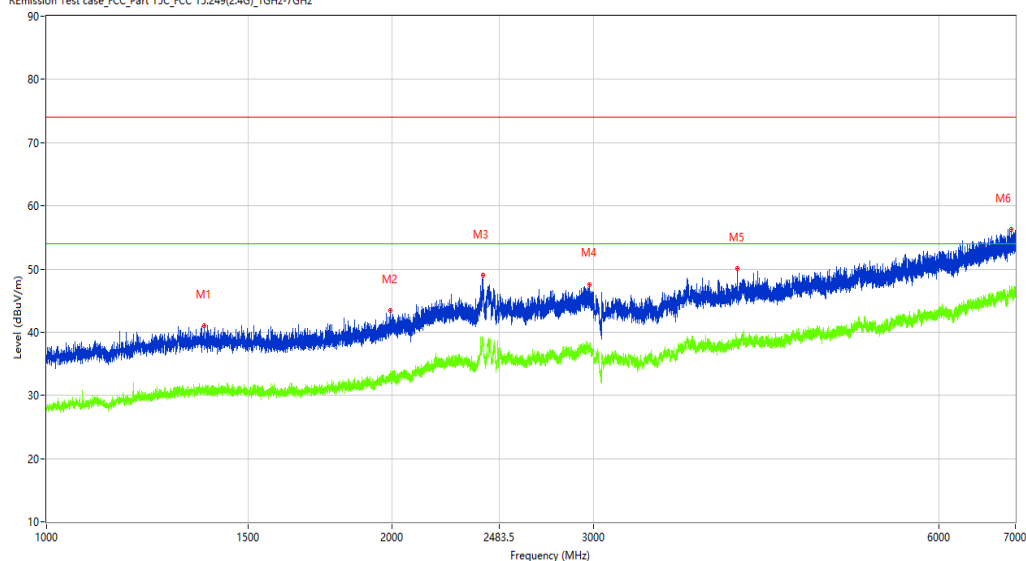

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1373.000	41.00	-12.78	74.0	33.00	Peak	280.70	100	Horizontal	Pass
1**	1373.000	30.00	-12.78	54.0	24.00	AV	280.70	100	Horizontal	Pass
2	1995.000	43.48	-10.99	74.0	30.52	Peak	34.70	100	Horizontal	Pass
2**	1995.000	32.92	-10.99	54.0	21.08	AV	34.70	100	Horizontal	Pass
3	2401.000	49.04	-4.69	74.0	24.96	Peak	3.60	100	Horizontal	Pass
3**	2401.000	39.33	-4.69	54.0	14.67	AV	3.60	100	Horizontal	Pass
4	2977.000	47.58	-3.67	74.0	26.42	Peak	296.30	100	Horizontal	Pass
4**	2977.000	37.15	-3.67	54.0	16.85	AV	296.30	100	Horizontal	Pass
5	4004.500	50.03	-1.75	74.0	23.97	Peak	41.60	100	Horizontal	Pass
5**	4004.500	37.71	-1.75	54.0	16.29	AV	41.60	100	Horizontal	Pass
6	6939.000	56.27	4.22	74.0	17.73	Peak	0.00	100	Horizontal	Pass
6**	6939.000	46.29	4.22	54.0	7.71	AV	0.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.29.05

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

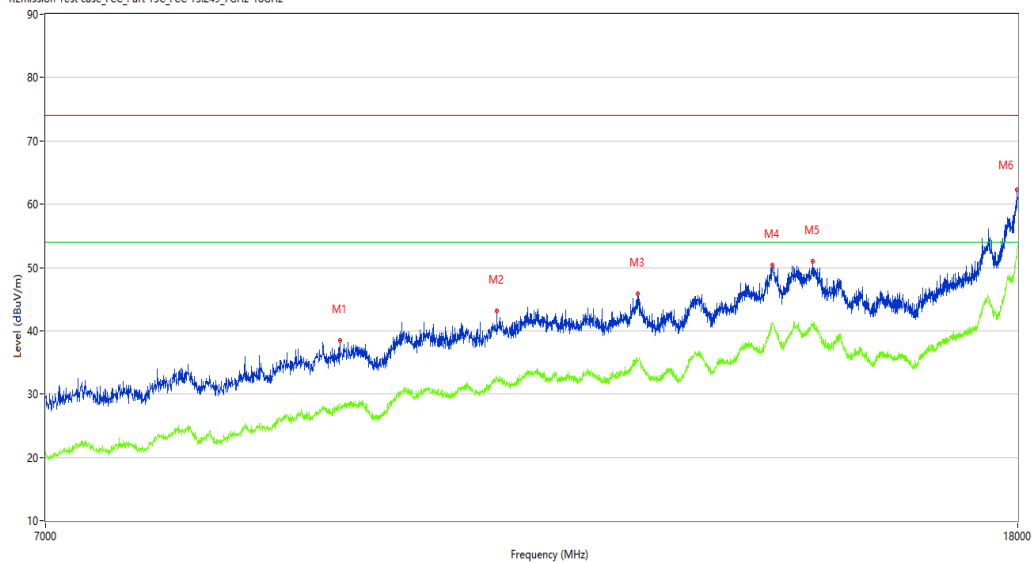

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9315.500	38.46	6.10	74.0	35.54	Peak	187.90	100	Horizontal	Pass
1**	9315.500	27.78	6.10	54.0	26.22	AV	187.90	100	Horizontal	Pass
2	10852.750	43.11	10.20	74.0	30.89	Peak	61.80	100	Horizontal	Pass
2**	10852.750	32.54	10.20	54.0	21.46	AV	61.80	100	Horizontal	Pass
3	12442.250	45.82	11.86	74.0	28.18	Peak	61.80	100	Horizontal	Pass
3**	12442.250	35.26	11.86	54.0	18.74	AV	61.80	100	Horizontal	Pass
4	14177.500	50.30	18.32	74.0	23.70	Peak	61.80	100	Horizontal	Pass
4**	14177.500	41.40	18.32	54.0	12.60	AV	61.80	100	Horizontal	Pass
5	14746.750	50.95	17.78	74.0	23.05	Peak	187.90	100	Horizontal	Pass
5**	14746.750	40.72	17.78	54.0	13.28	AV	187.90	100	Horizontal	Pass
6	17983.500	62.26	28.95	74.0	11.74	Peak	0.00	100	Horizontal	Pass
6**	17983.500	52.05	28.95	54.0	1.95	AV	0.00	100	Horizontal	Pass

BT 3M -High channel-Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_14.08.44

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

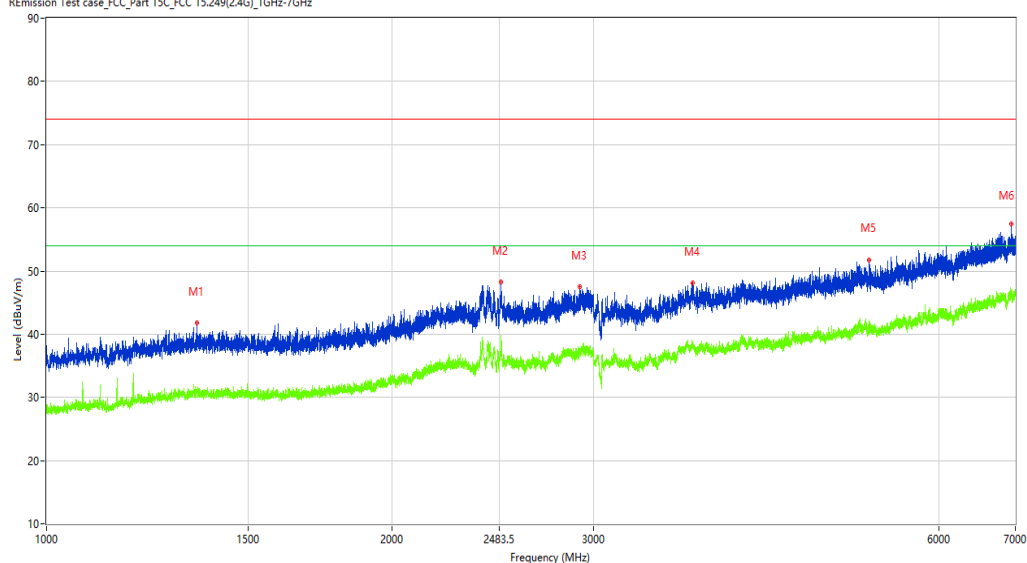

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1351.500	41.73	-12.74	74.0	32.27	Peak	195.30	100	Vertical	Pass
1**	1351.500	30.96	-12.74	54.0	23.04	AV	195.30	100	Vertical	Pass
2	2492.500	48.30	-6.45	74.0	25.70	Peak	0.00	100	Vertical	Pass
2**	2492.500	39.02	-6.45	54.0	14.98	AV	0.00	100	Vertical	Pass
3	2920.250	47.51	-4.58	74.0	26.49	Peak	179.30	100	Vertical	Pass
3**	2920.250	37.44	-4.58	54.0	16.56	AV	179.30	100	Vertical	Pass
4	3663.000	48.07	-2.30	74.0	25.93	Peak	172.50	100	Vertical	Pass
4**	3663.000	38.60	-2.30	54.0	15.40	AV	172.50	100	Vertical	Pass
5	5219.000	51.80	-0.23	74.0	22.20	Peak	270.00	100	Vertical	Pass
5**	5219.000	41.08	-0.23	54.0	12.92	AV	270.00	100	Vertical	Pass
6	6939.500	57.40	4.22	74.0	16.60	Peak	138.60	100	Vertical	Pass
6**	6939.500	46.36	4.22	54.0	7.64	AV	138.60	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_16.58.33

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

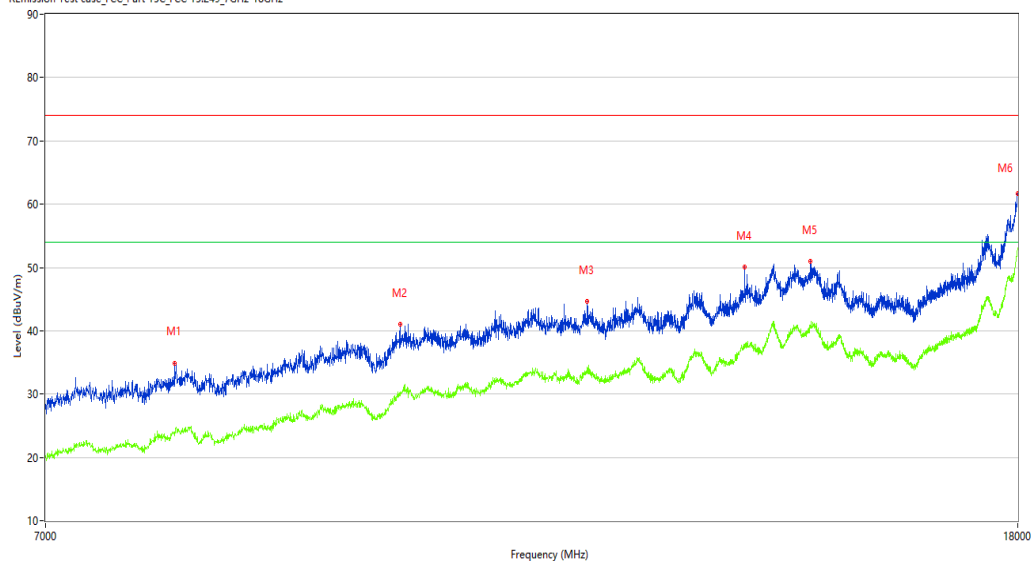

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7937.750	34.92	2.56	74.0	39.08	Peak	360.00	100	Vertical	Pass
1**	7937.750	23.69	2.56	54.0	30.31	AV	360.00	100	Vertical	Pass
2	9876.500	41.09	8.38	74.0	32.91	Peak	0.00	100	Vertical	Pass
2**	9876.500	29.91	8.38	54.0	24.09	AV	0.00	100	Vertical	Pass
3	11845.500	44.70	11.11	74.0	29.30	Peak	83.20	100	Vertical	Pass
3**	11845.500	33.35	11.11	54.0	20.65	AV	83.20	100	Vertical	Pass
4	13806.250	50.09	13.99	74.0	23.91	Peak	170.20	100	Vertical	Pass
4**	13806.250	37.82	13.99	54.0	16.18	AV	170.20	100	Vertical	Pass
5	14716.500	50.97	17.43	74.0	23.03	Peak	15.70	100	Vertical	Pass
5**	14716.500	40.83	17.43	54.0	13.17	AV	15.70	100	Vertical	Pass
6	17997.251	61.64	29.85	74.0	12.36	Peak	221.20	100	Vertical	Pass
6**	17997.251	52.79	29.85	54.0	1.21	AV	221.20	100	Vertical	Pass

BT 3M -Bandedge -Low channel- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2023-08-12_15.17.58

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_bandedge

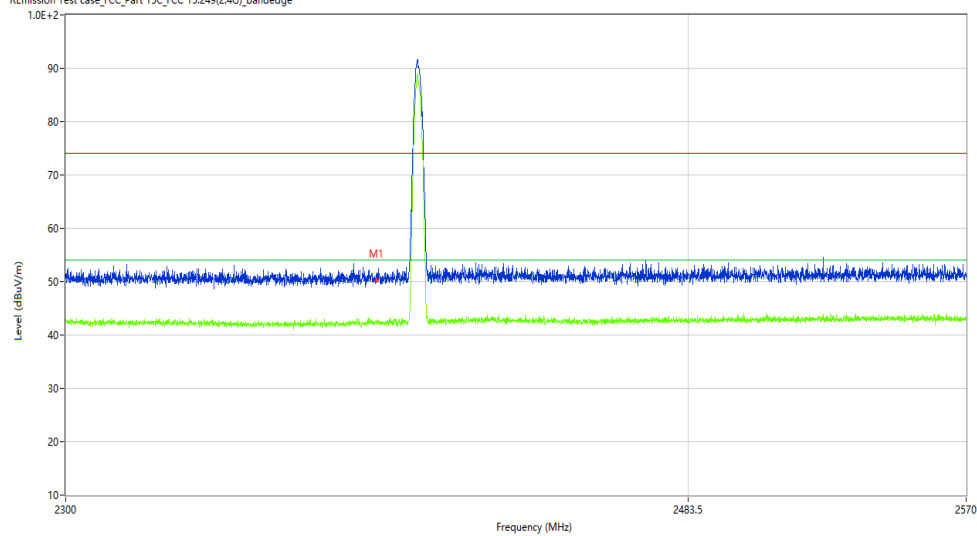

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.33	-10.27	74.0	23.67	Peak	23.40	100	H	Pass
1**	2390.000	42.24	-10.27	54.0	11.76	AV	23.40	100	H	Pass

BT 3M -Bandedge -Low channel- Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2023-08-12_15.01.50

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

RfEmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_bandedge

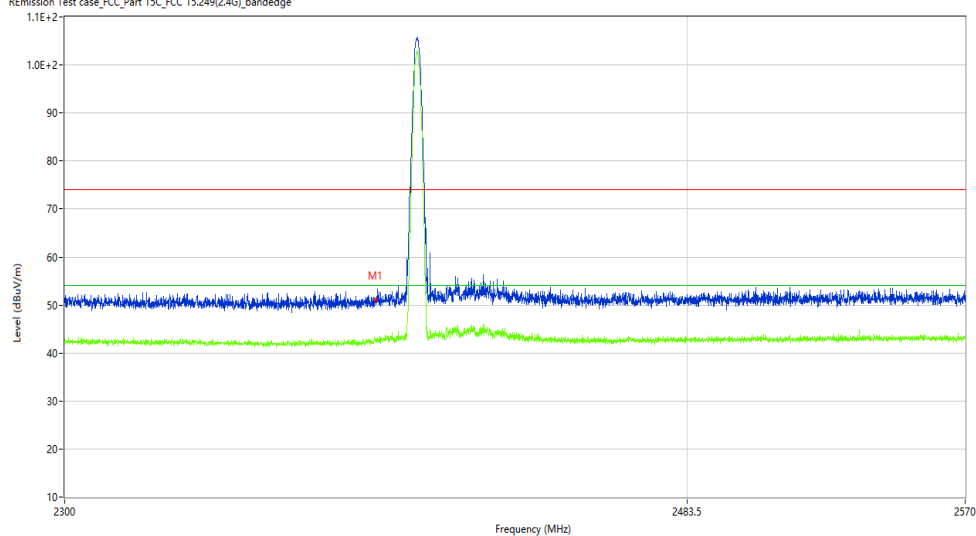

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.10	-10.27	74.0	22.90	Peak	317.54	100	V	Pass
1**	2390.000	42.71	-10.27	54.0	11.29	AV	317.54	100	V	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_15.19.47

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_bandedge

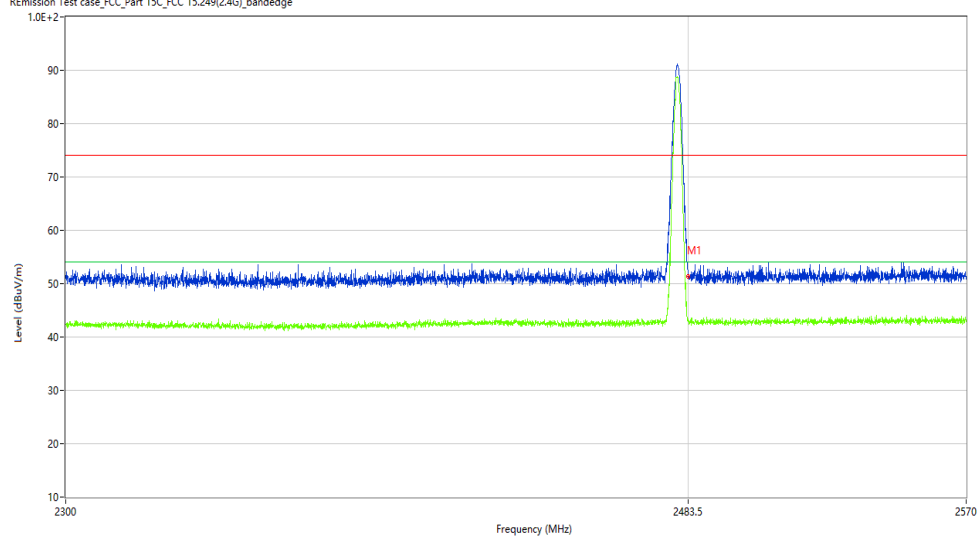

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.68	-9.82	74.0	22.32	Peak	240.77	100	H	Pass
1**	2483.500	43.01	-9.82	54.0	10.99	AV	240.77	100	H	Pass

BT 3M -Bandedge -High channel- Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_14.58.31

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

R:Emission Test case_FCC_Part 15C_FCC 15.249(2.4G)_bandedge

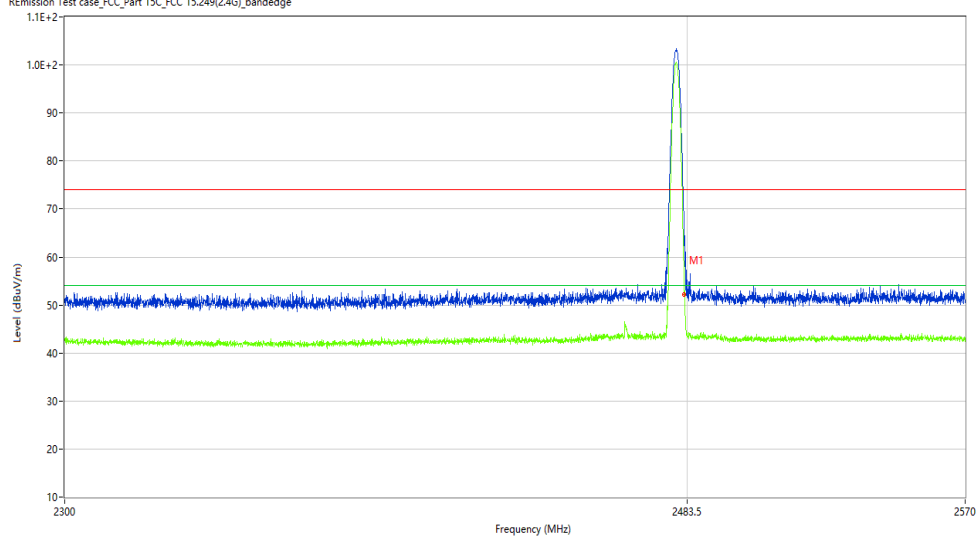

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.05	-9.82	74.0	21.95	Peak	60.70	100	V	Pass
1**	2483.500	43.35	-9.82	54.0	10.65	AV	60.70	100	V	Pass

30M-1G

BT 3M-Hopping-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2023-08-14_18.43.20

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

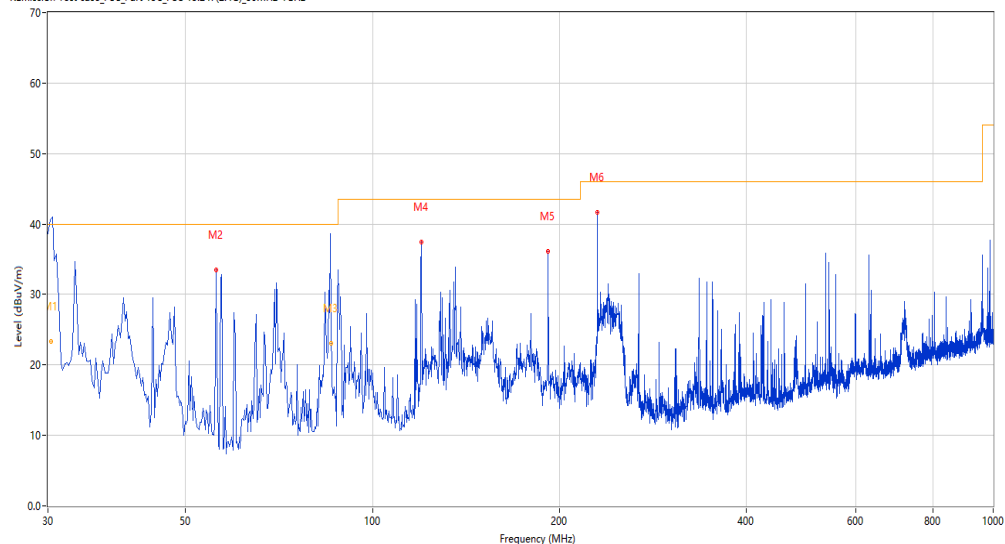

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.308	43.47	-28.57	40.0	-3.47	Peak	88.60	150	Horizontal	N/A
1*	30.308	23.27	-28.57	40.0	16.73	QP	88.60	150	Horizontal	Pass
2	55.941	33.49	-24.56	40.0	6.51	Peak	289.50	150	Horizontal	Pass
3	85.725	35.49	-29.19	40.0	4.51	Peak	234.70	150	Horizontal	Pass
3*	85.725	23.13	-29.19	40.0	16.87	QP	234.70	150	Horizontal	Pass
4	119.945	37.46	-27.36	43.5	6.04	Peak	78.20	150	Horizontal	Pass
5	191.950	36.07	-26.07	43.5	7.43	Peak	231.00	150	Horizontal	Pass
6	230.255	41.69	-24.34	46.0	4.31	Peak	359.60	150	Horizontal	Pass

BT 3M-Hopping -Vertical-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_17.53.29

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.2

Hum.: 53%

Test Engineer: CJY

Test Standard: FCC


Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

st Engineer: LYG

R Emission Test case FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

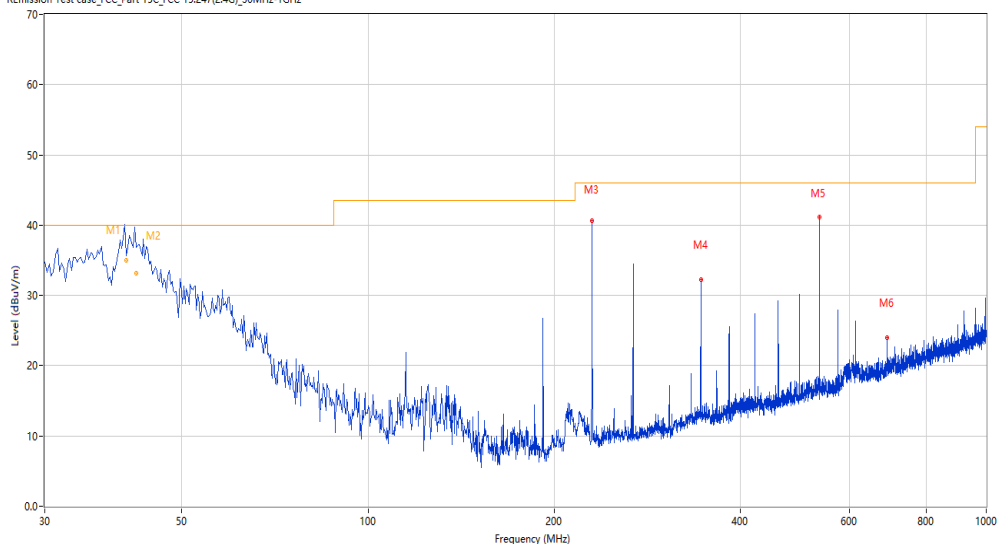

No.	Frequen cy (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.587	40.50	-25.23	40.0	-0.50	Peak	339.10	100	Vertical	N/A
1*	40.587	35.02	-25.23	40.0	4.98	QP	339.10	100	Vertical	Pass
2	42.124	38.48	-24.82	40.0	1.52	Peak	339.10	103	Vertical	Pass
2*	42.124	33.19	-24.82	40.0	6.81	QP	339.10	103	Vertical	Pass
3	230.255	40.61	-24.34	46.0	5.39	Peak	188.00	100	Vertical	Pass
4	345.414	32.19	-20.52	46.0	13.81	Peak	193.60	100	Vertical	Pass
5	537.426	41.18	-16.22	46.0	4.82	Peak	67.40	100	Vertical	Pass
6	691.132	24.03	-13.03	46.0	21.97	Peak	312.60	100	Vertical	Pass

1-18G

BT 3M-Hopping -Horizontal-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_16.05.15

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

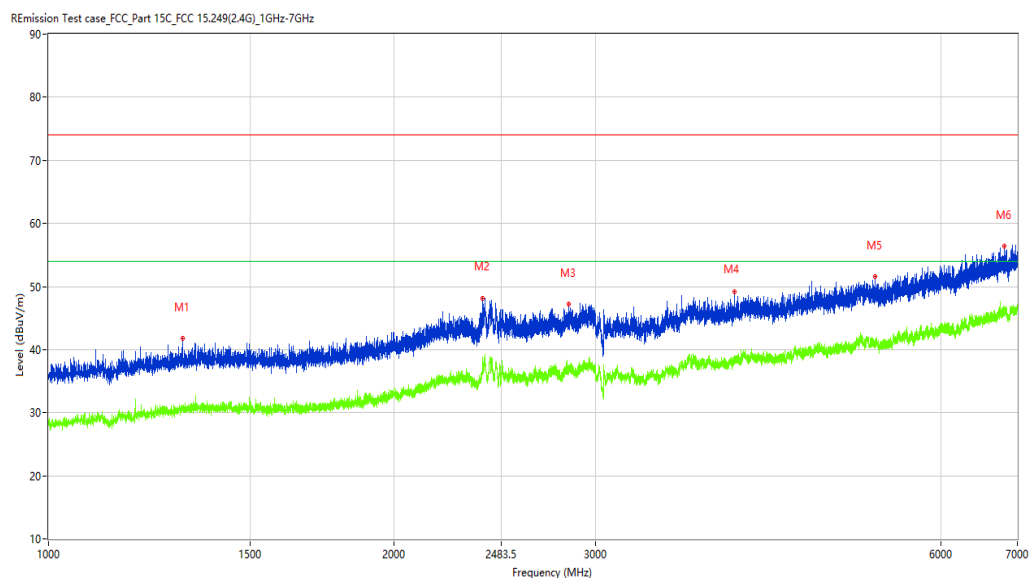

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1308.750	41.82	-12.77	74.0	32.18	Peak	344.30	100	Horizontal	Pass
1**	1308.750	31.09	-12.77	54.0	22.91	AV	344.30	100	Horizontal	Pass
2	2391.500	48.19	-5.22	74.0	25.81	Peak	0.00	100	Horizontal	Pass
2**	2391.500	37.90	-5.22	54.0	16.10	AV	0.00	100	Horizontal	Pass
3	2841.250	47.28	-4.34	74.0	26.72	Peak	67.10	100	Horizontal	Pass
3**	2841.250	36.98	-4.34	54.0	17.02	AV	67.10	100	Horizontal	Pass
4	3964.500	49.18	-2.03	74.0	24.82	Peak	72.80	100	Horizontal	Pass
4**	3964.500	38.61	-2.03	54.0	15.39	AV	72.80	100	Horizontal	Pass
5	5257.500	51.55	-0.33	74.0	22.45	Peak	360.00	100	Horizontal	Pass
5**	5257.500	40.54	-0.33	54.0	13.46	AV	360.00	100	Horizontal	Pass
6	6814.500	56.48	4.10	74.0	17.52	Peak	202.30	100	Horizontal	Pass
6**	6814.500	46.41	4.10	54.0	7.59	AV	202.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.25.46

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249_7GHz-18GHz

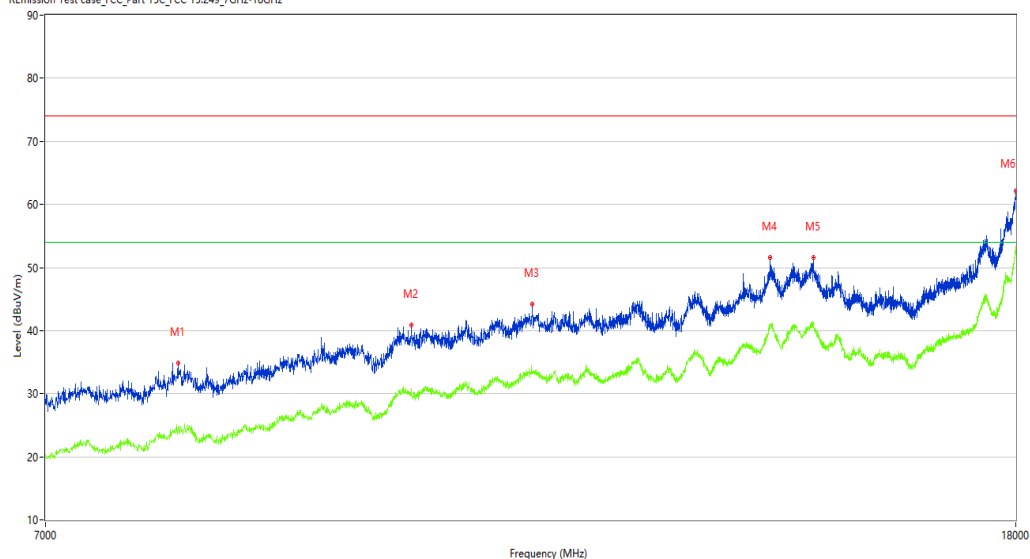

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7962.500	34.82	2.79	74.0	39.18	Peak	63.00	100	Horizontal	Pass
1**	7962.500	24.44	2.79	54.0	29.56	AV	63.00	100	Horizontal	Pass
2	9994.750	40.90	8.39	74.0	33.10	Peak	358.30	100	Horizontal	Pass
2**	9994.750	30.76	8.39	54.0	23.24	AV	358.30	100	Horizontal	Pass
3	11243.250	44.24	10.96	74.0	29.76	Peak	3.10	100	Horizontal	Pass
3**	11243.250	33.46	10.96	54.0	20.54	AV	3.10	100	Horizontal	Pass
4	14174.750	51.55	18.23	74.0	22.45	Peak	63.00	100	Horizontal	Pass
4**	14174.750	40.99	18.23	54.0	13.01	AV	63.00	100	Horizontal	Pass
5	14779.750	51.57	17.76	74.0	22.43	Peak	110.60	100	Horizontal	Pass
5**	14779.750	41.33	17.76	54.0	12.67	AV	110.60	100	Horizontal	Pass
6	17997.251	62.08	29.85	74.0	11.92	Peak	358.30	100	Horizontal	Pass
6**	17997.251	53.44	29.85	54.0	0.56	AV	358.30	100	Horizontal	Pass

BT 3M-Hopping -Vertical-DH5-TX

Test result

Project Number: Certification

Test Time: 2023-08-12_14.04.18

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

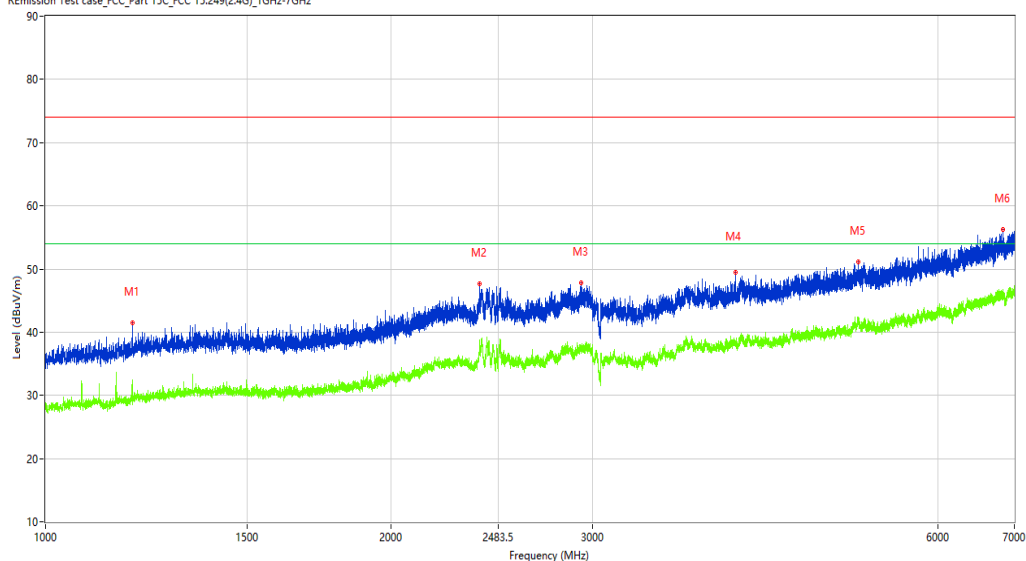

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1190.250	41.46	-13.69	74.0	32.54	Peak	117.00	100	Vertical	Pass
1**	1190.250	32.52	-13.69	54.0	21.48	AV	117.00	100	Vertical	Pass
2	2392.250	47.61	-4.45	74.0	26.39	Peak	100.20	100	Vertical	Pass
2**	2392.250	38.46	-4.45	54.0	15.54	AV	100.20	100	Vertical	Pass
3	2932.000	47.77	-4.60	74.0	26.23	Peak	0.00	100	Vertical	Pass
3**	2932.000	37.74	-4.60	54.0	16.26	AV	0.00	100	Vertical	Pass
4	3995.500	49.48	-1.84	74.0	24.52	Peak	258.10	100	Vertical	Pass
4**	3995.500	38.03	-1.84	54.0	15.97	AV	258.10	100	Vertical	Pass
5	5120.500	51.15	0.37	74.0	22.85	Peak	143.90	100	Vertical	Pass
5**	5120.500	41.70	0.37	54.0	12.30	AV	143.90	100	Vertical	Pass
6	6845.500	56.20	4.06	74.0	17.80	Peak	360.00	100	Vertical	Pass
6**	6845.500	46.10	4.06	54.0	7.90	AV	360.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-08-12_17.05.12

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 24.5

Hum.: 52%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

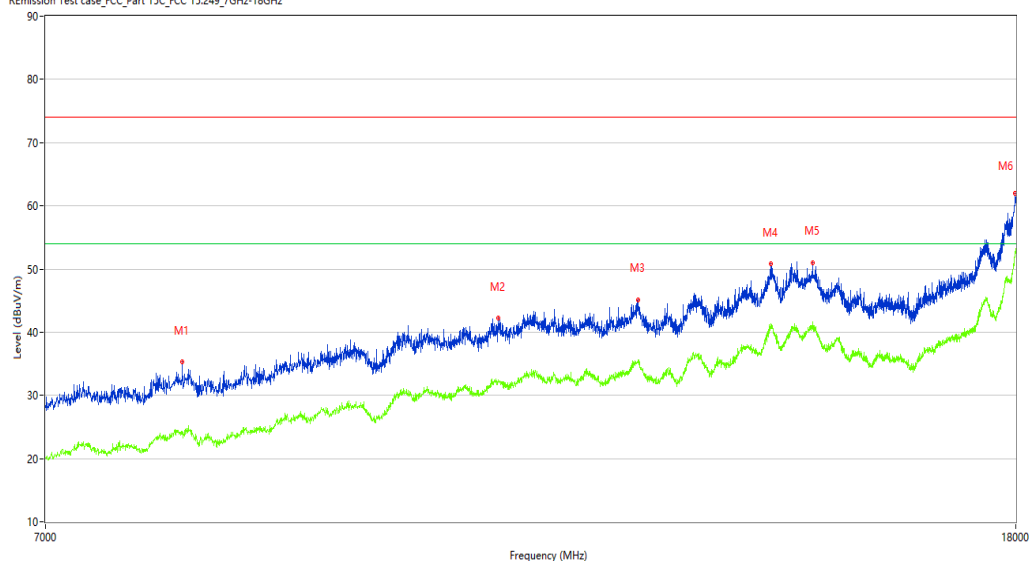

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7998.250	35.27	3.10	74.0	38.73	Peak	90.20	100	Vertical	Pass
1**	7998.250	24.26	3.10	54.0	29.74	AV	90.20	100	Vertical	Pass
2	10877.500	42.21	10.20	74.0	31.79	Peak	136.40	100	Vertical	Pass
2**	10877.500	32.28	10.20	54.0	21.72	AV	136.40	100	Vertical	Pass
3	12461.500	45.18	11.91	74.0	28.82	Peak	136.40	100	Vertical	Pass
3**	12461.500	35.30	11.91	54.0	18.70	AV	136.40	100	Vertical	Pass
4	14183.000	50.83	18.50	74.0	23.17	Peak	120.70	100	Vertical	Pass
4**	14183.000	41.28	18.50	54.0	12.72	AV	120.70	100	Vertical	Pass
5	14768.750	51.04	17.92	74.0	22.96	Peak	120.70	100	Vertical	Pass
5**	14768.750	41.58	17.92	54.0	12.42	AV	120.70	100	Vertical	Pass
6	17986.251	62.05	29.13	74.0	11.95	Peak	184.70	100	Vertical	Pass
6**	17986.251	52.25	29.13	54.0	1.75	AV	184.70	100	Vertical	Pass

BT 3M-Bandedge-Hopping- Horizontal-DH5 –TX

Test result

Project Number: Certification

Test Time: 2023-08-12_15.21.21

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_bandedge

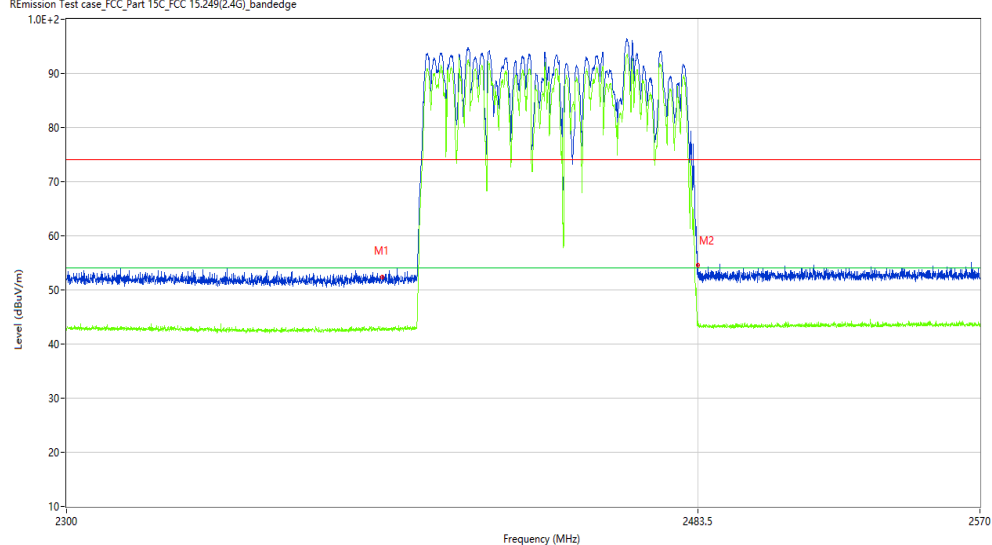

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.30	-10.27	74.0	21.70	Peak	287.47	100	H	Pass
1**	2390.000	42.62	-10.27	54.0	11.38	AV	287.47	100	H	Pass
2	2483.500	54.15	-9.82	74.0	19.85	Peak	152.60	100	H	Pass
2**	2483.500	44.07	-9.82	54.0	9.93	AV	152.60	100	H	Pass

BT 3M-Bandedge-Hopping-Vertical-DH5 -TX

Test result

Project Number: Certification

Test Time: 2023-08-12_14.30.50

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 24.5

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(24G)_bandedge

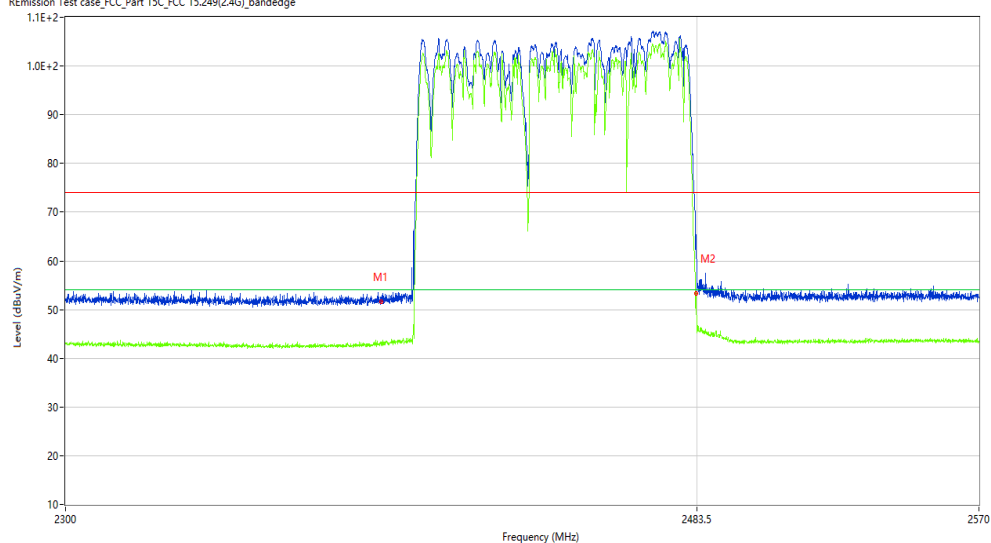

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.70	-10.27	74.0	22.30	Peak	142.89	100	V	Pass
1**	2390.000	43.04	-10.27	54.0	10.96	AV	142.89	100	V	Pass
2	2483.500	53.86	-9.82	74.0	20.14	Peak	220.60	100	V	Pass
2**	2483.500	45.29	-9.82	54.0	8.71	AV	220.60	100	V	Pass