FCC Radio Test Report

FCC ID: 2AJZR-T602C00

This report concerns (check one): ☒**Original Grant** ☐**Class I Change** ☐**Class II Change**

Project No.	:	1611128
Equipment	:	Mobile Jacket
Test Model	:	iSAPPOS Scanner Jacket
Series Model	:	N/A
Applicant	:	iSAPPOS Systems Company Limited
Address	:	Room 04, 6/F., Block A, Tonic Industrial Centre, 26 Kai Cheung Road, Kowloon Bay, Hong Kong

Date of Receipt	:	Dec. 14, 2016
Date of Test	:	Dec. 14, 2016 ~ Dec. 23, 2016
Issued Date	:	Jan. 11, 2017
Tested by	:	BTL Inc.

Testing Engineer : Rush Kao
(Rush Kao)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

BTL INC.

B1, No.37, Lane 365, Yang Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL:+886-2-2657-3299 FAX: +886-2- 2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents Page

1 . CERTIFICATION 6

2 . SUMMARY OF TEST RESULTS 7

2.1 TEST FACILITY 8

2.2 MEASUREMENT UNCERTAINTY 9

3 . GENERAL INFORMATION 10

3.1 GENERAL DESCRIPTION OF EUT 10

3.2 DESCRIPTION OF TEST MODES 12

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING 12

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 13

3.5 DESCRIPTION OF SUPPORT UNITS 13

4 . EMC EMISSION TEST 14

4.1 CONDUCTED EMISSION MEASUREMENT 14

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS 14

4.1.2 TEST PROCEDURE 14

4.1.3 DEVIATION FROM TEST STANDARD 14

4.1.4 TEST SETUP 15

4.1.5 EUT OPERATING CONDITIONS 15

4.1.6 EUT TEST CONDITIONS 15

4.1.7 TEST RESULTS 15

4.2 RADIATED EMISSION MEASUREMENT 16

4.2.1 RADIATED EMISSION LIMITS 16

4.2.2 TEST PROCEDURE 17

4.2.3 DEVIATION FROM TEST STANDARD 17

4.2.4 TEST SETUP 18

4.2.5 EUT OPERATING CONDITIONS 19

4.2.6 EUT TEST CONDITIONS 19

4.2.7 TEST RESULTS (9KHZ TO 30MHZ) 19

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ) 19

4.2.9 TEST RESULTS (ABOVE 1000 MHZ) 19

5 . BANDWIDTH TEST 20

5.1 APPLIED PROCEDURES / LIMIT 20

5.1.1 TEST PROCEDURE 20

5.1.2 DEVIATION FROM STANDARD 20

5.1.3 TEST SETUP 20

5.1.4 EUT OPERATION CONDITIONS 20

5.1.5 EUT TEST CONDITIONS 20

5.1.6 TEST RESULTS 20

Table of Contents Page

6 . MAXIMUM OUTPUT POWER TEST 21

6.1 APPLIED PROCEDURES / LIMIT 21
6.1.1 TEST PROCEDURE 21
6.1.2 DEVIATION FROM STANDARD 21
6.1.3 TEST SETUP 21
6.1.4 EUT OPERATION CONDITIONS 21
6.1.5 EUT TEST CONDITIONS 21
6.1.6 TEST RESULTS 21

7 . ANTENNA CONDUCTED SPURIOUS EMISSION 22

7.1 APPLIED PROCEDURES / LIMIT 22
7.1.1 TEST PROCEDURE 22
7.1.2 DEVIATION FROM STANDARD 22
7.1.3 TEST SETUP 22
7.1.4 EUT OPERATION CONDITIONS 22
7.1.5 EUT OPERATION CONDITIONS 22
7.1.6 TEST RESULTS 22

8 . POWER SPECTRAL DENSITY TEST 23

8.1 APPLIED PROCEDURES / LIMIT 23
8.1.1 TEST PROCEDURE 23
8.1.2 DEVIATION FROM STANDARD 23
8.1.3 TEST SETUP 23
8.1.4 EUT OPERATION CONDITIONS 23
8.1.5 EUT TEST CONDITIONS 23
8.1.6 TEST RESULTS 23

9 . MEASUREMENT INSTRUMENTS LIST 24

10 . EUT TEST PHOTO 26

ATTACHMENT A - CONDUCTED EMISSION 30

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ) 33

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ) 38

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ) 41

ATTACHMENT E - BANDWIDTH 54

ATTACHMENT F - MAXIMUM OUTPUT POWER TEST 57

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION 58

ATTACHMENT H - POWER SPECTRAL DENSITY TEST 65

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1611128	Original Issue.	Jan. 12, 2017

1. CERTIFICATION

Equipment	:	Mobile Jacket
Brand Name	:	N/A
Test Model	:	iSAPPOS Scanner Jacket
Series Model	:	N/A
Applicant	:	iSAPPOS Systems Company Limited
Manufacturer	:	iSAPPOS Systems Company Limited
Address	:	Room 04, 6/F., Block A, Tonic Industrial Centre, 26 Kai Cheung Road, Kowloon Bay, Hong Kong
Factory	:	FLYTECH TECHNOLOGY CO., LTD.
Address	:	No.36 Huaya 3rd Rd., Guishan Township, Taoyuan Country 33383,Taiwan
Date of Test	:	Dec. 14, 2016 ~ Dec. 23, 2016
Test Sample	:	Engineering Sample
Standard(s)	:	FCC Part15, Subpart C (15.247) ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.
The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1611128) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the Bluetooth LE part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

NOTE:

(1)" N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:674415; FCC DN:TW0659)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Below 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Above 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement y ± U, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

A. Conducted emission test:

Test Site	Method	Measurement Frequency Range	U, (dB)
C05	CISPR	150 kHz ~ 30MHz	3.06

B. Radiated emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.96
		150kHz ~ 30MHz	2.74

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.76
		30MHz ~ 200MHz	H	4.28
		200MHz ~ 1,000MHz	V	5.08
		200MHz ~ 1,000MHz	H	4.50

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB15 (3m)	CISPR	1GHz ~ 6GHz	V	4.48
		1GHz ~ 6GHz	H	4.50

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB15 (1m)	CISPR	6GHz ~ 18GHz	V	4.30
		6GHz ~ 18GHz	H	4.14

Test Site	Method	Measurement Frequency Range	U, (dB)
CB15 (1m)	CISPR	18 ~ 26.5 GHz	4.66
		26.5 ~ 40 GHz	4.74

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR}, as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR}.

Note: unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Jacket	
Brand Name	N/A	
Test Model	iSAPPOS Scanner Jacket	
Series Model	N/A	
Model Difference	EUT includes two without circuit covers: T602-6 and T603-6 which only differ in size.	
Product Description	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK(1Mbps)
	Bit Rate of Transmitter	
	Output Power (Max.)	-0.12 dBm (1Mbps)
Power Source	#1 DC voltage supplied from external power supply. EDAC/EA1012AVRS-050 #2 Bettery supplied. BA110000	
Power Rating	#1 I/P: 100-240Vac, 1.0A 50-60Hz O/P: 5V⎓ 2.4A #2 3.7V⎓ 1100mAh 4.07Wh	
Products Covered	1 * POWER: EDAC/EA1012AVRS-050	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	ACX	AT5020-B2R8HAA	Chip	N/A	0

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode **NOTE (1)**

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode **NOTE (1)**

Note:

(1) The measurements are performed at the high, middle, low available channels.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of BT LE

Test Software Version	SmartRF Studio v7		
Frequency (MHz)	2402	2440	2480
BT LE	0	0	-2

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

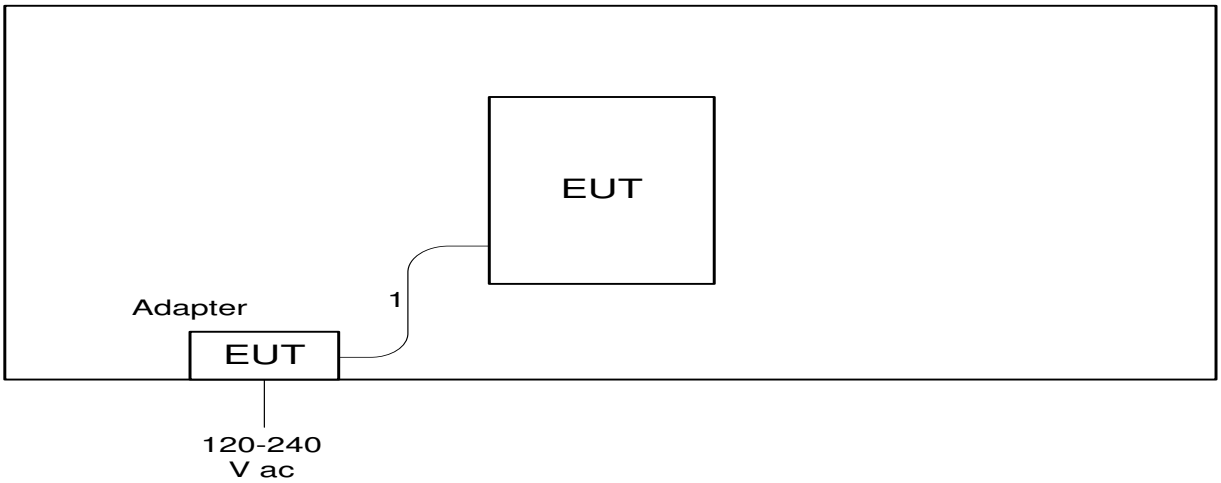

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	Power Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0 5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	0	50

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

(2) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

d. LISN at least 80 cm from nearest part of EUT chassis.

e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

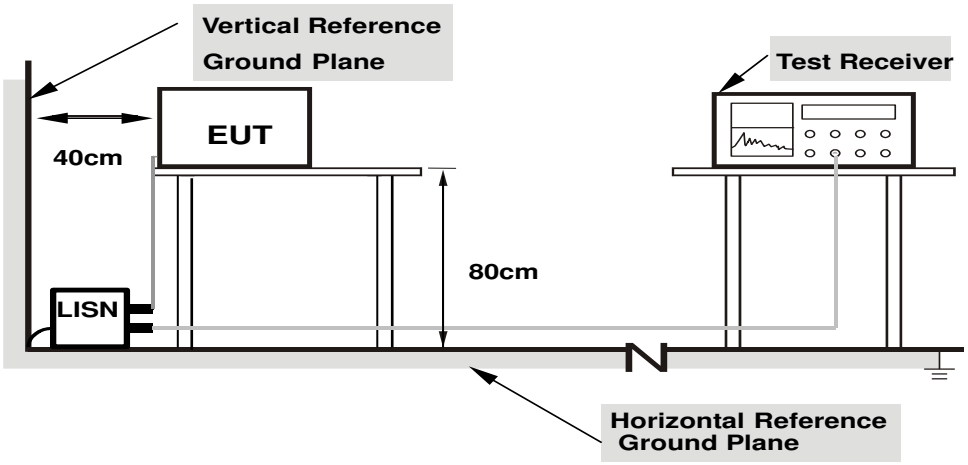

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

(1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
(2) Measuring frequency range from 150KHz to 30MHz.
(3) " N/A" denotes test is not applicable to this device.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform. (below 1GHz)
h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform. (above 1GHz)
i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

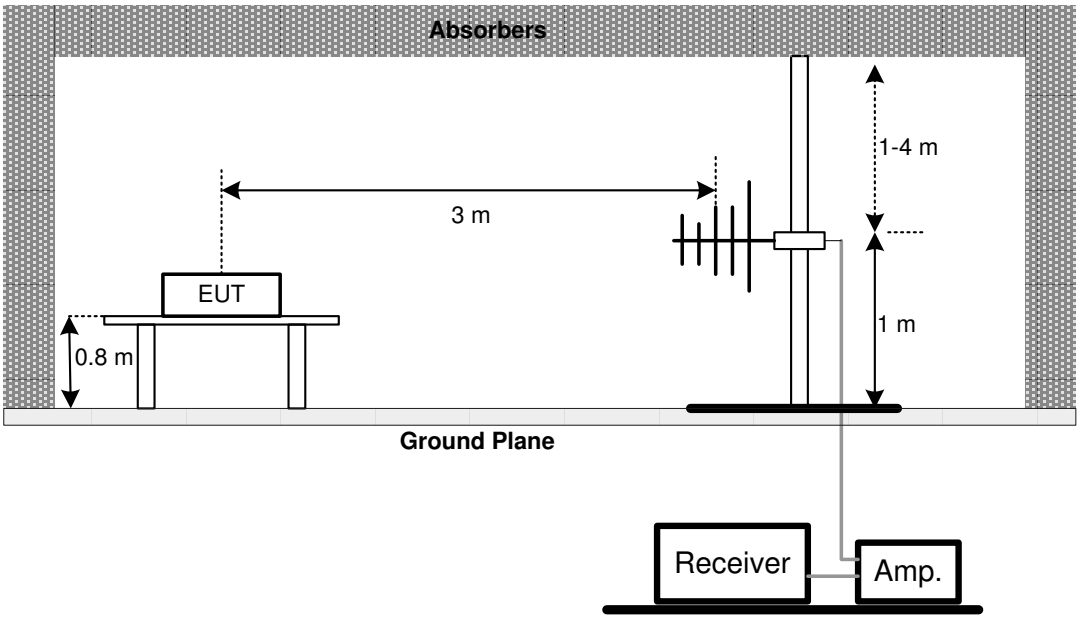

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

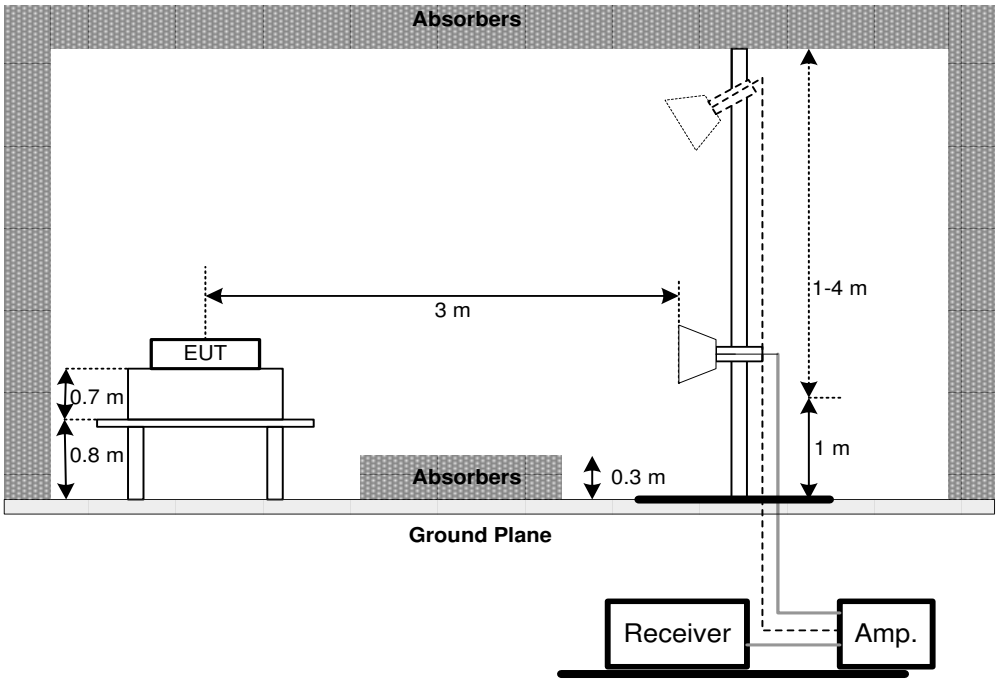

(C) For radiated emissions below 30MHz

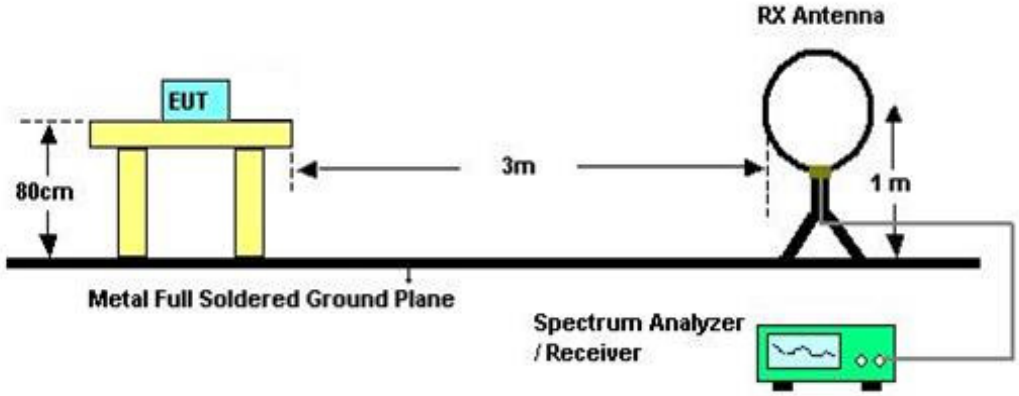

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 22°C Relative Humidity: 56% Test Voltage: AC 120V/60Hz

4.2.7TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

(1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
(2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
(3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
c. Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT OPERATION CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 25, 2017
2	Test Cable	TIMES	CFD300-NL	C05	Jun. 14, 2017
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 08, 2017
4	Measurement Software	Farad	EZ_EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Mar. 01, 2017
2	Preamplifier	EMCI	EMC02325	980217	Dec. 30, 2017
3	Test Cable	EMCI	EMC104-SM-SM-8000	8m	Jan. 05, 2017
4	Test Cable	EMCI	EMC104-SM-SM-800	150207	Jan. 05, 2017
5	Test Cable	EMCI	EEMC104-SM-SM-3000	151205	Jan. 05, 2017
6	MXE EMI Receiver	Agilent	N9038A	MY55420127	Jan. 08, 2017
7	Signal Analyzer	Agilent	N9010A	MY52220990	Feb. 23, 2017
8	Loop Ant	EMCO	6502	42960	Nov. 24, 2017
9	Horm Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	Mar. 01, 2017
10	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 17, 2017
11	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 17, 2017

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY51160196	Jul. 27, 2017

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Aug. 17, 2017
2	Power Sensor	Anritsu	MA2411B	1126001	Aug. 17, 2017

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY51160196	Jul. 27, 2017

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY51160196	Jul. 27, 2017

Remark: ”N/A” denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

10. EUT TEST PHOTO

Conducted Measurement Photos

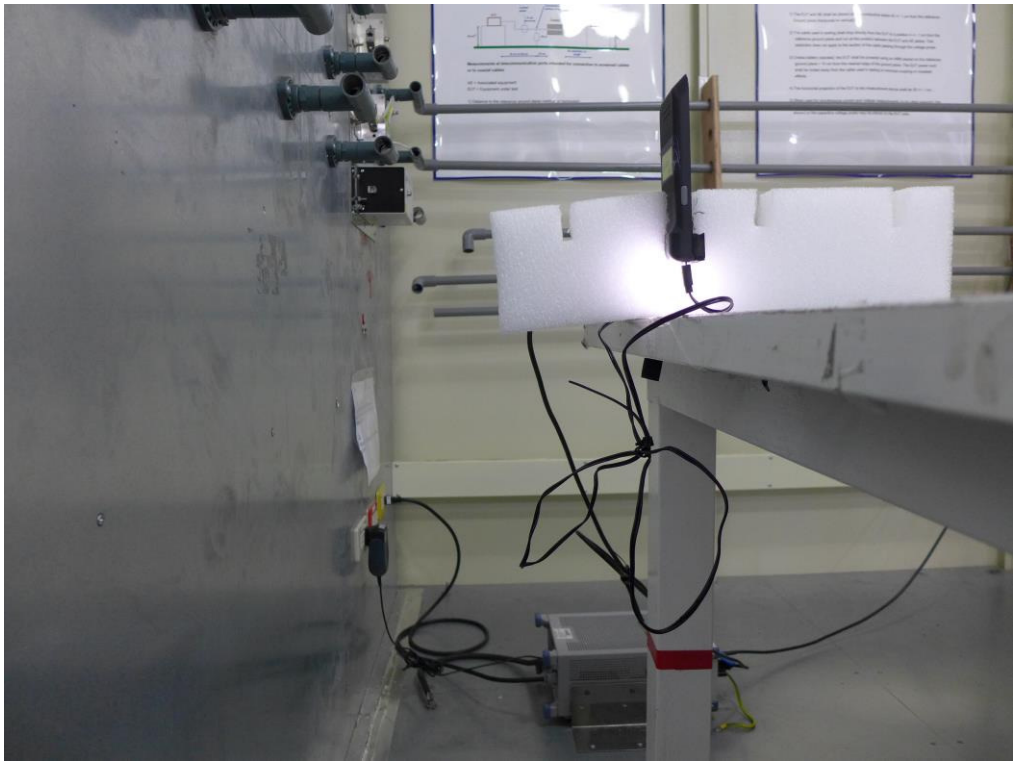

Radiated Measurement Photos

9KHz to 30MHz

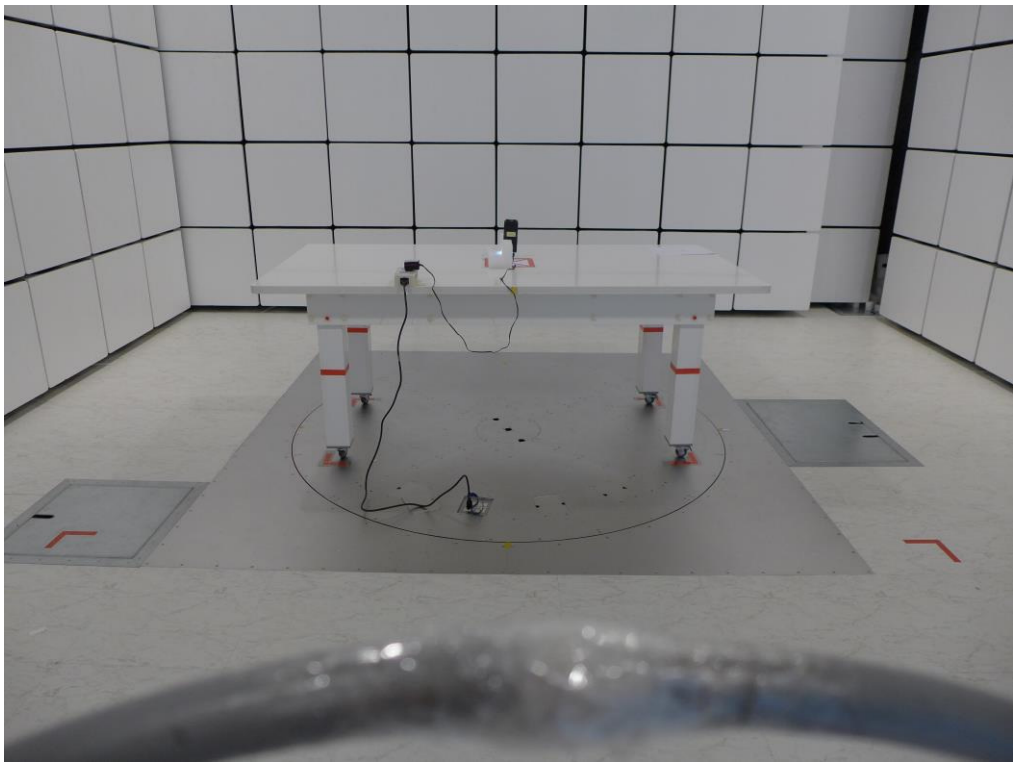

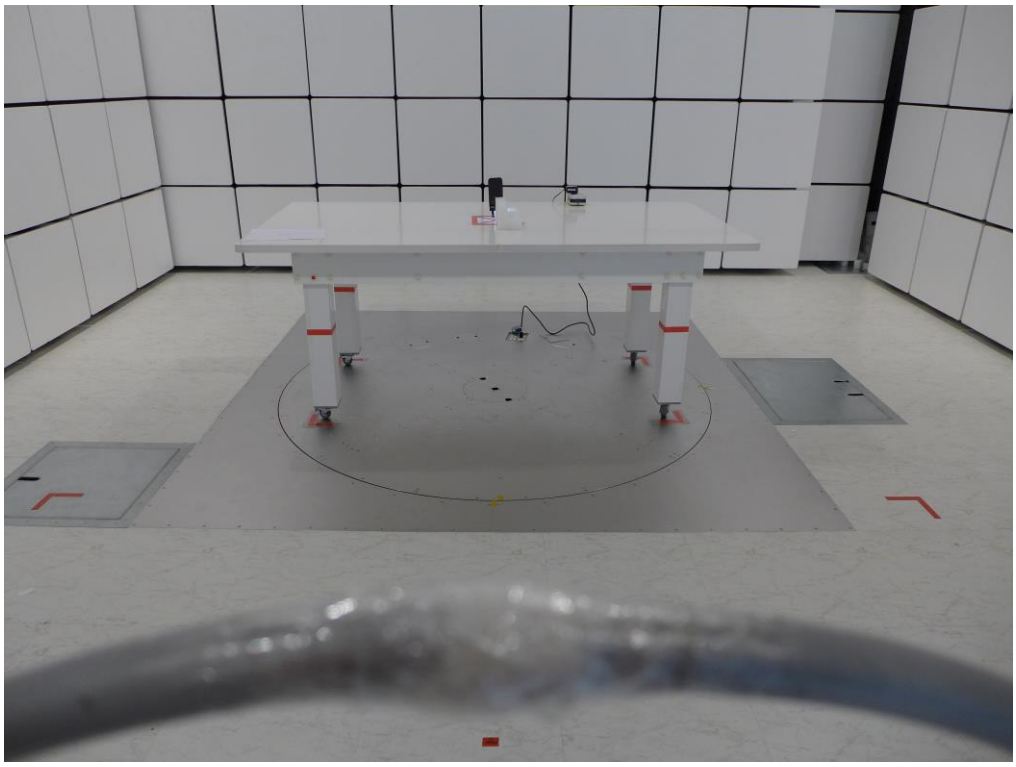

Radiated Measurement Photos

30MHz to 1000MHz

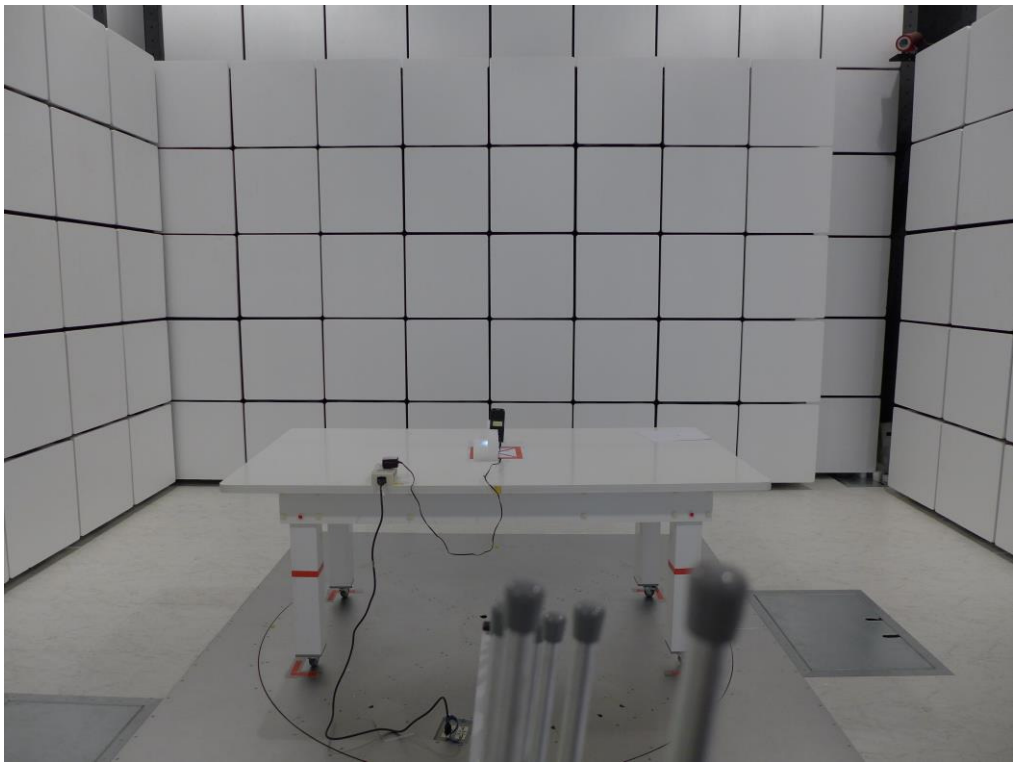

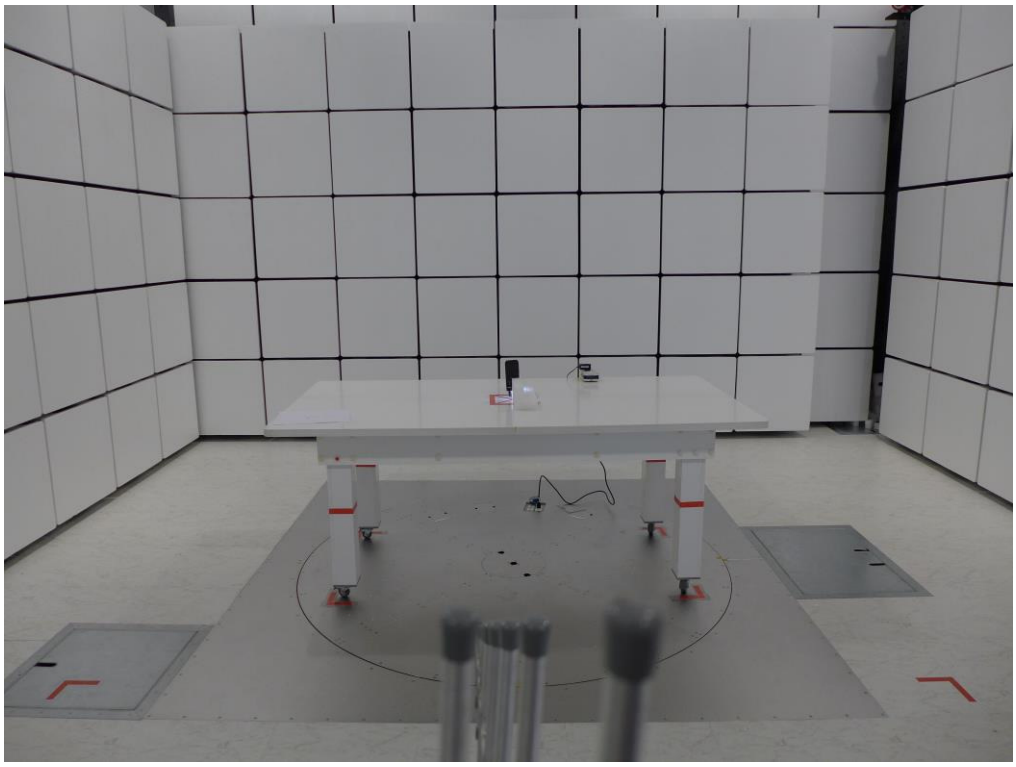

Radiated Measurement Photos

Above 1000MHz

ATTACHMENT A - CONDUCTED EMISSION

Test Mode:	TX Mode

Line

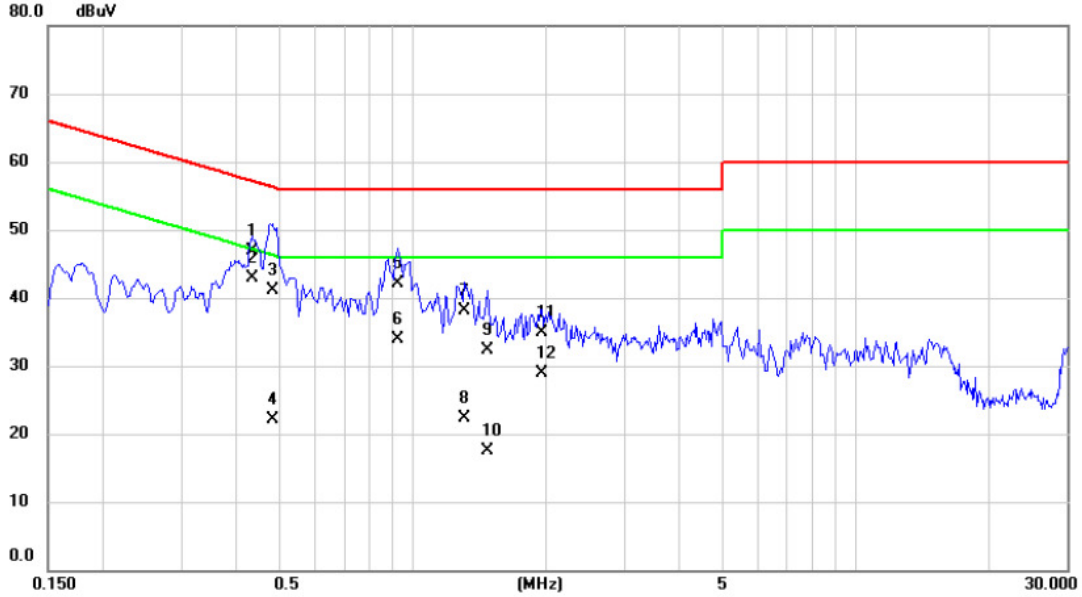

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4334	37.30	9.67	46.97	57.19	-10.22	QP	
2	*	0.4334	33.30	9.67	42.97	47.19	-4.22	AVG	
3		0.4838	31.50	9.67	41.17	56.27	-15.10	QP	
4		0.4838	12.50	9.67	22.17	46.27	-24.10	AVG	
5		0.9230	32.40	9.67	42.07	56.00	-13.93	QP	
6		0.9230	24.20	9.67	33.87	46.00	-12.13	AVG	
7		1.3100	28.40	9.69	38.09	56.00	-17.91	QP	
8		1.3100	12.70	9.69	22.39	46.00	-23.61	AVG	
9		1.4720	22.70	9.69	32.39	56.00	-23.61	QP	
10		1.4720	7.90	9.69	17.59	46.00	-28.41	AVG	
11		1.9490	25.10	9.73	34.83	56.00	-21.17	QP	
12		1.9490	19.10	9.73	28.83	46.00	-17.17	AVG	

Test Mode:	TX Mode

Neutral

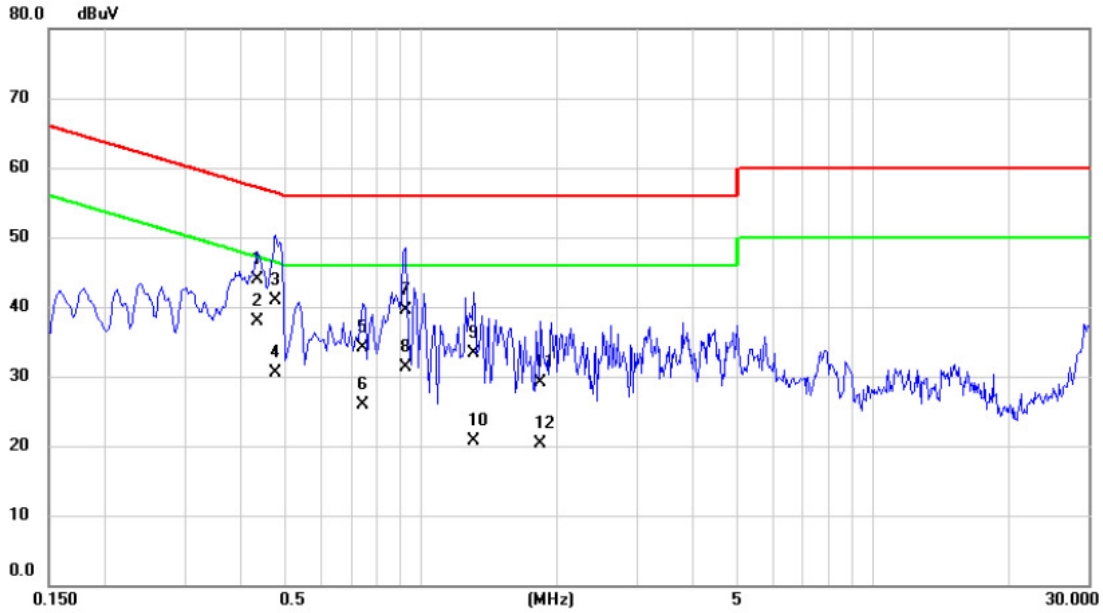

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4356	34.20	9.67	43.87	57.15	-13.28	QP	
2	*	0.4356	28.20	9.67	37.87	47.15	-9.28	AVG	
3		0.4762	31.30	9.67	40.97	56.41	-15.44	QP	
4		0.4762	20.80	9.67	30.47	46.41	-15.94	AVG	
5		0.7430	24.40	9.68	34.08	56.00	-21.92	QP	
6		0.7430	16.20	9.68	25.88	46.00	-20.12	AVG	
7		0.9230	29.90	9.68	39.58	56.00	-16.42	QP	
8		0.9230	21.70	9.68	31.38	46.00	-14.62	AVG	
9		1.3100	23.70	9.70	33.40	56.00	-22.60	QP	
10		1.3100	11.10	9.70	20.80	46.00	-25.20	AVG	
11		1.8410	19.30	9.73	29.03	56.00	-26.97	QP	
12		1.8410	10.50	9.73	20.23	46.00	-25.77	AVG	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX Mode

Ant 0°

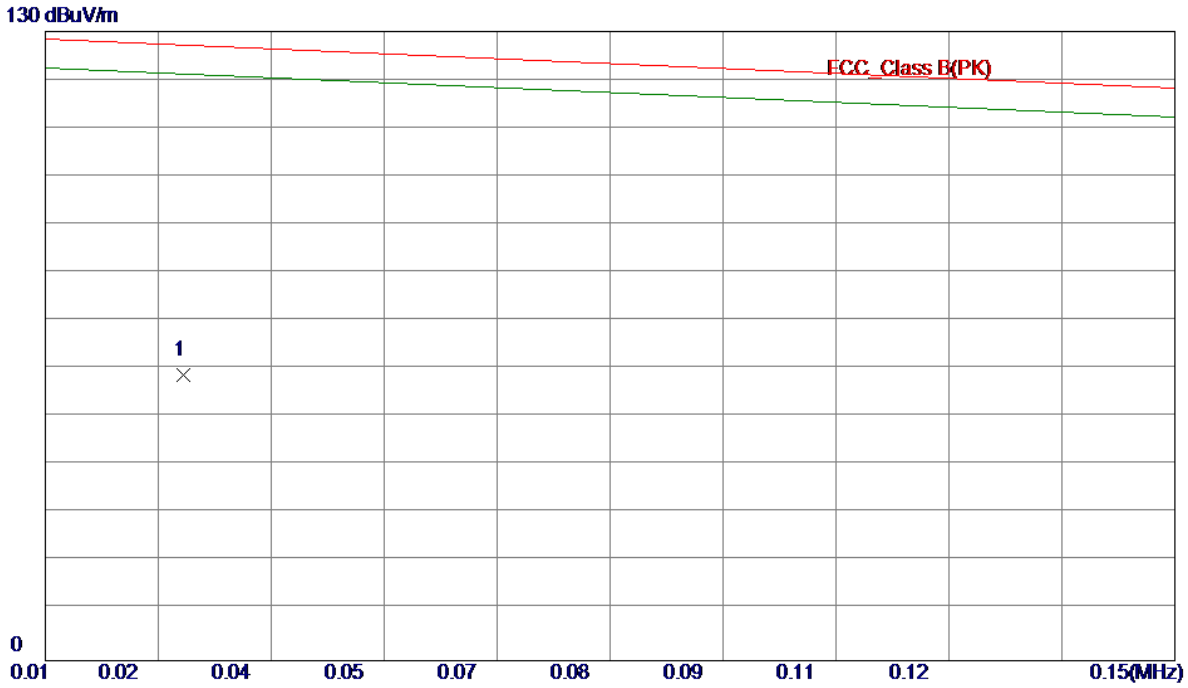

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.0263	43.11	15.99	59.10	127.26	-68.16	Peak	

Test Mode:	TX Mode

Ant 0°

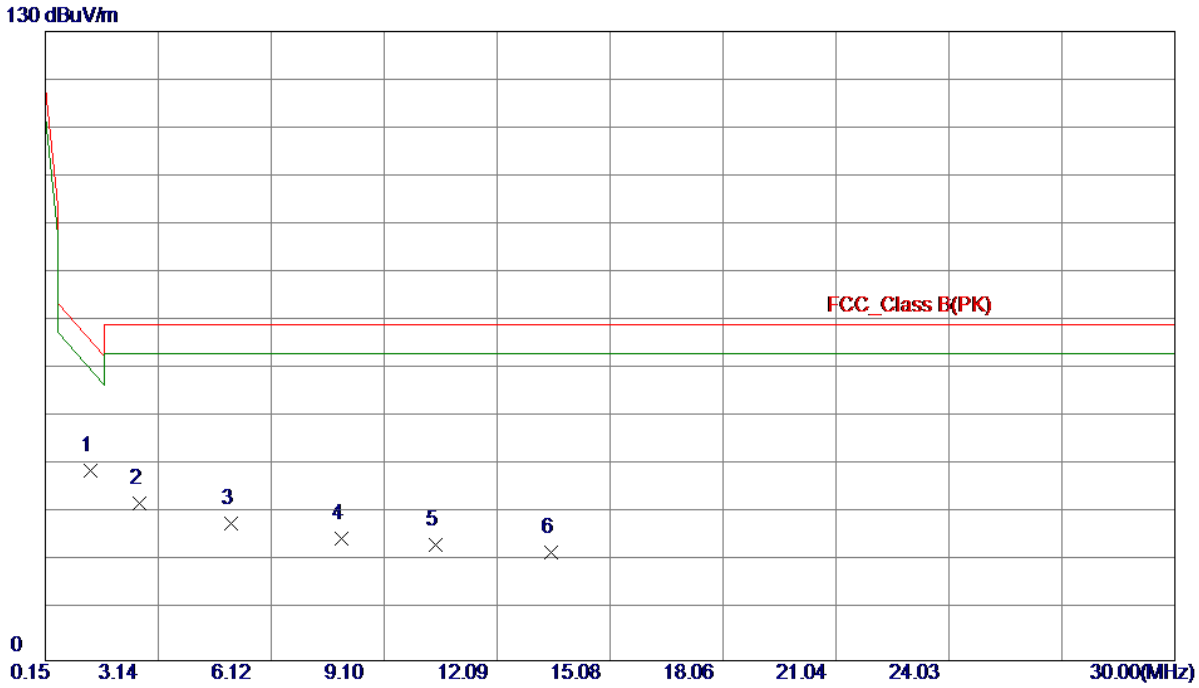

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	1.3440	27.36	11.85	39.21	66.19	-26.98	Peak	
2	2.6274	21.29	11.27	32.56	69.54	-36.98	Peak	
3	5.0750	16.98	11.40	28.38	69.54	-41.16	Peak	
4	7.9706	13.82	11.34	25.16	69.54	-44.38	Peak	
5	10.4780	12.56	11.29	23.85	69.54	-45.69	Peak	
6	13.5228	11.24	11.19	22.43	69.54	-47.11	Peak	

Test Mode:	TX Mode

Ant 90°

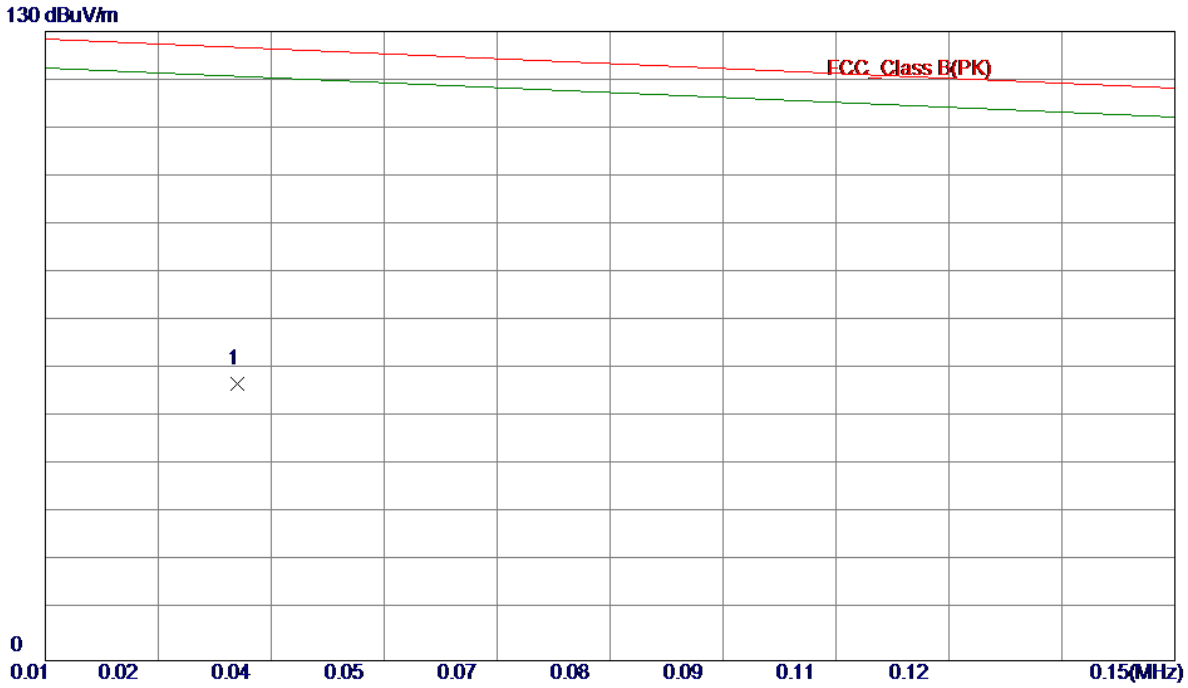

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.0330	42.60	14.69	57.29	126.78	-69.49	Peak	

Test Mode:	TX Mode

Ant 90°

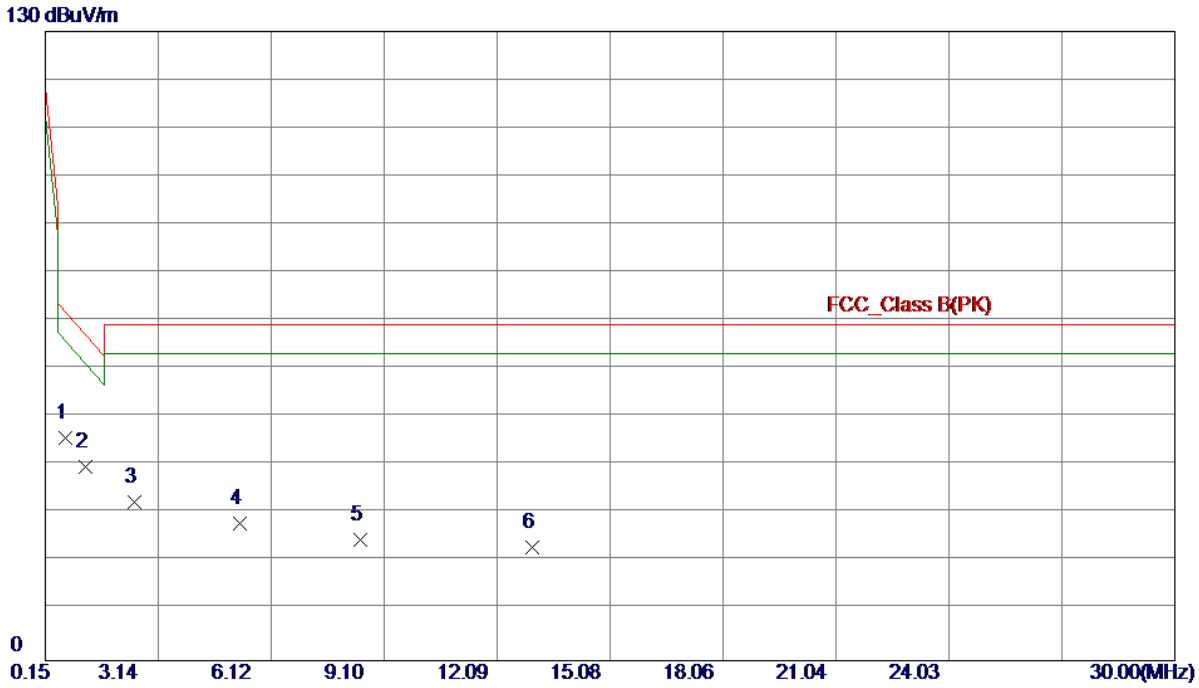

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.6873	34.17	11.87	46.04	72.04	-26.00	Peak	
2	1.2240	28.18	11.90	40.08	67.26	-27.18	Peak	
3	2.5081	21.56	11.32	32.88	69.54	-36.66	Peak	
4	5.2842	16.97	11.39	28.36	69.54	-41.18	Peak	
5	8.4780	13.54	11.33	24.87	69.54	-44.67	Peak	
6	13.0152	12.08	11.21	23.29	69.54	-46.25	Peak	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode:	TX 2480MHz _CH39_1Mbps

Vertical

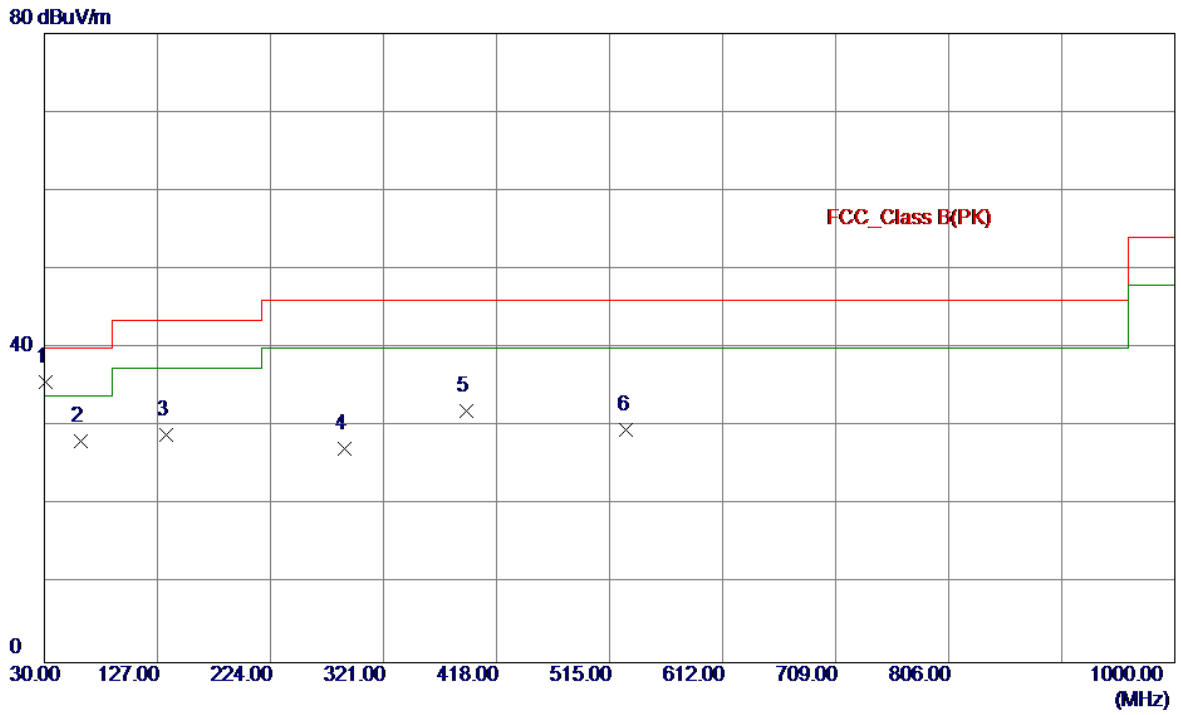

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	30.9700	44.77	-9.03	35.74	40.00	-4.26	Peak	
2	61.0400	37.40	-9.17	28.23	40.00	-11.77	Peak	
3	134.7600	38.33	-9.34	28.99	43.50	-14.51	Peak	
4	288.0200	35.17	-7.97	27.20	46.00	-18.80	Peak	
5	391.8100	37.45	-5.42	32.03	46.00	-13.97	Peak	
6	529.5500	32.03	-2.38	29.65	46.00	-16.35	Peak	

Test Mode:	TX 2480MHz _CH39_1Mbps

Horizontal

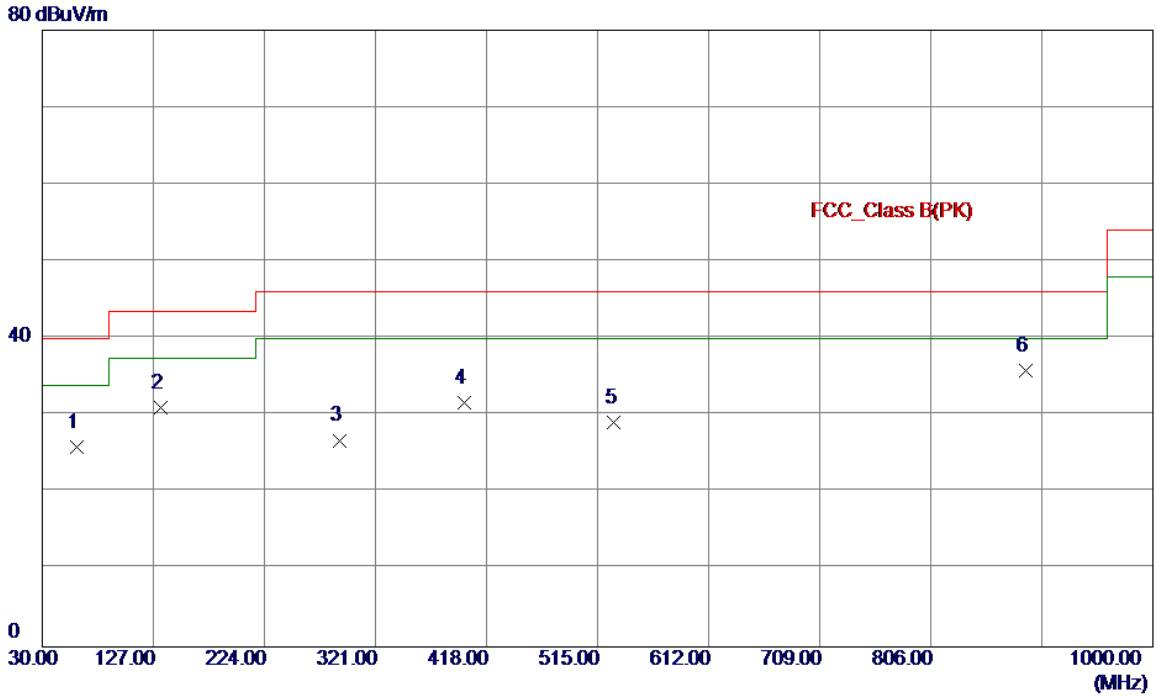

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	60.0700	34.99	-9.01	25.98	40.00	-14.02	Peak	
2	133.7899	40.44	-9.43	31.01	43.50	-12.49	Peak	
3	289.9600	34.71	-7.91	26.80	46.00	-19.20	Peak	
4	398.6000	36.91	-5.27	31.64	46.00	-14.36	Peak	
5	529.5500	31.48	-2.38	29.10	46.00	-16.90	Peak	
6 *	888.4500	32.00	3.89	35.89	46.00	-10.11	Peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode :	TX 2402MHz _CH00_1Mbps

Vertical

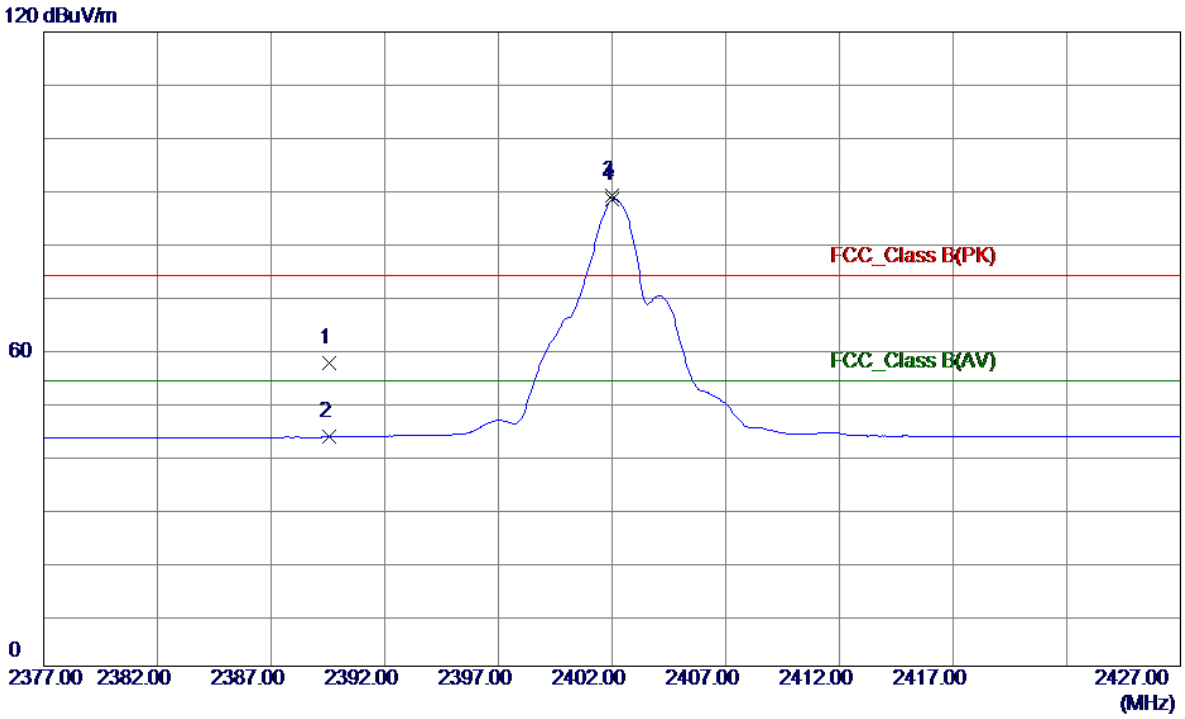

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2389.5500	26.46	30.96	57.42	74.00	-16.58	Peak	
2	2389.5500	12.44	30.96	43.40	54.00	-10.60	AVG	
3	2402.0000	57.98	31.01	88.99	74.00	14.99	Peak	No Limit
4 *	2402.0000	57.28	31.01	88.29	54.00	34.29	AVG	No Limit

Test Mode :	TX 2402MHz _CH00_1Mbps

Vertical

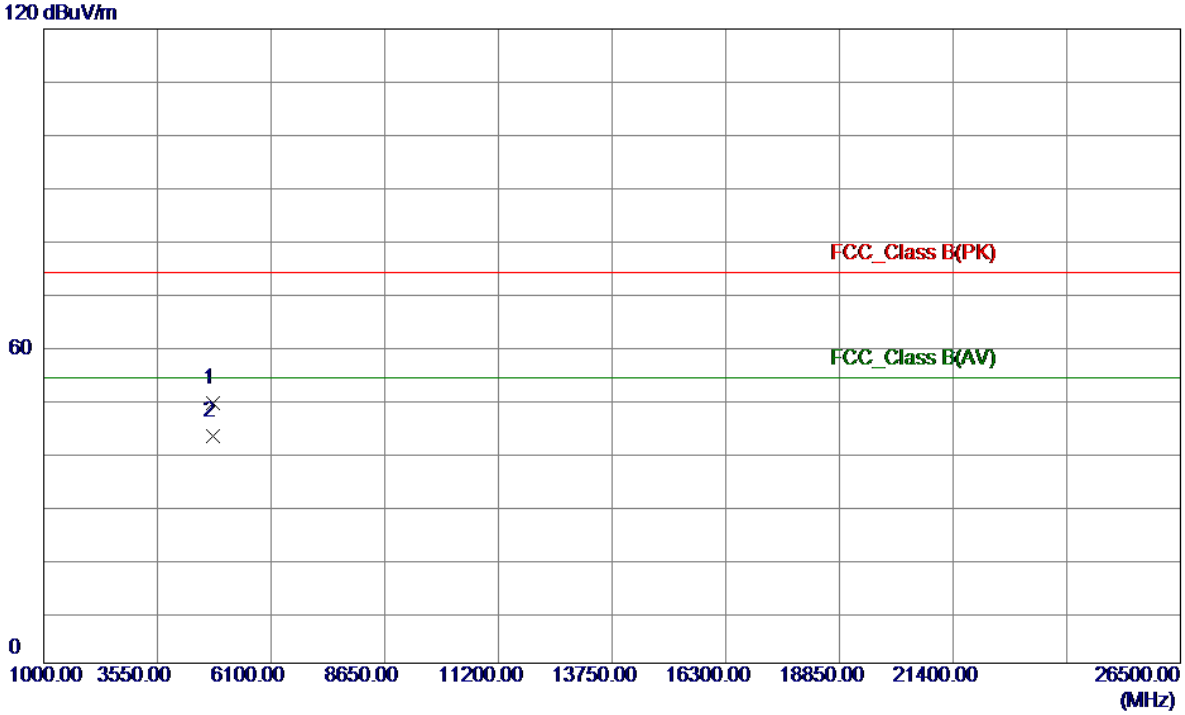

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4804.0000	60.66	-11.50	49.16	74.00	-24.84	Peak	
2 *	4804.0000	54.48	-11.50	42.98	54.00	-11.02	AVG	

Test Mode :	TX 2402MHz _CH00_1Mbps

Horizontal

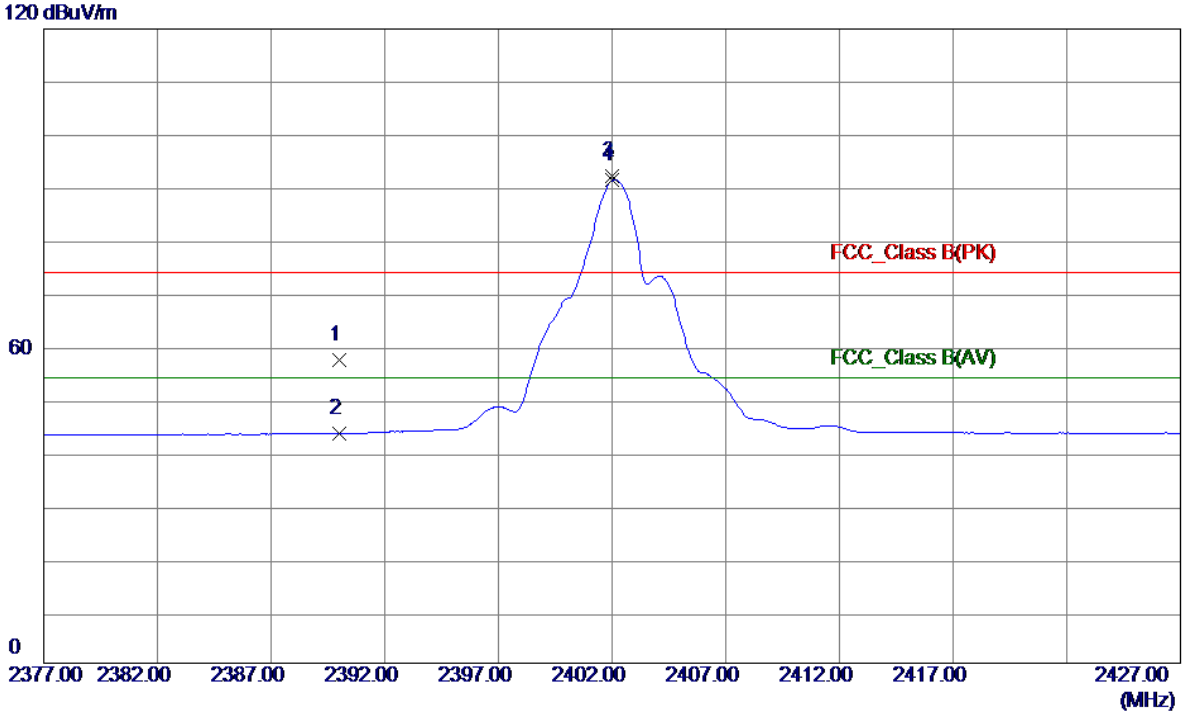

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	26.36	30.97	57.33	74.00	-16.67	Peak	
2	2390.0000	12.51	30.97	43.48	54.00	-10.52	AVG	
3	2402.0000	61.08	31.01	92.09	74.00	18.09	Peak	No Limit
4 *	2402.0000	60.42	31.01	91.43	54.00	37.43	AVG	No Limit

Test Mode :	TX 2402MHz _CH00_1Mbps

Horizontal

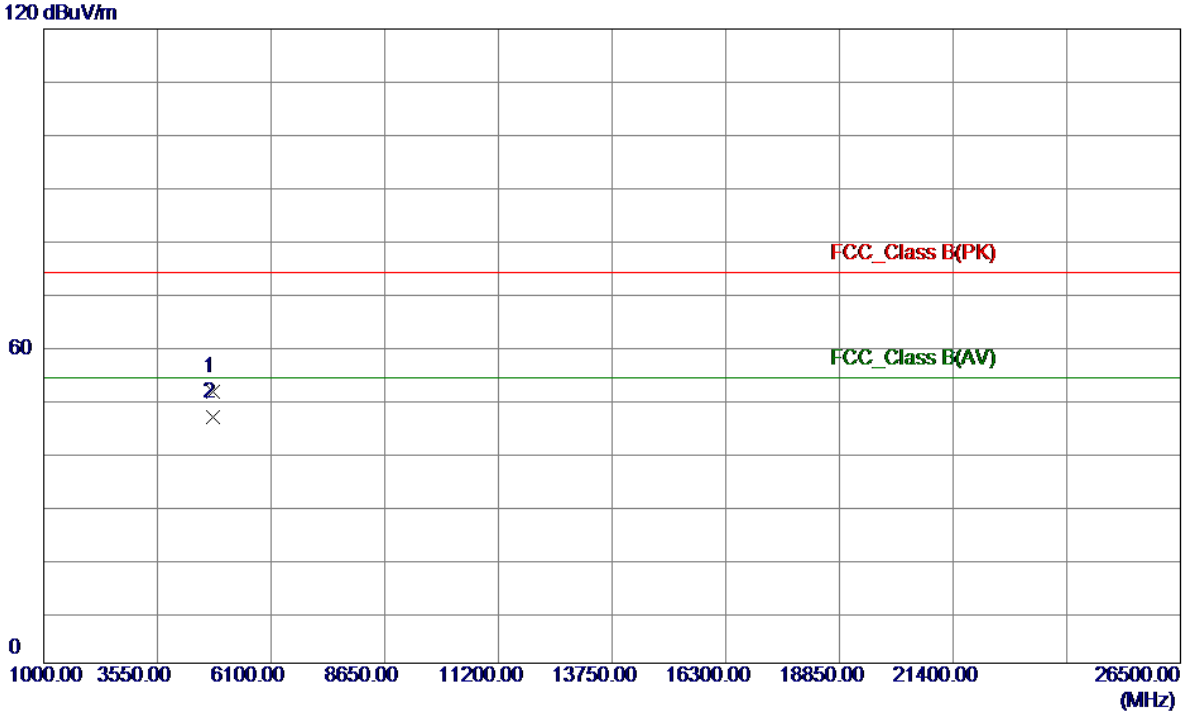

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4804.0000	62.78	-11.50	51.28	74.00	-22.72	Peak	
2 *	4804.0000	58.13	-11.50	46.63	54.00	-7.37	AVG	

Test Mode :	TX 2440MHz _CH19_1Mbps

Vertical

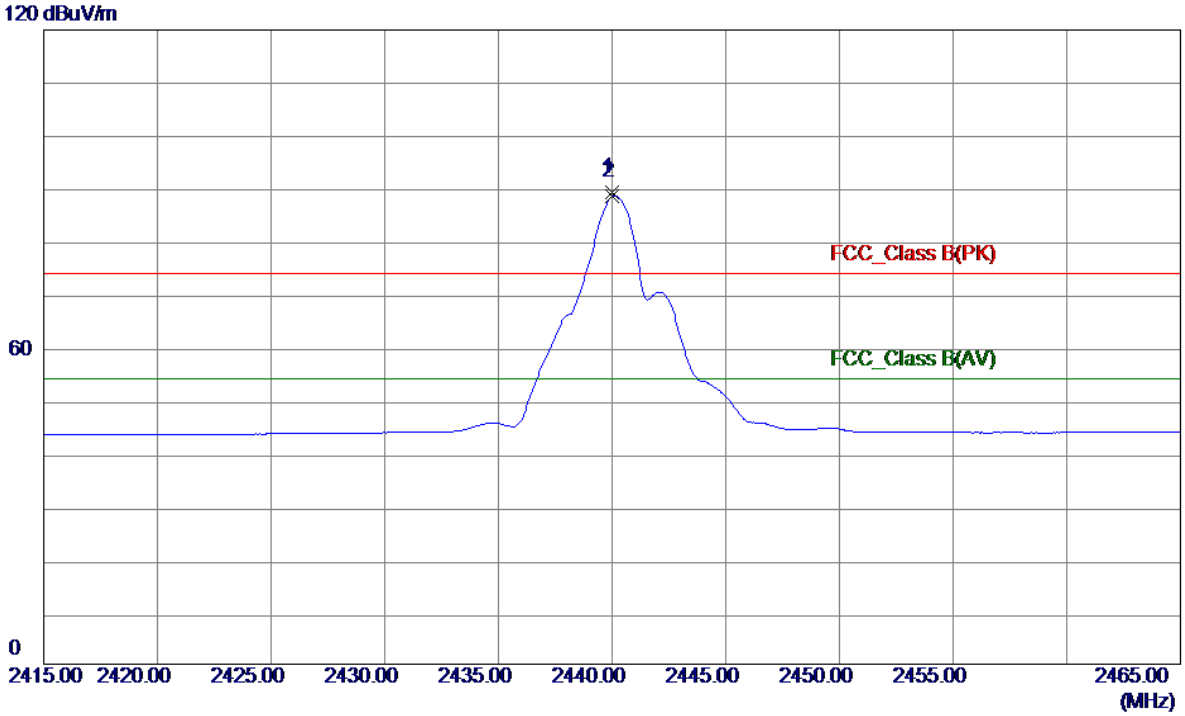

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2440.0000	58.17	31.15	89.32	74.00	15.32	Peak	No Limit
2 *	2440.0000	57.45	31.15	88.60	54.00	34.60	AVG	No Limit

Test Mode :	TX 2440MHz _CH19_1Mbps

Vertical

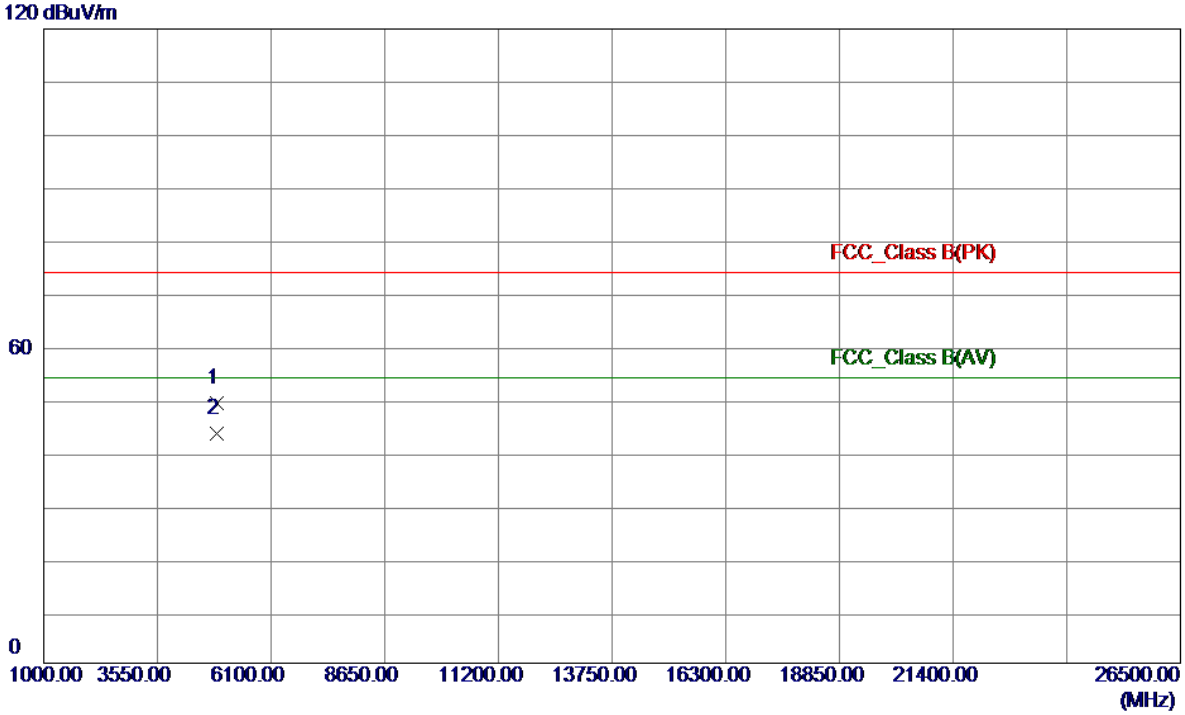

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4880.0000	60.50	-11.38	49.12	74.00	-24.88	Peak	
2 *	4880.0000	54.81	-11.38	43.43	54.00	-10.57	AVG	

Test Mode :	TX 2440MHz _CH19_1Mbps

Horizontal

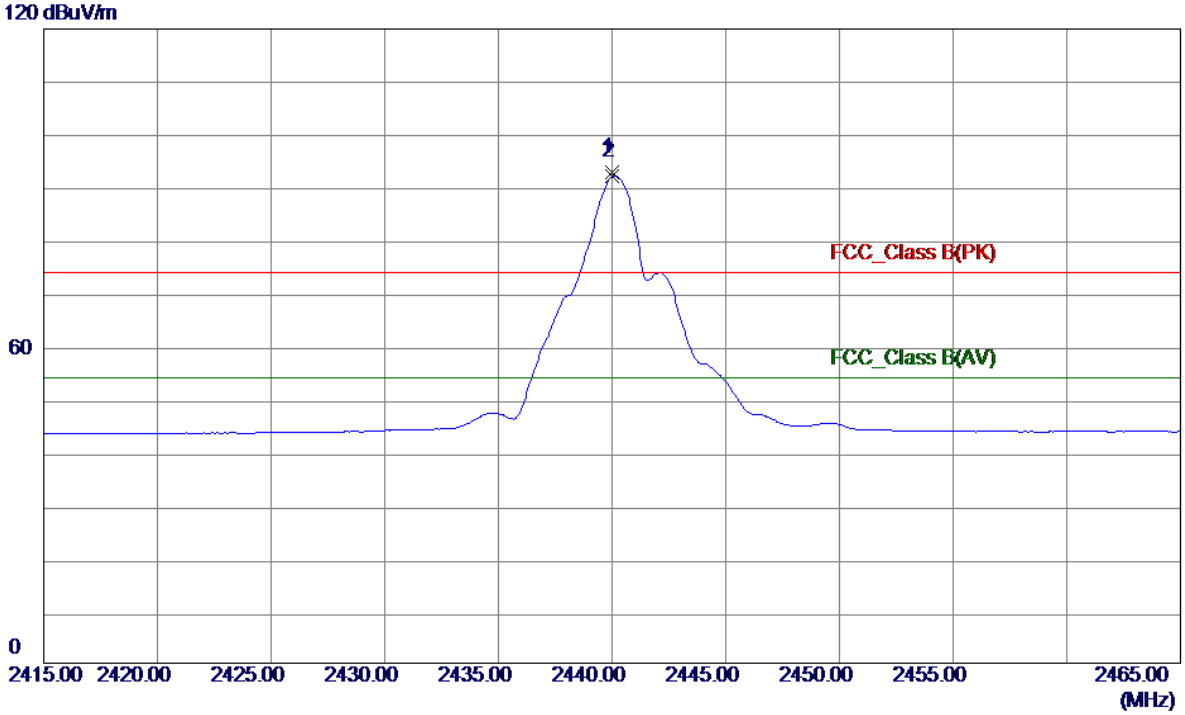

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2440.0000	61.65	31.15	92.80	74.00	18.80	Peak	No Limit
2 *	2440.0000	60.98	31.15	92.13	54.00	38.13	AVG	No Limit

Test Mode :	TX 2440MHz _CH19_1Mbps

Horizontal

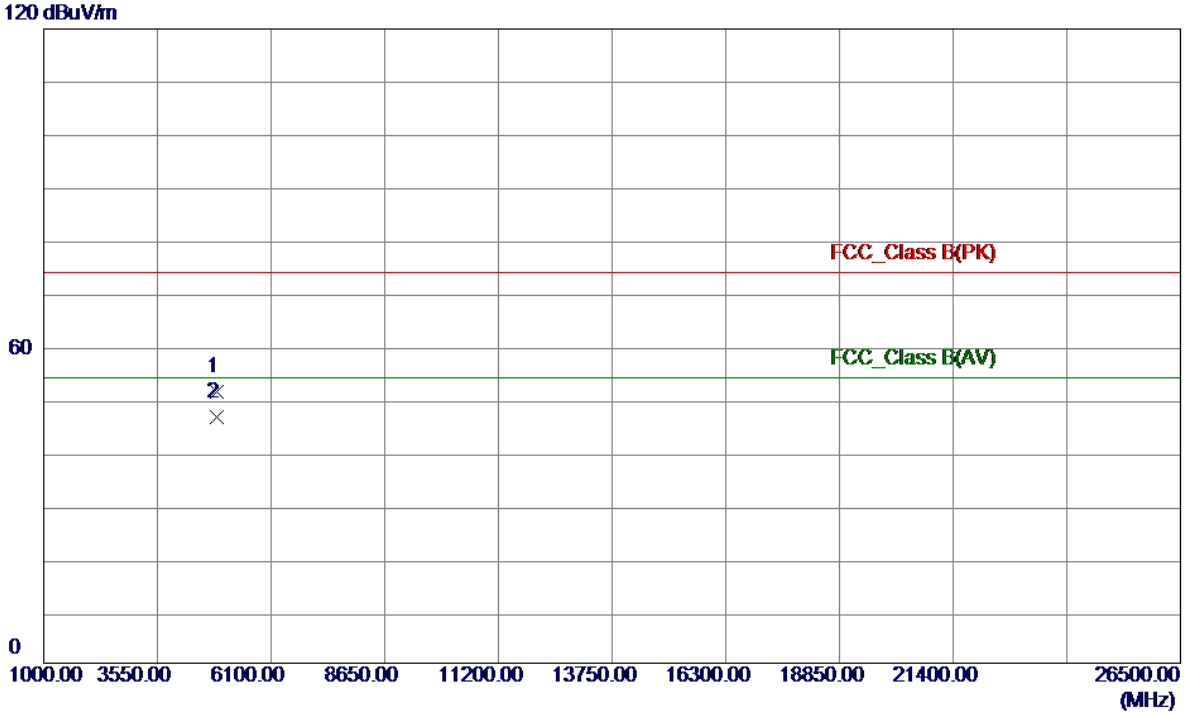

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4880.0000	62.67	-11.38	51.29	74.00	-22.71	Peak	
2 *	4880.0000	57.96	-11.38	46.58	54.00	-7.42	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps

Vertical

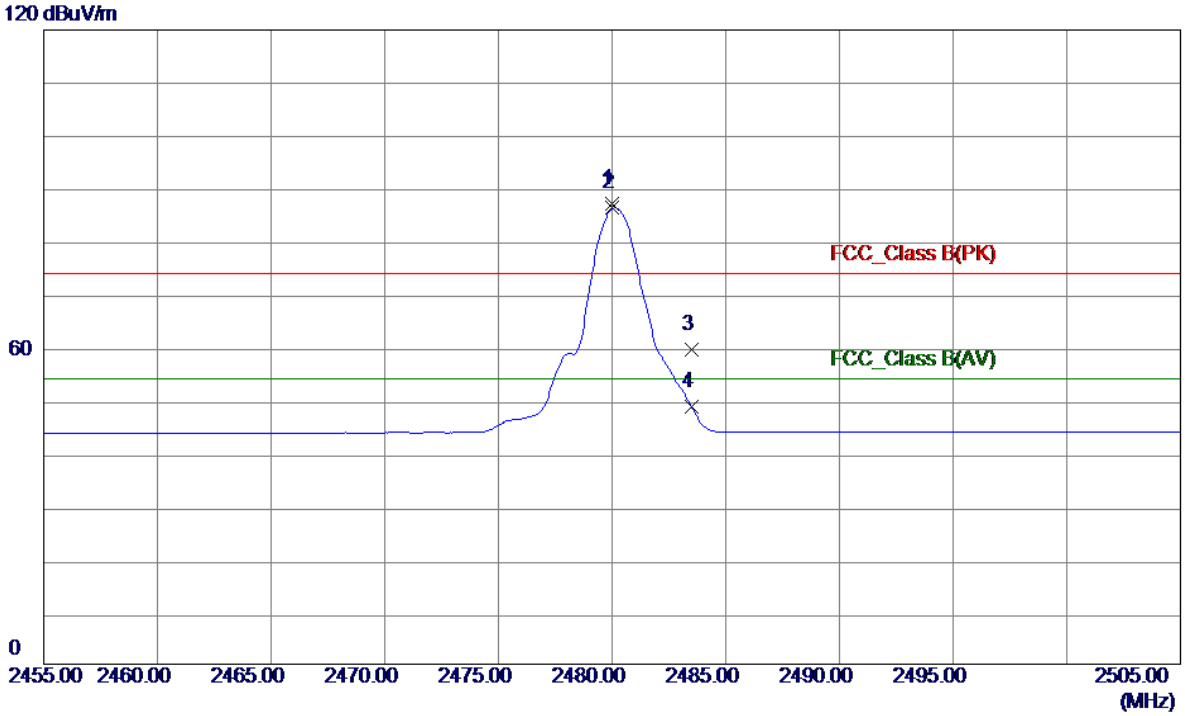

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2480.0000	55.80	31.30	87.10	74.00	13.10	Peak	No Limit
2 *	2480.0000	54.98	31.30	86.28	54.00	32.28	AVG	No Limit
3	2483.5000	28.28	31.31	59.59	74.00	-14.41	Peak	
4	2483.5000	17.47	31.31	48.78	54.00	-5.22	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps

Vertical

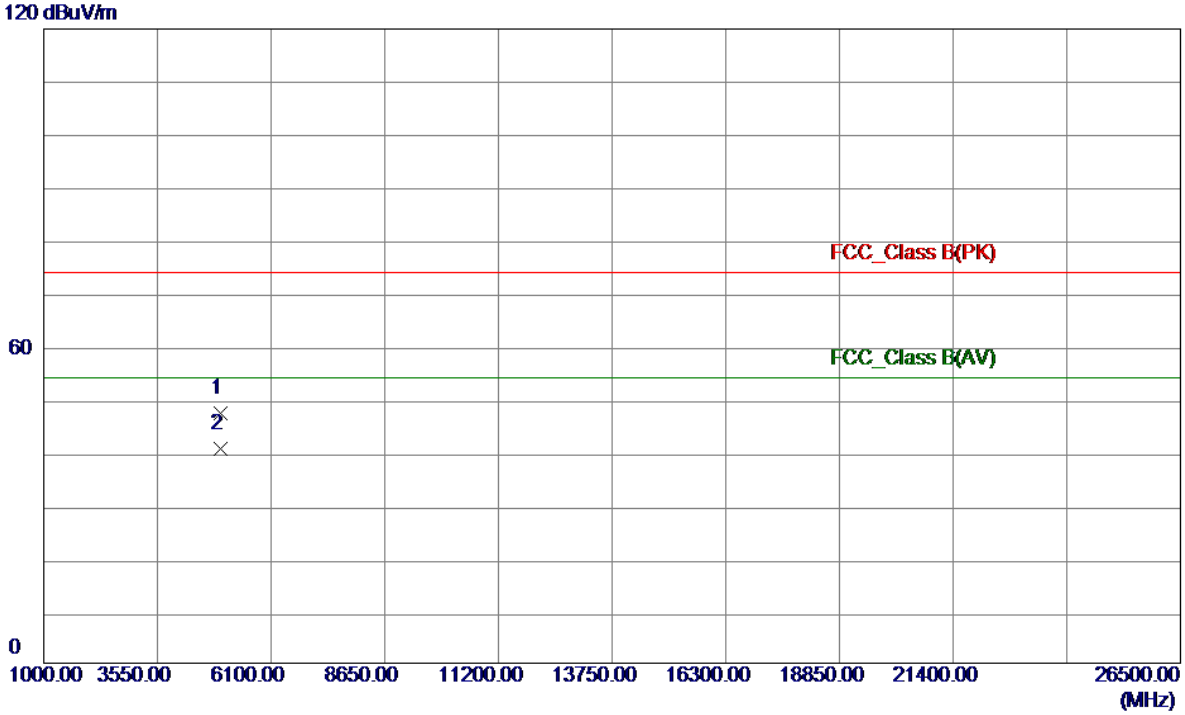

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4960.0000	58.54	-11.26	47.28	74.00	-26.72	Peak	
2 *	4960.0000	51.80	-11.26	40.54	54.00	-13.46	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps

Horizontal

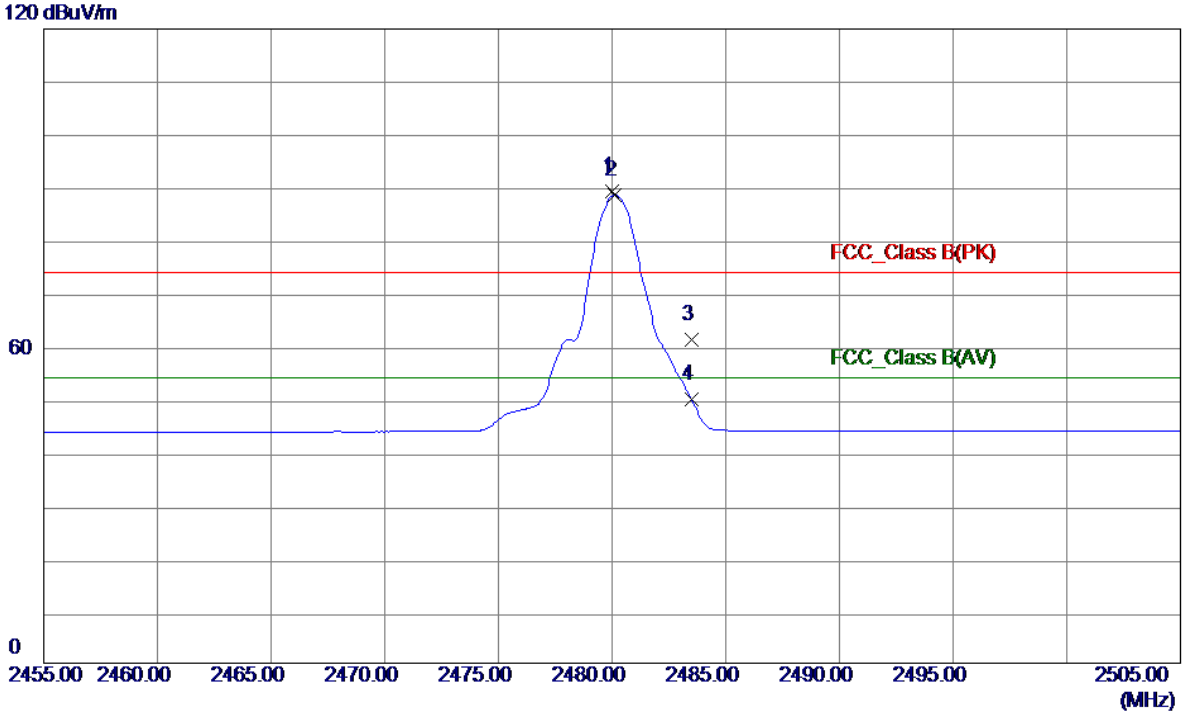

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2480.0000	58.08	31.30	89.38	74.00	15.38	Peak	No Limit
2 *	2480.1000	57.27	31.30	88.57	54.00	34.57	AVG	No Limit
3	2483.5000	29.90	31.31	61.21	74.00	-12.79	Peak	
4	2483.5000	18.64	31.31	49.95	54.00	-4.05	AVG	

Test Mode :	TX 2480MHz _CH39_1Mbps

Horizontal

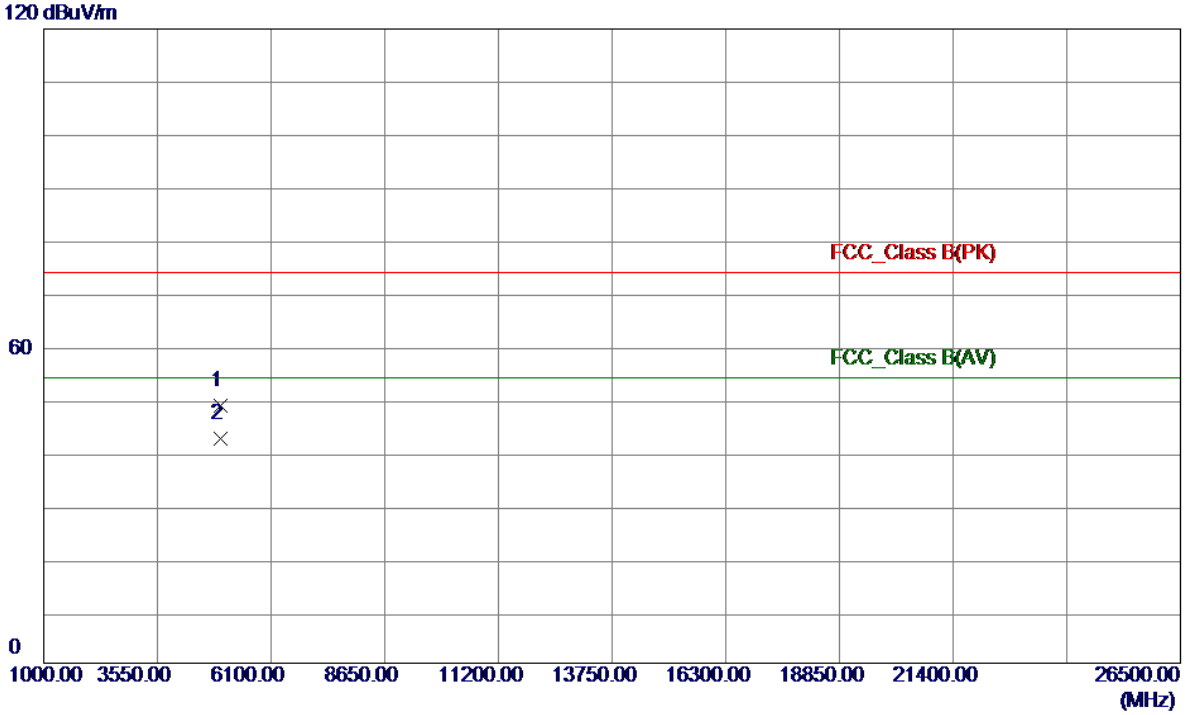

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4960.0000	59.92	-11.26	48.66	74.00	-25.34	Peak	
2 *	4960.0000	53.65	-11.26	42.39	54.00	-11.61	AVG	

ATTACHMENT E - BANDWIDTH

Test Mode:	TX Mode

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.689	1.080	500	Pass
2440	0.666	1.080	500	Pass
2480	0.680	1.069	500	Pass

TX CH00

TX CH19

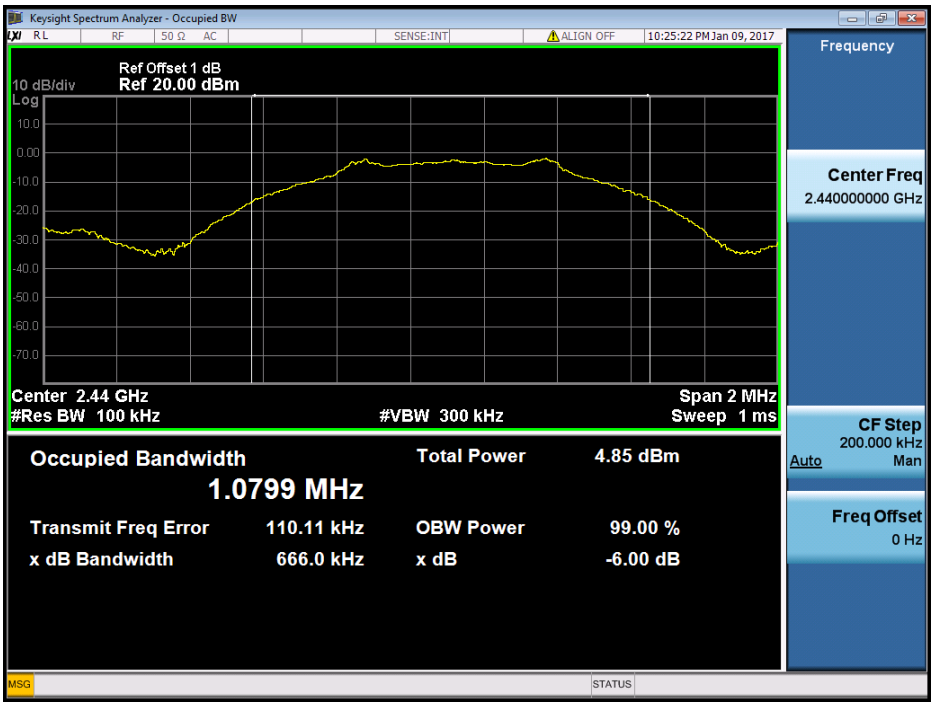

TX CH39

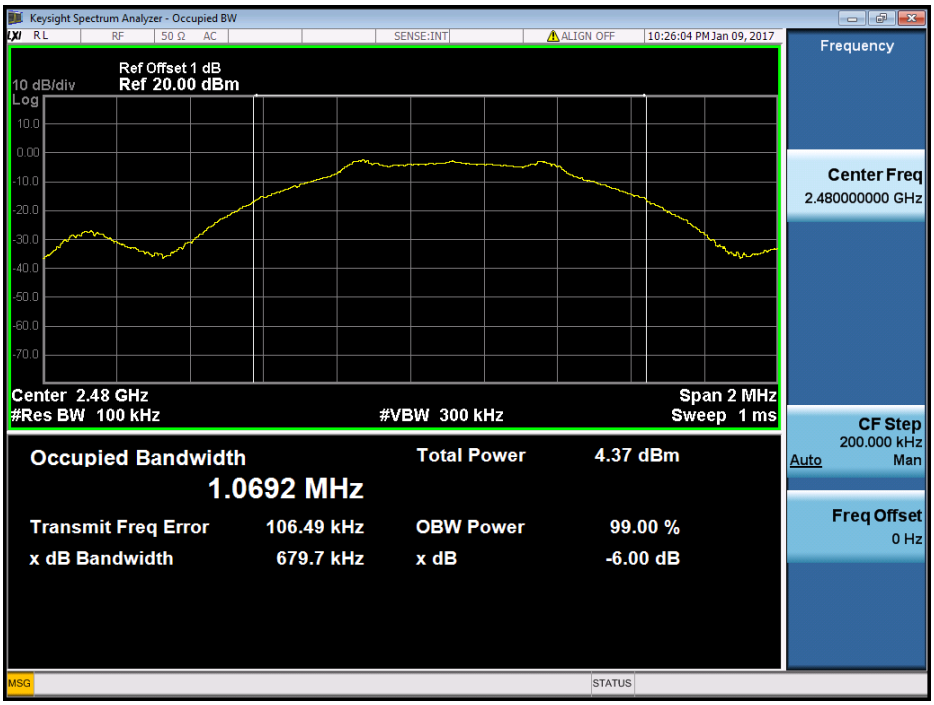

ATTACHMENT F - MAXIMUM OUTPUT POWER TEST

Test Mode :	CH00, CH19 , CH39 - 1Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	-0.12	0.0010	30.00	1.00	Pass
2440	-0.62	0.0009	30.00	1.00	Pass
2480	-0.54	0.0009	30.00	1.00	Pass

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode :	CH00, CH19 , CH39 - 1Mbps

CH00 (Lower) - 1Mbps

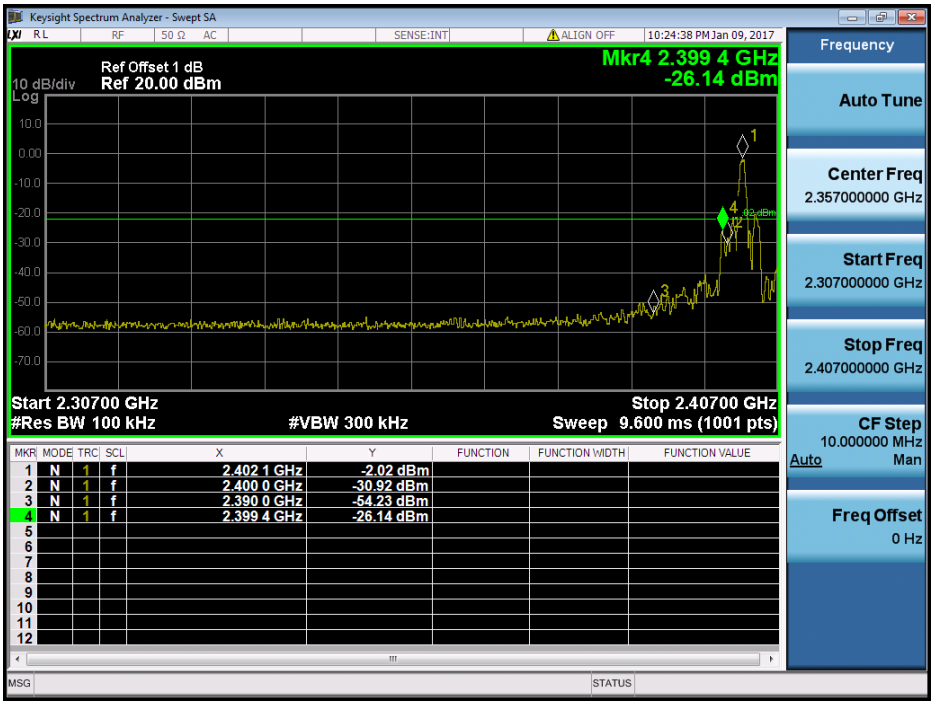

CH39 (upper) - 1Mbps

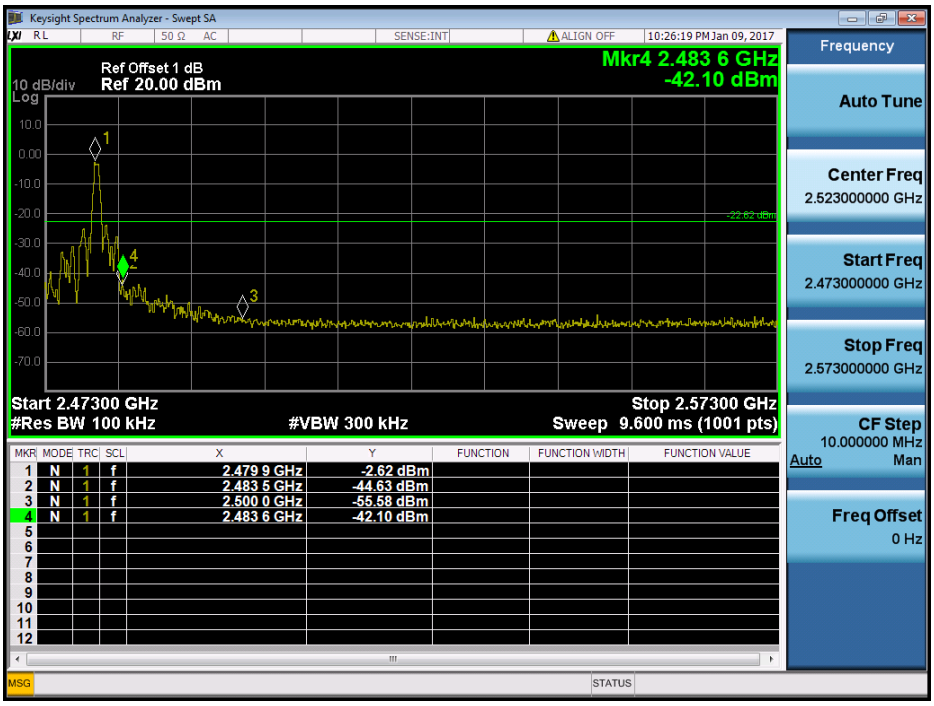

CH00 (10 Harmonic of the frequency) 1

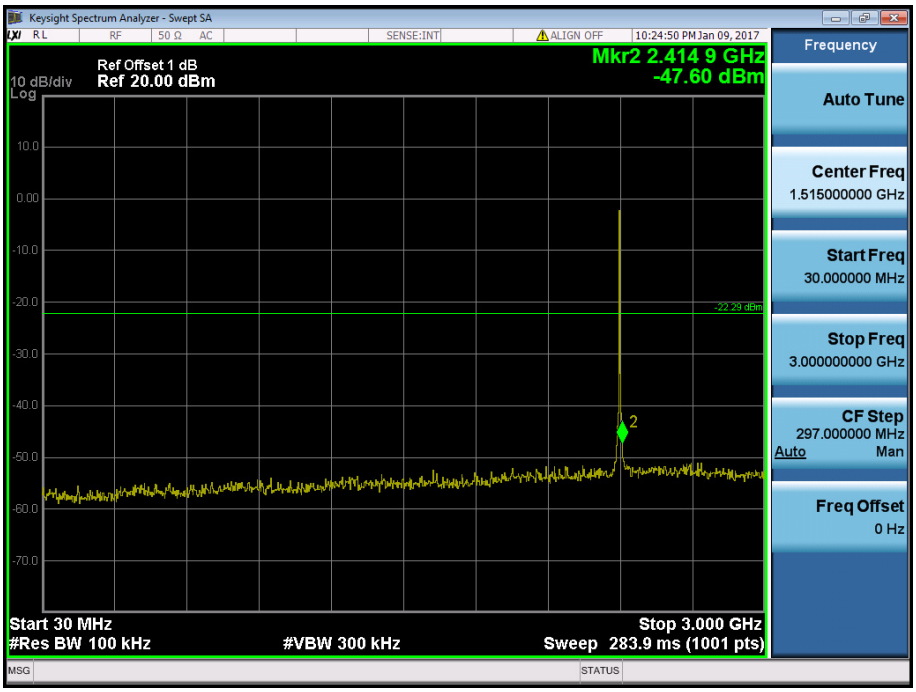

CH00 (10 Harmonic of the frequency) 2

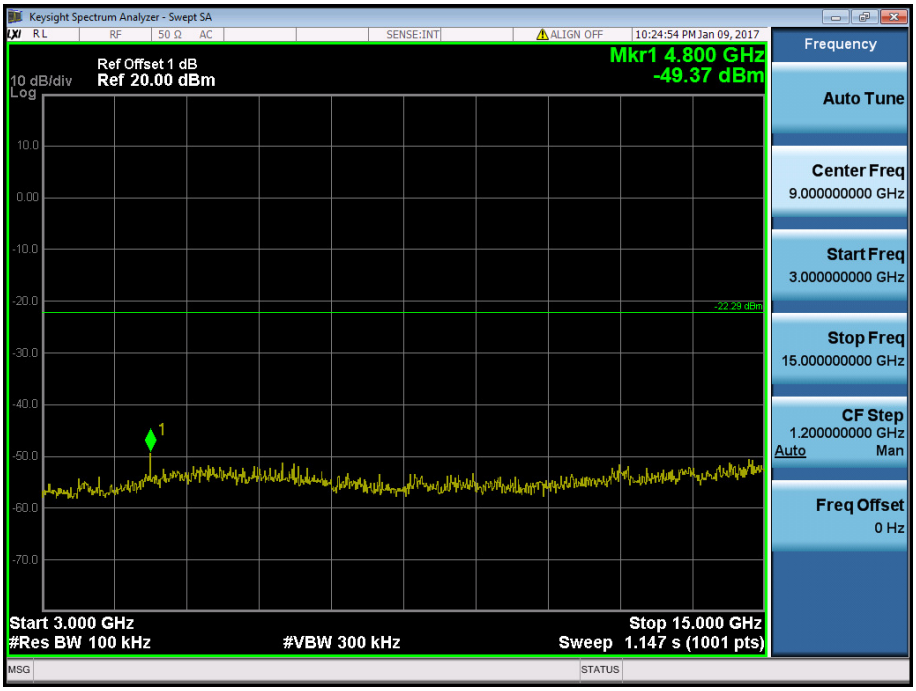

CH00 (10 Harmonic of the frequency) 3

CH19 (10 Harmonic of the frequency) 1

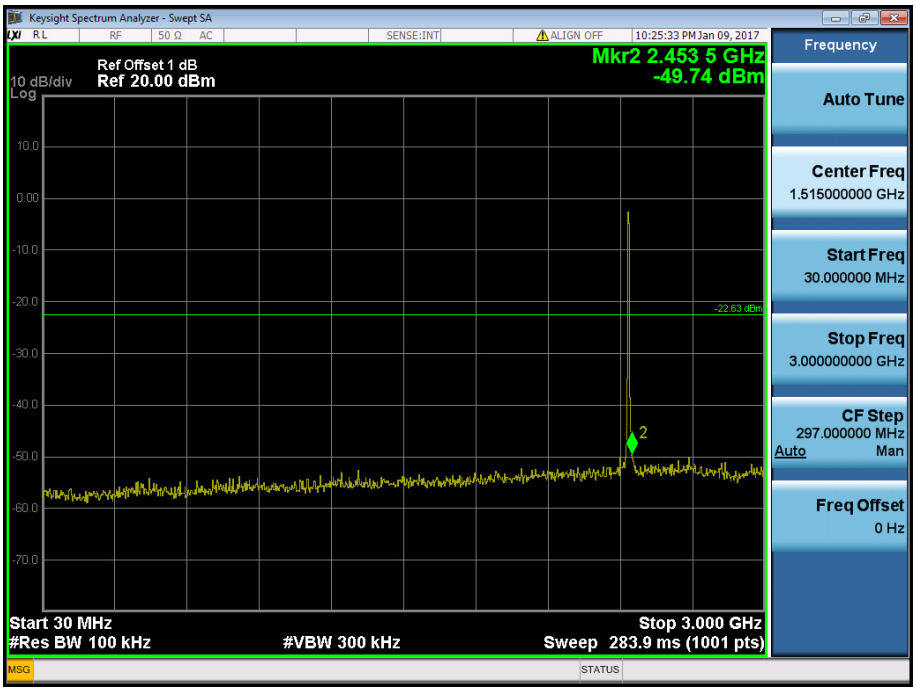

CH19 (10 Harmonic of the frequency) 2

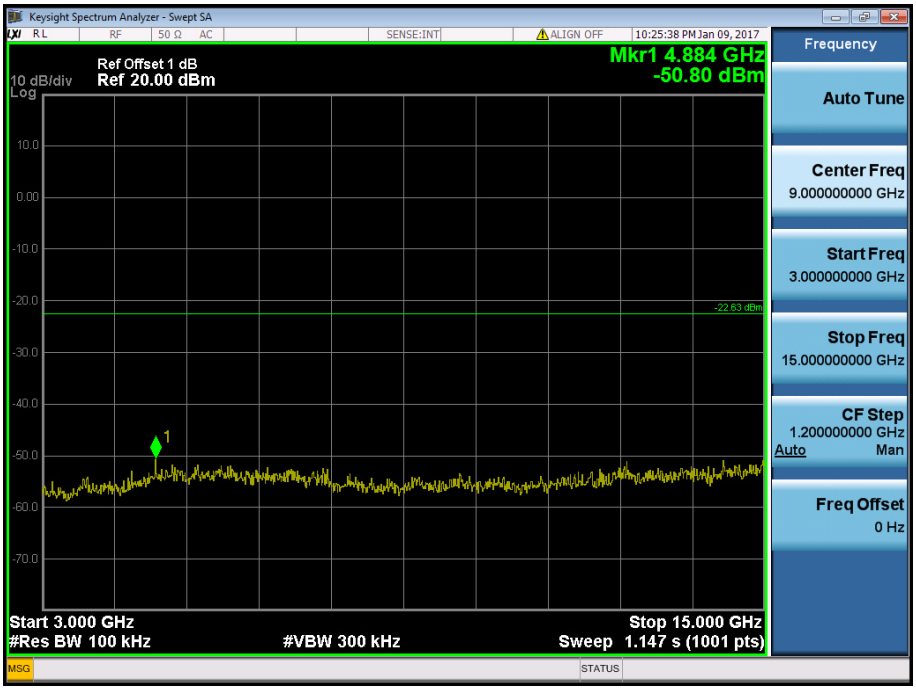

CH19 (10 Harmonic of the frequency) 3

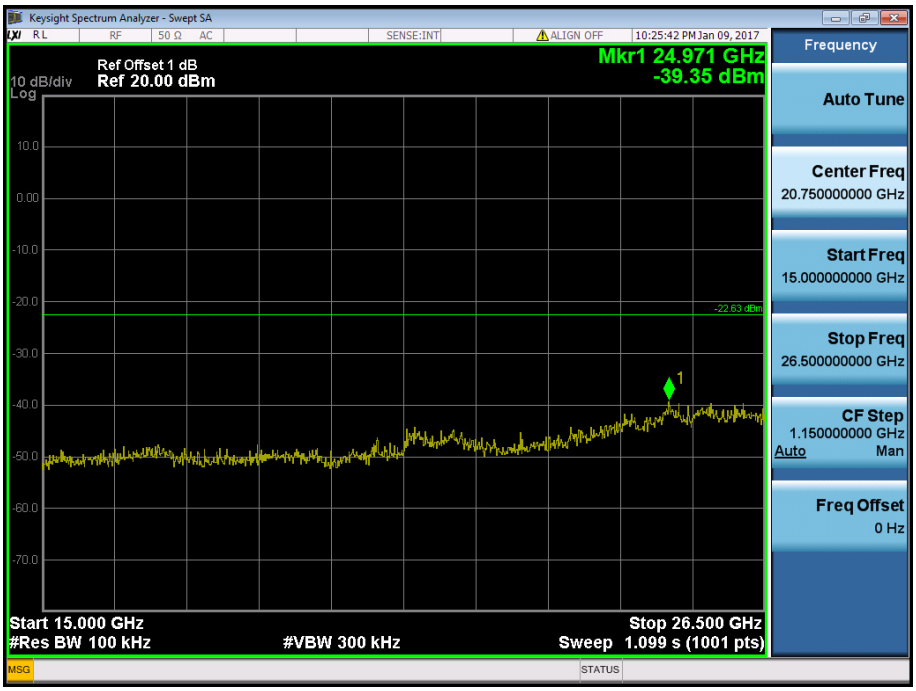

CH39 (10 Harmonic of the frequency) 1

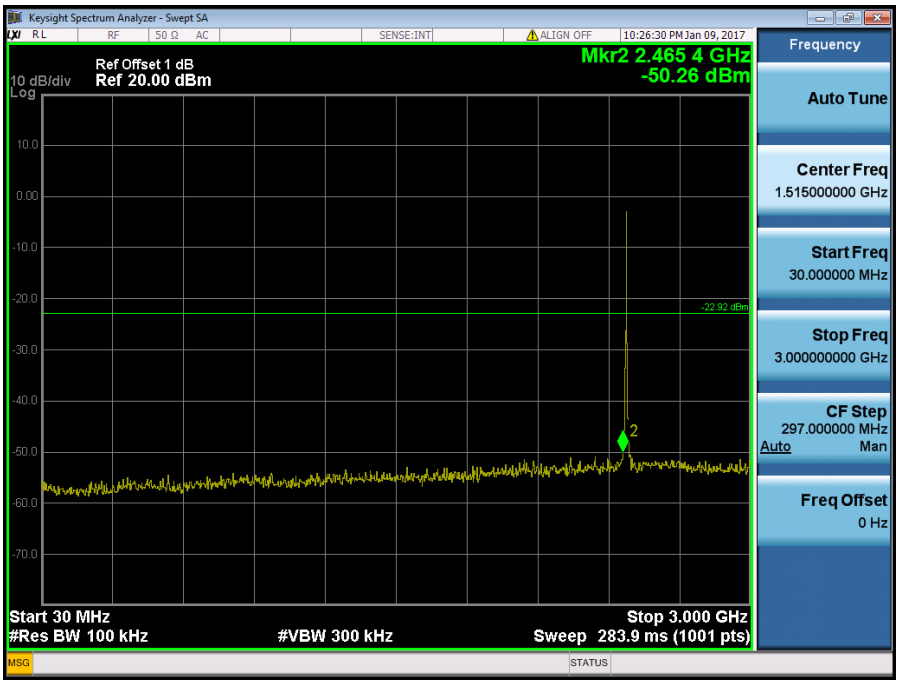

CH39 (10 Harmonic of the frequency) 2

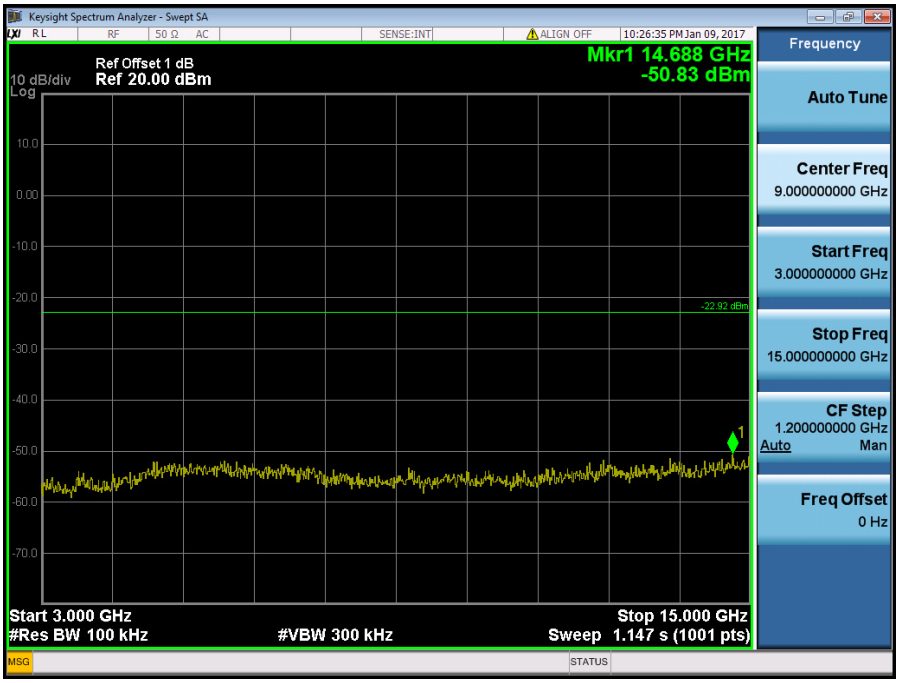

CH39 (10 Harmonic of the frequency) 3

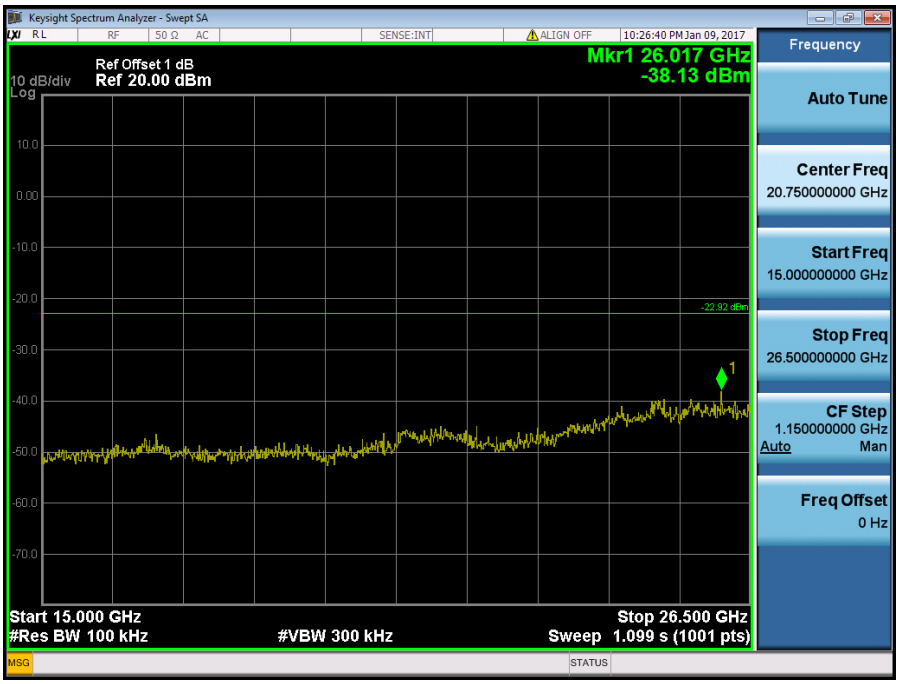

ATTACHMENT H - POWER SPECTRAL DENSITY TEST

Test Mode:	CH00, CH19 , CH39 - 1Mbps

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Test Result
2402	-14.280	0.037	8.00	Pass
2440	-13.880	0.041	8.00	Pass
2480	-14.670	0.034	8.00	Pass

TX CH00

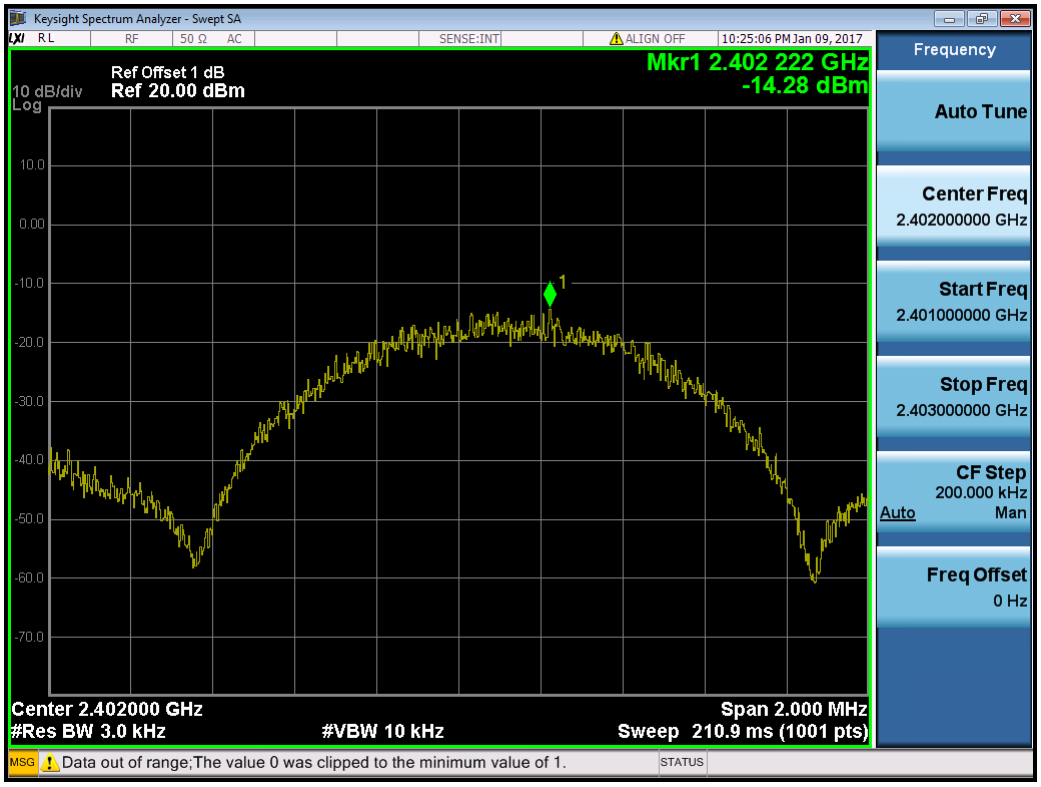

TX CH19

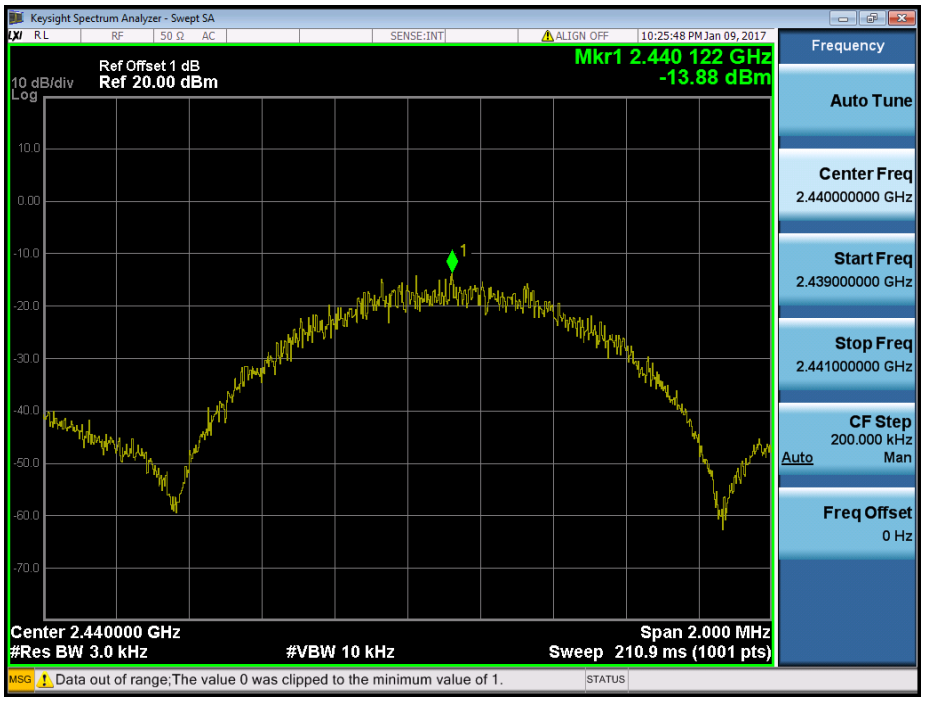
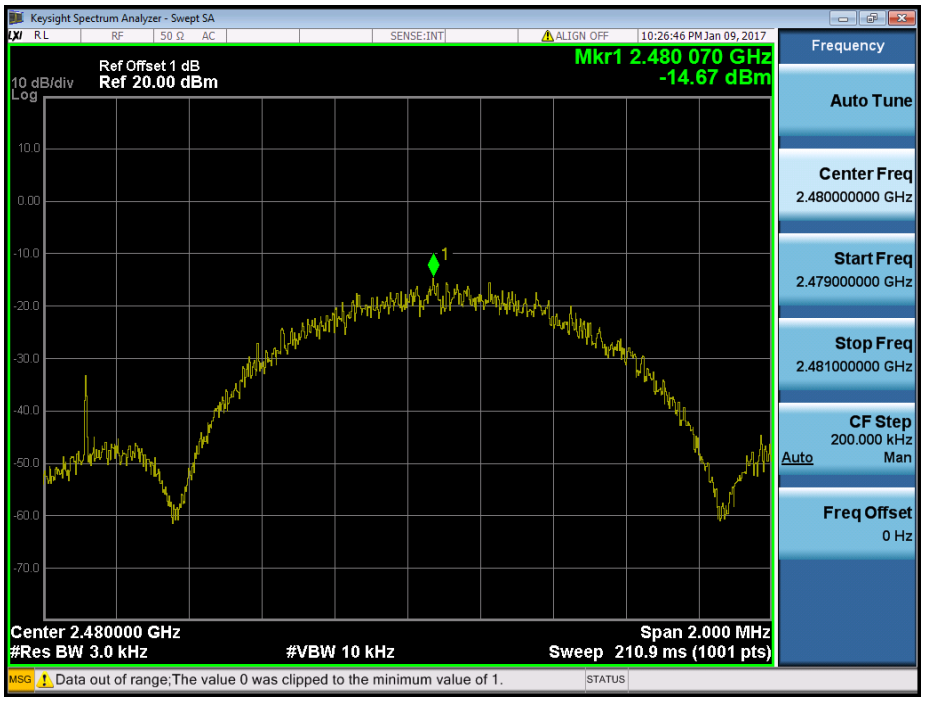
TX CH39