

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-02-27_17.32.01

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 21.3

Load: Full load

Hum.: 50%RH

Remark: DR-RSE01-E26010045-03#01

RÉmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

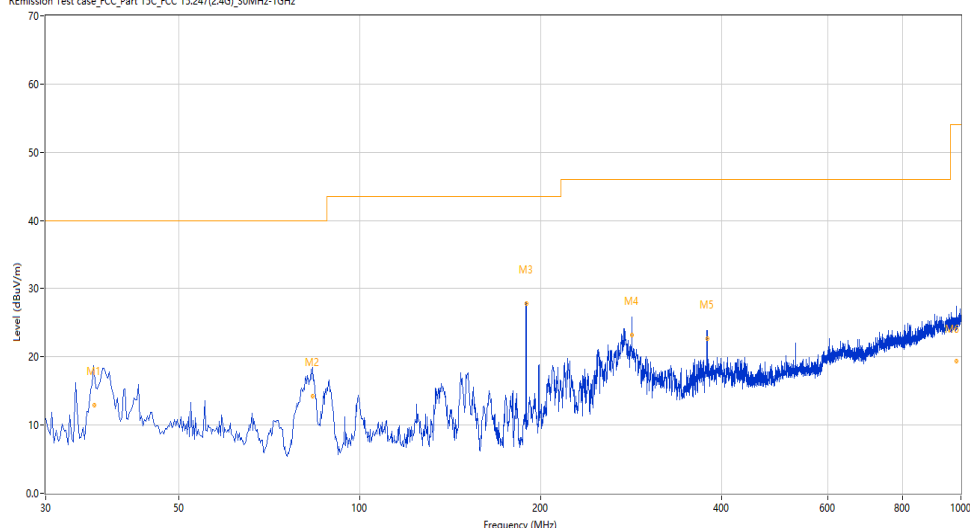

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	36.136	20.63	-26.35	40.0	19.37	Peak	1.00	277	Horizontal	Pass
1*	36.136	12.92	-26.35	40.0	27.08	QP	1.00	277	Horizontal	Pass
2	83.400	19.53	-29.55	40.0	20.47	Peak	54.40	182	Horizontal	Pass
2*	83.400	14.24	-29.55	40.0	25.76	QP	54.40	182	Horizontal	Pass
3	189.047	28.61	-25.73	43.5	14.89	Peak	86.60	103	Horizontal	Pass
3*	189.047	27.81	-25.73	43.5	15.69	QP	86.60	103	Horizontal	Pass
4	283.540	26.87	-22.35	46.0	19.13	Peak	175.50	101	Horizontal	Pass
4*	283.540	23.15	-22.35	46.0	22.85	QP	175.50	101	Horizontal	Pass
5	378.124	26.01	-19.91	46.0	19.99	Peak	85.10	287	Horizontal	Pass
5*	378.124	22.64	-19.91	46.0	23.36	QP	85.10	287	Horizontal	Pass
6	981.567	26.14	-7.10	54.0	27.86	Peak	360.00	141	Horizontal	Pass
6*	981.567	19.33	-7.10	54.0	34.67	QP	360.00	141	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-02-27_17.55.51

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 21.3

Hum.: 50%RH

Test Engineer: XCJ


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

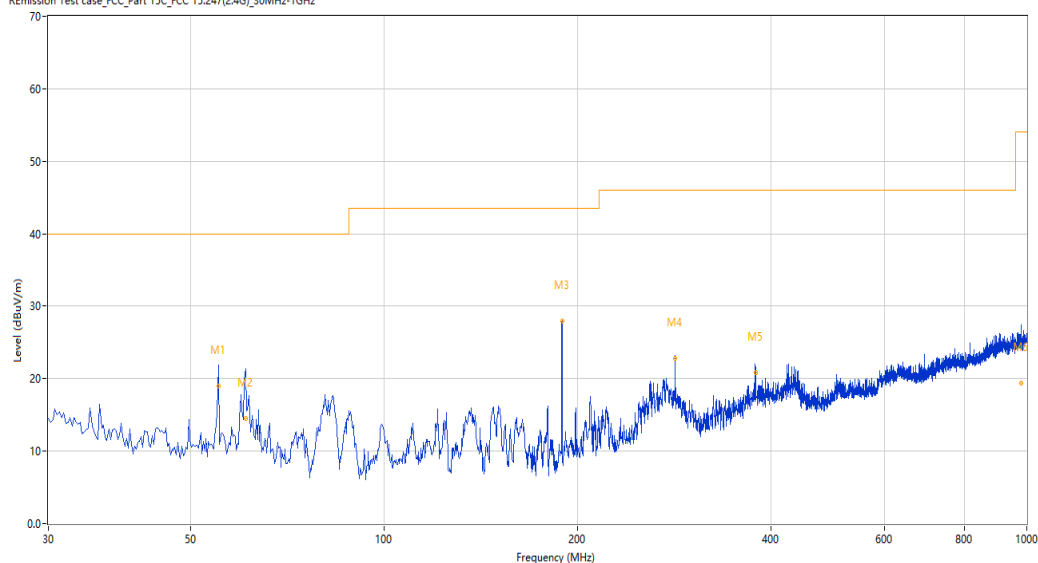

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.296	22.45	-24.11	40.0	17.55	Peak	360.00	140	Vertical	Pass
1*	55.296	18.98	-24.11	40.0	21.02	QP	360.00	140	Vertical	Pass
2	60.821	18.76	-25.13	40.0	21.24	Peak	360.00	155	Vertical	Pass
2*	60.821	14.53	-25.13	40.0	25.47	QP	360.00	155	Vertical	Pass
3	189.068	28.99	-25.73	43.5	14.51	Peak	238.10	100	Vertical	Pass
3*	189.068	28.00	-25.73	43.5	15.50	QP	238.10	100	Vertical	Pass
4	283.596	25.83	-22.35	46.0	20.17	Peak	201.50	208	Vertical	Pass
4*	283.596	22.77	-22.35	46.0	23.23	QP	201.50	208	Vertical	Pass
5	378.129	24.30	-19.92	46.0	21.70	Peak	150.70	278	Vertical	Pass
5*	378.129	20.82	-19.92	46.0	25.18	QP	150.70	278	Vertical	Pass
6	979.046	26.29	-7.07	54.0	27.71	Peak	360.00	109	Vertical	Pass
6*	979.046	19.42	-7.07	54.0	34.58	QP	360.00	109	Vertical	Pass

1-18G

Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-09_18.00.56

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 39.1%

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

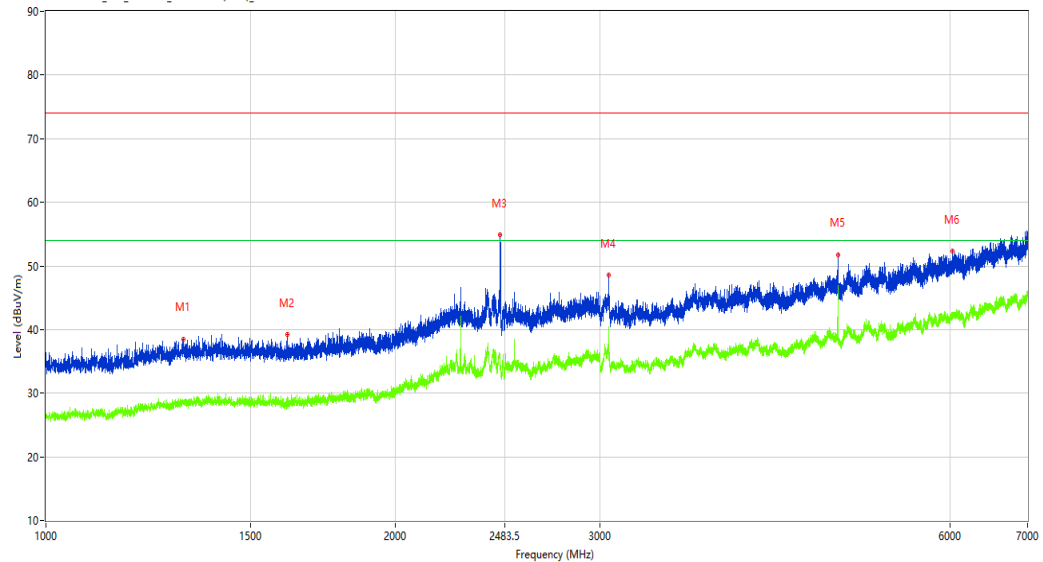

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1313.500	38.54	-13.57	74.0	35.46	Peak	284.80	100	Horizontal	Pass
1**	1313.500	28.33	-13.57	54.0	25.67	AV	284.80	100	Horizontal	Pass
2	1612.750	39.25	-13.84	74.0	34.75	Peak	221.10	100	Horizontal	Pass
2**	1612.750	28.31	-13.84	54.0	25.69	AV	221.10	100	Horizontal	Pass
3	2461.500	54.88	-6.61	74.0	19.12	Peak	92.00	100	Horizontal	Pass
3**	2461.500	33.69	-6.61	54.0	20.31	AV	92.00	100	Horizontal	Pass
4	3050.000	48.51	-4.72	74.0	25.49	Peak	254.40	100	Horizontal	Pass
4**	3050.000	40.36	-4.72	54.0	13.64	AV	254.40	100	Horizontal	Pass
5	4806.500	51.78	-1.62	74.0	22.22	Peak	0.00	100	Horizontal	Pass
5**	4806.500	46.41	-1.62	54.0	7.59	AV	0.00	100	Horizontal	Pass
6	6027.500	52.34	1.77	74.0	21.66	Peak	40.10	100	Horizontal	Pass
6**	6027.500	42.35	1.77	54.0	11.65	AV	40.10	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_17.08.51

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

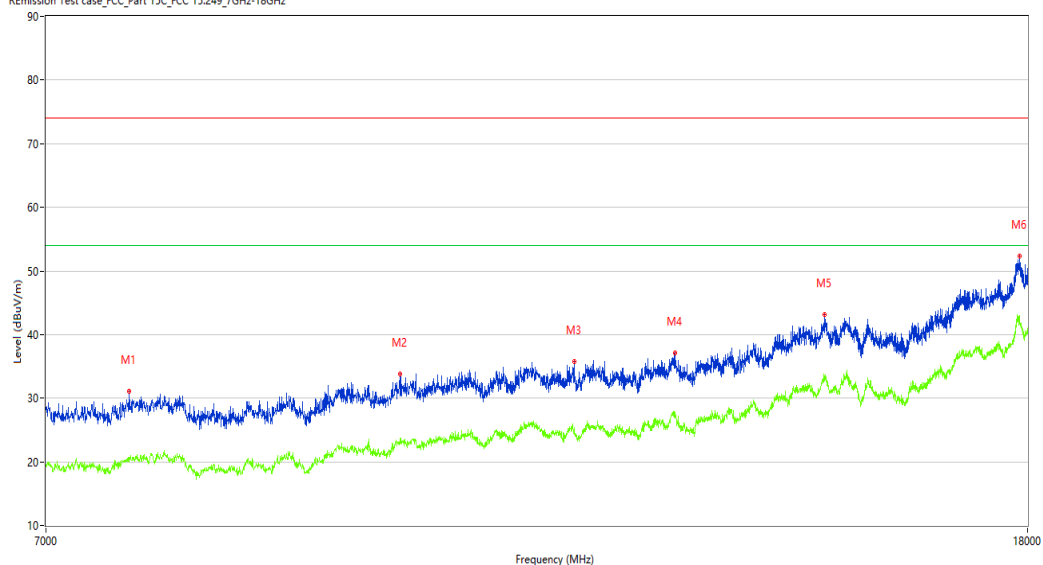

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7585.750	31.04	0.01	74.0	42.96	Peak	284.00	100	Horizontal	Pass
1**	7585.750	20.70	0.01	54.0	33.30	AV	284.00	100	Horizontal	Pass
2	9838.000	33.82	2.83	74.0	40.18	Peak	284.00	100	Horizontal	Pass
2**	9838.000	23.71	2.83	54.0	30.29	AV	284.00	100	Horizontal	Pass
3	11633.750	35.72	4.27	74.0	38.28	Peak	284.00	100	Horizontal	Pass
3**	11633.750	24.83	4.27	54.0	29.17	AV	284.00	100	Horizontal	Pass
4	12824.500	37.15	5.44	74.0	36.85	Peak	164.60	100	Horizontal	Pass
4**	12824.500	27.20	5.44	54.0	26.80	AV	164.60	100	Horizontal	Pass
5	14804.500	43.14	11.83	74.0	30.86	Peak	284.00	100	Horizontal	Pass
5**	14804.500	33.47	11.83	54.0	20.53	AV	284.00	100	Horizontal	Pass
6	17859.750	52.27	18.55	74.0	21.73	Peak	284.00	100	Horizontal	Pass
6**	17859.750	42.32	18.55	54.0	11.68	AV	284.00	100	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-09_18.04.26

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.6

Hum.: 39.1%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

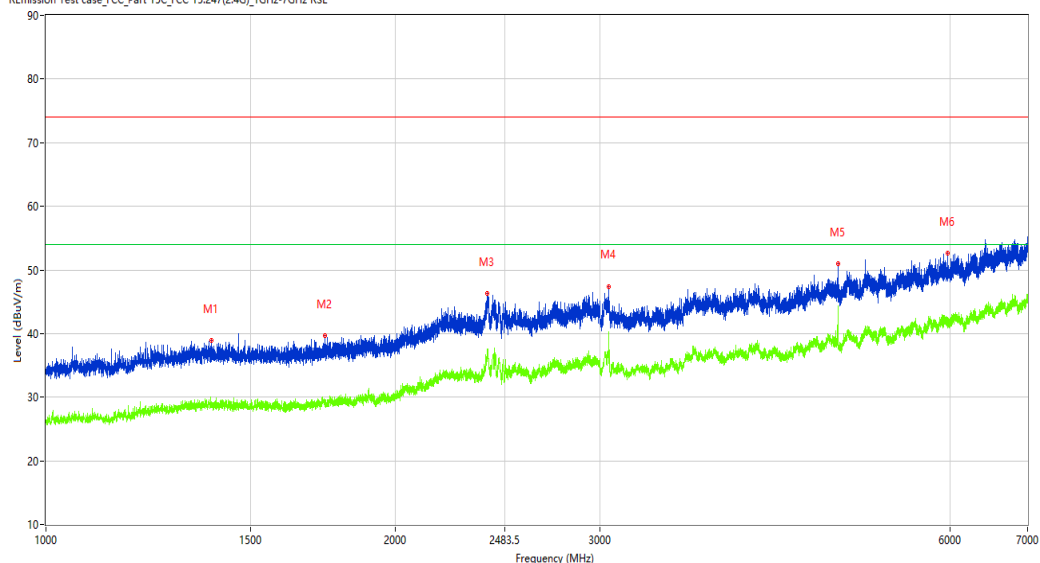

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1387.250	38.96	-13.43	74.0	35.04	Peak	86.00	100	Vertical	Pass
1**	1387.250	29.10	-13.43	54.0	24.90	AV	86.00	100	Vertical	Pass
2	1739.250	39.68	-13.13	74.0	34.32	Peak	322.30	100	Vertical	Pass
2**	1739.250	28.50	-13.13	54.0	25.50	AV	322.30	100	Vertical	Pass
3	2399.750	46.26	-4.78	74.0	27.74	Peak	0.00	100	Vertical	Pass
3**	2399.750	37.50	-4.78	54.0	16.50	AV	0.00	100	Vertical	Pass
4	3050.000	47.42	-4.72	74.0	26.58	Peak	178.50	100	Vertical	Pass
4**	3050.000	40.24	-4.72	54.0	13.76	AV	178.50	100	Vertical	Pass
5	4805.000	50.95	-1.61	74.0	23.05	Peak	143.60	100	Vertical	Pass
5**	4805.000	42.93	-1.61	54.0	11.07	AV	143.60	100	Vertical	Pass
6	5973.500	52.64	1.23	74.0	21.36	Peak	280.50	100	Vertical	Pass
6**	5973.500	41.63	1.23	54.0	12.37	AV	280.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_16.59.54

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26010045-03#01

R Emission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

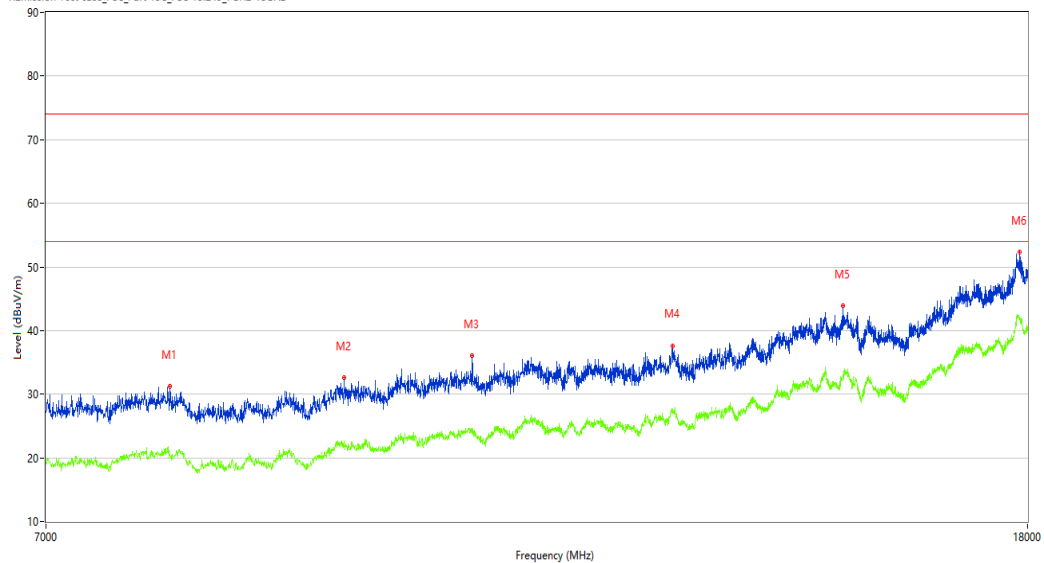

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7885.500	31.21	0.26	74.0	42.79	Peak	3.20		Vertical	Pass
1**	7885.500	20.55	0.26	54.0	33.45	AV	3.20	100	Vertical	Pass
2	9329.250	32.60	1.69	74.0	41.40	Peak	15.20	100	Vertical	Pass
2**	9329.250	22.69	1.69	54.0	31.31	AV	15.20	100	Vertical	Pass
3	10550.250	36.10	3.95	74.0	37.90	Peak	187.20	100	Vertical	Pass
3**	10550.250	24.48	3.95	54.0	29.52	AV	187.20	100	Vertical	Pass
4	12791.500	37.60	5.80	74.0	36.40	Peak	248.20	100	Vertical	Pass
4**	12791.500	27.31	5.80	54.0	26.69	AV	248.20	100	Vertical	Pass
5	15065.750	43.86	10.40	74.0	30.14	Peak	72.50	100	Vertical	Pass
5**	15065.750	32.90	10.40	54.0	21.10	AV	72.50	100	Vertical	Pass
6	17862.500	52.27	18.46	74.0	21.73	Peak	310.70	100	Vertical	Pass
6**	17862.500	41.92	18.46	54.0	12.08	AV	310.70	100	Vertical	Pass

18-25G

Low channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-03-20_09.50.07

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 21.3

Load: Full load

Hum.: 50%RH

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

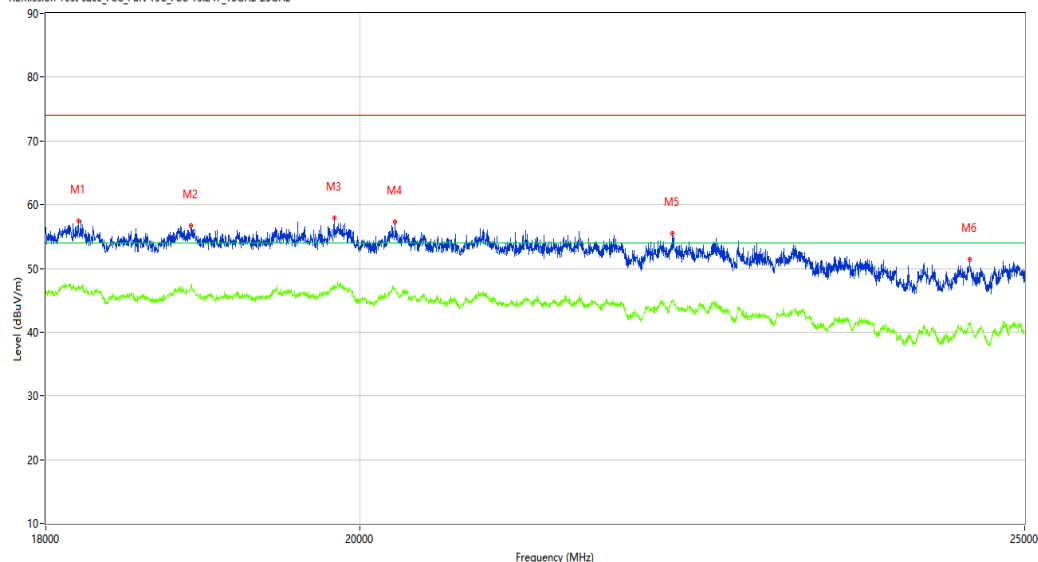

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18197.750	57.49	18.36	74.0	16.51	Peak	20.16	100	Horizontal	Pass
1**	18197.750	46.69	18.36	54.0	7.31	AV	20.16	100	Horizontal	Pass
2	18899.499	56.73	17.79	74.0	17.27	Peak	25.20	100	Horizontal	Pass
2**	18899.499	47.22	17.79	54.0	6.78	AV	25.20	100	Horizontal	Pass
3	19830.499	57.87	17.49	74.0	16.13	Peak	31.68	100	Horizontal	Pass
3**	19830.499	46.79	17.49	54.0	7.21	AV	31.68	100	Horizontal	Pass
4	20239.999	57.33	17.21	74.0	16.67	Peak	25.20	100	Horizontal	Pass
4**	20239.999	46.74	17.21	54.0	7.26	AV	25.20	100	Horizontal	Pass
5	22214.001	55.48	15.87	74.0	18.52	Peak	17.64	100	Horizontal	Pass
5**	22214.001	45.11	15.87	54.0	8.89	AV	17.64	100	Horizontal	Pass
6	24543.250	51.41	11.44	74.0	22.59	Peak	29.52	100	Horizontal	Pass
6**	24543.250	41.19	11.44	54.0	12.81	AV	29.52	100	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-03-20_09.43.13

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 21.3

Load: Full load

Hum.: 50%RH

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

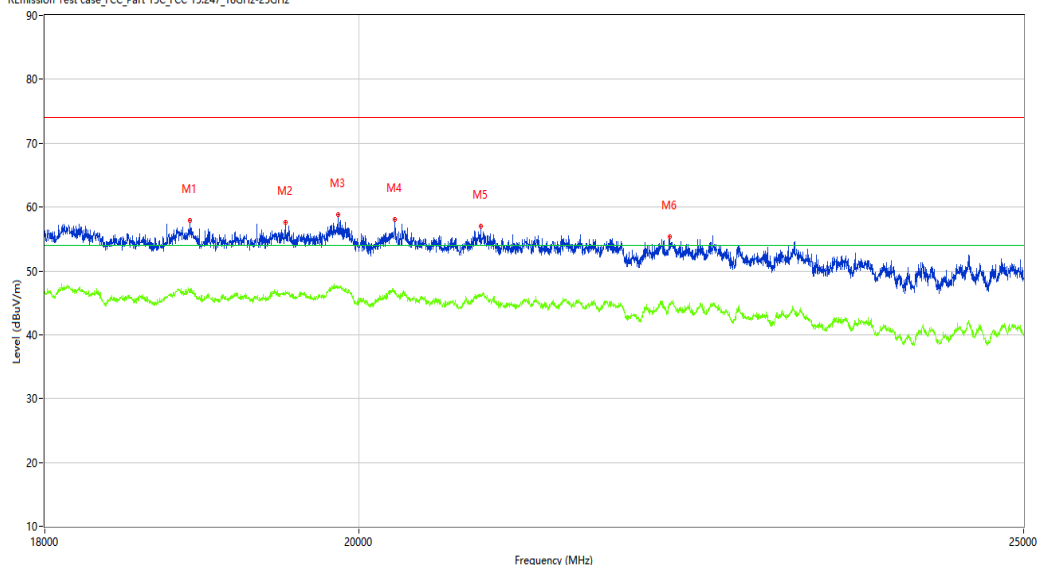

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18899.499	57.89	17.79	74.0	16.11	Peak	1.44	100	Vertical	Pass
1**	18899.499	47.08	17.79	54.0	6.92	AV	1.44	100	Vertical	Pass
2	19513.750	57.67	17.83	74.0	16.33	Peak	12.60	100	Vertical	Pass
2**	19513.750	46.90	17.83	54.0	7.10	AV	12.60	100	Vertical	Pass
3	19860.251	58.75	17.49	74.0	15.25	Peak	34.20	100	Vertical	Pass
3**	19860.251	47.57	17.49	54.0	6.43	AV	34.20	100	Vertical	Pass
4	20245.250	58.10	17.21	74.0	15.90	Peak	45.36	100	Vertical	Pass
4**	20245.250	46.86	17.21	54.0	7.14	AV	45.36	100	Vertical	Pass
5	20836.749	57.01	16.57	74.0	16.99	Peak	57.60	100	Vertical	Pass
5**	20836.749	46.12	16.57	54.0	7.88	AV	57.60	100	Vertical	Pass
6	22200.001	55.30	15.88	74.0	18.70	Peak	56.52	100	Vertical	Pass
6**	22200.001	45.00	15.88	54.0	9.00	AV	56.52	100	Vertical	Pass

Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-10_19.30.26

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.6

Hum.: 39.1%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

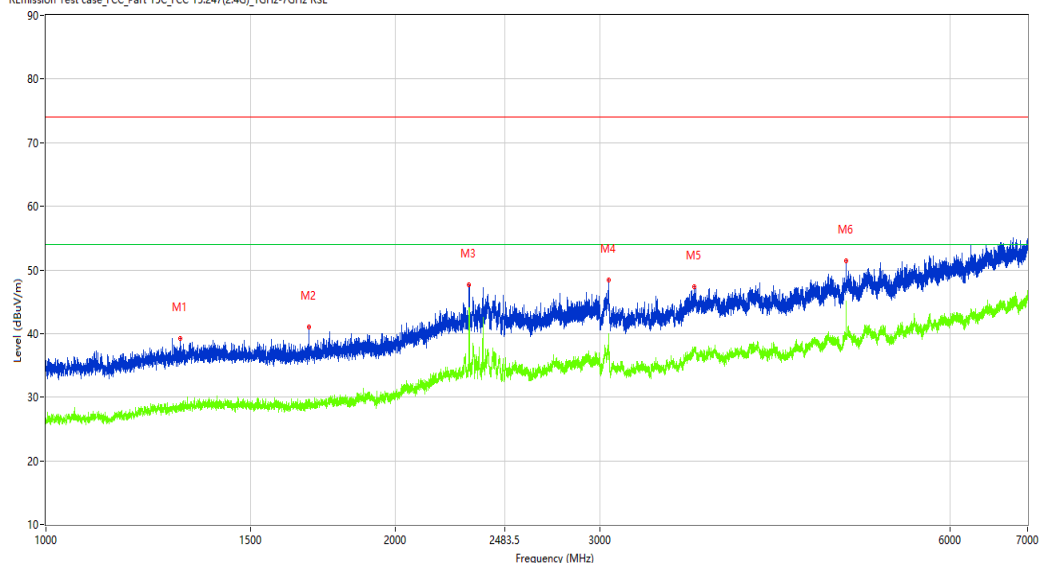

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1305.000	39.17	-13.78	74.0	34.83	Peak	318.60	100	Horizontal	Pass
1**	1305.000	29.15	-13.78	54.0	24.85	AV	318.60	100	Horizontal	Pass
2	1684.500	41.02	-13.65	74.0	32.98	Peak	185.00	100	Horizontal	Pass
2**	1684.500	29.81	-13.65	54.0	24.19	AV	185.00	100	Horizontal	Pass
3	2314.000	47.68	-8.31	74.0	26.32	Peak	3.20	100	Horizontal	Pass
3**	2314.000	44.02	-8.31	54.0	9.98	AV	3.20	100	Horizontal	Pass
4	3052.000	48.36	-6.02	74.0	25.64	Peak	177.10	100	Horizontal	Pass
4**	3052.000	37.70	-6.02	54.0	16.30	AV	177.10	100	Horizontal	Pass
5	3617.000	47.40	-2.50	74.0	26.60	Peak	77.30	100	Horizontal	Pass
5**	3617.000	37.40	-2.50	54.0	16.60	AV	77.30	100	Horizontal	Pass
6	4885.000	51.38	-0.48	74.0	22.62	Peak	0.00	100	Horizontal	Pass
6**	4885.000	43.83	-0.48	54.0	10.17	AV	0.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_17.11.42

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

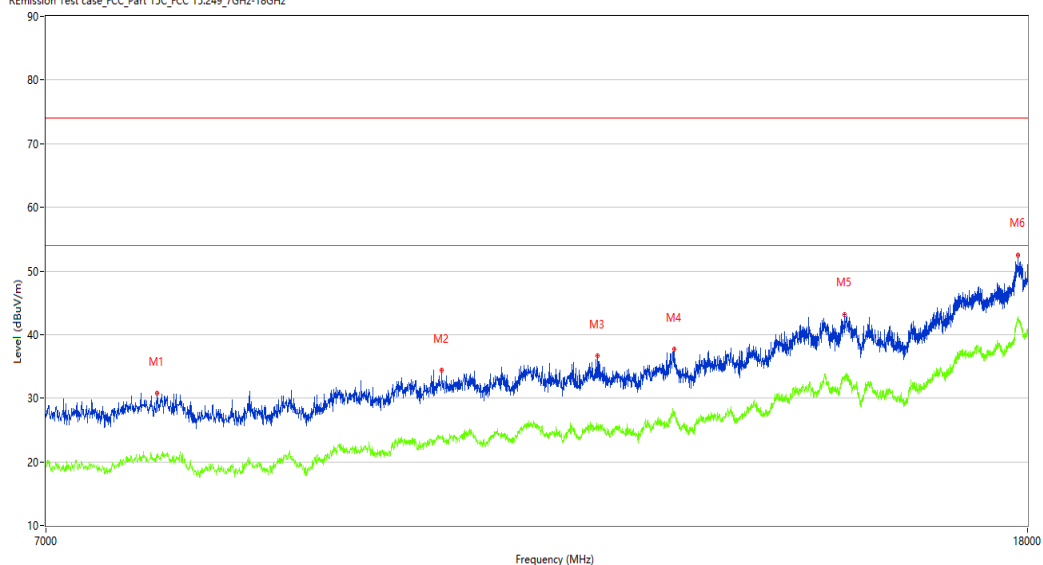

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7792.000	30.76	0.63	74.0	43.24	Peak	310.80	100	Horizontal	Pass
1**	7792.000	21.11	0.63	54.0	32.89	AV	310.80	100	Horizontal	Pass
2	10242.250	34.43	3.11	74.0	39.57	Peak	191.00	100	Horizontal	Pass
2**	10242.250	23.64	3.11	54.0	30.36	AV	191.00	100	Horizontal	Pass
3	11903.250	36.60	4.51	74.0	37.40	Peak	5.70	100	Horizontal	Pass
3**	11903.250	25.30	4.51	54.0	28.70	AV	5.70	100	Horizontal	Pass
4	12807.999	37.67	5.69	74.0	36.33	Peak	310.80	100	Horizontal	Pass
4**	12807.999	27.96	5.69	54.0	26.04	AV	310.80	100	Horizontal	Pass
5	15090.500	43.19	10.42	74.0	30.81	Peak	122.10	100	Horizontal	Pass
5**	15090.500	33.33	10.42	54.0	20.67	AV	122.10	100	Horizontal	Pass
6	17840.501	52.55	18.45	74.0	21.45	Peak	5.70	100	Horizontal	Pass
6**	17840.501	42.39	18.45	54.0	11.61	AV	5.70	100	Horizontal	Pass

Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-10_19.08.44

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.6

Hum.: 39.1%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

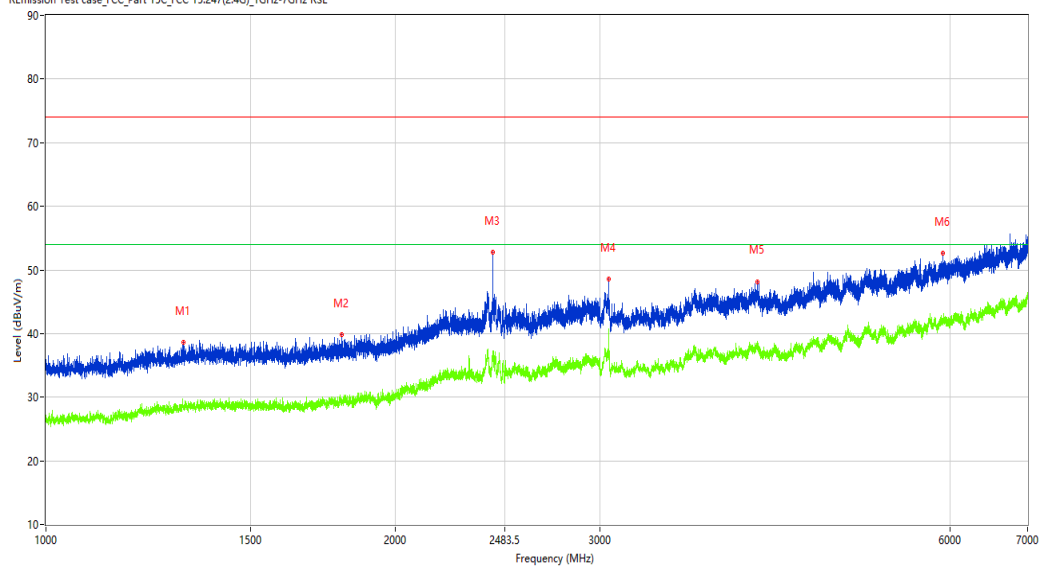

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1313.750	38.62	-13.57	74.0	35.38	Peak	279.40	100	Vertical	Pass
1**	1313.750	28.31	-13.57	54.0	25.69	AV	279.40	100	Vertical	Pass
2	1798.750	39.86	-13.09	74.0	34.14	Peak	261.50	100	Vertical	Pass
2**	1798.750	29.49	-13.09	54.0	24.51	AV	261.50	100	Vertical	Pass
3	2425.750	52.72	-5.70	74.0	21.28	Peak	47.00	100	Vertical	Pass
3**	2425.750	36.66	-5.70	54.0	17.34	AV	47.00	100	Vertical	Pass
4	3050.000	48.60	-4.72	74.0	25.40	Peak	0.00	100	Vertical	Pass
4**	3050.000	40.68	-4.72	54.0	13.32	AV	0.00	100	Vertical	Pass
5	4096.500	48.17	-1.44	74.0	25.83	Peak	91.40	100	Vertical	Pass
5**	4096.500	38.81	-1.44	54.0	15.19	AV	91.40	100	Vertical	Pass
6	5922.000	52.71	1.50	74.0	21.29	Peak	102.20	100	Vertical	Pass
6**	5922.000	42.42	1.50	54.0	11.58	AV	102.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_17.02.54

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.249_7GHz-18GHz

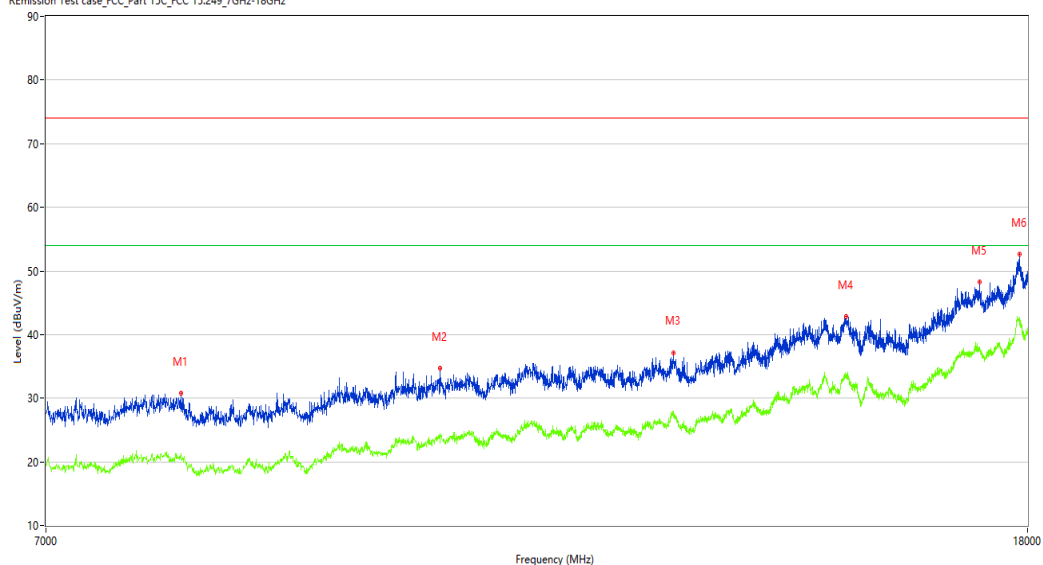

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7970.750	30.74	1.00	74.0	43.26	Peak	221.90	100	Vertical	Pass
1**	7970.750	21.24	1.00	54.0	32.76	AV	221.90	100	Vertical	Pass
2	10231.250	34.69	3.09	74.0	39.31	Peak	0.00	100	Vertical	Pass
2**	10231.250	24.42	3.09	54.0	29.58	AV	0.00	100	Vertical	Pass
3	12802.500	37.19	5.84	74.0	36.81	Peak	0.00	100	Vertical	Pass
3**	12802.500	27.89	5.84	54.0	26.11	AV	0.00	100	Vertical	Pass
4	15120.750	42.88	9.73	74.0	31.12	Peak	339.40	100	Vertical	Pass
4**	15120.750	33.45	9.73	54.0	20.55	AV	339.40	100	Vertical	Pass
5	17183.250	48.31	15.08	74.0	25.69	Peak	46.20	100	Vertical	Pass
5**	17183.250	38.08	15.08	54.0	15.92	AV	46.20	100	Vertical	Pass
6	17859.750	52.64	18.55	74.0	21.36	Peak	221.90	100	Vertical	Pass
6**	17859.750	42.37	18.55	54.0	11.63	AV	221.90	100	Vertical	Pass

High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-10_19.16.31

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 39.1%

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

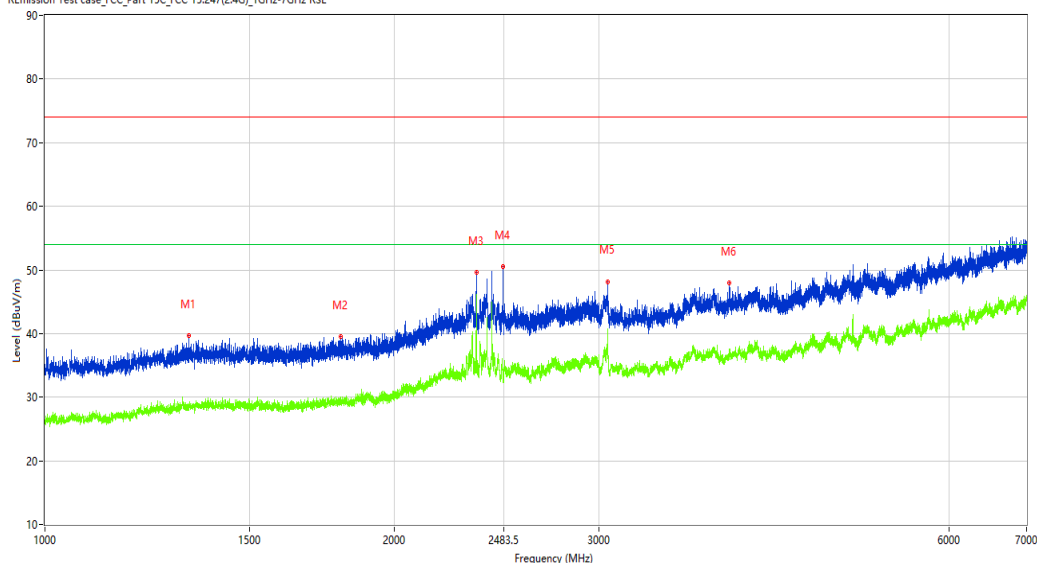

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.250	39.65	-13.62	74.0	34.35	Peak	166.90	100	Horizontal	Pass
1**	1330.250	28.75	-13.62	54.0	25.25	AV	166.90	100	Horizontal	Pass
2	1796.000	39.50	-13.03	74.0	34.50	Peak	274.10	100	Horizontal	Pass
2**	1796.000	30.07	-13.03	54.0	23.93	AV	274.10	100	Horizontal	Pass
3	2351.750	49.58	-8.65	74.0	24.42	Peak	360.00	100	Horizontal	Pass
3**	2351.750	45.24	-8.65	54.0	8.76	AV	360.00	100	Horizontal	Pass
4	2479.750	50.53	-7.01	74.0	23.47	Peak	166.90	100	Horizontal	Pass
4**	2479.750	32.66	-7.01	54.0	21.34	AV	166.90	100	Horizontal	Pass
5	3050.500	48.18	-5.39	74.0	25.82	Peak	96.60	100	Horizontal	Pass
5**	3050.500	40.06	-5.39	54.0	13.94	AV	96.60	100	Horizontal	Pass
6	3885.000	47.94	-2.74	74.0	26.06	Peak	287.50	100	Horizontal	Pass
6**	3885.000	37.44	-2.74	54.0	16.56	AV	287.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_17.14.13

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26010045-03#01

R Emission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

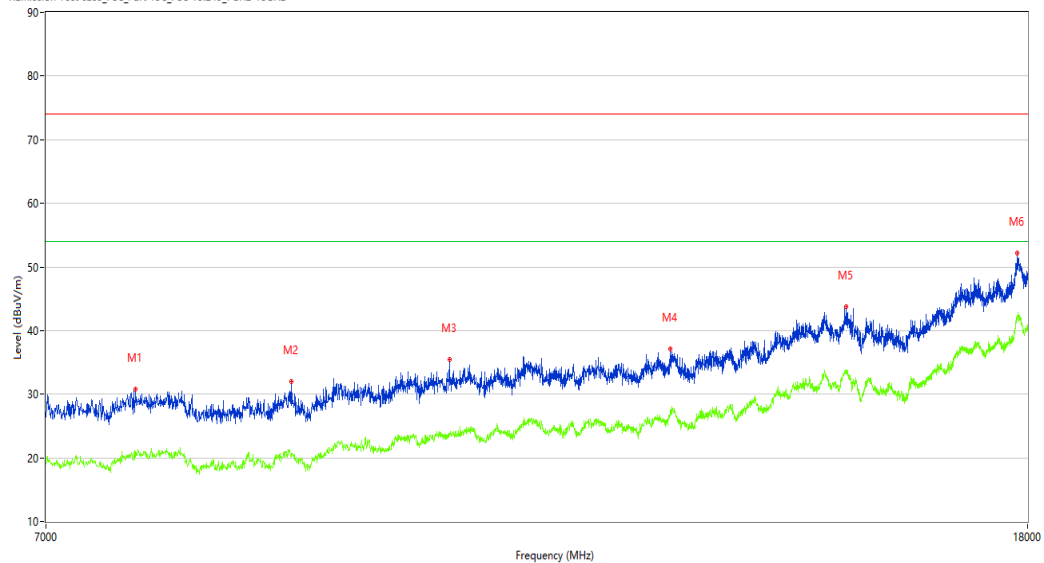

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7627.000	30.74	0.25	74.0	43.26	Peak	295.00	100	Horizontal	Pass
1**	7627.000	20.24	0.25	54.0	33.76	AV	295.00	100	Horizontal	Pass
2	8867.250	31.97	-0.06	74.0	42.03	Peak	105.70	100	Horizontal	Pass
2**	8867.250	20.52	-0.06	54.0	33.48	AV	105.70	100	Horizontal	Pass
3	10319.250	35.39	3.52	74.0	38.61	Peak	105.70	100	Horizontal	Pass
3**	10319.250	23.55	3.52	54.0	30.45	AV	105.70	100	Horizontal	Pass
4	12766.750	37.12	5.42	74.0	36.88	Peak	105.70	100	Horizontal	Pass
4**	12766.750	27.44	5.42	54.0	26.56	AV	105.70	100	Horizontal	Pass
5	15120.750	43.71	9.73	74.0	30.29	Peak	105.70	100	Horizontal	Pass
5**	15120.750	33.84	9.73	54.0	20.16	AV	105.70	100	Horizontal	Pass
6	17826.750	52.12	18.38	74.0	21.88	Peak	52.10	100	Horizontal	Pass
6**	17826.750	42.42	18.38	54.0	11.58	AV	52.10	100	Horizontal	Pass

High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-10_19.12.50

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.6

Hum.: 39.1%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

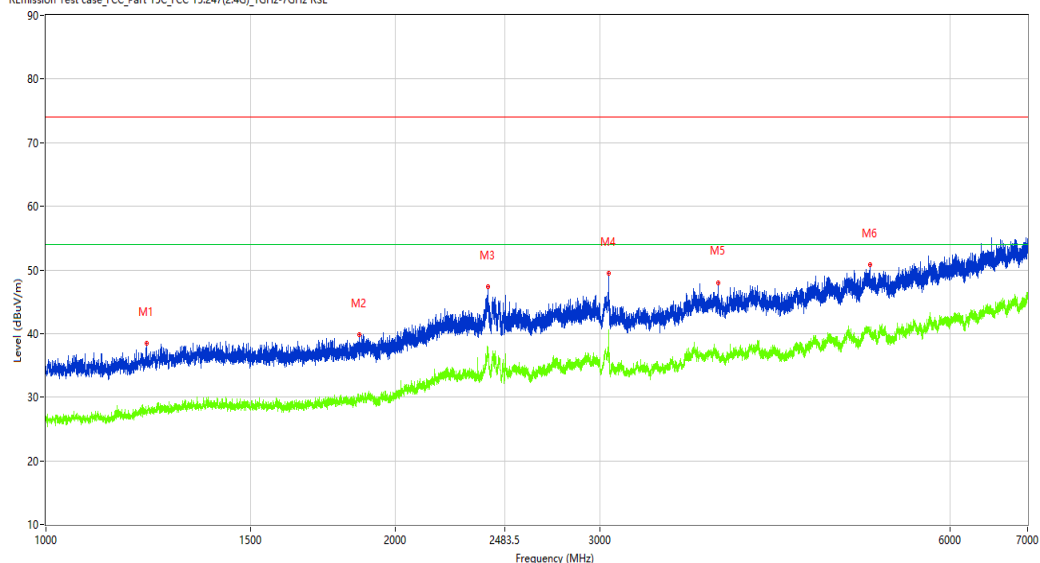

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1221.500	38.49	-14.17	74.0	35.51	Peak	48.50	100	Vertical	Pass
1**	1221.500	27.90	-14.17	54.0	26.10	AV	48.50	100	Vertical	Pass
2	1861.250	39.80	-12.63	74.0	34.20	Peak	259.20	100	Vertical	Pass
2**	1861.250	29.73	-12.63	54.0	24.27	AV	259.20	100	Vertical	Pass
3	2401.250	47.35	-4.78	74.0	26.65	Peak	249.90	100	Vertical	Pass
3**	2401.250	37.05	-4.78	54.0	16.95	AV	249.90	100	Vertical	Pass
4	3050.000	49.47	-4.72	74.0	24.53	Peak	105.50	100	Vertical	Pass
4**	3050.000	40.62	-4.72	54.0	13.38	AV	105.50	100	Vertical	Pass
5	3790.500	48.04	-3.13	74.0	25.96	Peak	294.60	100	Vertical	Pass
5**	3790.500	36.24	-3.13	54.0	17.76	AV	294.60	100	Vertical	Pass
6	5123.000	50.83	0.24	74.0	23.17	Peak	286.40	100	Vertical	Pass
6**	5123.000	39.94	0.24	54.0	14.06	AV	286.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_17.04.58

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

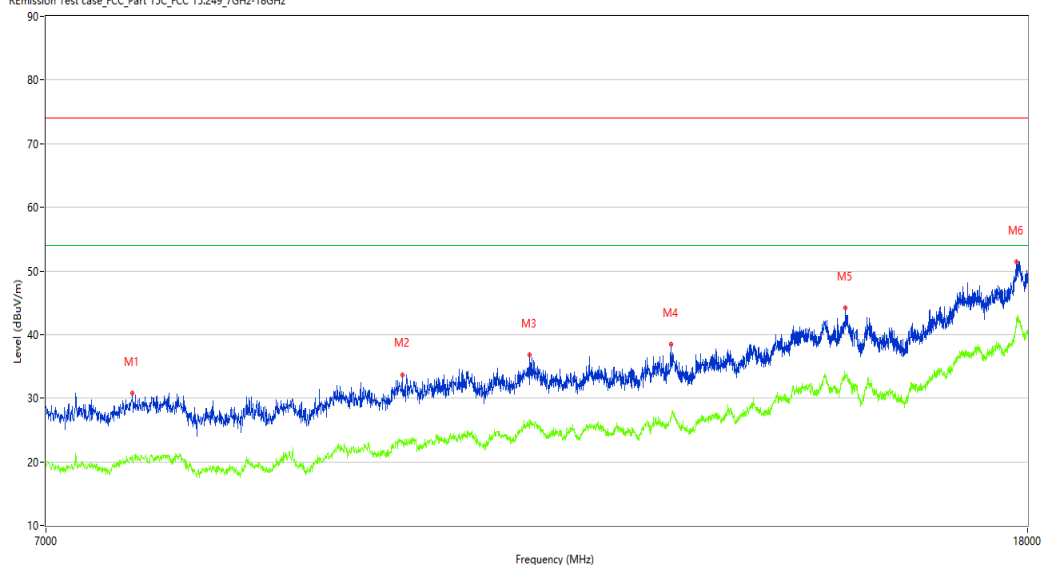

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7607.750	30.77	-0.17	74.0	43.23	Peak	66.20	100	Vertical	Pass
1**	7607.750	20.08	-0.17	54.0	33.92	AV	66.20	100	Vertical	Pass
2	9862.750	33.73	2.87	74.0	40.27	Peak	5.60	100	Vertical	Pass
2**	9862.750	23.03	2.87	54.0	30.97	AV	5.60	100	Vertical	Pass
3	11147.000	36.83	3.78	74.0	37.17	Peak	5.60	100	Vertical	Pass
3**	11147.000	26.53	3.78	54.0	27.47	AV	5.60	100	Vertical	Pass
4	12769.500	38.49	5.52	74.0	35.51	Peak	5.60	100	Vertical	Pass
4**	12769.500	27.16	5.52	54.0	26.84	AV	5.60	100	Vertical	Pass
5	15109.750	44.20	10.02	74.0	29.80	Peak	5.60	100	Vertical	Pass
5**	15109.750	33.63	10.02	54.0	20.37	AV	5.60	100	Vertical	Pass
6	17813.000	51.46	18.17	74.0	22.54	Peak	238.50	100	Vertical	Pass
6**	17813.000	42.17	18.17	54.0	11.83	AV	238.50	100	Vertical	Pass

Band edge -Low channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2026-03-10_19.28.12

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 39.1%

Remark: DR-RSE01-E26010045-03#01

R:Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

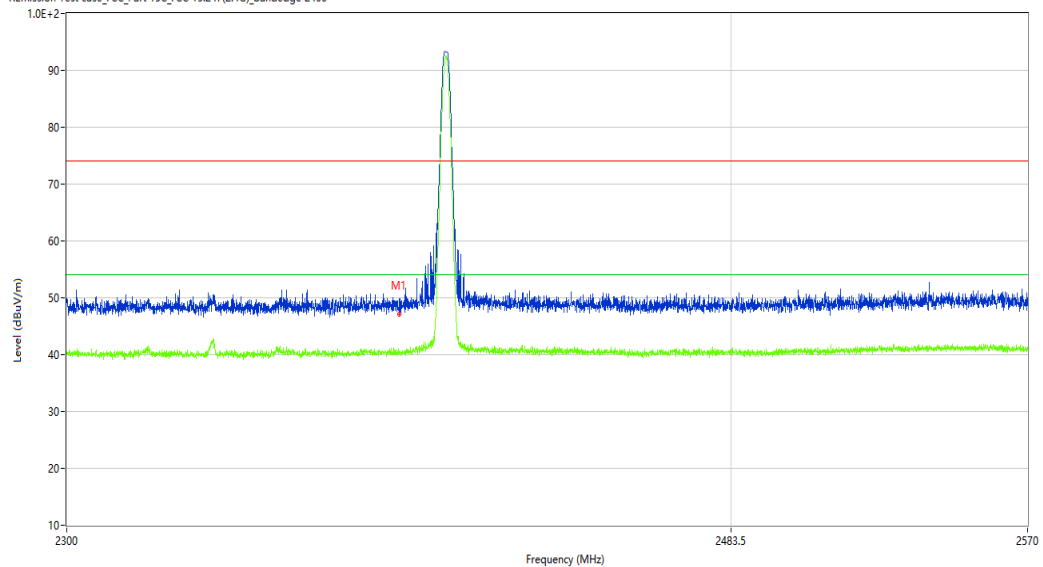

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	47.51	-10.58	74.0	26.49	Peak	153.28	100	H	Pass
1**	2390.000	40.25	-10.58	54.0	13.75	AV	153.28	100	H	Pass

Band edge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2026-03-10_19.25.42

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.6

Hum.: 39.1%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

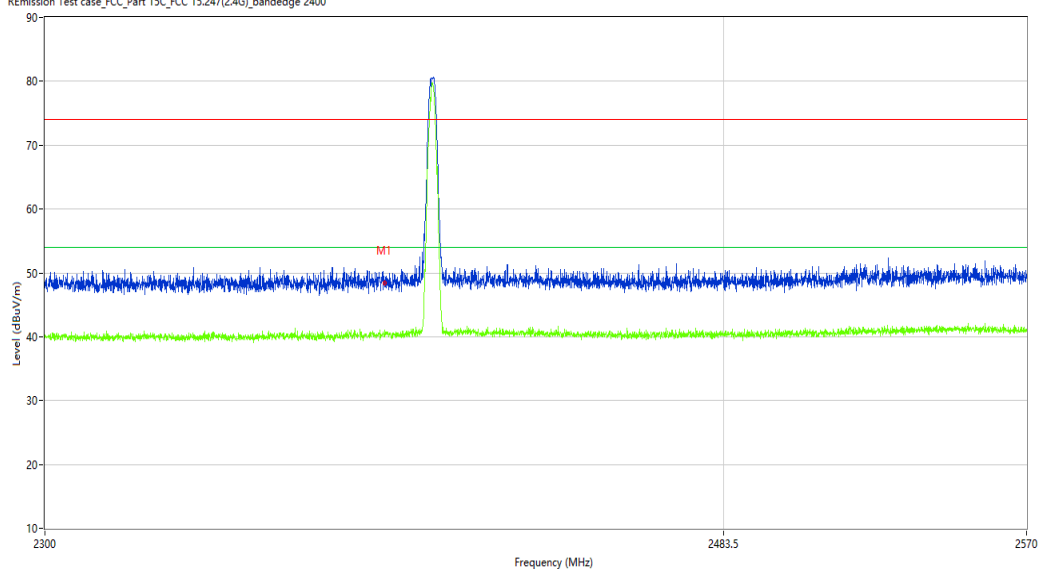

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.49	-10.58	74.0	25.51	Peak	142.60	100	V	Pass
1**	2390.000	40.91	-10.58	54.0	13.09	AV	142.60	100	V	Pass

Band edge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2026-03-10_19.20.30

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 39.1%

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

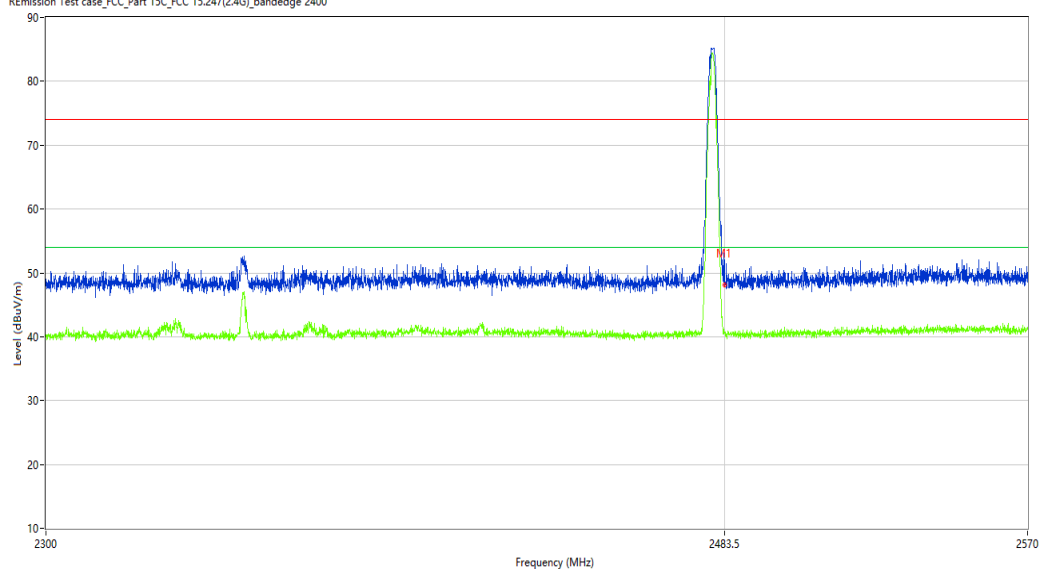

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.14	-10.56	74.0	25.86	Peak	260.09	100	H	Pass
1**	2483.500	40.64	-10.56	54.0	13.36	AV	260.09	100	H	Pass

-Band edge -High channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2026-03-10_19.22.46

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.6

Load: Full load

Hum.: 39.1%

Remark: DR-RSE01-E26010045-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

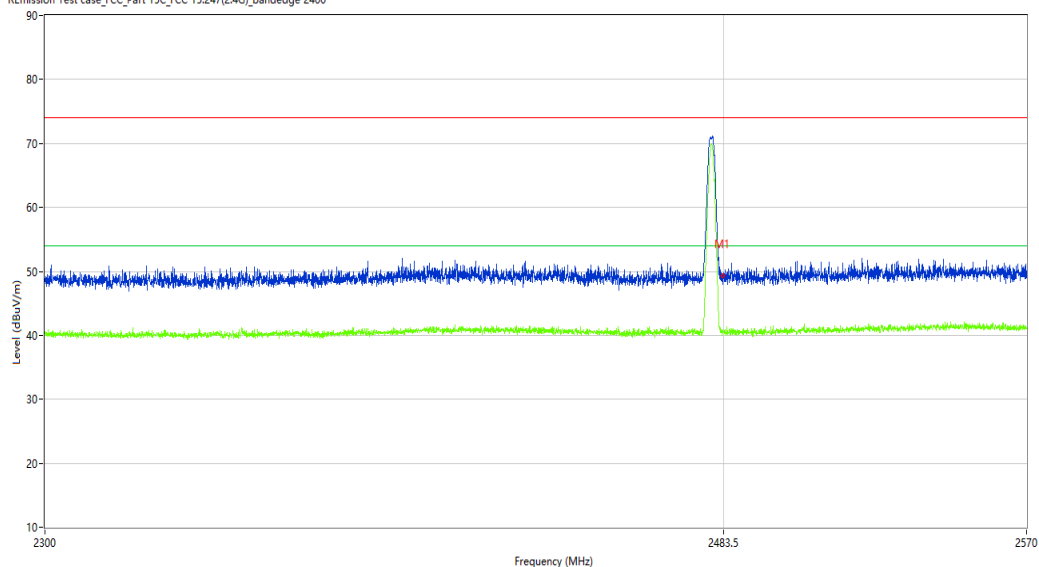

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	49.33	-10.56	74.0	24.67	Peak	118.94	100	V	Pass
1**	2483.500	40.61	-10.56	54.0	13.39	AV	118.94	100	V	Pass