

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-02_14.08.34

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

RÉmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

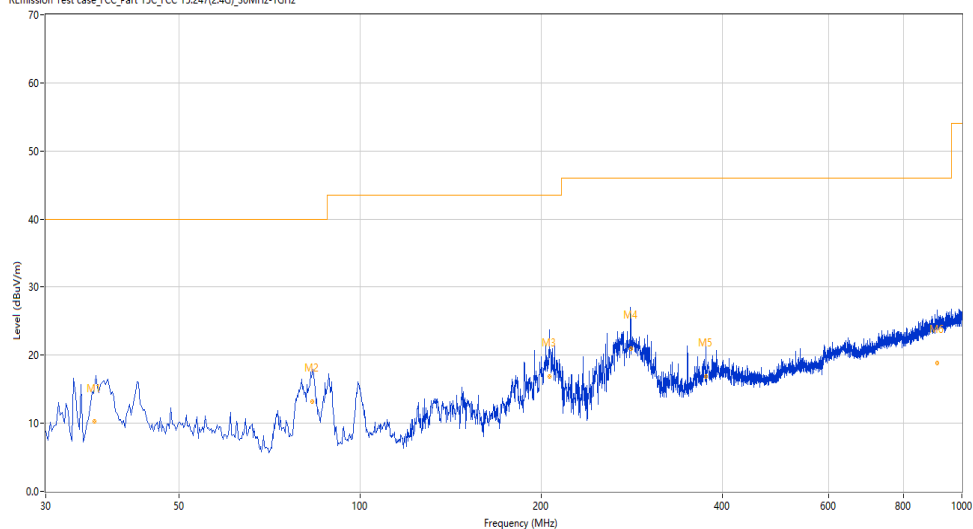

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	36.135	20.98	-26.27	40.0	19.02	Peak	322.40	236	Horizontal	Pass
1*	36.135	10.33	-26.27	40.0	29.67	QP	322.40	236	Horizontal	Pass
2	83.109	18.55	-29.55	40.0	21.45	Peak	360.00	155	Horizontal	Pass
2*	83.109	13.23	-29.55	40.0	26.77	QP	360.00	155	Horizontal	Pass
3	206.321	24.09	-24.85	43.5	19.41	Peak	297.70	126	Horizontal	Pass
3*	206.321	16.81	-24.85	43.5	26.69	QP	297.70	126	Horizontal	Pass
4	281.550	27.96	-22.47	46.0	18.04	Peak	53.90	180	Horizontal	Pass
4*	281.550	21.01	-22.47	46.0	24.99	QP	53.90	180	Horizontal	Pass
5	375.401	22.58	-20.05	46.0	23.42	Peak	291.50	278	Horizontal	Pass
5*	375.401	16.86	-20.05	46.0	29.14	QP	291.50	278	Horizontal	Pass
6	909.271	25.75	-7.79	46.0	20.25	Peak	284.10	297	Horizontal	Pass
6*	909.271	18.91	-7.79	46.0	27.09	QP	284.10	297	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-02_13.51.28

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

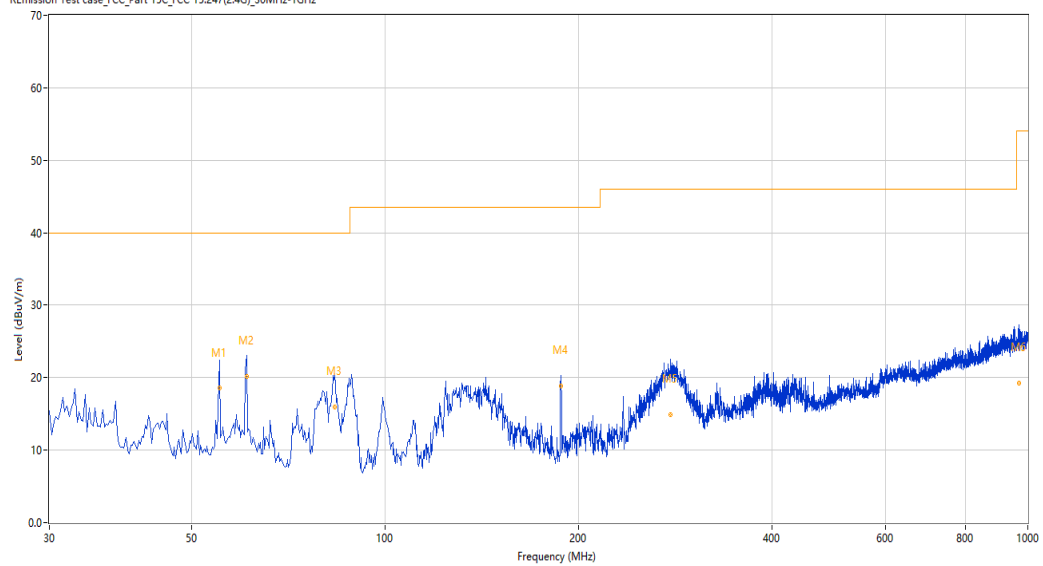

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.296	23.45	-24.11	40.0	16.55	Peak	360.00	141	Vertical	Pass
1*	55.296	18.55	-24.11	40.0	21.45	QP	360.00	141	Vertical	Pass
2	60.825	23.60	-25.13	40.0	16.40	Peak	360.00	178	Vertical	Pass
2*	60.825	20.15	-25.13	40.0	19.85	QP	360.00	178	Vertical	Pass
3	83.368	21.37	-29.55	40.0	18.63	Peak	182.70	108	Vertical	Pass
3*	83.368	15.99	-29.55	40.0	24.01	QP	182.70	108	Vertical	Pass
4	187.770	20.76	-25.97	43.5	22.74	Peak	32.40	100	Vertical	Pass
4*	187.770	18.81	-25.97	43.5	24.69	QP	32.40	100	Vertical	Pass
5	278.133	21.94	-22.57	46.0	24.06	Peak	360.70	246	Vertical	Pass
5*	278.133	14.91	-22.57	46.0	31.09	QP	360.70	246	Vertical	Pass
6	969.821	25.96	-7.09	54.0	28.04	Peak	40.60	125	Vertical	Pass
6*	969.821	19.30	-7.09	54.0	34.70	QP	40.60	125	Vertical	Pass

1-18G

Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-02_10.30.57

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

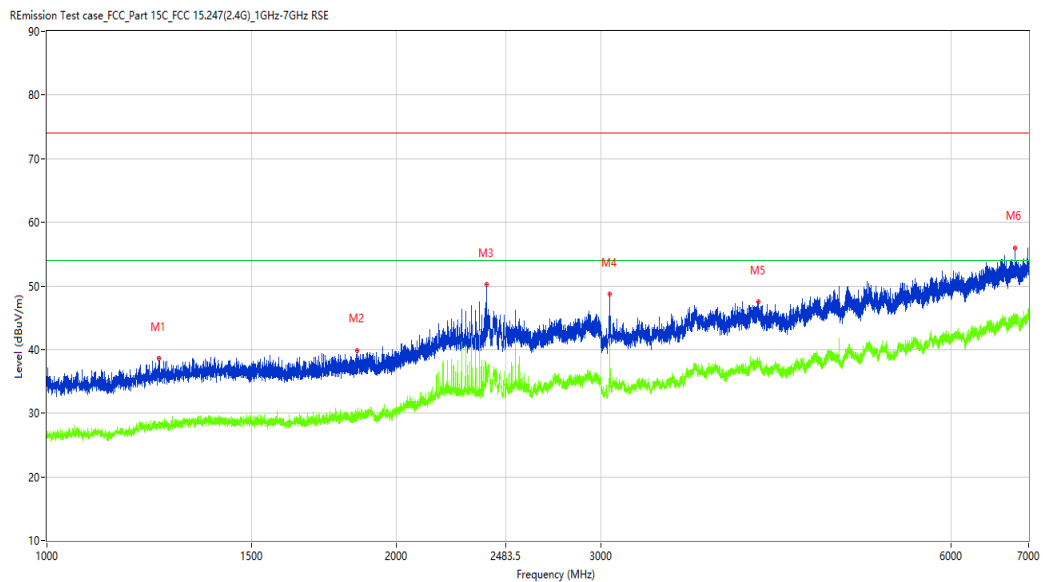

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1247.750	38.60	-13.91	74.0	35.40	Peak	120.30	100	Horizontal	Pass
1**	1247.750	28.60	-13.91	54.0	25.40	AV	120.30	100	Horizontal	Pass
2	1850.750	39.88	-12.72	74.0	34.12	Peak	202.90	100	Horizontal	Pass
2**	1850.750	29.55	-12.72	54.0	24.45	AV	202.90	100	Horizontal	Pass
3	2390.750	50.25	-6.37	74.0	23.75	Peak	360.00	100	Horizontal	Pass
3**	2390.750	36.63	-6.37	54.0	17.37	AV	360.00	100	Horizontal	Pass
4	3050.000	48.73	-4.72	74.0	25.27	Peak	0.00	100	Horizontal	Pass
4**	3050.000	40.41	-4.72	54.0	13.59	AV	0.00	100	Horizontal	Pass
5	4096.000	47.53	-1.42	74.0	26.47	Peak	159.70	100	Horizontal	Pass
5**	4096.000	37.66	-1.42	54.0	16.34	AV	159.70	100	Horizontal	Pass
6	6818.500	55.89	4.32	74.0	18.11	Peak	256.10	100	Horizontal	Pass
6**	6818.500	44.47	4.32	54.0	9.53	AV	256.10	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-02_14.23.16

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

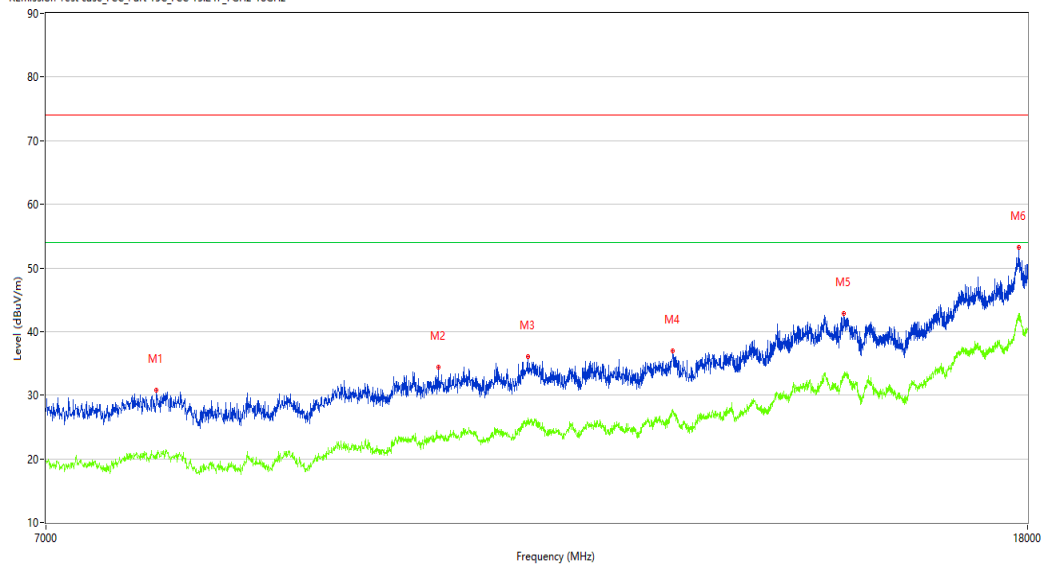

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7786.500	30.72	0.37	74.0	43.28	Peak	348.30	100	Horizontal	Pass
1**	7786.500	20.72	0.37	54.0	33.28	AV	348.30	100	Horizontal	Pass
2	10209.250	34.36	3.09	74.0	39.64	Peak	49.50	100	Horizontal	Pass
2**	10209.250	23.61	3.09	54.0	30.39	AV	49.50	100	Horizontal	Pass
3	11130.500	36.04	4.05	74.0	37.96	Peak	0.00	100	Horizontal	Pass
3**	11130.500	26.42	4.05	54.0	27.58	AV	0.00	100	Horizontal	Pass
4	12797.000	36.91	5.88	74.0	37.09	Peak	231.10	100	Horizontal	Pass
4**	12797.000	27.73	5.88	54.0	26.27	AV	231.10	100	Horizontal	Pass
5	15085.000	42.88	10.55	74.0	31.12	Peak	105.70	100	Horizontal	Pass
5**	15085.000	33.32	10.55	54.0	20.68	AV	105.70	100	Horizontal	Pass
6	17851.501	53.23	18.50	74.0	20.77	Peak	105.70	100	Horizontal	Pass
6**	17851.501	42.69	18.50	54.0	11.31	AV	105.70	100	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-02_10.58.42

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

RÉmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

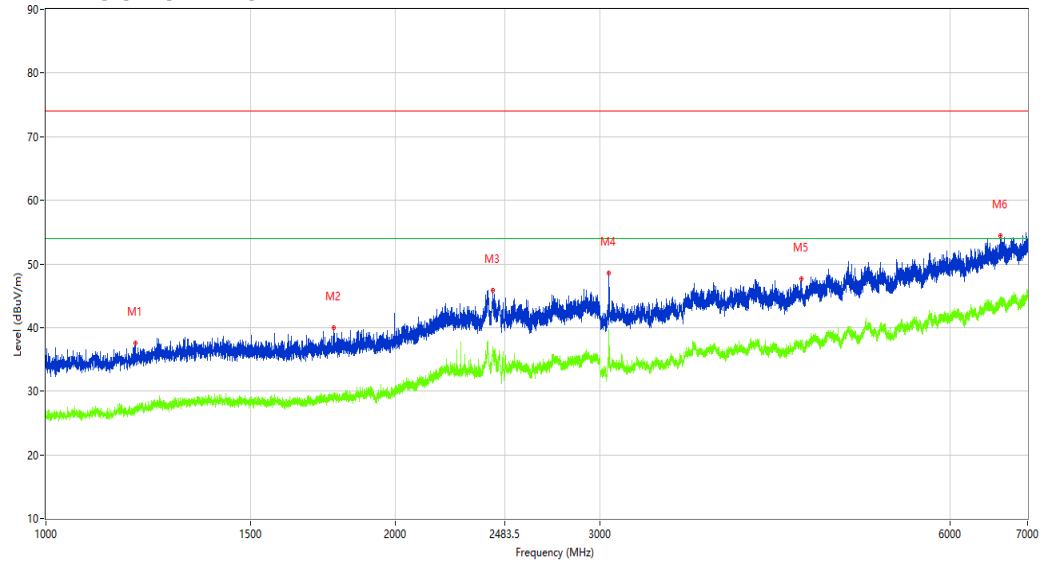

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1194.500	37.50	-14.48	74.0	36.50	Peak	151.20	100	Vertical	Pass
1**	1194.500	27.41	-14.48	54.0	26.59	AV	151.20	100	Vertical	Pass
2	1768.750	39.91	-12.91	74.0	34.09	Peak	175.80	100	Vertical	Pass
2**	1768.750	29.72	-12.91	54.0	24.28	AV	175.80	100	Vertical	Pass
3	2425.500	45.82	-5.70	74.0	28.18	Peak	46.90	100	Vertical	Pass
3**	2425.500	36.75	-5.70	54.0	17.25	AV	46.90	100	Vertical	Pass
4	3050.000	48.50	-4.72	74.0	25.50	Peak	0.00	100	Vertical	Pass
4**	3050.000	39.73	-4.72	54.0	14.27	AV	0.00	100	Vertical	Pass
5	4469.000	47.70	-1.99	74.0	26.30	Peak	331.40	100	Vertical	Pass
5**	4469.000	37.55	-1.99	54.0	16.45	AV	331.40	100	Vertical	Pass
6	6630.000	54.39	3.94	74.0	19.61	Peak	11.00	100	Vertical	Pass
6**	6630.000	44.73	3.94	54.0	9.27	AV	11.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-02_13.45.48

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

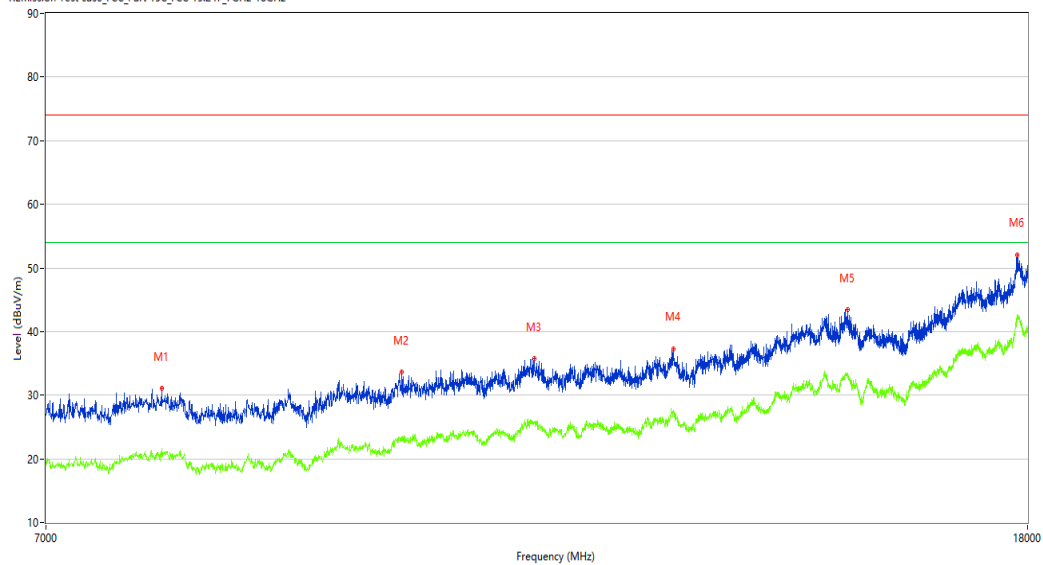

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7825.000	31.04	0.99	74.0	42.96	Peak	1.80	100	Vertical	Pass
1**	7825.000	21.64	0.99	54.0	32.36	AV	1.80	100	Vertical	Pass
2	9860.000	33.64	2.86	74.0	40.36	Peak	63.30	100	Vertical	Pass
2**	9860.000	23.21	2.86	54.0	30.79	AV	63.30	100	Vertical	Pass
3	11199.250	35.70	4.02	74.0	38.30	Peak	257.90	100	Vertical	Pass
3**	11199.250	25.77	4.02	54.0	28.23	AV	257.90	100	Vertical	Pass
4	12802.500	37.25	5.84	74.0	36.75	Peak	1.80	100	Vertical	Pass
4**	12802.500	27.58	5.84	54.0	26.42	AV	1.80	100	Vertical	Pass
5	15137.250	43.49	9.34	74.0	30.51	Peak	200.60	100	Vertical	Pass
5**	15137.250	33.43	9.34	54.0	20.57	AV	200.60	100	Vertical	Pass
6	17824.000	52.09	18.38	74.0	21.91	Peak	184.60	100	Vertical	Pass
6**	17824.000	42.36	18.38	54.0	11.64	AV	184.60	100	Vertical	Pass

18-25G

Low channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-03-20_10.15.14

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

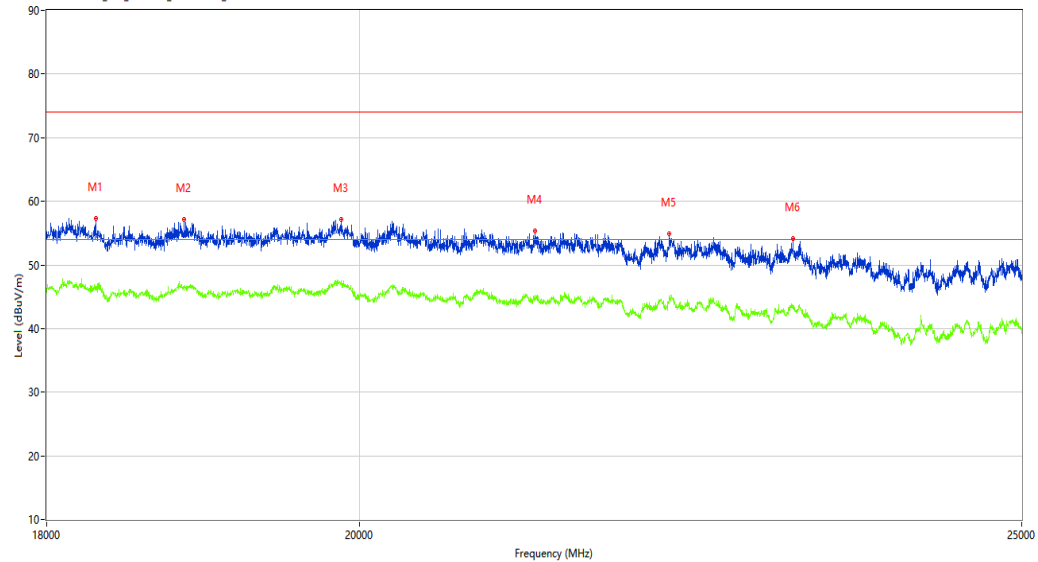

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18299.251	57.33	18.17	74.0	16.67	Peak	9.36	100	Horizontal	Pass
1**	18299.251	46.60	18.17	54.0	7.40	AV	9.36	100	Horizontal	Pass
2	18852.250	57.08	17.80	74.0	16.92	Peak	24.12	100	Horizontal	Pass
2**	18852.250	46.59	17.80	54.0	7.41	AV	24.12	100	Horizontal	Pass
3	19876.000	57.22	17.49	74.0	16.78	Peak	7.56	100	Horizontal	Pass
3**	19876.000	47.11	17.49	54.0	6.89	AV	7.56	100	Horizontal	Pass
4	21218.251	55.29	16.05	74.0	18.71	Peak	6.84	100	Horizontal	Pass
4**	21218.251	44.86	16.05	54.0	9.14	AV	6.84	100	Horizontal	Pass
5	22200.001	54.84	15.88	74.0	19.16	Peak	6.84	100	Horizontal	Pass
5**	22200.001	44.86	15.88	54.0	9.14	AV	6.84	100	Horizontal	Pass
6	23145.001	54.07	13.92	74.0	19.93	Peak	17.64	100	Horizontal	Pass
6**	23145.001	43.52	13.92	54.0	10.48	AV	17.64	100	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-03-20_10.20.46

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

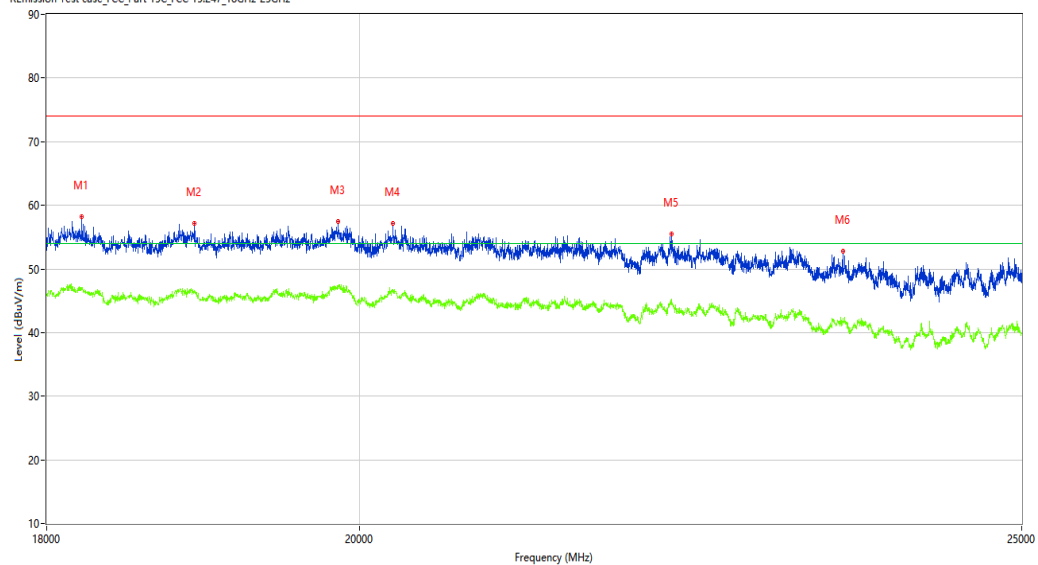

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18213.501	58.24	18.32	74.0	15.76	Peak	11.88	100	Vertical	Pass
1**	18213.501	46.69	18.32	54.0	7.31	AV	11.88	100	Vertical	Pass
2	18920.499	57.21	17.79	74.0	16.79	Peak	7.20	100	Vertical	Pass
2**	18920.499	46.34	17.79	54.0	7.66	AV	7.20	100	Vertical	Pass
3	19856.751	57.48	17.49	74.0	16.52	Peak	9.36	100	Vertical	Pass
3**	19856.751	47.42	17.49	54.0	6.58	AV	9.36	100	Vertical	Pass
4	20226.001	57.13	17.23	74.0	16.87	Peak	7.20	100	Vertical	Pass
4**	20226.001	46.31	17.23	54.0	7.69	AV	7.20	100	Vertical	Pass
5	22217.501	55.44	15.86	74.0	18.56	Peak	7.20	100	Vertical	Pass
5**	22217.501	45.22	15.86	54.0	8.78	AV	7.20	100	Vertical	Pass
6	23537.000	52.80	13.17	74.0	21.20	Peak	7.20	100	Vertical	Pass
6**	23537.000	42.31	13.17	54.0	11.69	AV	7.20	100	Vertical	Pass

Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-02_11.26.57

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

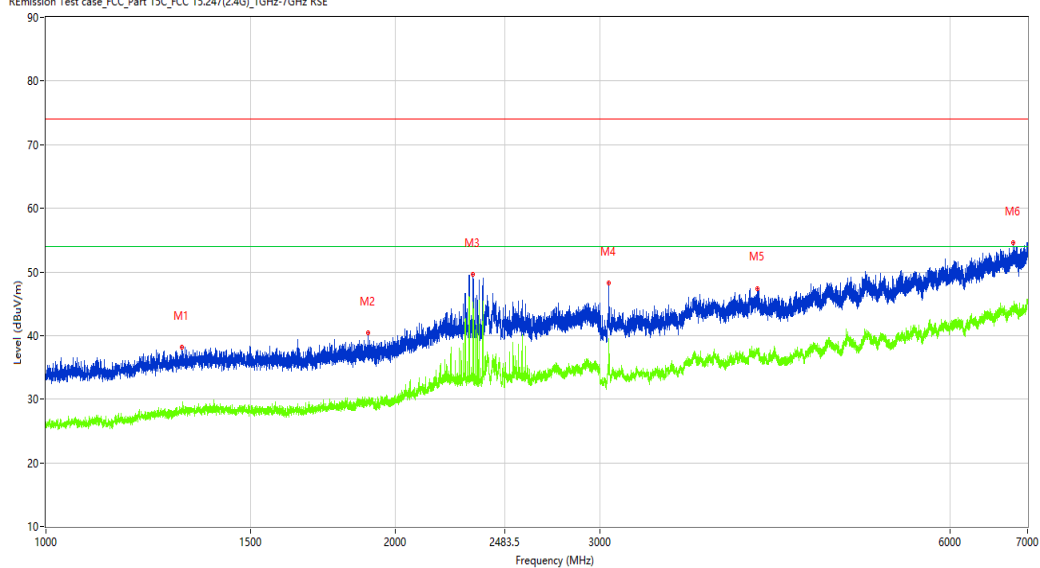

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1308.750	38.20	-13.55	74.0	35.80	Peak	116.20	100	Horizontal	Pass
1**	1308.750	28.01	-13.55	54.0	25.99	AV	116.20	100	Horizontal	Pass
2	1894.500	40.44	-12.04	74.0	33.56	Peak	17.60	100	Horizontal	Pass
2**	1894.500	29.52	-12.04	54.0	24.48	AV	17.60	100	Horizontal	Pass
3	2332.250	49.55	-8.90	74.0	24.45	Peak	318.30	100	Horizontal	Pass
3**	2332.250	45.31	-8.90	54.0	8.69	AV	318.30	100	Horizontal	Pass
4	3050.000	47.62	-4.72	74.0	26.38	Peak	66.90	100	Horizontal	Pass
4**	3050.000	39.52	-4.72	54.0	14.48	AV	66.90	100	Horizontal	Pass
5	4099.000	47.41	-1.53	74.0	26.59	Peak	45.00	100	Horizontal	Pass
5**	4099.000	37.47	-1.53	54.0	16.53	AV	45.00	100	Horizontal	Pass
6	6798.500	54.62	4.17	74.0	19.38	Peak	57.20	100	Horizontal	Pass
6**	6798.500	44.20	4.17	54.0	9.80	AV	57.20	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-02_14.21.29

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

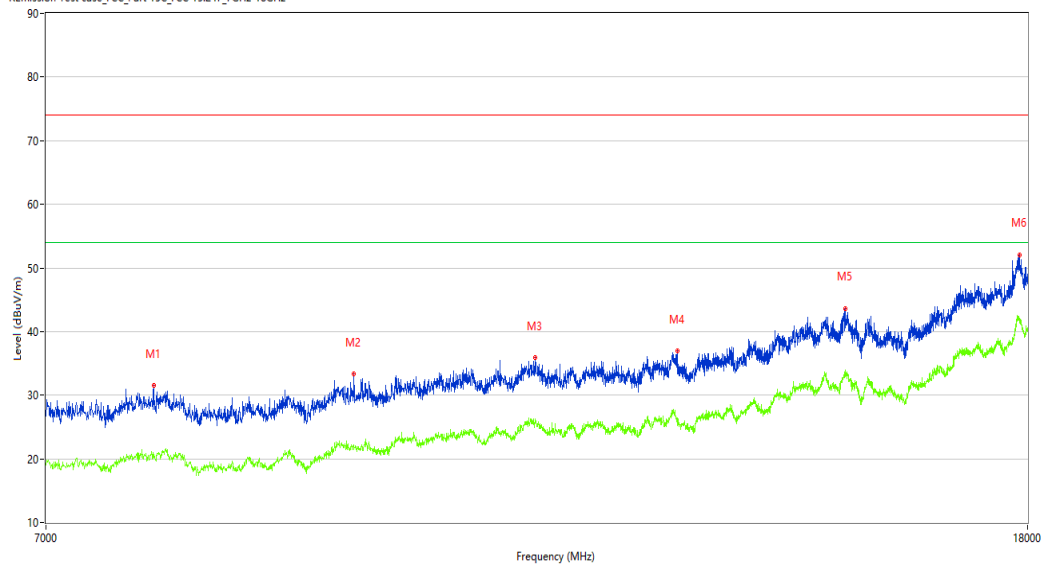

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7764.500	31.53	-0.11	74.0	42.47	Peak	319.90	100	Horizontal	Pass
1**	7764.500	20.31	-0.11	54.0	33.69	AV	319.90	100	Horizontal	Pass
2	9414.500	33.39	1.50	74.0	40.61	Peak	196.30	100	Horizontal	Pass
2**	9414.500	21.74	1.50	54.0	32.26	AV	196.30	100	Horizontal	Pass
3	11210.250	35.92	4.04	74.0	38.08	Peak	143.10	100	Horizontal	Pass
3**	11210.250	26.26	4.04	54.0	27.74	AV	143.10	100	Horizontal	Pass
4	12849.250	36.97	4.88	74.0	37.03	Peak	258.10	100	Horizontal	Pass
4**	12849.250	26.45	4.88	54.0	27.55	AV	258.10	100	Horizontal	Pass
5	15101.500	43.66	10.19	74.0	30.34	Peak	196.30	100	Horizontal	Pass
5**	15101.500	33.60	10.19	54.0	20.40	AV	196.30	100	Horizontal	Pass
6	17859.750	52.09	18.55	74.0	21.91	Peak	360.00	100	Horizontal	Pass
6**	17859.750	42.15	18.55	54.0	11.85	AV	360.00	100	Horizontal	Pass

Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-02_11.04.44

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 52%RH

Test Engineer: XCJ


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26020002-01#02

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

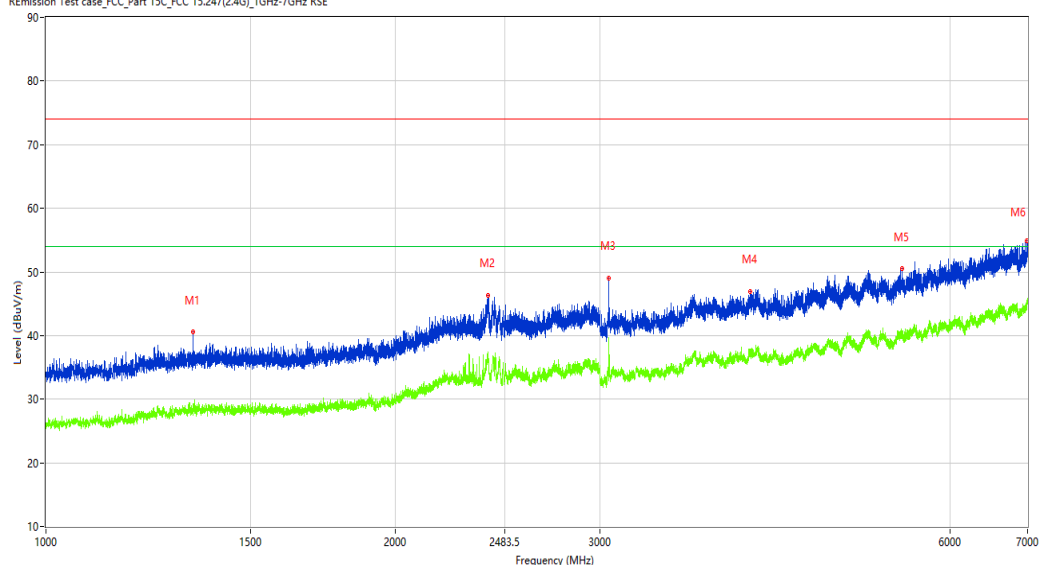

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1339.250	40.61	-13.59	74.0	33.39	Peak	0.00	100	Vertical	Pass
1**	1339.250	29.21	-13.59	54.0	24.79	AV	0.00	100	Vertical	Pass
2	2401.250	46.38	-4.78	74.0	27.62	Peak	266.40	100	Vertical	Pass
2**	2401.250	37.40	-4.78	54.0	16.60	AV	266.40	100	Vertical	Pass
3	3050.000	49.08	-4.72	74.0	24.92	Peak	221.20	100	Vertical	Pass
3**	3050.000	39.59	-4.72	54.0	14.41	AV	221.20	100	Vertical	Pass
4	4037.000	46.97	-1.92	74.0	27.03	Peak	302.00	100	Vertical	Pass
4**	4037.000	37.88	-1.92	54.0	16.12	AV	302.00	100	Vertical	Pass
5	5454.500	50.47	0.13	74.0	23.53	Peak	67.20	100	Vertical	Pass
5**	5454.500	40.81	0.13	54.0	13.19	AV	67.20	100	Vertical	Pass
6	6987.000	54.85	4.53	74.0	19.15	Peak	73.50	100	Vertical	Pass
6**	6987.000	45.12	4.53	54.0	8.88	AV	73.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-02_13.47.20

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

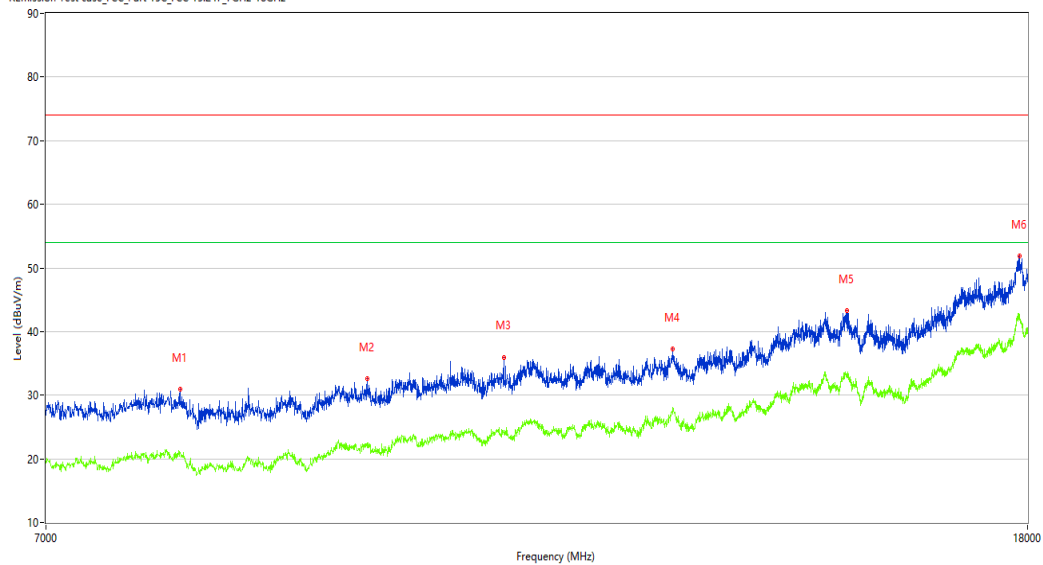

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7962.500	30.87	1.06	74.0	43.13	Peak	106.20	100	Vertical	Pass
1**	7962.500	20.95	1.06	54.0	33.05	AV	106.20	100	Vertical	Pass
2	9532.750	32.63	2.37	74.0	41.37	Peak	282.90	100	Vertical	Pass
2**	9532.750	22.44	2.37	54.0	31.56	AV	282.90	100	Vertical	Pass
3	10874.750	35.86	4.21	74.0	38.14	Peak	156.00	100	Vertical	Pass
3**	10874.750	24.22	4.21	54.0	29.78	AV	156.00	100	Vertical	Pass
4	12797.000	37.20	5.88	74.0	36.80	Peak	282.90	100	Vertical	Pass
4**	12797.000	28.13	5.88	54.0	25.87	AV	282.90	100	Vertical	Pass
5	15129.000	43.33	9.36	74.0	30.67	Peak	40.60	100	Vertical	Pass
5**	15129.000	33.31	9.36	54.0	20.69	AV	40.60	100	Vertical	Pass
6	17859.750	51.83	18.55	74.0	22.17	Peak	282.90	100	Vertical	Pass
6**	17859.750	41.80	18.55	54.0	12.20	AV	282.90	100	Vertical	Pass

High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-03-02_13.27.23

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

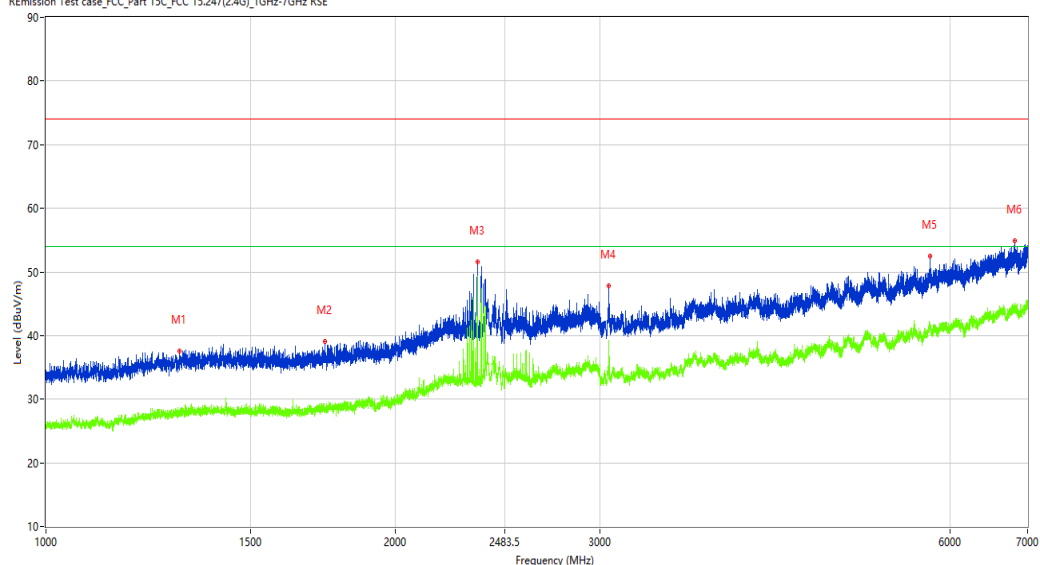

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1303.750	37.52	-13.80	74.0	36.48	Peak	39.50	100	Horizontal	Pass
1**	1303.750	27.47	-13.80	54.0	26.53	AV	39.50	100	Horizontal	Pass
2	1737.250	39.14	-12.99	74.0	34.86	Peak	245.40	100	Horizontal	Pass
2**	1737.250	28.49	-12.99	54.0	25.51	AV	245.40	100	Horizontal	Pass
3	2351.750	51.52	-8.65	74.0	22.48	Peak	39.50	100	Horizontal	Pass
3**	2351.750	48.53	-8.65	54.0	5.47	AV	39.50	100	Horizontal	Pass
4	3050.000	47.80	-4.72	74.0	26.20	Peak	1.60	100	Horizontal	Pass
4**	3050.000	39.10	-4.72	54.0	14.90	AV	1.60	100	Horizontal	Pass
5	5769.500	52.47	1.64	74.0	21.53	Peak	282.70	100	Horizontal	Pass
5**	5769.500	40.99	1.64	54.0	13.01	AV	282.70	100	Horizontal	Pass
6	6824.000	54.92	4.24	74.0	19.08	Peak	203.00	100	Horizontal	Pass
6**	6824.000	43.69	4.24	54.0	10.31	AV	203.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-03-02_14.25.11

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 52%RH

Test Engineer: XCJ


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26020002-01#02

R_Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

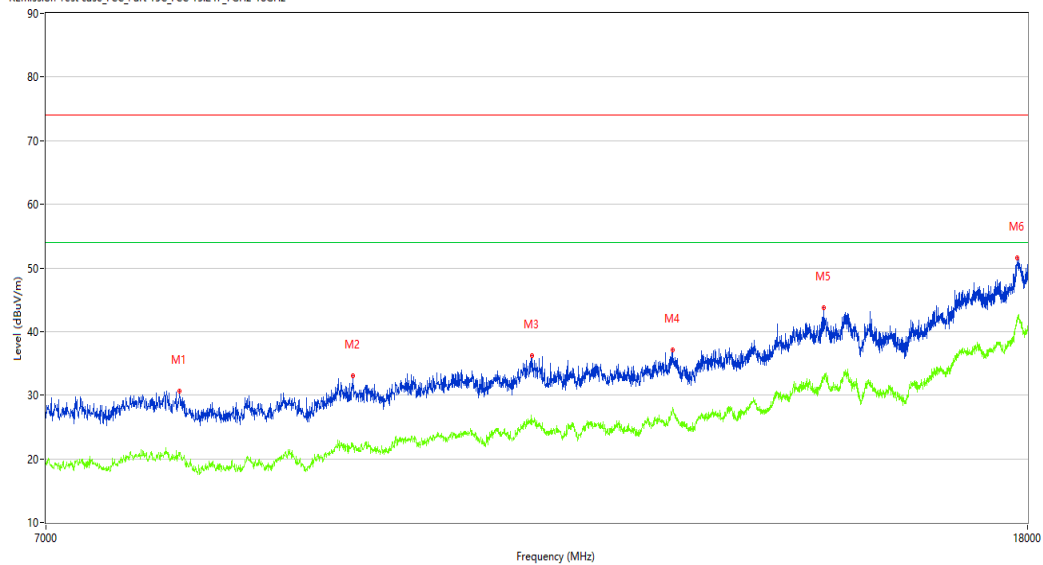

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7959.750	30.62	1.02	74.0	43.38	Peak	7.50	100	Horizontal	Pass
1**	7959.750	21.01	1.02	54.0	32.99	AV	7.50	100	Horizontal	Pass
2	9406.250	32.98	1.76	74.0	41.02	Peak	195.80	100	Horizontal	Pass
2**	9406.250	22.09	1.76	54.0	31.91	AV	195.80	100	Horizontal	Pass
3	11177.250	36.21	3.80	74.0	37.79	Peak	133.60	100	Horizontal	Pass
3**	11177.250	26.28	3.80	54.0	27.72	AV	133.60	100	Horizontal	Pass
4	12791.500	37.11	5.80	74.0	36.89	Peak	195.80	100	Horizontal	Pass
4**	12791.500	27.50	5.80	54.0	26.50	AV	195.80	100	Horizontal	Pass
5	14799.000	43.79	11.46	74.0	30.21	Peak	71.80	100	Horizontal	Pass
5**	14799.000	33.06	11.46	54.0	20.94	AV	71.80	100	Horizontal	Pass
6	17824.000	51.53	18.38	74.0	22.47	Peak	360.00	100	Horizontal	Pass
6**	17824.000	42.19	18.38	54.0	11.81	AV	360.00	100	Horizontal	Pass

High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-03-02_13.43.25

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

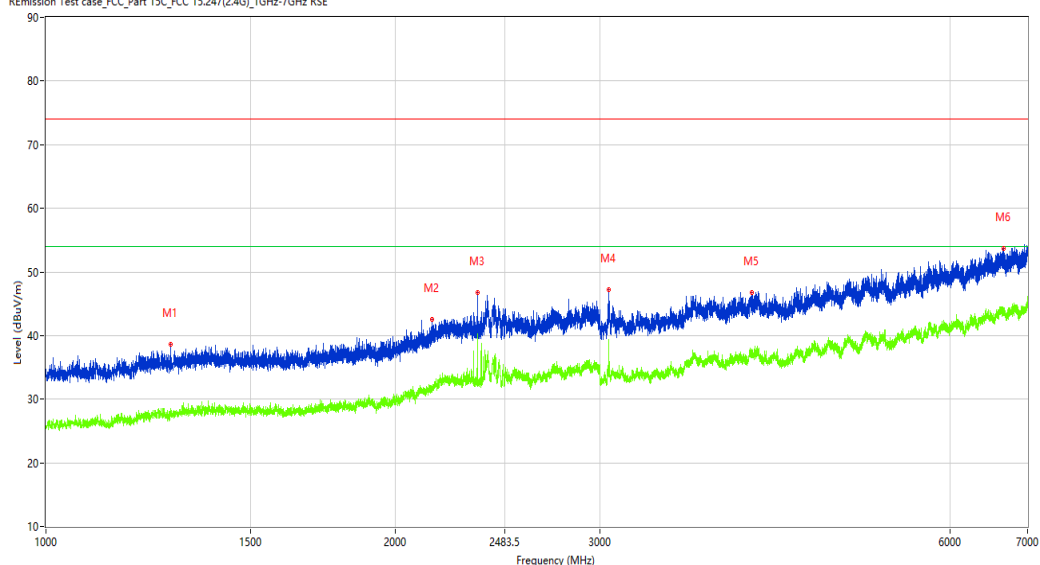

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1280.250	38.64	-13.85	74.0	35.36	Peak	295.20	100	Vertical	Pass
1**	1280.250	28.07	-13.85	54.0	25.93	AV	295.20	100	Vertical	Pass
2	2151.000	42.51	-9.48	74.0	31.49	Peak	103.50	100	Vertical	Pass
2**	2151.000	31.96	-9.48	54.0	22.04	AV	103.50	100	Vertical	Pass
3	2351.750	46.79	-8.65	74.0	27.21	Peak	295.20	100	Vertical	Pass
3**	2351.750	39.73	-8.65	54.0	14.27	AV	295.20	100	Vertical	Pass
4	3050.000	47.17	-4.72	74.0	26.83	Peak	155.80	100	Vertical	Pass
4**	3050.000	39.37	-4.72	54.0	14.63	AV	155.80	100	Vertical	Pass
5	4052.000	46.72	-1.72	74.0	27.28	Peak	301.70	100	Vertical	Pass
5**	4052.000	37.47	-1.72	54.0	16.53	AV	301.70	100	Vertical	Pass
6	6674.500	53.69	3.71	74.0	20.31	Peak	85.50	100	Vertical	Pass
6**	6674.500	44.15	3.71	54.0	9.85	AV	85.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-02_13.48.54

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

R_Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

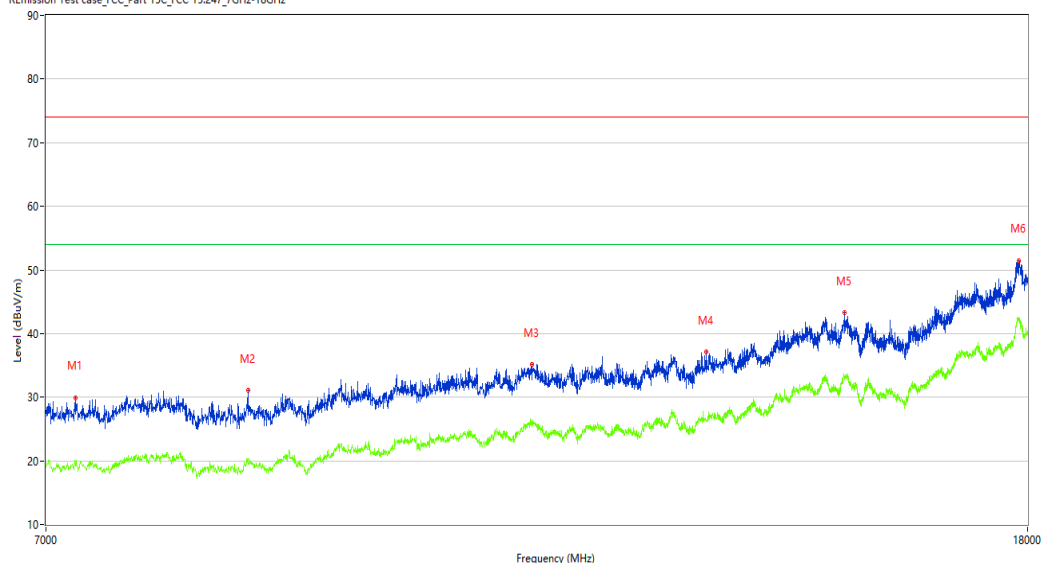

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7203.500	29.94	-0.05	74.0	44.06	Peak	314.10	100	Vertical	Pass
1**	7203.500	20.01	-0.05	54.0	33.99	AV	314.10	100	Vertical	Pass
2	8501.500	31.14	-0.51	74.0	42.86	Peak	249.80	100	Vertical	Pass
2**	8501.500	20.41	-0.51	54.0	33.59	AV	249.80	100	Vertical	Pass
3	11171.750	35.17	3.86	74.0	38.83	Peak	15.30	100	Vertical	Pass
3**	11171.750	26.17	3.86	54.0	27.83	AV	15.30	100	Vertical	Pass
4	13217.750	37.08	5.29	74.0	36.92	Peak	314.10	100	Vertical	Pass
4**	13217.750	26.31	5.29	54.0	27.69	AV	314.10	100	Vertical	Pass
5	15096.001	43.34	10.41	74.0	30.66	Peak	74.50	100	Vertical	Pass
5**	15096.001	33.37	10.41	54.0	20.63	AV	74.50	100	Vertical	Pass
6	17846.000	51.48	18.76	74.0	22.52	Peak	360.00	100	Vertical	Pass
6**	17846.000	42.50	18.76	54.0	11.50	AV	360.00	100	Vertical	Pass

Band edge -Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2026-03-02_10.27.53

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

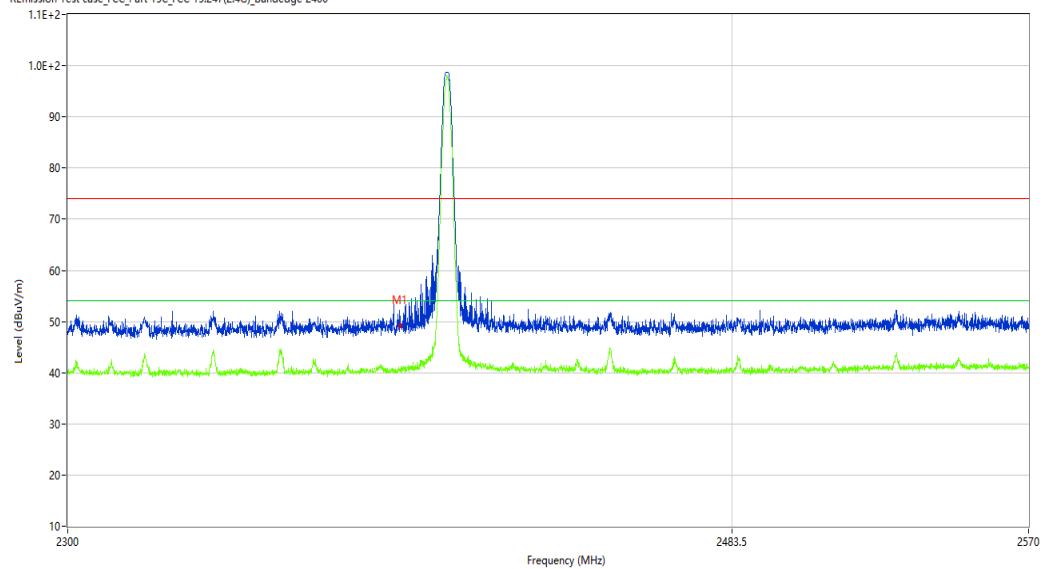

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.39	-10.58	74.0	24.61	Peak	220.36	100	H	Pass
1**	2390.000	40.40	-10.58	54.0	13.60	AV	220.36	100	H	Pass

Band edge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2026-03-02_10.54.34

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

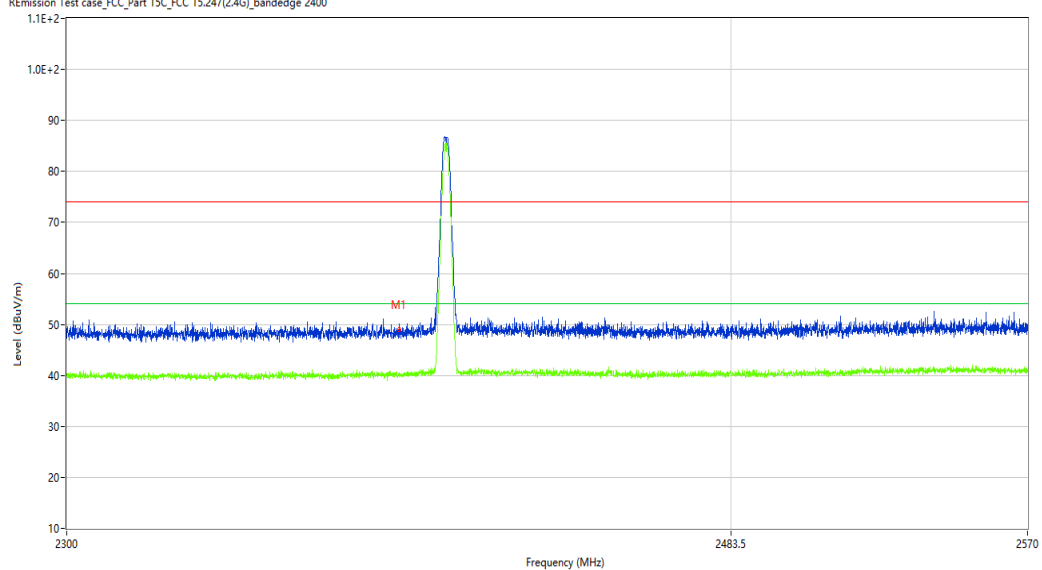

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.35	-10.58	74.0	24.65	Peak	272.43	100	V	Pass
1**	2390.000	40.40	-10.58	54.0	13.60	AV	272.43	100	V	Pass

Band edge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2026-03-02_13.25.12

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

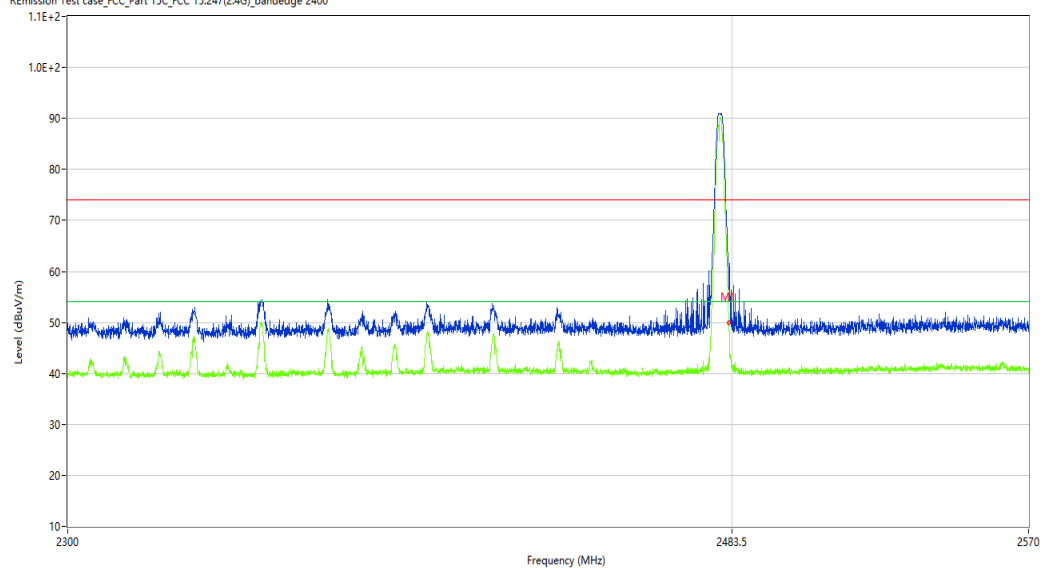

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	49.93	-10.56	74.0	24.07	Peak	311.90	100	H	Pass
1**	2483.500	40.89	-10.56	54.0	13.11	AV	311.90	100	H	Pass

-Band edge -High channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2026-03-02_13.41.47

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020002-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

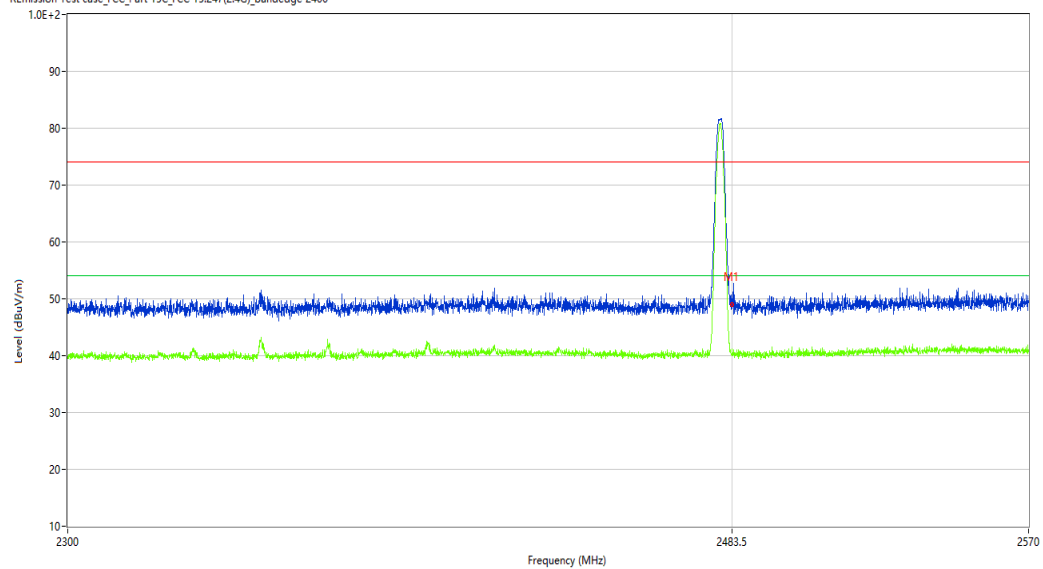

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.76	-10.56	74.0	25.24	Peak	232.80	100	V	Pass
1**	2483.500	40.55	-10.56	54.0	13.45	AV	232.80	100	V	Pass