

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-02-28_16.45.35

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

RÉmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

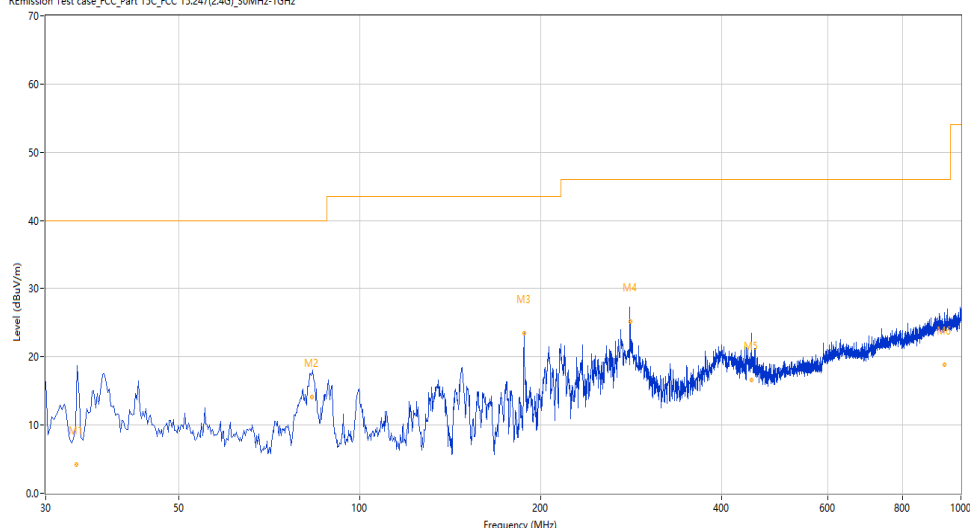

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.785	26.40	-26.95	40.0	13.60	Peak	39.80	256	Horizontal	Pass
1*	33.785	4.17	-26.95	40.0	35.83	QP	39.80	256	Horizontal	Pass
2	83.107	19.68	-29.55	40.0	20.32	Peak	0.00	164	Horizontal	Pass
2*	83.107	14.08	-29.55	40.0	25.92	QP	0.00	164	Horizontal	Pass
3	187.678	24.98	-26.02	43.5	18.52	Peak	94.10	104	Horizontal	Pass
3*	187.678	23.47	-26.02	43.5	20.03	QP	94.10	104	Horizontal	Pass
4	281.491	28.81	-22.47	46.0	17.19	Peak	65.10	100	Horizontal	Pass
4*	281.491	25.21	-22.47	46.0	20.79	QP	65.10	100	Horizontal	Pass
5	448.366	22.02	-18.30	46.0	23.98	Peak	86.70	213	Horizontal	Pass
5*	448.366	16.59	-18.30	46.0	29.41	QP	86.70	213	Horizontal	Pass
6	940.127	25.80	-7.94	46.0	20.20	Peak	360.00	218	Horizontal	Pass
6*	940.127	18.81	-7.94	46.0	27.19	QP	360.00	218	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-02-28_16.34.44

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

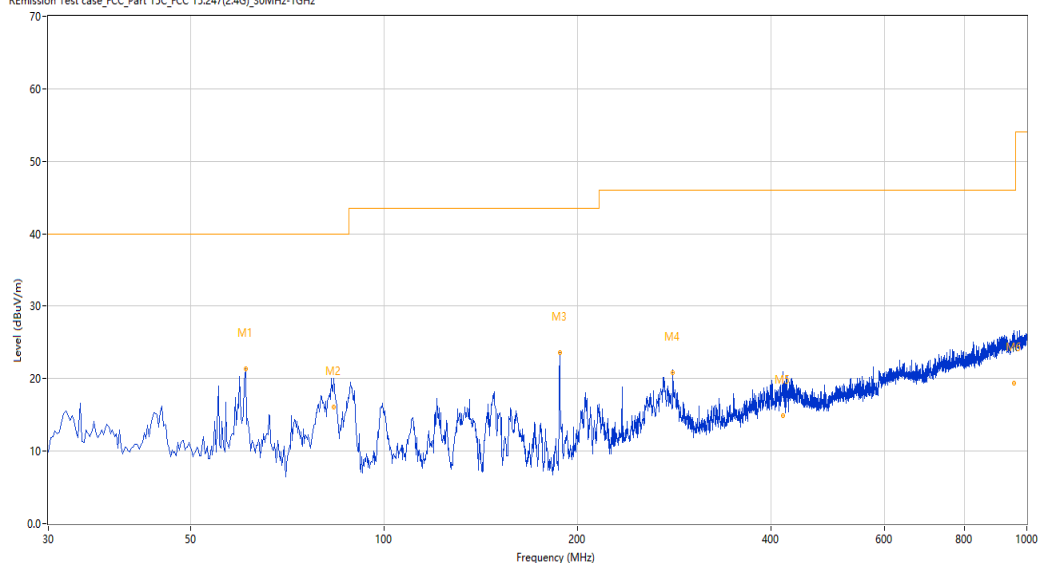

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	60.825	25.39	-25.13	40.0	14.61	Peak	0.00	102	Vertical	Pass
1*	60.825	21.34	-25.13	40.0	18.66	QP	0.00	102	Vertical	Pass
2	83.434	21.99	-29.55	40.0	18.01	Peak	210.60	109	Vertical	Pass
2*	83.434	16.07	-29.55	40.0	23.93	QP	210.60	109	Vertical	Pass
3	187.662	25.18	-26.02	43.5	18.32	Peak	239.60	102	Vertical	Pass
3*	187.662	23.55	-26.02	43.5	19.95	QP	239.60	102	Vertical	Pass
4	281.463	23.30	-22.47	46.0	22.70	Peak	181.90	172	Vertical	Pass
4*	281.463	20.78	-22.47	46.0	25.22	QP	181.90	172	Vertical	Pass
5	417.461	21.10	-18.64	46.0	24.90	Peak	293.90	195	Vertical	Pass
5*	417.461	14.92	-18.64	46.0	31.08	QP	293.90	195	Vertical	Pass
6	954.799	25.78	-7.41	46.0	20.22	Peak	40.10	109	Vertical	Pass
6*	954.799	19.33	-7.41	46.0	26.67	QP	40.10	109	Vertical	Pass

1-18G

Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-02-28_15.44.05

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

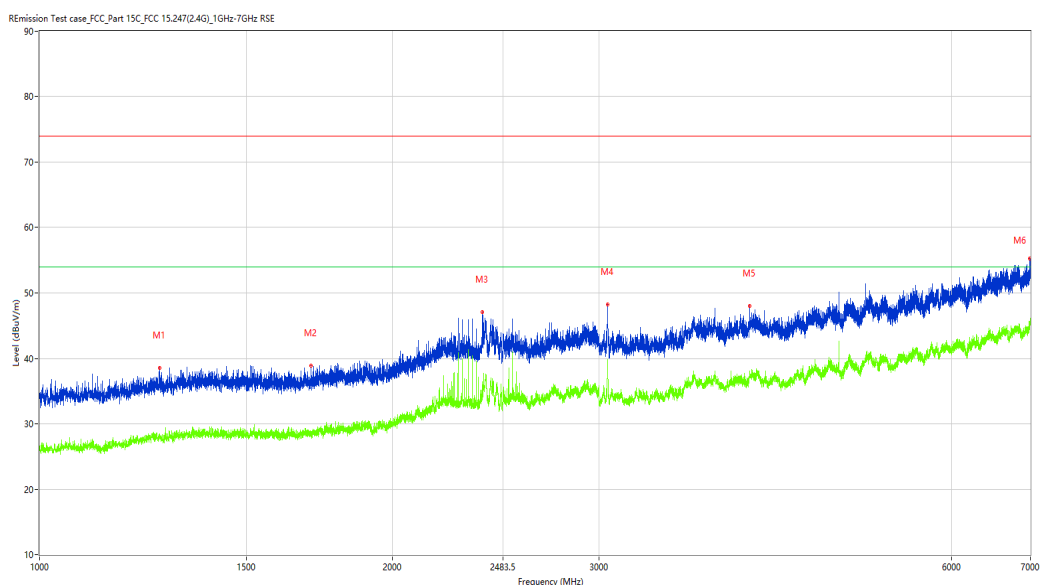

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1266.250	38.58	-13.97	74.0	35.42	Peak	359.80	100	Horizontal	Pass
1**	1266.250	27.75	-13.97	54.0	26.25	AV	359.80	100	Horizontal	Pass
2	1703.250	38.90	-13.46	74.0	35.10	Peak	249.90	100	Horizontal	Pass
2**	1703.250	28.79	-13.46	54.0	25.21	AV	249.90	100	Horizontal	Pass
3	2385.750	47.12	-7.64	74.0	26.88	Peak	260.70	100	Horizontal	Pass
3**	2385.750	33.63	-7.64	54.0	20.37	AV	260.70	100	Horizontal	Pass
4	3050.000	48.28	-4.72	74.0	25.72	Peak	2.60	100	Horizontal	Pass
4**	3050.000	39.82	-4.72	54.0	14.18	AV	2.60	100	Horizontal	Pass
5	4032.000	47.99	-1.93	74.0	26.01	Peak	222.40	100	Horizontal	Pass
5**	4032.000	37.05	-1.93	54.0	16.95	AV	222.40	100	Horizontal	Pass
6	6987.500	55.30	4.51	74.0	18.70	Peak	0.00	100	Horizontal	Pass
6**	6987.500	44.83	4.51	54.0	9.17	AV	0.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_17.16.43

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

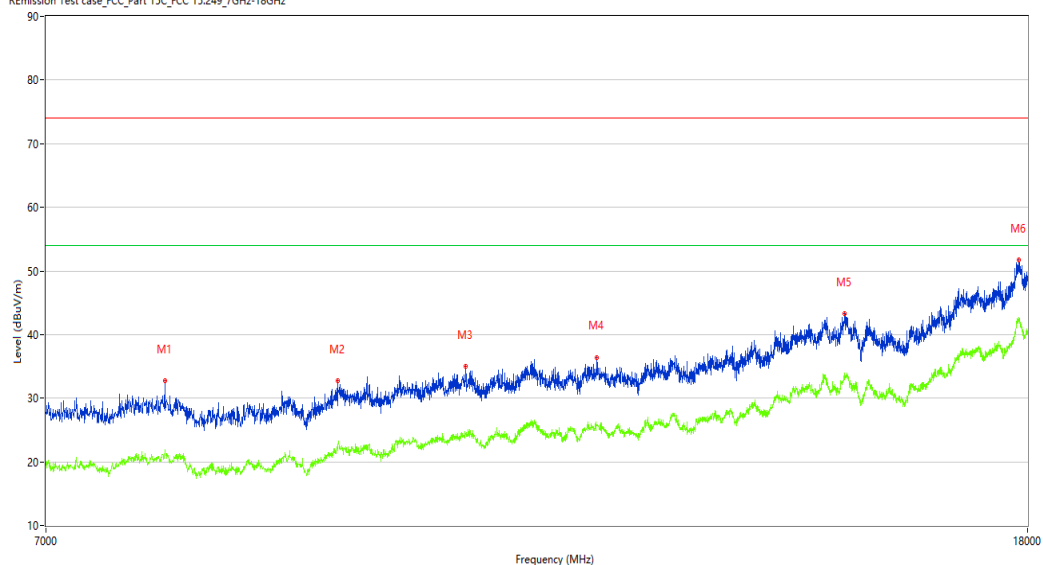

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7847.000	32.72	0.97	74.0	41.28	Peak	360.00	100	Horizontal	Pass
1**	7847.000	21.88	0.97	54.0	32.12	AV	360.00	100	Horizontal	Pass
2	9268.750	32.74	1.65	74.0	41.26	Peak	62.20	100	Horizontal	Pass
2**	9268.750	22.86	1.65	54.0	31.14	AV	62.20	100	Horizontal	Pass
3	10484.250	35.04	3.63	74.0	38.96	Peak	243.00	100	Horizontal	Pass
3**	10484.250	24.37	3.63	54.0	29.63	AV	243.00	100	Horizontal	Pass
4	11892.250	36.42	4.17	74.0	37.58	Peak	3.80	100	Horizontal	Pass
4**	11892.250	25.61	4.17	54.0	28.39	AV	3.80	100	Horizontal	Pass
5	15096.001	43.31	10.41	74.0	30.69	Peak	360.00	100	Horizontal	Pass
5**	15096.001	33.57	10.41	54.0	20.43	AV	360.00	100	Horizontal	Pass
6	17848.750	51.75	18.72	74.0	22.25	Peak	62.20	100	Horizontal	Pass
6**	17848.750	42.70	18.72	54.0	11.30	AV	62.20	100	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-02-28_13.55.28

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 52%RH

Test Engineer: XCJ


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26020003-01#02

REmission Test case_FCC_Part 15C_FCC 15.249(2.4G)_1GHz-7GHz

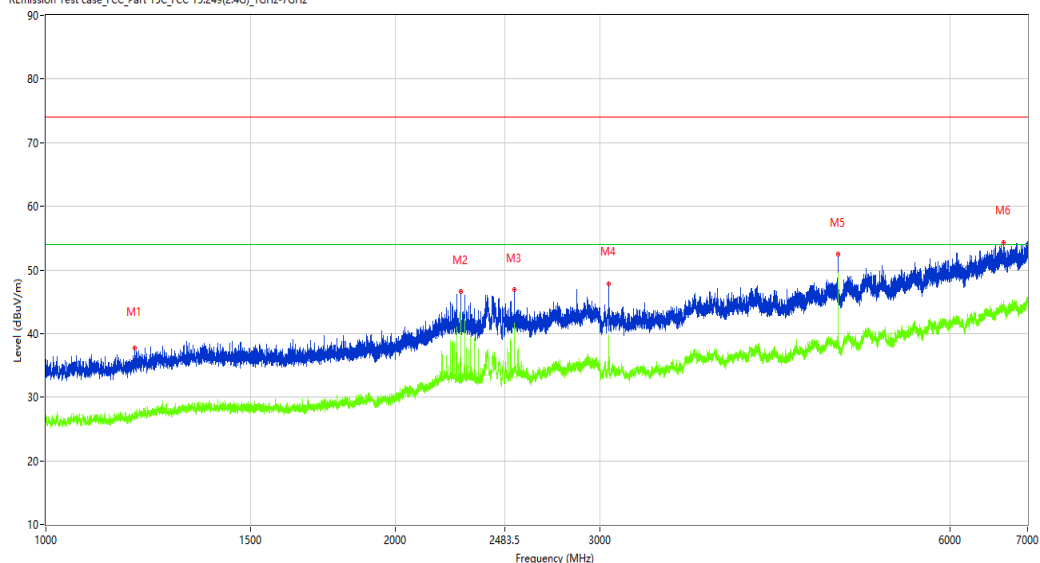

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1191.500	37.72	-14.51	74.0	36.28	Peak	307.50	100	Vertical	Pass
1**	1191.500	27.41	-14.51	54.0	26.59	AV	307.50	100	Vertical	Pass
2	2275.250	46.56	-8.42	74.0	27.44	Peak	0.00	100	Vertical	Pass
2**	2275.250	42.99	-8.42	54.0	11.01	AV	0.00	100	Vertical	Pass
3	2531.000	46.86	-7.38	74.0	27.14	Peak	0.30	100	Vertical	Pass
3**	2531.000	41.64	-7.38	54.0	12.36	AV	0.30	100	Vertical	Pass
4	3050.500	47.87	-5.39	74.0	26.13	Peak	137.60	100	Vertical	Pass
4**	3050.500	39.64	-5.39	54.0	14.36	AV	137.60	100	Vertical	Pass
5	4805.500	52.46	-1.62	74.0	21.54	Peak	285.70	100	Vertical	Pass
5**	4805.500	46.69	-1.62	54.0	7.31	AV	285.70	100	Vertical	Pass
6	6679.500	54.28	3.70	74.0	19.72	Peak	53.50	100	Vertical	Pass
6**	6679.500	44.33	3.70	54.0	9.67	AV	53.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_16.27.11

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

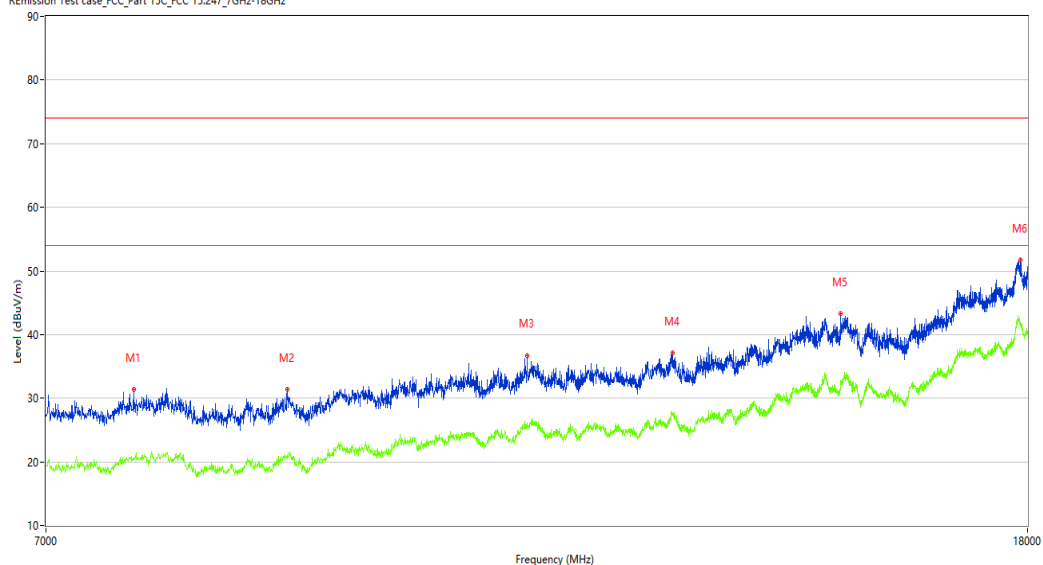

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7616.000	31.45	-0.13	74.0	42.55	Peak	290.40	100	Vertical	Pass
1**	7616.000	20.25	-0.13	54.0	33.75	AV	290.40	100	Vertical	Pass
2	8831.500	31.39	-0.09	74.0	42.61	Peak	231.20	100	Vertical	Pass
2**	8831.500	20.96	-0.09	54.0	33.04	AV	231.20	100	Vertical	Pass
3	11122.250	36.73	4.11	74.0	37.27	Peak	109.10	100	Vertical	Pass
3**	11122.250	26.11	4.11	54.0	27.89	AV	109.10	100	Vertical	Pass
4	12791.500	37.08	5.80	74.0	36.92	Peak	173.60	100	Vertical	Pass
4**	12791.500	27.66	5.80	54.0	26.34	AV	173.60	100	Vertical	Pass
5	15038.250	43.27	10.19	74.0	30.73	Peak	109.10	100	Vertical	Pass
5**	15038.250	32.80	10.19	54.0	21.20	AV	109.10	100	Vertical	Pass
6	17881.750	51.72	18.23	74.0	22.28	Peak	350.30	100	Vertical	Pass
6**	17881.750	41.64	18.23	54.0	12.36	AV	350.30	100	Vertical	Pass

18-25G

Low channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-03-20_10.17.56

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

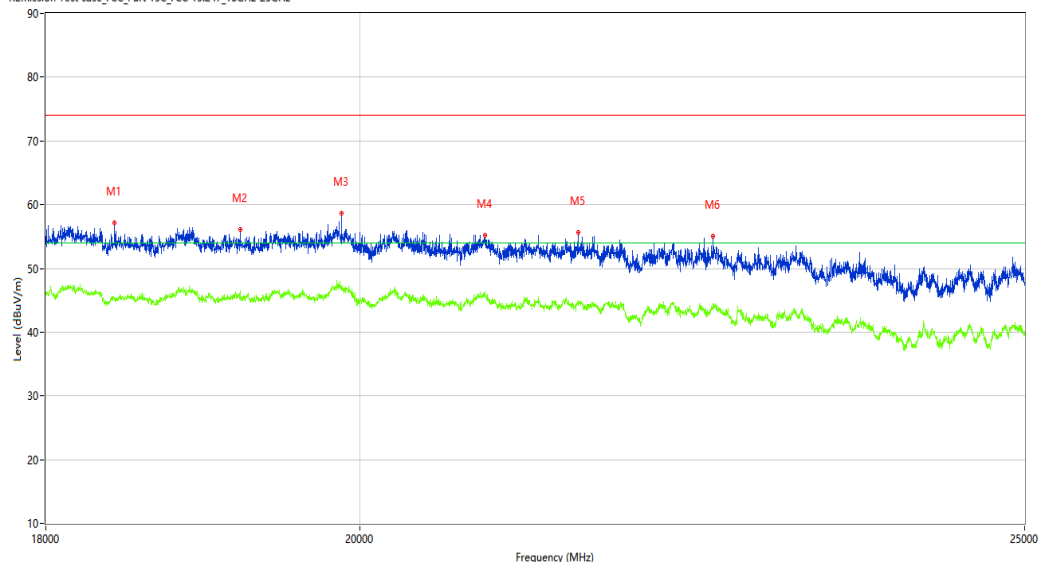

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18420.001	57.16	18.04	74.0	16.84	Peak	0.00	100	Horizontal	Pass
1**	18420.001	45.08	18.04	54.0	8.92	AV	0.00	100	Horizontal	Pass
2	19212.751	56.09	17.89	74.0	17.91	Peak	13.68	100	Horizontal	Pass
2**	19212.751	46.41	17.89	54.0	7.59	AV	13.68	100	Horizontal	Pass
3	19877.751	58.60	17.49	74.0	15.40	Peak	13.68	100	Horizontal	Pass
3**	19877.751	47.09	17.49	54.0	6.91	AV	13.68	100	Horizontal	Pass
4	20856.001	55.25	16.55	74.0	18.75	Peak	13.68	100	Horizontal	Pass
4**	20856.001	46.11	16.55	54.0	7.89	AV	13.68	100	Horizontal	Pass
5	21521.000	55.63	15.88	74.0	18.37	Peak	6.48	100	Horizontal	Pass
5**	21521.000	44.99	15.88	54.0	9.01	AV	6.48	100	Horizontal	Pass
6	22516.750	55.00	15.22	74.0	19.00	Peak	9.00	100	Horizontal	Pass
6**	22516.750	43.67	15.22	54.0	10.33	AV	9.00	100	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-03-20_10.22.57

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

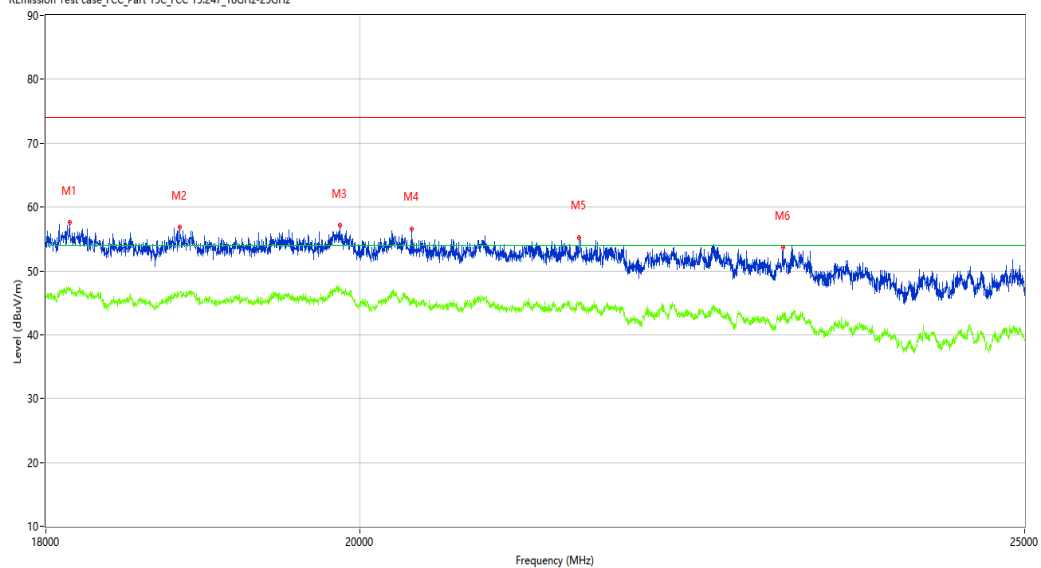

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18143.500	57.64	18.50	74.0	16.36	Peak	6.84	100	Vertical	Pass
1**	18143.500	46.90	18.50	54.0	7.10	AV	6.84	100	Vertical	Pass
2	18827.749	56.90	17.80	74.0	17.10	Peak	0.00	100	Vertical	Pass
2**	18827.749	46.70	17.80	54.0	7.30	AV	0.00	100	Vertical	Pass
3	19867.251	57.21	17.49	74.0	16.79	Peak	0.00	100	Vertical	Pass
3**	19867.251	47.32	17.49	54.0	6.68	AV	0.00	100	Vertical	Pass
4	20353.749	56.59	17.12	74.0	17.41	Peak	2.16	100	Vertical	Pass
4**	20353.749	45.34	17.12	54.0	8.66	AV	2.16	100	Vertical	Pass
5	21526.249	55.14	15.88	74.0	18.86	Peak	5.76	100	Vertical	Pass
5**	21526.249	44.59	15.88	54.0	9.41	AV	5.76	100	Vertical	Pass
6	23054.000	53.64	14.06	74.0	20.36	Peak	5.76	100	Vertical	Pass
6**	23054.000	42.65	14.06	54.0	11.35	AV	5.76	100	Vertical	Pass

Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 26-02-28_15:57:14

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 52%RH

Test Engineer: XCJ


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26020003-01#02

RÉmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

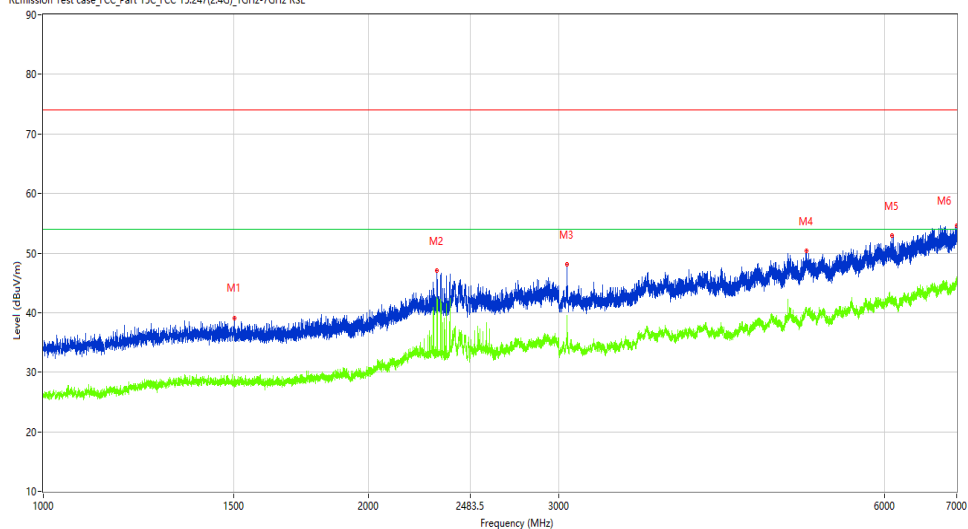

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1502.250	39.13	-13.67	74.0	34.87	Peak	164.70	100	Horizontal	Pass
1**	1502.250	28.16	-13.67	54.0	25.84	AV	164.70	100	Horizontal	Pass
2	2313.750	47.03	-8.29	74.0	26.97	Peak	95.80	100	Horizontal	Pass
2**	2313.750	41.69	-8.29	54.0	12.31	AV	95.80	100	Horizontal	Pass
3	3050.000	48.09	-4.72	74.0	25.91	Peak	194.10	100	Horizontal	Pass
3**	3050.000	39.60	-4.72	54.0	14.40	AV	194.10	100	Horizontal	Pass
4	5082.500	50.35	0.92	74.0	23.65	Peak	297.90	100	Horizontal	Pass
4**	5082.500	40.55	0.92	54.0	13.45	AV	297.90	100	Horizontal	Pass
5	6097.500	52.89	2.24	74.0	21.11	Peak	108.10	100	Horizontal	Pass
5**	6097.500	42.04	2.24	54.0	11.96	AV	108.10	100	Horizontal	Pass
6	6997.000	54.61	4.78	74.0	19.39	Peak	213.80	100	Horizontal	Pass
6**	6997.000	45.24	4.78	54.0	8.76	AV	213.80	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_17.18.06

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

REmission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

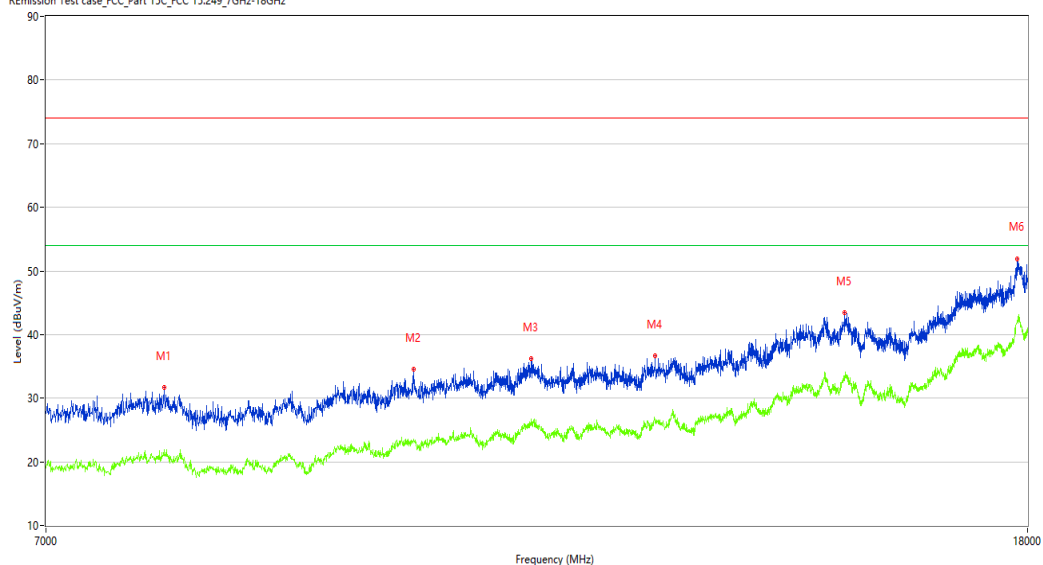

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7841.500	31.69	0.92	74.0	42.31	Peak	294.10	100	Horizontal	Pass
1**	7841.500	21.91	0.92	54.0	32.09	AV	294.10	100	Horizontal	Pass
2	9970.000	34.61	3.49	74.0	39.39	Peak	44.00	100	Horizontal	Pass
2**	9970.000	23.53	3.49	54.0	30.47	AV	44.00	100	Horizontal	Pass
3	11163.500	36.20	3.95	74.0	37.80	Peak	294.10	100	Horizontal	Pass
3**	11163.500	25.91	3.95	54.0	28.09	AV	294.10	100	Horizontal	Pass
4	12577.000	36.65	5.37	74.0	37.35	Peak	294.10	100	Horizontal	Pass
4**	12577.000	26.11	5.37	54.0	27.89	AV	294.10	100	Horizontal	Pass
5	15096.001	43.37	10.41	74.0	30.63	Peak	111.70	100	Horizontal	Pass
5**	15096.001	33.45	10.41	54.0	20.55	AV	111.70	100	Horizontal	Pass
6	17824.000	51.94	18.38	74.0	22.06	Peak	44.00	100	Horizontal	Pass
6**	17824.000	42.28	18.38	54.0	11.72	AV	44.00	100	Horizontal	Pass

Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-02-28_14.23.26

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 52%RH

Test Engineer: XCJ


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26020003-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

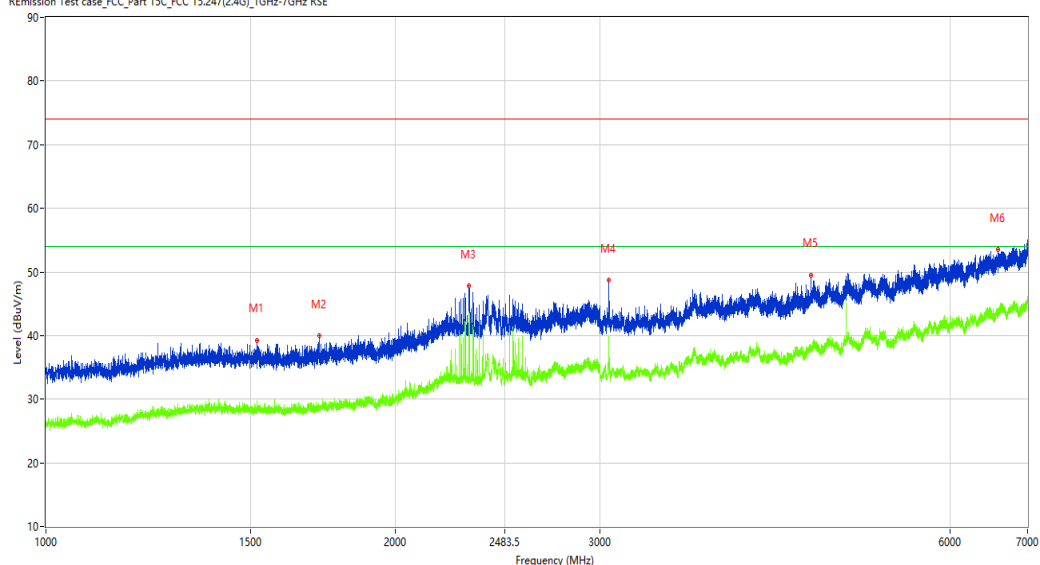

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1518.500	39.29	-13.78	74.0	34.71	Peak	303.00	100	Vertical	Pass
1**	1518.500	29.42	-13.78	54.0	24.58	AV	303.00	100	Vertical	Pass
2	1718.250	39.91	-13.10	74.0	34.09	Peak	272.90	100	Vertical	Pass
2**	1718.250	28.44	-13.10	54.0	25.56	AV	272.90	100	Vertical	Pass
3	2313.750	47.75	-8.29	74.0	26.25	Peak	272.90	100	Vertical	Pass
3**	2313.750	43.12	-8.29	54.0	10.88	AV	272.90	100	Vertical	Pass
4	3050.000	48.76	-4.72	74.0	25.24	Peak	359.90	100	Vertical	Pass
4**	3050.000	39.79	-4.72	54.0	14.21	AV	359.90	100	Vertical	Pass
5	4559.000	49.43	-1.09	74.0	24.57	Peak	359.90	100	Vertical	Pass
5**	4559.000	38.48	-1.09	54.0	15.52	AV	359.90	100	Vertical	Pass
6	6599.000	53.51	3.36	74.0	20.49	Peak	359.90	100	Vertical	Pass
6**	6599.000	43.40	3.36	54.0	10.60	AV	359.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_16.29.42

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

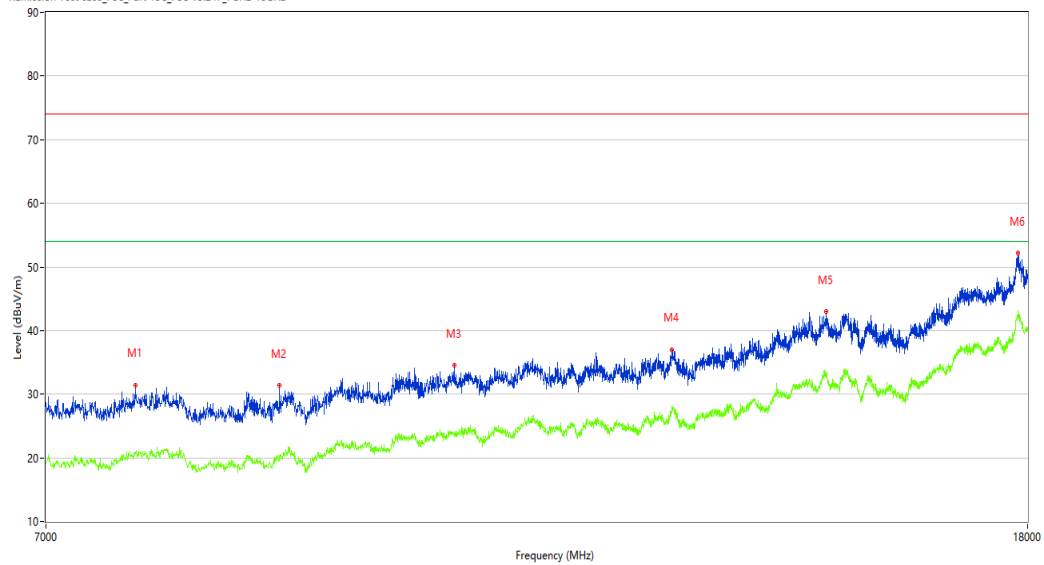

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7627.000	31.47	0.25	74.0	42.53	Peak	56.70	100	Vertical	Pass
1**	7627.000	20.62	0.25	54.0	33.38	AV	56.70	100	Vertical	Pass
2	8762.750	31.35	-0.01	74.0	42.65	Peak	56.70	100	Vertical	Pass
2**	8762.750	19.73	-0.01	54.0	34.27	AV	56.70	100	Vertical	Pass
3	10368.750	34.57	3.72	74.0	39.43	Peak	246.10	100	Vertical	Pass
3**	10368.750	23.90	3.72	54.0	30.10	AV	246.10	100	Vertical	Pass
4	12783.250	37.03	5.82	74.0	36.97	Peak	315.30	100	Vertical	Pass
4**	12783.250	27.21	5.82	54.0	26.79	AV	315.30	100	Vertical	Pass
5	14829.250	43.00	11.29	74.0	31.00	Peak	56.70	100	Vertical	Pass
5**	14829.250	32.79	11.29	54.0	21.21	AV	56.70	100	Vertical	Pass
6	17829.501	52.22	18.41	74.0	21.78	Peak	2.80	100	Vertical	Pass
6**	17829.501	42.46	18.41	54.0	11.54	AV	2.80	100	Vertical	Pass

High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-02-28_16.10.34

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

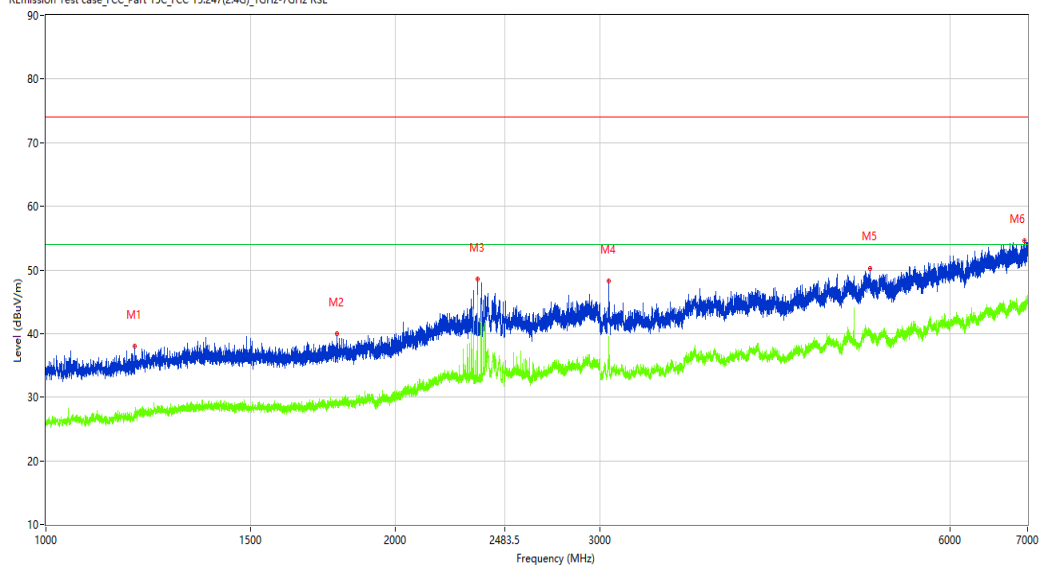

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1193.000	38.02	-14.51	74.0	35.98	Peak	360.00	100	Horizontal	Pass
1**	1193.000	27.14	-14.51	54.0	26.86	AV	360.00	100	Horizontal	Pass
2	1781.500	40.04	-12.90	74.0	33.96	Peak	359.70	100	Horizontal	Pass
2**	1781.500	29.10	-12.90	54.0	24.90	AV	359.70	100	Horizontal	Pass
3	2352.000	48.57	-8.65	74.0	25.43	Peak	86.40	100	Horizontal	Pass
3**	2352.000	45.98	-8.65	54.0	8.02	AV	86.40	100	Horizontal	Pass
4	3050.000	48.30	-4.72	74.0	25.70	Peak	0.00	100	Horizontal	Pass
4**	3050.000	39.54	-4.72	54.0	14.46	AV	0.00	100	Horizontal	Pass
5	5121.000	50.24	0.30	74.0	23.76	Peak	311.70	100	Horizontal	Pass
5**	5121.000	40.37	0.30	54.0	13.63	AV	311.70	100	Horizontal	Pass
6	6958.500	54.59	4.08	74.0	19.41	Peak	0.00	100	Horizontal	Pass
6**	6958.500	44.05	4.08	54.0	9.95	AV	0.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-02-28_17.19.29

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

R Emission Test case_FCC_Part 15C_FCC 15.249.7GHz-18GHz

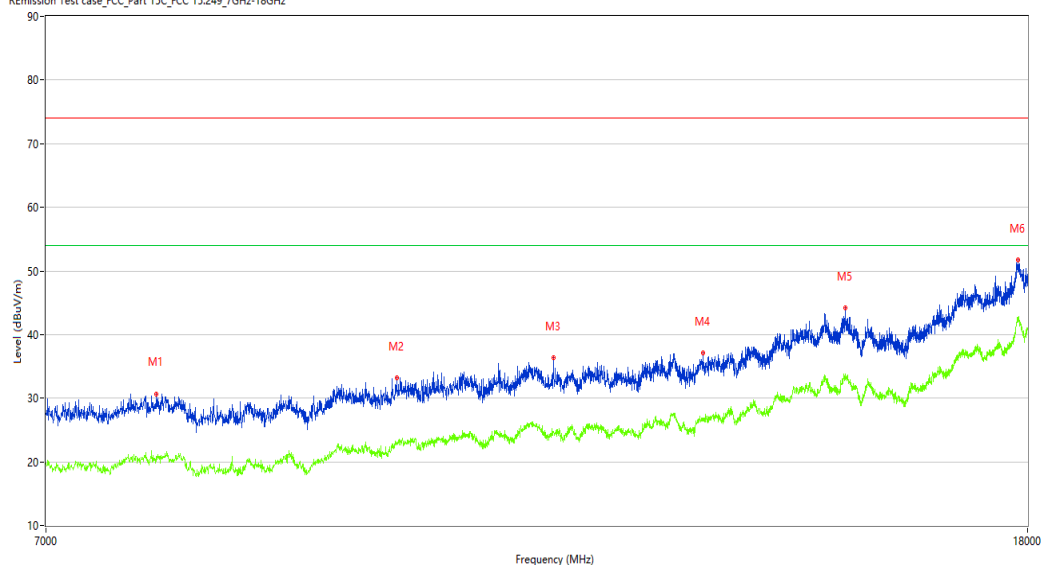

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7786.500	30.69	0.37	74.0	43.31	Peak	68.50	100	Horizontal	Pass
1**	7786.500	20.90	0.37	54.0	33.10	AV	68.50	100	Horizontal	Pass
2	9807.750	33.25	2.94	74.0	40.75	Peak	253.40	100	Horizontal	Pass
2**	9807.750	22.67	2.94	54.0	31.33	AV	253.40	100	Horizontal	Pass
3	11405.500	36.41	4.75	74.0	37.59	Peak	360.00	100	Horizontal	Pass
3**	11405.500	24.73	4.75	54.0	29.27	AV	360.00	100	Horizontal	Pass
4	13173.750	37.05	5.68	74.0	36.95	Peak	123.50	100	Horizontal	Pass
4**	13173.750	26.85	5.68	54.0	27.15	AV	123.50	100	Horizontal	Pass
5	15104.250	44.20	10.04	74.0	29.80	Peak	189.00	100	Horizontal	Pass
5**	15104.250	32.93	10.04	54.0	21.07	AV	189.00	100	Horizontal	Pass
6	17835.000	51.75	18.63	74.0	22.25	Peak	123.50	100	Horizontal	Pass
6**	17835.000	42.47	18.63	54.0	11.53	AV	123.50	100	Horizontal	Pass

High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-02-28_14.32.40

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

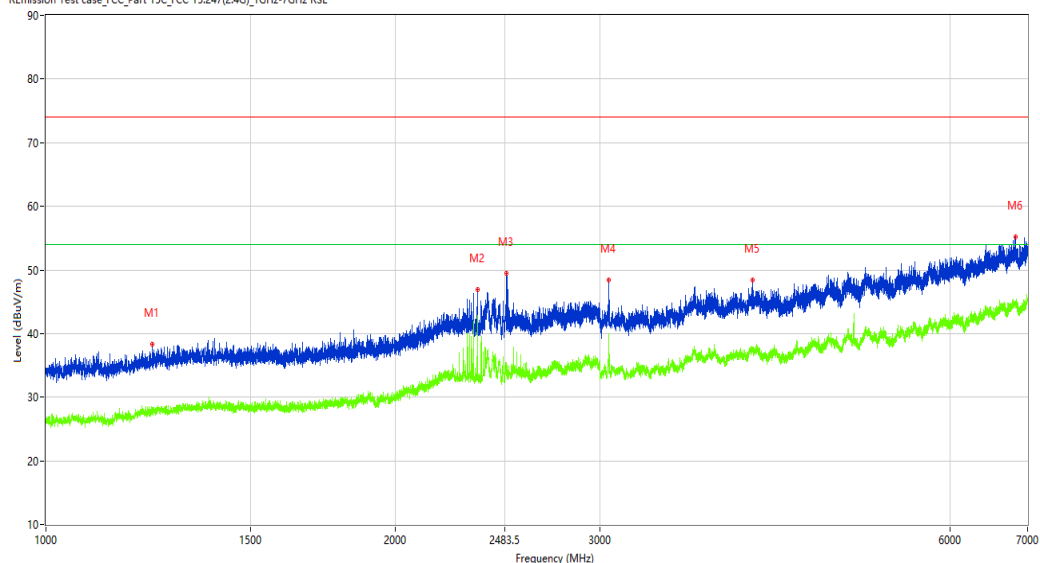

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1234.750	38.31	-14.04	74.0	35.69	Peak	312.30	100	Vertical	Pass
1**	1234.750	27.71	-14.04	54.0	26.29	AV	312.30	100	Vertical	Pass
2	2351.750	46.90	-8.65	74.0	27.10	Peak	91.30	100	Vertical	Pass
2**	2351.750	42.16	-8.65	54.0	11.84	AV	91.30	100	Vertical	Pass
3	2493.000	49.43	-7.31	74.0	24.57	Peak	286.30	100	Vertical	Pass
3**	2493.000	35.43	-7.31	54.0	18.57	AV	286.30	100	Vertical	Pass
4	3050.000	48.41	-4.72	74.0	25.59	Peak	279.70	100	Vertical	Pass
4**	3050.000	40.04	-4.72	54.0	13.96	AV	279.70	100	Vertical	Pass
5	4055.500	48.36	-1.67	74.0	25.64	Peak	38.20	100	Vertical	Pass
5**	4055.500	37.63	-1.67	54.0	16.37	AV	38.20	100	Vertical	Pass
6	6832.500	55.18	4.16	74.0	18.82	Peak	360.00	100	Vertical	Pass
6**	6832.500	44.71	4.16	54.0	9.29	AV	360.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-03-04_15.32.17

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

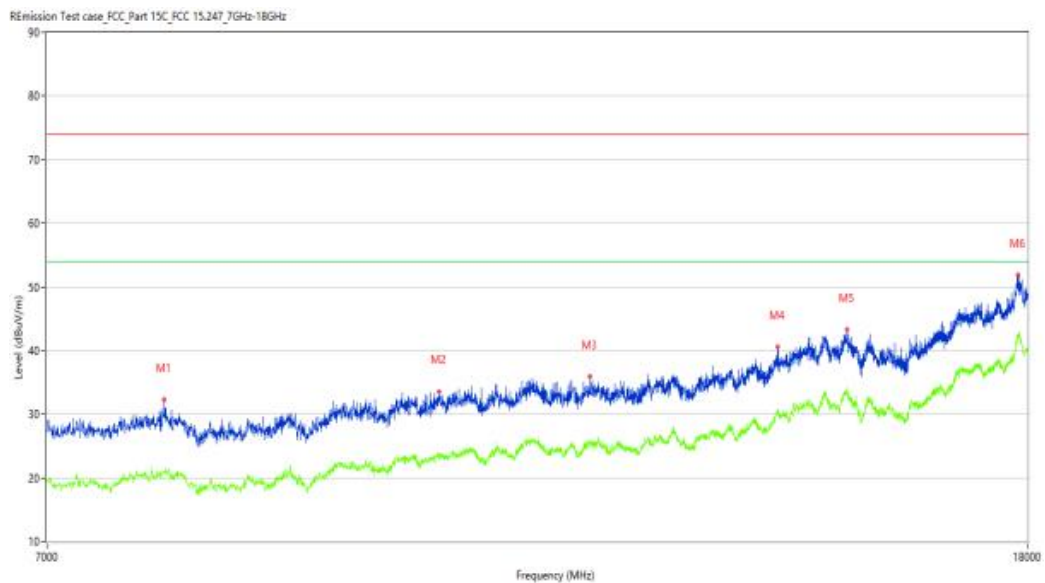

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7838.750	32.27	0.94	74.0	41.73	Peak	45.10	100	Vertical	Pass
1**	7838.750	20.99	0.94	54.0	33.01	AV	45.10	100	Vertical	Pass
2	10209.250	33.57	3.09	74.0	40.43	Peak	360.00	100	Vertical	Pass
2**	10209.250	23.77	3.09	54.0	30.23	AV	360.00	100	Vertical	Pass
3	11809.750	35.91	4.01	74.0	38.09	Peak	105.70	100	Vertical	Pass
3**	11809.750	25.49	4.01	54.0	28.51	AV	105.70	100	Vertical	Pass
4	14152.750	40.57	8.74	74.0	33.43	Peak	45.10	100	Vertical	Pass
4**	14152.750	30.80	8.74	54.0	23.20	AV	45.10	100	Vertical	Pass
5	15131.750	43.26	9.34	74.0	30.74	Peak	349.10	100	Vertical	Pass
5**	15131.750	34.20	9.34	54.0	19.80	AV	349.10	100	Vertical	Pass
6	17832.249	51.84	18.61	74.0	22.16	Peak	349.10	100	Vertical	Pass
6**	17832.249	42.09	18.61	54.0	11.91	AV	349.10	100	Vertical	Pass

Band edge -Low channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2026-02-28_15.33.20

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

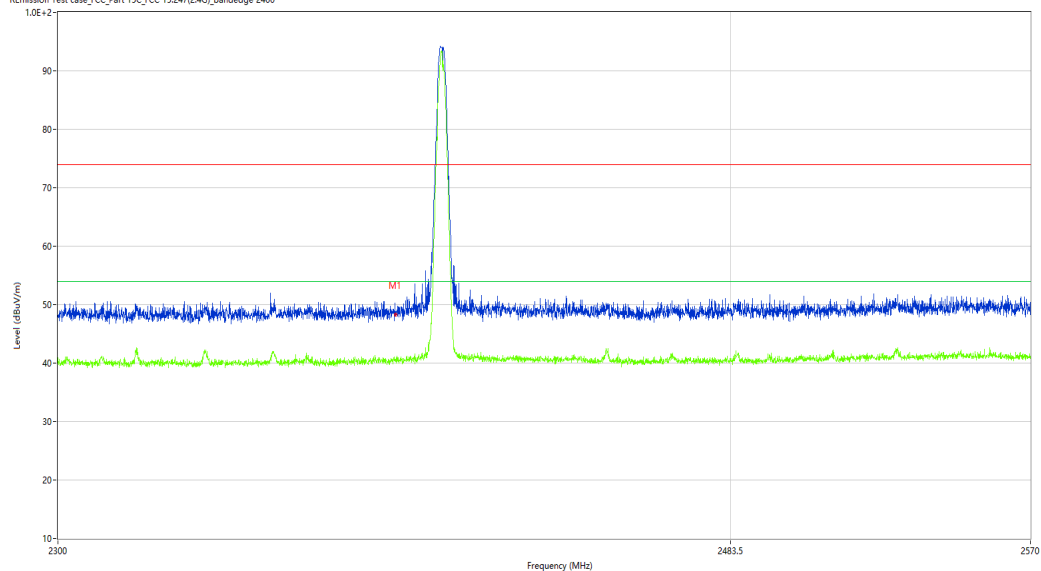

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.34	-10.58	74.0	25.66	Peak	311.59	100	H	Pass
1**	2390.000	40.85	-10.58	54.0	13.15	AV	311.59	100	H	Pass

Band edge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2026-02-28_16.23.16

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 52%RH

Test Engineer: XCJ


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26020003-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

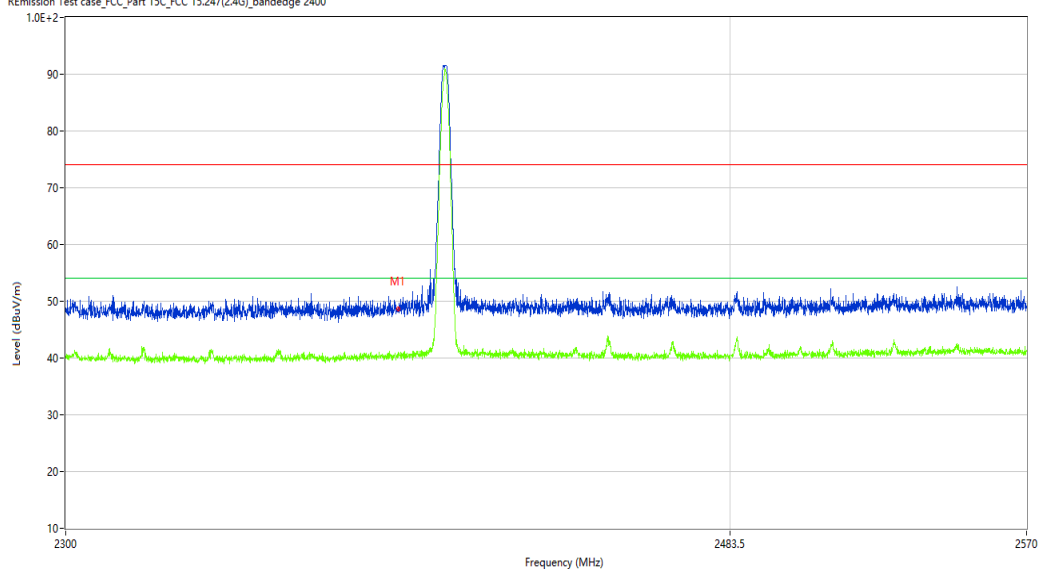

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.58	-10.58	74.0	25.42	Peak	181.49	100	V	Pass
1**	2390.000	40.33	-10.58	54.0	13.67	AV	181.49	100	V	Pass

Band edge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2026-03-04_15.43.18

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

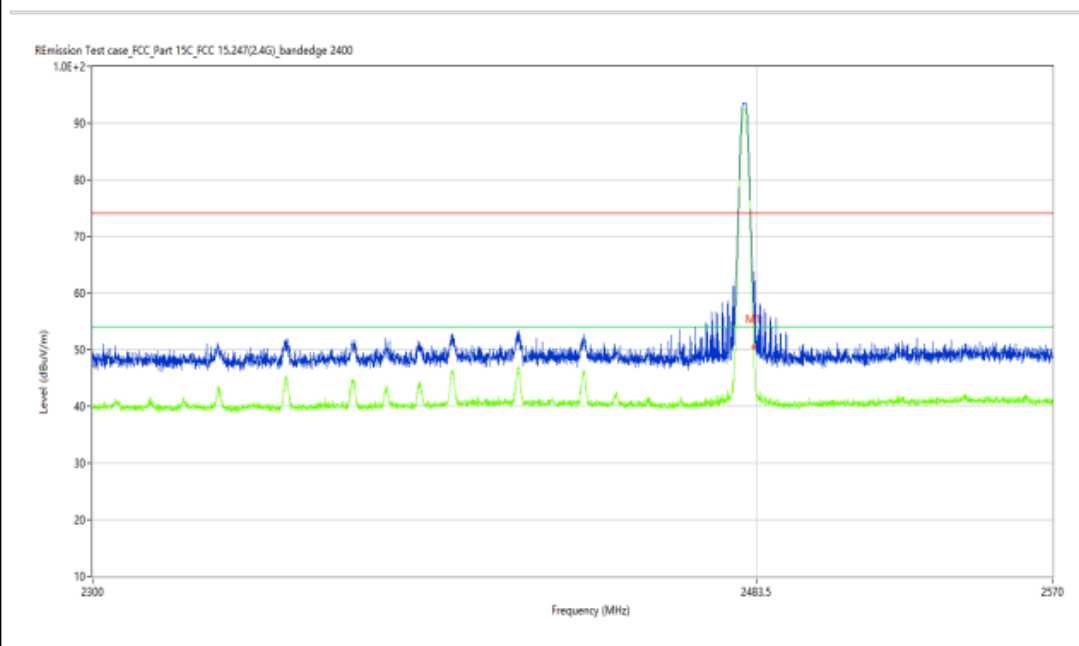

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.30	-10.56	74.0	23.70	Peak	23.11	100	H	Pass
1**	2483.500	41.55	-10.56	54.0	12.45	AV	23.11	100	H	Pass

Band edge -High channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2026-03-04_15.39.28

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 52%RH

Remark: DR-RSE01-E26020003-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

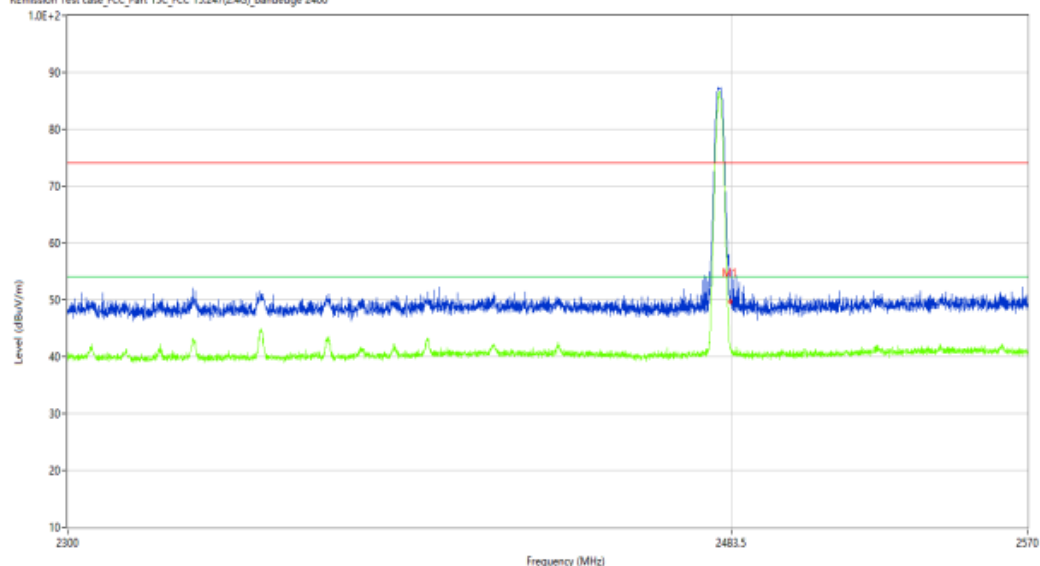

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	49.69	-10.56	74.0	24.31	Peak	102.02	100	V	Pass
1**	2483.500	40.82	-10.56	54.0	13.18	AV	102.02	100	V	Pass