

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_14.31.45

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

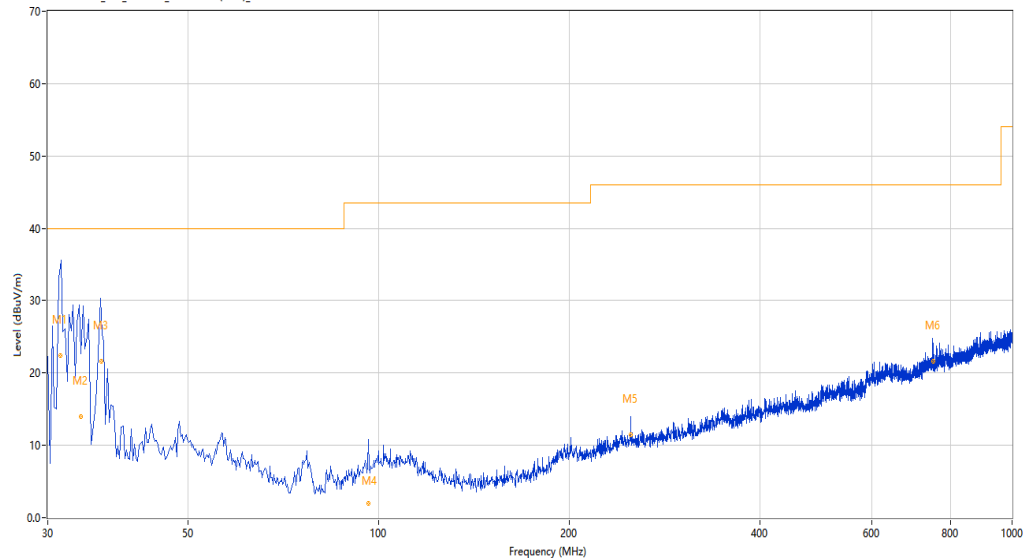

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.371	37.66	-27.63	40.0	2.34	Peak	107.80	108	Horizontal	Pass
1*	31.371	22.40	-27.63	40.0	17.60	QP	107.80	108	Horizontal	Pass
2	33.881	31.69	-26.88	40.0	8.31	Peak	190.70	151	Horizontal	Pass
2*	33.881	13.97	-26.88	40.0	26.03	QP	190.70	151	Horizontal	Pass
3	36.488	31.67	-26.27	40.0	8.33	Peak	346.50	133	Horizontal	Pass
3*	36.488	21.68	-26.27	40.0	18.32	QP	346.50	133	Horizontal	Pass
4	96.191	13.77	-25.89	43.5	29.73	Peak	0.00	102	Horizontal	Pass
4*	96.191	1.99	-25.89	43.5	41.51	QP	0.00	102	Horizontal	Pass
5	249.996	15.74	-22.87	46.0	30.26	Peak	0.00	106	Horizontal	Pass
5*	249.996	11.49	-22.87	46.0	34.51	QP	0.00	106	Horizontal	Pass
6	749.991	26.82	-11.08	46.0	19.18	Peak	0.00	273	Horizontal	Pass
6*	749.991	21.62	-11.08	46.0	24.38	QP	0.00	273	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_14.21.05

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

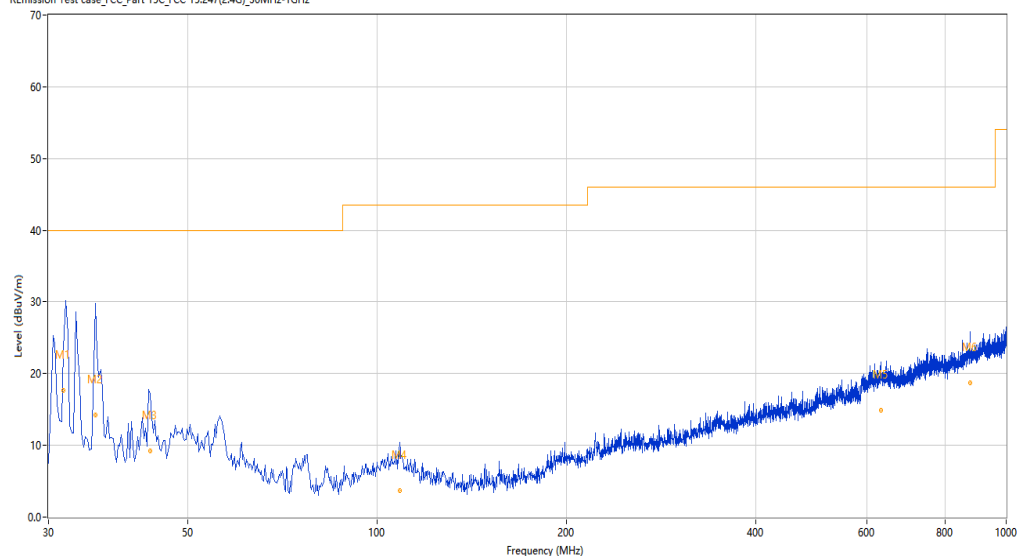

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.722	33.63	-27.55	40.0	6.37	Peak	157.90	100	Vertical	Pass
1*	31.722	17.64	-27.55	40.0	22.36	QP	157.90	100	Vertical	Pass
2	35.661	29.30	-26.50	40.0	10.70	Peak	229.50	101	Vertical	Pass
2*	35.661	14.30	-26.50	40.0	25.70	QP	229.50	101	Vertical	Pass
3	43.524	16.50	-24.16	40.0	23.50	Peak	360.00	100	Vertical	Pass
3*	43.524	9.26	-24.16	40.0	30.74	QP	360.00	100	Vertical	Pass
4	108.431	9.78	-25.07	43.5	33.72	Peak	76.80	119	Vertical	Pass
4*	108.431	3.72	-25.07	43.5	39.78	QP	76.80	119	Vertical	Pass
5	632.173	21.63	-12.85	46.0	24.37	Peak	178.60	116	Vertical	Pass
5*	632.173	14.96	-12.85	46.0	31.04	QP	178.60	116	Vertical	Pass
6	876.096	25.53	-8.66	46.0	20.47	Peak	245.90	298	Vertical	Pass
6*	876.096	18.78	-8.66	46.0	27.22	QP	245.90	298	Vertical	Pass

1-18G

Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_13.10.58

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

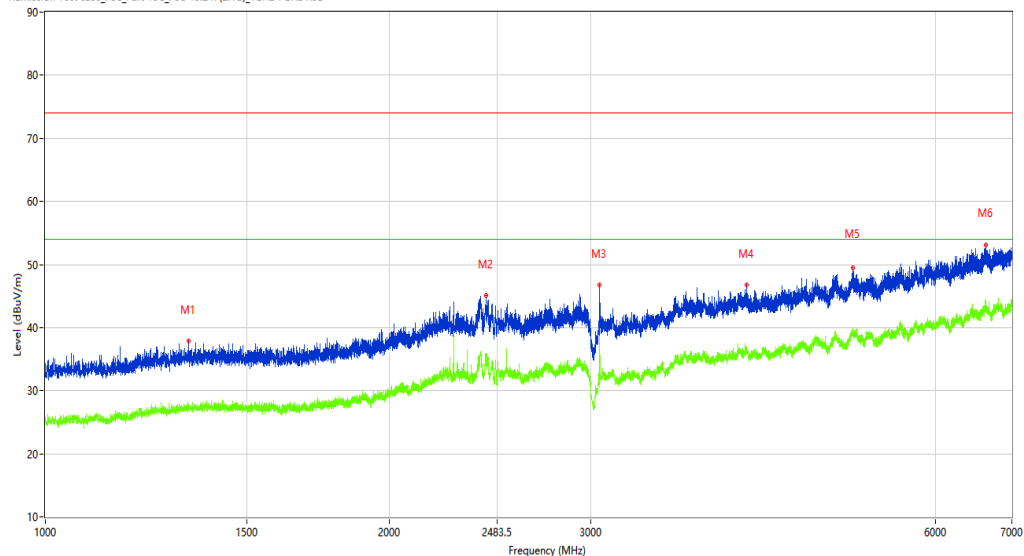

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1335.000	37.89	-13.59	74.0	36.11	Peak	311.10	100	Horizontal	Pass
1**	1335.000	27.37	-13.59	54.0	26.63	AV	311.10	100	Horizontal	Pass
2	2428.500	45.12	-5.72	74.0	28.88	Peak	172.70	100	Horizontal	Pass
2**	2428.500	35.76	-5.72	54.0	18.24	AV	172.70	100	Horizontal	Pass
3	3050.000	46.78	-4.72	74.0	27.22	Peak	48.20	100	Horizontal	Pass
3**	3050.000	38.54	-4.72	54.0	15.46	AV	48.20	100	Horizontal	Pass
4	4102.500	46.81	-1.54	74.0	27.19	Peak	320.30	100	Horizontal	Pass
4**	4102.500	36.66	-1.54	54.0	17.34	AV	320.30	100	Horizontal	Pass
5	5085.500	49.44	0.93	74.0	24.56	Peak	191.50	100	Horizontal	Pass
5**	5085.500	38.90	0.93	54.0	15.10	AV	191.50	100	Horizontal	Pass
6	6647.500	53.16	4.01	74.0	20.84	Peak	41.60	100	Horizontal	Pass
6**	6647.500	43.04	4.01	54.0	10.96	AV	41.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-08-26_13.22.43

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

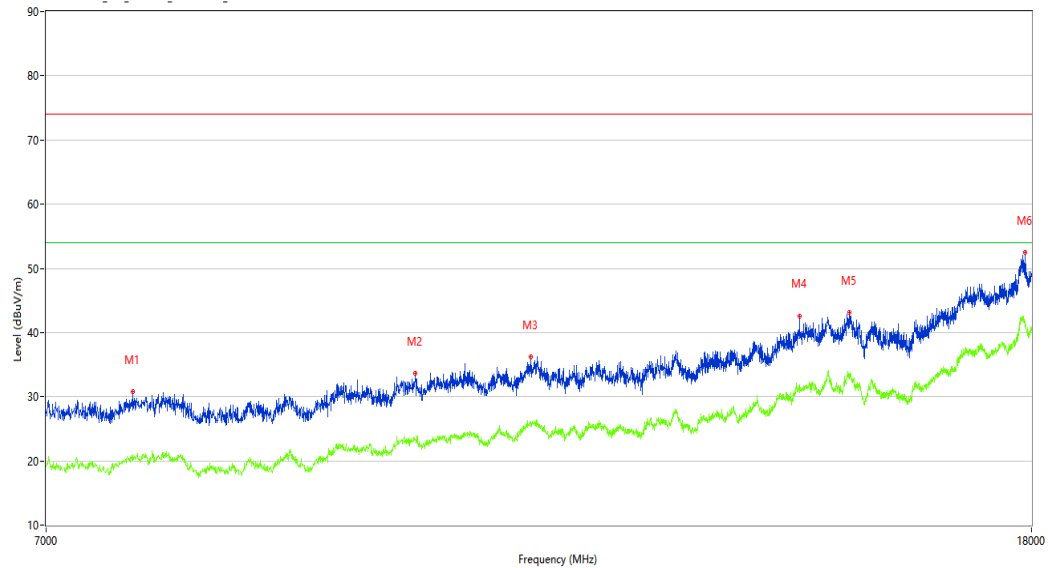

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7605.000	30.74	0.03	74.0	43.26	Peak	283.90	100	Horizontal	Pass
1**	7605.000	20.99	0.03	54.0	33.01	AV	283.90	100	Horizontal	Pass
2	9972.750	33.67	3.45	74.0	40.33	Peak	82.50	100	Horizontal	Pass
2**	9972.750	23.43	3.45	54.0	30.57	AV	82.50	100	Horizontal	Pass
3	11141.500	36.21	3.71	74.0	37.79	Peak	42.70	100	Horizontal	Pass
3**	11141.500	25.41	3.71	54.0	28.59	AV	42.70	100	Horizontal	Pass
4	14411.250	42.49	9.50	74.0	31.51	Peak	240.40	100	Horizontal	Pass
4**	14411.250	31.90	9.50	54.0	22.10	AV	240.40	100	Horizontal	Pass
5	15118.000	43.15	9.83	74.0	30.85	Peak	122.20	100	Horizontal	Pass
5**	15118.000	33.50	9.83	54.0	20.50	AV	122.20	100	Horizontal	Pass
6	17890.001	52.48	18.21	74.0	21.52	Peak	204.50	100	Horizontal	Pass
6**	17890.001	41.66	18.21	54.0	12.34	AV	204.50	100	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_11.37.40

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

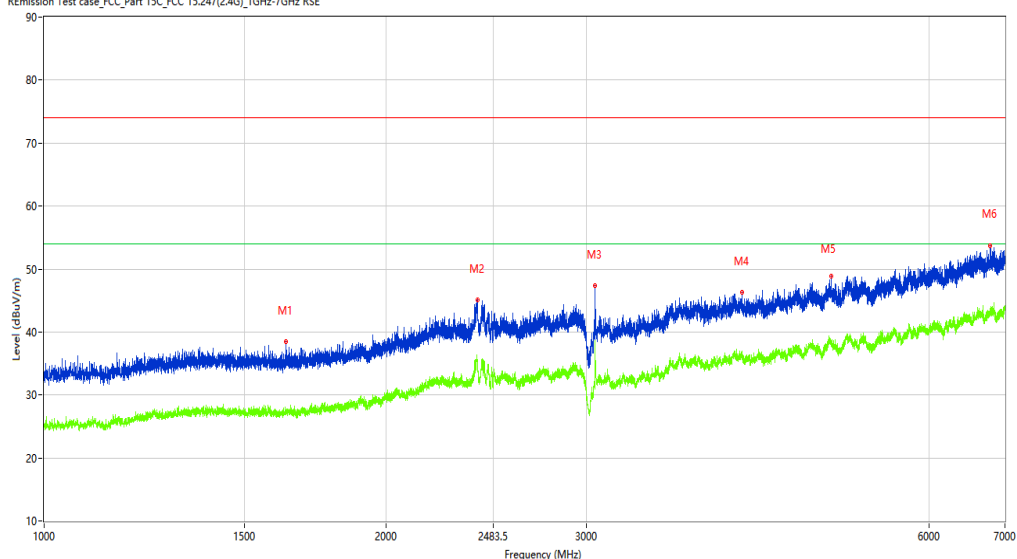

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1631.750	38.43	-13.80	74.0	35.57	Peak	177.80	100	Vertical	Pass
1**	1631.750	27.18	-13.80	54.0	26.82	AV	177.80	100	Vertical	Pass
2	2404.750	45.06	-4.89	74.0	28.94	Peak	64.50	100	Vertical	Pass
2**	2404.750	35.06	-4.89	54.0	18.94	AV	64.50	100	Vertical	Pass
3	3050.000	47.30	-4.72	74.0	26.70	Peak	241.10	100	Vertical	Pass
3**	3050.000	38.63	-4.72	54.0	15.37	AV	241.10	100	Vertical	Pass
4	4107.500	46.34	-1.73	74.0	27.66	Peak	311.20	100	Vertical	Pass
4**	4107.500	36.11	-1.73	54.0	17.89	AV	311.20	100	Vertical	Pass
5	4924.000	48.90	-0.07	74.0	25.10	Peak	159.80	100	Vertical	Pass
5**	4924.000	38.52	-0.07	54.0	15.48	AV	159.80	100	Vertical	Pass
6	6793.500	53.74	4.08	74.0	20.26	Peak	32.80	100	Vertical	Pass
6**	6793.500	42.50	4.08	54.0	11.50	AV	32.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-08-26_13.37.26

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C


Work Addition: TX

Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

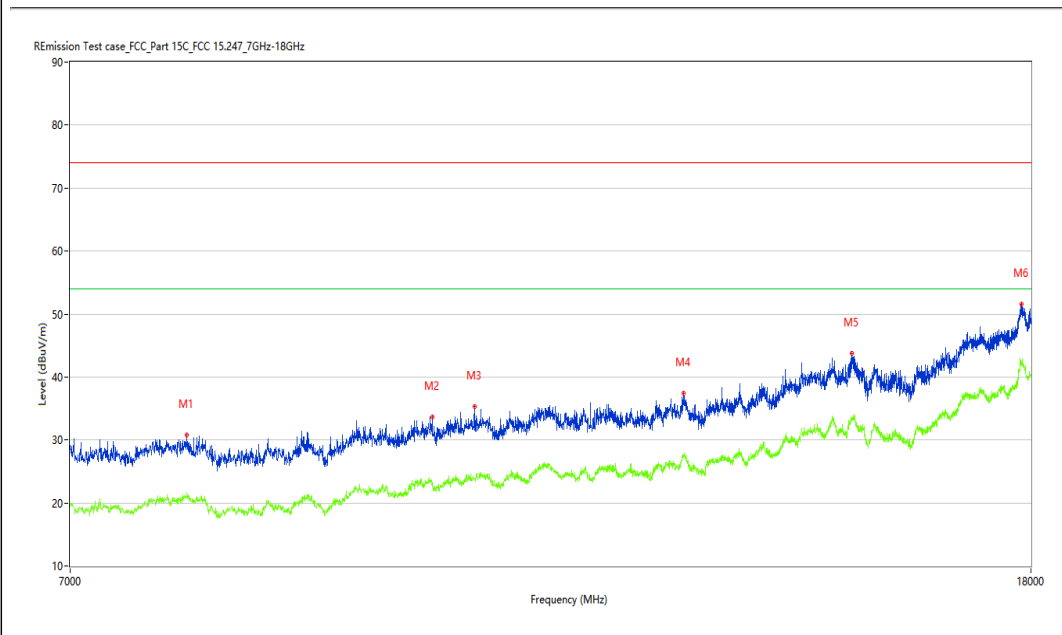

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7852.500	30.78	1.01	74.0	43.22	Peak	269.70	100	Vertical	Pass
1**	7852.500	21.53	1.01	54.0	32.47	AV	269.70	100	Vertical	Pass
2	9994.750	33.68	3.20	74.0	40.32	Peak	308.00	100	Vertical	Pass
2**	9994.750	23.02	3.20	54.0	30.98	AV	308.00	100	Vertical	Pass
3	10415.500	35.33	3.59	74.0	38.67	Peak	154.40	100	Vertical	Pass
3**	10415.500	23.92	3.59	54.0	30.08	AV	154.40	100	Vertical	Pass
4	12794.250	37.36	5.85	74.0	36.64	Peak	0.00	100	Vertical	Pass
4**	12794.250	27.65	5.85	54.0	26.35	AV	0.00	100	Vertical	Pass
5	15087.750	43.68	10.45	74.0	30.32	Peak	269.70	100	Vertical	Pass
5**	15087.750	33.25	10.45	54.0	20.75	AV	269.70	100	Vertical	Pass
6	17840.501	51.54	18.45	74.0	22.46	Peak	0.00	100	Vertical	Pass
6**	17840.501	41.83	18.45	54.0	12.17	AV	0.00	100	Vertical	Pass

18-25G

Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_14.04.11

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

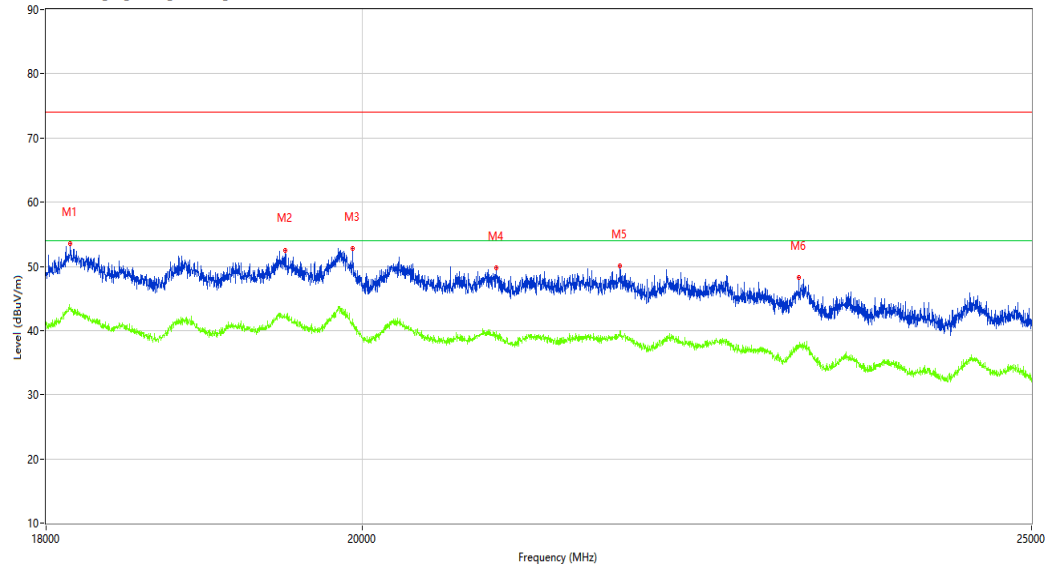

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18145.249	53.47	18.50	74.0	20.53	Peak	203.40	100	Horizontal	Pass
1**	18145.249	43.41	18.50	54.0	10.59	AV	203.40	100	Horizontal	Pass
2	19496.249	52.51	17.85	74.0	21.49	Peak	203.40	100	Horizontal	Pass
2**	19496.249	42.13	17.85	54.0	11.87	AV	203.40	100	Horizontal	Pass
3	19939.000	52.71	17.50	74.0	21.29	Peak	360.00	100	Horizontal	Pass
3**	19939.000	41.05	17.50	54.0	12.95	AV	360.00	100	Horizontal	Pass
4	20913.750	49.84	16.49	74.0	24.16	Peak	360.00	100	Horizontal	Pass
4**	20913.750	39.19	16.49	54.0	14.81	AV	360.00	100	Horizontal	Pass
5	21795.750	50.00	15.99	74.0	24.00	Peak	284.90	100	Horizontal	Pass
5**	21795.750	39.94	15.99	54.0	14.06	AV	284.90	100	Horizontal	Pass
6	23134.501	48.28	13.94	74.0	25.72	Peak	26.90	100	Horizontal	Pass
6**	23134.501	37.53	13.94	54.0	16.47	AV	26.90	100	Horizontal	Pass

Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_13.48.14

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

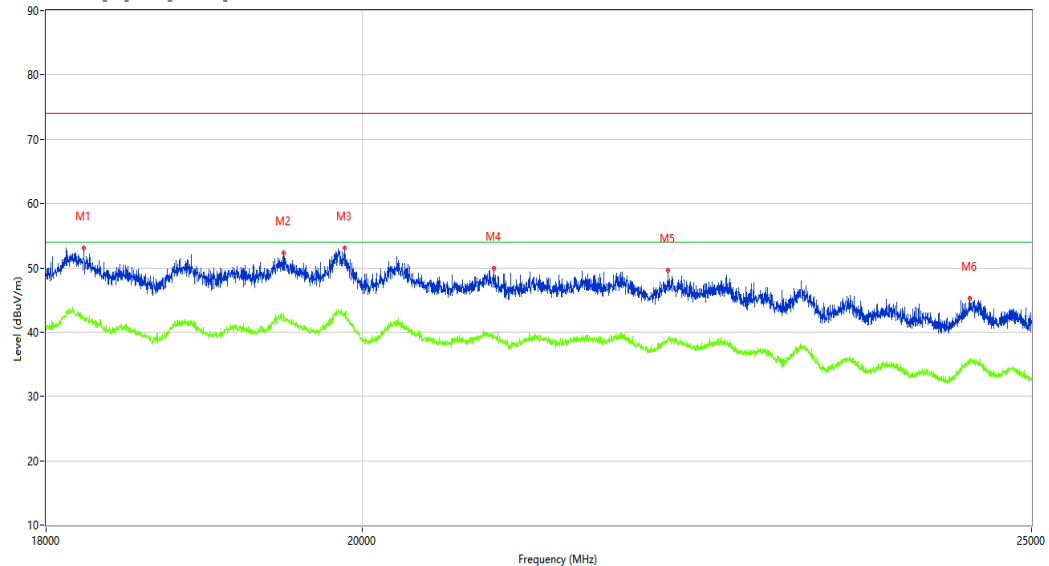

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18225.750	53.05	18.29	74.0	20.95	Peak	276.70	100	Vertical	Pass
1**	18225.750	42.10	18.29	54.0	11.90	AV	276.70	100	Vertical	Pass
2	19482.249	52.30	17.85	74.0	21.70	Peak	72.90	100	Vertical	Pass
2**	19482.249	41.98	17.85	54.0	12.02	AV	72.90	100	Vertical	Pass
3	19883.000	53.08	17.49	74.0	20.92	Peak	0.00	100	Vertical	Pass
3**	19883.000	42.87	17.49	54.0	11.13	AV	0.00	100	Vertical	Pass
4	20896.250	49.88	16.51	74.0	24.12	Peak	32.80	100	Vertical	Pass
4**	20896.250	39.72	16.51	54.0	14.28	AV	32.80	100	Vertical	Pass
5	22144.000	49.65	15.94	74.0	24.35	Peak	0.00	100	Vertical	Pass
5**	22144.000	38.58	15.94	54.0	15.42	AV	0.00	100	Vertical	Pass
6	24490.750	45.20	11.44	74.0	28.80	Peak	326.10	100	Vertical	Pass
6**	24490.750	35.48	11.44	54.0	18.52	AV	326.10	100	Vertical	Pass

1-18G

Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_13.14.29

EUT Name: REMOTE CONTROL

Manufacturer: N.A

Model: RC311C

Temp.(oC): 24.7

Hum.: 50.4%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

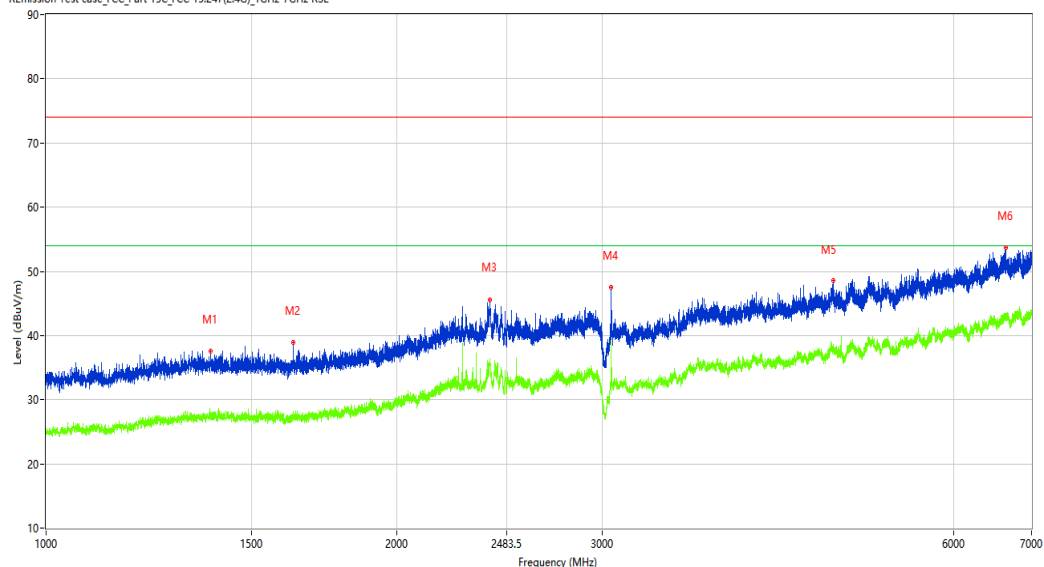

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1383.000	37.62	-13.37	74.0	36.38	Peak	30.90	100	Horizontal	Pass
1**	1383.000	28.11	-13.37	54.0	25.89	AV	30.90	100	Horizontal	Pass
2	1629.750	38.94	-13.76	74.0	35.06	Peak	19.30	100	Horizontal	Pass
2**	1629.750	28.25	-13.76	54.0	25.75	AV	19.30	100	Horizontal	Pass
3	2401.500	45.62	-4.78	74.0	28.38	Peak	116.20	100	Horizontal	Pass
3**	2401.500	36.03	-4.78	54.0	17.97	AV	116.20	100	Horizontal	Pass
4	3050.000	47.54	-4.72	74.0	26.46	Peak	259.10	100	Horizontal	Pass
4**	3050.000	39.30	-4.72	54.0	14.70	AV	259.10	100	Horizontal	Pass
5	4730.000	48.57	-0.47	74.0	25.43	Peak	172.90	100	Horizontal	Pass
5**	4730.000	38.61	-0.47	54.0	15.39	AV	172.90	100	Horizontal	Pass
6	6652.000	53.70	3.91	74.0	20.30	Peak	104.50	100	Horizontal	Pass
6**	6652.000	42.87	3.91	54.0	11.13	AV	104.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-08-26_13.29.34

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

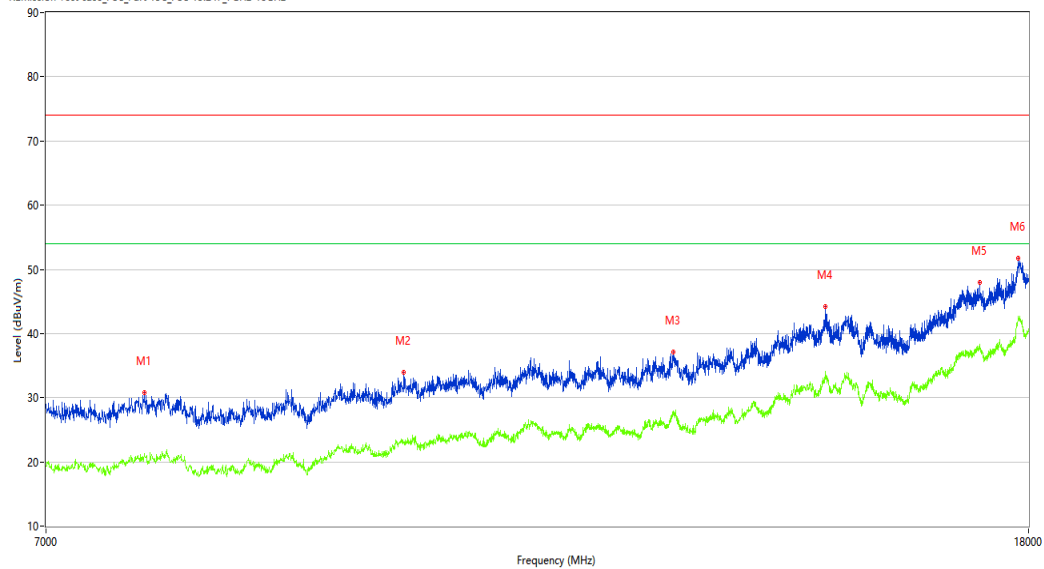

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7695.750	30.79	0.97	74.0	43.21	Peak	0.00	100	Horizontal	Pass
1**	7695.750	21.01	0.97	54.0	32.99	AV	0.00	100	Horizontal	Pass
2	9873.750	33.89	2.63	74.0	40.11	Peak	153.70	100	Horizontal	Pass
2**	9873.750	23.12	2.63	54.0	30.88	AV	153.70	100	Horizontal	Pass
3	12788.750	37.13	5.97	74.0	36.87	Peak	0.00	100	Horizontal	Pass
3**	12788.750	27.64	5.97	54.0	26.36	AV	0.00	100	Horizontal	Pass
4	14807.250	44.17	11.78	74.0	29.83	Peak	73.70	100	Horizontal	Pass
4**	14807.250	33.55	11.78	54.0	20.45	AV	73.70	100	Horizontal	Pass
5	17177.750	47.93	15.09	74.0	26.07	Peak	153.70	100	Horizontal	Pass
5**	17177.750	38.29	15.09	54.0	15.71	AV	153.70	100	Horizontal	Pass
6	17821.250	51.67	18.33	74.0	22.33	Peak	111.50	100	Horizontal	Pass
6**	17821.250	42.67	18.33	54.0	11.33	AV	111.50	100	Horizontal	Pass

Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_11.32.30

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

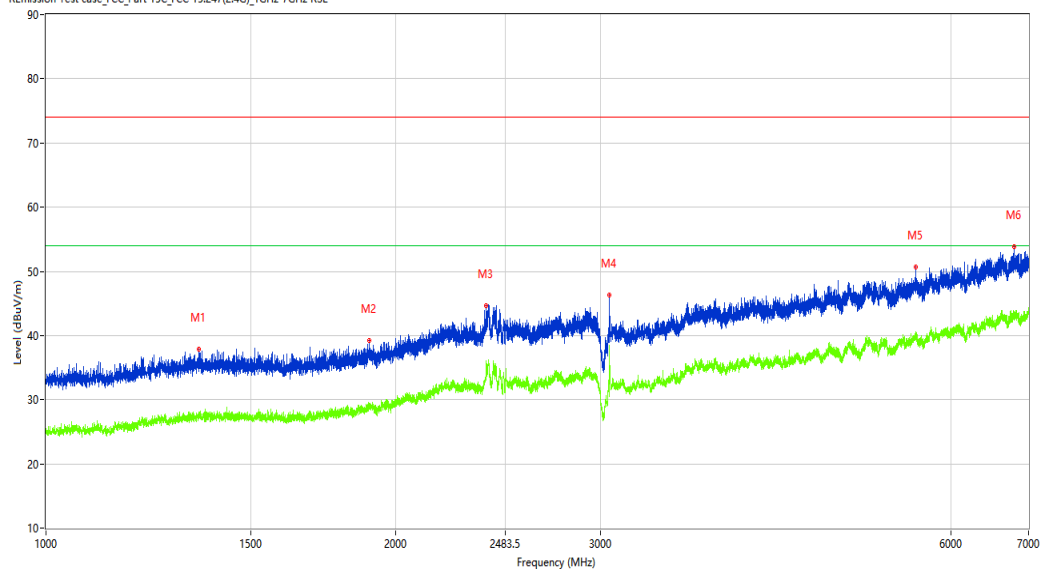

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1353.750	37.83	-13.42	74.0	36.17	Peak	63.20	100	Vertical	Pass
1**	1353.750	27.43	-13.42	54.0	26.57	AV	63.20	100	Vertical	Pass
2	1897.750	39.23	-12.04	74.0	34.77	Peak	123.20	100	Vertical	Pass
2**	1897.750	28.87	-12.04	54.0	25.13	AV	123.20	100	Vertical	Pass
3	2392.000	44.62	-4.72	74.0	29.38	Peak	172.90	100	Vertical	Pass
3**	2392.000	35.08	-4.72	54.0	18.92	AV	172.90	100	Vertical	Pass
4	3050.000	46.32	-4.72	74.0	27.68	Peak	30.50	100	Vertical	Pass
4**	3050.000	38.52	-4.72	54.0	15.48	AV	30.50	100	Vertical	Pass
5	5597.000	50.71	1.16	74.0	23.29	Peak	111.60	100	Vertical	Pass
5**	5597.000	39.97	1.16	54.0	14.03	AV	111.60	100	Vertical	Pass
6	6807.500	53.82	4.27	74.0	20.18	Peak	116.30	100	Vertical	Pass
6**	6807.500	43.05	4.27	54.0	10.95	AV	116.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-08-26_13.39.42

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX

Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7825.000	31.08	0.99	74.0	42.92	Peak	159.30	100	Vertical	Pass
1**	7825.000	20.44	0.99	54.0	33.56	AV	159.30	100	Vertical	Pass
2	9887.500	33.57	2.85	74.0	40.43	Peak	113.80	100	Vertical	Pass
2**	9887.500	23.03	2.85	54.0	30.97	AV	113.80	100	Vertical	Pass
3	11149.750	36.74	3.72	74.0	37.26	Peak	286.10	100	Vertical	Pass
3**	11149.750	26.03	3.72	54.0	27.97	AV	286.10	100	Vertical	Pass
4	12601.750	37.38	5.08	74.0	36.62	Peak	360.00	100	Vertical	Pass
4**	12601.750	26.55	5.08	54.0	27.45	AV	360.00	100	Vertical	Pass
5	15098.750	42.90	10.28	74.0	31.10	Peak	72.00	100	Vertical	Pass
5**	15098.750	33.33	10.28	54.0	20.67	AV	72.00	100	Vertical	Pass
6	17829.501	51.65	18.41	74.0	22.35	Peak	113.80	100	Vertical	Pass
6**	17829.501	42.30	18.41	54.0	11.70	AV	113.80	100	Vertical	Pass

18-25G

Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_13.54.21

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C


Work Addition: TX

Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

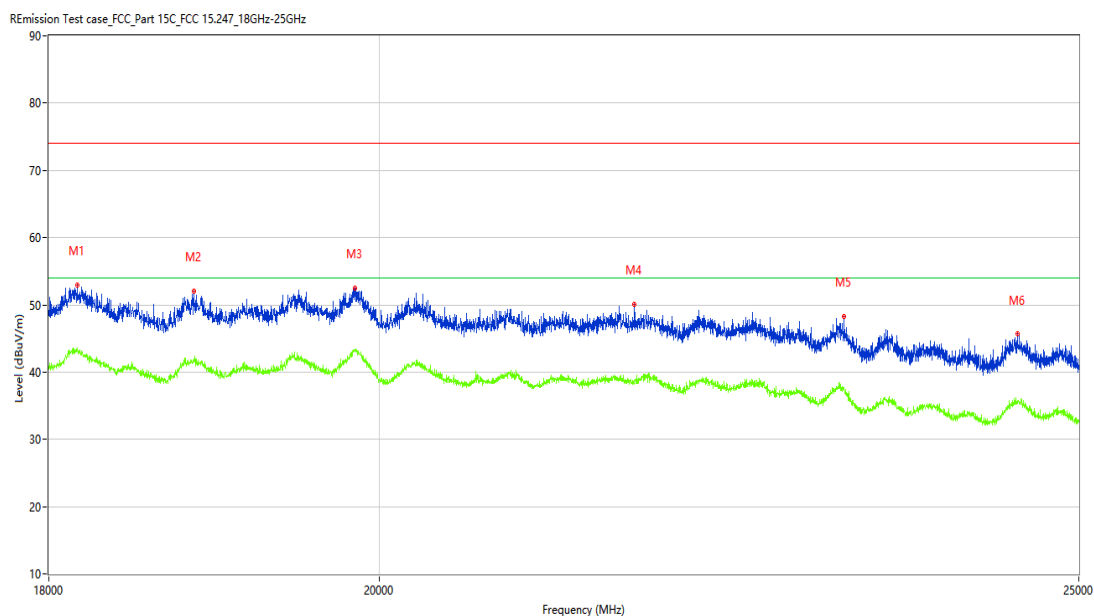

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18164.500	53.00	18.45	74.0	21.00	Peak	76.30	100	Horizontal	Pass
1**	18164.500	43.62	18.45	54.0	10.38	AV	76.30	100	Horizontal	Pass
2	18850.501	51.98	17.80	74.0	22.02	Peak	115.60	100	Horizontal	Pass
2**	18850.501	42.00	17.80	54.0	12.00	AV	115.60	100	Horizontal	Pass
3	19847.999	52.45	17.49	74.0	21.55	Peak	35.80	100	Horizontal	Pass
3**	19847.999	43.19	17.49	54.0	10.81	AV	35.80	100	Horizontal	Pass
4	21697.749	50.12	15.95	74.0	23.88	Peak	0.00	100	Horizontal	Pass
4**	21697.749	38.76	15.95	54.0	15.24	AV	0.00	100	Horizontal	Pass
5	23195.750	48.29	13.85	74.0	25.71	Peak	0.00	100	Horizontal	Pass
5**	23195.750	37.23	13.85	54.0	16.77	AV	0.00	100	Horizontal	Pass
6	24516.999	45.73	11.44	74.0	28.27	Peak	201.10	100	Horizontal	Pass
6**	24516.999	35.77	11.44	54.0	18.23	AV	201.10	100	Horizontal	Pass

Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_13.50.45

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

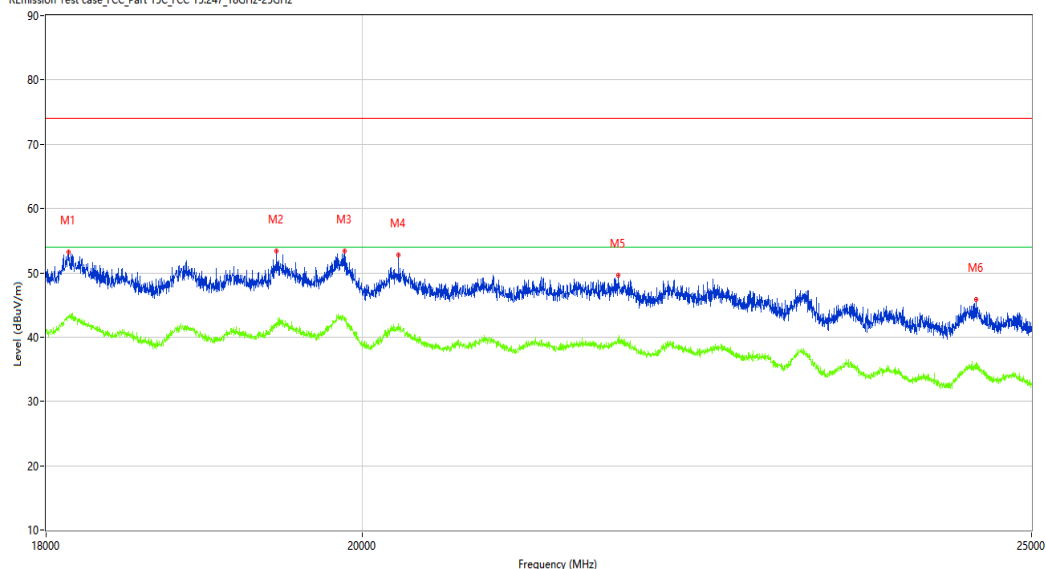

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18136.500	53.18	18.52	74.0	20.82	Peak	10.40	100	Vertical	Pass
1**	18136.500	43.13	18.52	54.0	10.87	AV	10.40	100	Vertical	Pass
2	19438.500	53.44	17.87	74.0	20.56	Peak	84.20	100	Vertical	Pass
2**	19438.500	42.28	17.87	54.0	11.72	AV	84.20	100	Vertical	Pass
3	19883.000	53.43	17.49	74.0	20.57	Peak	360.00	100	Vertical	Pass
3**	19883.000	42.54	17.49	54.0	11.46	AV	360.00	100	Vertical	Pass
4	20243.499	52.84	17.21	74.0	21.16	Peak	360.00	100	Vertical	Pass
4**	20243.499	41.47	17.21	54.0	12.53	AV	360.00	100	Vertical	Pass
5	21780.001	49.56	15.98	74.0	24.44	Peak	168.50	100	Vertical	Pass
5**	21780.001	39.01	15.98	54.0	14.99	AV	168.50	100	Vertical	Pass
6	24544.999	45.81	11.44	74.0	28.19	Peak	168.50	100	Vertical	Pass
6**	24544.999	35.03	11.44	54.0	18.97	AV	168.50	100	Vertical	Pass

1-18G

High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_11.18.33

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

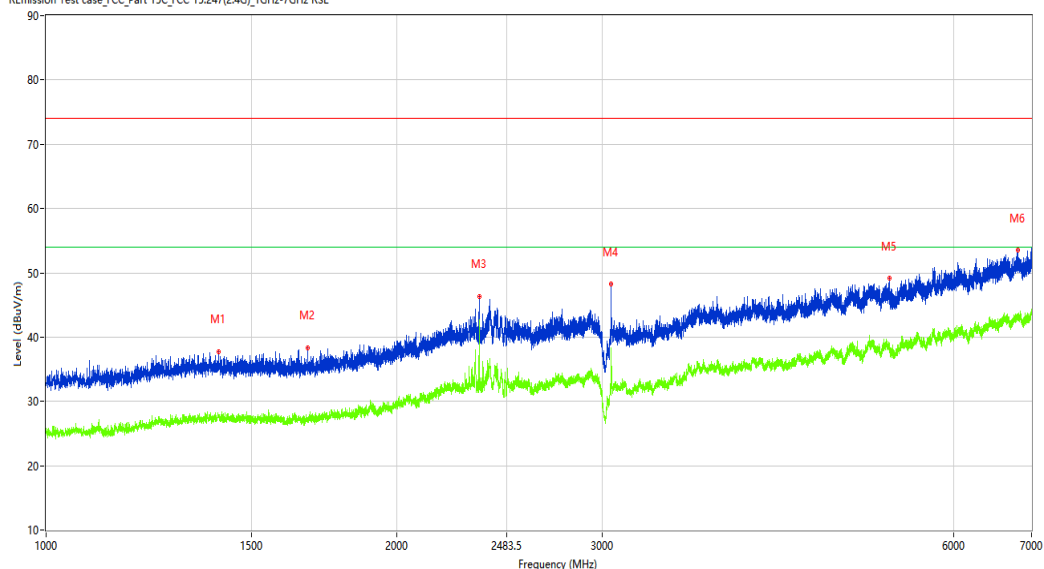

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1405.500	37.79	-13.27	74.0	36.21	Peak	50.70	100	Horizontal	Pass
1**	1405.500	27.98	-13.27	54.0	26.02	AV	50.70	100	Horizontal	Pass
2	1677.250	38.28	-13.89	74.0	35.72	Peak	179.40	100	Horizontal	Pass
2**	1677.250	26.78	-13.89	54.0	27.22	AV	179.40	100	Horizontal	Pass
3	2351.750	46.38	-8.65	74.0	27.62	Peak	173.40	100	Horizontal	Pass
3**	2351.750	42.23	-8.65	54.0	11.77	AV	173.40	100	Horizontal	Pass
4	3050.500	48.34	-5.39	74.0	25.66	Peak	310.70	100	Horizontal	Pass
4**	3050.500	37.84	-5.39	54.0	16.16	AV	310.70	100	Horizontal	Pass
5	5285.000	49.20	0.05	74.0	24.80	Peak	250.90	100	Horizontal	Pass
5**	5285.000	38.47	0.05	54.0	15.53	AV	250.90	100	Horizontal	Pass
6	6812.500	53.55	4.22	74.0	20.45	Peak	94.50	100	Horizontal	Pass
6**	6812.500	43.15	4.22	54.0	10.85	AV	94.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2026-08-26_13.33.20

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

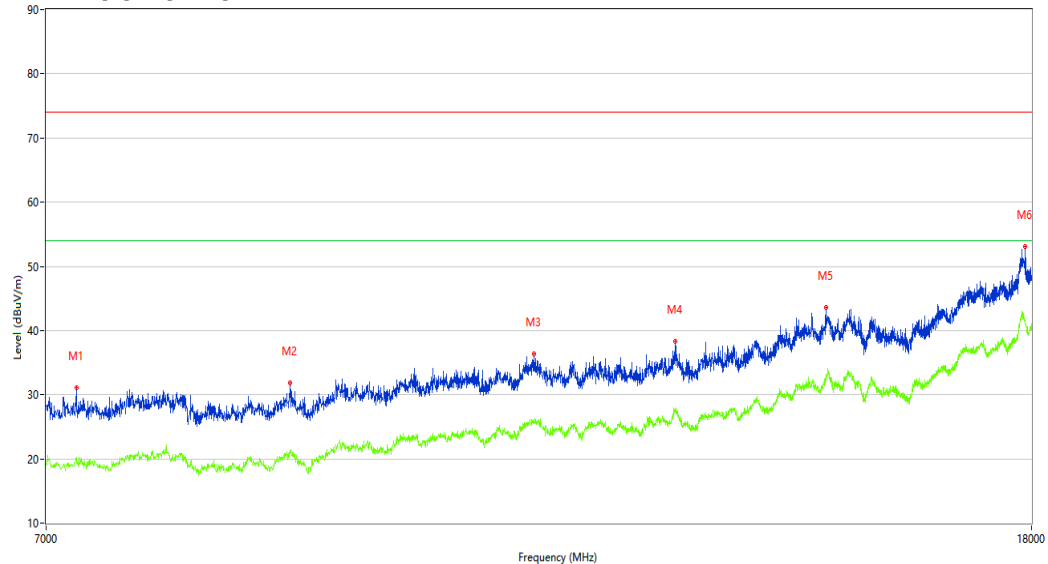

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7206.250	31.10	0.01	74.0	42.90	Peak	205.10	100	Horizontal	Pass
1**	7206.250	20.31	0.01	54.0	33.69	AV	205.10	100	Horizontal	Pass
2	8845.250	31.84	0.41	74.0	42.16	Peak	0.20	100	Horizontal	Pass
2**	8845.250	20.96	0.41	54.0	33.04	AV	0.20	100	Horizontal	Pass
3	11174.500	36.36	3.93	74.0	37.64	Peak	282.40	100	Horizontal	Pass
3**	11174.500	25.82	3.93	54.0	28.18	AV	282.40	100	Horizontal	Pass
4	12791.500	38.32	5.80	74.0	35.68	Peak	360.00	100	Horizontal	Pass
4**	12791.500	27.28	5.80	54.0	26.72	AV	360.00	100	Horizontal	Pass
5	14779.750	43.60	10.97	74.0	30.40	Peak	73.60	100	Horizontal	Pass
5**	14779.750	33.16	10.97	54.0	20.84	AV	73.60	100	Horizontal	Pass
6	17895.500	53.03	18.02	74.0	20.97	Peak	73.60	100	Horizontal	Pass
6**	17895.500	41.23	18.02	54.0	12.77	AV	73.60	100	Horizontal	Pass

BLE-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_11.26.39

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

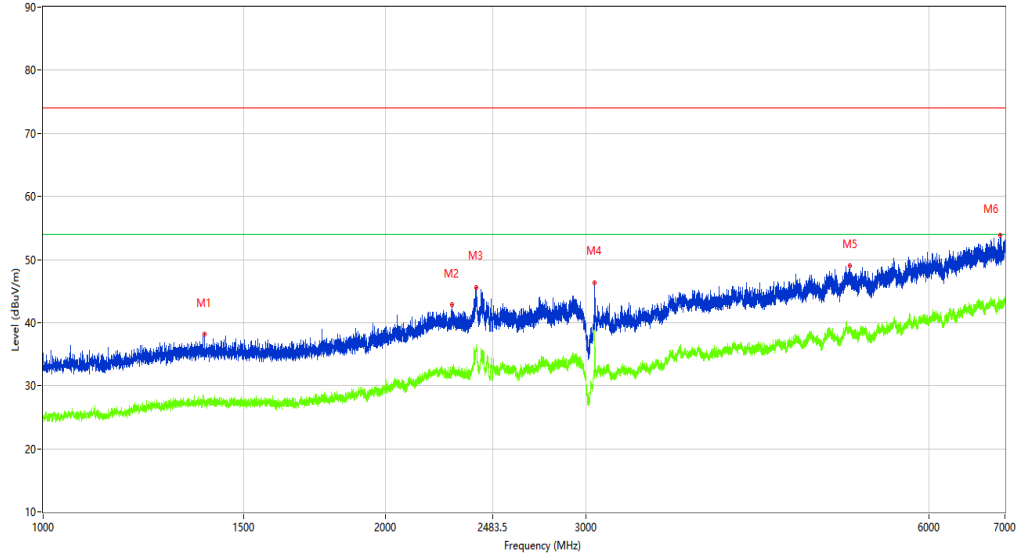

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1386.750	38.16	-13.42	74.0	35.84	Peak	111.50	100	Vertical	Pass
1**	1386.750	27.79	-13.42	54.0	26.21	AV	111.50	100	Vertical	Pass
2	2285.750	42.80	-8.63	74.0	31.20	Peak	237.60	100	Vertical	Pass
2**	2285.750	31.71	-8.63	54.0	22.29	AV	237.60	100	Vertical	Pass
3	2400.750	45.61	-4.78	74.0	28.39	Peak	118.60	100	Vertical	Pass
3**	2400.750	35.73	-4.78	54.0	18.27	AV	118.60	100	Vertical	Pass
4	3050.000	46.36	-4.72	74.0	27.64	Peak	190.10	100	Vertical	Pass
4**	3050.000	37.73	-4.72	54.0	16.27	AV	190.10	100	Vertical	Pass
5	5116.500	48.99	0.39	74.0	25.01	Peak	360.00	100	Vertical	Pass
5**	5116.500	38.78	0.39	54.0	15.22	AV	360.00	100	Vertical	Pass
6	6939.000	53.83	3.64	74.0	20.17	Peak	99.90	100	Vertical	Pass
6**	6939.000	42.54	3.64	54.0	11.46	AV	99.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2026-08-26_13.42.26

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

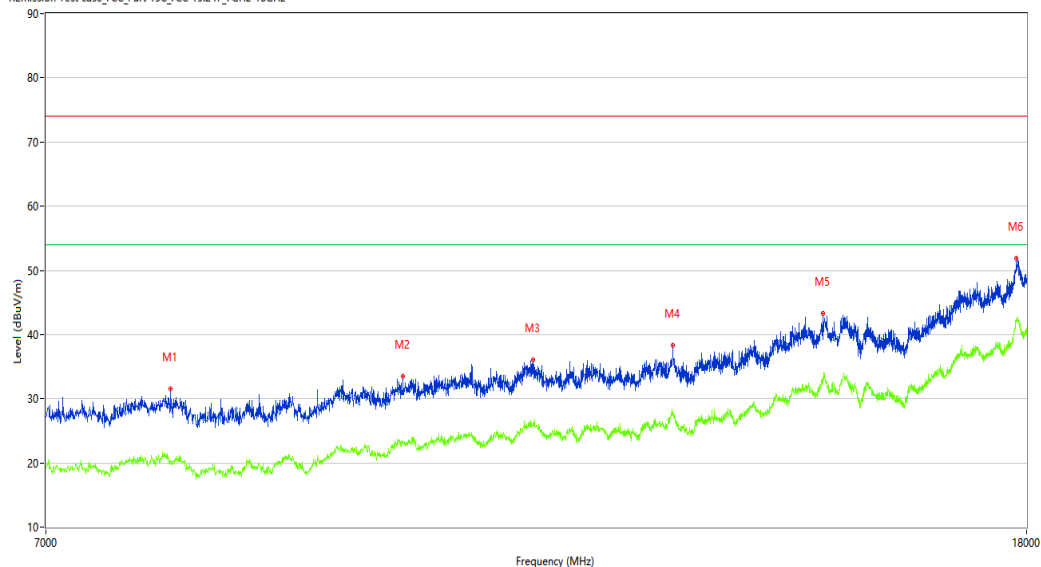

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7893.750	31.51	0.43	74.0	42.49	Peak	358.40	100	Vertical	Pass
1**	7893.750	20.30	0.43	54.0	33.70	AV	358.40	100	Vertical	Pass
2	9871.000	33.46	2.71	74.0	40.54	Peak	319.30	100	Vertical	Pass
2**	9871.000	23.26	2.71	54.0	30.74	AV	319.30	100	Vertical	Pass
3	11193.750	36.03	3.98	74.0	37.97	Peak	0.00	100	Vertical	Pass
3**	11193.750	26.28	3.98	54.0	27.72	AV	0.00	100	Vertical	Pass
4	12802.500	38.28	5.84	74.0	35.72	Peak	358.40	100	Vertical	Pass
4**	12802.500	27.83	5.84	54.0	26.17	AV	358.40	100	Vertical	Pass
5	14799.000	43.23	11.46	74.0	30.77	Peak	278.00	100	Vertical	Pass
5**	14799.000	33.29	11.46	54.0	20.71	AV	278.00	100	Vertical	Pass
6	17824.000	51.87	18.38	74.0	22.13	Peak	36.50	100	Vertical	Pass
6**	17824.000	42.15	18.38	54.0	11.85	AV	36.50	100	Vertical	Pass

18-25G

High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_14.08.12

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

R emission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

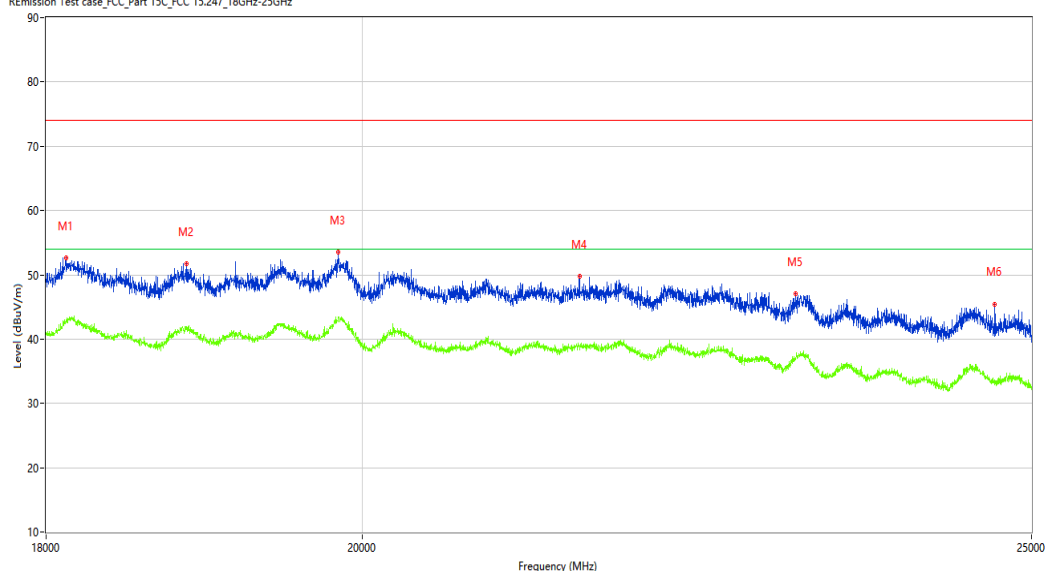

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18119.000	52.71	18.57	74.0	21.29	Peak	40.50	100	Horizontal	Pass
1**	18119.000	43.05	18.57	54.0	10.95	AV	40.50	100	Horizontal	Pass
2	18861.001	51.67	17.80	74.0	22.33	Peak	157.10	100	Horizontal	Pass
2**	18861.001	41.61	17.80	54.0	12.39	AV	157.10	100	Horizontal	Pass
3	19840.999	53.47	17.49	74.0	20.53	Peak	317.20	100	Horizontal	Pass
3**	19840.999	42.75	17.49	54.0	11.25	AV	317.20	100	Horizontal	Pass
4	21501.749	49.81	15.87	74.0	24.19	Peak	278.20	100	Horizontal	Pass
4**	21501.749	38.62	15.87	54.0	15.38	AV	278.20	100	Horizontal	Pass
5	23108.250	47.04	13.98	74.0	26.96	Peak	240.10	100	Horizontal	Pass
5**	23108.250	37.17	13.98	54.0	16.83	AV	240.10	100	Horizontal	Pass
6	24697.250	45.33	11.44	74.0	28.67	Peak	240.10	100	Horizontal	Pass
6**	24697.250	33.13	11.44	54.0	20.87	AV	240.10	100	Horizontal	Pass

High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_13.45.16

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_18GHz-25GHz

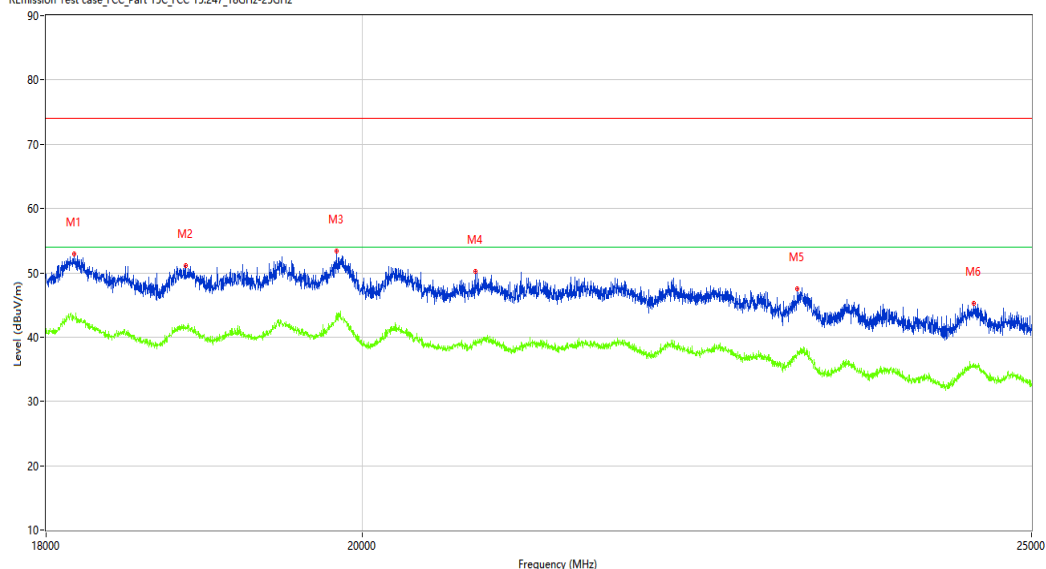

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	18169.750	52.99	18.44	74.0	21.01	Peak	202.30	100	Vertical	Pass
1**	18169.750	43.02	18.44	54.0	10.98	AV	202.30	100	Vertical	Pass
2	18855.750	51.09	17.80	74.0	22.91	Peak	238.40	100	Vertical	Pass
2**	18855.750	41.63	17.80	54.0	12.37	AV	238.40	100	Vertical	Pass
3	19830.499	53.35	17.49	74.0	20.65	Peak	164.80	100	Vertical	Pass
3**	19830.499	42.72	17.49	54.0	11.28	AV	164.80	100	Vertical	Pass
4	20768.500	50.19	16.64	74.0	23.81	Peak	238.40	100	Vertical	Pass
4**	20768.500	39.47	16.64	54.0	14.53	AV	238.40	100	Vertical	Pass
5	23120.501	47.46	13.96	74.0	26.54	Peak	202.30	100	Vertical	Pass
5**	23120.501	37.23	13.96	54.0	16.77	AV	202.30	100	Vertical	Pass
6	24523.999	45.27	11.44	74.0	28.73	Peak	202.30	100	Vertical	Pass
6**	24523.999	35.86	11.44	54.0	18.14	AV	202.30	100	Vertical	Pass

Band edge-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_13.05.23

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

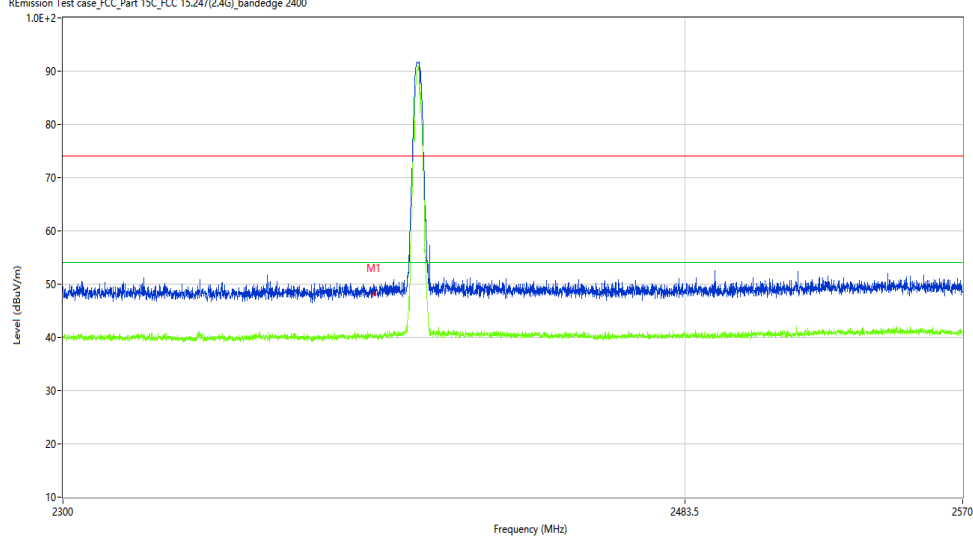

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.28	-10.58	74.0	25.72	Peak	166.17	100	H	Pass
1**	2390.000	40.16	-10.58	54.0	13.84	AV	166.17	100	H	Pass

Band edge-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_13.01.53

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

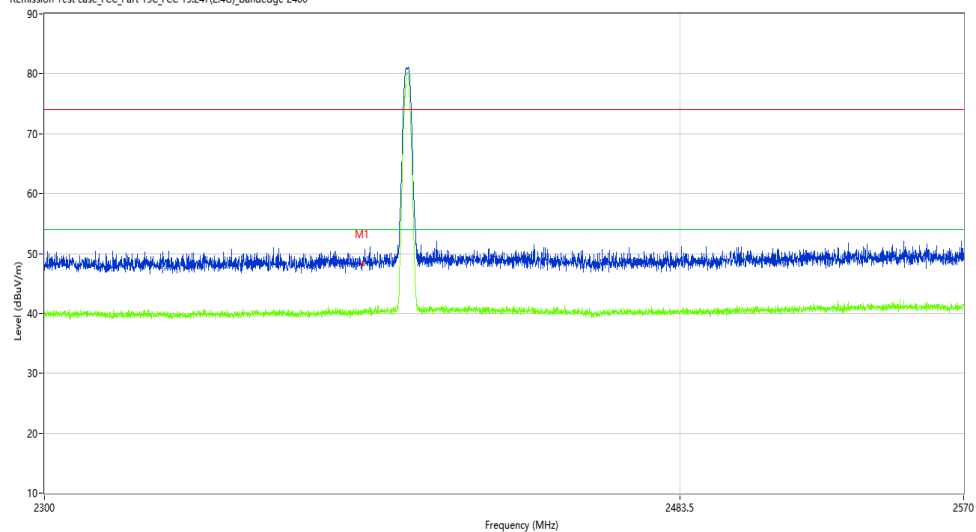

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.30	-10.58	74.0	25.70	Peak	177.13	100	V	Pass
1**	2390.000	40.03	-10.58	54.0	13.97	AV	177.13	100	V	Pass

Band edge-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_11.14.46

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

R emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

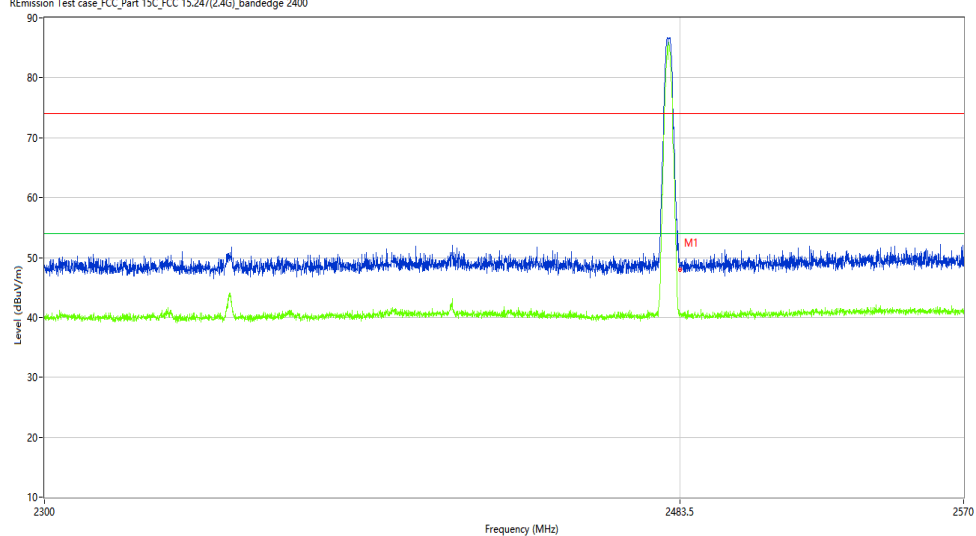

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.04	-10.56	74.0	25.96	Peak	110.40	100	H	Pass
1**	2483.500	40.24	-10.56	54.0	13.76	AV	110.40	100	H	Pass

Bandedge-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2026-08-26_11.41.05

EUT Name: REMOTE CONTROL

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: RC311C

Work Addition: TX


Temp.(oC): 24.7

Load: Full load

Hum.: 50.4%

Remark: DR-RSE01-E26080016-01#02

R emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

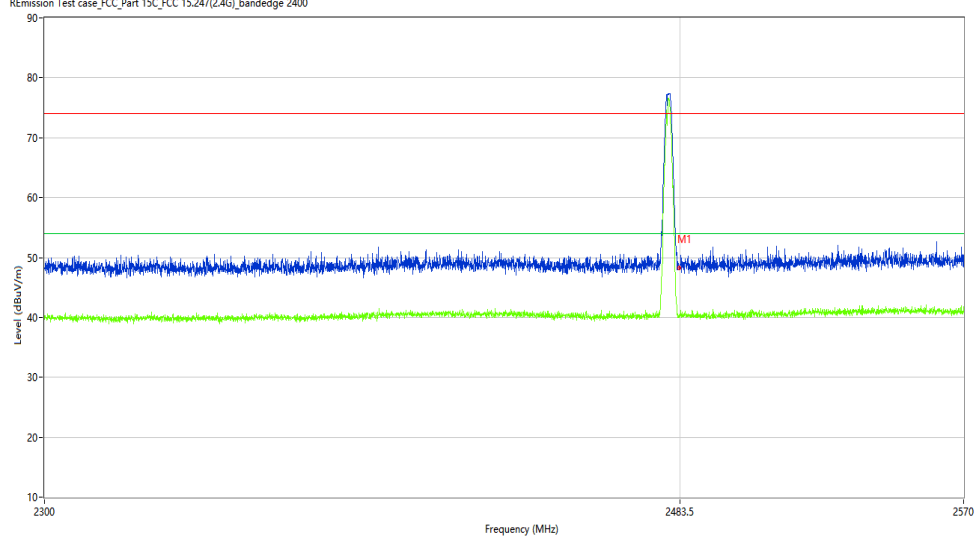

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.28	-10.56	74.0	25.72	Peak	279.27	100	V	Pass
1**	2483.500	40.31	-10.56	54.0	13.69	AV	279.27	100	V	Pass