




Wireless SignalDetector Manual

Hello friend,
Thanks for using this anti-spy detector, we are honored that your choose this product finally. In order to give you a brief introduction of the detector and make it more convenient for your life, we have specially configured this instruction manual for you.

1.Product schematics and functions

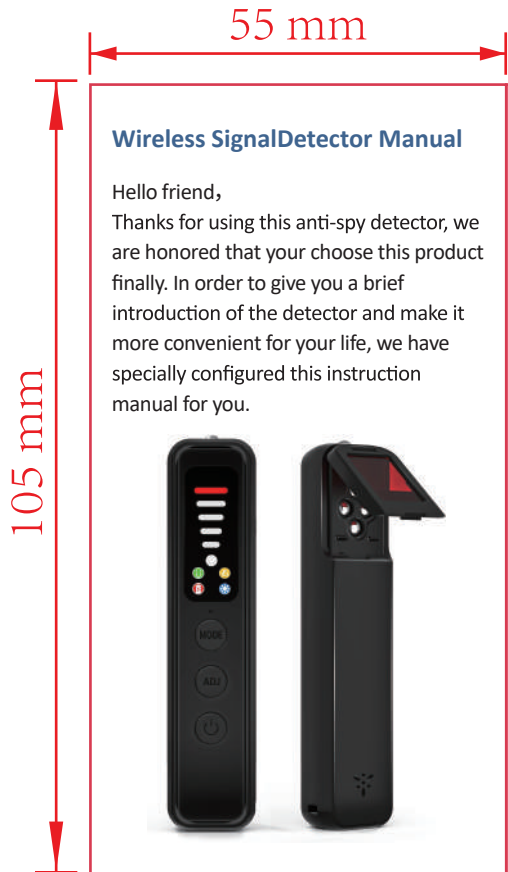

Function	Indication
Power Key	press for 2 seconds to power on press for 2 seconds to power off Short press Change to alarm or vibration
LED lights	Reflect the camera via a bright spot
Infrared lens finder	Scan to find hidden lens
Sensitivity display	Check Wireless signal strength
Mode button	Switch to the mode you need
ADJ button	Adjust signal strength to the proper level
Sensitivity adjustment	Adjust signal strength to the proper level
Infrared reception	Scanning a hidden camera that emitsinfrared light
Charging	TYPE-C Charging Port
Lights	Flashlight

2.Basic Specifications

Volume	14*23*102 MM
Weight	30g
Charging interface	Type-C
Working hours	25 hours in a row
Antenna gain	>73DB
Power plug	DC5V/1A
Battery	300mAh
Sensitivity	5 levels adjustable
Receiving frequency range	1Mhz---6.5GHz
Signal detection range	2.4G:10mw;1.2G:10mw; 2G、 3G、 4G:15 square meters
Laser detection distance	1-5 meters
Material	PC+ABS
Charging time	2.5 hours

3. Operation methods

a. Detection of radio waves (wireless cameras /eavesdroppers, etc.)
(1) Push the power Key 2 seconds, after hearing the "Di-" sound, release your finger, white indicator and flashlight will flash and off, strength sensitivity will be on the 1st level,wireless signal detection mode will start automatically.
(2)If there is a voice prompt, it means there is an emission source. The more white signal indicators appear, the stronger the signal is.
(3)Click the **ADJ** signal sensitivity adjustment button to adjust sensitivity, the more white signal indicators are, the higher the sensitivity is , which can expand the search range.

(4) Cyclic adjustment : Adjust the signal sensitivity adjustment ADJ button to reduce the number of white lights, reducing sensitivity, reducing detection range, to find the emission source accurately.

(5)You can also turn on vibration mode, Short press switch button,then it will be.

b. Detect hidden cameras (recommended to turn off the room lights)

(1)Short press "**mode** button" , 3 infrared lights at the back will light up, short press the **ADJ** sensitivity adjustment button to control the flashing speed of infrared lights. Once you press the sensitivity button, flashing frequency will increase. Cycle adjustment can be adapted to the preferences of all kinds of people.

(2)Hold on the anti-spy detector in hand, and move it up, down, left and right to scan the surrounding environment via the laser(shielding the light in the house), and observe through the red filter on the detector. If there is a camera lens in front of you, you will find a very suspicious red bright reflective spot.

c. GPS magnetic field detection

Press the mode button twice to get the green light on, green signal indicator of this mode will be on the 1st level.Move the detector to the place you want to detect, once the white red lights are on, buzzer alarm is about to work, indicating that there is a magnetic field or suspicious objects with strong magnetic nearly.You can Short press switch to the vibration mode.

d. Auxiliary lighting by flashlight

Press the "mode button" 3 times to switch the flashlight mode,top light up.With flashlight function on, when you detect suspicious devices, you can turn on this function to find it out. You can also use it as lighting in the dark.

e. Detecting hidden cameras by receiving infrared light

(room lighting must be turned off and curtains must be drawn first) Part of the hidden cameras emit infrared light that is invisible to the human eye, allowing for nighttime surveillance of personal privacy.

(1) Press the "mode button" 4 times and the blue light will light up.

(2)Hold on the anti-spy detector in hand, and move it up, down, left and right to scan the surrounding environment, If there is a voice prompt,Indicates the presence of an invisible infrared light emission source.You can Short press switch to the vibration mode.

f. Shake alarm

(1) Press the "mode button" 5 times and the yellow light will light up.

(2) After 10 seconds, the anti spy detector will enter vibration monitoring mode. When there is vibration, swaying, or shaking to the anti spy detector, the white light will light up and the buzzer will sound a 10 second alarm. After stopping, it will enter vibration monitoring mode again.

4. Common questions and answers

a. Why the silent sleep tracker can not be detected?

Answer: The commonly used sleep locator works once a day, and only works for 5-7 minutes at a time, so when the detector is detecting wireless signals, the locator may not send a signal.

b. Why the position of the real-time locator can not be accurately detected?

Answer: The real-time locator generally sends a signal every 10 seconds. Please do not move back and forth during detection. It is best to fix it in one position for more than 5 minutes, then change to other positions to continue detection.

c. Why does the detector terminal beep "DiDi"?

Answer: Signals are everywhere, and there are too many sources of interference signals. It is recommended to turn off your own known signal sources, such as mobile phones, WIFI routers, etc., during detection, and then decrease the sensitivity appropriately.

d. Why do the detectors near the windows of the house make such a loud noise?

Answer: The window is made of aluminum alloy, which forms a loop antenna, and the signal reception is particularly good.

e. Why the camera can not be detected?

Answer: It is possible that the camera is not working, or the camera is a wired one, not using WiFi signal.

5. Applicable people

1. People who often use bank cards.
2. People who often stay in hotels on business trips.
3. Pretty ladies who are easy to be photographed.
4. People who often go to public entertainment occupancy.
5. People who often go to shopping malls for fitting.
6. People who respect their own privacy and others' privacy.
7. People who have access to and keep commercial secrets.
8. Security personnel in places where business secrets and technical secrets are kept.
9. Professionals who are capable of counter sneak shot and eavesdropping.
10. Whether the drone camera is quietly staring at your window.
11. Mortgage cars, used cars, guarantee companies, information finance companies.

6. Package

- anti spy detector * 1 Type C charging cable * 1
User manual * 1 Hanging rope* 1

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction