



FCC TEST REPORT

FOR

Eccel Technology Ltd

C2R Module

Test Model: v1

Prepared for : Eccel Technology Ltd
Address : Unit 16b Fir Tree Lane Groby, Leicester, United Kingdom

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : December 08, 2025
Number of tested samples : 2
Sample No. : A251126052-1, A251126052-2
Serial number : Prototype
Date of Test : December 08, 2025 ~ March 18, 2026
Date of Report : March 20, 2026



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: + (86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC TEST REPORT**
FCC CFR 47 PART 15 C (15.225)**Report Reference No.** : **LCSA12055083EA**

Date of Issue..... : March 20, 2026

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**Address..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei,
Shajing Street, Baoan District, Shenzhen, 518000, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name**..... : **Eccel Technology Ltd**

Address..... : Unit 16b Fir Tree Lane Groby, Leicester, United Kingdom

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.225)

Test Report Form No..... : TRF-4-E-154 A/0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **C2R Module**

Trade Mark..... : Eccel

Test Model..... : v1

Ratings..... : Please Refer to Page 6

Result : **PASS****Compiled by:**

Diamond Lu/ Administrators

Supervised by:

Kevin Huang/ RF Manager

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC -- TEST REPORT**

Test Report No. :	LCSA12055083EA	<u>March 20, 2026</u> Date of issue
--------------------------	-----------------------	--

Test Model.....	: v1
EUT.....	: C2R Module
Applicant.....	: Eccel Technology Ltd
Address.....	: Unit 16b Fir Tree Lane Groby, Leicester, United Kingdom
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Eccel Technology Ltd Sp. z o.o. Oddział w Polsce
Address.....	: Bydgoskich Przemyslowcow 6A, 85-862 Bydgoszcz, Poland
Telephone.....	: /
Fax.....	: /
Factory.....	: Eccel Technology Ltd Sp. z o.o. Oddział w Polsce
Address.....	: Bydgoskich Przemyslowcow 6A, 85-862 Bydgoszcz, Poland
Telephone.....	: /
Fax.....	: /

Test Result	PASS
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	March 20, 2026	Initial Issue	---



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1 Description of Device (EUT)	6
1.2 Support equipment List	7
1.3 External I/O	7
1.4 Description of Test Facility	7
1.5 Statement of The Measurement Uncertainty	8
1.6 Measurement Uncertainty	8
1.7 Description of Test Modes	8
2. TEST METHODOLOGY	9
2.1. EUT Configuration	9
2.2. EUT Exercise	9
2.3 General Test Procedures	9
3. SYSTEM TEST CONFIGURATION	10
3.1. Justification	10
3.2. EUT Exercise Software	10
3.3. Special Accessories	10
3.4. Block Diagram/Schematics	10
3.5. Equipment Modifications	10
3.6. Test Setup	10
4. SUMMARY OF TEST RESULTS	11
5. RADIATED MEASUREMENT	12
5.1. Radiated Emission	12
5.2. Field Strength of Fundamental Emissions and Mask Measurement	28
6. BANDWIDTH OF THE OPERATING FREQUENCY	33
6.1. Standard Applicable	33
6.2. Test Result	33
7. FREQUENCY STABILITY MEASUREMENT	34
7.1 Standard Applicable	34
7.2 Test Result	34
8. LINE CONDUCTED EMISSIONS	35
8.1. Standard Applicable	35
8.2. Block Diagram of Test Setup	35
8.3 Disturbance Calculation	35
8.4. Test Results	35
9. ANTENNA REQUIREMENTS	44
9.1 Standard Applicable	44
9.2 Antenna Connected Construction	44
10. LIST OF MEASURING EQUIPMENTS	45
11. Test Setup Photographs of Eut	46
12. Exterior Photographs of the Eut	46
13. Interior Photographs of the Eut	46



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT	: C2R Module
Test Model	: v1
Ratings	: Input: DC 5V, 500mA
Hardware Version	: 1.0
Software Version	: 1.8
NFC	:
Operating Frequency	: 13.56MHz
Modulation Type	: ASK
Antenna Description	: PCB Track Loop Antenna*4

Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.





1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
---	---	---	---	---

1.3 External I/O

I/O Port Description	Quantity	Cable
---	---	---

1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier is CN0071.
CNAS Registration Number is L4595.
Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.





1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	±3.10dB	(1)
		30MHz~200MHz	±2.96dB	(1)
		200MHz~1000MHz	±3.10dB	(1)
		1GHz~26.5GHz	±3.80dB	(1)
		26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	±1.63dB	(1)
Power disturbance	:	30MHz~300MHz	±1.60dB	(1)
Occupied Channel Bandwidth	:	1GHz-40GHz	±5%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in Y position.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.225 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2020 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2020.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software provided by applicant.

3.3. Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
/	/	/	/	/	/	/	/

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.





4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
Test Items	FCC Rules	Result
Line Conducted Emissions	§15.207(a)	PASS
Field Strength of Fundamental Emissions	§15.225(a)(b)(c)	PASS
Radiated Emissions	§15.225(d) & §15.209	PASS
20dB Bandwidth	§ 15.215	PASS
Frequency Stability	§15.225(e)	PASS
Antenna Requirement	§15.203	PASS





5. RADIATED MEASUREMENT

5.1. Radiated Emission

5.1.1. Standard Applicable

According to §15.209/ §15.205

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2\)
13.36-13.41			

1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.1.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

5.1.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.1.4. Test Setup Layout

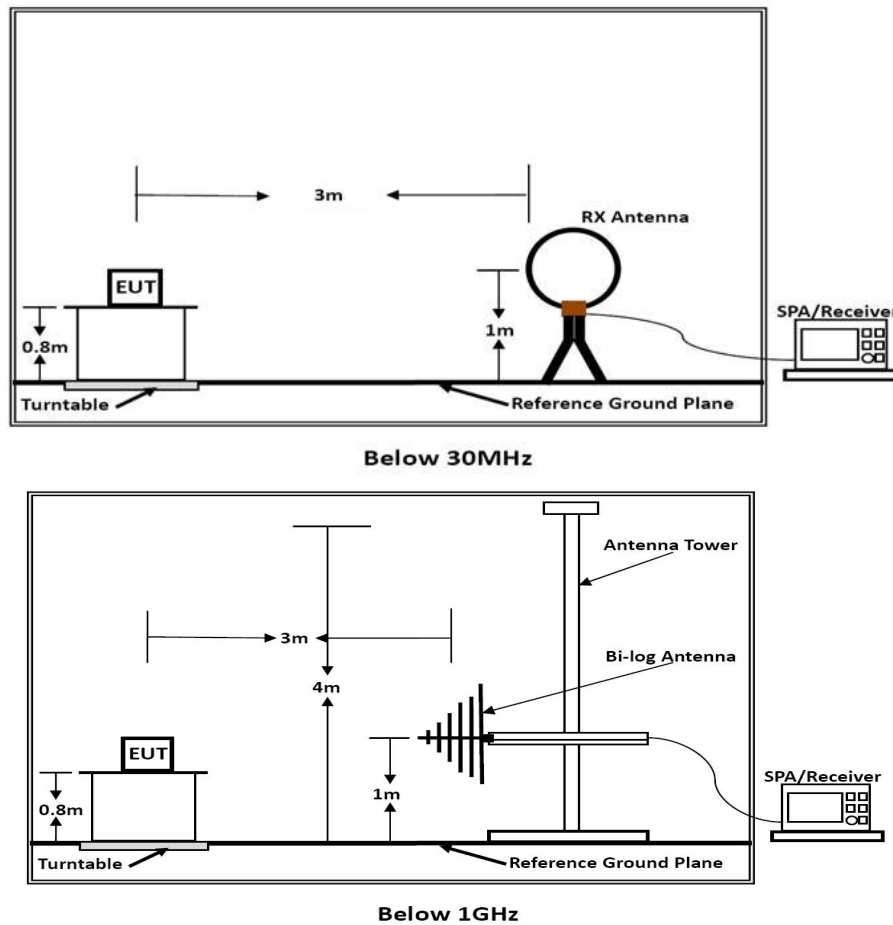

5.1.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.1.6. Test Results

Temperature	23.6℃	Humidity	52.2%
Test Engineer	Jerry Chu	Configurations	NFC

PASS.


The test data please refer to following page:

ANT1

9 KHz~30MHz

Note: Only recorded the worst test result.

X axis

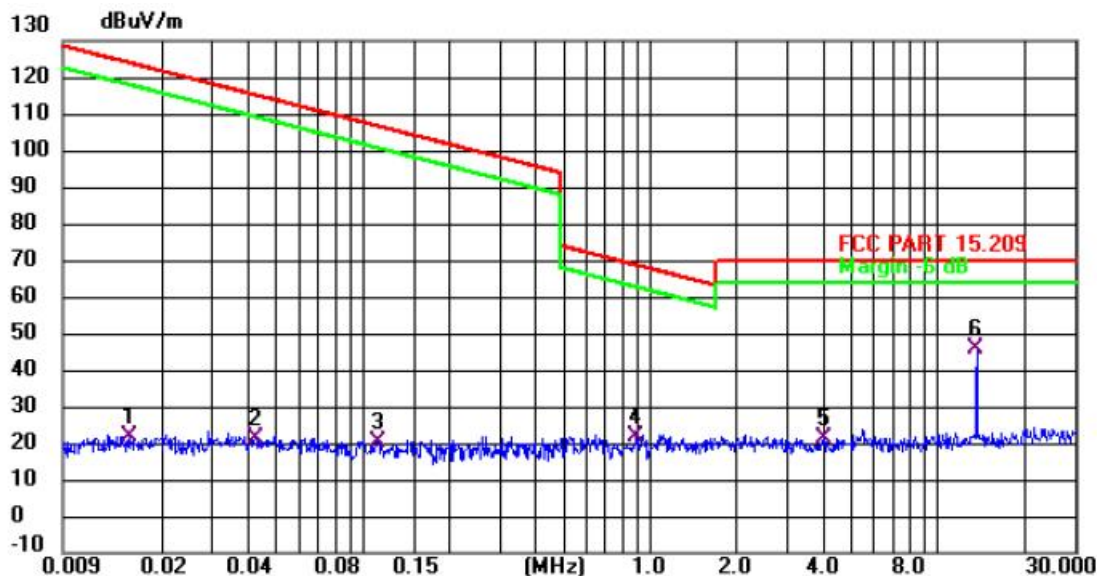

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		0.0154	31.73	-10.04	21.69	123.85	-102.1	QP
2		0.0422	31.32	-10.30	21.02	115.10	-94.08	QP
3		0.1121	31.19	-10.81	20.38	106.61	-86.23	QP
4		0.8870	31.98	-10.45	21.53	68.65	-47.12	QP
5		4.0125	31.92	-10.56	21.36	69.54	-48.18	QP
6	*	13.5600	57.15	-11.21	45.94	69.54	-23.60	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




ANT2

9 KHz~30MHz

Note: Only recorded the worst test result.

X axis

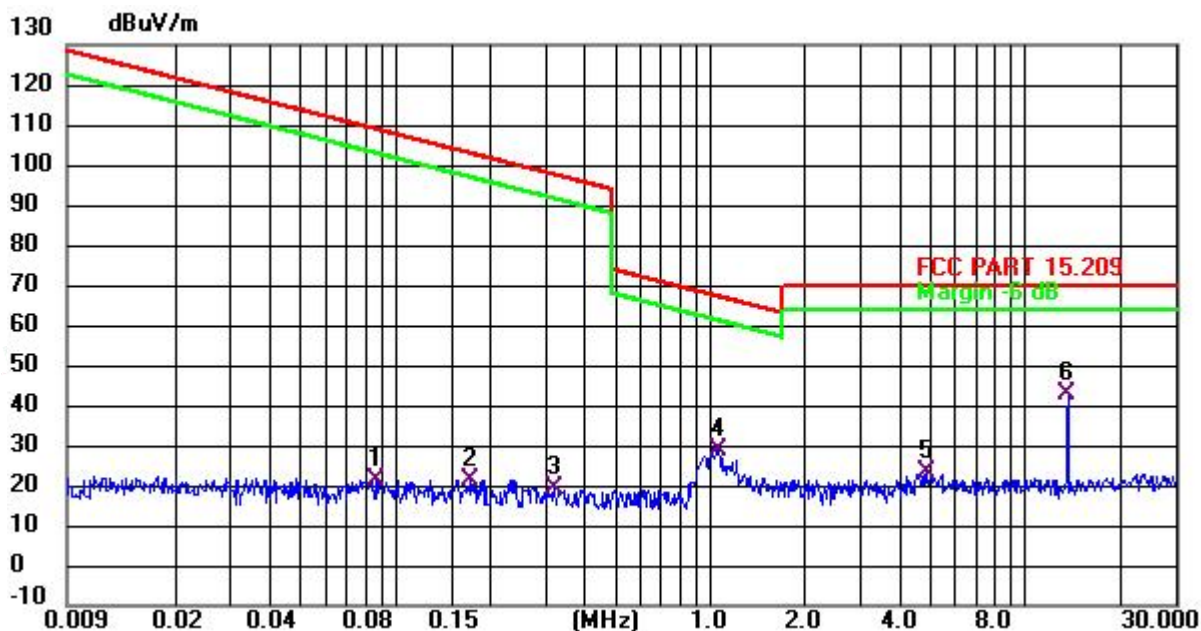

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		0.0858	31.97	-10.75	21.22	108.93	-87.71	QP
2		0.1710	32.02	-10.87	21.15	102.94	-81.79	QP
3		0.3190	30.04	-10.84	19.20	97.53	-78.33	QP
4		1.0523	39.28	-10.36	28.92	67.16	-38.24	QP
5		4.8752	33.86	-10.54	23.32	69.54	-46.22	QP
6	*	13.5600	54.15	-11.21	42.94	69.54	-26.60	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




ANT3

9 KHz~30MHz

Note: Only recorded the worst test result.

X axis

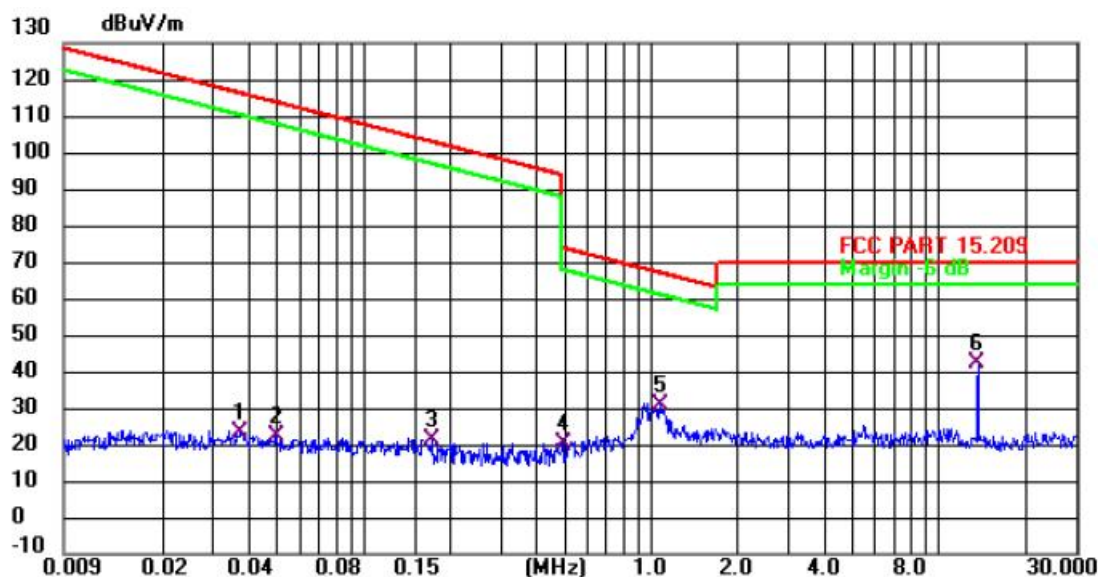

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detecto
1		0.0371	33.36	-10.27	23.09	116.22	-93.13	QP
2		0.0497	32.79	-10.35	22.44	113.68	-91.24	QP
3		0.1710	32.22	-10.87	21.35	102.94	-81.59	QP
4		0.4910	30.92	-10.81	20.11	73.78	-53.67	QP
5		1.0783	40.89	-10.36	30.53	66.95	-36.42	QP
6	*	13.5600	53.65	-11.21	42.44	69.54	-27.10	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




ANT4

9 KHz~30MHz

Note: Only recorded the worst test result.

X axis

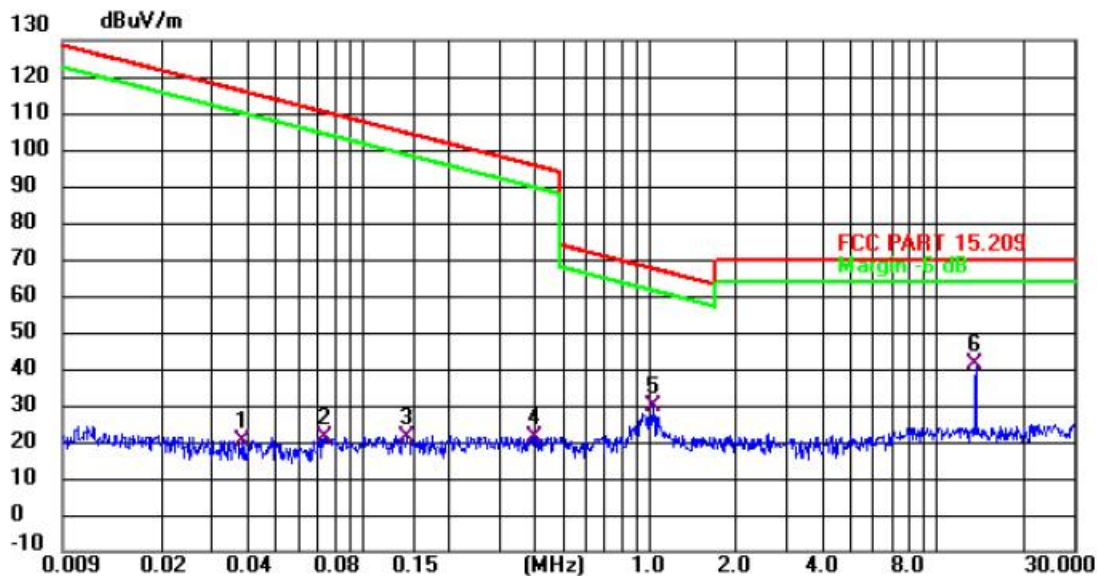

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		0.0381	30.69	-10.27	20.42	115.99	-95.57	QP
2		0.0740	31.73	-10.58	21.15	110.22	-89.07	QP
3		0.1430	32.28	-10.88	21.40	104.50	-83.10	QP
4		0.3975	32.13	-10.82	21.31	95.62	-74.31	QP
5		1.0270	40.23	-10.35	29.88	67.37	-37.49	QP
6	*	13.5600	52.65	-11.21	41.44	69.54	-28.10	QP

Remark:

1). X axis / Y axis/ Z axis were tested,report only recorded the worst result of X axis..

2). Margin=Reading level + Factor- Limit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Temperature	23.8	Humidity	52.1%
Test Engineer	Jerry Chu	Configurations	NFC

ANT1**30MHz ~ 1GHz**

Horizontal:

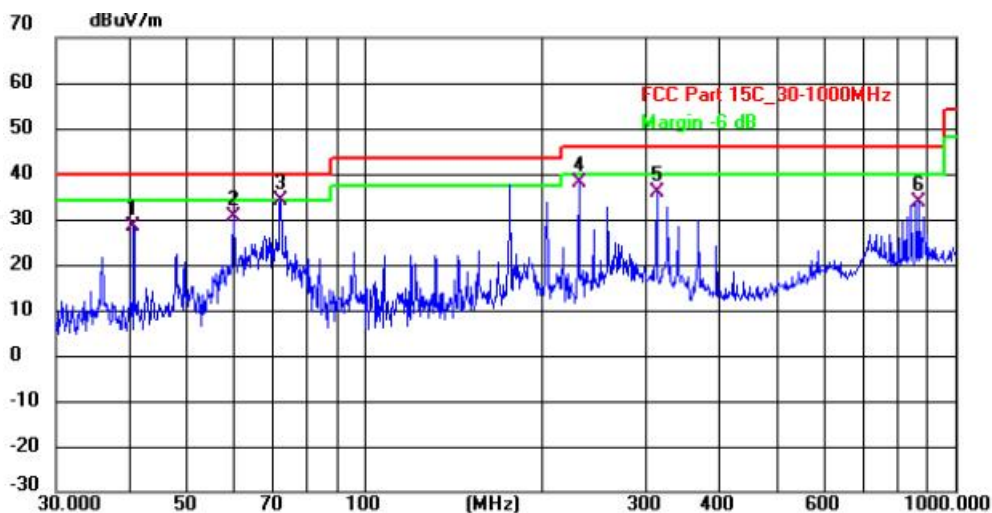

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		40.5591	46.31	-18.02	28.29	40.00	-11.71	QP
2		59.8588	48.34	-17.71	30.63	40.00	-9.37	QP
3	*	72.0843	54.81	-20.61	34.20	40.00	-5.80	QP
4		230.9067	56.57	-18.55	38.02	46.00	-7.98	QP
5		312.1794	51.93	-16.09	35.84	46.00	-10.16	QP
6		869.1302	40.49	-6.89	33.60	46.00	-12.40	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical:

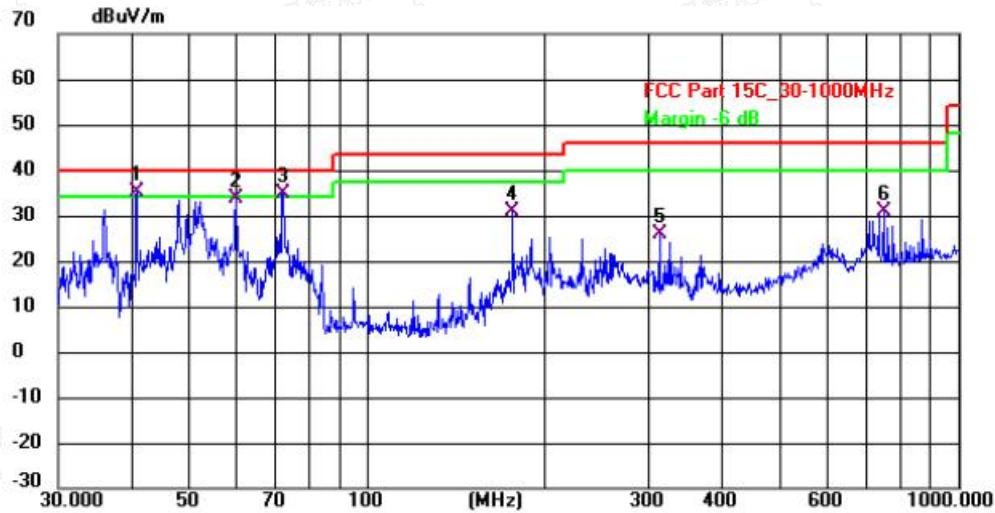

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	40.7016	53.99	-18.65	35.34	40.00	-4.66	QP
2		59.8588	54.00	-20.09	33.91	40.00	-6.09	QP
3	!	72.0843	55.89	-20.90	34.99	40.00	-5.01	QP
4		176.2686	50.89	-20.08	30.81	43.50	-12.69	QP
5		312.1794	41.57	-15.55	26.02	46.00	-19.98	QP
6		747.4825	39.88	-9.08	30.80	46.00	-15.20	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



ANT2

30MHz ~ 1GHz

Horizontal:

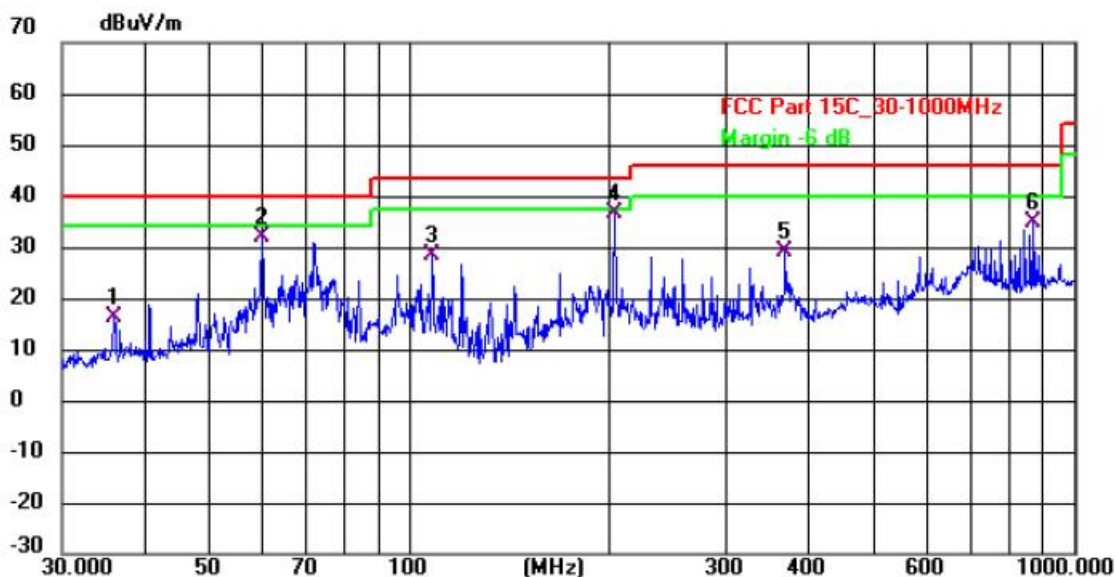

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		36.0007	35.13	-18.80	16.33	40.00	-23.67	QP
2		59.8588	49.57	-17.71	31.86	40.00	-8.14	QP
3		108.2664	47.17	-18.66	28.51	43.50	-14.99	QP
4	*	203.5226	55.92	-19.39	36.53	43.50	-6.97	QP
5		366.8231	43.35	-14.08	29.27	46.00	-16.73	QP
6		869.1300	41.65	-6.89	34.76	46.00	-11.24	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical:

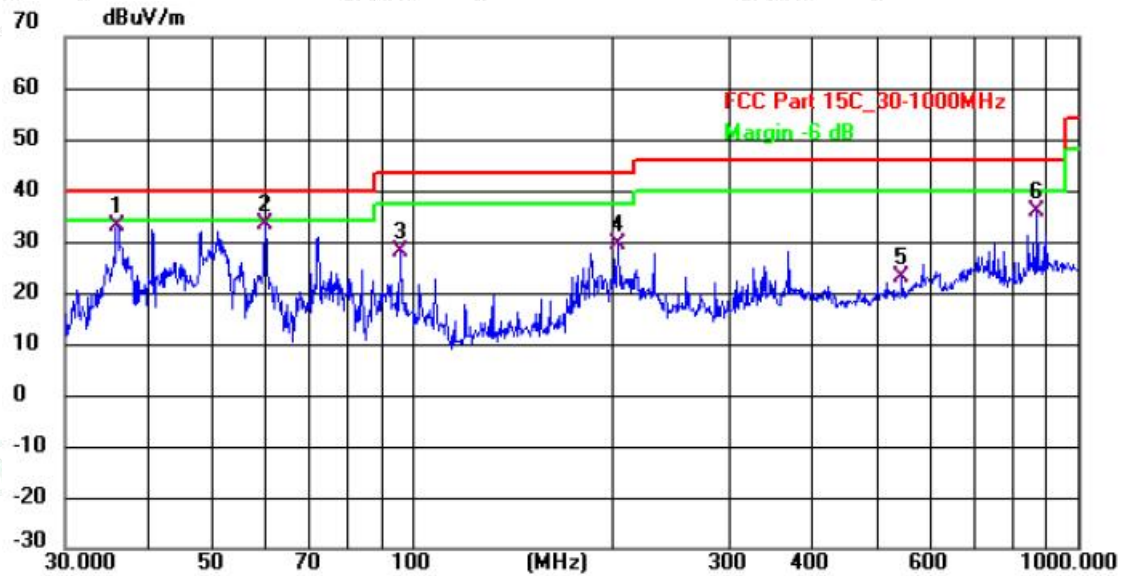

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		35.8746	51.98	-18.96	33.02	40.00	-6.98	QP
2	*	60.0690	53.43	-20.12	33.31	40.00	-6.69	QP
3		96.0985	47.72	-19.77	27.95	43.50	-15.55	QP
4		203.5226	47.76	-18.29	29.47	43.50	-14.03	QP
5		543.2740	34.53	-11.35	23.18	46.00	-22.82	QP
6		869.1300	43.37	-7.38	35.99	46.00	-10.01	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



ANT3

30MHz ~ 1GHz

Horizontal:

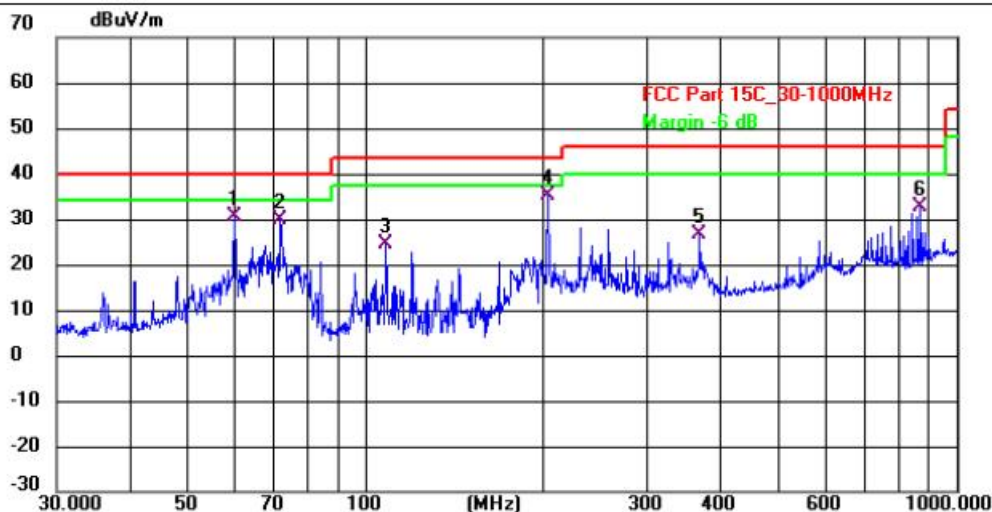

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detect
1		59.8588	48.07	-17.71	30.36	40.00	-9.64	QP
2		71.8320	50.45	-20.58	29.87	40.00	-10.13	QP
3		108.2666	43.17	-18.66	24.51	43.50	-18.99	QP
4	*	203.5227	54.42	-19.39	35.03	43.50	-8.47	QP
5		366.8231	40.85	-14.08	26.77	46.00	-19.23	QP
6		869.1302	39.65	-6.89	32.76	46.00	-13.24	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical:

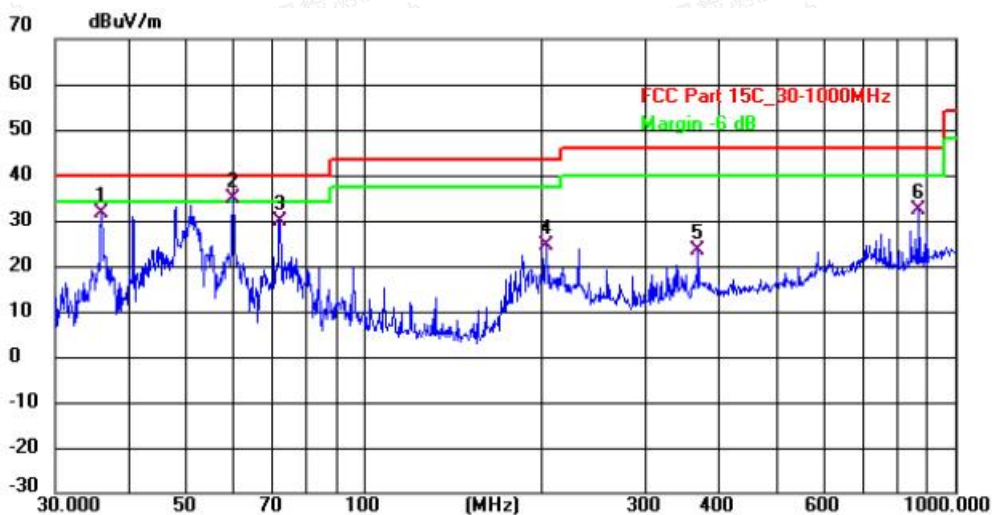

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		36.0007	50.38	-18.94	31.44	40.00	-8.56	QP
2	*	60.0691	54.93	-20.12	34.81	40.00	-5.19	QP
3		72.0843	50.62	-20.90	29.72	40.00	-10.28	QP
4		203.5227	42.76	-18.29	24.47	43.50	-19.03	QP
5		366.8231	38.46	-15.05	23.41	46.00	-22.59	QP
6		869.1302	39.87	-7.38	32.49	46.00	-13.51	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



ANT4

30MHz ~ 1GHz

Horizontal:

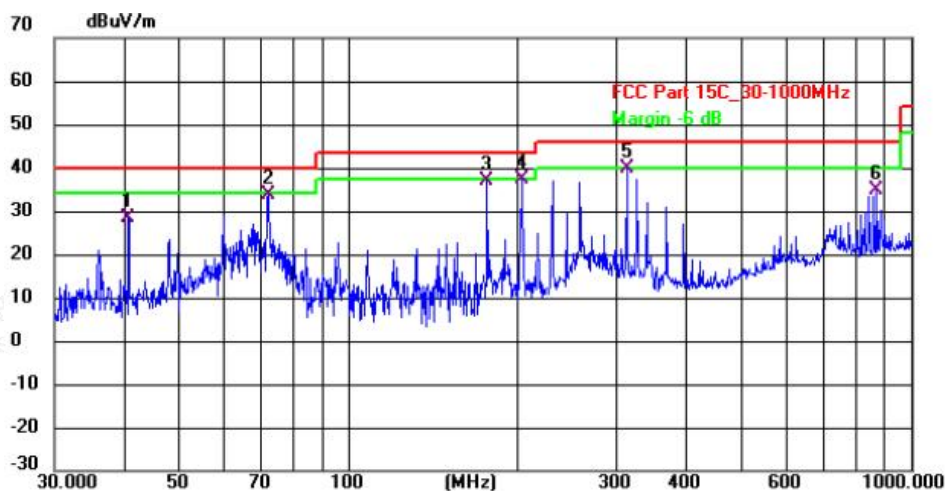

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector
1		40.5591	46.33	-18.02	28.31	40.00	-11.69	QP
2		72.0843	54.19	-20.61	33.58	40.00	-6.42	QP
3		176.2686	58.40	-21.27	37.13	43.50	-6.37	QP
4	*	203.5227	56.87	-19.39	37.48	43.50	-6.02	QP
5		312.1794	56.01	-16.09	39.92	46.00	-6.08	QP
6		869.1302	41.83	-6.89	34.94	46.00	-11.06	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical:

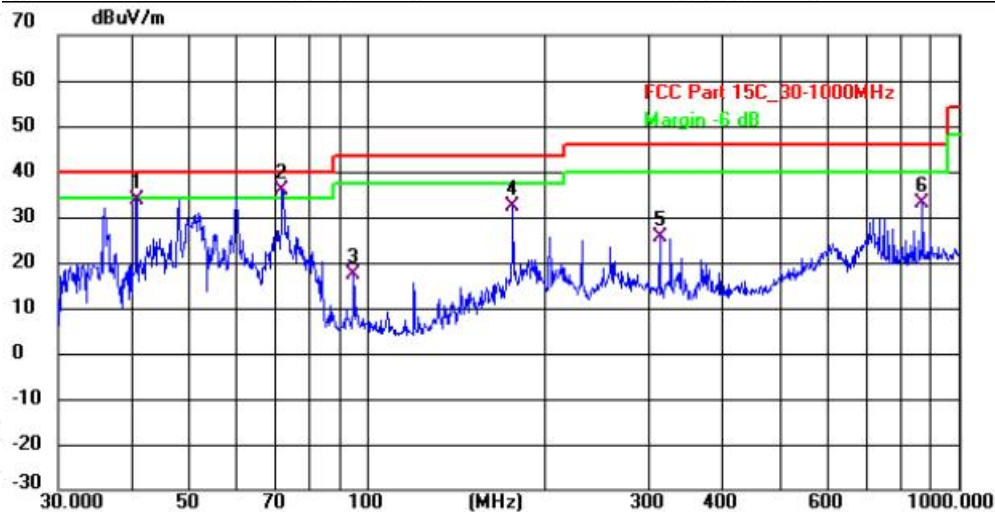

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detecto
			dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		40.7016	52.35	-18.65	33.70	40.00	-6.30	QP
2	*	71.8320	56.86	-20.89	35.97	40.00	-4.03	QP
3		94.7600	37.26	-19.88	17.38	43.50	-26.12	QP
4		176.2686	52.42	-20.08	32.34	43.50	-11.16	QP
5		312.1794	40.98	-15.55	25.43	46.00	-20.57	QP
6		869.1302	40.48	-7.38	33.10	46.00	-12.90	QP

Note:

Pre-scan all modes and recorded the worst case results in this report.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Factor + Read Level = Level.

Margin=Level – Limit.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




5.2. Field Strength of Fundamental Emissions and Mask Measurement

5.2.1. Block Diagram of Test Setup

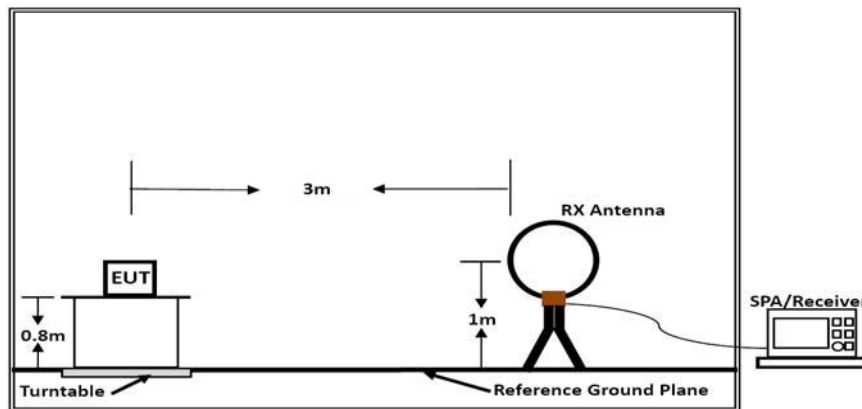

Below 30MHz

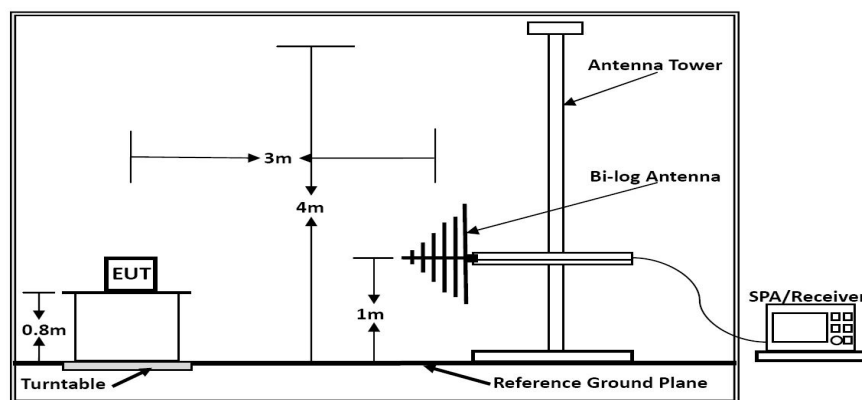

Below 1GHz

5.2.2. Field strength of fundamental emissions limit and Mask limit

The field strength of fundamental emissions shall not exceed 15848 microvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (microvolts/meter)	Field Strength (dBμV/m) at 10m	Field Strength (dBμV/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask Limit:

Frequency (MHz)	Limit (dBuV/m)	Distance (m)
1.705-13.110	69.5	3
13.110-13.410	80.5	3
13.410-13.553	90.5	3
13.553-13.567	124.0	3
13.567-13.710	90.5	3
13.710-14.010	80.5	3
14.010-30.000	69.5	3



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.2.3. Test Results


Temperature	23.6℃	Humidity	52.2%
Test Engineer	Jerry Chu	Configurations	NFC

PASS.

The test data please refer to following page:

ANT1

X axis

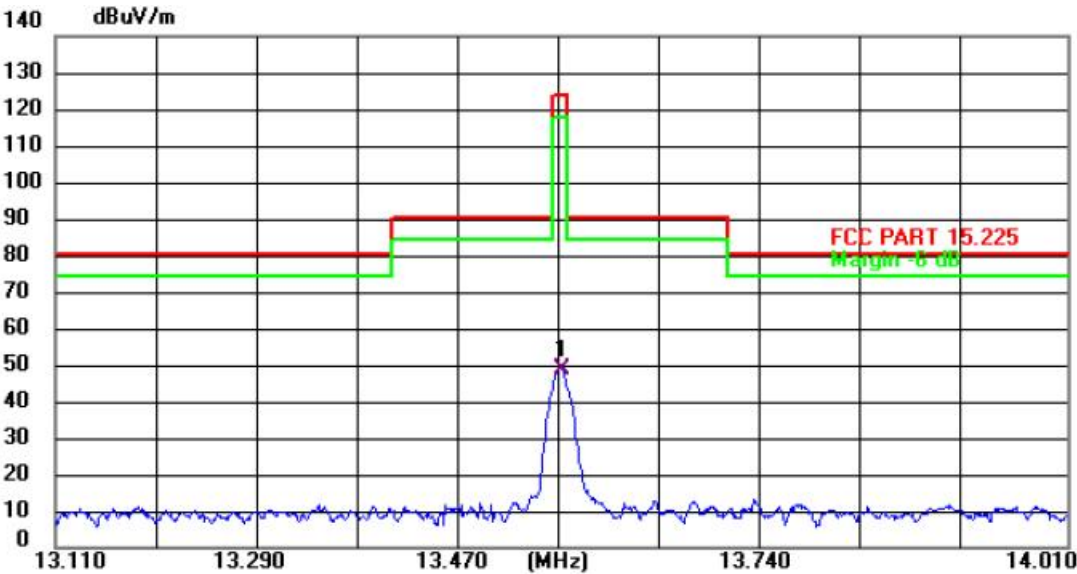


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	13.5600	60.13	-11.21	48.92	124.00	-75.08	QP





ANT2

X axis

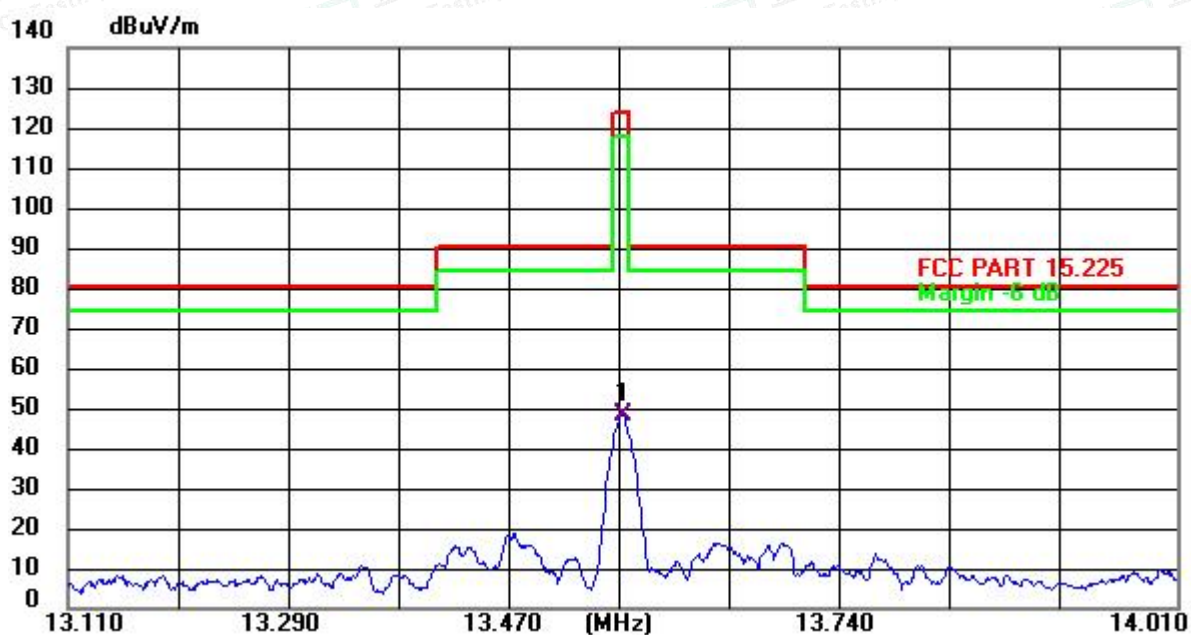

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	13.5600	59.71	-11.21	48.50	124.00	-75.50	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



ANT3

X axis

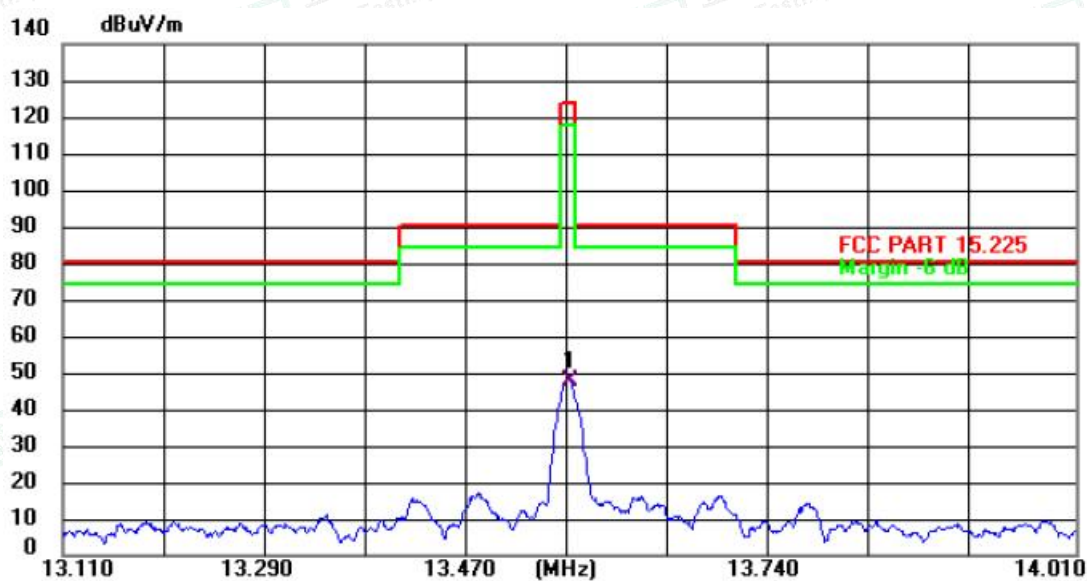

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	13.5600	59.13	-11.21	47.92	124.00	-76.08	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



ANT4

X axis

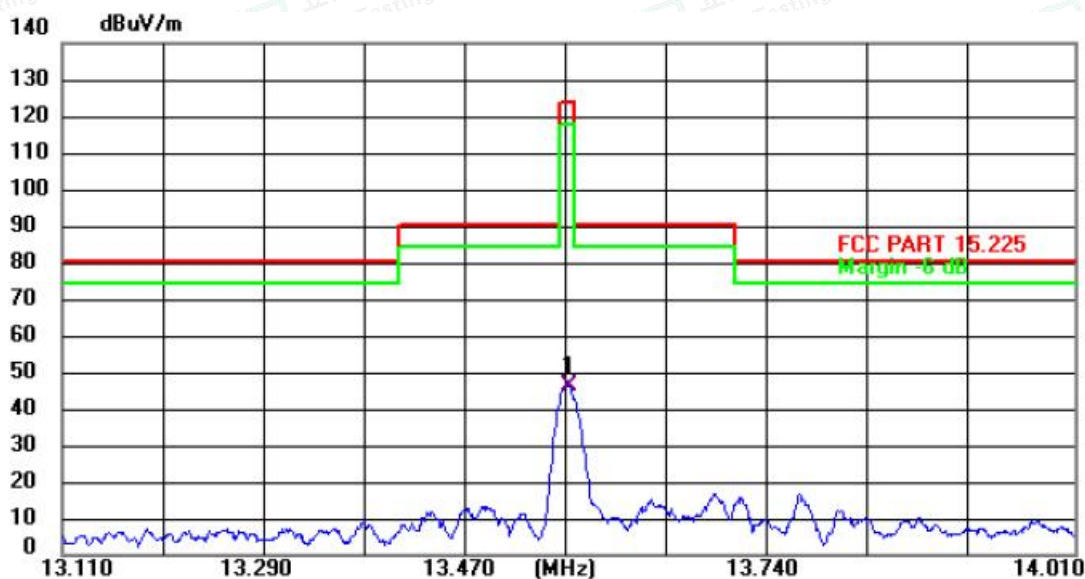

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	13.5600	57.65	-11.21	46.44	124.00	-77.56	QP

*Note: Factor= Antenna Factor + Cable Loss

Measured= Reading + Factor, Margin= Measured - Limit

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Measured distance is 3m.

All emissions emit from non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

X axis / Y axis/ Z axis were tested,report only recorded the worst result of X axis.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



6. BANDWIDTH OF THE OPERATING FREQUENCY


6.1. Standard Applicable

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

6.2. Test Result

EUT	C2R Module
RBW	10Hz
VBW	30Hz
SPAN	1kHz
Carrier Frequency (MHz)	20dB Bandwidth (kHz)
13.56	0.405

Please refer to the test plot:

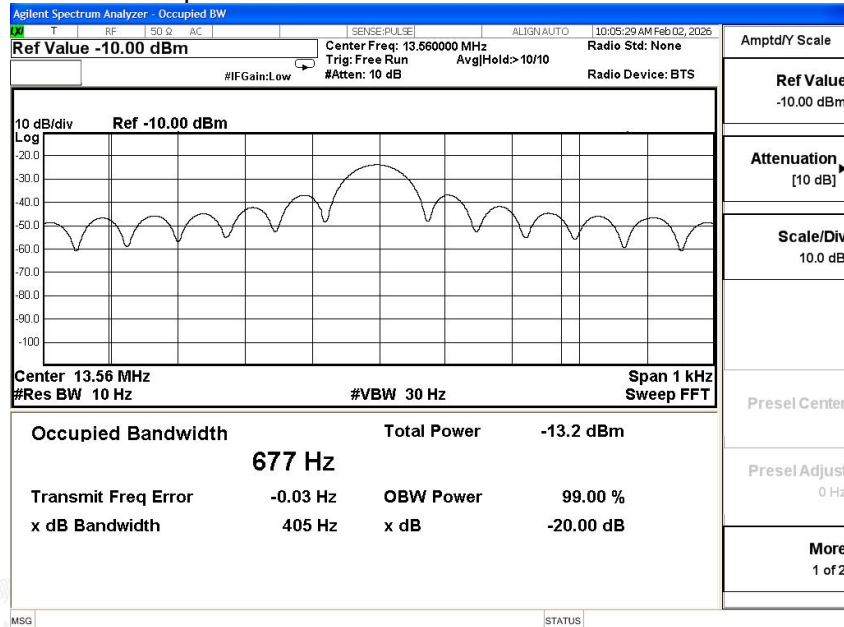

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



7. FREQUENCY STABILITY MEASUREMENT

7.1 Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a full charged battery.

7.2 Test Result

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)	Deviation (KHz)	Deviation (ppm)	Limit (ppm)
VN	13.56046	0.46	33.73	100
VL	13.56042	0.42	31.20	100
VH	13.56031	0.31	22.50	100

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)	Deviation (KHz)	Deviation (ppm)	Limit (ppm)
-20	13.56033	0.33	24.32	100
-10	13.56019	0.19	14.04	100
0	13.56031	0.31	22.52	100
10	13.56036	0.36	26.70	100
20	13.56037	0.37	27.37	100
30	13.56035	0.35	25.83	100
40	13.56033	0.33	24.58	100
50	13.56029	0.29	21.72	100



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



8. LINE CONDUCTED EMISSIONS


8.1. Standard Applicable

According to §15.207(a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

8.2. Block Diagram of Test Setup

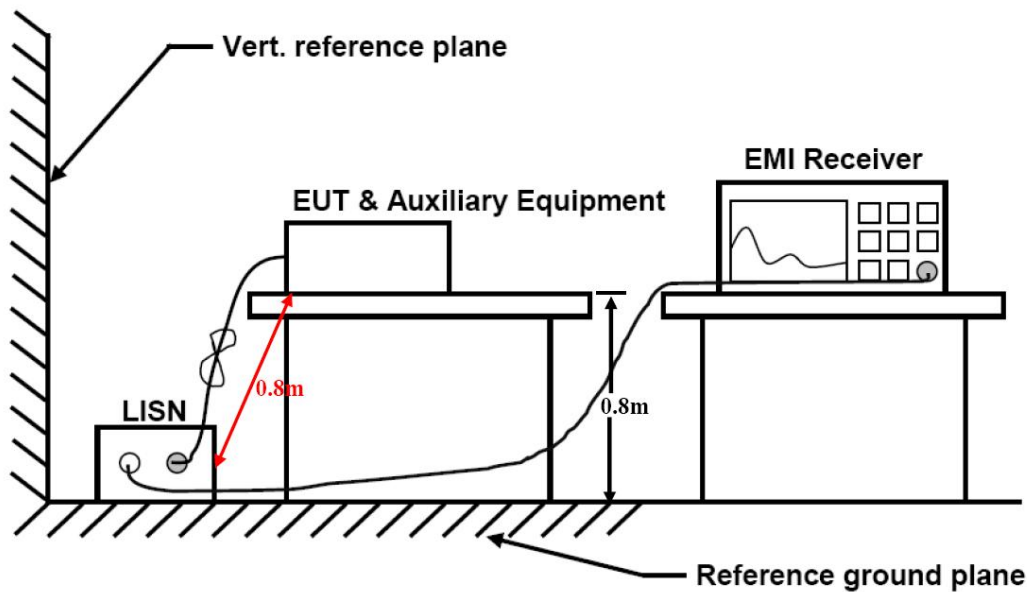

8.3 Disturbance Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dB}\mu\text{V)} = RA \text{ (dB}\mu\text{V)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

8.4. Test Results

Temperature	22.5°C	Humidity	53.7%
Test Engineer	Jerry Chu	Configurations	NFC

PASS.

The test data please refer to following page.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




AC Conducted Emission @ AC 120V/60Hz (worst case)

Model: ANT1

Line

dBuV

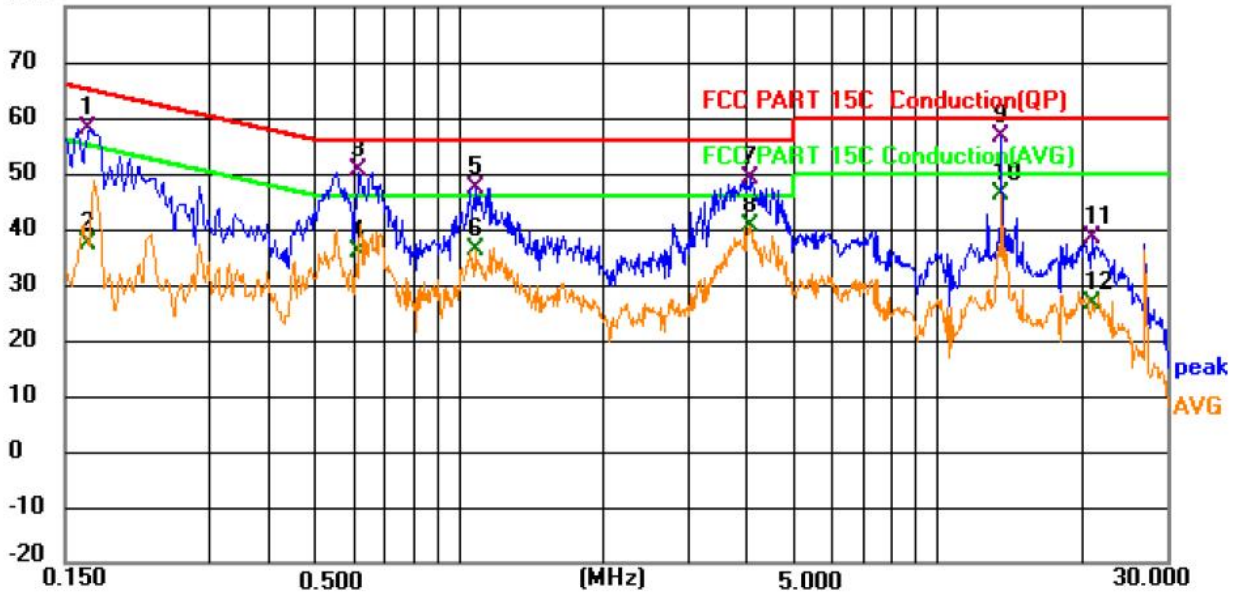

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.168	38.37	19.81	58.18	65.06	-6.88	QP
2		0.168	17.59	19.81	37.40	55.06	-17.66	AVG
3		0.618	30.89	19.47	50.36	56.00	-5.64	QP
4		0.618	16.26	19.47	35.73	46.00	-10.27	AVG
5		1.077	28.32	19.14	47.46	56.00	-8.54	QP
6		1.077	17.28	19.14	36.42	46.00	-9.58	AVG
7		4.056	29.94	19.15	49.09	56.00	-6.91	QP
8		4.056	21.29	19.15	40.44	46.00	-5.56	AVG
9	*	13.560	36.97	19.80	56.77	60.00	-3.23	QP
10		13.560	26.38	19.80	46.18	50.00	-3.82	AVG
11		21.003	19.49	18.99	38.48	60.00	-21.52	QP
12		21.003	7.77	18.99	26.76	50.00	-23.24	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Neutral

80.0 dBuV

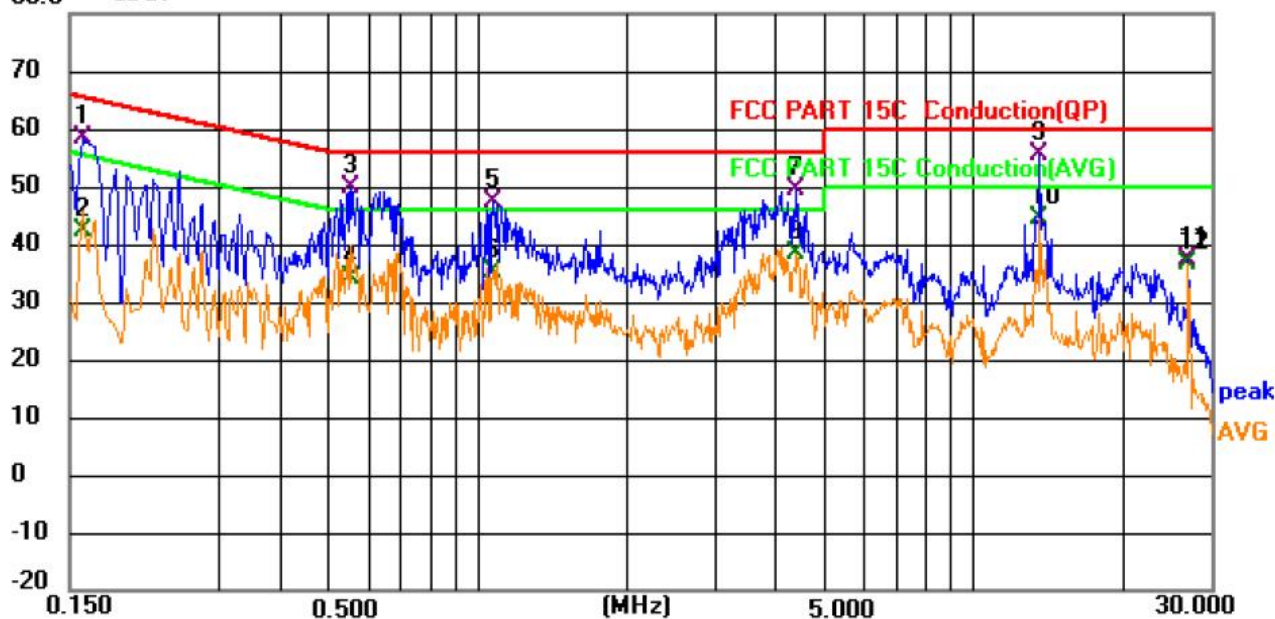

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.159	38.60	19.62	58.22	65.52	-7.30	QP
2		0.159	22.62	19.62	42.24	55.52	-13.28	AVG
3		0.555	30.40	19.42	49.82	56.00	-6.18	QP
4		0.555	14.58	19.42	34.00	46.00	-12.00	AVG
5		1.073	28.59	18.82	47.41	56.00	-8.59	QP
6		1.073	16.20	18.82	35.02	46.00	-10.98	AVG
7		4.389	30.64	18.92	49.56	56.00	-6.44	QP
8		4.389	19.60	18.92	38.52	46.00	-7.48	AVG
9	*	13.560	35.94	19.68	55.62	60.00	-4.38	QP
10		13.560	24.88	19.68	44.56	50.00	-5.44	AVG
11		27.123	18.14	19.06	37.20	60.00	-22.80	QP
12		27.123	17.43	19.06	36.49	50.00	-13.51	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**Model: ANT2**

Line

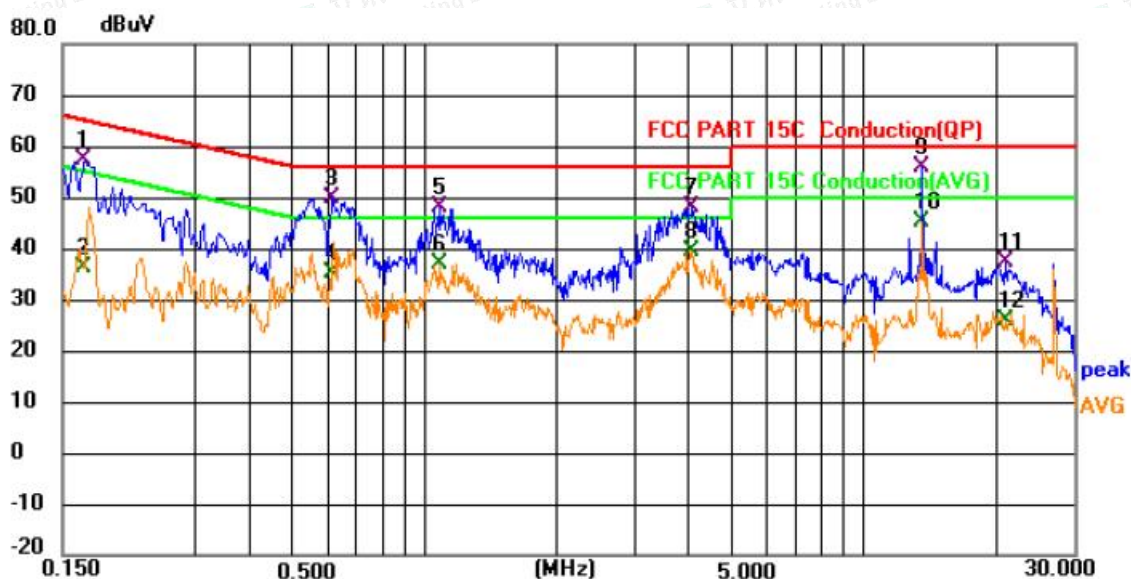

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margi-	Detector
		MHz	Level	Factor	ment		n	
			dBuV	dB	dBuV	dBuV	dB	
1		0.168	37.37	19.81	57.18	65.06	-7.88	QP
2		0.168	16.59	19.81	36.40	55.06	-18.66	AVG
3		0.618	30.39	19.47	49.86	56.00	-6.14	QP
4		0.618	15.76	19.47	35.23	46.00	-10.77	AVG
5		1.077	28.82	19.14	47.96	56.00	-8.04	QP
6		1.077	17.78	19.14	36.92	46.00	-9.08	AVG
7		4.056	28.94	19.15	48.09	56.00	-7.91	QP
8		4.056	20.29	19.15	39.44	46.00	-6.56	AVG
9	*	13.560	35.97	19.80	55.77	60.00	-4.23	QP
10		13.560	25.38	19.80	45.18	50.00	-4.82	AVG
11		21.003	18.49	18.99	37.48	60.00	-22.52	QP
12		21.003	6.77	18.99	25.76	50.00	-24.24	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Neutral

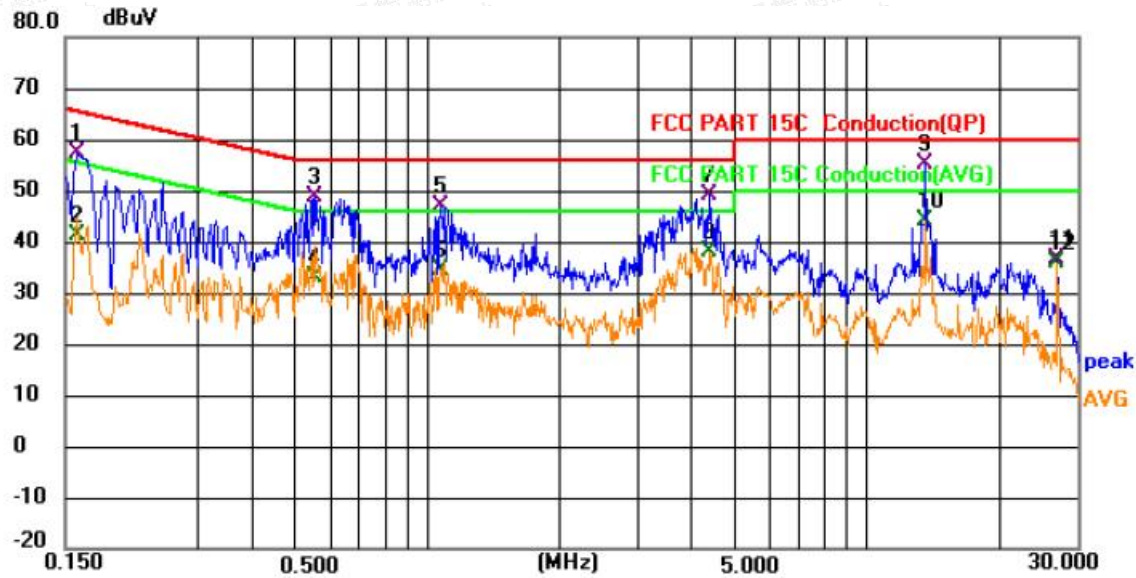

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.159	37.60	19.62	57.22	65.52	-8.30	QP
2		0.159	21.62	19.62	41.24	55.52	-14.28	AVG
3		0.555	29.40	19.42	48.82	56.00	-7.18	QP
4		0.555	13.58	19.42	33.00	46.00	-13.00	AVG
5		1.073	28.09	18.82	46.91	56.00	-9.09	QP
6		1.073	15.70	18.82	34.52	46.00	-11.48	AVG
7		4.389	30.14	18.92	49.06	56.00	-6.94	QP
8		4.389	19.10	18.92	38.02	46.00	-7.98	AVG
9	*	13.560	35.44	19.68	55.12	60.00	-4.88	QP
10		13.560	24.38	19.68	44.06	50.00	-5.94	AVG
11		27.123	17.64	19.06	36.70	60.00	-23.30	QP
12		27.123	16.93	19.06	35.99	50.00	-14.01	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**Model: ANT 3**

Line

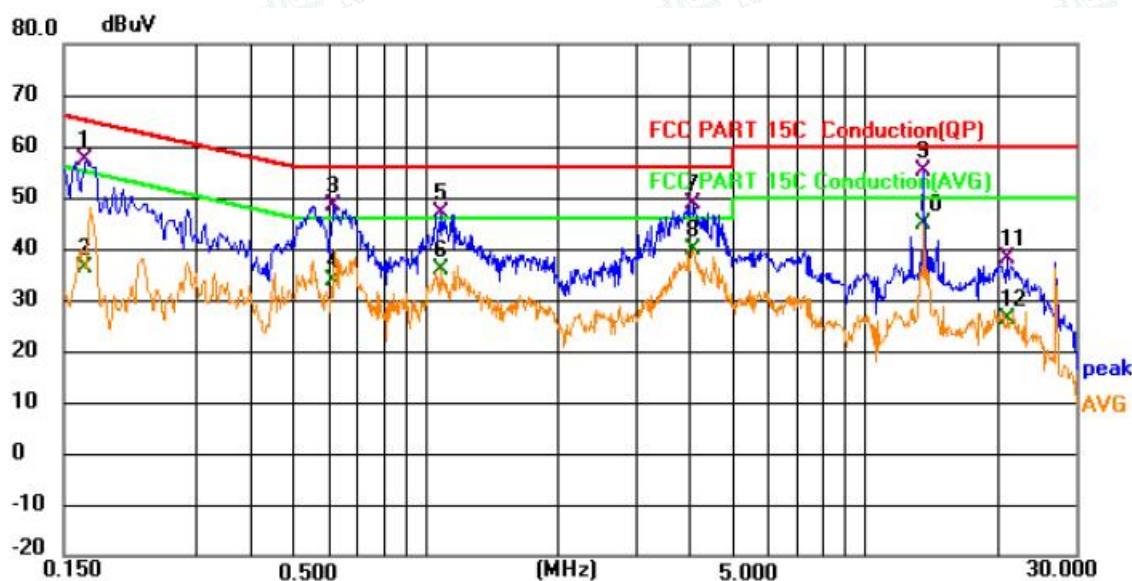

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.168	37.37	19.81	57.18	65.06	-7.88	QP
2		0.168	16.59	19.81	36.40	55.06	-18.66	AVG
3		0.618	28.89	19.47	48.36	56.00	-7.64	QP
4		0.618	14.26	19.47	33.73	46.00	-12.27	AVG
5		1.077	27.82	19.14	46.96	56.00	-9.04	QP
6		1.077	16.78	19.14	35.92	46.00	-10.08	AVG
7		4.056	29.44	19.15	48.59	56.00	-7.41	QP
8		4.056	20.79	19.15	39.94	46.00	-6.06	AVG
9	*	13.560	35.47	19.80	55.27	60.00	-4.73	QP
10		13.560	24.88	19.80	44.68	50.00	-5.32	AVG
11		21.003	18.99	18.99	37.98	60.00	-22.02	QP
12		21.003	7.27	18.99	26.26	50.00	-23.74	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Neutral

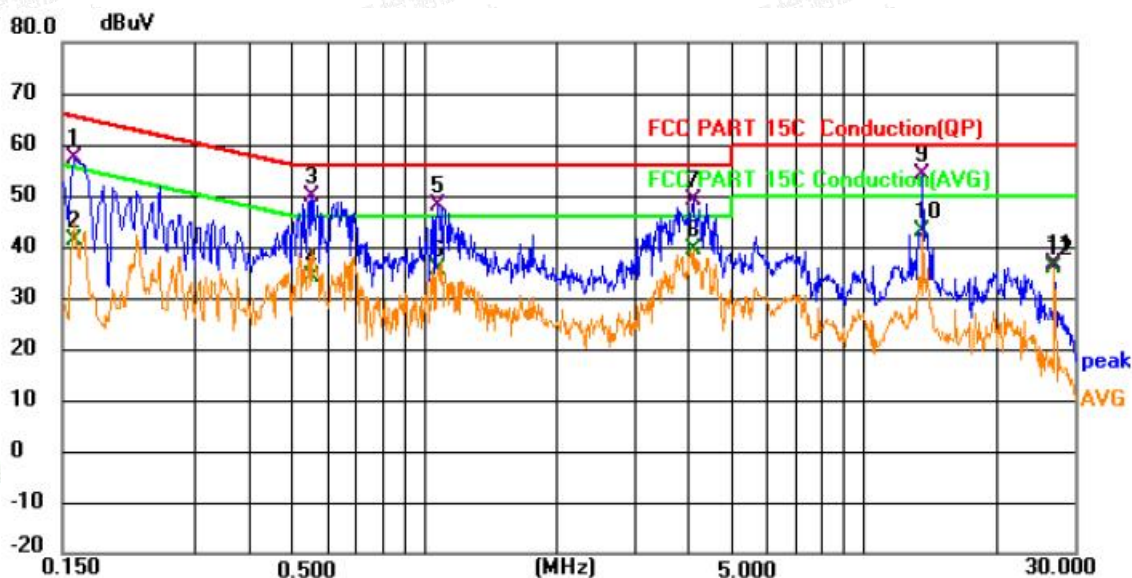

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.159	37.60	19.62	57.22	65.52	-8.30	QP
2		0.159	21.62	19.62	41.24	55.52	-14.28	AVG
3		0.555	30.40	19.42	49.82	56.00	-6.18	QP
4		0.555	14.58	19.42	34.00	46.00	-12.00	AVG
5		1.073	29.09	18.82	47.91	56.00	-8.09	QP
6		1.073	16.70	18.82	35.52	46.00	-10.48	AVG
7		4.088	30.04	18.97	49.01	56.00	-6.99	QP
8		4.088	20.42	18.97	39.39	46.00	-6.61	AVG
9	*	13.560	34.44	19.68	54.12	60.00	-5.88	QP
10		13.560	23.38	19.68	43.06	50.00	-6.94	AVG
11		27.123	17.64	19.06	36.70	60.00	-23.30	QP
12		27.123	16.93	19.06	35.99	50.00	-14.01	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**Model: ANT 4**

Line

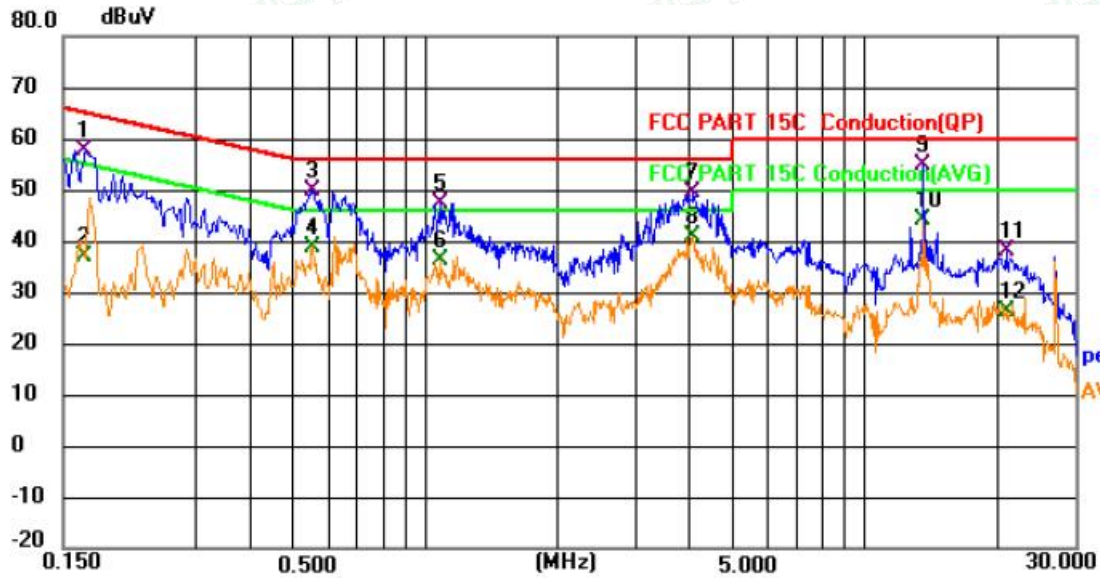

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.168	37.87	19.81	57.68	65.06	-7.38	QP
2		0.168	17.09	19.81	36.90	55.06	-18.16	AVG
3		0.555	30.10	19.67	49.77	56.00	-6.23	QP
4		0.555	19.20	19.67	38.87	46.00	-7.13	AVG
5		1.077	28.32	19.14	47.46	56.00	-8.54	QP
6		1.077	17.28	19.14	36.42	46.00	-9.58	AVG
7		4.056	30.44	19.15	49.59	56.00	-6.41	QP
8	*	4.056	21.79	19.15	40.94	46.00	-5.06	AVG
9		13.560	34.97	19.80	54.77	60.00	-5.23	QP
10		13.560	24.38	19.80	44.18	50.00	-5.82	AVG
11		21.003	18.99	18.99	37.98	60.00	-22.02	QP
12		21.003	7.27	18.99	26.26	50.00	-23.74	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Neutral

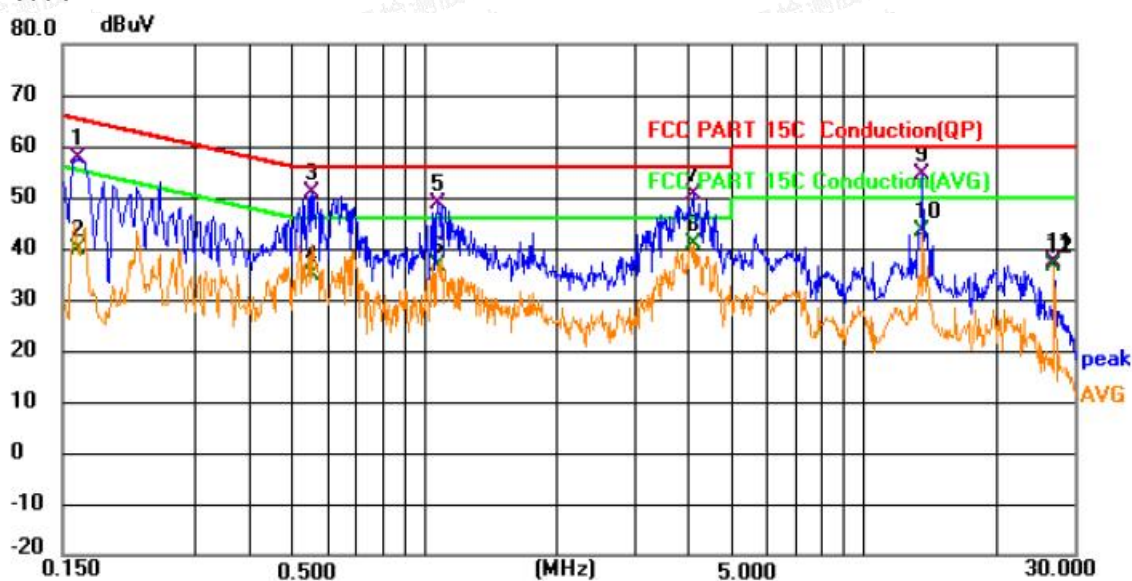

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.163	37.90	19.63	57.53	65.31	-7.78	QP
2		0.163	20.26	19.63	39.89	55.31	-15.42	AVG
3		0.555	31.40	19.42	50.82	56.00	-5.18	QP
4		0.555	15.58	19.42	35.00	46.00	-11.00	AVG
5		1.073	30.09	18.82	48.91	56.00	-7.09	QP
6		1.073	17.70	18.82	36.52	46.00	-9.48	AVG
7		4.088	31.54	18.97	50.51	56.00	-5.49	QP
8	*	4.088	21.92	18.97	40.89	46.00	-5.11	AVG
9		13.560	34.94	19.68	54.62	60.00	-5.38	QP
10		13.560	23.88	19.68	43.56	50.00	-6.44	AVG
11		27.123	18.14	19.06	37.20	60.00	-22.80	QP
12		27.123	17.43	19.06	36.49	50.00	-13.51	AVG

***Note: 1). Pre-scan all modes and recorded the worst case results in this report

2). Measurement = Reading + Correct Factor, Margin = Measurement – Limit,

Correct Factor=Lisn Factor+Cable Factor+Insertion loss of Pulse Limiter.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



9. ANTENNA REQUIREMENTS

9.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

9.2 Antenna Connected Construction

9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2.2. Antenna Connector Construction

The antenna is Internal Antenna connect to PCB board and no consideration of replacement. Please see the antenna photo for details.

9.2.3. Results: Compliance.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



10. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2025-05-22	2026-05-21
2	Power Sensor	R&S	NRP-Z81	100458	2025-05-22	2026-05-21
3	Power Sensor	R&S	U2021	10057	2025-05-22	2026-05-21
4	Test Software	MWRFTest	MTS 8310	/	N/A	N/A
5	RF Control Unit	MWRFTest	MW100-RFCB	/	2025-11-07	2026-11-06
6	MXA Signal Analyzer	Agilent	N9020A	MY53300304	2025-05-22	2026-05-21
7	DC Power Supply	Agilent	E3642A	N/A	2025-09-27	2026-09-26
8	EMI Test Software	Farad	EZ-EMC	Ver. EMC-CON 3A1.1+	N/A	N/A
9	3m Semi Anechoic Chamber	Maorui	966	/	2023-10-12	2026-10-11
10	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
11	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2024-07-13	2027-07-12
12	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2024-08-03	2027-08-02
13	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2024-07-13	2027-07-12
14	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2024-07-13	2027-07-12
15	Broadband Preamplifier	SCHWARZBECK	BBV9719	9719-025	2024-07-30	2027-07-29
16	EMI Test Receiver	R&S	ESR 7	101181	2025-05-22	2026-05-21
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2025-05-22	2026-05-21
18	Low-frequency amplifier	SchwarzZBECK	BBV9745	00253	2025-09-27	2026-09-26
19	High-frequency amplifier	JS Denki Pte	PA0118-43	JSPA21009	2025-09-27	2026-09-26
20	6dB Attenuator	/	100W/6dB	1172040	2025-05-22	2026-05-21
21	3dB Attenuator	/	2N-3dB	/	2025-09-28	2026-09-27
22	EMI Test Receiver	R&S	ESPI	101940	2025-05-22	2026-05-21
23	Artificial Mains	R&S	ENV216	101479	2025-05-23	2026-05-22
24	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2025-05-22	2026-05-21
25	EMI Test Software	Farad	EZ-EMC	Ver. EMC-CON 3A1.1+	N/A	N/A
26	Antenna Mast	Max-Full	MFA-515BSN	1308572	N/A	N/A
27	Pulse Limiter	R&S	ESH3-Z2	102750	2025-05-23	2026-05-22



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



11. Test Setup Photographs of Eut

Please refer to separated files for Test Setup Photos of the EUT.

12. Exterior Photographs of the Eut

Please refer to separated files for Exterior Photos of the EUT.

13. Interior Photographs of the Eut

Please refer to separated files for Interior Photos of the EUT.

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity