

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8158.70	47.22	-1.59	45.63	74.00	-28.37	Peak	Horizontal
*	9756.70	46.28	0.04	46.32	68.20	-21.88	Peak	Horizontal
	12429.10	45.46	1.62	47.08	74.00	-26.92	Peak	Horizontal
*	13607.20	45.49	3.00	48.49	68.20	-19.71	Peak	Horizontal
	8095.80	47.37	-1.71	45.66	74.00	-28.34	Peak	Vertical
*	10324.50	45.56	0.41	45.98	68.20	-22.22	Peak	Vertical
	11689.60	46.70	0.47	47.17	74.00	-26.83	Peak	Vertical
*	14404.50	43.64	4.60	48.24	68.20	-19.96	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8446.00	47.24	-1.29	45.96	74.00	-28.04	Peak	Horizontal
*	10426.50	47.19	0.37	47.56	68.20	-20.64	Peak	Horizontal
	11623.30	46.48	-0.11	46.37	74.00	-27.63	Peak	Horizontal
*	13707.50	44.91	2.84	47.75	68.20	-20.45	Peak	Horizontal
	8355.90	47.21	-1.46	45.75	74.00	-28.25	Peak	Vertical
*	10159.60	45.81	0.43	46.24	68.20	-21.96	Peak	Vertical
	12279.50	46.07	0.93	47.00	74.00	-27.00	Peak	Vertical
*	14336.50	43.70	4.34	48.04	68.20	-20.16	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8167.20	48.00	-1.59	46.41	74.00	-27.59	Peak	Horizontal
*	10047.40	45.88	0.01	45.89	68.20	-22.31	Peak	Horizontal
	11324.10	47.41	-0.08	47.34	74.00	-26.66	Peak	Horizontal
*	13727.90	44.97	3.00	47.97	68.20	-20.23	Peak	Horizontal
	8423.90	46.52	-1.31	45.22	74.00	-28.78	Peak	Vertical
*	9829.80	46.65	0.25	46.90	68.20	-21.30	Peak	Vertical
	11699.80	47.00	0.45	47.45	74.00	-26.55	Peak	Vertical
*	13738.10	44.99	2.97	47.96	68.20	-20.24	Peak	Vertical


Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1 GHz:

Site	SIP-AC3	Test Date	2025-10-31
Temperature	21.0 °C	Humidity	61.3%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

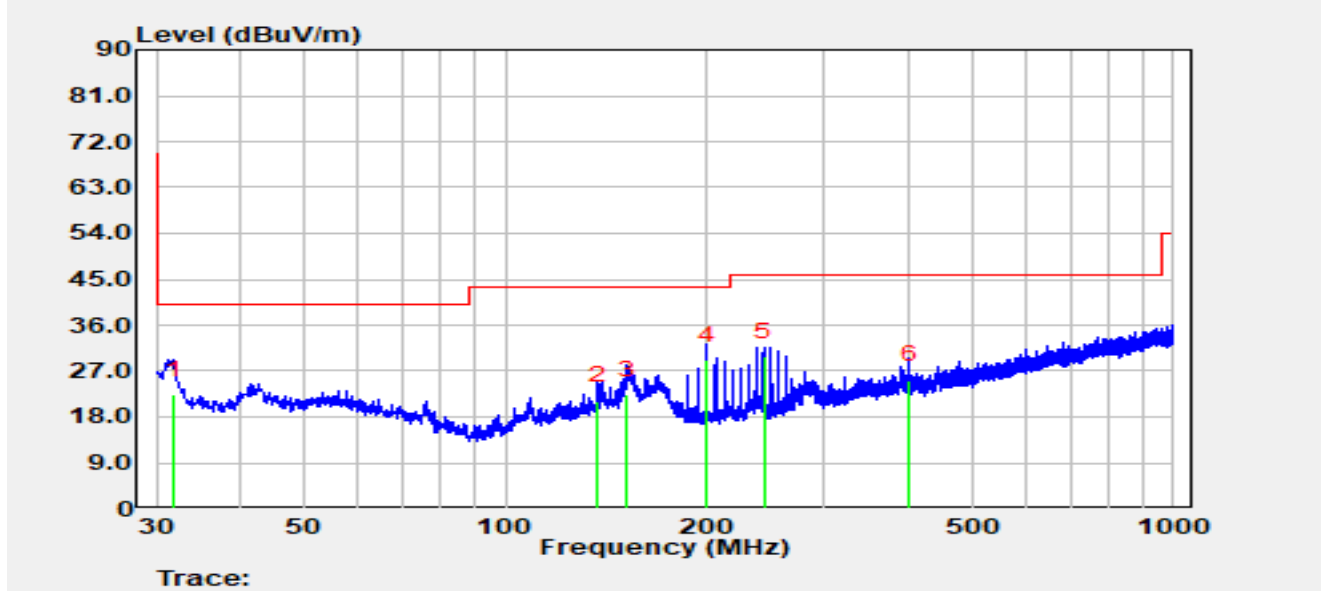


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		31.843	5.30	17.02	22.32	-17.68	40.00	QP
2		137.476	3.70	17.51	21.21	-22.29	43.50	QP
3		151.638	4.10	18.22	22.32	-21.18	43.50	QP
4	*	200.041	14.00	15.09	29.09	-14.41	43.50	QP
5		243.788	13.20	16.65	29.85	-16.15	46.00	QP
6		401.607	3.90	21.28	25.18	-20.82	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC3	Test Date	2025-10-31
Temperature	21.0 °C	Humidity	61.3%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

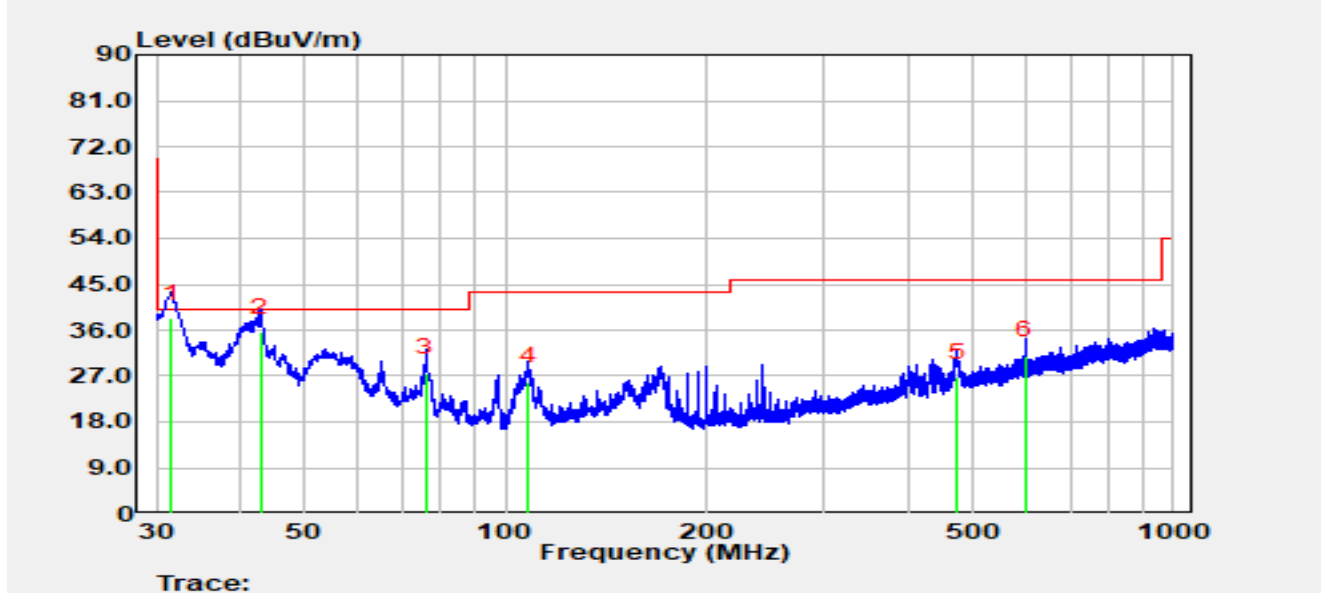

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	31.649	21.30	17.02	38.32	-1.68	40.00	QP
2		42.901	17.60	18.06	35.66	-4.34	40.00	QP
3		75.881	12.70	14.92	27.62	-12.38	40.00	QP
4		108.182	11.00	14.88	25.88	-17.62	43.50	QP
5		474.163	3.90	22.93	26.83	-19.17	46.00	QP
6		598.808	5.10	25.84	30.94	-15.06	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

WLAN Config 2:

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8179.10	47.03	-1.65	45.38	74.00	-28.62	Peak	Horizontal
*	10139.20	45.81	0.44	46.24	68.20	-21.96	Peak	Horizontal
	12539.60	46.00	1.87	47.87	74.00	-26.13	Peak	Horizontal
*	14324.60	43.86	4.32	48.18	68.20	-20.02	Peak	Horizontal
	8211.40	47.44	-1.76	45.68	74.00	-28.32	Peak	Vertical
*	10346.60	46.01	0.35	46.37	68.20	-21.83	Peak	Vertical
	12216.60	46.59	0.76	47.35	74.00	-26.65	Peak	Vertical
*	14749.60	43.74	5.89	49.63	68.20	-18.57	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8218.20	47.69	-1.67	46.01	74.00	-27.99	Peak	Horizontal
*	10020.20	46.48	0.06	46.54	68.20	-21.66	Peak	Horizontal
	11987.10	46.53	0.30	46.83	74.00	-27.17	Peak	Horizontal
*	14095.10	45.22	2.85	48.07	68.20	-20.13	Peak	Horizontal
	8140.00	46.59	-1.74	44.85	74.00	-29.15	Peak	Vertical
*	9931.80	45.85	0.24	46.09	68.20	-22.11	Peak	Vertical
	12005.80	47.81	0.24	48.06	74.00	-25.94	Peak	Vertical
*	13019.00	44.55	0.73	45.28	68.20	-22.92	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8236.90	46.94	-1.50	45.44	74.00	-28.56	Peak	Horizontal
*	9637.70	46.88	-0.29	46.59	68.20	-21.61	Peak	Horizontal
	12005.80	47.81	0.24	48.06	74.00	-25.94	Peak	Horizontal
*	12995.20	45.00	1.08	46.08	68.20	-22.12	Peak	Horizontal
	8148.50	48.22	-1.66	46.56	74.00	-27.44	Peak	Vertical
*	9931.80	45.85	0.24	46.09	68.20	-22.11	Peak	Vertical
	12005.80	47.81	0.24	48.06	74.00	-25.94	Peak	Vertical
*	12995.20	45.00	1.08	46.08	68.20	-22.12	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8148.50	48.22	-1.66	46.56	74.00	-27.44	Peak	Horizontal
*	9865.50	46.90	0.28	47.19	68.20	-21.01	Peak	Horizontal
	12005.80	47.81	0.24	48.06	74.00	-25.94	Peak	Horizontal
*	12833.70	45.89	0.97	46.86	68.20	-21.34	Peak	Horizontal
	8223.30	47.14	-1.60	45.53	74.00	-28.47	Peak	Vertical
*	9841.70	45.62	0.37	45.99	68.20	-22.21	Peak	Vertical
	12036.40	46.84	0.12	46.95	74.00	-27.05	Peak	Vertical
*	12939.10	44.86	0.86	45.72	68.20	-22.48	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8393.30	47.16	-1.49	45.67	74.00	-28.33	Peak	Horizontal
*	9637.70	47.17	-0.29	46.88	68.20	-21.32	Peak	Horizontal
	11443.10	46.87	-0.01	46.86	74.00	-27.14	Peak	Horizontal
*	14244.70	42.56	4.01	46.57	68.20	-21.63	Peak	Horizontal
	8362.70	47.14	-1.44	45.69	74.00	-28.31	Peak	Vertical
*	9763.50	47.06	0.00	47.06	68.20	-21.14	Peak	Vertical
	12481.80	45.50	1.49	46.99	74.00	-27.01	Peak	Vertical
*	14227.70	43.66	4.00	47.66	68.20	-20.54	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8182.50	47.46	-1.69	45.77	74.00	-28.23	Peak	Horizontal
*	10404.40	45.59	0.42	46.01	68.20	-22.19	Peak	Horizontal
	12441.00	45.83	1.62	47.45	74.00	-26.55	Peak	Horizontal
*	13552.80	43.45	3.42	46.87	68.20	-21.33	Peak	Horizontal
	8230.10	47.47	-1.55	45.92	74.00	-28.08	Peak	Vertical
*	9964.10	45.69	0.46	46.15	68.20	-22.05	Peak	Vertical
	12393.40	45.75	1.40	47.15	74.00	-26.85	Peak	Vertical
*	13663.30	43.30	2.76	46.06	68.20	-22.14	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8148.50	46.92	-1.66	45.26	74.00	-28.74	Peak	Horizontal
*	9848.50	46.15	0.40	46.55	68.20	-21.65	Peak	Horizontal
	12041.50	46.87	0.06	46.93	74.00	-27.07	Peak	Horizontal
*	13767.00	42.67	3.45	46.12	68.20	-22.08	Peak	Horizontal
	8252.20	46.80	-1.52	45.28	74.00	-28.72	Peak	Vertical
*	10407.80	45.00	0.41	45.42	68.20	-22.78	Peak	Vertical
	12264.20	46.36	1.00	47.37	74.00	-26.63	Peak	Vertical
*	13823.10	42.16	3.07	45.23	68.20	-22.97	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8257.30	46.51	-1.54	44.97	74.00	-29.03	Peak	Horizontal
*	9960.70	45.27	0.52	45.79	68.20	-22.41	Peak	Horizontal
	11733.80	46.24	-0.05	46.19	74.00	-27.81	Peak	Horizontal
*	13644.60	44.07	2.65	46.73	68.20	-21.47	Peak	Horizontal
	8204.60	46.87	-1.80	45.06	74.00	-28.94	Peak	Vertical
*	10406.10	46.11	0.42	46.53	68.20	-21.67	Peak	Vertical
	12265.90	46.01	1.01	47.02	74.00	-26.98	Peak	Vertical
*	13593.60	43.61	3.03	46.64	68.20	-21.56	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8123.00	47.76	-1.42	46.34	74.00	-27.66	Peak	Horizontal
*	10130.70	45.45	0.42	45.88	68.20	-22.32	Peak	Horizontal
	12415.50	46.29	1.51	47.81	74.00	-26.19	Peak	Horizontal
*	13692.20	43.82	2.75	46.57	68.20	-21.63	Peak	Horizontal
	8369.50	46.40	-1.51	44.88	74.00	-29.12	Peak	Vertical
*	10198.70	45.08	0.25	45.33	68.20	-22.87	Peak	Vertical
	12429.10	46.16	1.62	47.77	74.00	-26.23	Peak	Vertical
*	13646.30	44.83	2.67	47.50	68.20	-20.70	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8218.20	46.82	-1.67	45.15	74.00	-28.85	Peak	Horizontal
*	10123.90	45.98	0.38	46.36	68.20	-21.84	Peak	Horizontal
	11718.50	47.21	0.15	47.36	74.00	-26.64	Peak	Horizontal
*	13627.60	44.26	2.60	46.86	68.20	-21.34	Peak	Horizontal
	8163.80	46.80	-1.59	45.21	74.00	-28.79	Peak	Vertical
*	9998.10	45.54	0.20	45.74	68.20	-22.46	Peak	Vertical
	12543.00	45.48	1.95	47.43	74.00	-26.57	Peak	Vertical
*	13824.80	42.29	3.03	45.32	68.20	-22.88	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8187.60	47.23	-1.74	45.49	74.00	-28.51	Peak	Horizontal
*	9955.60	45.61	0.52	46.13	68.20	-22.07	Peak	Horizontal
	11970.10	46.81	0.05	46.86	74.00	-27.14	Peak	Horizontal
*	14266.80	42.95	3.93	46.87	68.20	-21.33	Peak	Horizontal
	8364.40	46.26	-1.46	44.80	74.00	-29.20	Peak	Vertical
*	10049.10	46.04	0.03	46.07	68.20	-22.13	Peak	Vertical
	12124.80	45.71	0.71	46.42	74.00	-27.58	Peak	Vertical
*	14088.30	42.30	2.85	45.14	68.20	-23.06	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8228.40	47.32	-1.56	45.76	74.00	-28.24	Peak	Horizontal
*	10021.90	45.56	0.04	45.61	68.20	-22.59	Peak	Horizontal
	11733.80	47.16	-0.05	47.10	74.00	-26.90	Peak	Horizontal
*	14309.30	42.61	4.12	46.73	68.20	-21.47	Peak	Horizontal
	8260.70	46.80	-1.56	45.24	74.00	-28.76	Peak	Vertical
*	10122.20	45.22	0.37	45.60	68.20	-22.60	Peak	Vertical
	12441.00	45.28	1.62	46.90	74.00	-27.10	Peak	Vertical
*	14149.50	43.98	2.95	46.93	68.20	-21.27	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8204.60	47.21	-1.80	45.40	74.00	-28.60	Peak	Horizontal
*	10195.30	46.10	0.26	46.36	68.20	-21.84	Peak	Horizontal
	12439.30	45.35	1.62	46.97	74.00	-27.03	Peak	Horizontal
*	14227.70	41.92	4.00	45.92	68.20	-22.28	Peak	Horizontal
	8332.10	47.35	-1.52	45.83	74.00	-28.17	Peak	Vertical
*	10302.40	46.25	0.53	46.78	68.20	-21.42	Peak	Vertical
	12362.80	46.10	1.30	47.40	74.00	-26.60	Peak	Vertical
*	14232.80	42.57	4.02	46.59	68.20	-21.61	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8160.40	46.59	-1.59	45.00	74.00	-29.00	Peak	Horizontal
*	9836.60	45.78	0.32	46.10	68.20	-22.10	Peak	Horizontal
	12578.70	46.26	1.75	48.01	74.00	-25.99	Peak	Horizontal
*	13136.30	45.93	1.08	47.01	68.20	-21.19	Peak	Horizontal
	8291.30	46.80	-1.65	45.15	74.00	-28.85	Peak	Vertical
*	9738.00	46.29	-0.03	46.26	68.20	-21.94	Peak	Vertical
	11694.70	46.68	0.51	47.19	74.00	-26.81	Peak	Vertical
*	13542.60	43.92	3.33	47.25	68.20	-20.95	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8116.20	47.11	-1.44	45.68	74.00	-28.32	Peak	Horizontal
*	10220.80	46.50	0.31	46.81	68.20	-21.39	Peak	Horizontal
	12233.60	45.81	0.96	46.77	74.00	-27.23	Peak	Horizontal
*	13546.00	43.40	3.75	47.16	68.20	-21.04	Peak	Horizontal
	8245.40	47.22	-1.48	45.73	74.00	-28.27	Peak	Vertical
*	10191.90	46.09	0.27	46.36	68.20	-21.84	Peak	Vertical
	12412.10	45.22	1.47	46.69	74.00	-27.31	Peak	Vertical
*	13554.50	44.05	3.33	47.39	68.20	-20.81	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8124.70	46.82	-1.46	45.36	74.00	-28.64	Peak	Horizontal
*	9945.40	45.65	0.42	46.07	68.20	-22.13	Peak	Horizontal
	11225.50	47.66	0.18	47.84	74.00	-26.16	Peak	Horizontal
*	14380.70	42.79	4.45	47.24	68.20	-20.96	Peak	Horizontal
	8349.10	47.86	-1.51	46.35	74.00	-27.65	Peak	Vertical
*	10023.60	45.94	0.03	45.97	68.20	-22.23	Peak	Vertical
	12561.70	45.42	1.89	47.31	74.00	-26.69	Peak	Vertical
*	14413.00	42.88	4.65	47.53	68.20	-20.67	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8172.30	47.30	-1.59	45.71	74.00	-28.29	Peak	Horizontal
*	9970.90	45.70	0.34	46.04	68.20	-22.16	Peak	Horizontal
	12464.80	46.51	1.61	48.12	74.00	-25.88	Peak	Horizontal
*	14319.50	44.25	4.26	48.51	68.20	-19.69	Peak	Horizontal
	8219.90	46.76	-1.65	45.11	74.00	-28.89	Peak	Vertical
*	9928.40	45.36	0.19	45.54	68.20	-22.66	Peak	Vertical
	12233.60	45.76	0.96	46.72	74.00	-27.28	Peak	Vertical
*	14311.00	43.32	4.16	47.48	68.20	-20.72	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8170.60	46.38	-1.59	44.79	74.00	-29.21	Peak	Horizontal
*	9821.30	45.91	0.17	46.08	68.20	-22.12	Peak	Horizontal
	12422.30	45.61	1.60	47.21	74.00	-26.79	Peak	Horizontal
*	14384.10	43.02	4.47	47.49	68.20	-20.71	Peak	Horizontal
	8123.00	47.35	-1.42	45.92	74.00	-28.08	Peak	Vertical
*	10157.90	45.39	0.43	45.82	68.20	-22.38	Peak	Vertical
	12413.80	45.44	1.49	46.93	74.00	-27.07	Peak	Vertical
*	14316.10	43.58	4.22	47.80	68.20	-20.40	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8182.50	46.63	-1.69	44.94	74.00	-29.06	Peak	Horizontal
*	10146.00	45.58	0.45	46.03	68.20	-22.17	Peak	Horizontal
	12563.40	45.55	1.88	47.43	74.00	-26.57	Peak	Horizontal
*	14353.50	43.02	4.66	47.67	68.20	-20.53	Peak	Horizontal
	8434.10	47.27	-1.28	45.99	74.00	-28.01	Peak	Vertical
*	9843.40	45.46	0.38	45.84	68.20	-22.36	Peak	Vertical
	12347.50	45.82	1.14	46.95	74.00	-27.05	Peak	Vertical
*	14419.80	43.11	4.72	47.82	68.20	-20.38	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8179.10	47.15	-1.65	45.50	74.00	-28.50	Peak	Horizontal
*	9868.90	46.60	0.22	46.82	68.20	-21.38	Peak	Horizontal
	12109.50	46.72	0.68	47.40	74.00	-26.60	Peak	Horizontal
*	14363.70	43.50	4.94	48.44	68.20	-19.76	Peak	Horizontal
	8440.90	46.51	-1.28	45.23	74.00	-28.77	Peak	Vertical
*	10237.80	45.10	0.43	45.53	68.20	-22.67	Peak	Vertical
	12526.00	45.85	1.57	47.41	74.00	-26.59	Peak	Vertical
*	14365.40	42.58	4.88	47.46	68.20	-20.74	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8094.10	46.89	-1.75	45.14	74.00	-28.86	Peak	Horizontal
*	9729.50	46.21	-0.04	46.17	68.20	-22.03	Peak	Horizontal
	12339.00	46.20	1.02	47.22	74.00	-26.78	Peak	Horizontal
*	14333.10	43.65	4.35	48.00	68.20	-20.20	Peak	Horizontal
	8262.40	47.07	-1.57	45.50	74.00	-28.50	Peak	Vertical
*	10219.10	46.08	0.29	46.38	68.20	-21.82	Peak	Vertical
	12435.90	45.05	1.62	46.67	74.00	-27.33	Peak	Vertical
*	14384.10	43.59	4.47	48.06	68.20	-20.14	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8151.90	46.96	-1.63	45.33	74.00	-28.67	Peak	Horizontal
*	9943.70	45.67	0.40	46.07	68.20	-22.13	Peak	Horizontal
	12179.20	46.63	0.47	47.10	74.00	-26.90	Peak	Horizontal
*	14368.80	43.10	4.77	47.87	68.20	-20.33	Peak	Horizontal
	8145.10	47.27	-1.69	45.58	74.00	-28.42	Peak	Vertical
*	9858.70	46.04	0.41	46.44	68.20	-21.76	Peak	Vertical
	12554.90	45.34	1.91	47.26	74.00	-26.74	Peak	Vertical
*	14418.10	42.30	4.70	47.00	68.20	-21.20	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8434.10	47.00	-1.28	45.72	74.00	-28.28	Peak	Horizontal
*	9950.50	45.89	0.47	46.36	68.20	-21.84	Peak	Horizontal
	12339.00	46.37	1.02	47.39	74.00	-26.61	Peak	Horizontal
*	14350.10	42.92	4.52	47.44	68.20	-20.76	Peak	Horizontal
	8157.00	46.83	-1.59	45.24	74.00	-28.76	Peak	Vertical
*	10093.30	46.28	0.30	46.58	68.20	-21.62	Peak	Vertical
	11619.90	47.16	-0.08	47.08	74.00	-26.92	Peak	Vertical
*	14319.50	43.59	4.26	47.84	68.20	-20.36	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8389.90	46.98	-1.51	45.47	74.00	-28.53	Peak	Horizontal
*	9855.30	45.16	0.43	45.59	68.20	-22.61	Peak	Horizontal
	12259.10	46.15	0.98	47.13	74.00	-26.87	Peak	Horizontal
*	14421.50	43.80	4.73	48.54	68.20	-19.66	Peak	Horizontal
	8342.30	46.63	-1.54	45.10	74.00	-28.90	Peak	Vertical
*	9850.20	45.57	0.40	45.97	68.20	-22.23	Peak	Vertical
	12391.70	45.60	1.40	47.01	74.00	-26.99	Peak	Vertical
*	14397.70	43.45	4.56	48.01	68.20	-20.19	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8446.00	46.33	-1.29	45.05	74.00	-28.95	Peak	Horizontal
*	9938.60	46.19	0.33	46.52	68.20	-21.68	Peak	Horizontal
	12014.30	46.39	0.21	46.59	74.00	-27.41	Peak	Horizontal
*	14322.90	43.44	4.30	47.74	68.20	-20.46	Peak	Horizontal
	8425.60	46.32	-1.30	45.03	74.00	-28.97	Peak	Vertical
*	9834.90	46.18	0.30	46.49	68.20	-21.71	Peak	Vertical
	12269.30	46.43	1.02	47.45	74.00	-26.55	Peak	Vertical
*	14362.00	43.57	4.99	48.56	68.20	-19.64	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8328.70	46.72	-1.51	45.21	74.00	-28.79	Peak	Horizontal
*	9969.20	45.43	0.37	45.80	68.20	-22.40	Peak	Horizontal
	12430.80	45.52	1.62	47.14	74.00	-26.86	Peak	Horizontal
*	14305.90	43.12	4.06	47.18	68.20	-21.02	Peak	Horizontal
	8325.30	47.51	-1.50	46.00	74.00	-28.00	Peak	Vertical
*	10016.80	45.95	0.09	46.04	68.20	-22.17	Peak	Vertical
	12551.50	44.95	1.92	46.87	74.00	-27.13	Peak	Vertical
*	14317.80	43.47	4.24	47.71	68.20	-20.49	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8376.30	47.07	-1.58	45.49	74.00	-28.51	Peak	Horizontal
*	10033.80	46.01	-0.01	46.00	68.20	-22.20	Peak	Horizontal
	12577.00	45.47	1.79	47.26	74.00	-26.74	Peak	Horizontal
*	14317.80	43.07	4.24	47.31	68.20	-20.89	Peak	Horizontal
	8150.20	47.76	-1.64	46.11	74.00	-27.89	Peak	Vertical
*	9821.30	45.68	0.17	45.85	68.20	-22.35	Peak	Vertical
	12255.70	46.73	0.97	47.70	74.00	-26.30	Peak	Vertical
*	14324.60	43.63	4.32	47.95	68.20	-20.25	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8344.00	46.76	-1.54	45.22	74.00	-28.78	Peak	Horizontal
*	9834.90	44.99	0.30	45.29	68.20	-22.91	Peak	Horizontal
	11623.30	48.03	-0.11	47.92	74.00	-26.08	Peak	Horizontal
*	14311.00	43.01	4.16	47.17	68.20	-21.03	Peak	Horizontal
	8427.30	46.43	-1.28	45.14	74.00	-28.86	Peak	Vertical
*	9753.30	46.18	0.04	46.22	68.20	-21.98	Peak	Vertical
	12454.60	45.49	1.63	47.12	74.00	-26.88	Peak	Vertical
*	14324.60	44.23	4.32	48.55	68.20	-19.65	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8112.80	46.57	-1.44	45.13	74.00	-28.87	Peak	Horizontal
*	10144.30	45.18	0.44	45.63	68.20	-22.57	Peak	Horizontal
	11727.00	46.89	-0.02	46.87	74.00	-27.13	Peak	Horizontal
*	13542.60	44.16	3.33	47.49	68.20	-20.71	Peak	Horizontal
	8216.50	47.30	-1.69	45.61	74.00	-28.39	Peak	Vertical
*	9901.20	45.46	0.23	45.69	68.20	-22.51	Peak	Vertical
	12447.80	45.67	1.62	47.29	74.00	-26.71	Peak	Vertical
*	14215.80	44.65	3.56	48.21	68.20	-19.99	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8267.50	49.93	-1.59	48.34	74.00	-25.66	Peak	Horizontal
*	9911.40	47.68	0.21	47.89	68.20	-20.31	Peak	Horizontal
	12512.40	48.29	1.37	49.66	74.00	-24.34	Peak	Horizontal
*	13554.50	47.09	3.33	50.42	68.20	-17.78	Peak	Horizontal
	8175.70	48.70	-1.61	47.09	74.00	-26.91	Peak	Vertical
*	9853.60	47.86	0.42	48.28	68.20	-19.92	Peak	Vertical
	12393.40	47.37	1.40	48.78	74.00	-25.22	Peak	Vertical
*	14360.30	45.77	4.93	50.69	68.20	-17.51	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8252.20	49.61	-1.52	48.09	74.00	-25.91	Peak	Horizontal
*	9821.30	48.44	0.17	48.61	68.20	-19.59	Peak	Horizontal
	12473.30	47.91	1.59	49.50	74.00	-24.50	Peak	Horizontal
*	13763.60	46.85	3.30	50.16	68.20	-18.04	Peak	Horizontal
	8221.60	48.97	-1.63	47.35	74.00	-26.65	Peak	Vertical
*	10152.80	47.70	0.43	48.13	68.20	-20.07	Peak	Vertical
	11708.30	48.68	0.33	49.02	74.00	-24.98	Peak	Vertical
*	13564.70	47.00	2.91	49.91	68.20	-18.29	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8111.10	48.33	-1.44	46.89	74.00	-27.11	Peak	Horizontal
*	10018.50	48.48	0.07	48.55	68.20	-19.65	Peak	Horizontal
	12449.50	48.33	1.62	49.95	74.00	-24.05	Peak	Horizontal
*	13552.80	46.48	3.42	49.90	68.20	-18.30	Peak	Horizontal
	8333.80	48.90	-1.52	47.38	74.00	-26.62	Peak	Vertical
*	10016.80	47.99	0.09	48.08	68.20	-20.12	Peak	Vertical
	12415.50	47.32	1.51	48.84	74.00	-25.16	Peak	Vertical
*	13770.40	46.68	3.35	50.03	68.20	-18.17	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8095.80	48.50	-1.71	46.79	74.00	-27.21	Peak	Horizontal
*	10302.40	48.64	0.53	49.17	68.20	-19.03	Peak	Horizontal
	12447.80	47.25	1.62	48.88	74.00	-25.12	Peak	Horizontal
*	13926.80	46.89	3.46	50.35	68.20	-17.85	Peak	Horizontal
	8459.60	48.42	-1.39	47.03	74.00	-26.97	Peak	Vertical
*	9727.80	48.72	-0.04	48.68	68.20	-19.52	Peak	Vertical
	12186.00	48.56	0.43	48.99	74.00	-25.01	Peak	Vertical
*	14280.40	46.53	4.32	50.84	68.20	-17.36	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8473.20	49.31	-1.49	47.82	74.00	-26.18	Peak	Horizontal
*	10032.10	47.89	-0.01	47.88	68.20	-20.32	Peak	Horizontal
	12412.10	47.73	1.47	49.20	74.00	-24.80	Peak	Horizontal
*	14244.70	46.17	4.01	50.18	68.20	-18.02	Peak	Horizontal
	8131.50	48.07	-1.58	46.49	74.00	-27.51	Peak	Vertical
*	9748.20	48.55	0.01	48.56	68.20	-19.64	Peak	Vertical
	12548.10	47.21	1.93	49.15	74.00	-24.85	Peak	Vertical
*	14282.10	46.28	4.25	50.53	68.20	-17.67	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8172.30	48.49	-1.59	46.90	74.00	-27.10	Peak	Horizontal
*	9936.90	47.80	0.31	48.11	68.20	-20.09	Peak	Horizontal
	11689.60	48.55	0.47	49.02	74.00	-24.98	Peak	Horizontal
*	13768.70	46.97	3.40	50.37	68.20	-17.83	Peak	Horizontal
	8170.60	48.44	-1.59	46.85	74.00	-27.15	Peak	Vertical
*	9702.30	48.29	-0.07	48.23	68.20	-19.97	Peak	Vertical
	12435.90	47.16	1.62	48.78	74.00	-25.22	Peak	Vertical
*	14339.90	45.47	4.34	49.81	68.20	-18.39	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8388.20	48.77	-1.53	47.24	74.00	-26.76	Peak	Horizontal
*	9829.80	47.65	0.25	47.90	68.20	-20.30	Peak	Horizontal
	11550.20	49.42	0.20	49.62	74.00	-24.38	Peak	Horizontal
*	13894.50	47.04	2.99	50.03	68.20	-18.17	Peak	Horizontal
	8362.70	48.59	-1.44	47.14	74.00	-26.86	Peak	Vertical
*	9704.00	48.03	-0.07	47.96	68.20	-20.24	Peak	Vertical
	12160.50	48.76	0.58	49.34	74.00	-24.66	Peak	Vertical
*	14428.30	45.15	4.80	49.95	68.20	-18.25	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8185.90	48.70	-1.72	46.98	74.00	-27.02	Peak	Horizontal
*	10122.20	47.93	0.37	48.30	68.20	-19.90	Peak	Horizontal
	12378.10	47.54	1.36	48.90	74.00	-25.10	Peak	Horizontal
*	13812.90	46.86	3.19	50.05	68.20	-18.15	Peak	Horizontal
	8281.10	48.75	-1.63	47.12	74.00	-26.88	Peak	Vertical
*	9853.60	48.22	0.42	48.64	68.20	-19.56	Peak	Vertical
	12425.70	47.52	1.62	49.13	74.00	-24.87	Peak	Vertical
*	14365.40	45.32	4.88	50.20	68.20	-18.00	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8376.30	48.69	-1.58	47.11	74.00	-26.89	Peak	Horizontal
*	10521.70	48.43	0.49	48.92	68.20	-19.28	Peak	Horizontal
	11699.80	48.56	0.45	49.00	74.00	-25.00	Peak	Horizontal
*	13658.20	46.95	2.74	49.69	68.20	-18.51	Peak	Horizontal
	8157.00	48.54	-1.59	46.95	74.00	-27.05	Peak	Vertical
*	10057.60	48.49	0.11	48.60	68.20	-19.60	Peak	Vertical
	12439.30	47.13	1.62	48.75	74.00	-25.25	Peak	Vertical
*	14339.90	45.67	4.34	50.01	68.20	-18.19	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8112.80	48.61	-1.44	47.17	74.00	-26.83	Peak	Horizontal
*	9933.50	47.53	0.26	47.79	68.20	-20.41	Peak	Horizontal
	11694.70	48.71	0.51	49.23	74.00	-24.77	Peak	Horizontal
*	14346.70	45.00	4.39	49.39	68.20	-18.81	Peak	Horizontal
	8243.70	47.84	-1.48	46.36	74.00	-27.64	Peak	Vertical
*	10152.80	48.13	0.43	48.57	68.20	-19.63	Peak	Vertical
	12252.30	47.70	0.97	48.67	74.00	-25.33	Peak	Vertical
*	13729.60	46.72	3.02	49.74	68.20	-18.46	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8189.30	48.75	-1.76	46.99	74.00	-27.01	Peak	Horizontal
*	10098.40	47.73	0.31	48.04	68.20	-20.16	Peak	Horizontal
	12211.50	47.88	0.64	48.53	74.00	-25.47	Peak	Horizontal
*	13620.80	47.23	2.78	50.01	68.20	-18.19	Peak	Horizontal
	8129.80	48.44	-1.55	46.89	74.00	-27.11	Peak	Vertical
*	9675.10	47.88	-0.09	47.79	68.20	-20.41	Peak	Vertical
	12118.00	48.58	0.73	49.31	74.00	-24.69	Peak	Vertical
*	13780.60	47.55	3.05	50.60	68.20	-17.60	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8238.60	48.13	-1.49	46.64	74.00	-27.36	Peak	Horizontal
*	10222.50	48.69	0.32	49.01	68.20	-19.19	Peak	Horizontal
	12260.80	47.39	0.99	48.38	74.00	-25.62	Peak	Horizontal
*	13549.40	46.55	3.59	50.13	68.20	-18.07	Peak	Horizontal
	8262.40	48.91	-1.57	47.34	74.00	-26.66	Peak	Vertical
*	10412.90	47.56	0.41	47.96	68.20	-20.24	Peak	Vertical
	12444.40	46.96	1.62	48.58	74.00	-25.42	Peak	Vertical
*	14234.50	46.50	4.02	50.53	68.20	-17.67	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8157.00	47.39	-1.59	45.80	74.00	-28.20	Peak	Horizontal
*	9858.70	46.76	0.41	47.16	68.20	-21.04	Peak	Horizontal
	12408.70	45.09	1.43	46.52	74.00	-27.48	Peak	Horizontal
*	13760.20	44.69	3.16	47.85	68.20	-20.35	Peak	Horizontal
	8400.10	46.21	-1.44	44.77	74.00	-29.23	Peak	Vertical
*	10161.30	45.94	0.43	46.36	68.20	-21.84	Peak	Vertical
	12459.70	45.04	1.62	46.66	74.00	-27.34	Peak	Vertical
*	14283.80	44.08	4.19	48.28	68.20	-19.92	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8437.50	46.58	-1.28	45.30	74.00	-28.70	Peak	Horizontal
*	10219.10	45.85	0.29	46.14	68.20	-22.06	Peak	Horizontal
	11626.70	47.87	-0.12	47.75	74.00	-26.25	Peak	Horizontal
*	13547.70	44.66	3.67	48.33	68.20	-19.87	Peak	Horizontal
	8437.50	46.58	-1.28	45.30	74.00	-28.70	Peak	Vertical
*	10384.00	46.34	0.56	46.90	68.20	-21.30	Peak	Vertical
	11555.30	46.97	0.20	47.17	74.00	-26.83	Peak	Vertical
*	14219.20	44.41	3.71	48.12	68.20	-20.08	Peak	Vertical


Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1 GHz:

Site	SIP-AC3	Test Date	2025-10-31
Temperature	21.0 °C	Humidity	61.3%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5785 MHz		

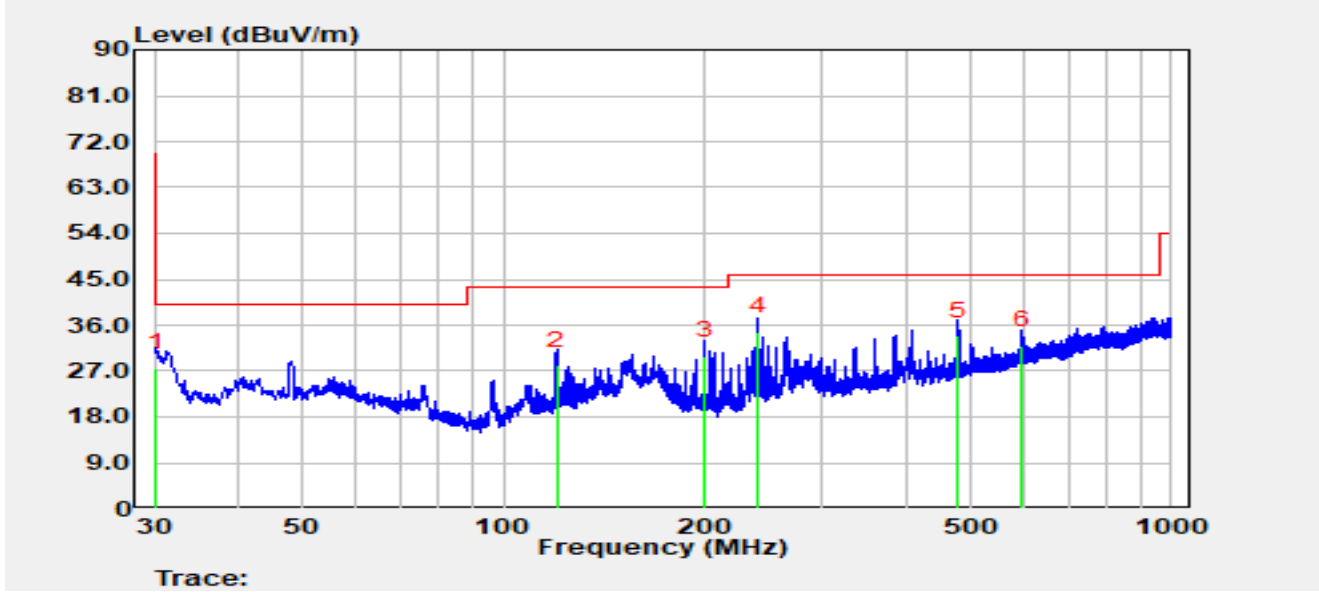


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		30.194	10.40	17.11	27.51	-12.49	40.00	QP
2		120.016	11.90	16.21	28.11	-15.39	43.50	QP
3		200.041	14.90	15.09	29.99	-13.51	43.50	QP
4	*	240.005	18.20	16.46	34.66	-11.34	46.00	QP
5		479.983	11.00	22.95	33.95	-12.05	46.00	QP
6		598.032	6.10	25.83	31.93	-14.07	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC3	Test Date	2025-10-31
Temperature	21.0 °C	Humidity	61.3%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5785 MHz		

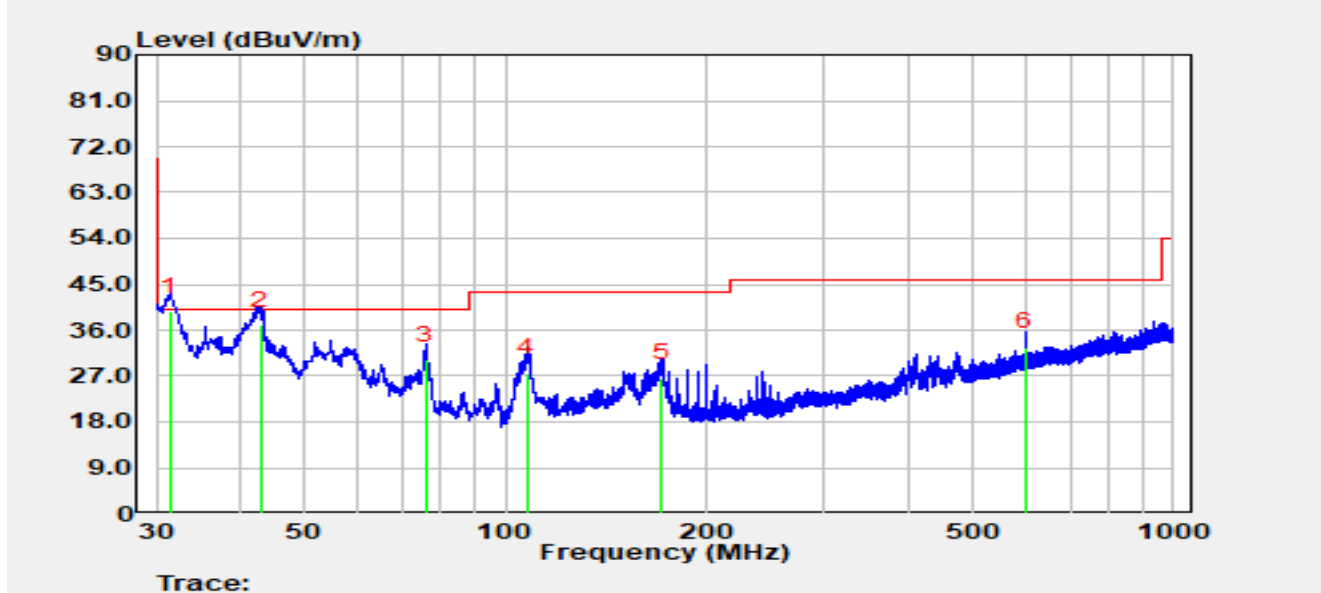

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	31.455	22.60	17.02	39.62	-0.38	40.00	QP
2		42.998	18.90	18.06	36.96	-3.04	40.00	QP
3		75.978	15.20	14.91	30.11	-9.89	40.00	QP
4		107.891	12.70	14.83	27.53	-15.97	43.50	QP
5		171.620	8.90	17.68	26.58	-16.92	43.50	QP
6		599.972	6.90	25.86	32.76	-13.24	46.00	QP


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.8 Radiated Restricted Band Edge Test Result

WLAN Config 1:

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

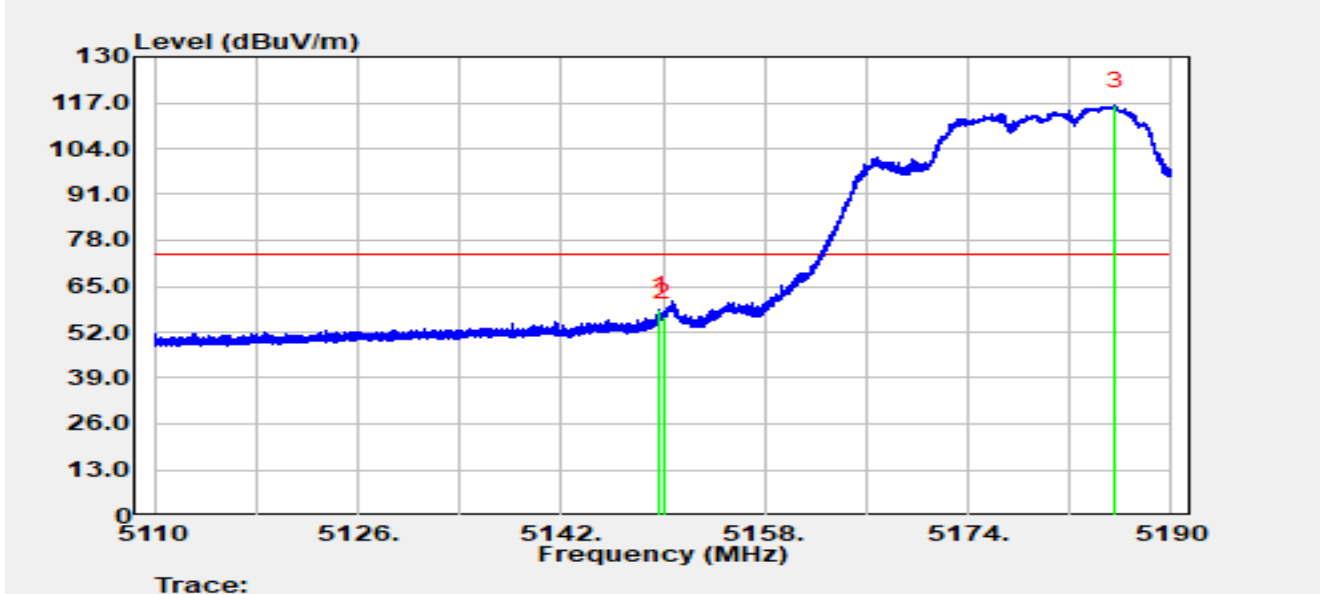


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.744	58.89	-0.69	58.20	-15.80	74.00	Peak
2		5150.000	56.79	-0.54	56.25	-17.75	74.00	Peak
3		5185.552	78.14	37.93	116.07	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

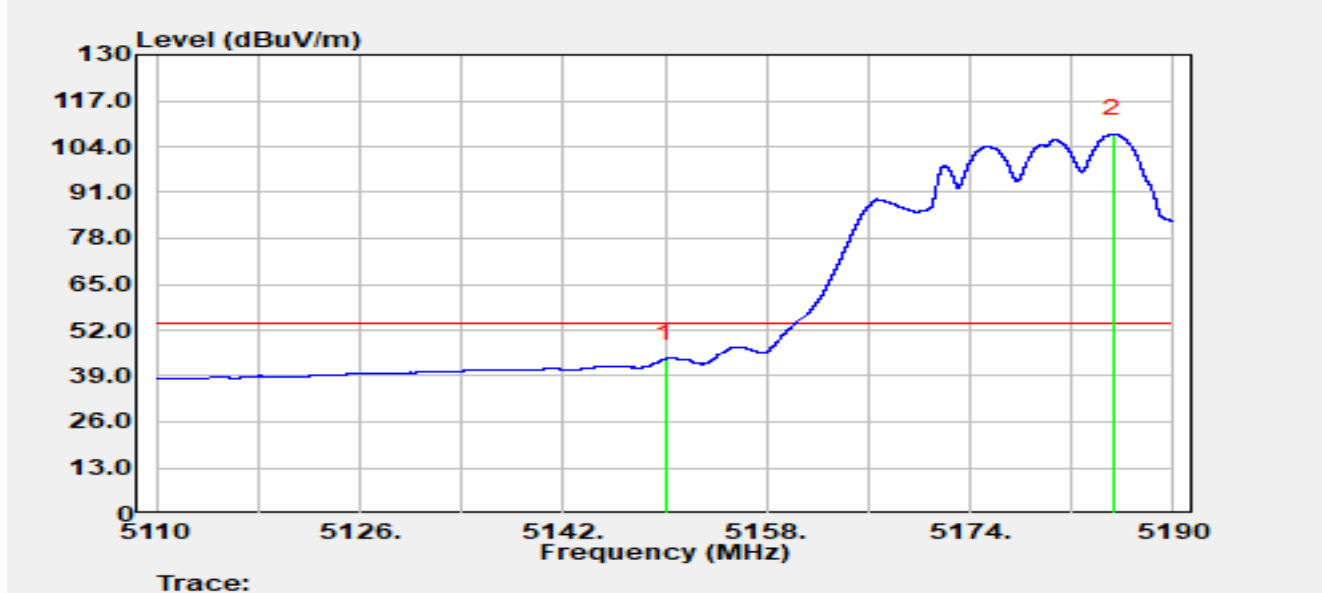


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	44.24	-0.54	43.70	-10.30	54.00	Average
2		5185.240	69.50	38.10	107.60	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

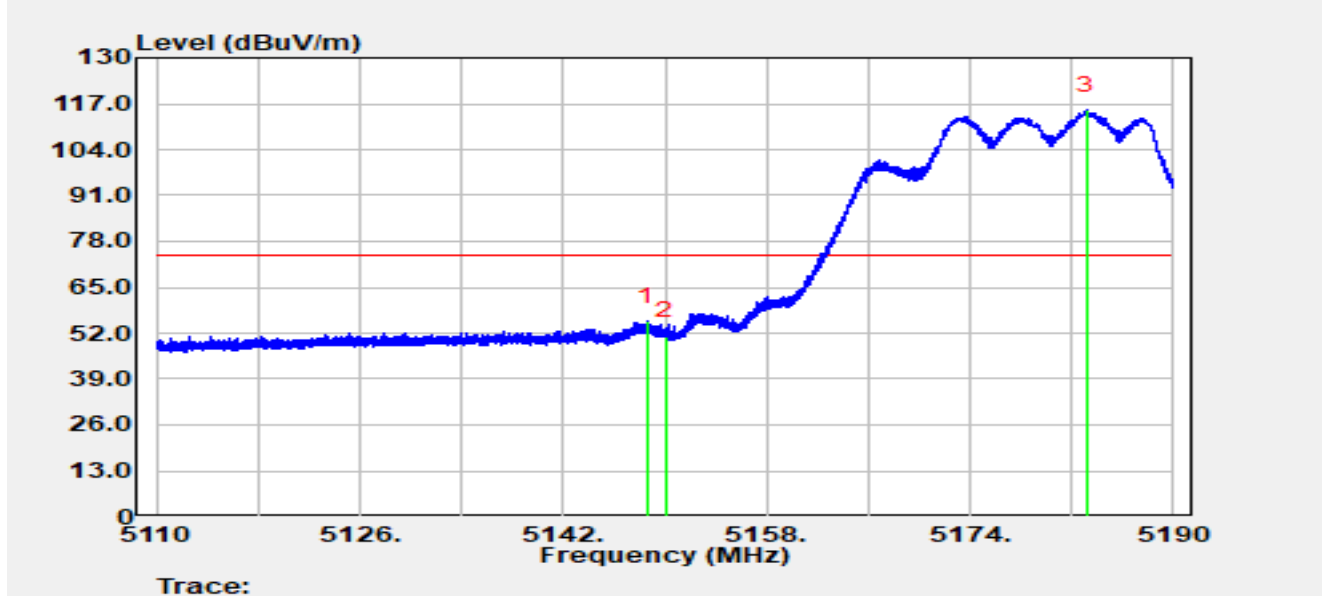


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.584	56.36	-1.05	55.31	-18.69	74.00	Peak
2		5150.000	51.65	-0.54	51.11	-22.89	74.00	Peak
3		5183.136	73.86	41.21	115.07	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

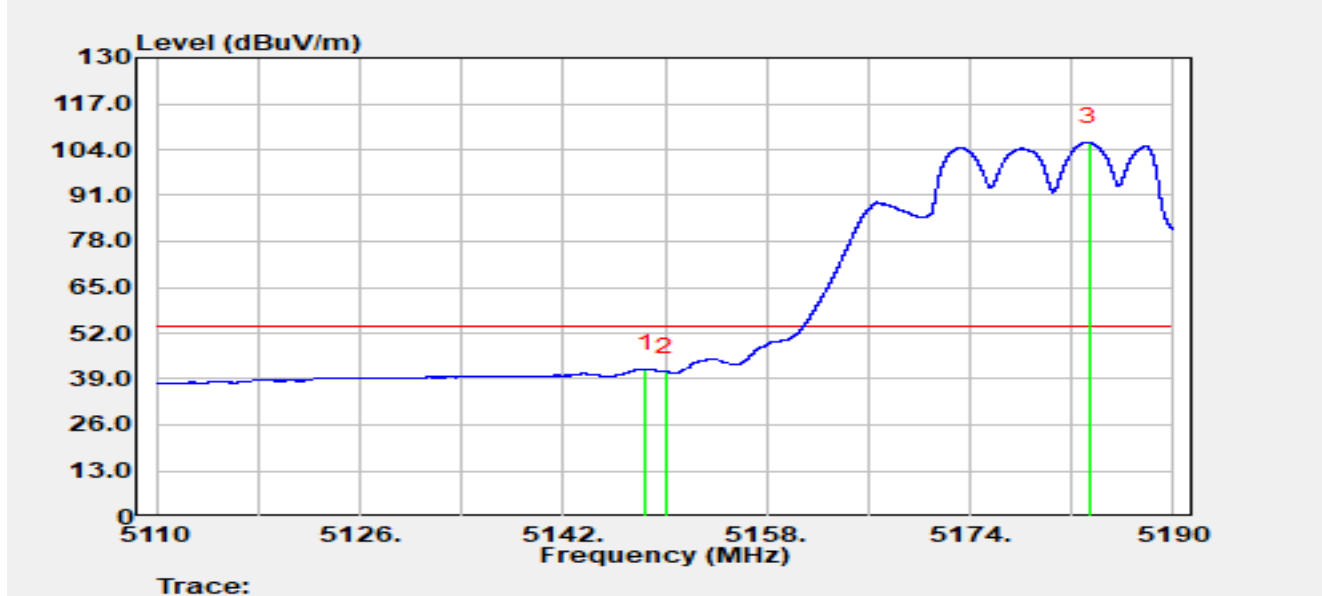


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.488	42.78	-1.04	41.74	-12.26	54.00	Average
2		5150.000	41.61	-0.54	41.07	-12.93	54.00	Average
3		5183.336	65.23	40.83	106.05	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

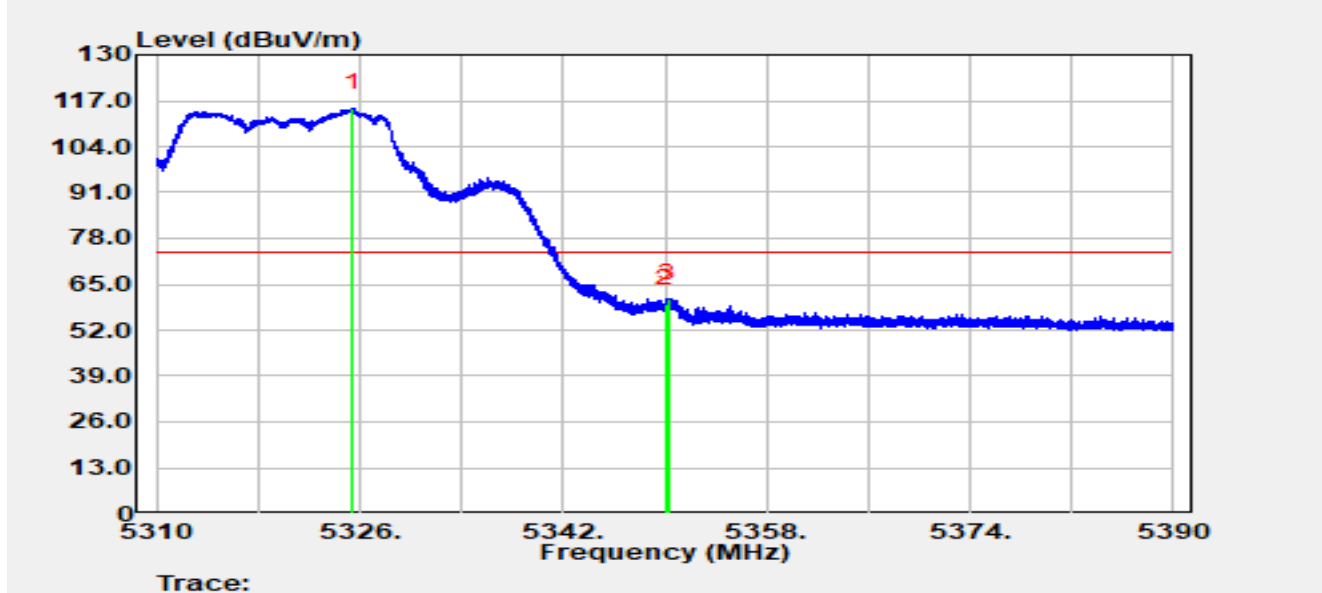


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.480	72.92	41.90	114.81	N/A	N/A	Peak
2		5350.000	57.16	2.28	59.44	-14.56	74.00	Peak
3	*	5350.272	58.82	2.14	60.96	-13.04	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

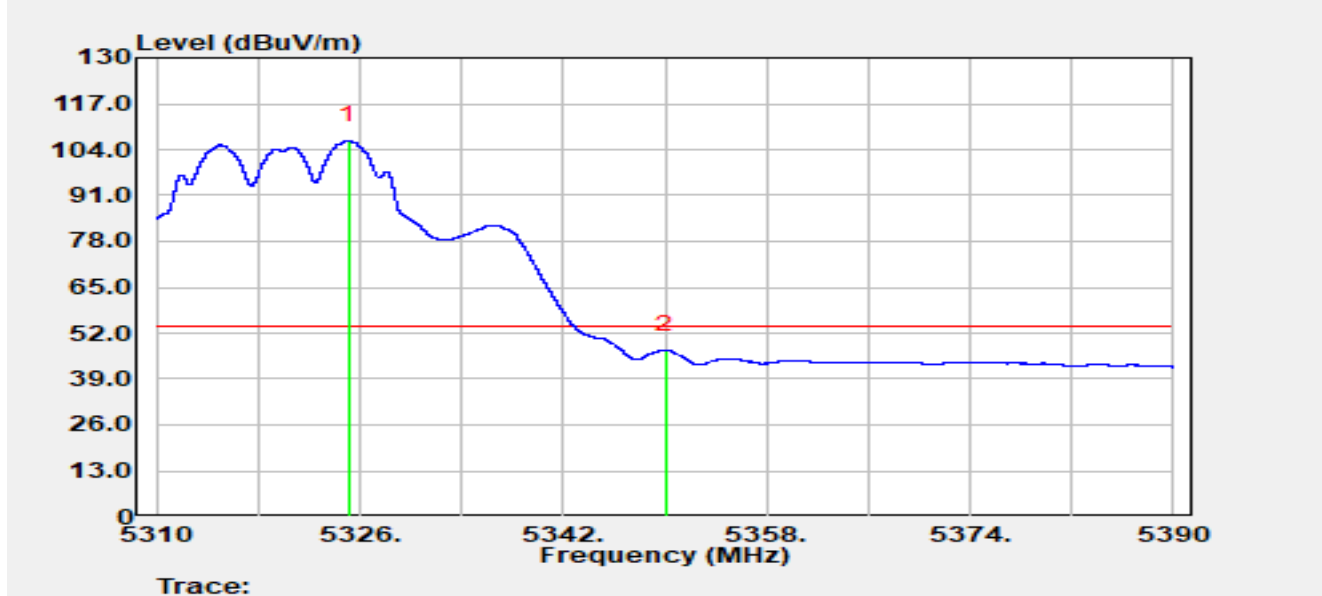


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.136	64.24	42.24	106.49	N/A	N/A	Average
2	*	5350.000	44.97	2.28	47.26	-6.74	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

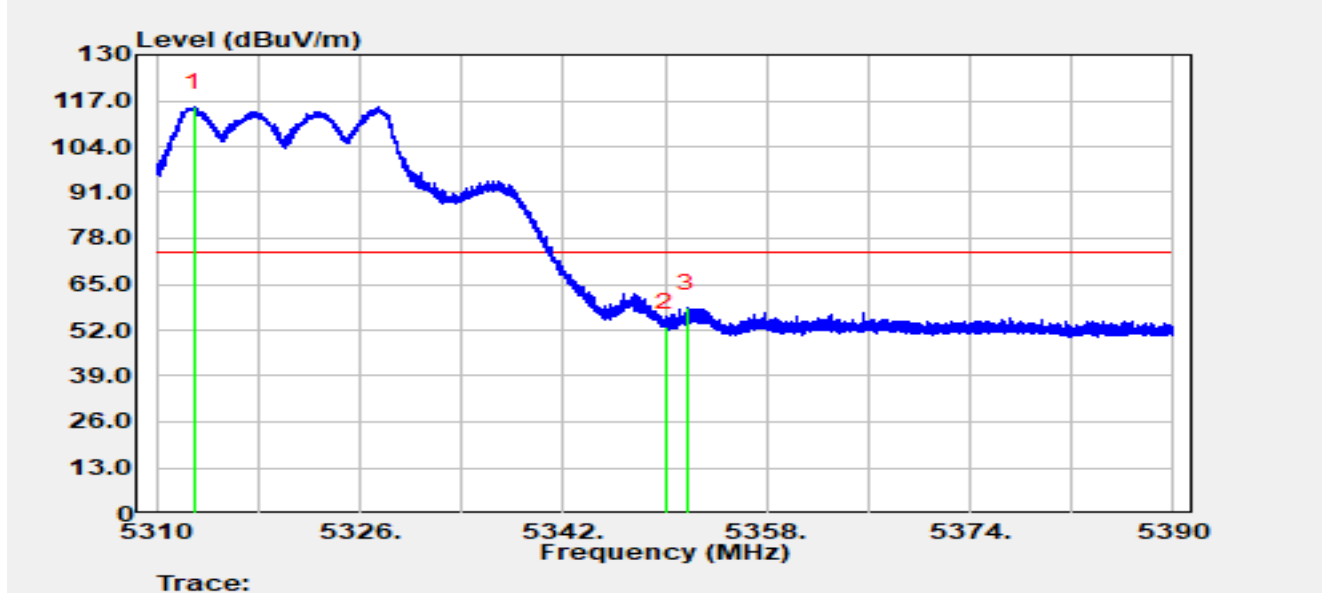


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.952	66.93	48.22	115.16	N/A	N/A	Peak
2		5350.000	50.46	2.28	52.74	-21.26	74.00	Peak
3	*	5351.744	57.14	1.10	58.24	-15.76	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

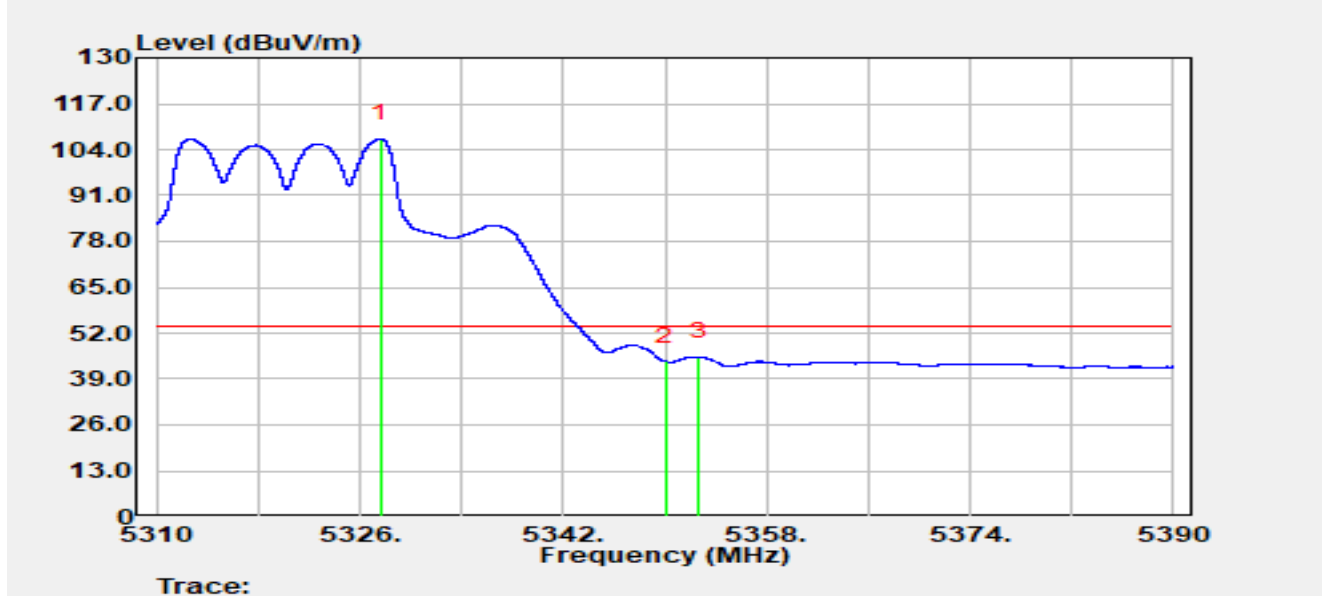


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.576	65.20	41.85	107.05	N/A	N/A	Average
2		5350.000	41.72	2.28	44.00	-10.00	54.00	Average
3	*	5352.712	44.70	0.51	45.21	-8.79	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

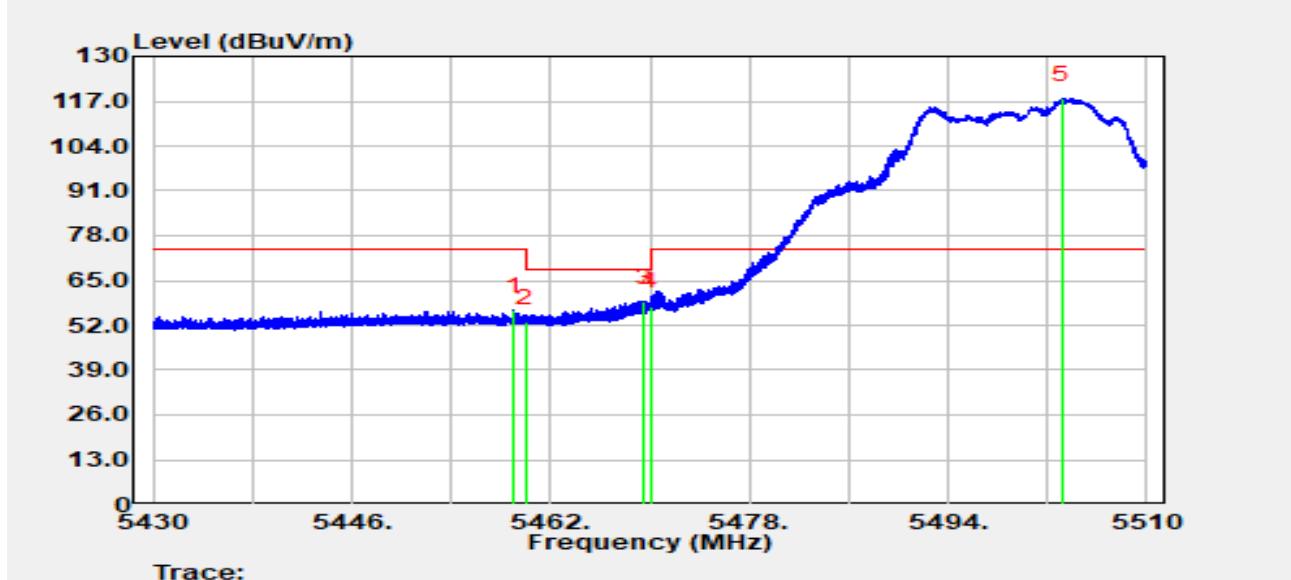


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.048	57.18	-0.80	56.38	-17.62	74.00	Peak
2		5460.000	53.62	-0.69	52.93	-15.27	68.20	Peak
3	*	5469.512	57.88	0.85	58.73	-9.47	68.20	Peak
4		5470.000	56.63	1.00	57.63	-10.57	68.20	Peak
5		5503.128	72.79	44.92	117.71	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

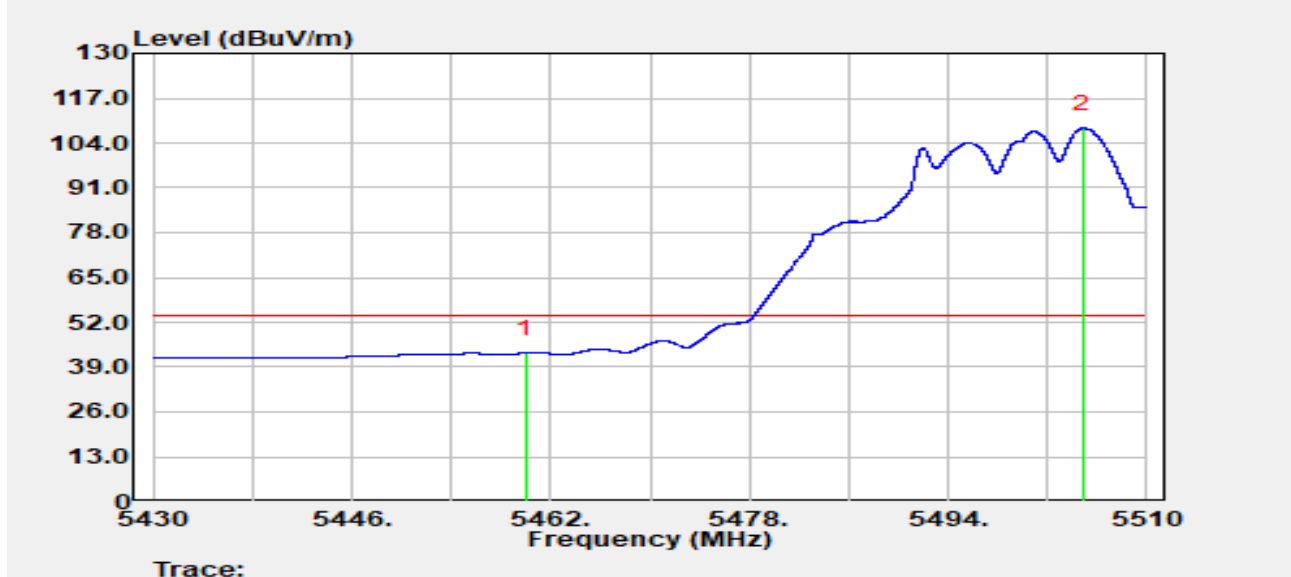


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	43.82	-0.69	43.12	-10.88	54.00	Average
2		5504.816	61.77	46.62	108.39	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

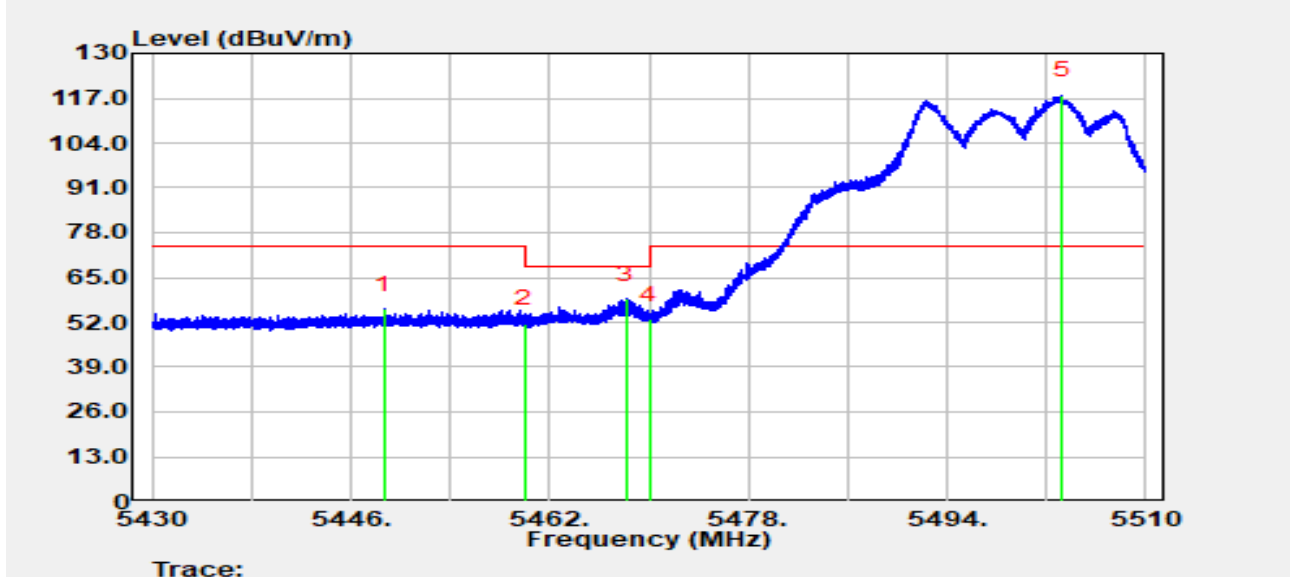


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5448.664	57.19	-1.36	55.83	-18.17	74.00	Peak
2		5460.000	52.40	-0.69	51.71	-16.49	68.20	Peak
3	*	5468.184	58.24	0.42	58.66	-9.54	68.20	Peak
4		5470.000	51.95	1.00	52.95	-15.25	68.20	Peak
5		5503.240	72.77	45.14	117.91	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

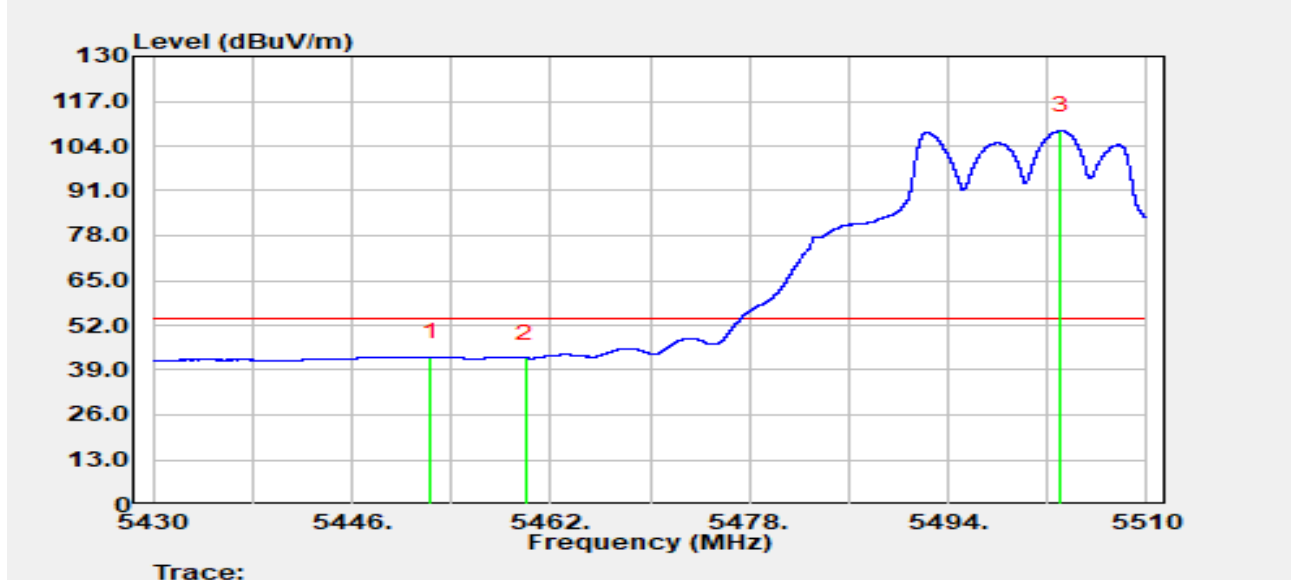


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.320	44.03	-1.15	42.88	-11.12	54.00	Average
2		5460.000	43.18	-0.69	42.49	-11.51	54.00	Average
3		5503.088	63.76	44.83	108.59	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

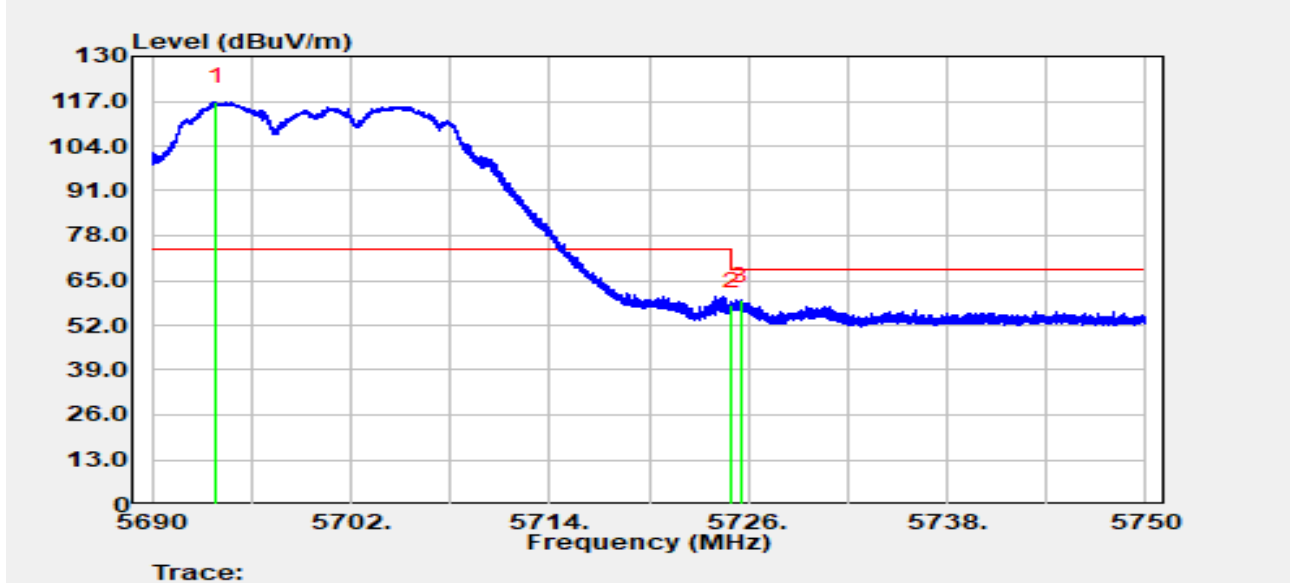


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5693.846	72.87	44.07	116.94	N/A	N/A	Peak
2		5725.000	56.68	1.01	57.69	-10.51	68.20	Peak
3	*	5725.538	58.57	0.71	59.28	-8.92	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

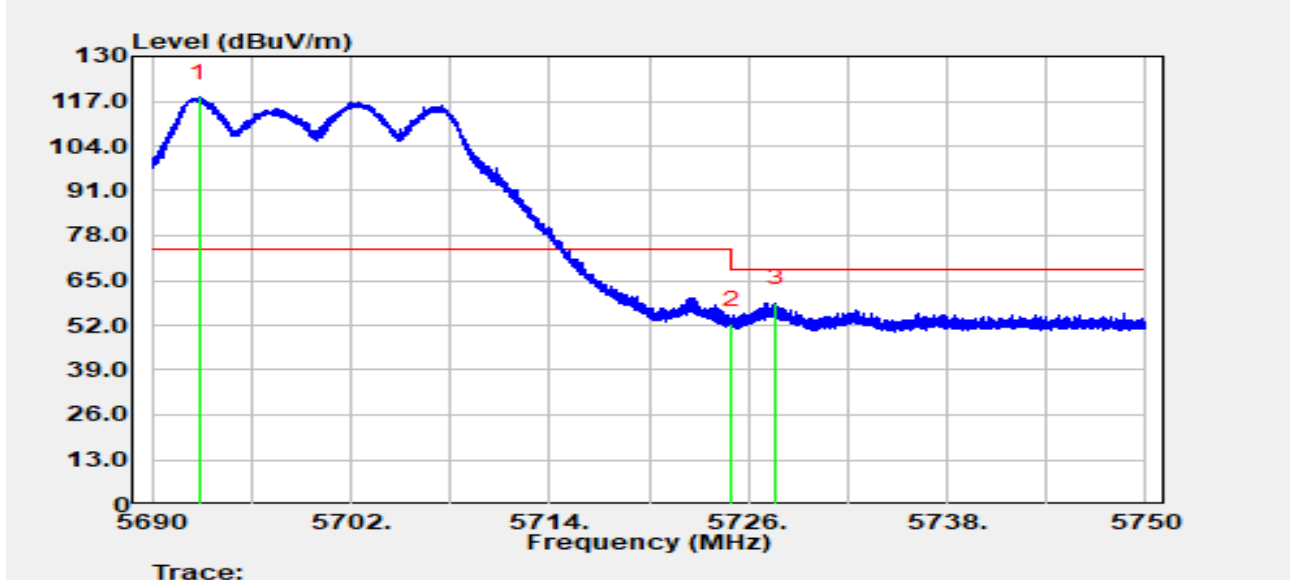


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.886	74.34	43.84	118.18	N/A	N/A	Peak
2		5725.000	51.34	1.01	52.34	-15.86	68.20	Peak
3	*	5727.692	58.77	-0.16	58.61	-9.59	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5745 MHz		

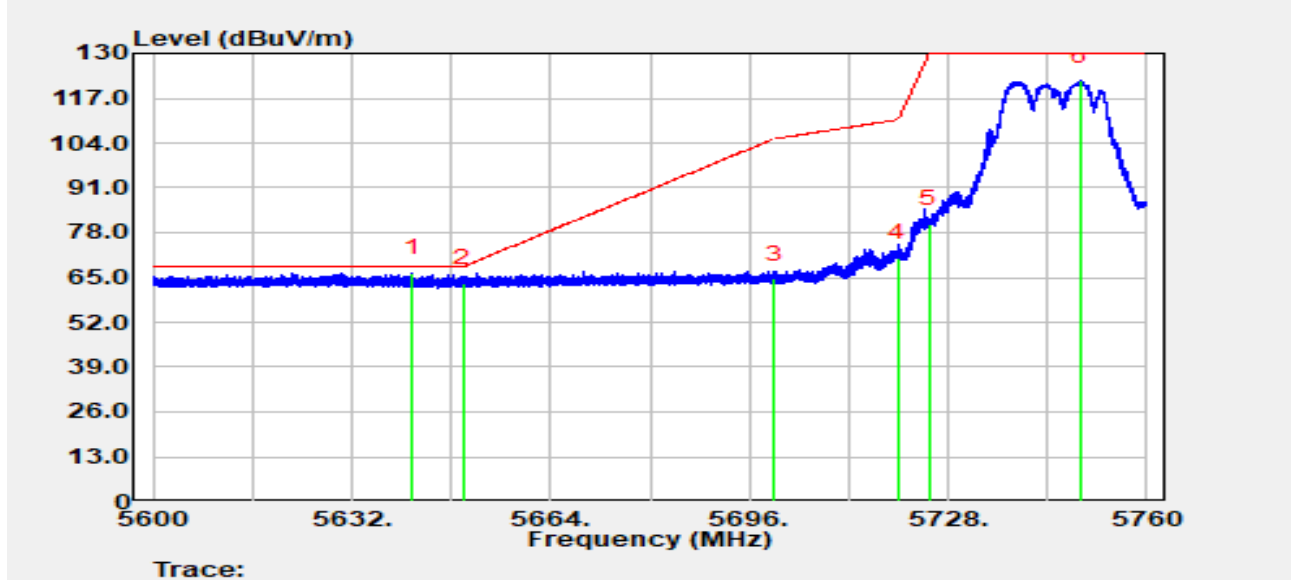


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.696	69.96	-3.65	66.31	-1.89	68.20	Peak
2		5650.000	67.16	-3.65	63.52	-4.68	68.20	Peak
3		5700.000	68.11	-3.47	64.63	-40.57	105.20	Peak
4		5720.000	74.34	-3.45	70.89	-39.91	110.80	Peak
5		5725.000	84.04	-3.47	80.58	-49.42	130.00	Peak
6		5749.344	125.65	-3.65	122.00	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5745 MHz		

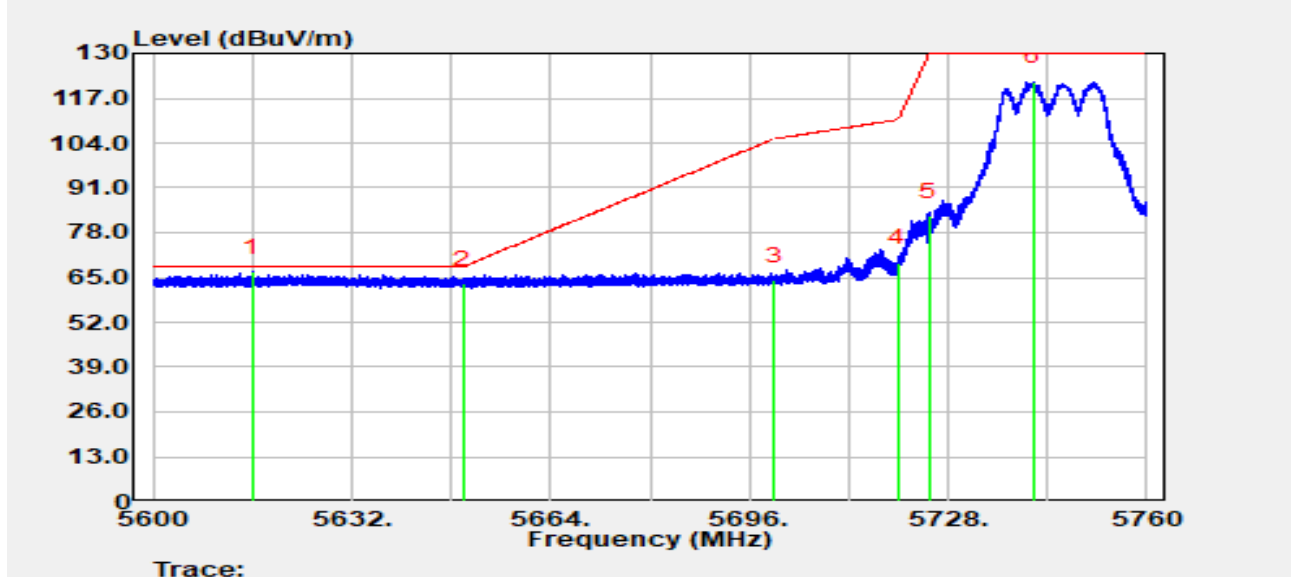


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5615.888	69.92	-3.43	66.49	-1.71	68.20	Peak
2		5650.000	66.89	-3.65	63.24	-4.96	68.20	Peak
3		5700.000	67.73	-3.47	64.25	-40.95	105.20	Peak
4		5720.000	72.65	-3.45	69.20	-41.60	110.80	Peak
5		5725.000	86.17	-3.47	82.70	-47.30	130.00	Peak
6		5741.760	125.32	-3.62	121.69	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

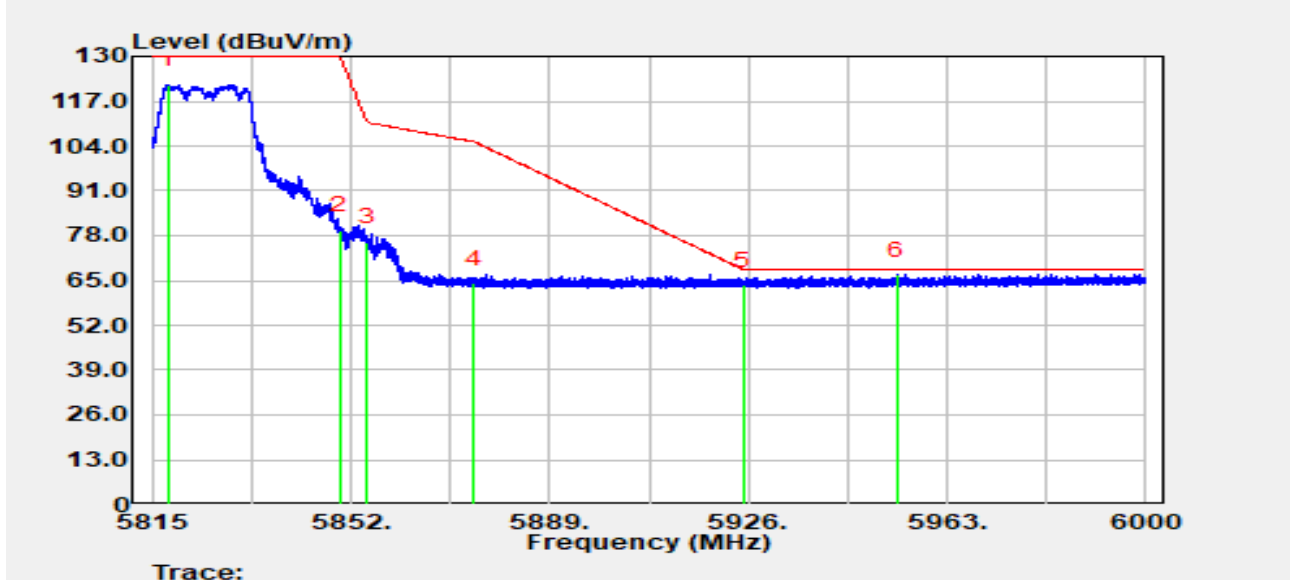


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5818.053	125.67	-3.80	121.87	N/A	N/A	Peak
2		5850.000	83.31	-3.75	79.56	-50.44	130.00	Peak
3		5855.000	79.99	-3.75	76.24	-34.56	110.80	Peak
4		5875.000	67.87	-3.82	64.05	-41.15	105.20	Peak
5		5925.000	67.30	-3.71	63.60	-4.60	68.20	Peak
6	*	5953.769	70.34	-3.67	66.66	-1.54	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

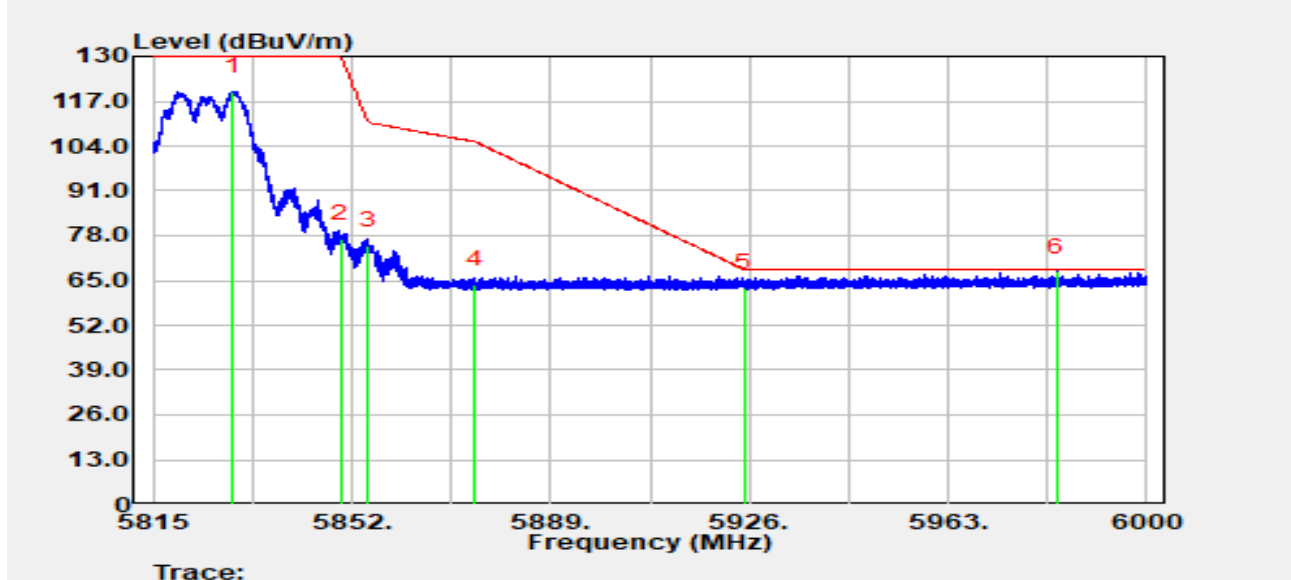


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5829.745	123.62	-3.74	119.89	N/A	N/A	Peak
2		5850.000	80.80	-3.75	77.05	-52.95	130.00	Peak
3		5855.000	78.84	-3.75	75.09	-35.71	110.80	Peak
4		5875.000	67.75	-3.82	63.93	-41.27	105.20	Peak
5		5925.000	66.56	-3.71	62.85	-5.35	68.20	Peak
6	*	5983.332	71.18	-3.67	67.51	-0.69	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

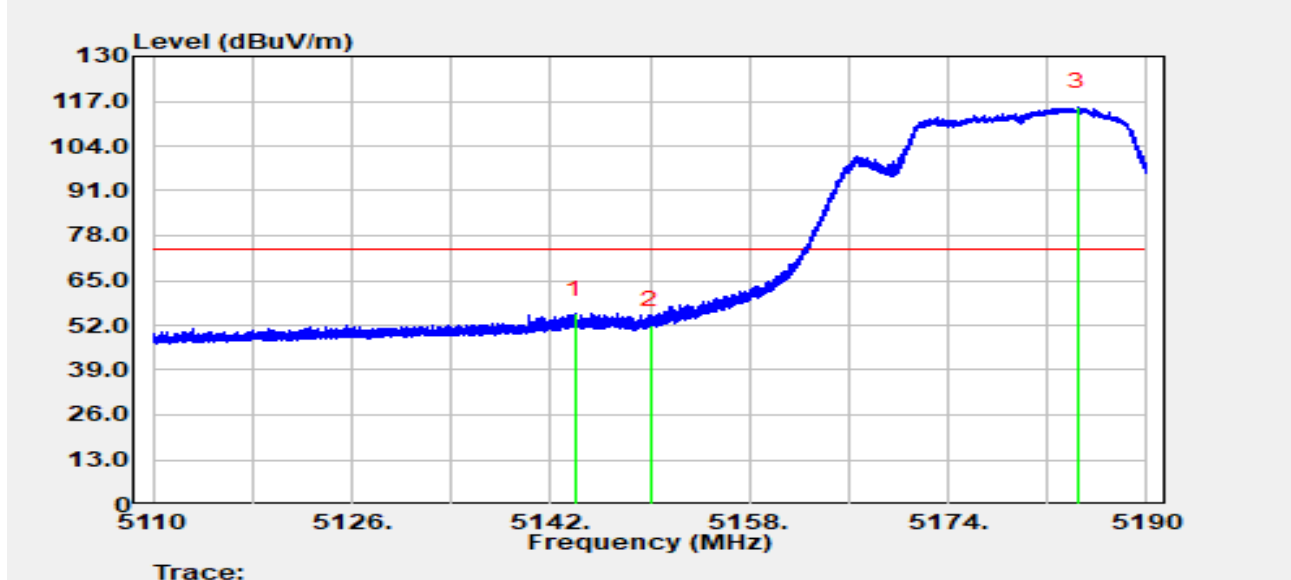


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5144.024	56.97	-1.59	55.38	-18.62	74.00	Peak
2		5150.000	52.72	-0.54	52.18	-21.82	74.00	Peak
3		5184.464	76.57	38.90	115.47	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

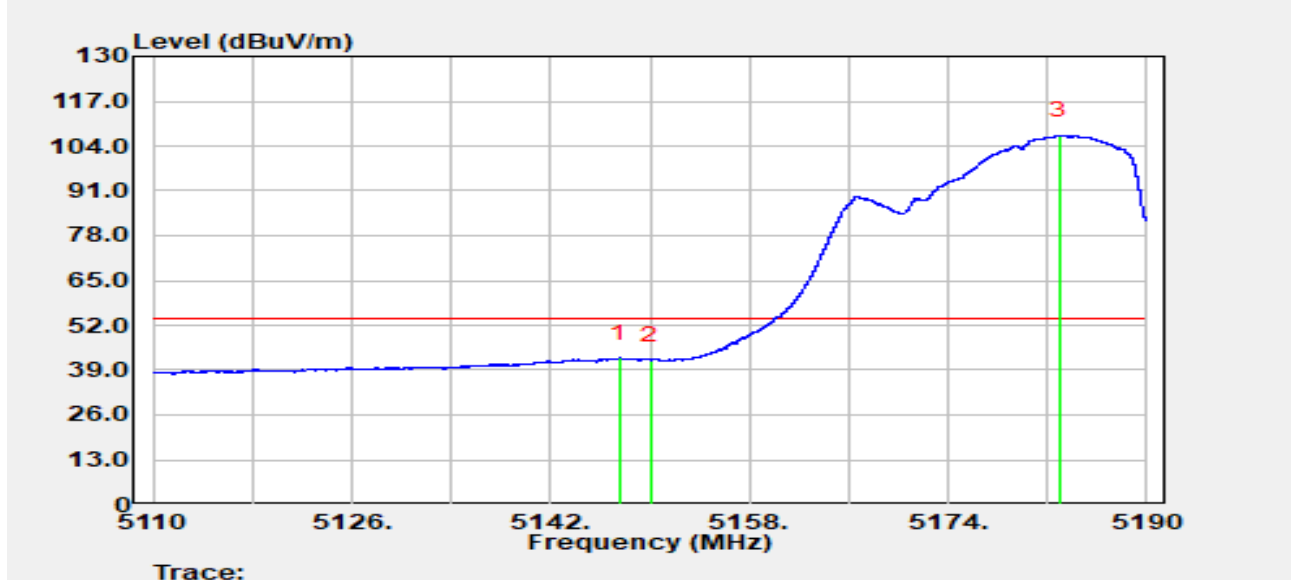


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.560	43.53	-1.04	42.49	-11.51	54.00	Average
2		5150.000	42.45	-0.54	41.91	-12.09	54.00	Average
3		5182.920	65.33	41.69	107.02	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

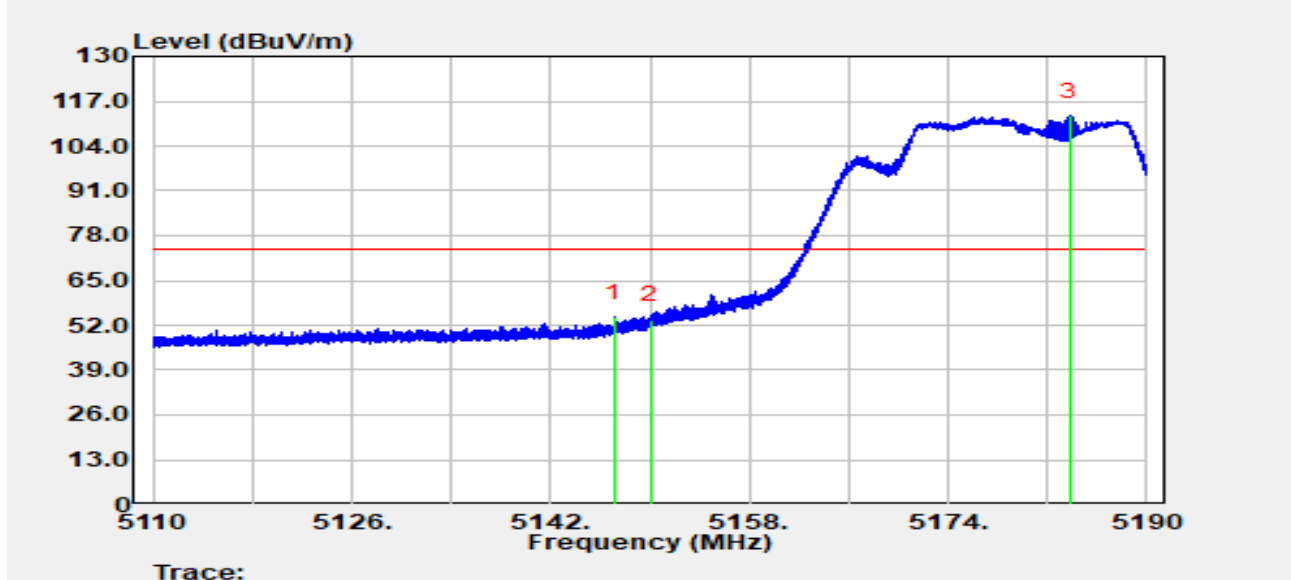


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.136	55.47	-1.13	54.34	-19.66	74.00	Peak
2		5150.000	54.05	-0.54	53.50	-20.50	74.00	Peak
3		5183.784	72.63	39.97	112.60	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

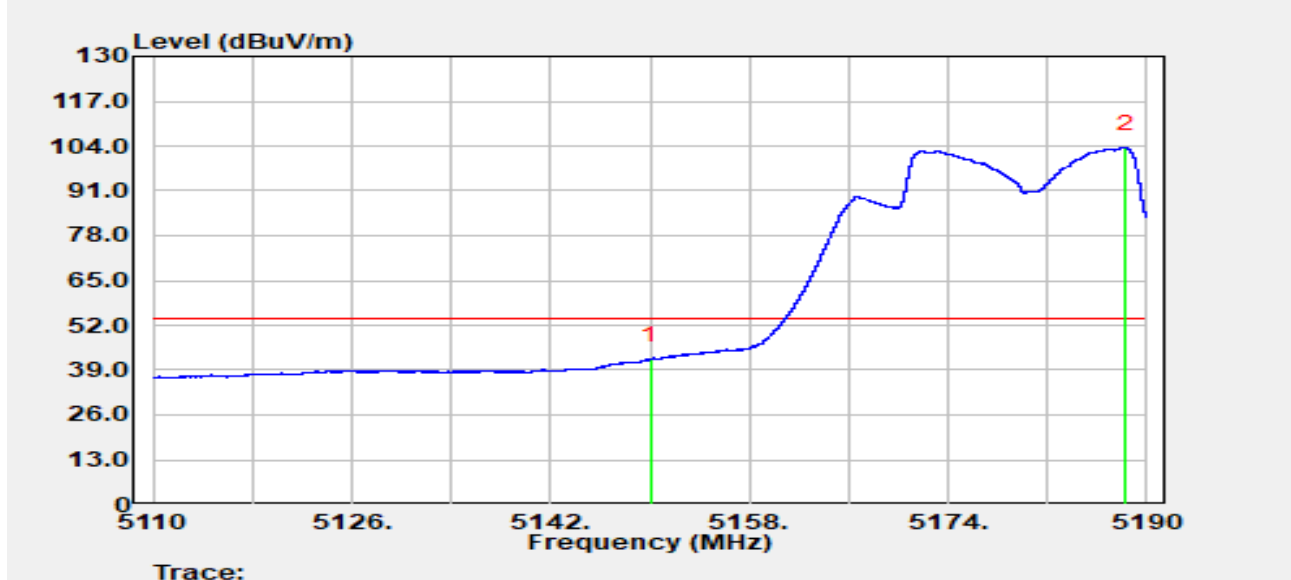


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	42.56	-0.54	42.02	-11.98	54.00	Average
2		5188.280	64.24	39.23	103.47	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

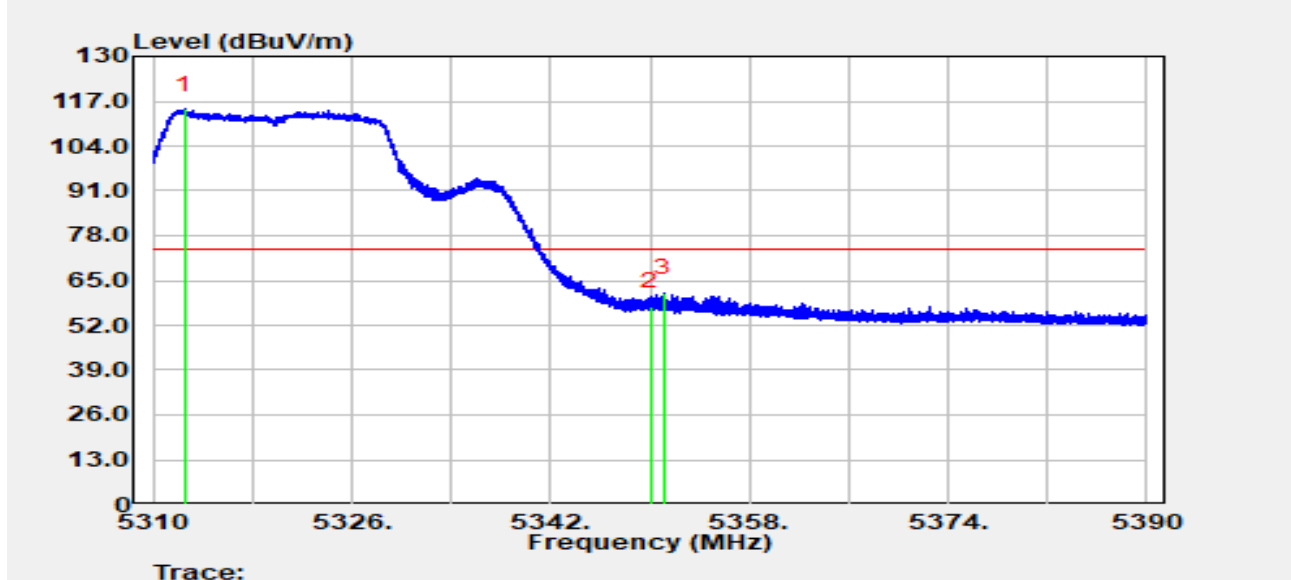


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.504	67.15	47.61	114.76	N/A	N/A	Peak
2		5350.000	55.31	2.28	57.59	-16.41	74.00	Peak
3	*	5351.144	59.99	1.54	61.53	-12.47	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

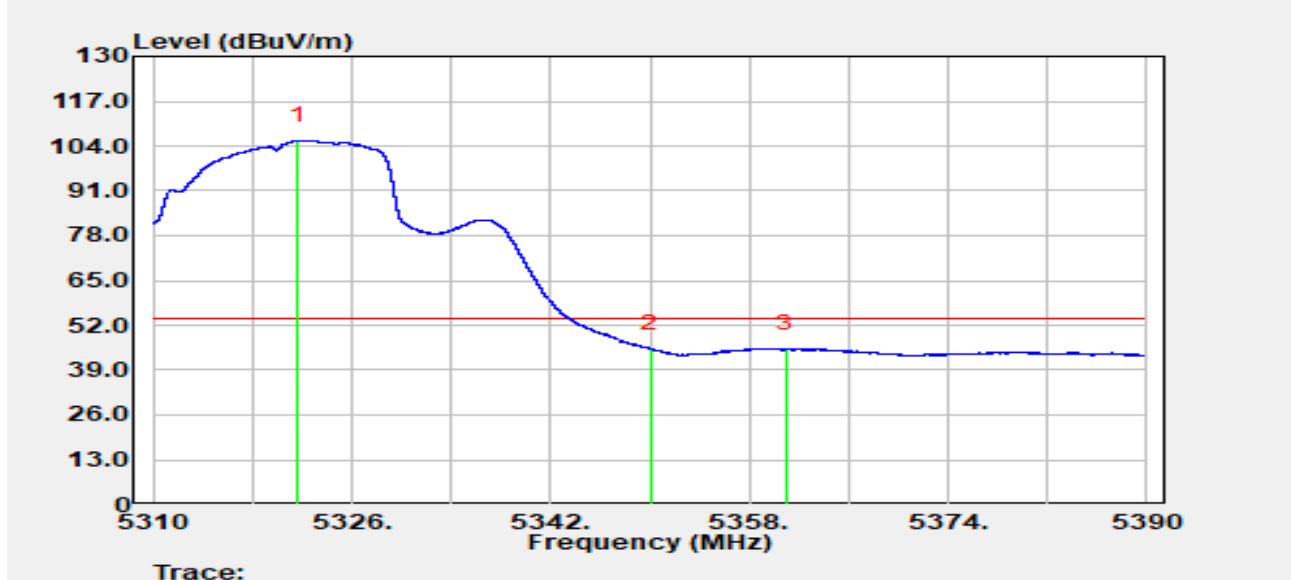


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.696	61.95	43.65	105.61	N/A	N/A	Average
2		5350.000	42.86	2.28	45.14	-8.86	54.00	Average
3	*	5360.936	46.19	-0.96	45.23	-8.77	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

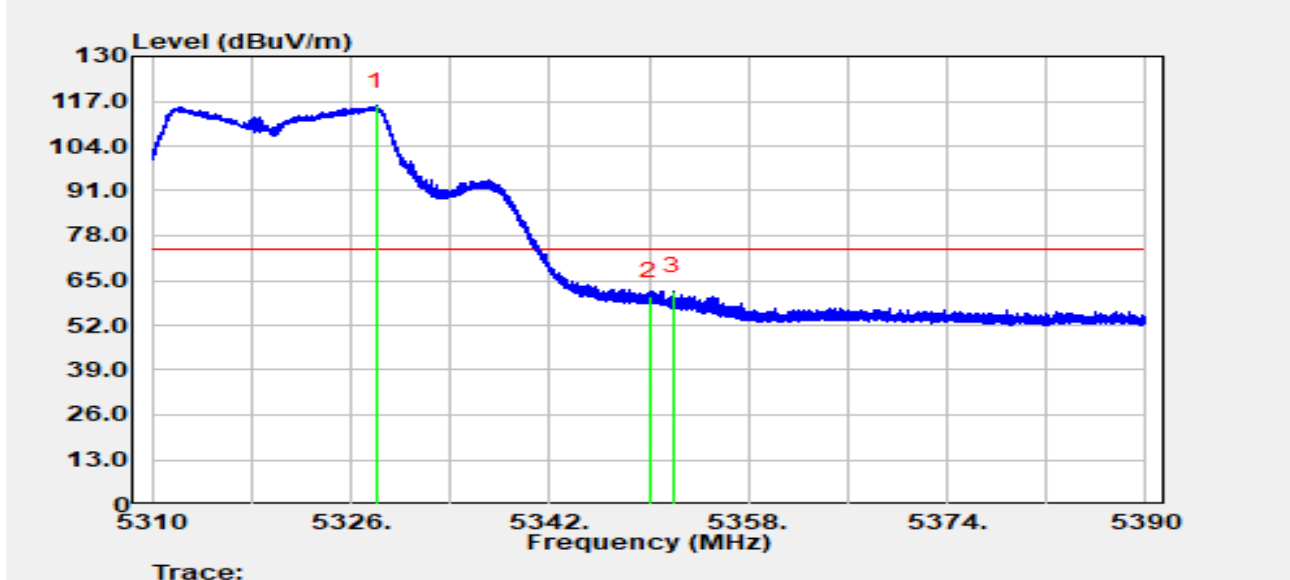


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.016	73.47	42.26	115.73	N/A	N/A	Peak
2		5350.000	58.19	2.28	60.47	-13.53	74.00	Peak
3	*	5351.928	61.00	0.96	61.96	-12.04	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

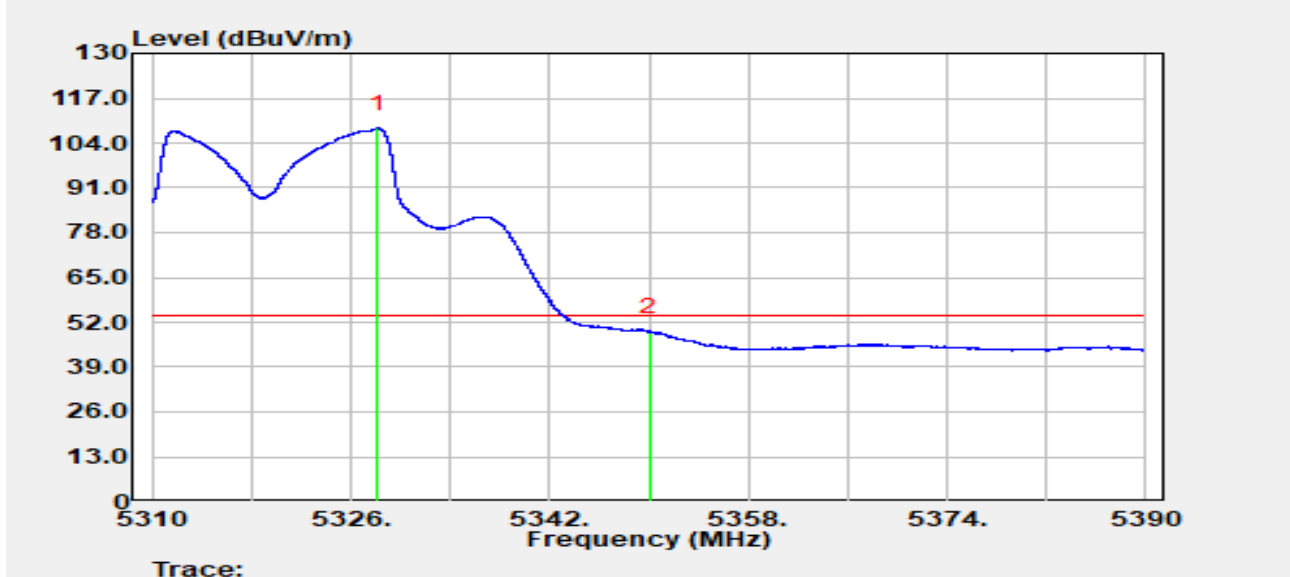


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.152	65.87	42.39	108.26	N/A	N/A	Average
2	*	5350.000	46.98	2.28	49.26	-4.74	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

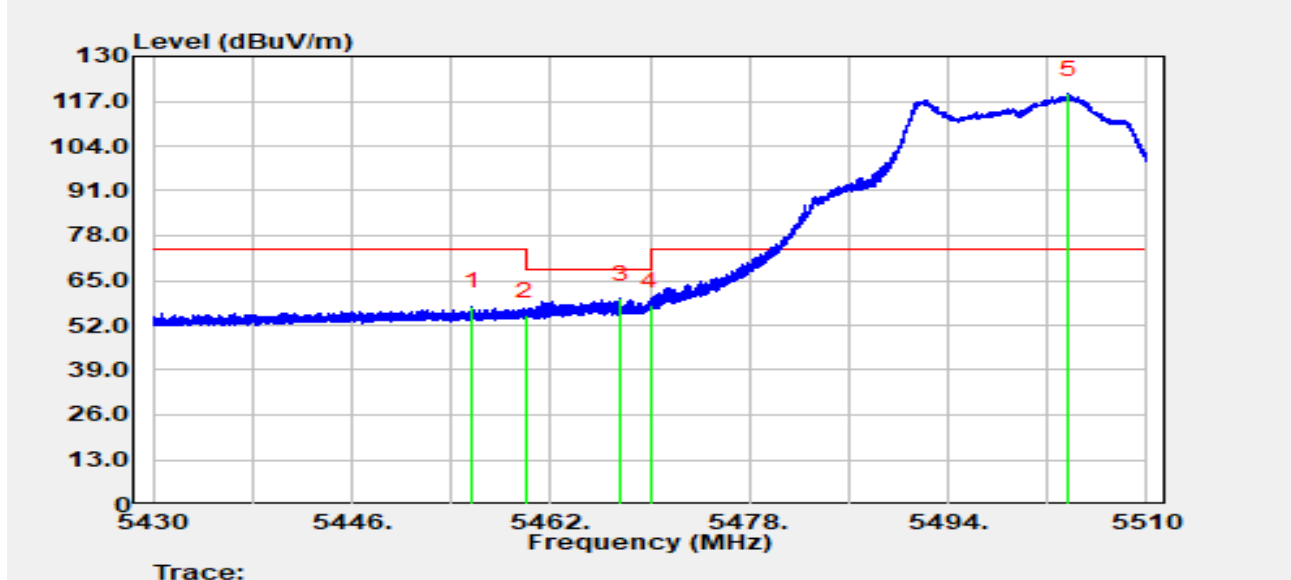


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.664	58.44	-1.00	57.44	-16.56	74.00	Peak
2		5460.000	55.40	-0.69	54.71	-13.49	68.20	Peak
3	*	5467.672	59.35	0.26	59.61	-8.59	68.20	Peak
4		5470.000	56.84	1.00	57.84	-10.36	68.20	Peak
5		5503.720	73.34	45.87	119.21	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

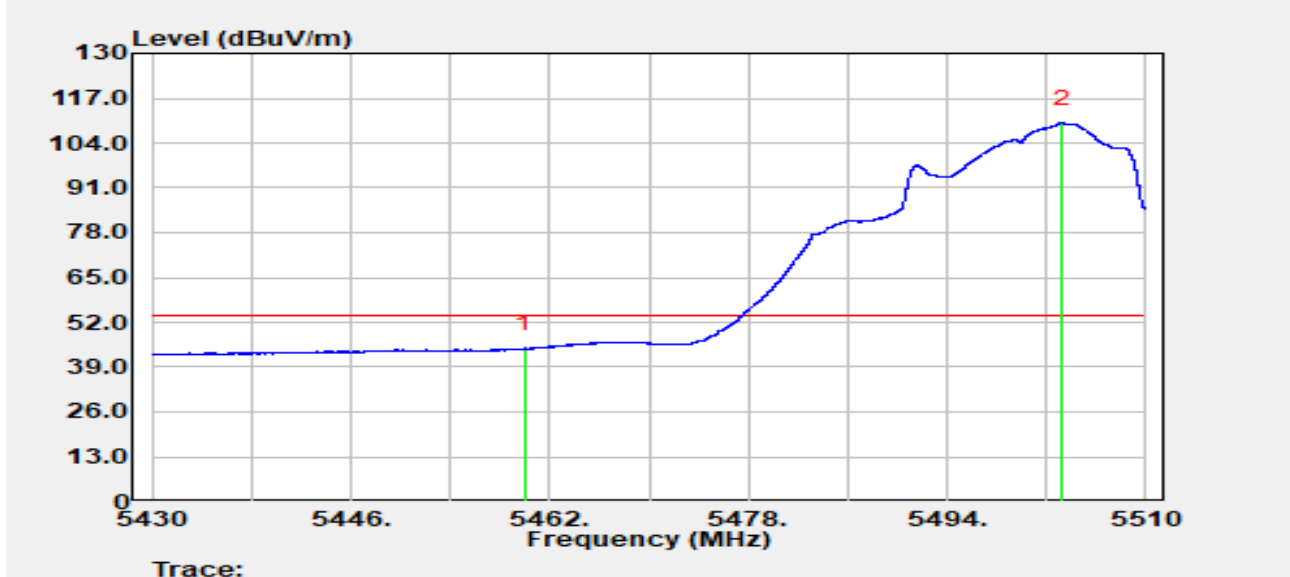


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	45.06	-0.69	44.37	-9.63	54.00	Average
2		5503.296	64.53	45.23	109.76	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

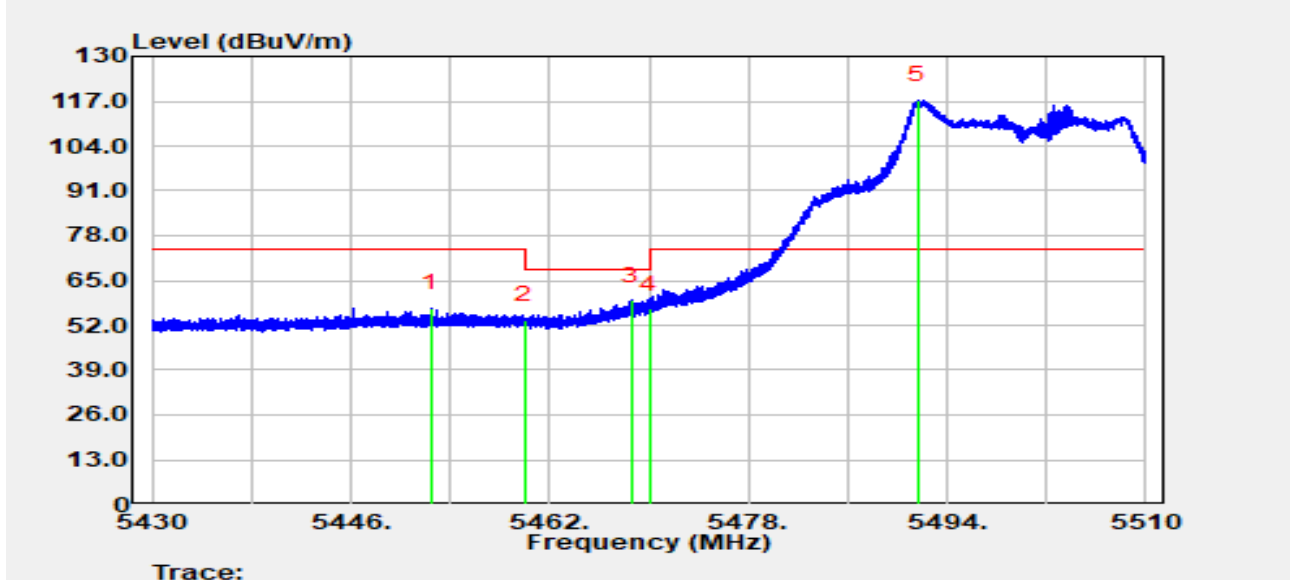


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.488	58.20	-1.13	57.06	-16.94	74.00	Peak
2		5460.000	54.29	-0.69	53.60	-14.60	68.20	Peak
3	*	5468.568	58.61	0.53	59.14	-9.06	68.20	Peak
4		5470.000	55.81	1.00	56.81	-11.39	68.20	Peak
5		5491.680	69.55	47.75	117.30	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

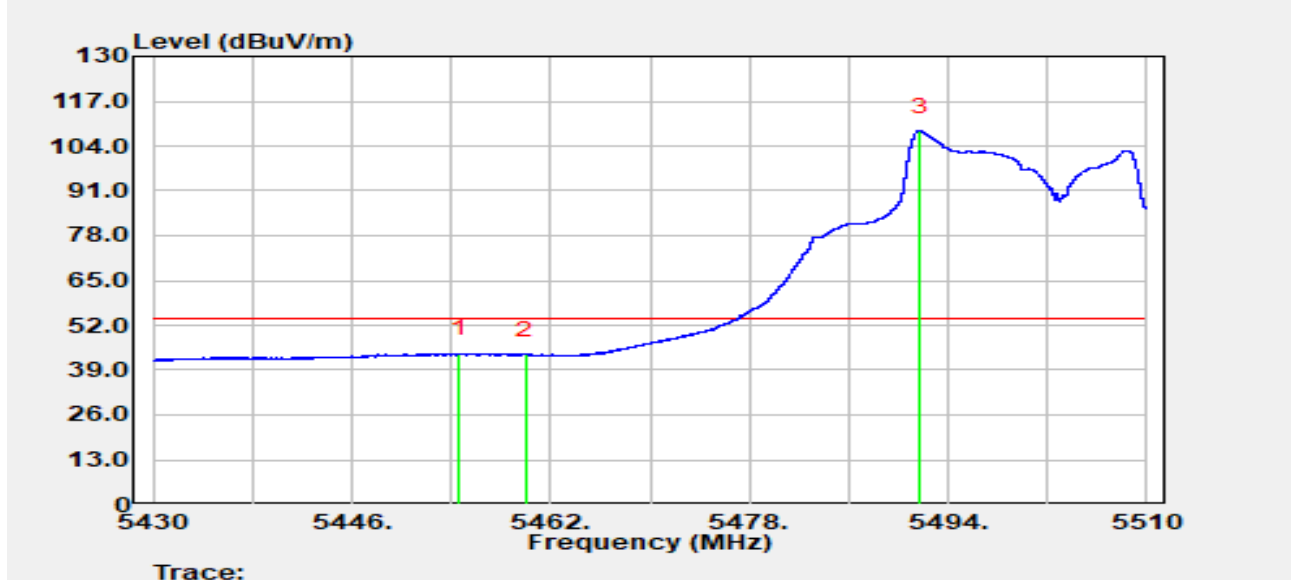


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.640	44.79	-1.04	43.75	-10.25	54.00	Average
2		5460.000	44.16	-0.69	43.47	-10.53	54.00	Average
3		5491.792	60.63	47.74	108.37	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

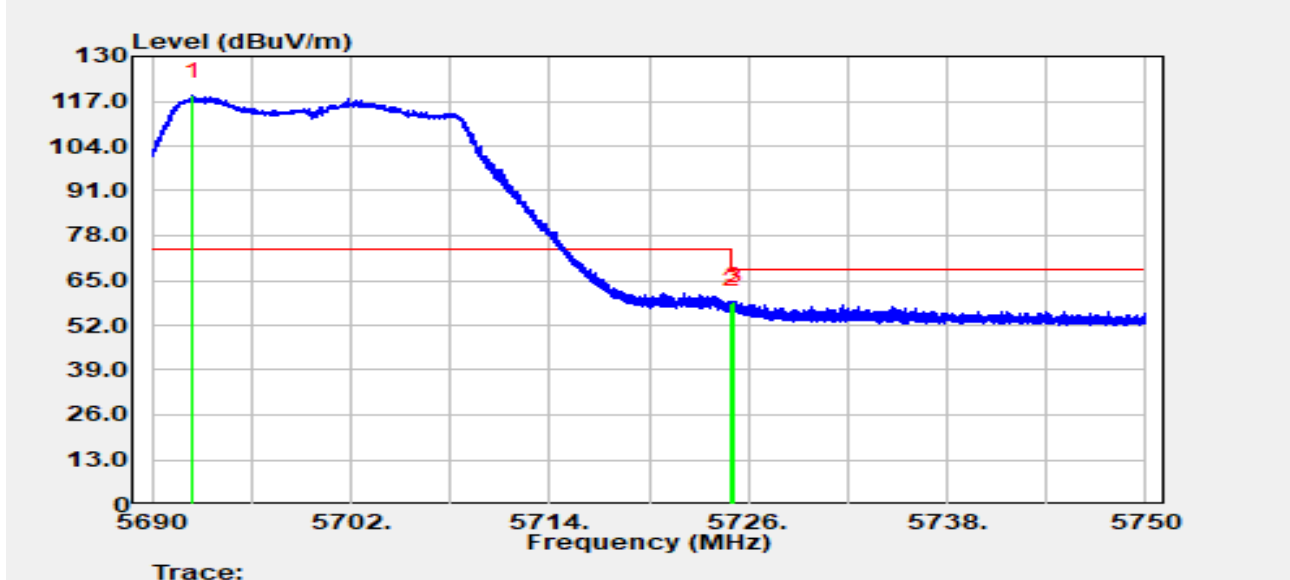


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.490	74.99	43.63	118.62	N/A	N/A	Peak
2		5725.000	57.34	1.01	58.34	-9.86	68.20	Peak
3	*	5725.160	58.18	0.91	59.10	-9.10	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

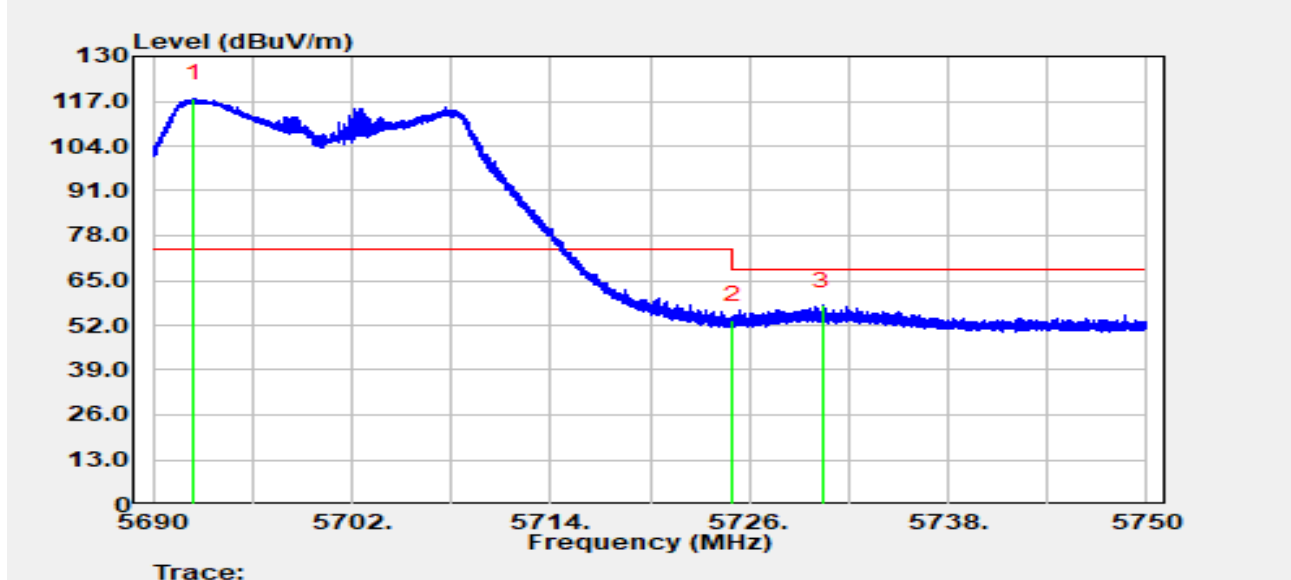


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.460	74.31	43.61	117.92	N/A	N/A	Peak
2		5725.000	52.71	1.01	53.71	-14.49	68.20	Peak
3	*	5730.410	58.49	-0.81	57.69	-10.51	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

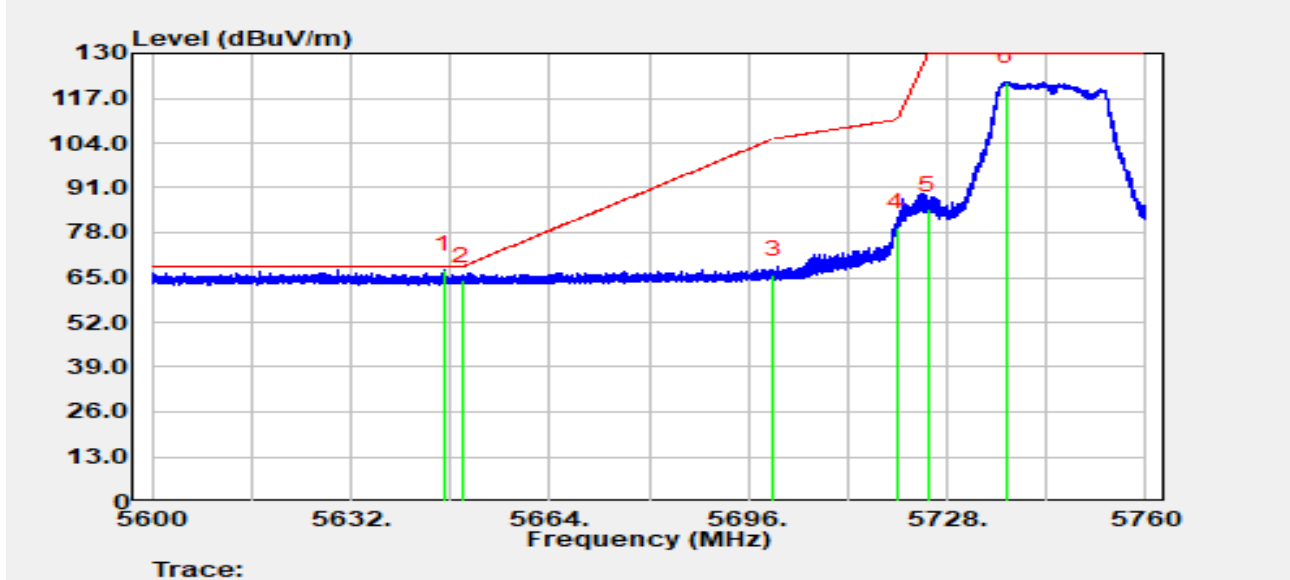


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.040	71.01	-3.65	67.36	-0.84	68.20	Peak
2		5650.000	67.87	-3.65	64.22	-3.98	68.20	Peak
3		5700.000	69.39	-3.47	65.91	-39.29	105.20	Peak
4		5720.000	83.12	-3.45	79.66	-31.14	110.80	Peak
5		5725.000	88.24	-3.47	84.77	-45.23	130.00	Peak
6		5737.504	125.30	-3.58	121.71	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

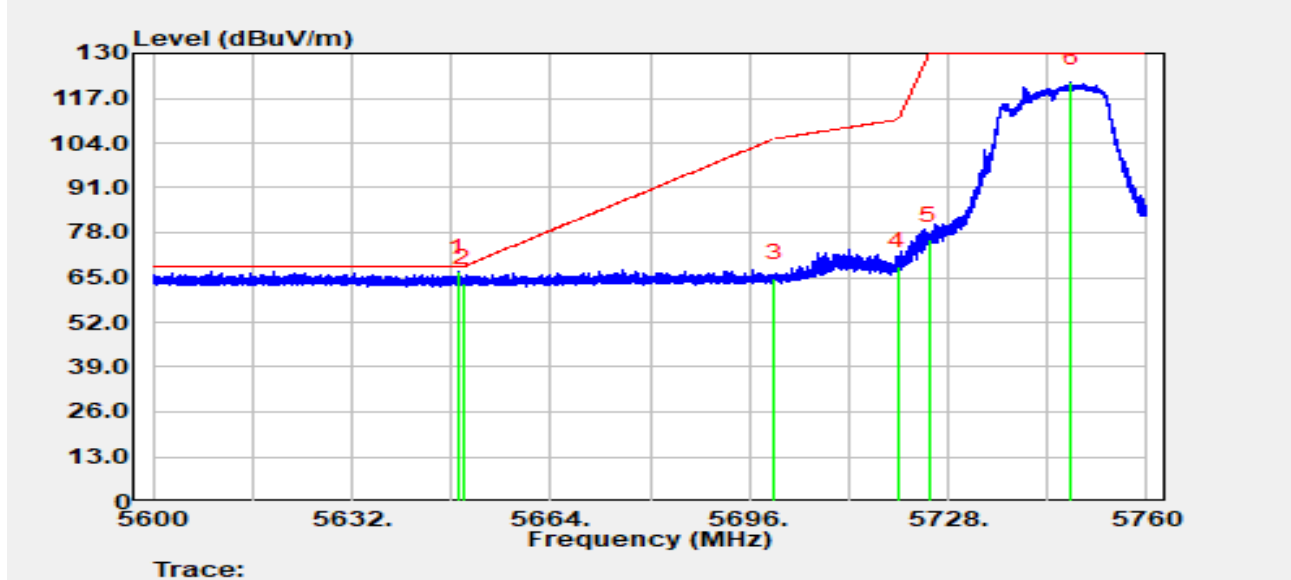


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5649.152	70.36	-3.65	66.72	-1.48	68.20	Peak
2		5650.000	67.04	-3.65	63.39	-4.81	68.20	Peak
3		5700.000	68.27	-3.47	64.79	-40.41	105.20	Peak
4		5720.000	71.79	-3.45	68.34	-42.46	110.80	Peak
5		5725.000	79.38	-3.47	75.91	-54.09	130.00	Peak
6		5747.888	125.24	-3.65	121.59	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

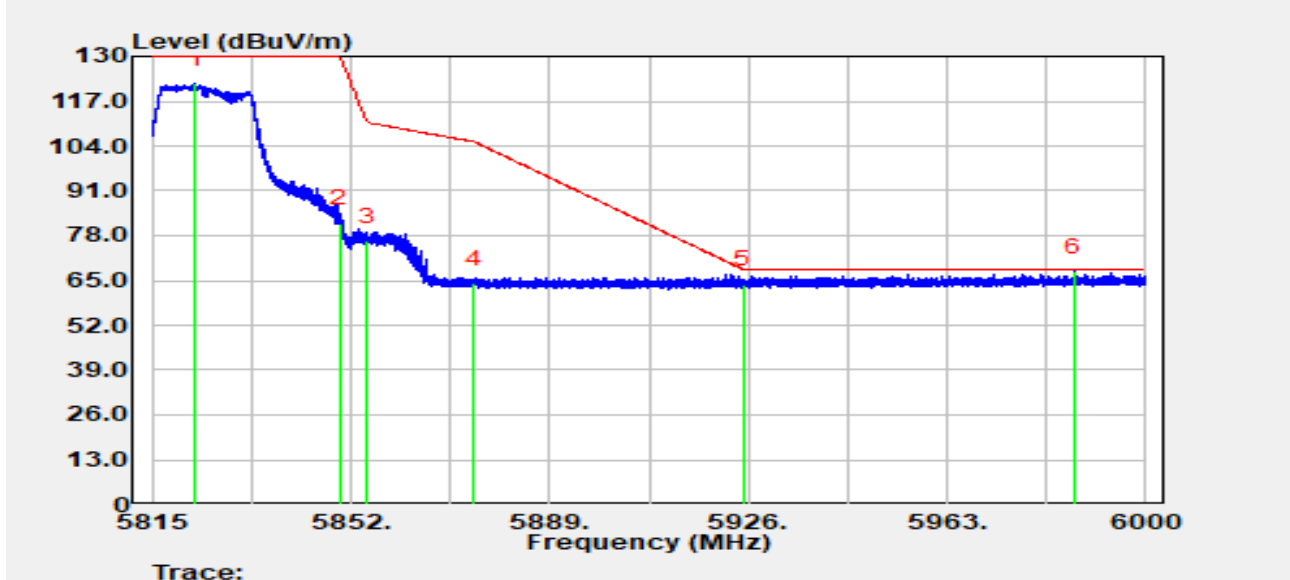


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.103	125.73	-3.77	121.97	N/A	N/A	Peak
2		5850.000	85.22	-3.75	81.47	-48.53	130.00	Peak
3		5855.000	80.18	-3.75	76.43	-34.37	110.80	Peak
4		5875.000	68.01	-3.82	64.19	-41.01	105.20	Peak
5		5925.000	67.48	-3.71	63.78	-4.42	68.20	Peak
6	*	5986.735	71.16	-3.68	67.48	-0.72	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

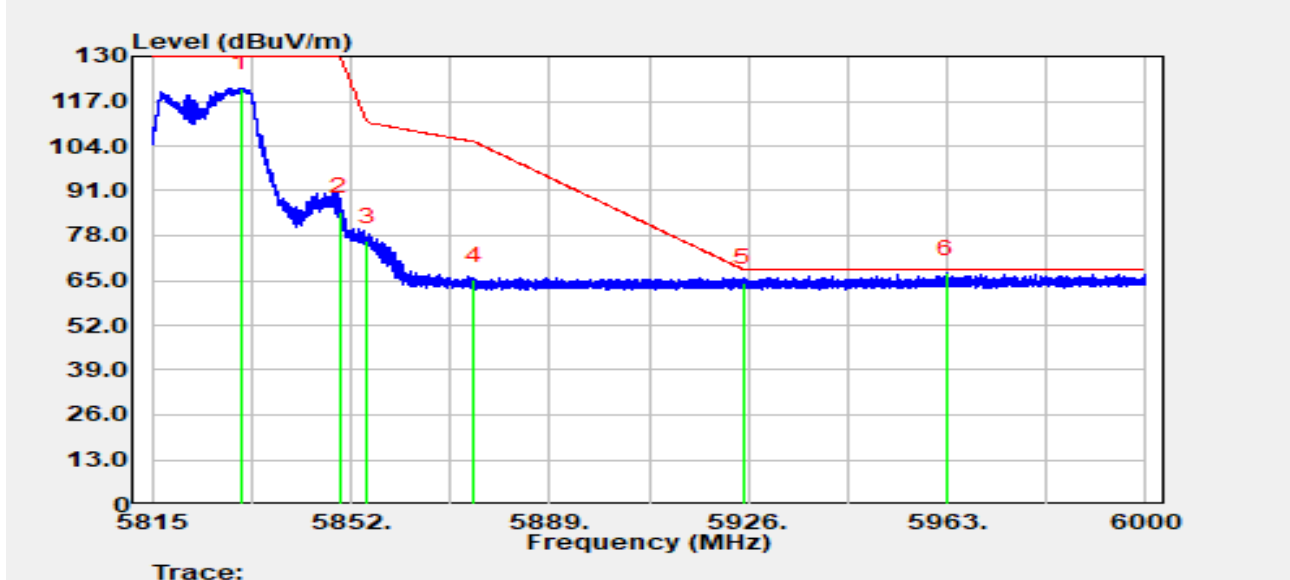


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5831.446	124.63	-3.74	120.89	N/A	N/A	Peak
2		5850.000	88.83	-3.75	85.07	-44.93	130.00	Peak
3		5855.000	80.16	-3.75	76.41	-34.39	110.80	Peak
4		5875.000	69.01	-3.82	65.18	-40.02	105.20	Peak
5		5925.000	68.16	-3.71	64.46	-3.74	68.20	Peak
6	*	5962.963	70.62	-3.64	66.98	-1.22	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

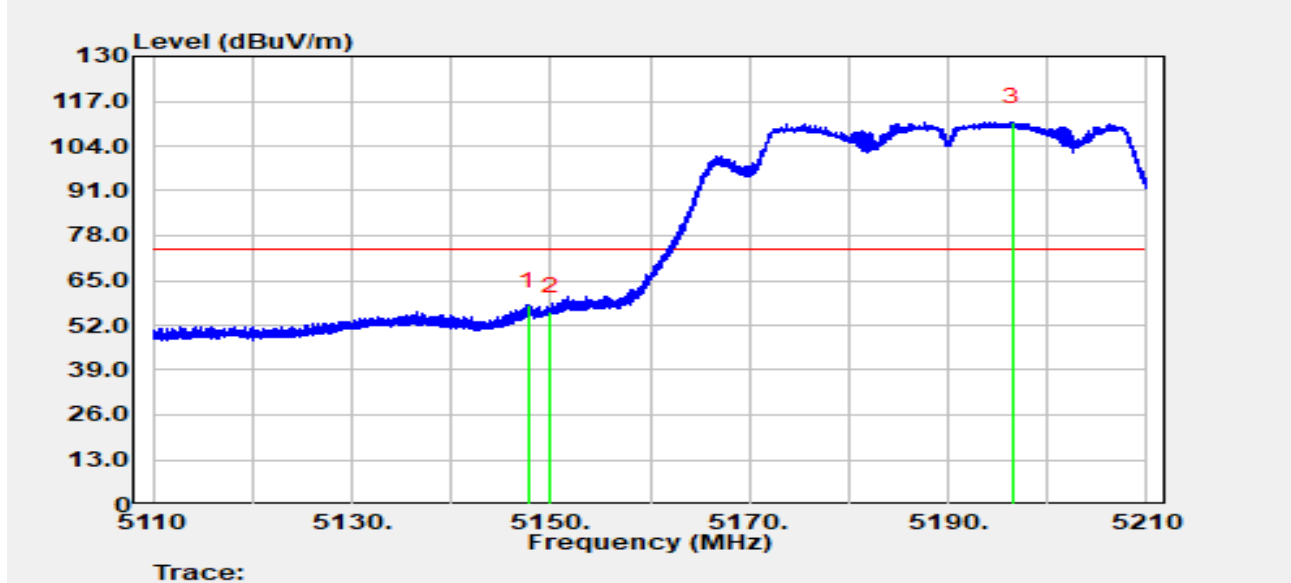


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.710	58.87	-1.00	57.86	-16.14	74.00	Peak
2		5150.000	56.60	-0.54	56.06	-17.94	74.00	Peak
3		5196.430	73.90	37.11	111.02	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

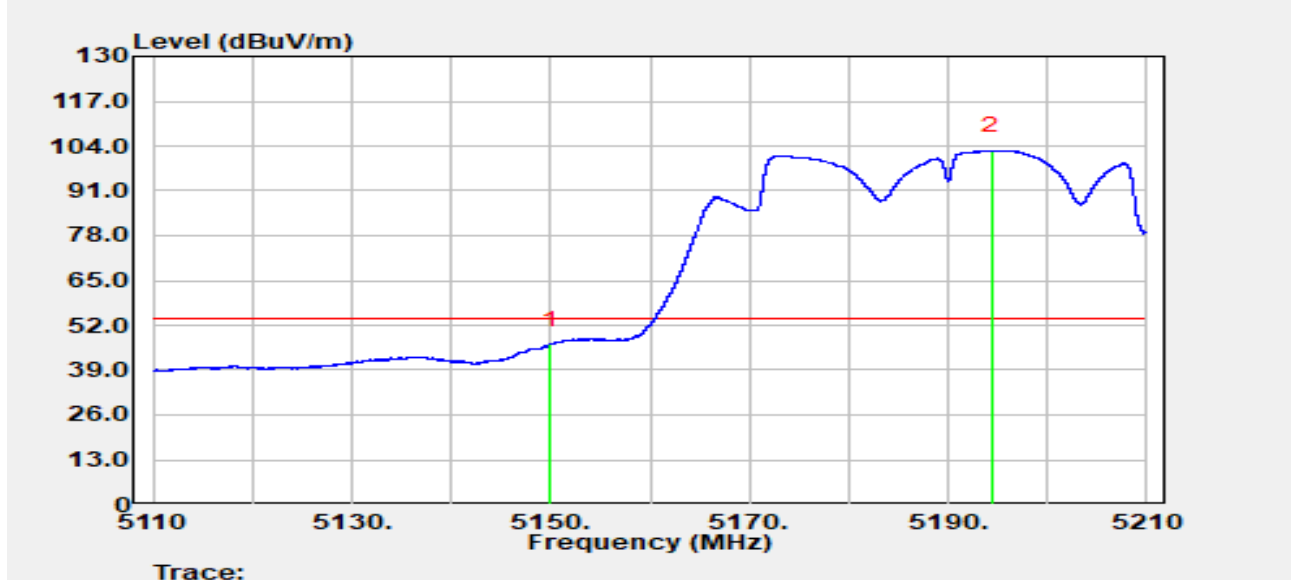


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	46.95	-0.54	46.40	-7.60	54.00	Average
2		5194.390	65.10	37.61	102.70	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

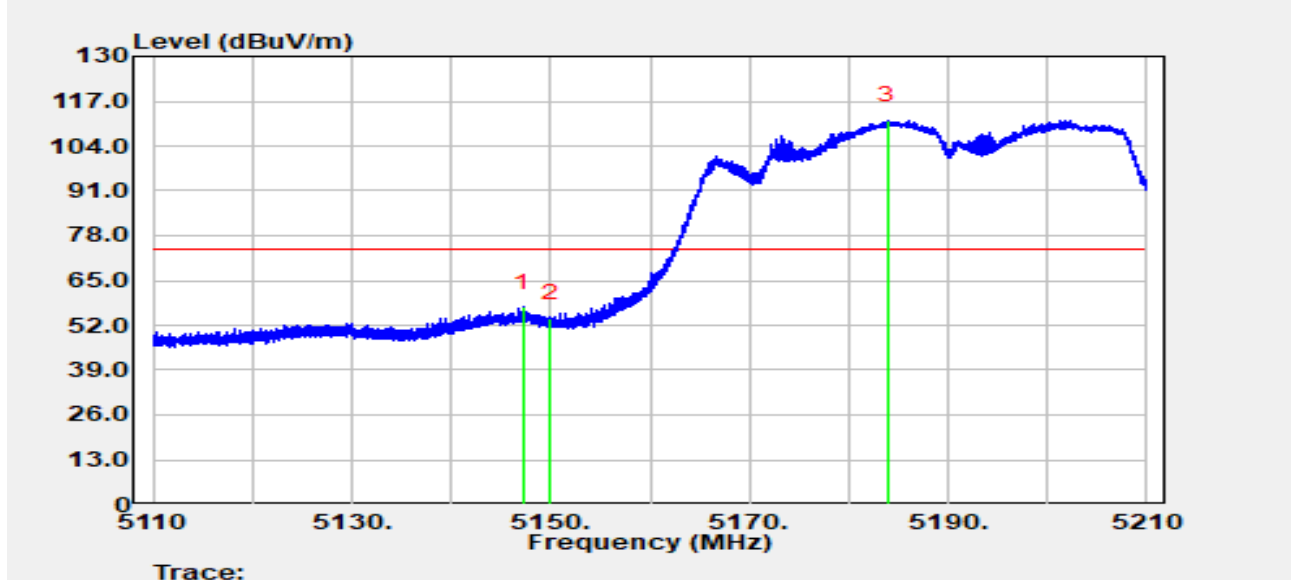


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.270	58.32	-1.10	57.22	-16.78	74.00	Peak
2		5150.000	54.51	-0.54	53.97	-20.03	74.00	Peak
3		5183.960	71.96	39.63	111.59	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

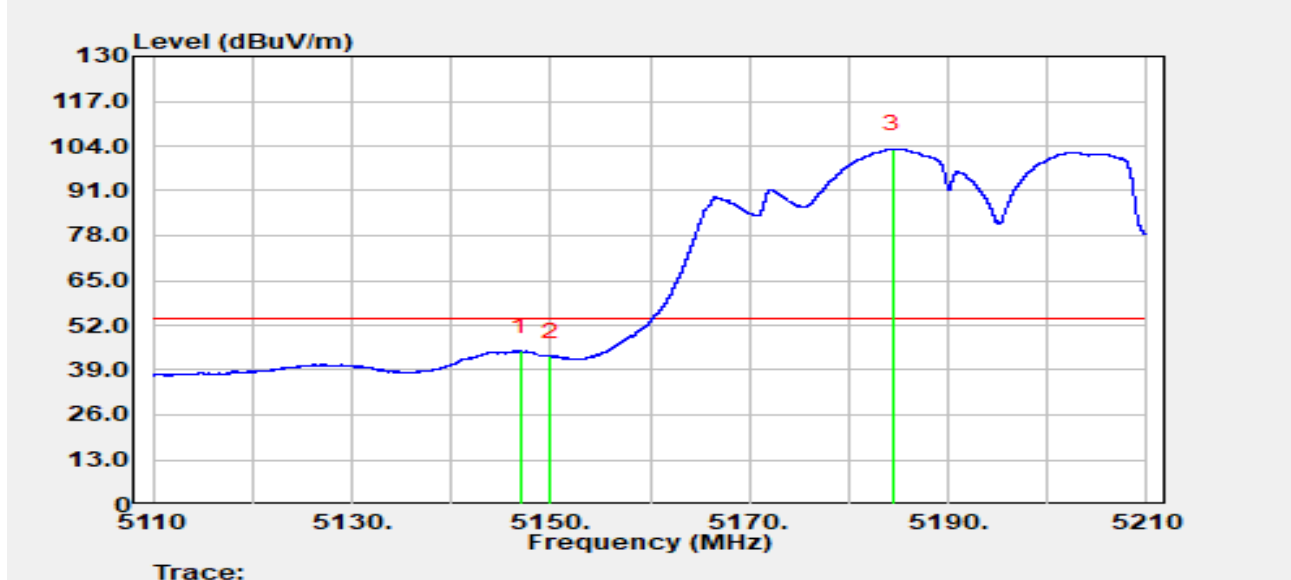


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.980	45.65	-1.17	44.48	-9.52	54.00	Average
2		5150.000	43.61	-0.54	43.06	-10.94	54.00	Average
3		5184.440	64.11	38.93	103.03	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

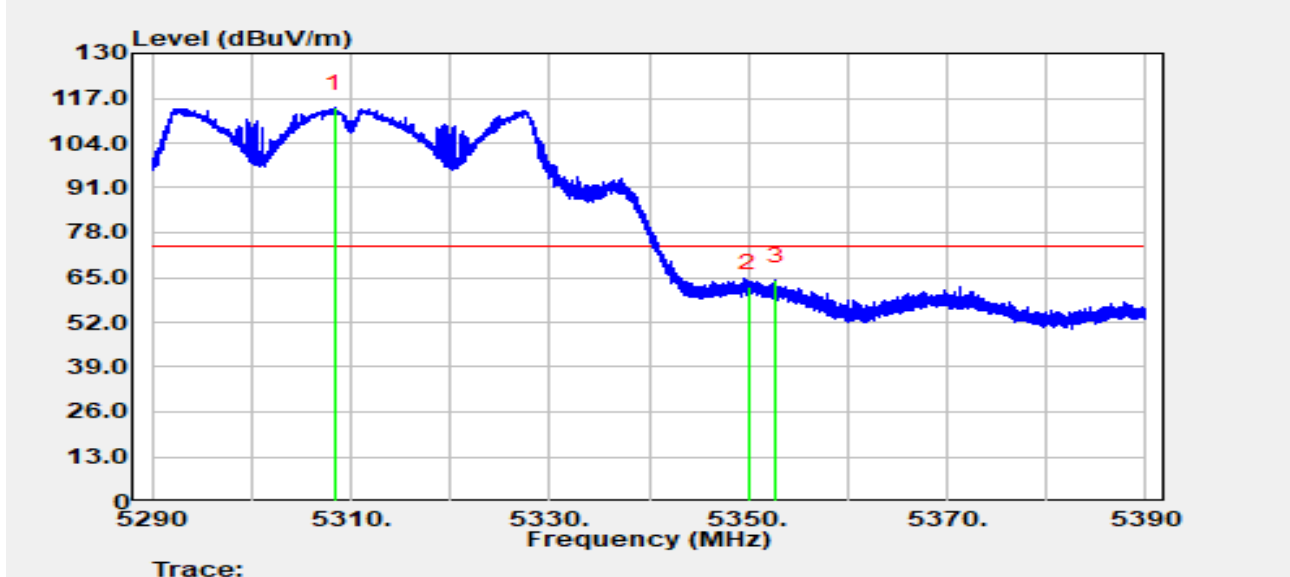


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.360	71.88	42.27	114.15	N/A	N/A	Peak
2		5350.000	59.87	2.28	62.15	-11.85	74.00	Peak
3	*	5352.720	63.70	0.51	64.21	-9.79	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

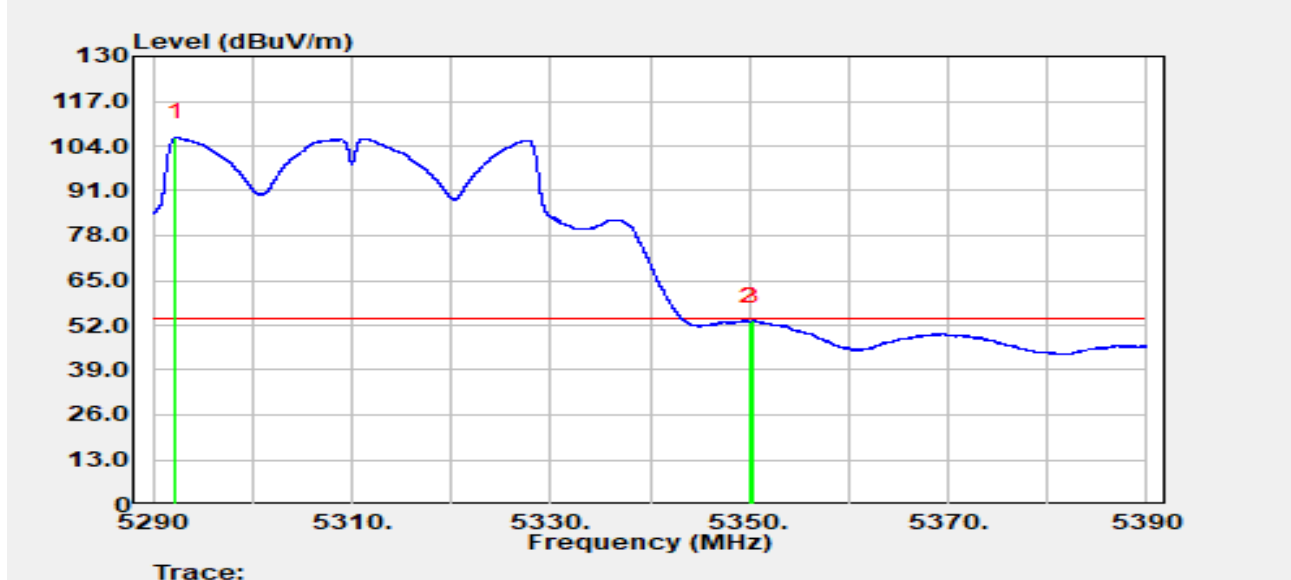


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5292.310	65.44	41.02	106.46	N/A	N/A	Average
2		5350.000	50.79	2.28	53.07	-0.93	54.00	Average
3	*	5350.310	51.22	2.12	53.34	-0.66	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

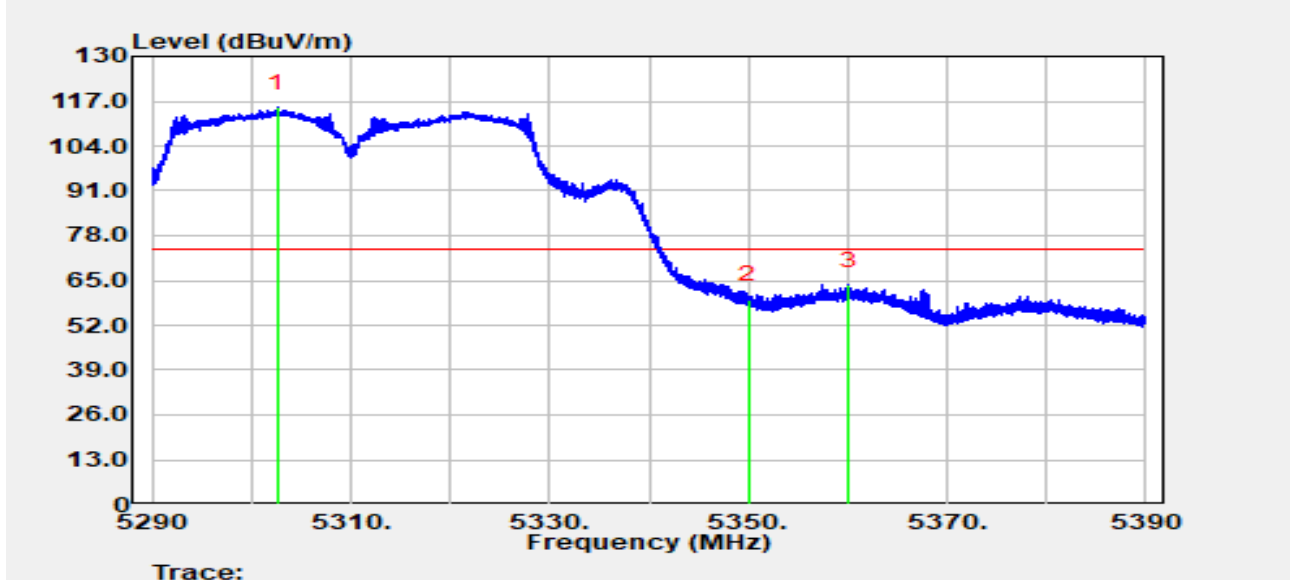


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5302.670	71.67	43.56	115.24	N/A	N/A	Peak
2		5350.000	57.24	2.28	59.52	-14.48	74.00	Peak
3	*	5360.130	64.55	-0.83	63.72	-10.28	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

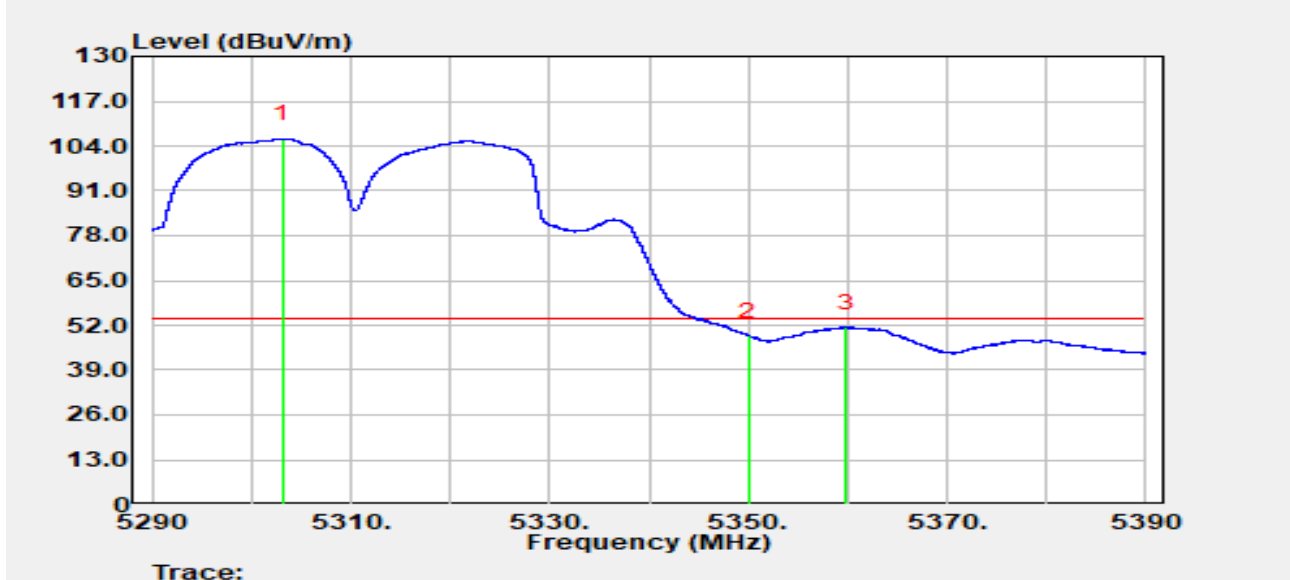


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5303.190	62.94	43.14	106.08	N/A	N/A	Average
2		5350.000	46.71	2.28	48.99	-5.01	54.00	Average
3	*	5359.880	52.22	-0.81	51.41	-2.59	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

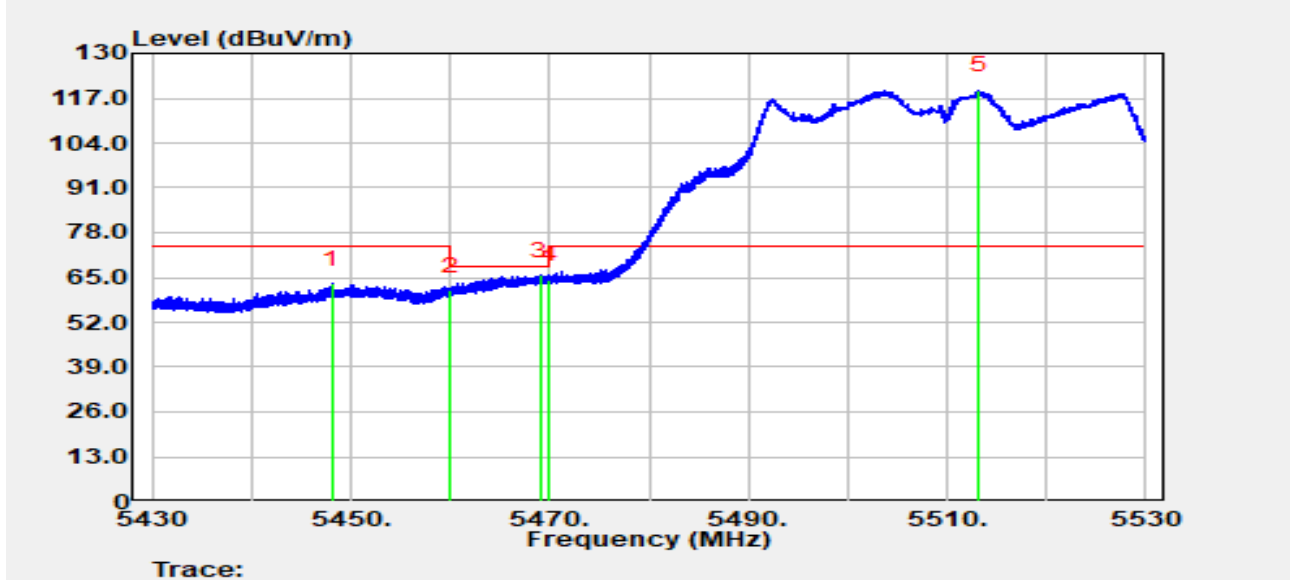


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5448.110	64.47	-1.42	63.05	-10.95	74.00	Peak
2		5460.000	61.91	-0.69	61.22	-6.98	68.20	Peak
3	*	5469.080	64.79	0.72	65.51	-2.69	68.20	Peak
4		5470.000	63.28	1.00	64.28	-3.92	68.20	Peak
5		5513.230	74.91	44.34	119.25	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

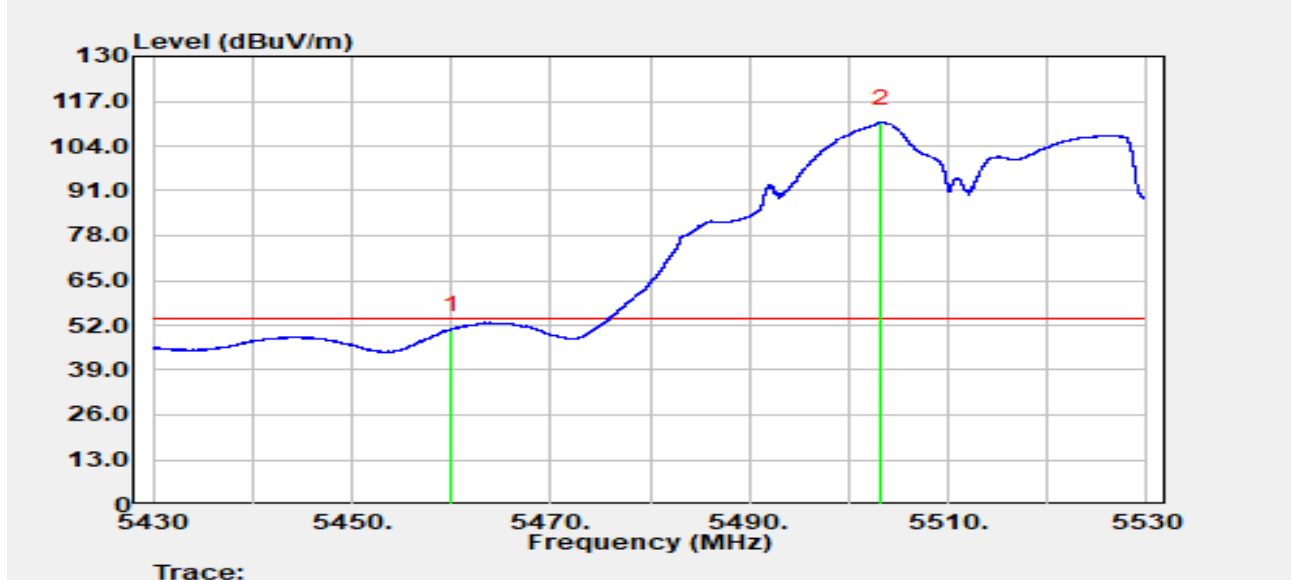


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5460.000	51.46	-0.69	50.76	-3.24	54.00	Average
2		5503.200	65.70	45.07	110.77	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

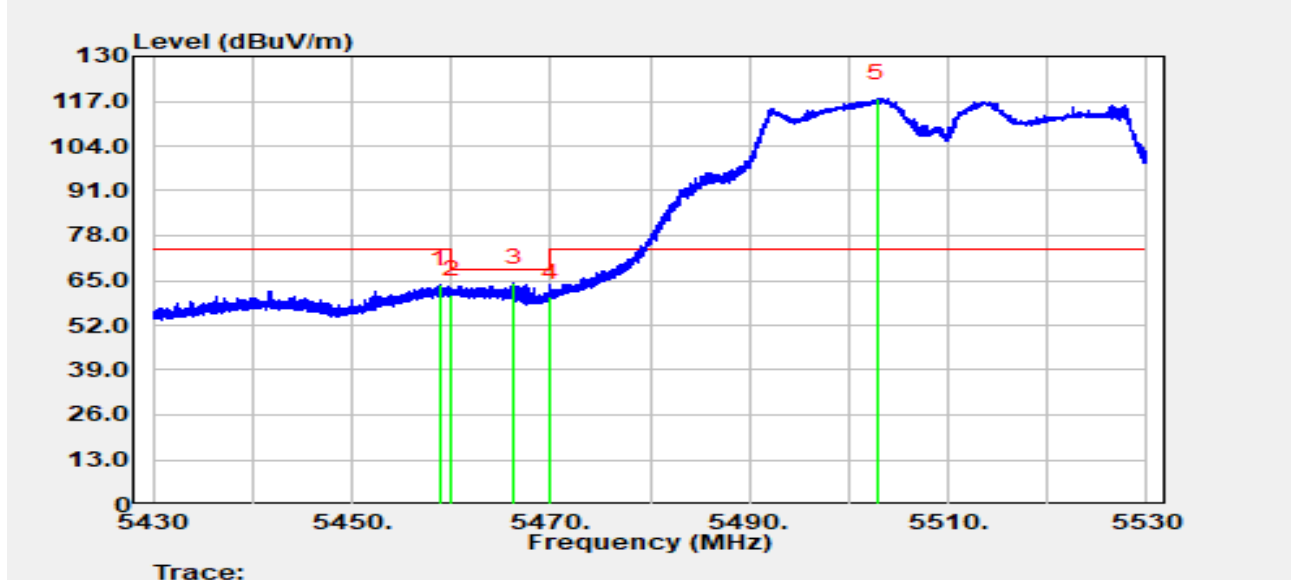


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.880	64.69	-0.82	63.88	-10.12	74.00	Peak
2		5460.000	61.59	-0.69	60.90	-7.30	68.20	Peak
3	*	5466.370	64.50	-0.02	64.48	-3.72	68.20	Peak
4		5470.000	59.15	1.00	60.15	-8.05	68.20	Peak
5		5502.850	73.53	44.32	117.85	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

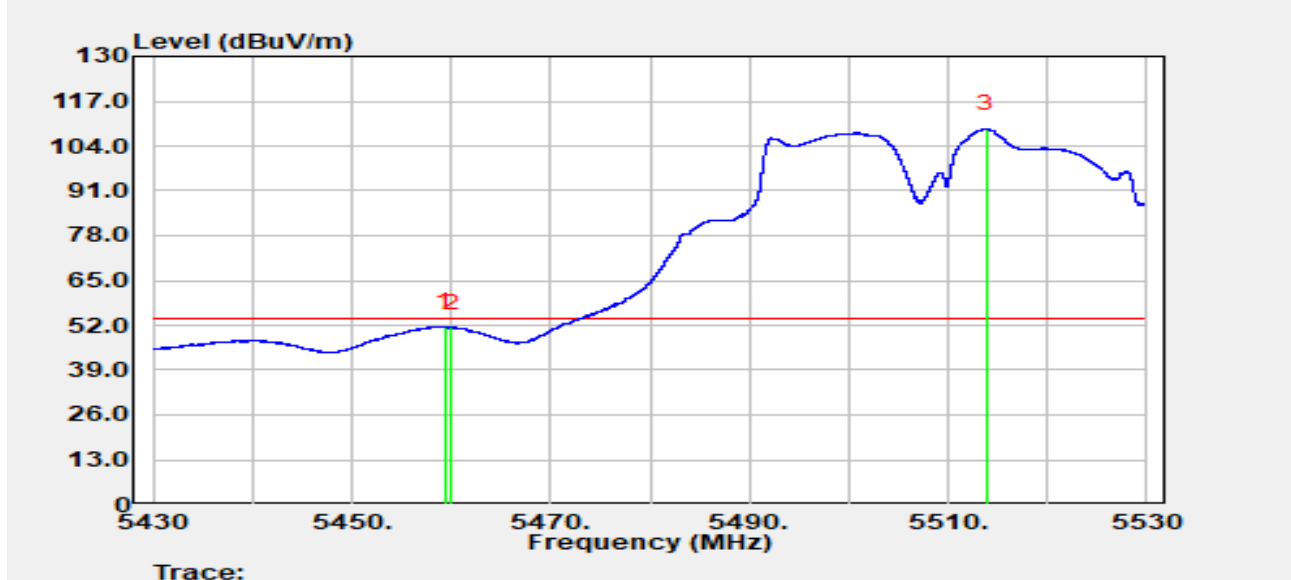


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.330	52.45	-0.77	51.68	-2.32	54.00	Average
2		5460.000	52.01	-0.69	51.32	-2.68	54.00	Average
3		5513.830	64.18	44.84	109.02	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

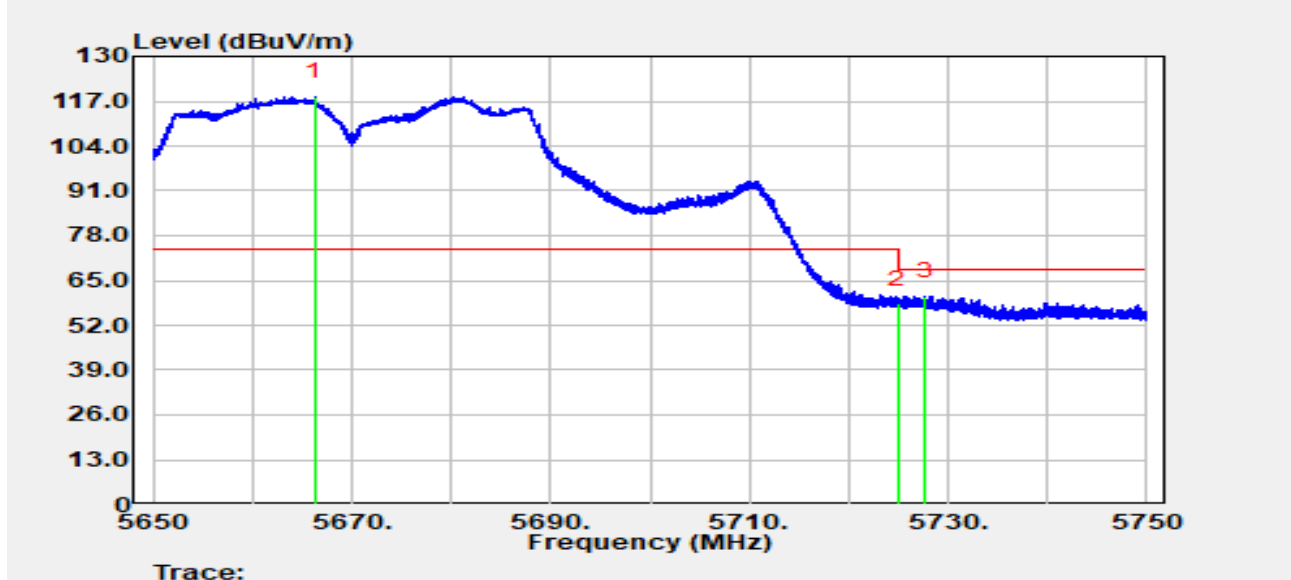


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5666.330	72.12	46.16	118.28	N/A	N/A	Peak
2		5725.000	57.27	1.01	58.27	-9.93	68.20	Peak
3	*	5727.740	60.75	-0.18	60.57	-7.63	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

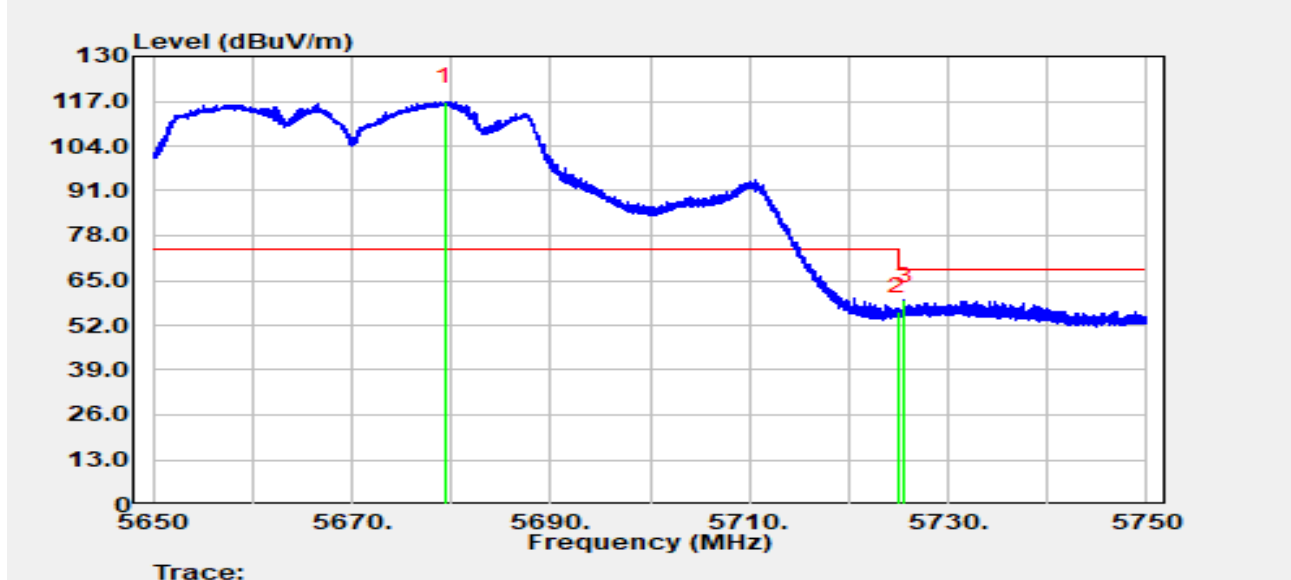


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5679.430	71.69	45.22	116.91	N/A	N/A	Peak
2		5725.000	55.00	1.01	56.00	-12.20	68.20	Peak
3	*	5725.580	58.54	0.68	59.22	-8.98	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

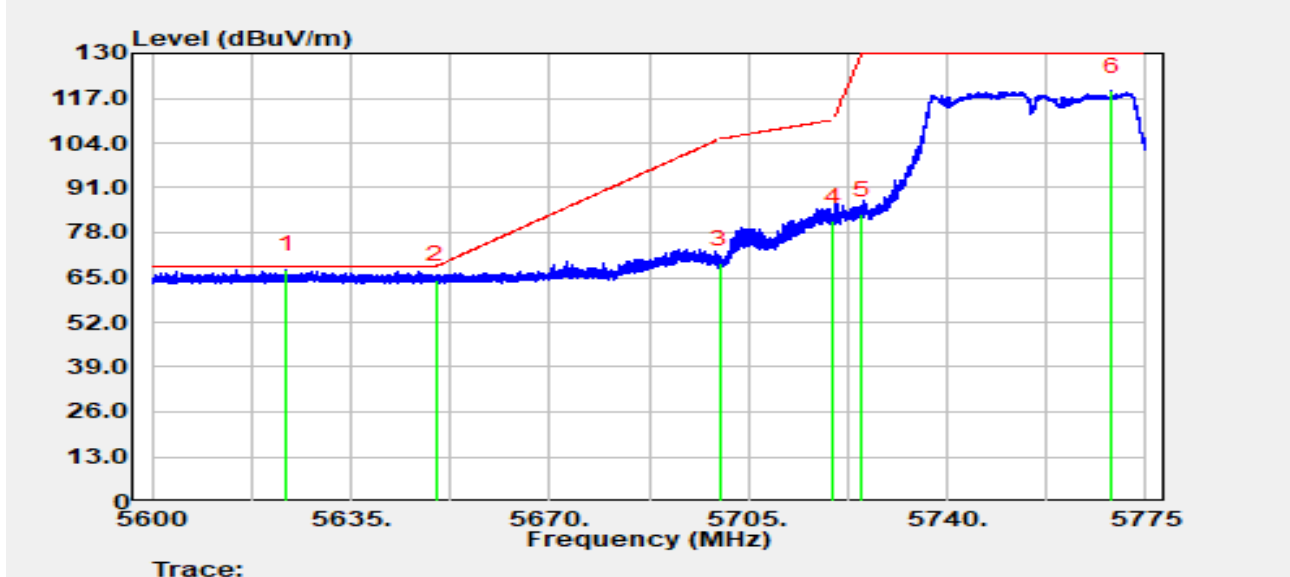


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5623.607	70.65	-3.35	67.31	-0.89	68.20	Peak
2		5650.000	67.97	-3.65	64.32	-3.88	68.20	Peak
3		5700.000	72.59	-3.47	69.12	-36.08	105.20	Peak
4		5720.000	84.72	-3.45	81.27	-29.53	110.80	Peak
5		5725.000	86.79	-3.47	83.32	-46.68	130.00	Peak
6		5769.067	122.83	-3.67	119.15	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

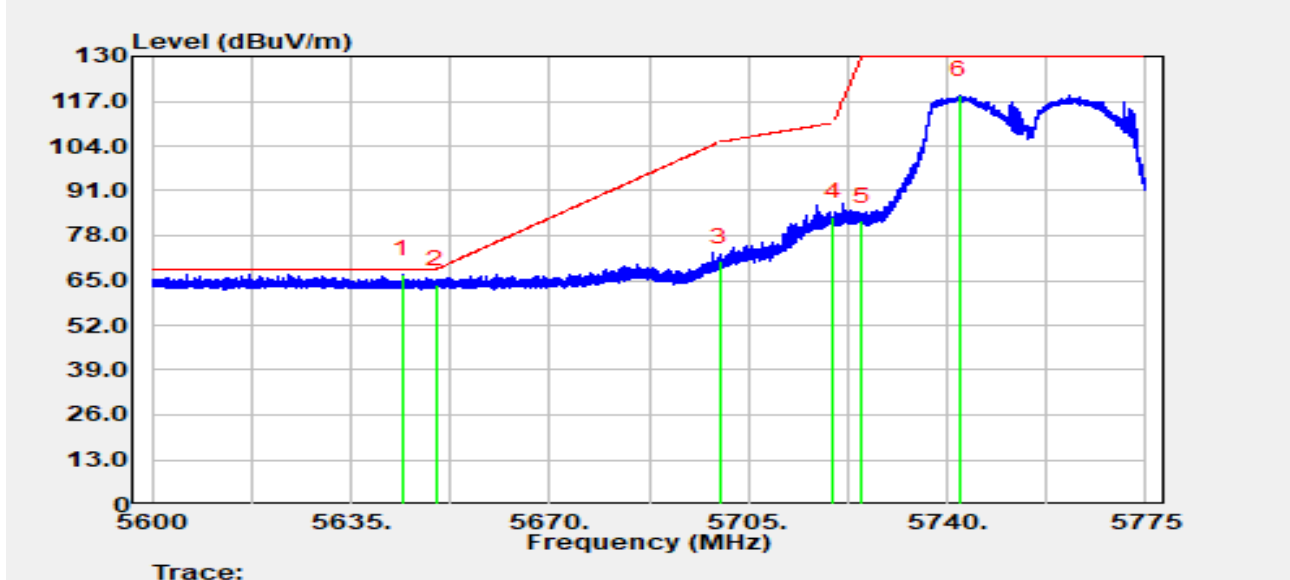


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.135	70.43	-3.65	66.78	-1.42	68.20	Peak
2		5650.000	67.57	-3.65	63.92	-4.28	68.20	Peak
3		5700.000	73.92	-3.47	70.44	-34.76	105.20	Peak
4		5720.000	87.07	-3.45	83.62	-27.18	110.80	Peak
5		5725.000	85.65	-3.47	82.18	-47.82	130.00	Peak
6		5742.118	122.57	-3.63	118.94	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

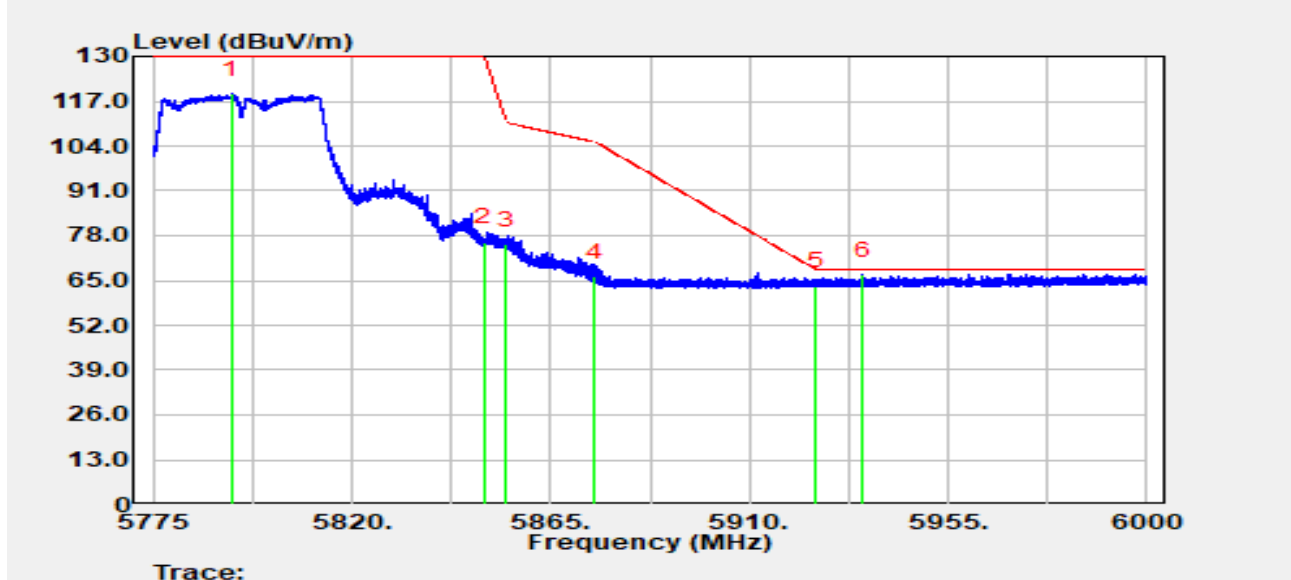


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5792.820	122.89	-3.69	119.20	N/A	N/A	Peak
2		5850.000	79.97	-3.75	76.21	-53.79	130.00	Peak
3		5855.010	79.21	-3.75	75.46	-35.34	110.80	Peak
4		5875.000	69.93	-3.82	66.11	-39.09	105.20	Peak
5		5925.000	67.09	-3.71	63.39	-4.81	68.20	Peak
6	*	5935.538	70.34	-3.68	66.66	-1.54	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

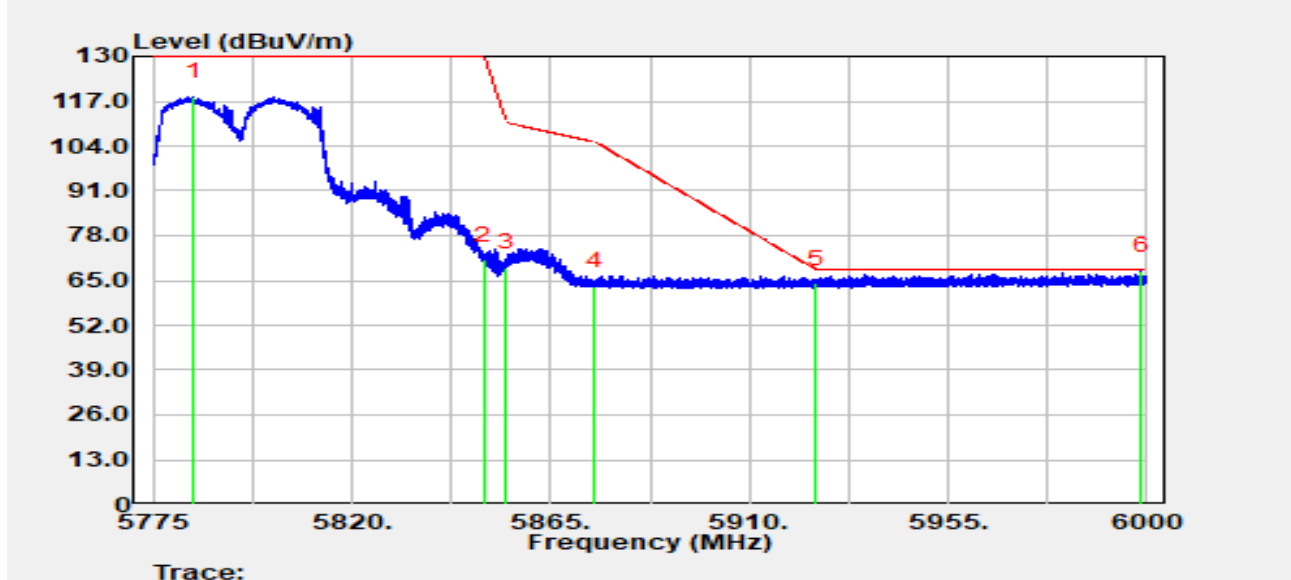


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5784.090	121.95	-3.69	118.26	N/A	N/A	Peak
2		5850.000	74.80	-3.75	71.05	-58.95	130.00	Peak
3		5855.000	72.51	-3.75	68.76	-42.04	110.80	Peak
4		5875.000	67.21	-3.82	63.39	-41.81	105.20	Peak
5		5925.000	67.83	-3.71	64.13	-4.07	68.20	Peak
6	*	5998.627	71.43	-3.72	67.70	-0.50	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

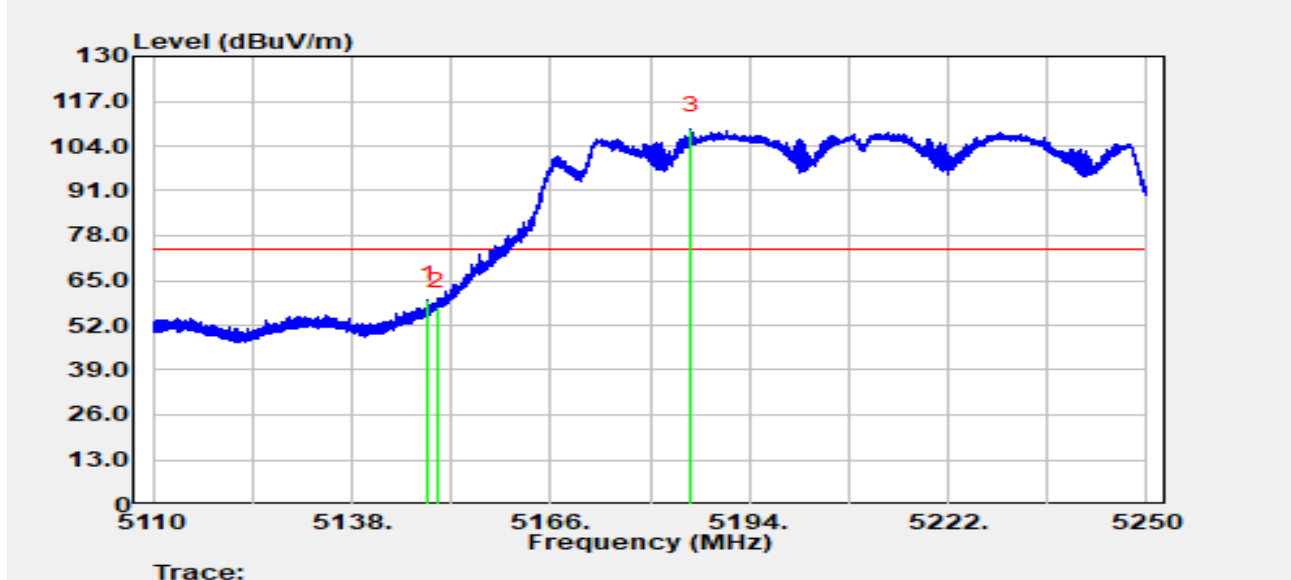


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.654	60.53	-1.06	59.47	-14.53	74.00	Peak
2		5150.000	58.13	-0.54	57.59	-16.41	74.00	Peak
3		5185.824	70.88	37.82	108.70	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

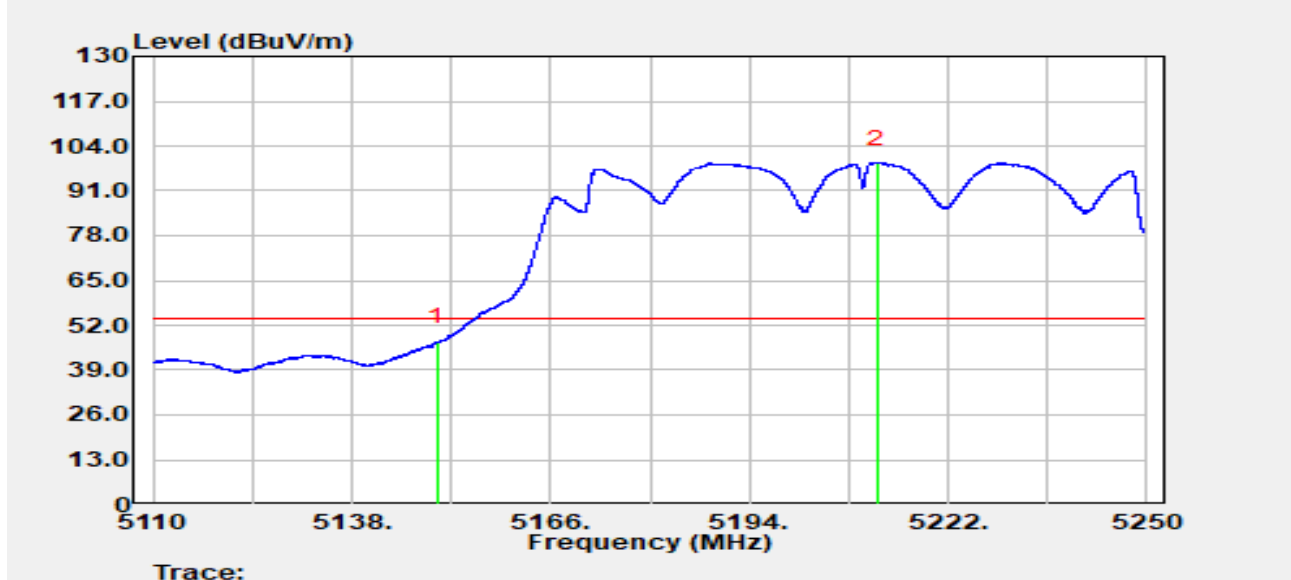


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	47.65	-0.54	47.10	-6.90	54.00	Average
2		5211.976	61.44	37.65	99.09	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

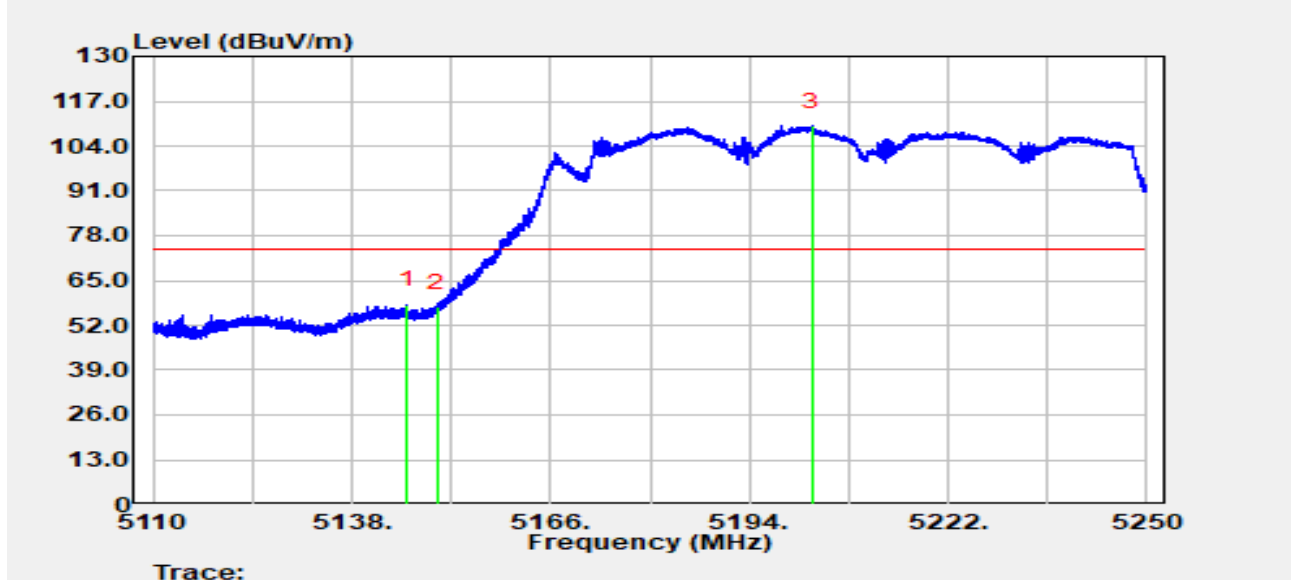


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.826	59.62	-1.71	57.91	-16.09	74.00	Peak
2		5150.000	57.71	-0.54	57.17	-16.83	74.00	Peak
3		5202.806	65.82	44.03	109.85	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

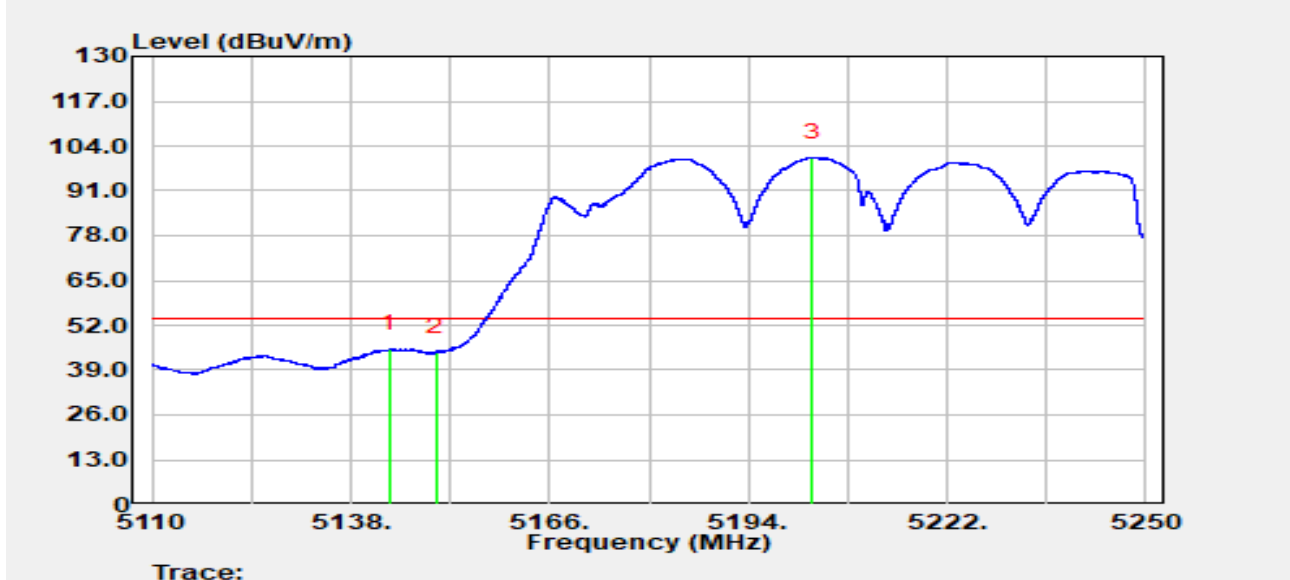


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.446	46.71	-1.56	45.15	-8.85	54.00	Average
2		5150.000	44.87	-0.54	44.32	-9.68	54.00	Average
3		5202.932	56.54	44.18	100.72	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

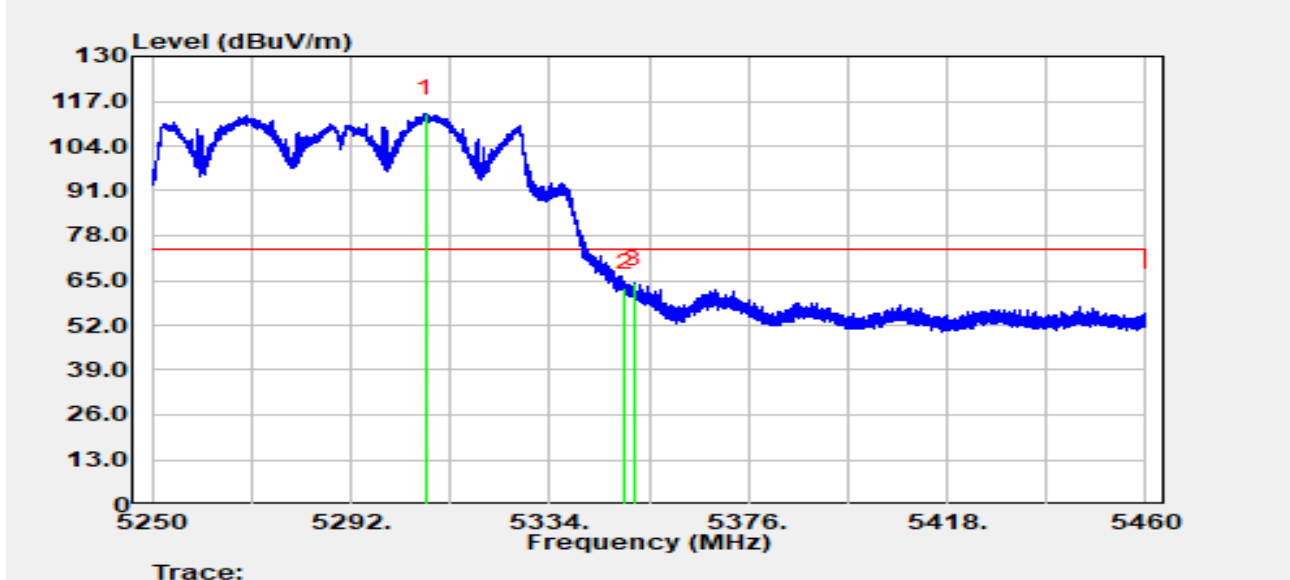


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.729	71.36	42.12	113.48	N/A	N/A	Peak
2		5350.000	60.60	2.28	62.88	-11.12	74.00	Peak
3	*	5351.871	63.05	1.01	64.06	-9.94	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

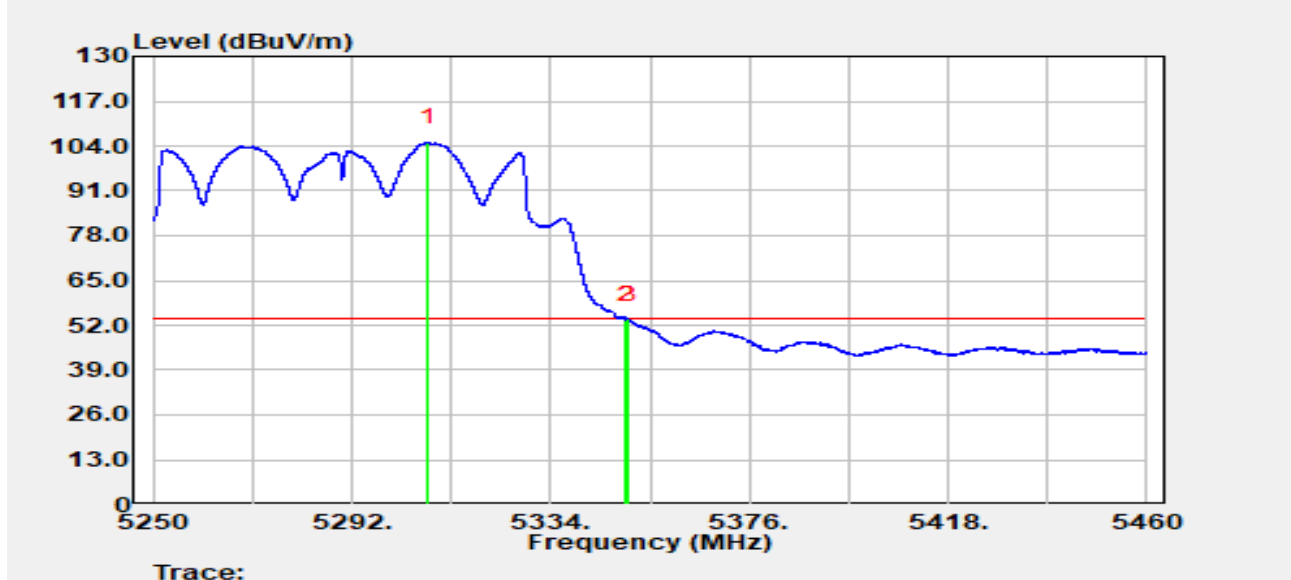


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5308.128	62.80	42.21	105.02	N/A	N/A	Average
2		5350.000	51.39	2.28	53.68	-0.32	54.00	Average
3	*	5350.401	51.82	2.06	53.87	-0.13	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

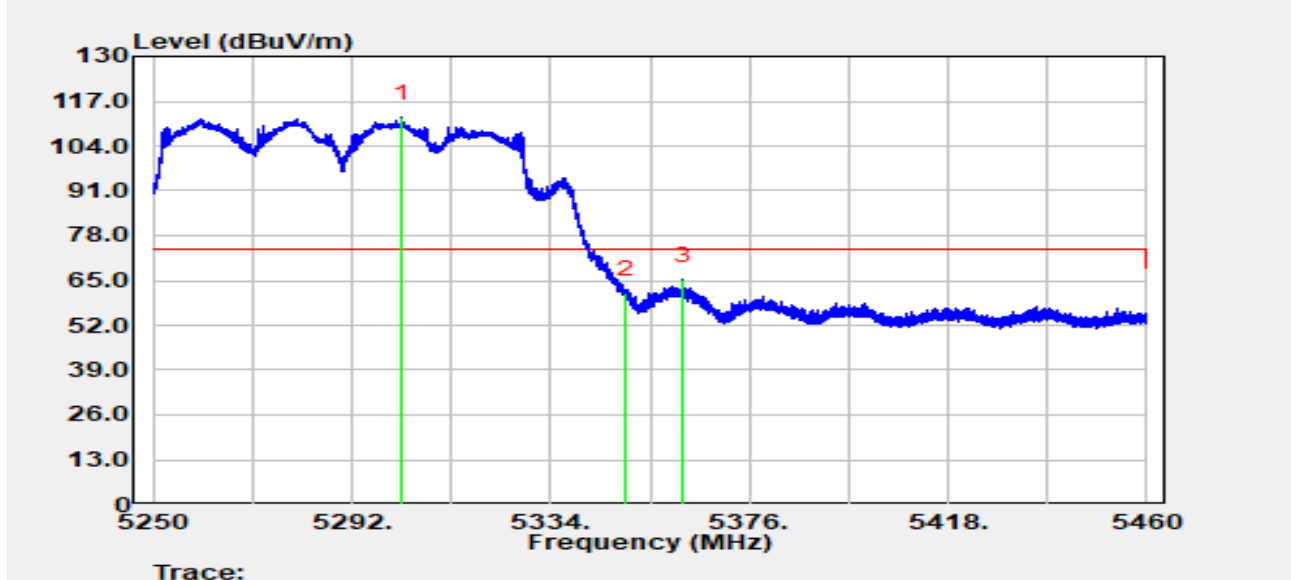


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5302.689	68.56	43.55	112.11	N/A	N/A	Peak
2		5350.000	58.96	2.28	61.24	-12.76	74.00	Peak
3	*	5361.972	66.23	-1.08	65.15	-8.85	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

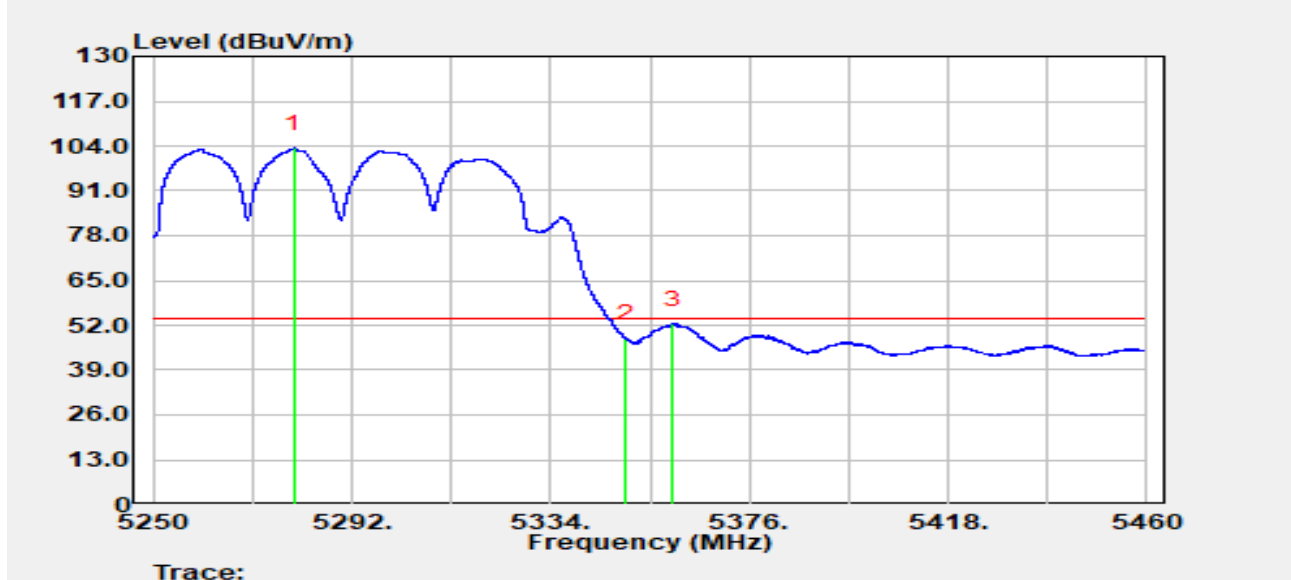


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5279.862	55.78	47.51	103.29	N/A	N/A	Average
2		5350.000	45.91	2.28	48.19	-5.81	54.00	Average
3	*	5359.746	53.23	-0.80	52.43	-1.57	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

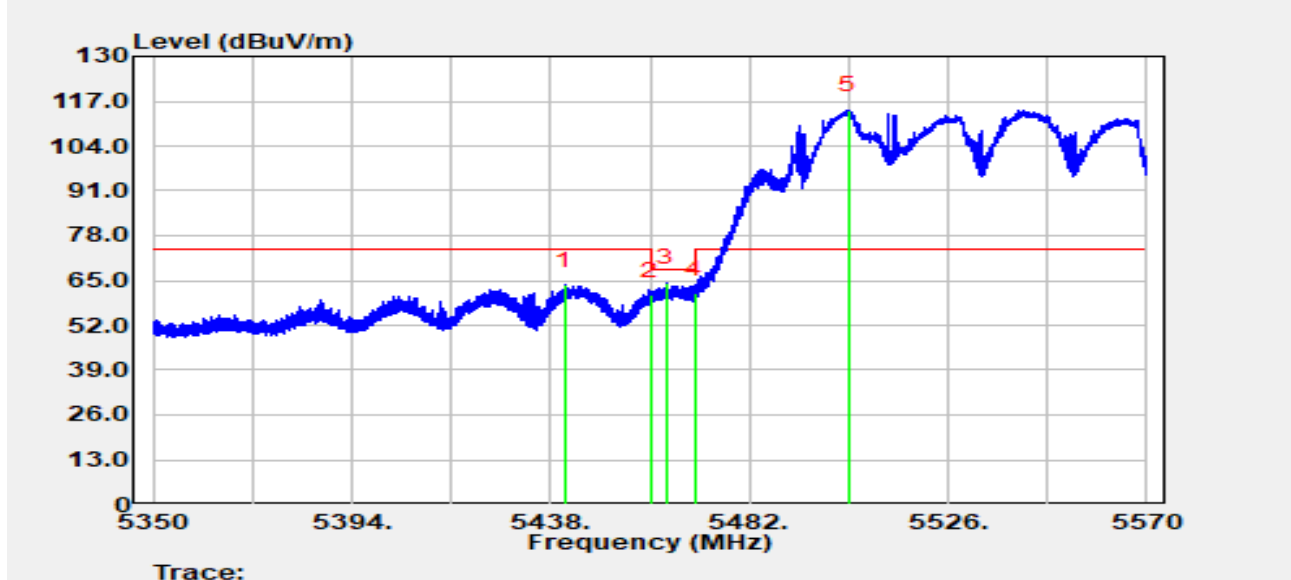


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5441.036	65.39	-1.72	63.67	-10.33	74.00	Peak
2		5460.000	61.37	-0.69	60.68	-7.52	68.20	Peak
3	*	5463.740	64.84	-0.42	64.42	-3.78	68.20	Peak
4		5470.000	60.16	1.00	61.16	-7.04	68.20	Peak
5		5504.000	68.34	46.19	114.53	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

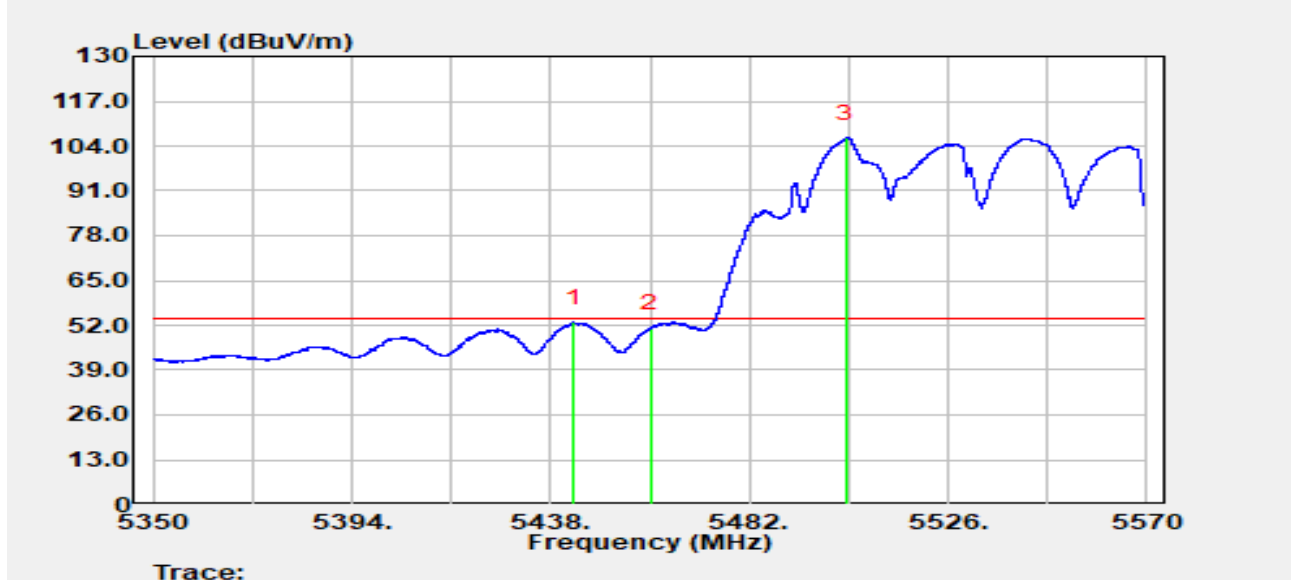


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5443.236	54.45	-1.63	52.83	-1.17	54.00	Average
2		5460.000	51.74	-0.69	51.05	-2.95	54.00	Average
3		5503.406	60.87	45.41	106.28	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

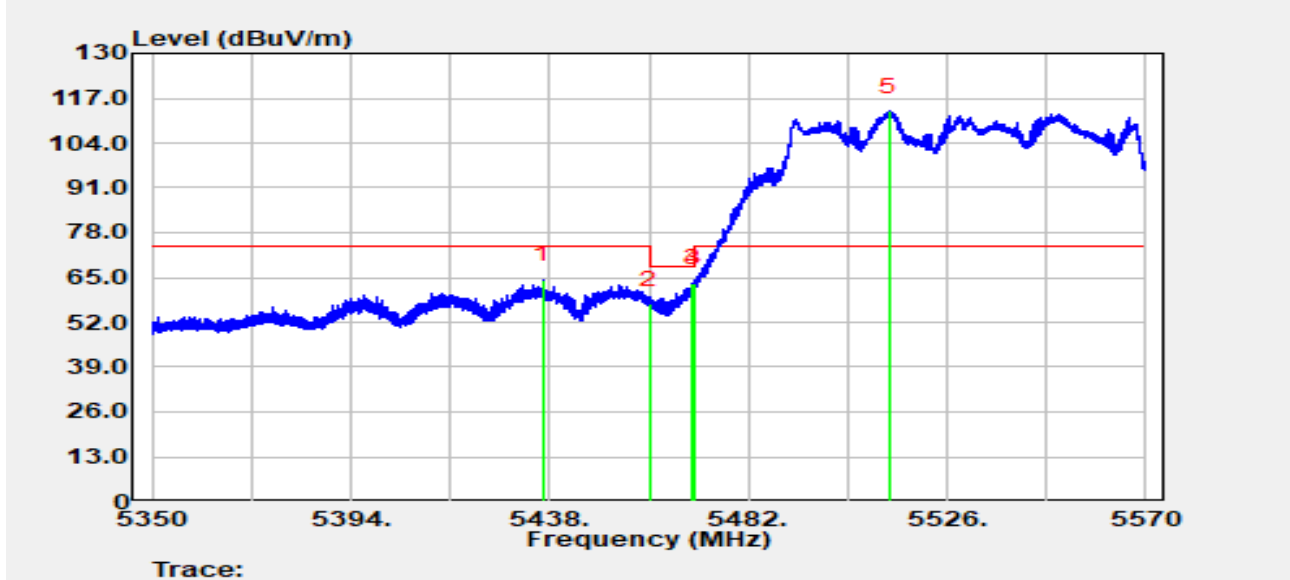


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5436.460	66.25	-1.87	64.38	-9.62	74.00	Peak
2		5460.000	58.06	-0.69	57.37	-10.83	68.20	Peak
3	*	5469.636	62.49	0.88	63.36	-4.84	68.20	Peak
4		5470.000	62.30	1.00	63.30	-4.90	68.20	Peak
5		5513.218	68.86	44.33	113.19	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

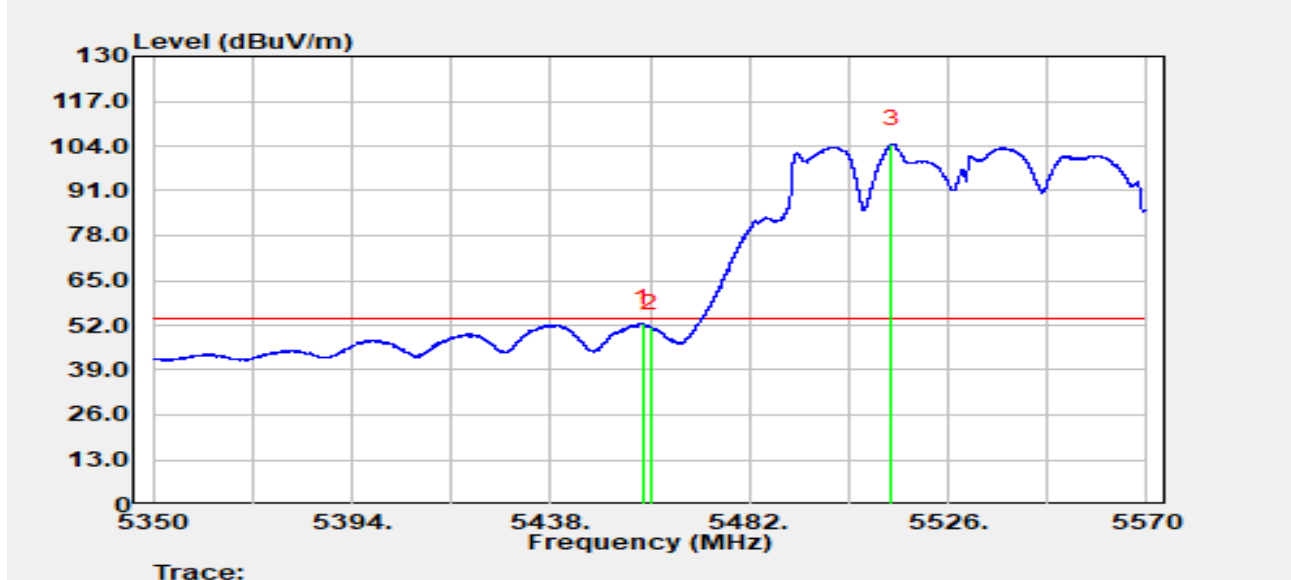


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5458.284	53.45	-0.80	52.65	-1.35	54.00	Average
2		5460.000	52.19	-0.69	51.50	-2.50	54.00	Average
3		5513.592	59.89	44.75	104.64	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

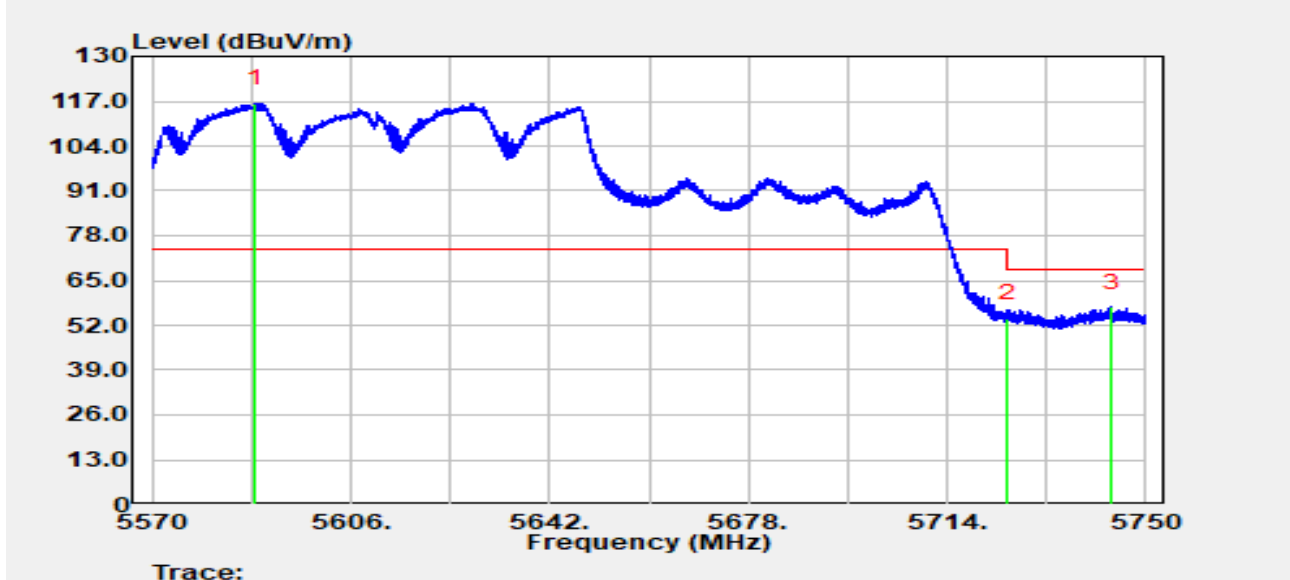


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5588.756	70.54	45.90	116.44	N/A	N/A	Peak
2		5725.000	53.19	1.01	54.20	-14.00	68.20	Peak
3	*	5743.808	59.07	-1.91	57.16	-11.04	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

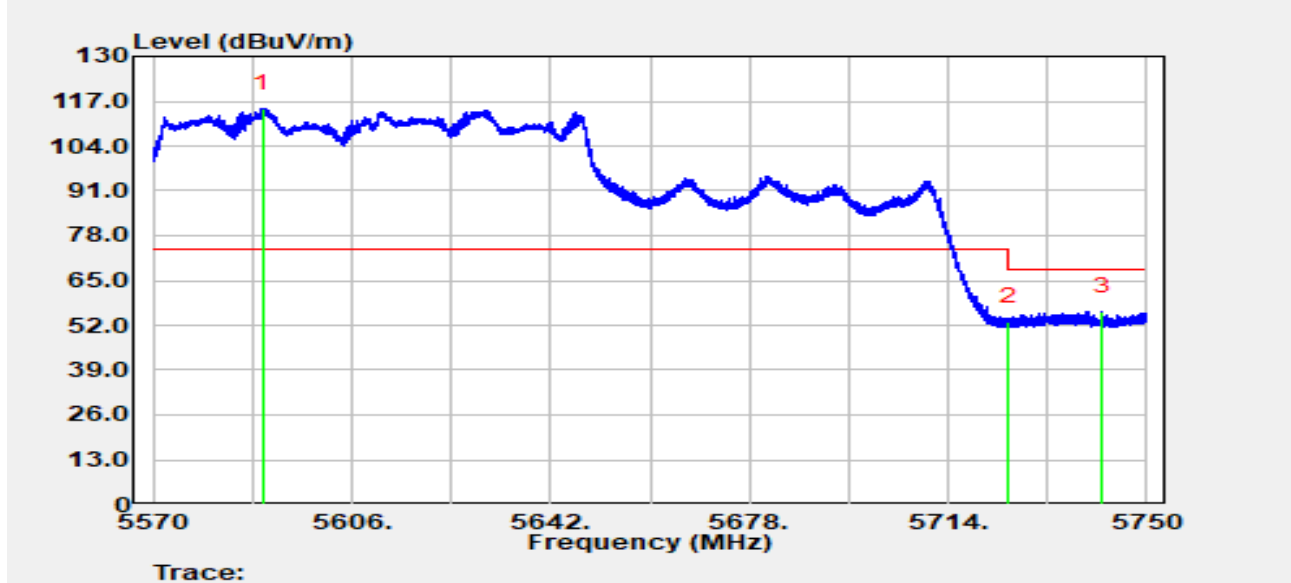


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5589.764	67.56	47.36	114.92	N/A	N/A	Peak
2		5725.000	52.09	1.01	53.09	-15.11	68.20	Peak
3	*	5741.882	57.92	-1.79	56.13	-12.07	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

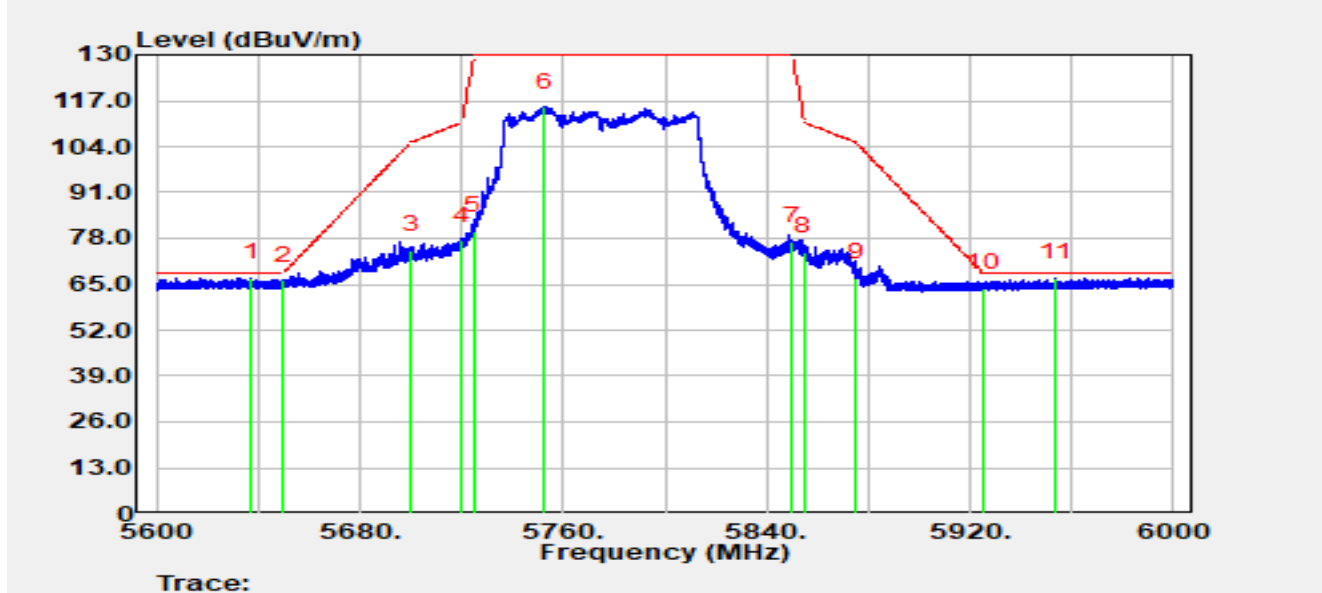


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5637.560	70.51	-3.59	66.93	-1.27	68.20	Peak
2		5650.000	69.64	-3.65	65.99	-2.21	68.20	Peak
3		5700.000	78.07	-3.47	74.60	-30.60	105.20	Peak
4		5720.000	80.80	-3.45	77.35	-33.45	110.80	Peak
5		5725.000	83.66	-3.47	80.19	-49.81	130.00	Peak
6		5752.840	118.85	-3.65	115.19	N/A	N/A	Peak
7		5850.000	80.87	-3.75	77.12	-52.88	130.00	Peak
8		5855.000	78.04	-3.75	74.29	-36.51	110.80	Peak
9		5875.000	70.76	-3.82	66.93	-38.27	105.20	Peak
10		5925.000	67.60	-3.71	63.89	-4.31	68.20	Peak
11		5953.600	70.52	-3.67	66.85	-1.35	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

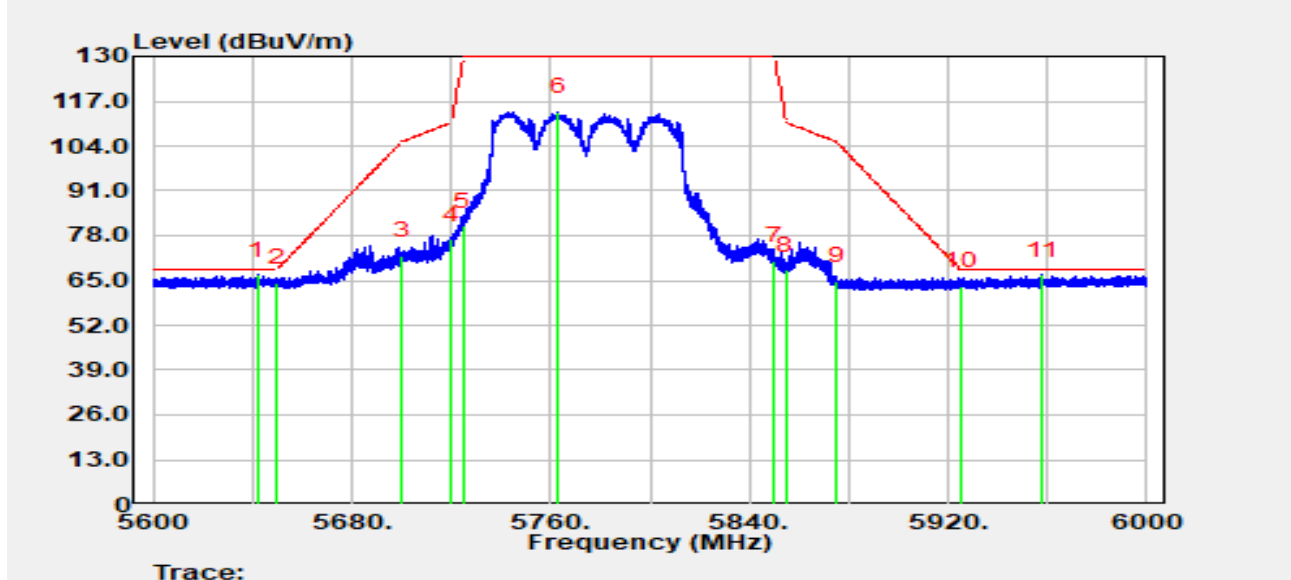


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.120	70.33	-3.65	66.68	-1.52	68.20	Peak
2		5650.000	68.10	-3.65	64.46	-3.74	68.20	Peak
3		5700.000	75.59	-3.47	72.12	-33.08	105.20	Peak
4		5720.000	80.34	-3.45	76.89	-33.91	110.80	Peak
5		5725.000	84.27	-3.47	80.80	-49.20	130.00	Peak
6		5762.960	117.70	-3.66	114.05	N/A	N/A	Peak
7		5850.000	74.55	-3.75	70.80	-59.20	130.00	Peak
8		5855.000	71.90	-3.75	68.15	-42.65	110.80	Peak
9		5875.000	68.70	-3.82	64.88	-40.32	105.20	Peak
10		5925.000	67.10	-3.71	63.39	-4.81	68.20	Peak
11		5958.000	70.26	-3.66	66.61	-1.59	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

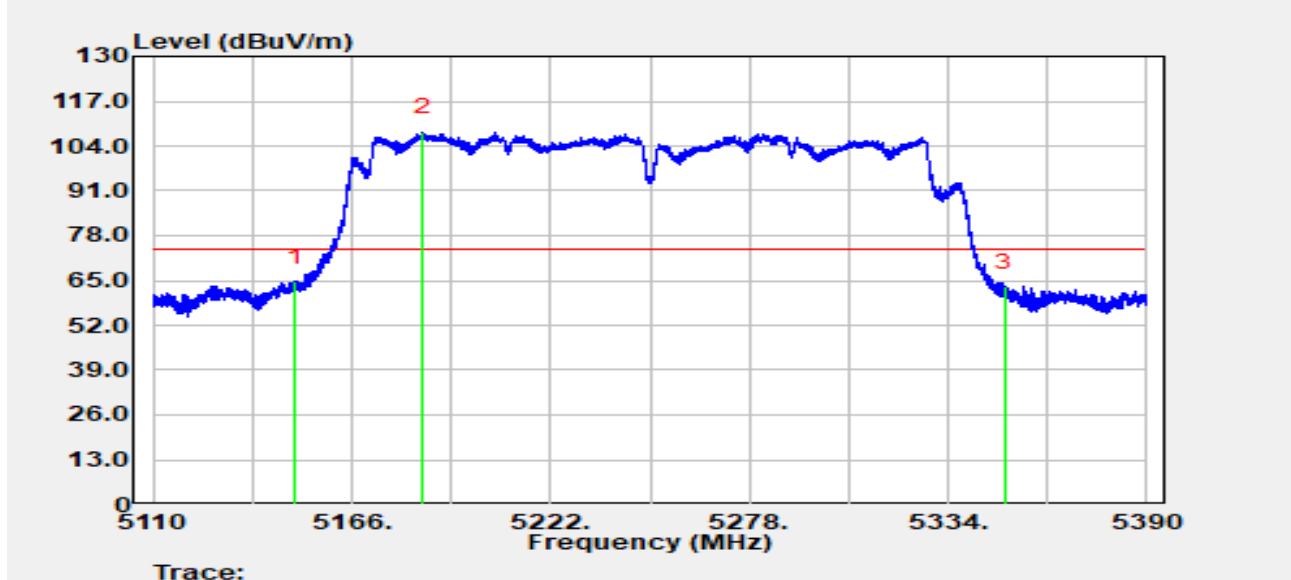


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	65.12	-0.54	64.58	-9.42	74.00	Peak
2		5185.936	70.18	37.77	107.95	N/A	N/A	Peak
3		5350.000	61.00	2.28	63.28	-10.72	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

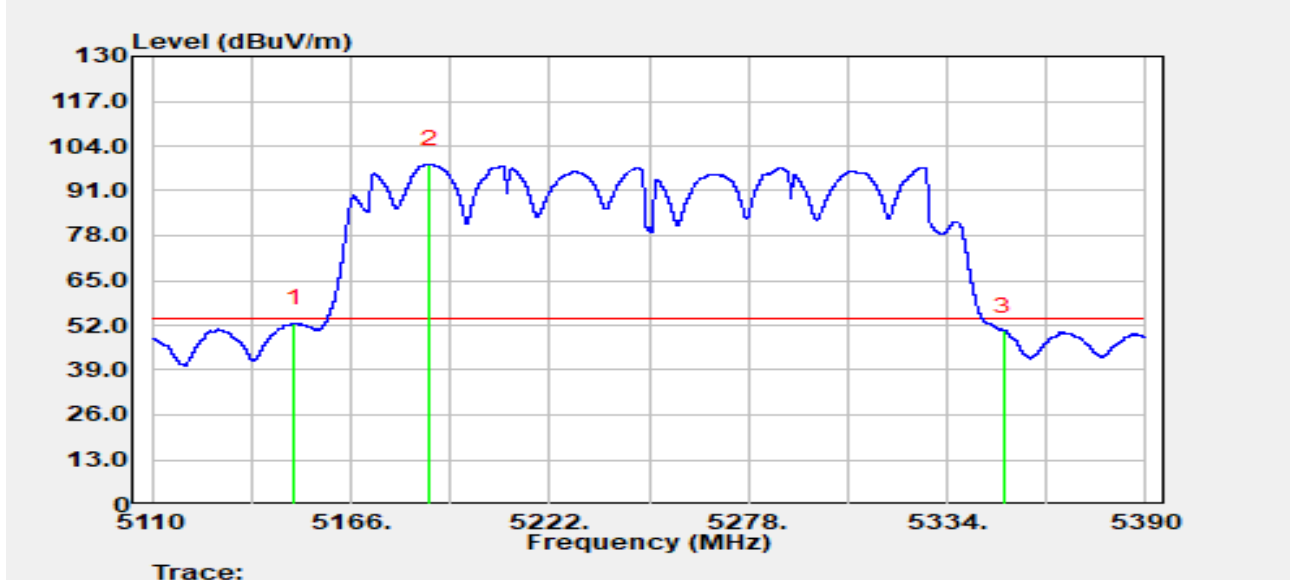


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5150.000	53.23	-0.54	52.69	-1.31	54.00	Average
2		5188.204	59.68	39.12	98.80	N/A	N/A	Average
3		5350.000	48.23	2.28	50.51	-3.49	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

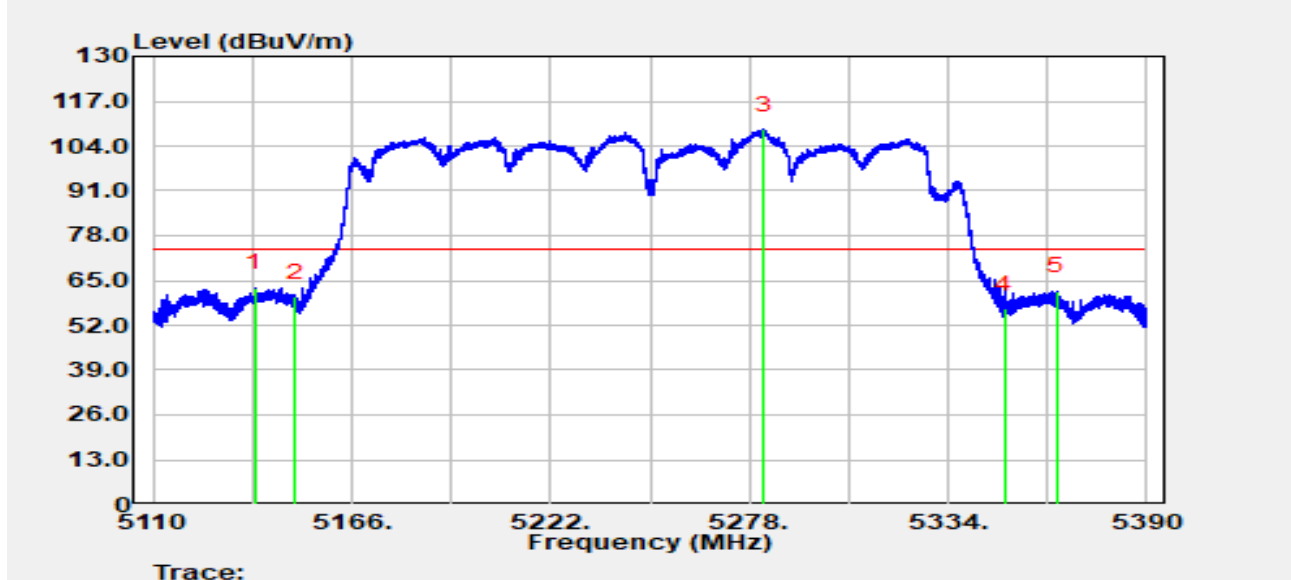


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5138.812	65.39	-2.37	63.02	-10.98	74.00	Peak
2		5150.000	60.64	-0.54	60.10	-13.90	74.00	Peak
3		5281.948	58.23	50.67	108.90	N/A	N/A	Peak
4		5350.000	54.57	2.28	56.85	-17.15	74.00	Peak
5		5364.548	63.30	-1.31	61.98	-12.02	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

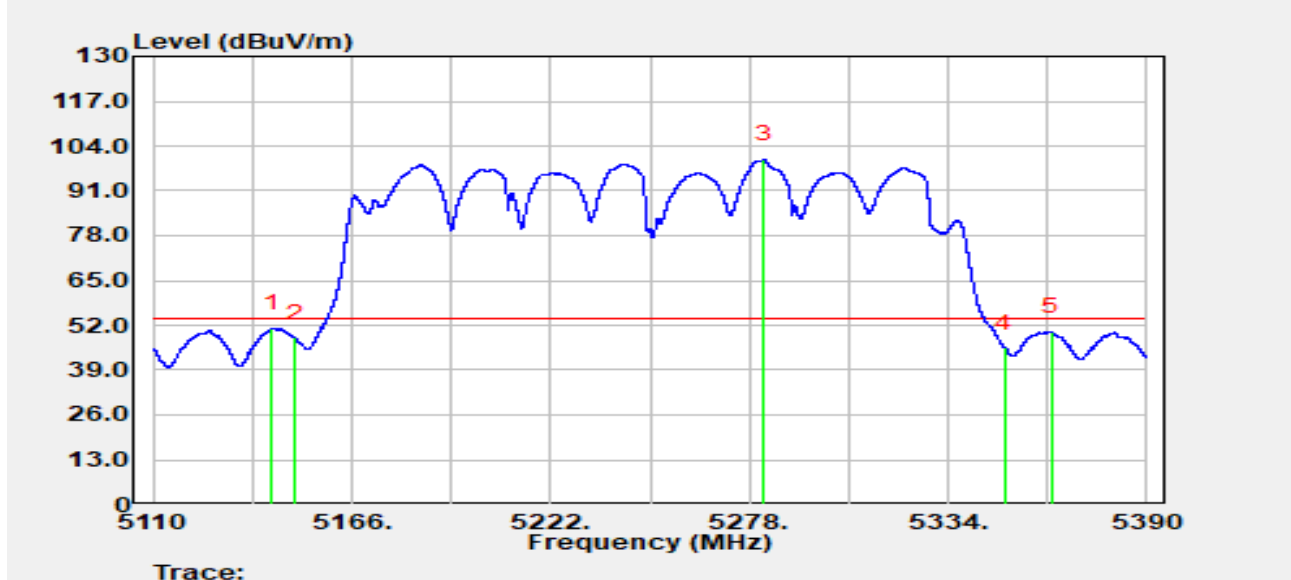


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.516	52.77	-1.53	51.24	-2.76	54.00	Average
2		5150.000	48.99	-0.54	48.45	-5.55	54.00	Average
3		5282.060	49.24	50.87	100.11	N/A	N/A	Average
4		5350.000	43.24	2.28	45.52	-8.48	54.00	Average
5		5363.008	51.37	-1.13	50.24	-3.76	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

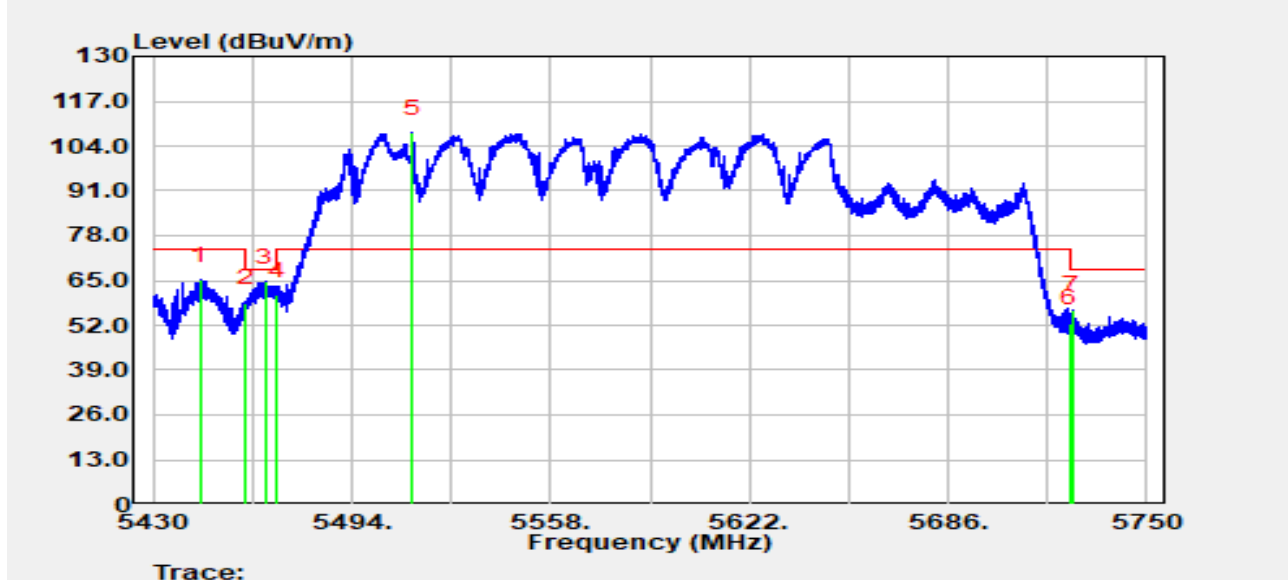


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5445.264	66.56	-1.54	65.02	-8.98	74.00	Peak
2		5460.000	59.18	-0.69	58.49	-9.71	68.20	Peak
3	*	5466.352	64.64	-0.02	64.62	-3.58	68.20	Peak
4		5470.000	59.71	1.00	60.71	-7.49	68.20	Peak
5		5513.360	63.28	44.49	107.77	N/A	N/A	Peak
6		5725.000	51.63	1.01	52.64	-15.56	68.20	Peak
7		5726.000	56.20	0.44	56.64	-11.56	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

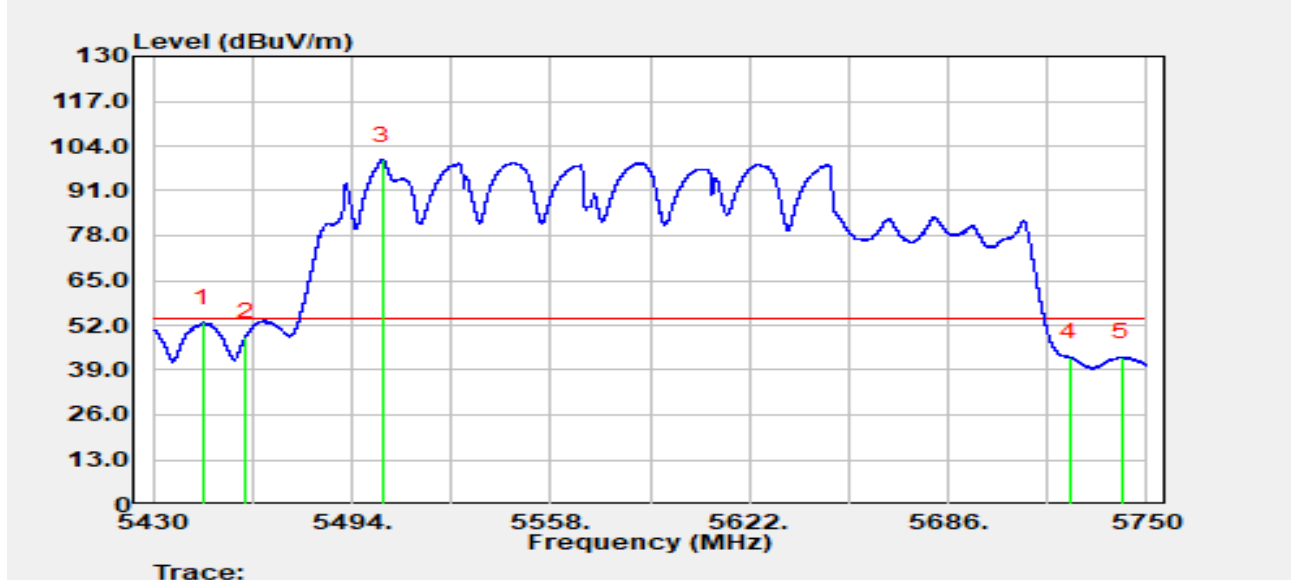

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5446.224	54.40	-1.51	52.89	-1.11	54.00	Average
2		5460.000	49.44	-0.69	48.75	-5.25	54.00	Average
3		5503.760	53.99	45.91	99.90	N/A	N/A	Average
4		5725.000	41.76	1.01	42.76	-11.24	54.00	Average
5		5741.968	44.61	-1.80	42.81	-11.19	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).