

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

report number :SHE19110012-03JE


Note : Transmit frequency is ignore ,mark →

30M-1G

BLE-Horizontal-TX

Test result

Project Number: Certification			
Test Time: 2019-11-13_13.30.33			
EUT Name:	N.A	Test Engineer:	XCJ
Manufacture:	N.A	Test Standard:	FCC
Model Name:	N.A	Work Additon:	Normal
Templ.(oC):	21.3	Load:	Full load
Hum:	55%	Remark:	DR-RE01-E19100012-03#01

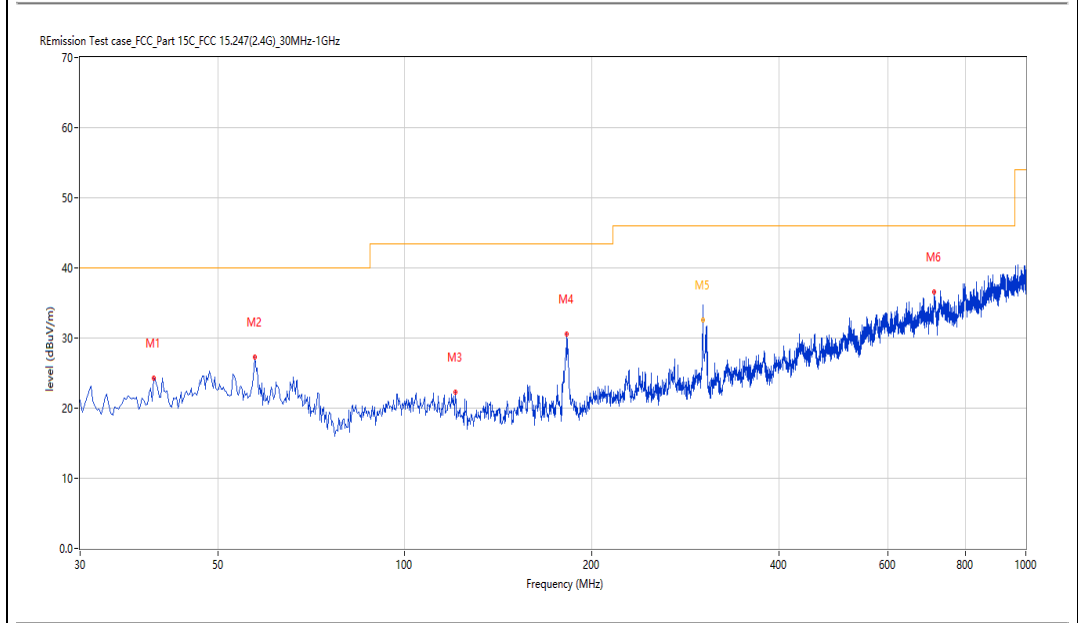

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.455	24.35	-26.51	40.0	-15.65	Peak	144.50	100	Horizontal	Pass
2	57.396	27.22	-25.60	40.0	-12.78	Peak	206.30	100	Horizontal	Pass
3	120.672	22.22	-27.33	43.5	-21.28	Peak	171.30	100	Horizontal	Pass
4	182.494	30.58	-27.86	43.5	-12.92	Peak	114.00	100	Horizontal	Pass
5	302.259	34.77	-24.68	46.0	-11.23	Peak	162.00	100	Horizontal	Pass
5*	302.259	32.57	-24.68	46.0	-13.43	QP	162.00	100	Horizontal	Pass
6	712.224	36.51	-14.40	46.0	-9.49	Peak	27.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-13_13.17.59

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A

Work Additon: Normal


Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

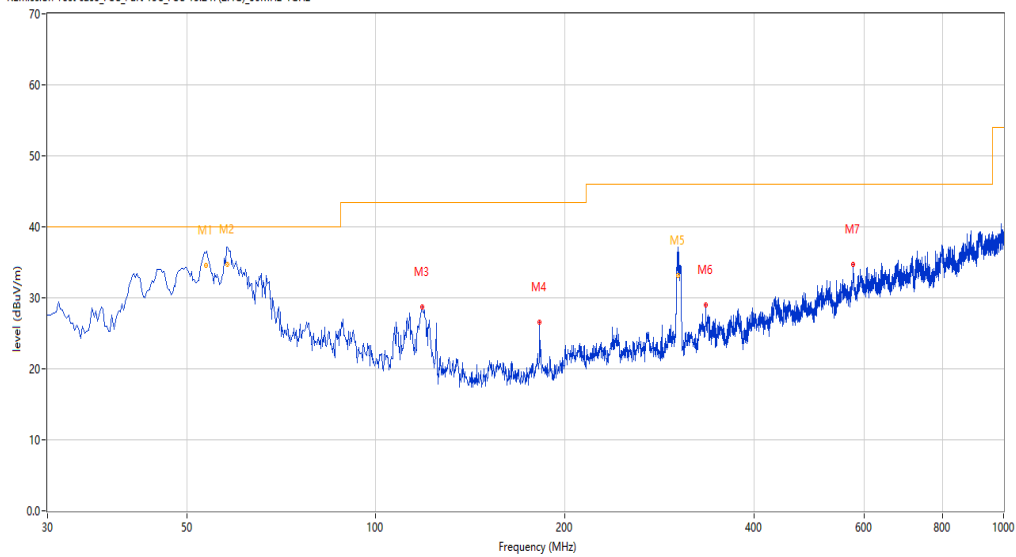

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	53.668	37.38	-25.32	40.0	-2.62	Peak	179.80	100	Vertical	Pass
1*	53.668	34.64	-25.32	40.0	-5.36	QP	179.80	100	Vertical	Pass
2	58.068	37.58	-25.64	40.0	-2.42	Peak	179.80	100	Vertical	Pass
2*	58.068	34.69	-25.64	40.0	-5.31	QP	179.80	100	Vertical	Pass
3	118.490	28.78	-27.14	43.5	-14.72	Peak	114.30	100	Vertical	Pass
4	182.494	26.58	-27.86	43.5	-16.92	Peak	201.70	100	Vertical	Pass
5	303.367	36.64	-24.94	46.0	-9.36	Peak	281.00	100	Vertical	Pass
5*	303.367	33.08	-24.94	46.0	-12.92	QP	281.00	100	Vertical	Pass
6	335.231	29.03	-23.21	46.0	-16.97	Peak	245.60	100	Vertical	Pass
7	575.974	34.69	-15.83	46.0	-11.31	Peak	232.20	100	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2019-11-15_10.19.07

EUT Name: N.A

Manufacture: N.A

Model Name: N.A

Templ.(oC): 21.3

Hum: 55%

Test Engineer: XCJ


Test Standard: FCC

Work Additon: Normal

Load: Full load

Remark: DR-RE01-E19100012-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_10Hz-7GHz

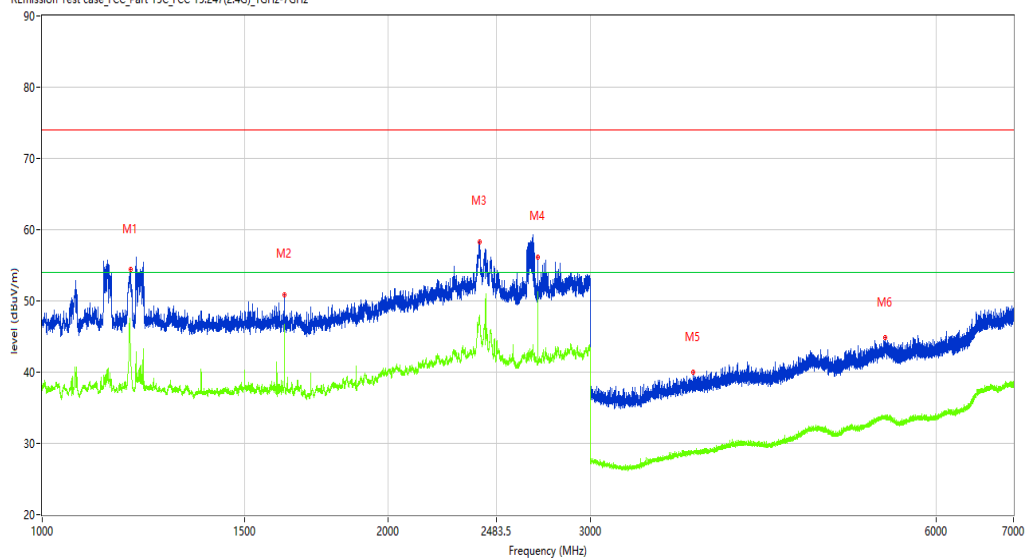

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1192.976	54.43	-4.30	74.0	-19.57	Peak	82.30	100	Horizontal	Pass
1**	1192.976	43.55	-4.30	54.0	-10.45	AV	82.30	100	Horizontal	Pass
2	1624.922	50.60	-5.47	74.0	-23.40	Peak	63.30	100	Horizontal	Pass
2**	1624.922	46.50	-5.47	54.0	-7.50	AV	63.30	100	Horizontal	Pass
3	2400.825	58.29	5.34	74.0	-15.71	Peak	1.00	100	Horizontal	Pass
3**	2400.825	47.83	5.34	54.0	-6.17	AV	1.00	100	Horizontal	Pass
4	2700.037	56.10	-0.11	74.0	-17.90	Peak	68.10	100	Horizontal	Pass
4**	2700.037	50.81	-0.11	54.0	-3.19	AV	68.10	100	Horizontal	Pass
5	3682.915	40.00	-0.77	74.0	-34.00	Peak	360.00	100	Horizontal	Pass
5**	3682.915	28.59	-0.77	54.0	-25.41	AV	360.00	100	Horizontal	Pass
6	5416.698	44.86	1.51	74.0	-29.14	Peak	127.50	100	Horizontal	Pass
6**	5416.698	34.05	1.51	54.0	-19.95	AV	127.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-15_10.59.52

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A

Work Additon: Normal


Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

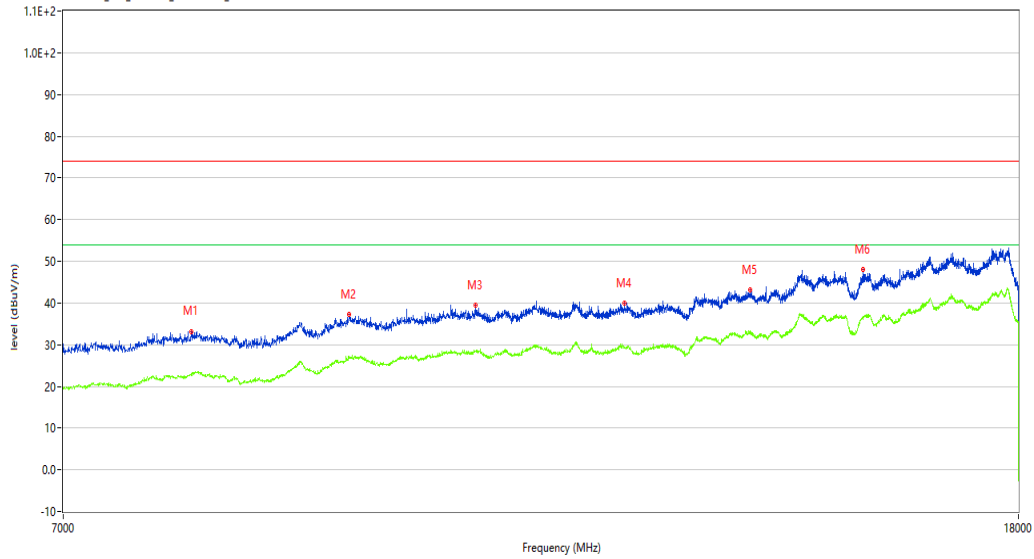

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7943.014	33.15	-28.28	74.0	-40.85	Peak	172.00	100	Horizontal	Pass
1**	7943.014	22.69	-28.28	54.0	-31.31	AV	172.00	100	Horizontal	Pass
2	9287.428	37.20	-24.02	74.0	-36.80	Peak	226.70	100	Horizontal	Pass
2**	9287.428	26.79	-24.02	54.0	-27.21	AV	226.70	100	Horizontal	Pass
3	10524.619	39.44	-23.08	74.0	-34.56	Peak	208.50	100	Horizontal	Pass
3**	10524.619	28.49	-23.08	54.0	-25.51	AV	208.50	100	Horizontal	Pass
4	12196.201	39.98	-22.17	74.0	-34.02	Peak	258.30	100	Horizontal	Pass
4**	12196.201	29.24	-22.17	54.0	-24.76	AV	258.30	100	Horizontal	Pass
5	13804.549	43.06	-19.61	74.0	-30.94	Peak	99.00	100	Horizontal	Pass
5**	13804.549	32.68	-19.61	54.0	-21.32	AV	99.00	100	Horizontal	Pass
6	15443.139	47.92	-17.64	74.0	-26.08	Peak	172.00	100	Horizontal	Pass
6**	15443.139	36.89	-17.64	54.0	-17.11	AV	172.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-15_10.21.06

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A

Work Additon: Normal


Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

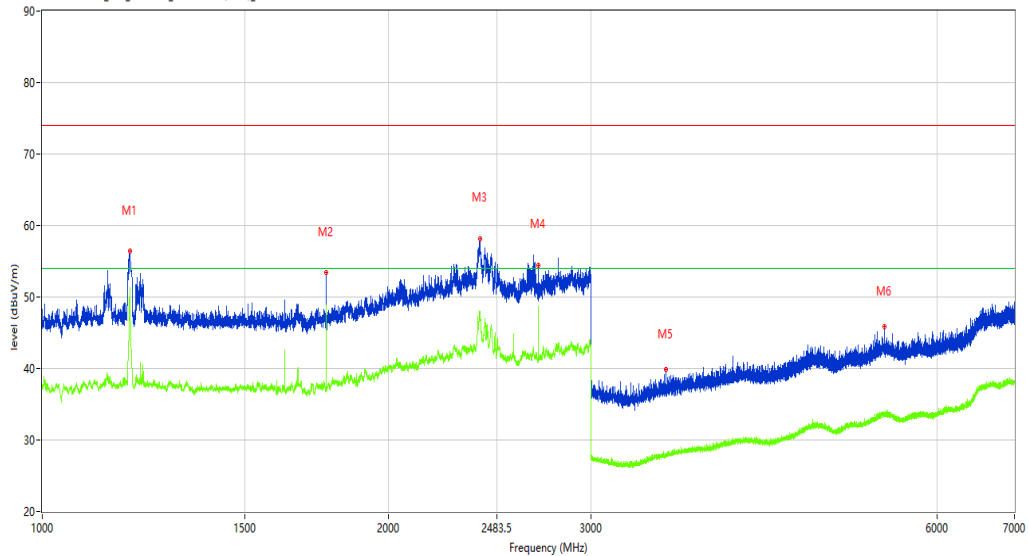

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1191.226	56.41	-4.09	74.0	-17.59	Peak	115.40	100	Vertical	Pass
1**	1191.226	50.56	-4.09	54.0	-3.44	AV	115.40	100	Vertical	Pass
2	1765.404	53.47	-5.04	74.0	-20.53	Peak	12.00	100	Vertical	Pass
2**	1765.404	48.86	-5.04	54.0	-5.14	AV	12.00	100	Vertical	Pass
3	2402.075	58.19	5.29	74.0	-15.81	Peak	1.00	100	Vertical	Pass
3**	2402.075	47.97	5.29	54.0	-6.03	AV	1.00	100	Vertical	Pass
4	2699.538	54.46	-0.09	74.0	-19.54	Peak	1.00	100	Vertical	Pass
4**	2699.538	48.13	-0.09	54.0	-5.87	AV	1.00	100	Vertical	Pass
5	3484.939	39.82	-1.27	74.0	-34.18	Peak	273.00	100	Vertical	Pass
5**	3484.939	27.86	-1.27	54.0	-26.14	AV	273.00	100	Vertical	Pass
6	5398.700	45.84	1.46	74.0	-28.16	Peak	300.90	100	Vertical	Pass
6**	5398.700	33.64	1.46	54.0	-20.36	AV	300.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-18_16.34.11

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

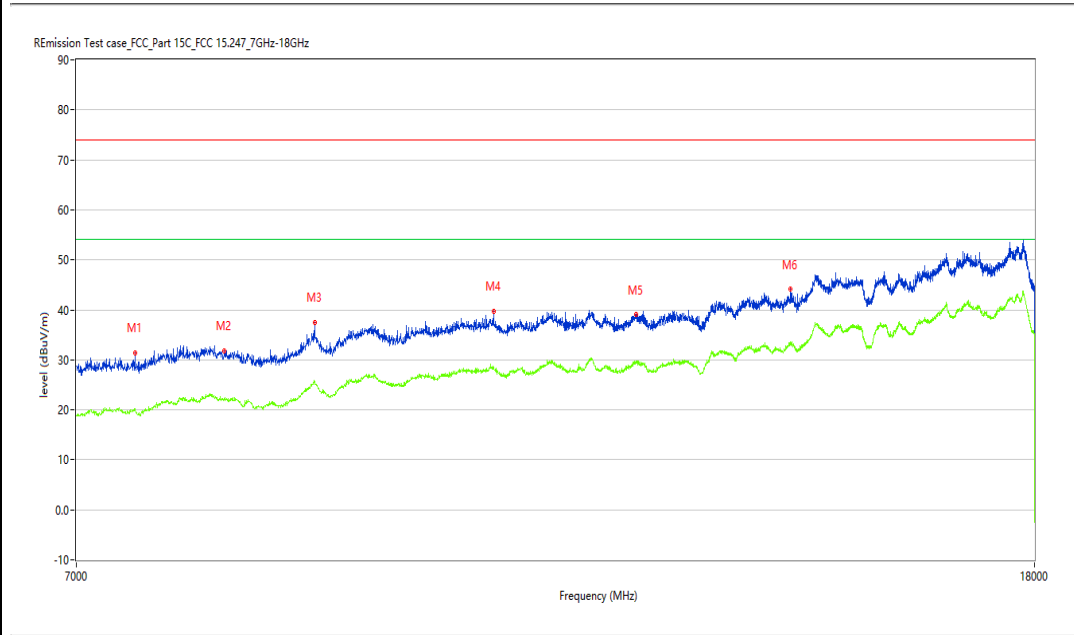

No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7415.146	31.45	-30.21	74.0	-42.55	Peak	175.90	100	Vertical	Pass
1**	7415.146	20.26	-30.21	54.0	-33.74	AV	175.90	100	Vertical	Pass
2	8099.725	31.76	-27.43	74.0	-42.24	Peak	180.40	100	Vertical	Pass
2**	8099.725	22.08	-27.43	54.0	-31.92	AV	180.40	100	Vertical	Pass
3	8853.037	37.45	-25.50	74.0	-36.55	Peak	308.80	100	Vertical	Pass
3**	8853.037	25.64	-25.50	54.0	-28.36	AV	308.80	100	Vertical	Pass
4	10563.109	39.63	-23.04	74.0	-34.37	Peak	3.50	100	Vertical	Pass
4**	10563.109	28.39	-23.04	54.0	-25.61	AV	3.50	100	Vertical	Pass
5	12152.212	39.00	-22.00	74.0	-35.00	Peak	74.40	100	Vertical	Pass
5**	12152.212	29.42	-22.00	54.0	-24.58	AV	74.40	100	Vertical	Pass
6	14150.962	44.09	-18.30	74.0	-29.91	Peak	180.40	100	Vertical	Pass
6**	14150.962	33.54	-18.30	54.0	-20.46	AV	180.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-15_10.16.28

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A

Work Additon: Normal


Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

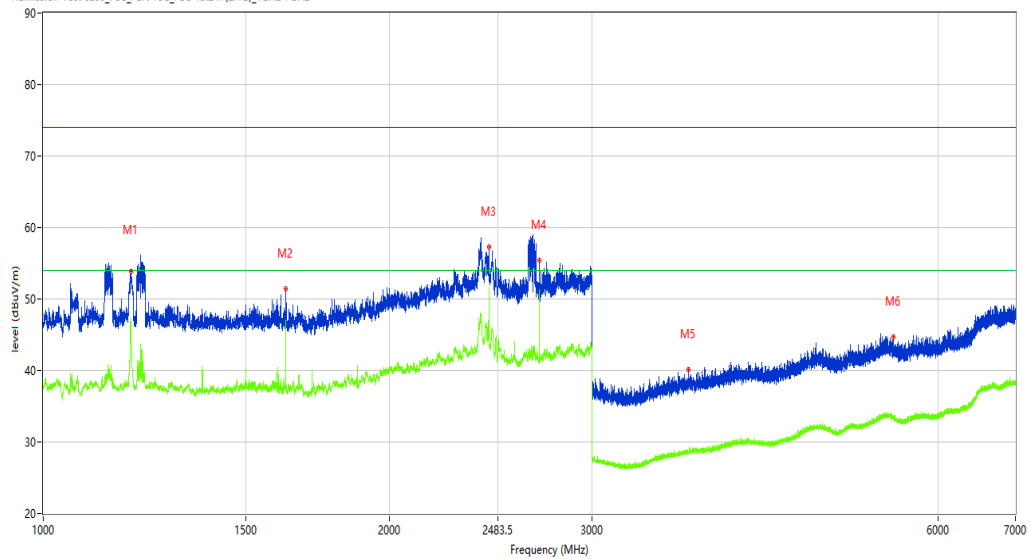

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1191.726	53.81	-4.15	74.0	-20.19	Peak	82.70	100	Horizontal	Pass
1**	1191.726	47.17	-4.15	54.0	-6.83	AV	82.70	100	Horizontal	Pass
2	1624.922	51.37	-5.47	74.0	-22.63	Peak	332.40	100	Horizontal	Pass
2**	1624.922	46.95	-5.47	54.0	-7.05	AV	332.40	100	Horizontal	Pass
3	2439.820	57.30	3.82	74.0	-16.70	Peak	196.20	100	Horizontal	Pass
3**	2439.820	51.57	3.82	54.0	-2.43	AV	196.20	100	Horizontal	Pass
4	2700.287	55.38	-0.11	74.0	-18.62	Peak	59.20	100	Horizontal	Pass
4**	2700.287	49.11	-0.11	54.0	-4.89	AV	59.20	100	Horizontal	Pass
5	3636.420	40.11	-0.87	74.0	-33.89	Peak	273.10	100	Horizontal	Pass
5**	3636.420	28.22	-0.87	54.0	-25.78	AV	273.10	100	Horizontal	Pass
6	5484.189	44.77	1.71	74.0	-29.23	Peak	86.70	100	Horizontal	Pass
6**	5484.189	33.47	1.71	54.0	-20.53	AV	86.70	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-15_11.00.32

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

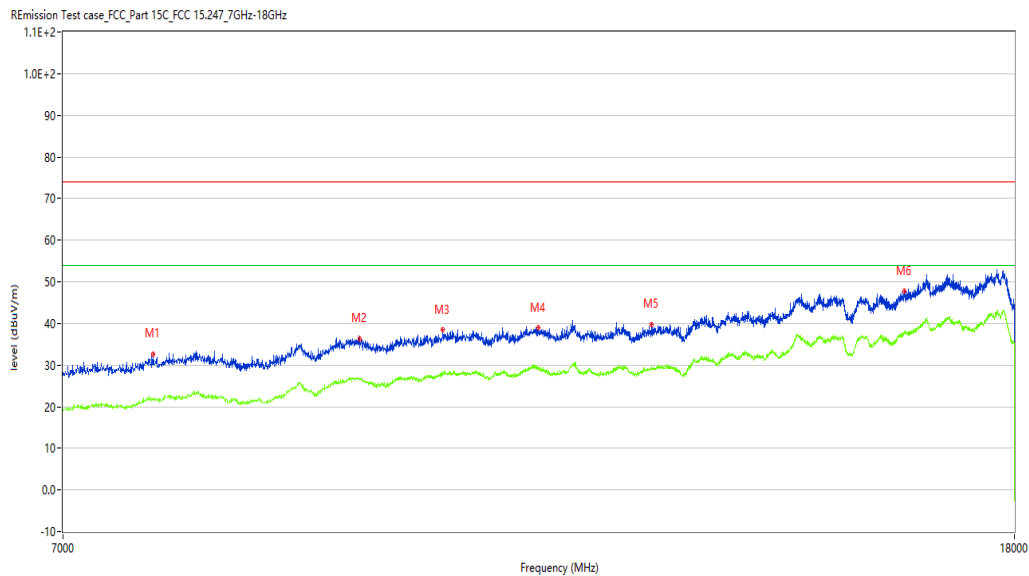

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7657.086	32.73	-28.32	74.0	-41.27	Peak	316.00	100	Horizontal	Pass
1**	7657.086	21.64	-28.32	54.0	-32.36	AV	316.00	100	Horizontal	Pass
2	9394.651	36.38	-23.06	74.0	-37.62	Peak	356.20	100	Horizontal	Pass
2**	9394.651	26.63	-23.06	54.0	-27.37	AV	356.20	100	Horizontal	Pass
3	10205.699	38.38	-22.47	74.0	-35.62	Peak	330.50	100	Horizontal	Pass
3**	10205.699	27.76	-22.47	54.0	-26.24	AV	330.50	100	Horizontal	Pass
4	11217.446	38.89	-22.32	74.0	-35.11	Peak	298.20	100	Horizontal	Pass
4**	11217.446	29.31	-22.32	54.0	-24.69	AV	298.20	100	Horizontal	Pass
5	12550.862	39.76	-22.20	74.0	-34.24	Peak	343.90	100	Horizontal	Pass
5**	12550.862	29.45	-22.20	54.0	-24.55	AV	343.90	100	Horizontal	Pass
6	16135.966	47.80	-15.60	74.0	-26.20	Peak	339.50	100	Horizontal	Pass
6**	16135.966	37.65	-15.60	54.0	-16.35	AV	339.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-15_10.13.09

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A

Work Additon: Normal


Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

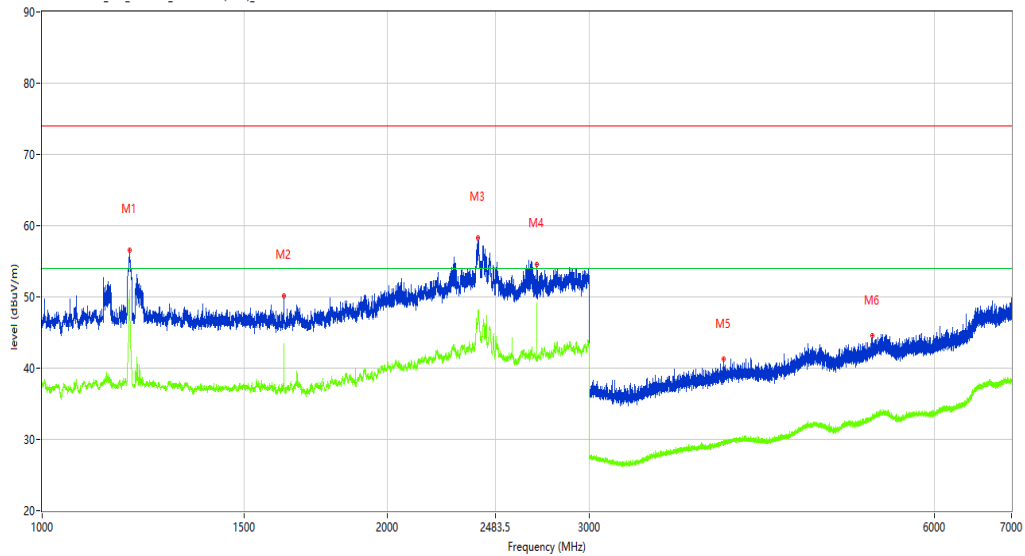

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1191.726	56.51	-4.15	74.0	-17.49	Peak	118.70	100	Vertical	Pass
1**	1191.726	50.58	-4.15	54.0	-3.42	AV	118.70	100	Vertical	Pass
2	1625.172	50.14	-5.48	74.0	-23.86	Peak	71.50	100	Vertical	Pass
2**	1625.172	42.66	-5.48	54.0	-11.34	AV	71.50	100	Vertical	Pass
3	2399.825	58.30	5.38	74.0	-15.70	Peak	282.80	100	Vertical	Pass
3**	2399.825	47.82	5.38	54.0	-6.18	AV	282.80	100	Vertical	Pass
4	2699.788	54.62	-0.10	74.0	-19.38	Peak	0.00	100	Vertical	Pass
4**	2699.788	49.20	-0.10	54.0	-4.80	AV	0.00	100	Vertical	Pass
5	3926.884	41.33	-0.29	74.0	-32.67	Peak	0.50	100	Vertical	Pass
5**	3926.884	29.61	-0.29	54.0	-24.39	AV	0.50	100	Vertical	Pass
6	5290.714	44.55	1.48	74.0	-29.45	Peak	243.30	100	Vertical	Pass
6**	5290.714	33.10	1.48	54.0	-20.90	AV	243.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-18_16.35.05

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

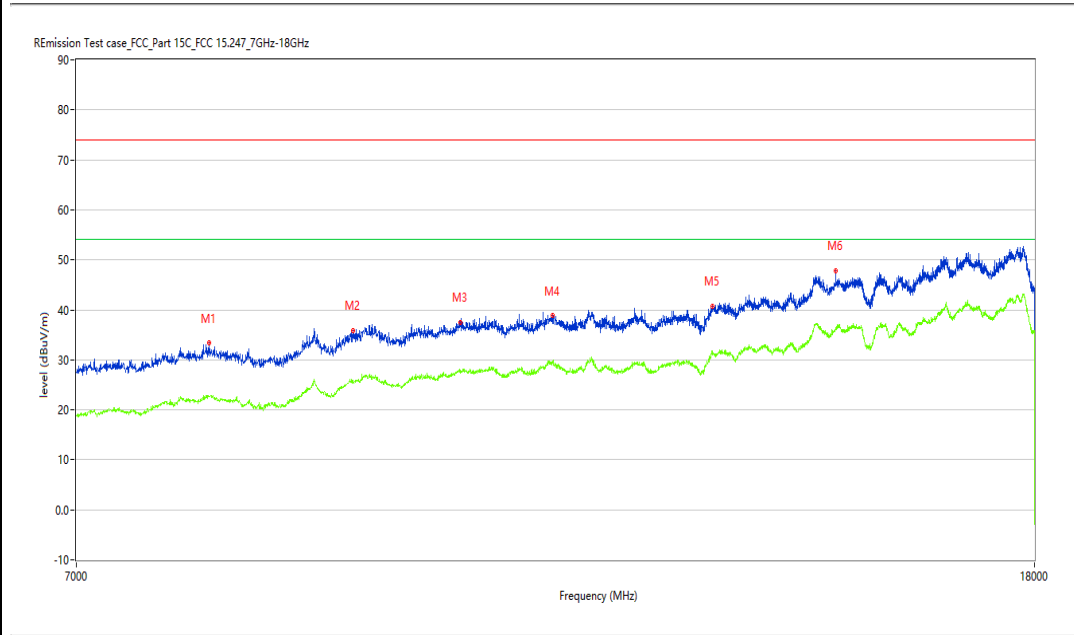

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7978.755	33.31	-27.72	74.0	-40.69	Peak	340.60	100	Vertical	Pass
1**	7978.755	22.61	-27.72	54.0	-31.39	AV	340.60	100	Vertical	Pass
2	9193.952	35.88	-24.60	74.0	-38.12	Peak	358.00	100	Vertical	Pass
2**	9193.952	25.88	-24.60	54.0	-28.12	AV	358.00	100	Vertical	Pass
3	10224.944	37.54	-22.40	74.0	-36.46	Peak	322.30	100	Vertical	Pass
3**	10224.944	27.36	-22.40	54.0	-26.64	AV	322.30	100	Vertical	Pass
4	11189.953	38.83	-22.27	74.0	-35.17	Peak	199.50	100	Vertical	Pass
4**	11189.953	29.48	-22.27	54.0	-24.52	AV	199.50	100	Vertical	Pass
5	13100.725	40.72	-20.34	74.0	-33.28	Peak	360.00	100	Vertical	Pass
5**	13100.725	31.63	-20.34	54.0	-22.37	AV	360.00	100	Vertical	Pass
6	14799.800	47.88	-15.35	74.0	-26.12	Peak	322.30	100	Vertical	Pass
6**	14799.800	36.31	-15.35	54.0	-17.69	AV	322.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-15_10.26.05

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A

Work Additon: Normal


Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

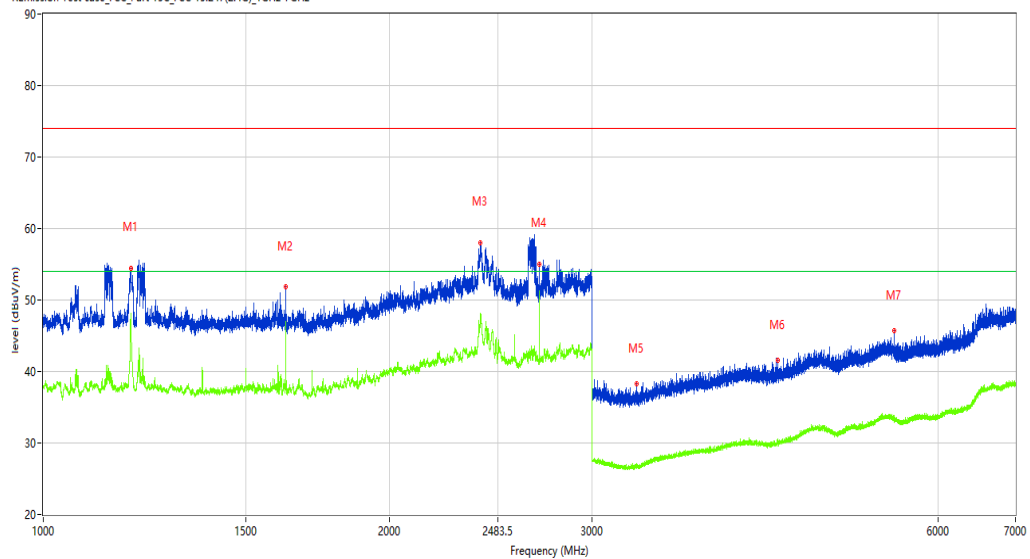

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1191.726	54.48	-4.15	74.0	-19.52	Peak	187.00	100	Horizontal	Pass
1**	1191.726	48.03	-4.15	54.0	-5.97	AV	187.00	100	Horizontal	Pass
2	1624.922	51.83	-5.47	74.0	-22.17	Peak	342.50	100	Horizontal	Pass
2**	1624.922	46.96	-5.47	54.0	-7.04	AV	342.50	100	Horizontal	Pass
3	2399.575	57.97	5.39	74.0	-16.03	Peak	3.80	100	Horizontal	Pass
3**	2399.575	47.80	5.39	54.0	-6.20	AV	3.80	100	Horizontal	Pass
4	2699.788	55.07	-0.10	74.0	-18.93	Peak	77.50	100	Horizontal	Pass
4**	2699.788	51.27	-0.10	54.0	-2.73	AV	77.50	100	Horizontal	Pass
5	3277.965	38.22	-1.72	74.0	-35.78	Peak	189.30	100	Horizontal	Pass
5**	3277.965	26.92	-1.72	54.0	-27.08	AV	189.30	100	Horizontal	Pass
6	4346.832	41.64	0.15	74.0	-32.36	Peak	360.00	100	Horizontal	Pass
6**	4346.832	30.08	0.15	54.0	-23.92	AV	360.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-15_11.01.45

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A

Work Additon: Normal


Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

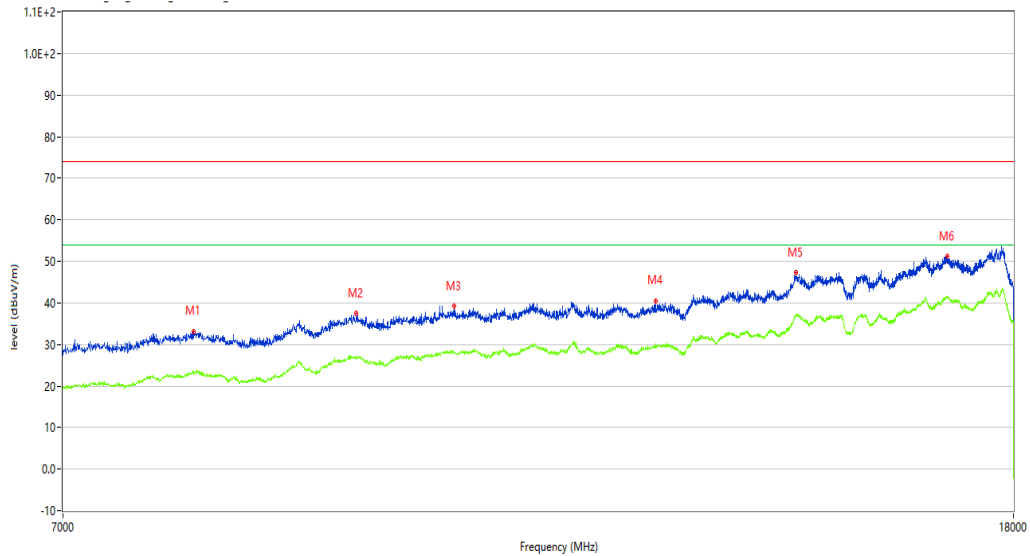

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7967.758	33.21	-27.95	74.0	-40.79	Peak	155.10	100	Horizontal	Pass
1**	7967.758	23.53	-27.95	54.0	-30.47	AV	155.10	100	Horizontal	Pass
2	9369.908	37.46	-23.13	74.0	-36.54	Peak	109.70	100	Horizontal	Pass
2**	9369.908	26.59	-23.13	54.0	-27.41	AV	109.70	100	Horizontal	Pass
3	10329.418	39.21	-22.24	74.0	-34.79	Peak	0.10	100	Horizontal	Pass
3**	10329.418	27.99	-22.24	54.0	-26.01	AV	0.10	100	Horizontal	Pass
4	12611.347	40.50	-21.77	74.0	-33.50	Peak	105.30	100	Horizontal	Pass
4**	12611.347	29.46	-21.77	54.0	-24.54	AV	105.30	100	Horizontal	Pass
5	14502.874	47.25	-15.91	74.0	-26.75	Peak	285.80	100	Horizontal	Pass
5**	14502.874	37.21	-15.91	54.0	-16.79	AV	285.80	100	Horizontal	Pass
6	16853.537	51.16	-12.54	74.0	-22.84	Peak	204.30	100	Horizontal	Pass
6**	16853.537	41.51	-12.54	54.0	-12.49	AV	204.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-15_10.23.31

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A

Work Additon: Normal


Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

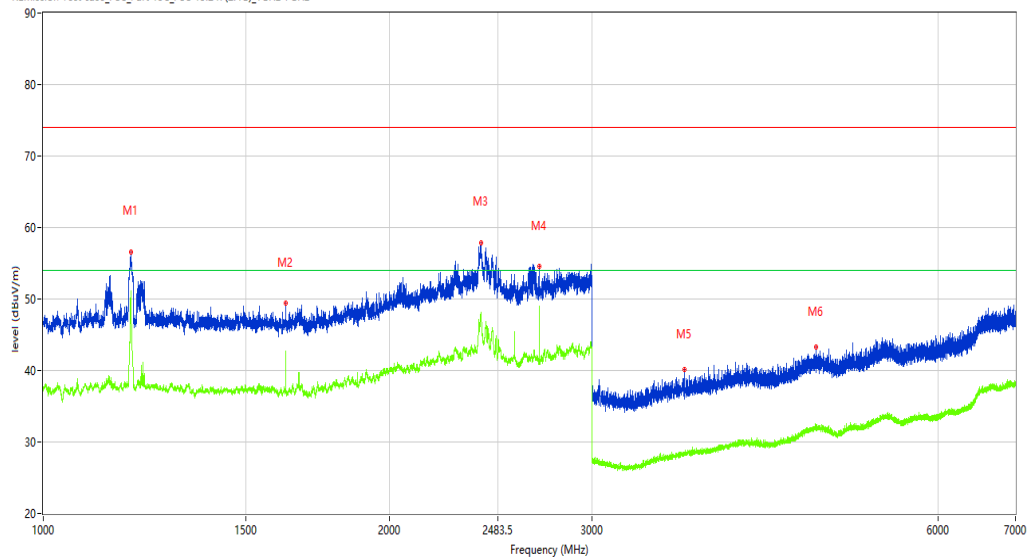

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1191.476	56.58	-4.12	74.0	-17.42	Peak	113.60	100	Vertical	Pass
1**	1191.476	51.18	-4.12	54.0	-2.82	AV	113.60	100	Vertical	Pass
2	1624.922	49.39	-5.47	74.0	-24.61	Peak	94.90	100	Vertical	Pass
2**	1624.922	42.68	-5.47	54.0	-11.32	AV	94.90	100	Vertical	Pass
3	2401.575	57.90	5.31	74.0	-16.10	Peak	109.10	100	Vertical	Pass
3**	2401.575	47.83	5.31	54.0	-6.17	AV	109.10	100	Vertical	Pass
4	2699.788	54.57	-0.10	74.0	-19.43	Peak	4.00	100	Vertical	Pass
4**	2699.788	49.03	-0.10	54.0	-4.97	AV	4.00	100	Vertical	Pass
5	3610.924	40.17	-0.92	74.0	-33.83	Peak	360.50	100	Vertical	Pass
5**	3610.924	28.45	-0.92	54.0	-25.55	AV	360.50	100	Vertical	Pass
6	4693.788	43.33	0.95	74.0	-30.67	Peak	355.00	100	Vertical	Pass
6**	4693.788	32.38	0.95	54.0	-21.62	AV	355.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-18_16.37.05

EUT Name: N.A

Test Engineer: XCJ

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 21.3

Load: Full load

Hum: 55%

Remark: DR-RE01-E19100012-03#01

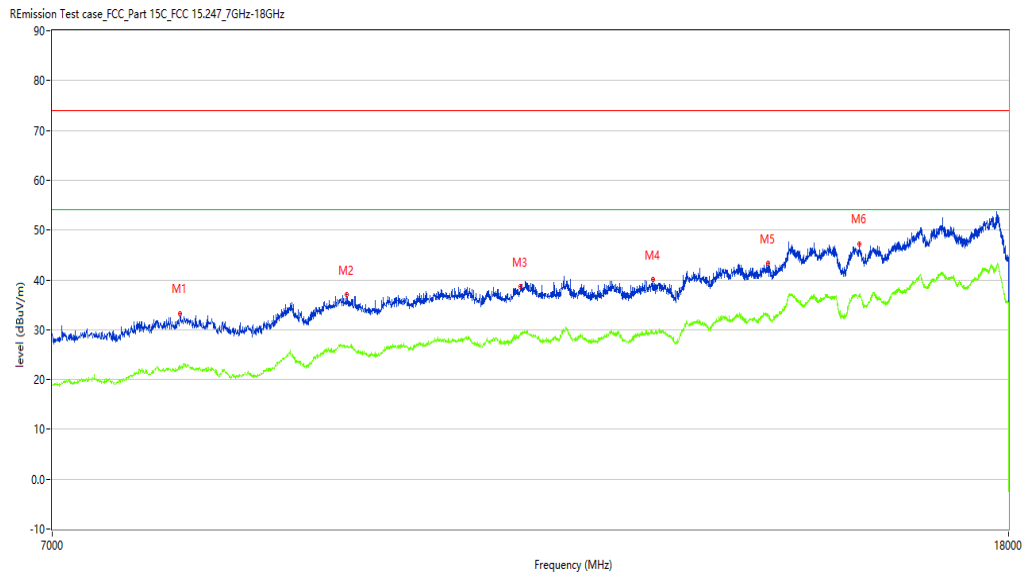

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7943.014	33.18	-28.28	74.0	-40.82	Peak	207.30	100	Vertical	Pass
1**	7943.014	22.70	-28.28	54.0	-31.30	AV	207.30	100	Vertical	Pass
2	9361.660	36.99	-23.15	74.0	-37.01	Peak	202.50	100	Vertical	Pass
2**	9361.660	26.47	-23.15	54.0	-27.53	AV	202.50	100	Vertical	Pass
3	11118.470	38.64	-22.32	74.0	-35.36	Peak	184.30	100	Vertical	Pass
3**	11118.470	29.42	-22.32	54.0	-24.58	AV	184.30	100	Vertical	Pass
4	12669.083	40.05	-21.52	74.0	-33.95	Peak	308.20	100	Vertical	Pass
4**	12669.083	29.42	-21.52	54.0	-24.58	AV	308.20	100	Vertical	Pass
5	14194.951	43.30	-18.72	74.0	-30.70	Peak	253.10	100	Vertical	Pass
5**	14194.951	33.06	-18.72	54.0	-20.94	AV	253.10	100	Vertical	Pass
6	15536.616	47.28	-17.50	74.0	-26.72	Peak	48.40	100	Vertical	Pass
6**	15536.616	37.13	-17.50	54.0	-16.87	AV	48.40	100	Vertical	Pass