FCC TEST REPORT

Test report
On Behalf of
Shenzhen X-Future Intlligent Technology Co., Ltd.
For
2.4G Camera
Model No.: WJ01, WJ02, WJ03, WJ09, WJ10

FCC ID: 2AN2KWJ01

Prepared for :	**Shenzhen X-Future Intlligent Technology Co., Ltd.** **5 / F, Building 13, Nangang Second Industrial Park, 1206, Xilisongbai Road, Nanshan District, Shenzhen**
Prepared By :	**Shenzhen HUAK Testing Technology Co., Ltd.** **1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China**
Date of Test:	**July 25, 2018~Aug. 16, 2018**
Date of Report:	**Aug. 16, 2018**
Report Number:	**HUAK180806701E**

TEST RESULT CERTIFICATION

Applicant's name ..... :	Shenzhen X-Future Intlligent Technology Co., Ltd.
Address..... :	5 / F, Building 13, Nangang Second Industrial Park, 1206, Xilisongbai Road, Nanshan District, Shenzhen
Manufacture's Name..... :	Shenzhen X-Future Intlligent Technology Co., Ltd.
Address..... :	5 / F, Building 13, Nangang Second Industrial Park, 1206, Xilisongbai Road, Nanshan District, Shenzhen
Product description	2.4G Camera
Brand Name	N/A
Mode Name	WJ01, WJ02, WJ03, WJ09, WJ10
Difference Description	All the same except the mode name.
Standards ..... :	FCC Rules and Regulations Part 15 Subpart C Section 15.247 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test ..... :	
Date (s) of performance of tests..... :	July 25, 2018~Aug. 16, 2018
Date of Issue ..... :	Aug. 16, 2018
Test Result ..... :	**Pass**

Testing Engineer : Gary Qian

(Gary Qian)

Technical Manager : Eden Hu

(Eden Hu)

Authorized Signatory : Jason Zhou

(Jason Zhou)

TABLE OF CONTENTS

1. GENERAL INFORMATION 5
1.1. PRODUCT DESCRIPTION 5
1.2. TABLE OF CARRIER FREQUENCYS 5
1.3. IEEE 802.11N MODULATION SCHEME 6
1.4. RELATED SUBMITTAL(S) / GRANT (S) 6
1.5. TEST METHODOLOGY 7
1.6. SPECIAL ACCESSORIES 7
1.7. EQUIPMENT MODIFICATIONS 7
2. MEASUREMENT UNCERTAINTY 8
3. DESCRIPTION OF TEST MODES 9
4. SYSTEM TEST CONFIGURATION 10
4.1. CONFIGURATION OF EUT SYSTEM 10
4.2. EQUIPMENT USED IN EUT SYSTEM 10
5.3. SUMMARY OF TEST RESULTS 10
5. TEST FACILITY 11
6. OUTPUT POWER 12
6.1. MEASUREMENT PROCEDURE 12
6.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 12
6.3. LIMITS AND MEASUREMENT RESULT 13
7. 6DB BANDWIDTH 15
7.1. MEASUREMENT PROCEDURE 15
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 15
7.3. LIMITS AND MEASUREMENT RESULTS 16
8. CONDUCTED SPURIOUS EMISSION 19
8.1. MEASUREMENT PROCEDURE 19
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 19
8.3. MEASUREMENT EQUIPMENT USED 19
8.4. LIMITS AND MEASUREMENT RESULT 20
9. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY 27
9.1 MEASUREMENT PROCEDURE 27
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 27
9.3 MEASUREMENT EQUIPMENT USED 27
9.4 LIMITS AND MEASUREMENT RESULT 28
10. RADIATED EMISSION 31
10.1. MEASUREMENT PROCEDURE 31

10.2. TEST SETUP 32
10.3. LIMITS AND MEASUREMENT RESULT 33
10.4. TEST RESULT 34
11. BAND EDGE EMISSION 37
11.1. MEASUREMENT PROCEDURE 37
11.2. TEST SET-UP 37
11.3. RADIATED TEST RESULT 38
11.4. CONDUCTED TEST RESULT 39
12. FCC LINE CONDUCTED EMISSION TEST 41
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST 41
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 41
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 42
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 43
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 44
APPENDIX A: PHOTOGRAPHS OF TEST SETUP 46

1. GENERAL INFORMATION

1.1. PRODUCT DESCRIPTION

The EUT is designed as “2.4G Camera”. It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz～2.462GHz
Output Power	IEEE 802.11b: **14.88**dBm, IEEE 802.11g: **14.84**dBm; IEEE 802.11n(20): **14.77**dBm,IEEE 802.11n(40): **11.60**dBm
Modulation	DSSS(DBPSK/DQPSK/CCK);OFDM(BPSK/QPSK/16-QAM/64-QAM)
Number of channels	11 Channels (IEEE802.11b/g/n20)& 7 Channels (IEEE802.11n40)
Hardware Version	XWL_WJ01_MB_REV1_1
Software Version	10.0.9.4.48
Antenna Designation	FPC Antenna
Antenna Gain	2.0dBi
Power Supply	DC5V by adapter

1.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11

For 802.11n 40MHZ bandwidth system use Channel 3 to Channel 9.

1.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps) 800nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

1.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID:** 2AN2KWJ01 filing to comply with the FCC Part 15 requirements.

1.5. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013).
Radiated testing was performed at an antenna to EUT distance 3 meters.
Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.247 rules KDB 558074 D01 DTS Meas Guidance v04.

1.6. SPECIAL ACCESSORIES

Refer to section 5.2.

1.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. MEASUREMENT UNCERTAINTY

-Uncertainty of Conducted Emission, Uc=±3.2dB

- Uncertainty of Radiated Emission below 1GHz, Uc±3.9dB

- Uncertainty of Radiated Emission above 1GHz, Uc±4.8dB

3. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal operating

Note:
Transmit by 802.11b with Date rate (1/2/5.5/11)
Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)
Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)
Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)

Note:

1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

4. SYSTEM TEST CONFIGURATION

4.1. CONFIGURATION OF EUT SYSTEM

Configure:

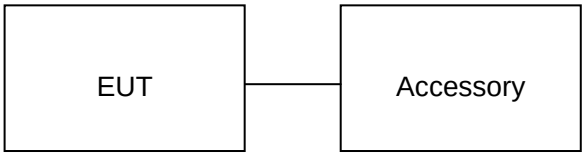

4.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	2.4G Camera	YT06	2AN2KWJ01	EUT
2	Adapter	YMK-6WO50100	DC 5V 1A	Support
3	USB	N/A	N/A	Support

Note: All the accessories have been used during the test in conduction emission test.

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

5. TEST FACILITY

Site	Shenzhen HUAK Testing Technology Co., Ltd.
Location	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China
Designation Number	CN1229
Test Firm Registration Number : 616276	

ALL TEST EQUIPMENT LIST

RF Test Room				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Power meter	Agilent	E4417B	HKE-107	Dec. 28, 2018
Power Sensor	Agilent	E9327A	HKE-113	Dec. 28, 2018
RF cable	Times	1-40G	HKE-034	Dec. 28, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2018
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2018
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Dec. 28, 2018
Signal generator	Agilent	N5183A	HKE-071	Dec. 28, 2018
Receiver	R&S	ESCI-7	HKE-010	Dec. 28, 2018
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2018
Preamplifier	EMCI	EMC051845SE	HKE-015	Dec. 28, 2018
Preamplifier	Agilent	83051A	HKE-016	Dec. 28, 2018
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2018
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 28, 2018
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2018
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 28, 2018
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
RF cable	Times	1-40G	HKE-034	Dec. 28, 2018

6. OUTPUT POWER

6.1. MEASUREMENT PROCEDURE

For max average conducted output power test:

1. Connect EUT RF output port to power probe through an RF attenuator.
2. Connect the power probe to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.

Note：The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

6.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

AVERAGE POWER SETUP

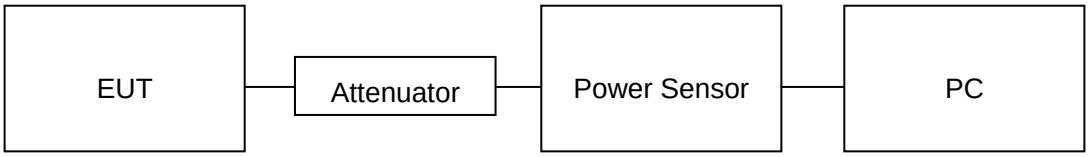

6.3. LIMITS AND MEASUREMENT RESULT

TEST ITEM	OUTPUT POWER
TEST MODE	802.11b with data rate 1

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	14.46	30	Pass
2.437	**14.88**	30	Pass
2.462	14.81	30	Pass

TEST ITEM	OUTPUT POWER
TEST MODE	802.11g with data rate 6

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	14.57	30	Pass
2.437	**14.84**	30	Pass
2.462	14.73	30	Pass

TEST ITEM	OUTPUT POWER
TEST MODE	802.11n 20 with data rate 6.5

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	14.35	30	Pass
2.437	14.68	30	Pass
2.462	**14.77**	30	Pass

TEST ITEM	OUTPUT POWER
TEST MODE	802.11n 40 with data rate 13.5

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.422	11.32	30	Pass
2.437	11.41	30	Pass
2.452	**11.60**	30	Pass

7. 6dB BANDWIDTH

7.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW⩾3×RBW.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

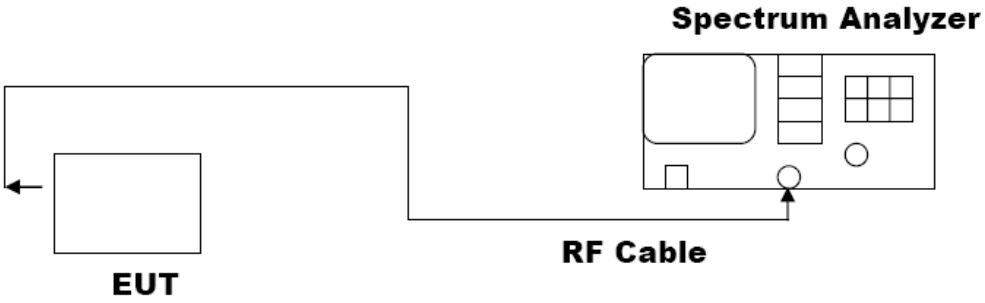

7.3. LIMITS AND MEASUREMENT RESULTS

Mode	Channel	6dB Bandwidth [MHz]	Verdict
11b	LCH	10.11	PASS
	MCH	10.11	PASS
	HCH	10.11	PASS
11g	LCH	16.61	PASS
	MCH	16.60	PASS
	HCH	16.61	PASS
11nHT20	LCH	17.67	PASS
	MCH	17.67	PASS
	HCH	17.67	PASS
11nHT40	LCH	36.42	PASS
	MCH	36.42	PASS
	HCH	36.42	PASS

Test Graph

11b-LCH	11b-MCH
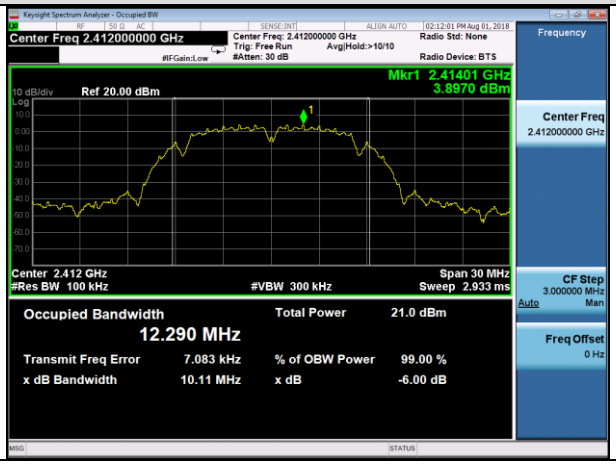	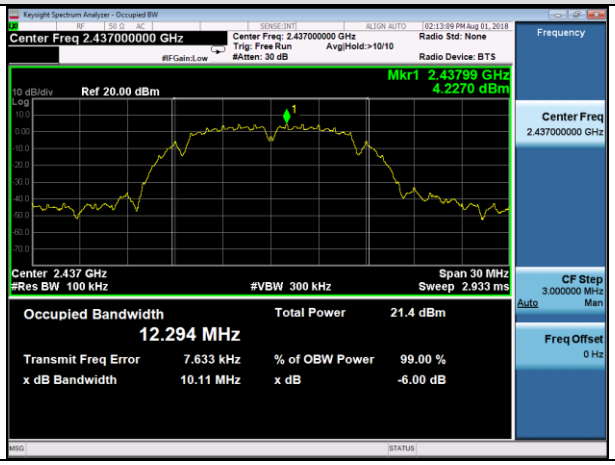

11b-HCH	11g-LCH
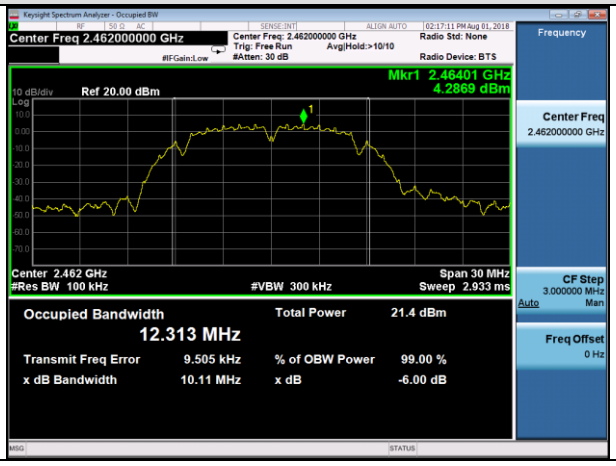	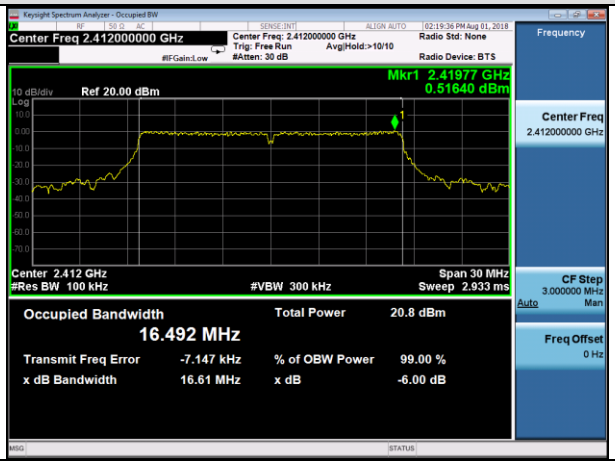

11g-MCH	11g-HCH
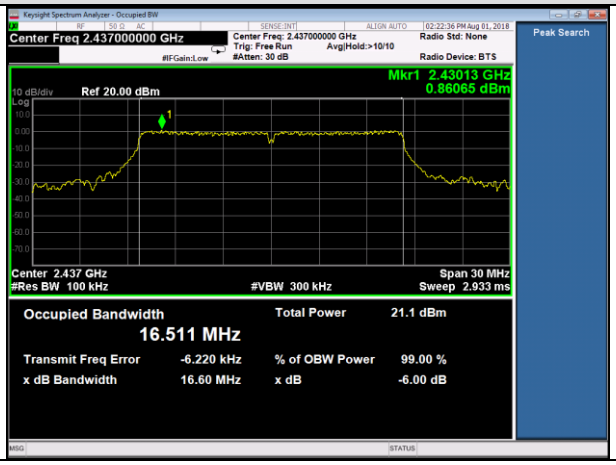	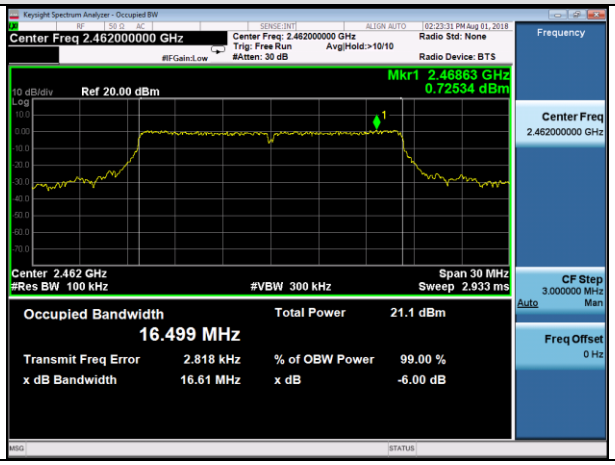

11nHT20-LCH	11nHT20-MCH
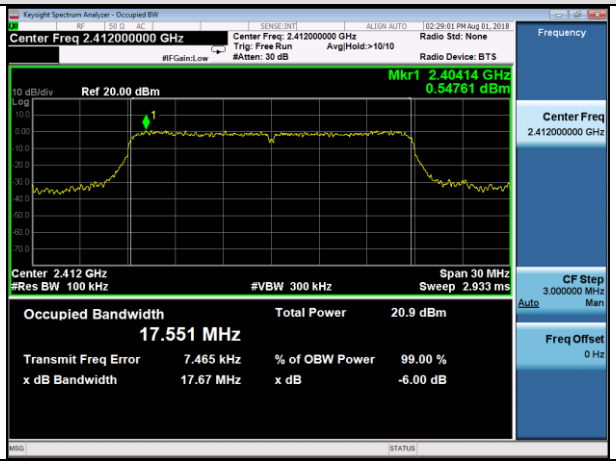	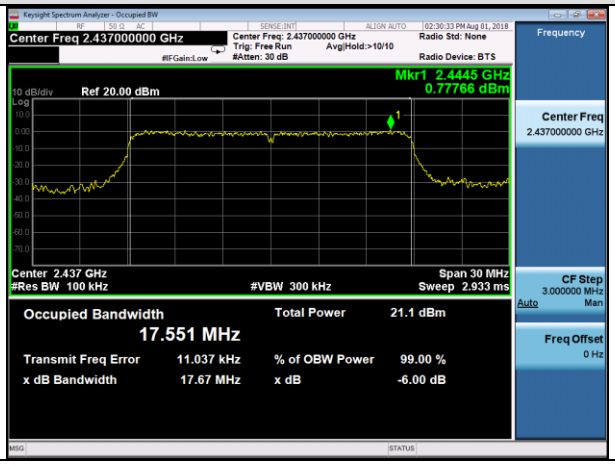

11nHT20-HCH	11nHT40-LCH
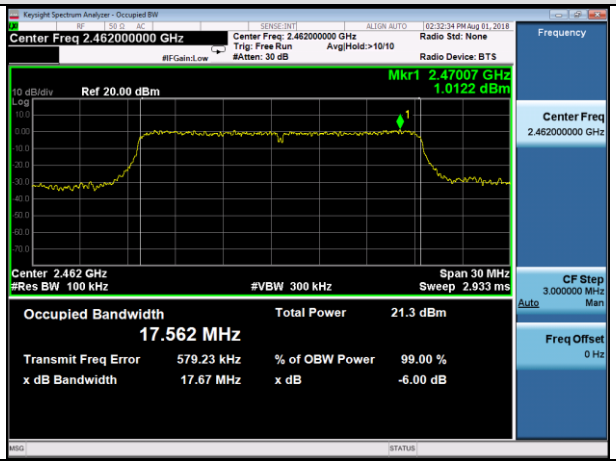	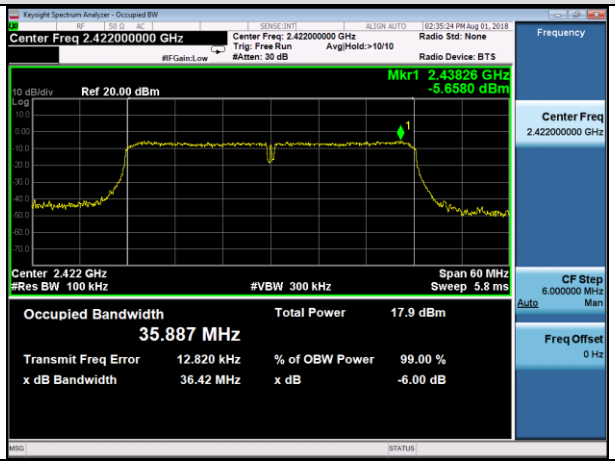

11nHT40-MCH	11nHT40-HCH
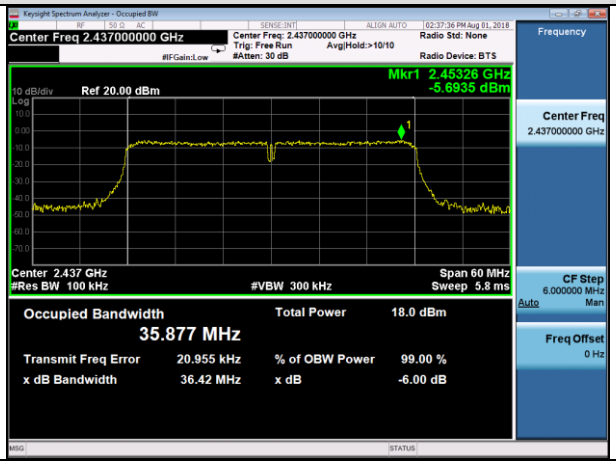	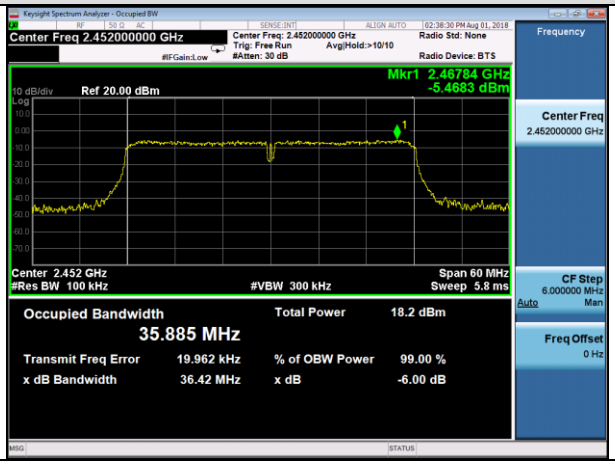

8. CONDUCTED SPURIOUS EMISSION

8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW＞RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW＞RBW) are conform to the requirement.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

8.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

8.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	**Measurement Result**	
	Test Data	**Criteria**
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
	At least -20dBc than the limit Specified on the TOP Channel	PASS

Test Graph

11B-LCH	11B-LCH
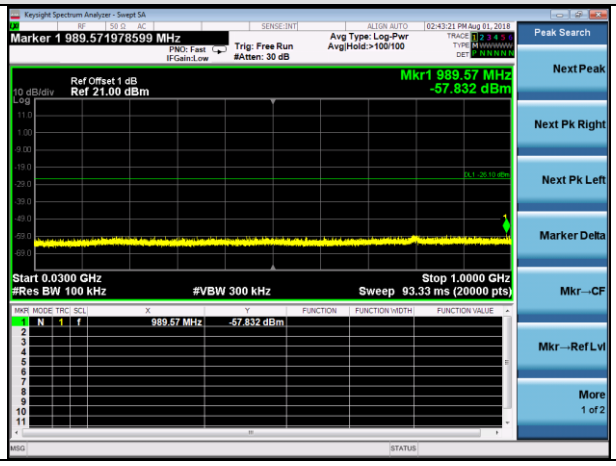	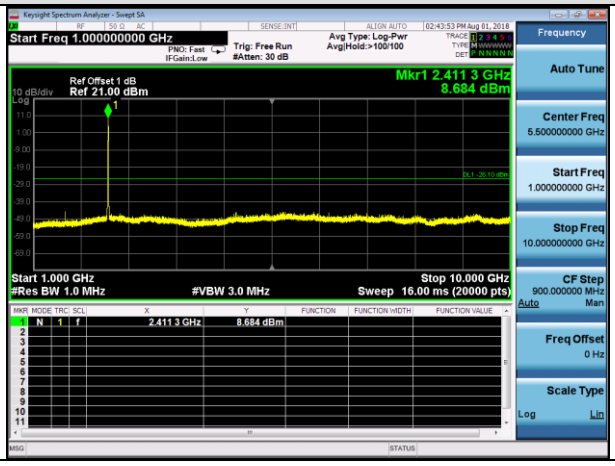

11B-LCH	11B-MCH
	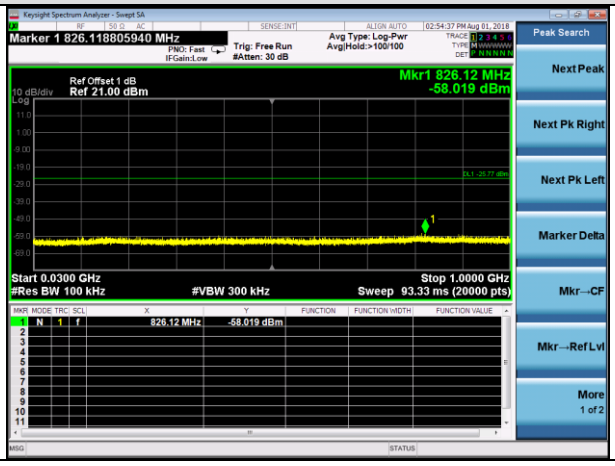

11B-MCH	11B-MCH
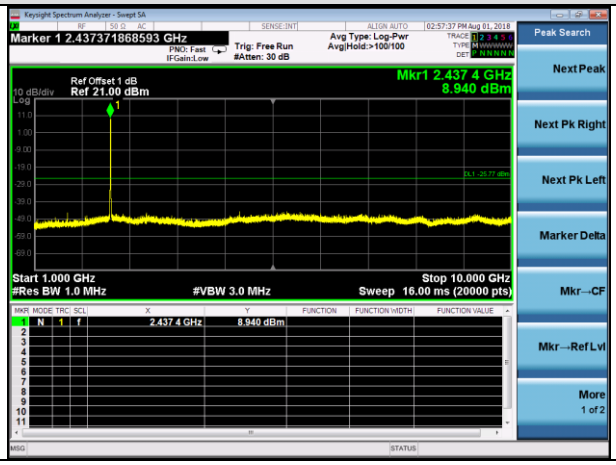	

11B-HCH	11B-HCH
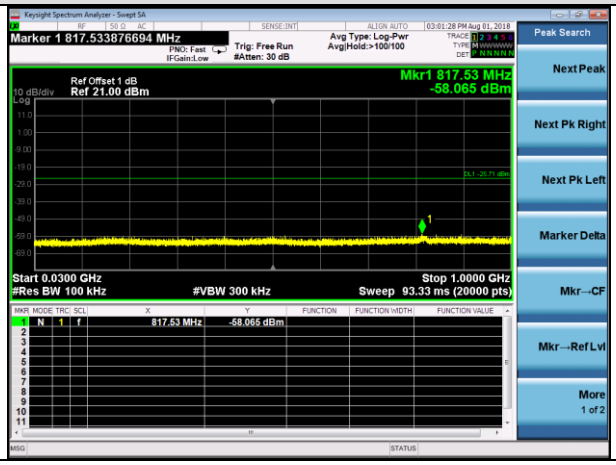	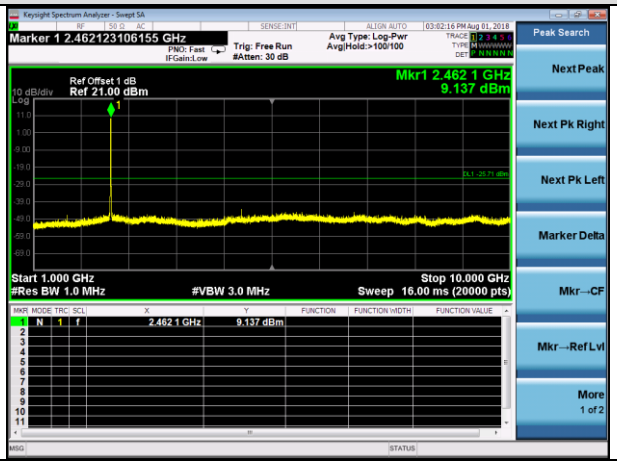

11B-HCH	11G-LCH
	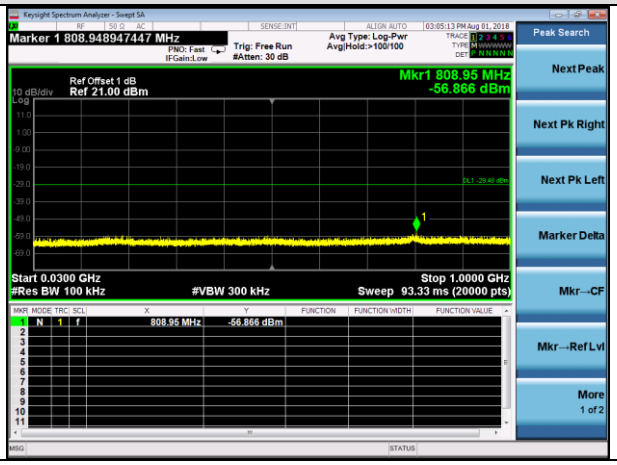

11G-LCH	11G-LCH
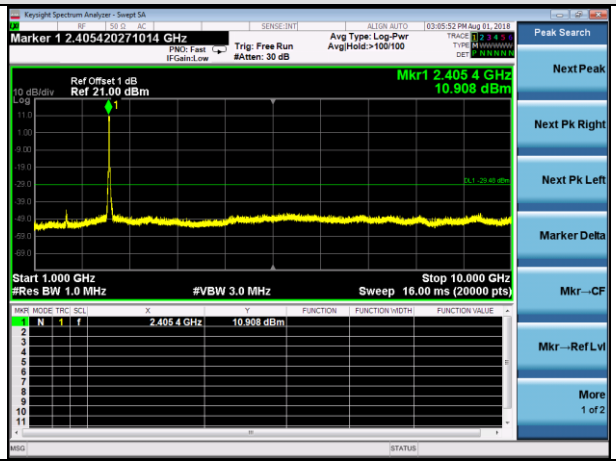	

11G-MCH	11G-MCH
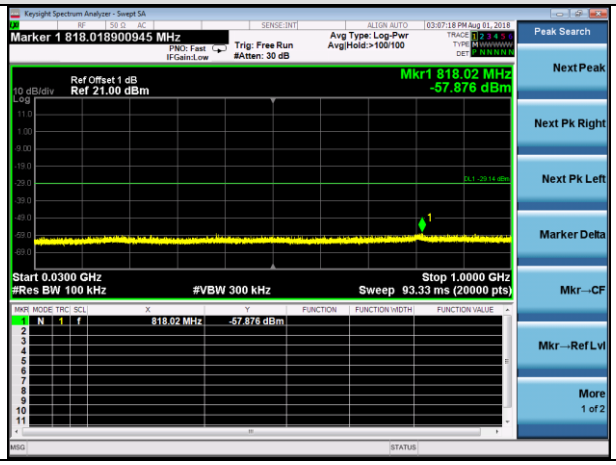	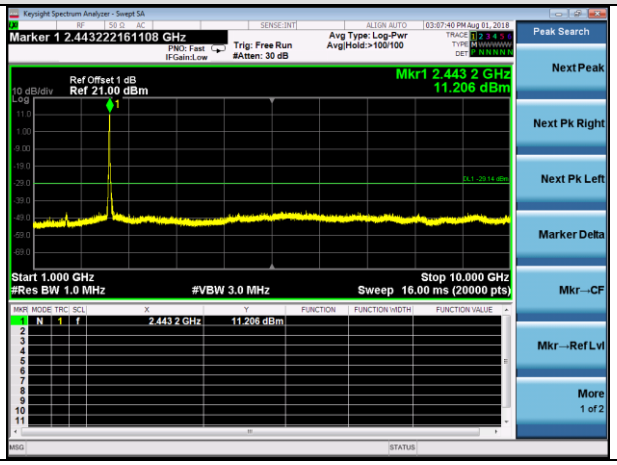

11G-MCH	11G-HCH
	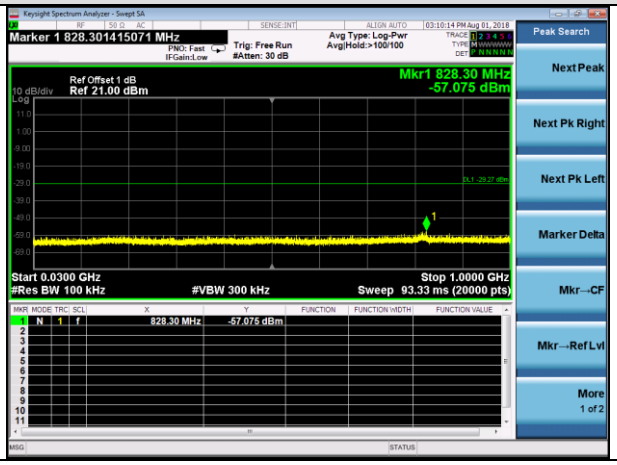
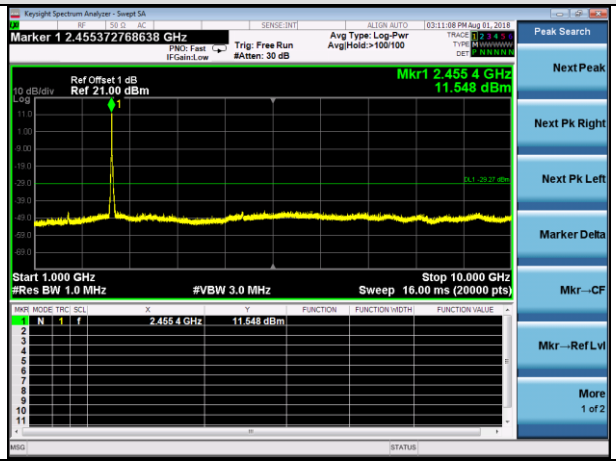
11G-HCH	11G-HCH