

Manufacturer: Shenzhen Sulang Technology Co.,ltd

Manufacturer add.: Area C, 18th Floor, Building 12, Lehui Science and Technology Innovation Center,
No. 489 Jihua Road, Bantian Community, Longgang District, ShenzhenCity, China

Product specification

Quick Reference Date

	Antenna module on the system board	
Antenna type	PCB	
Frequency	2.45GHz*1	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr ?loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	-2.3 (58.5%)	
Gain (dBi)	2.0(Peak Gain X Z-plane)	
Maximum Power (dBm)	1.3 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Max/Min Ratio (dB)	5.3(XY-plane)	
Max/Avg Ratio (dB)	1.8(XY-plane)	
Min/Avg Ratio (dB)	-3.5(XY-plane)	
Average Gain (dB)	-0.5 (Avg Gain XY-plane)	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board




Antenna Gain


Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.3	-0.5	2.0	-3.8	1.1	-3.0	58.5%

Return Loss

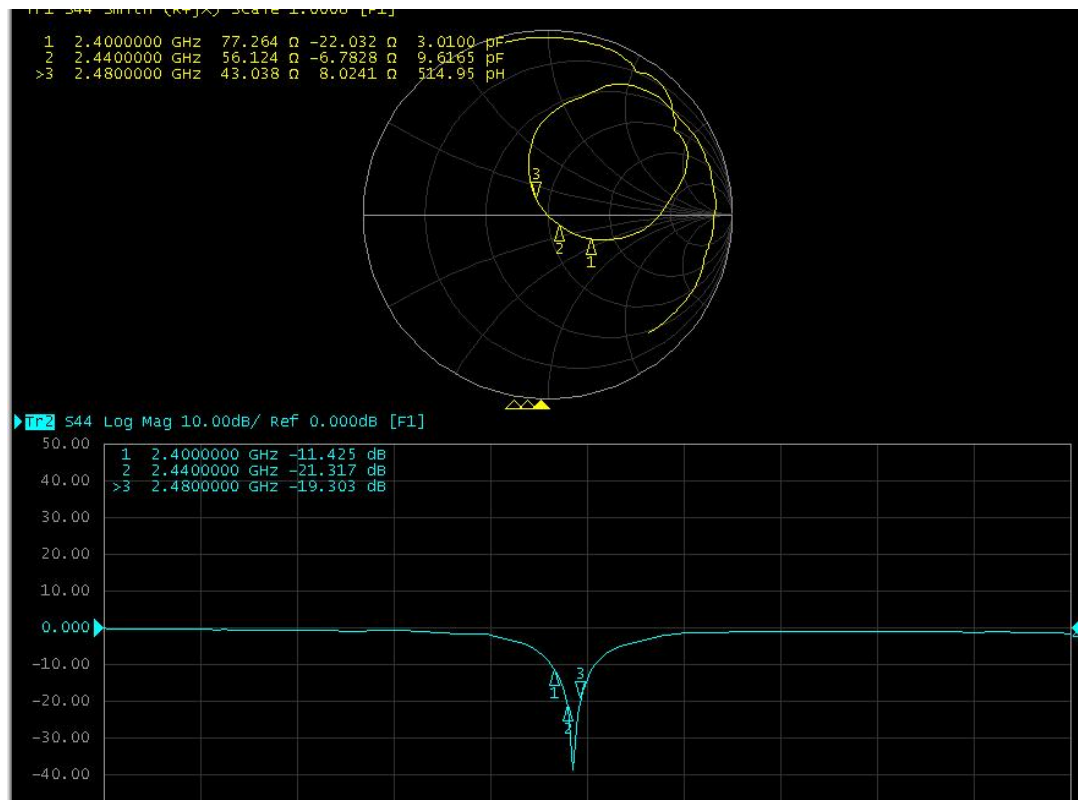


The Environment of Antenna Radiation Pattern

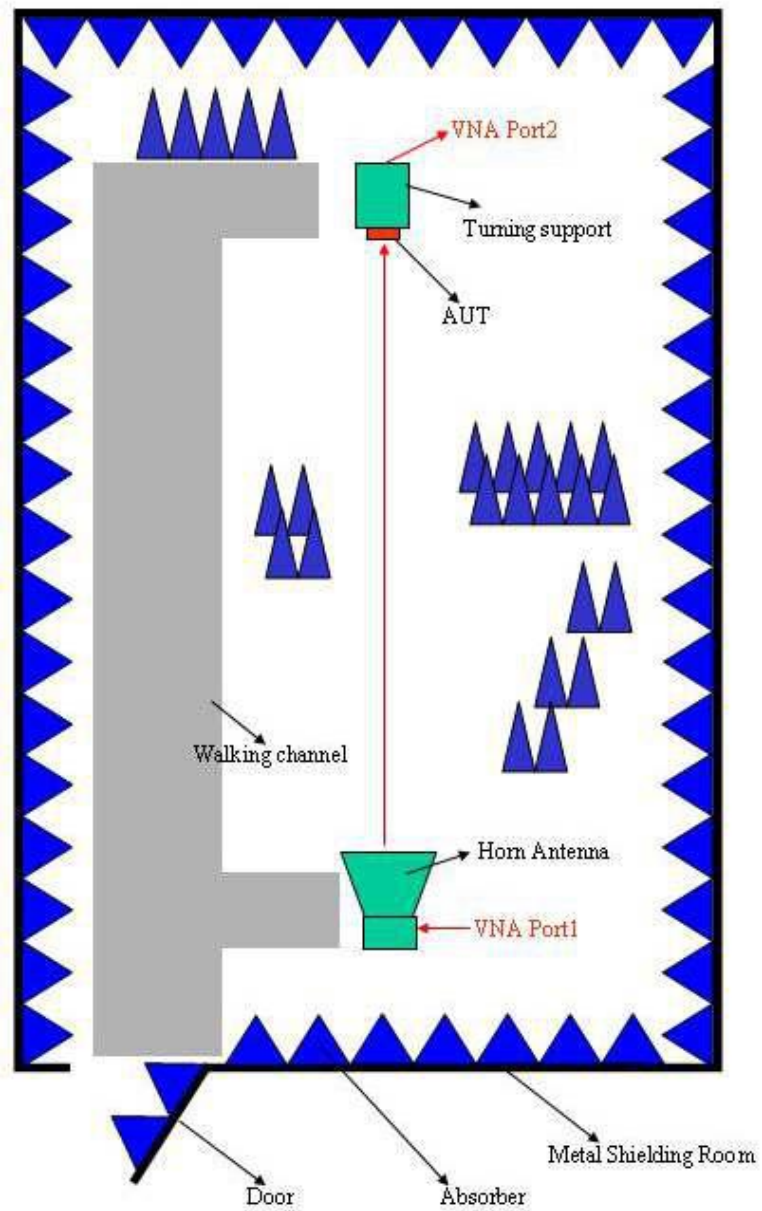




3D radiation pattern diagram

3DradiationPatternDiagram

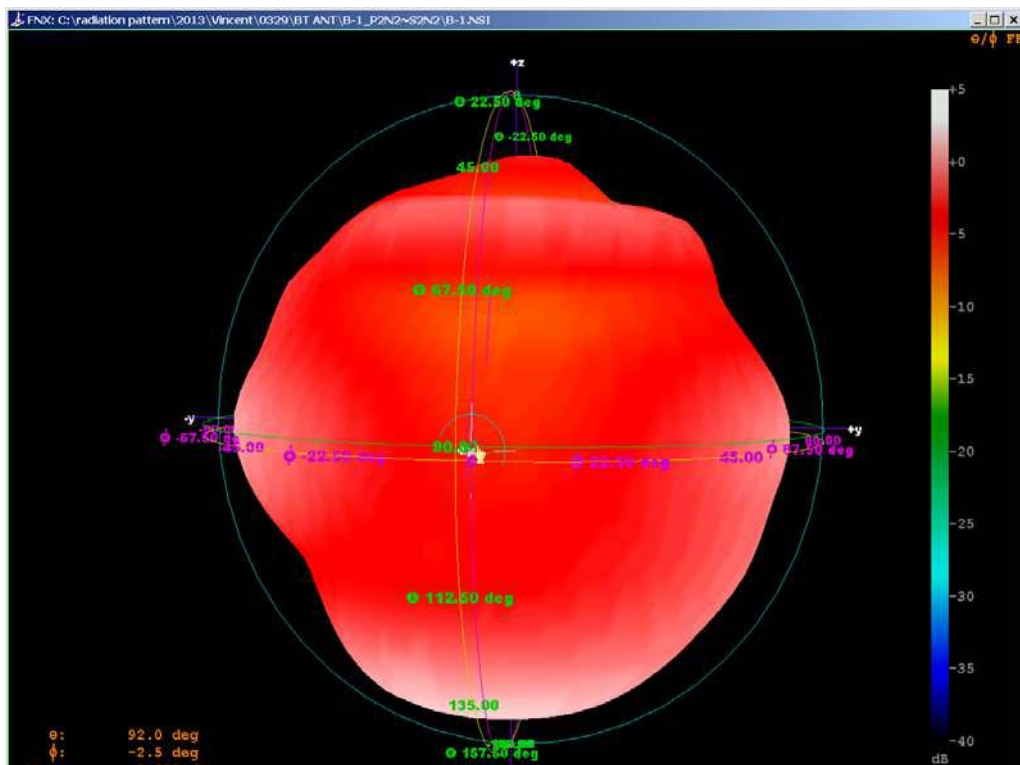


XY-Plane

Far-field Power Distribution(H+V) on X-Y Plane
Plot Peak Gain(H+V)= 1.35 dBi; Plot AvgGain(H+V)= -0.48dBi @2.4000 GHz

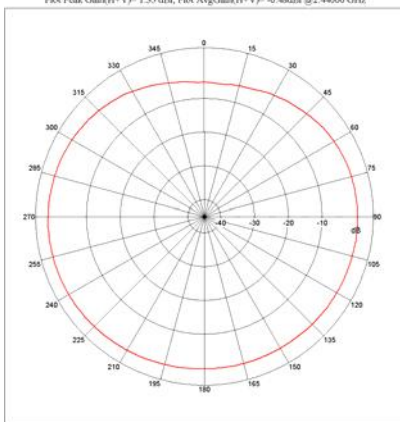

XZ p plane

Far-field Power Distribution(H+V) on X-Z Plane
Plot Peak Gain(H+V)= 1.08 dBi; Plot AvgGain(H+V)= -3.83dBi @2.4000 GHz

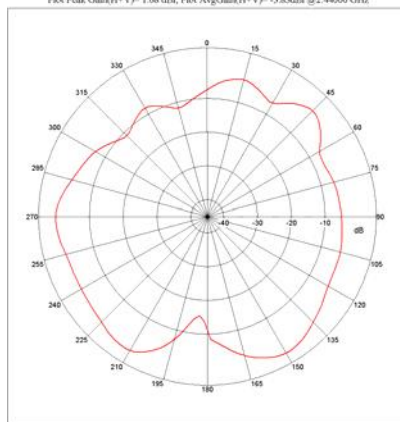

Y Z p plane

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 1.11 dBi; Plot AvgGain(H+V)= -2.99dBi @2.4000 GHz

