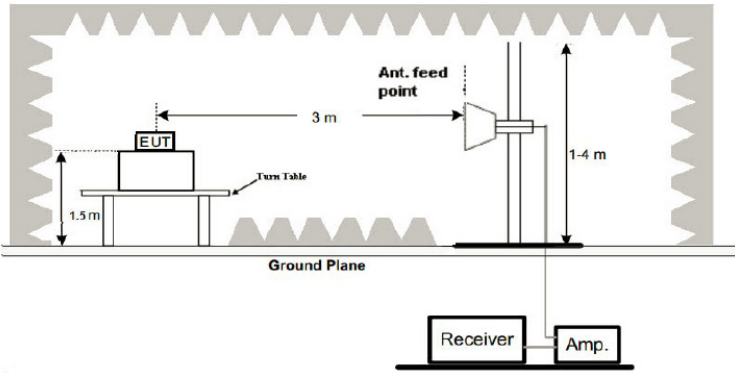


4.6 Band Edge

4.6.1 Test Specification

Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10: 2020
Limit:	(1) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted bands should comply 15.209.
Test Setup:	
Test Mode:	Transmitting mode with modulation

Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi peak or average method as specified and then reported in a data sheet.
Test Result:	PASS

4.6.2 Test Instruments

Radiated Emission Test Site (966)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	EMCI	EMC051845S	HKE-006	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 19, 2025	Feb. 18, 2026
6dB Attenuator	Pasternack	6db	HKE-184	Feb. 19, 2025	Feb. 18, 2026
EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 19, 2025	Feb. 18, 2026
Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	Feb. 20, 2026
Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	Feb. 20, 2026
Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	Feb. 20, 2026
EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	N/A	N/A
RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	N/A	N/A

4.6.3 Test Data

All modes of operation were investigated and the worst-case emissions of ANT.2 are reported.

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.03	-2.06	51.97	68.2	16.23	peak
5700	86.57	-1.96	84.61	105.2	20.59	peak
5720	93.45	-2.87	90.58	110.8	20.22	peak
5725	110.25	-2.14	108.11	122.2	14.09	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.93	-2.06	55.87	68.2	12.33	peak
5700	86.69	-1.96	84.73	105.2	20.47	peak
5720	91.74	-2.87	88.87	110.8	21.93	peak
5725	109.97	-2.14	107.83	122.2	14.37	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11a Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	102.41	-1.97	100.44	122.2	21.76	peak
5855	94.68	-2.13	92.55	110.8	18.25	peak
5875	88.41	-2.65	85.76	105.2	19.44	peak
5925	51.69	-2.28	49.41	68.2	18.79	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	102.86	-1.97	100.89	122.2	21.31	peak
5855	92.69	-2.13	90.56	110.8	20.24	peak
5875	88.98	-2.65	86.33	105.2	18.87	peak
5925	54.69	-2.28	52.41	68.2	15.79	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	57.02	-2.06	54.96	68.2	13.24	peak
5700	89.69	-1.96	87.73	105.2	17.47	peak
5720	95.41	-2.87	92.54	110.8	18.26	peak
5725	110.82	-2.14	108.68	122.2	13.52	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	57.31	-2.06	55.25	68.2	12.95	peak
5700	89.68	-1.96	87.72	105.2	17.48	peak
5720	95.96	-2.87	93.09	110.8	17.71	peak
5725	110.36	-2.14	108.22	122.2	13.98	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11n20 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	102.32	-1.97	100.35	122.2	21.85	peak
5855	93.31	-2.13	91.18	110.8	19.62	peak
5875	95.56	-2.65	92.91	105.2	12.29	peak
5925	53.41	-2.28	51.13	68.2	17.07	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	102.63	-1.97	100.66	122.2	21.54	peak
5855	93.34	-2.13	91.21	110.8	19.59	peak
5875	89.78	-2.65	87.13	105.2	18.07	peak
5925	57.11	-2.28	54.83	68.2	13.37	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	58.38	-2.06	56.32	68.2	11.88	peak
5700	91.64	-1.96	89.68	105.2	15.52	peak
5720	93.75	-2.87	90.88	110.8	19.92	peak
5725	110.58	-2.14	108.44	122.2	13.76	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	58.87	-2.06	56.81	68.2	11.39	peak
5700	91.45	-1.96	89.49	105.2	15.71	peak
5720	97.36	-2.87	94.49	110.8	16.31	peak
5725	111.86	-2.14	109.72	122.2	12.48	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11n40 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	103.25	-1.97	101.28	122.2	20.92	peak
5855	92.67	-2.13	90.54	110.8	20.26	peak
5875	88.87	-2.65	86.22	105.2	18.98	peak
5925	53.14	-2.28	50.86	68.2	17.34	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	102.85	-1.97	100.88	122.2	21.32	peak
5855	93.68	-2.13	91.55	110.8	19.25	peak
5875	87.41	-2.65	84.76	105.2	20.44	peak
5925	50.83	-2.28	48.55	68.2	19.65	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.24	-2.06	54.18	68.2	14.02	peak
5700	87.64	-1.96	85.68	105.2	19.52	peak
5720	95.69	-2.87	92.82	110.8	17.98	peak
5725	108.47	-2.14	106.33	122.2	15.87	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.68	-2.06	54.62	68.2	13.58	peak
5700	90.35	-1.96	88.39	105.2	16.81	peak
5720	94.78	-2.87	91.91	110.8	18.89	peak
5725	111.35	-2.14	109.21	122.2	12.99	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac20 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.73	-1.97	108.76	122.2	13.44	peak
5855	94.69	-2.13	92.56	110.8	18.24	peak
5875	88.76	-2.65	86.11	105.2	19.09	peak
5925	53.63	-2.28	51.35	68.2	16.85	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.84	-1.97	107.87	122.2	14.33	peak
5855	93.65	-2.13	91.52	110.8	19.28	peak
5875	87.41	-2.65	84.76	105.2	20.44	peak
5925	53.56	-2.28	51.28	68.2	16.92	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.74	-2.06	54.68	68.2	13.52	peak
5700	88.92	-1.96	86.96	105.2	18.24	peak
5720	92.68	-2.87	89.81	110.8	20.99	peak
5725	110.21	-2.14	108.07	122.2	14.13	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.58	-2.06	53.52	68.2	14.68	peak
5700	87.54	-1.96	85.58	105.2	19.62	peak
5720	93.35	-2.87	90.48	110.8	20.32	peak
5725	110.87	-2.14	108.73	122.2	13.47	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac40 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	112.95	-1.97	110.98	122.2	11.22	peak
5855	92.57	-2.13	90.44	110.8	20.36	peak
5875	87.63	-2.65	84.98	105.2	20.22	peak
5925	57.64	-2.28	55.36	68.2	12.84	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	111.92	-1.97	109.95	122.2	12.25	peak
5855	92.38	-2.13	90.25	110.8	20.55	peak
5875	88.54	-2.65	85.89	105.2	19.31	peak
5925	57.21	-2.28	54.93	68.2	13.27	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac80 Mode with 5.8G TX

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.71	-2.06	54.65	68.2	13.55	peak
5700	88.85	-1.96	86.89	105.2	18.31	peak
5720	93.74	-2.87	90.87	110.8	19.93	peak
5725	108.87	-2.14	106.73	122.2	15.47	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.57	-2.06	55.51	68.2	12.69	peak
5700	89.75	-1.96	87.79	105.2	17.41	peak
5720	94.42	-2.87	91.55	110.8	19.25	peak
5725	109.25	-2.14	107.11	122.2	15.09	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac80 Mode with 5.8G TX

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	111.88	-1.97	109.91	122.2	12.29	peak
5855	92.68	-2.13	90.55	110.8	20.25	peak
5875	88.57	-2.65	85.92	105.2	19.28	peak
5925	55.47	-2.28	53.19	68.2	15.01	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.69	-1.97	108.72	122.2	13.48	peak
5855	93.65	-2.13	91.52	110.8	19.28	peak
5875	88.68	-2.65	86.03	105.2	19.17	peak
5925	55.87	-2.28	53.59	68.2	14.61	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.68	-2.06	55.62	68.2	12.58	peak
5700	89.45	-1.96	87.49	105.2	17.71	peak
5720	94.69	-2.87	91.82	110.8	18.98	peak
5725	110.47	-2.14	108.33	122.2	13.87	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.35	-2.06	56.29	68.2	11.91	peak
5700	91.57	-1.96	89.61	105.2	15.59	peak
5720	93.89	-2.87	91.02	110.8	19.78	peak
5725	110.68	-2.14	108.54	122.2	13.66	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax20 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.46	-1.97	107.49	122.2	14.71	peak
5855	94.98	-2.13	92.85	110.8	17.95	peak
5875	87.42	-2.65	84.77	105.2	20.43	peak
5925	54.33	-2.28	52.05	68.2	16.15	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.75	-1.97	108.78	122.2	13.42	peak
5855	93.75	-2.13	91.62	110.8	19.18	peak
5875	88.61	-2.65	85.96	105.2	19.24	peak
5925	54.46	-2.28	52.18	68.2	16.02	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax40 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.57	-2.06	55.51	68.2	12.69	peak
5700	87.91	-1.96	85.95	105.2	19.25	peak
5720	94.54	-2.87	91.67	110.8	19.13	peak
5725	104.83	-2.14	102.69	122.2	19.51	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.57	-2.06	54.51	68.2	13.69	peak
5700	89.57	-1.96	87.61	105.2	17.59	peak
5720	93.26	-2.87	90.39	110.8	20.41	peak
5725	110.75	-2.14	108.61	122.2	13.59	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax40 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.74	-1.97	108.77	122.2	13.43	peak
5855	94.85	-2.13	92.72	110.8	18.08	peak
5875	85.72	-2.65	83.07	105.2	22.13	peak
5925	55.52	-2.28	53.24	68.2	14.96	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.25	-1.97	108.28	122.2	13.92	peak
5855	94.55	-2.13	92.42	110.8	18.38	peak
5875	88.82	-2.65	86.17	105.2	19.03	peak
5925	59.52	-2.28	57.24	68.2	10.96	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax80 Mode with 5.8G TX

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.33	-2.06	56.27	68.2	11.93	peak
5700	89.57	-1.96	87.61	105.2	17.59	peak
5720	94.34	-2.87	91.47	110.8	19.33	peak
5725	110.75	-2.14	108.61	122.2	13.59	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.58	-2.06	56.52	68.2	11.68	peak
5700	94.58	-1.96	92.62	105.2	12.58	peak
5720	95.35	-2.87	92.48	110.8	18.32	peak
5725	111.68	-2.14	109.54	122.2	12.66	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax80 Mode with 5.8G TX

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.54	-1.97	108.57	122.2	13.63	peak
5855	94.35	-2.13	92.22	110.8	18.58	peak
5875	87.37	-2.65	84.72	105.2	20.48	peak
5925	52.52	-2.28	50.24	68.2	17.96	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.54	-1.97	108.57	122.2	13.63	peak
5855	93.44	-2.13	91.31	110.8	19.49	peak
5875	89.78	-2.65	87.13	105.2	18.07	peak
5925	55.51	-2.28	53.23	68.2	14.97	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						


4.7 Spurious Emission

4.7.1 Test Specification


Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation Mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted bands should comply 15.209.				

Test Setup:


For radiated emissions below 30MHz

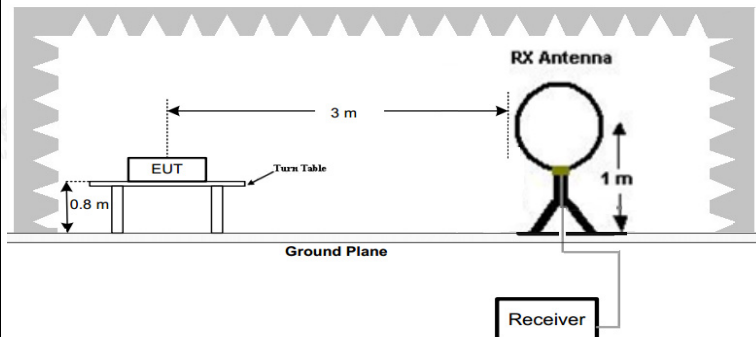

30MHz to 1GHz

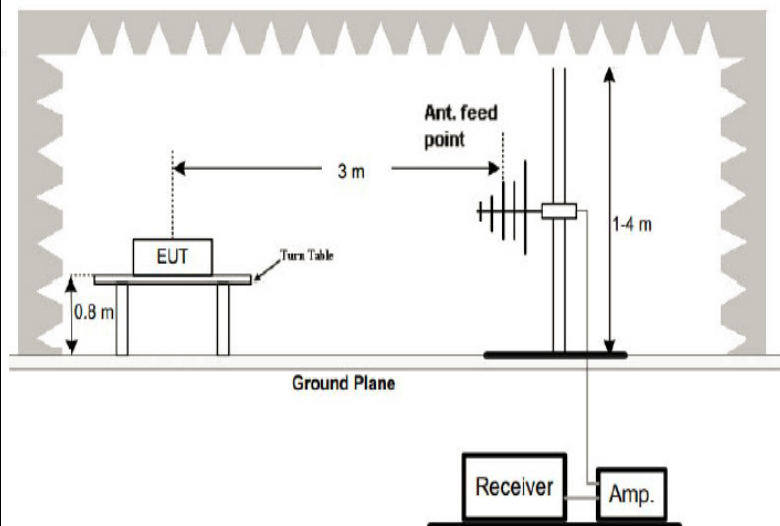

Above 1GHz

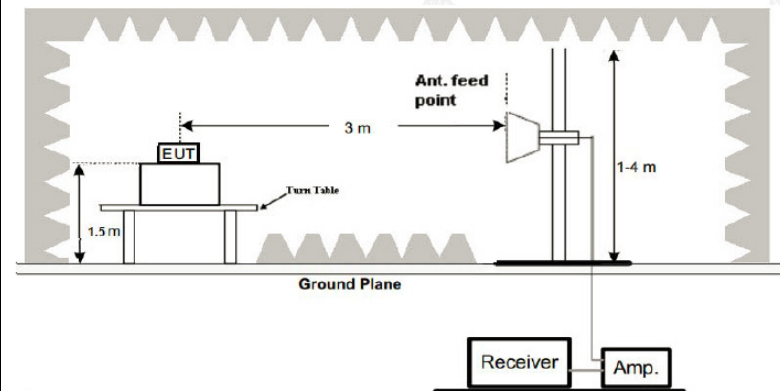

Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Results:	PASS

4.7.2 Test Instruments

Radiated Emission Test Site (966)


Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	EMCI	EMC051845S	HKE-006	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 19, 2025	Feb. 18, 2026
6dB Attenuator	Pasternack	6db	HKE-184	Feb. 19, 2025	Feb. 18, 2026
EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 19, 2025	Feb. 18, 2026
Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	Feb. 20, 2026
Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	Feb. 20, 2026
Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	Feb. 20, 2026
EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	N/A	N/A
RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	N/A	N/A

4.7.3 Test Data

All the test modes completed for test. Only the worst result of reported as below:

Below 1GHz


Antenna polarity: Horizontal

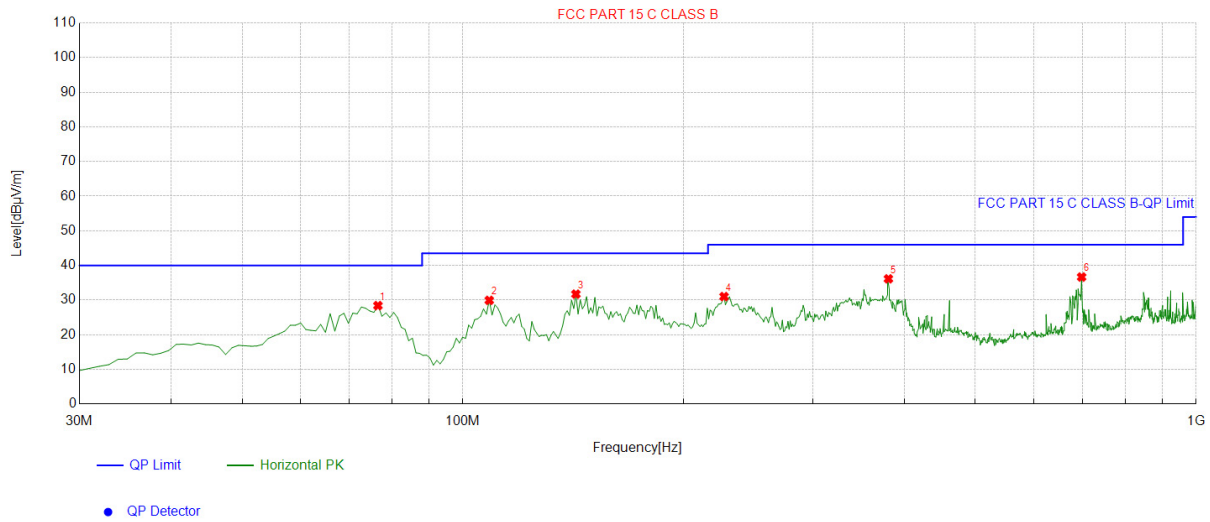

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	76.6066	-17.96	46.37	28.41	40.00	11.59	100	202	Horizontal
2	108.6486	-14.02	43.95	29.93	43.50	13.57	100	1	Horizontal
3	142.6326	-18.41	50.13	31.72	43.50	11.78	100	170	Horizontal
4	227.1071	-13.92	44.94	31.02	46.00	14.98	100	116	Horizontal
5	380.5205	-9.28	45.42	36.14	46.00	9.86	100	221	Horizontal
6	698.0280	-4.33	40.99	36.66	46.00	9.34	100	34	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit

Antenna polarity: Vertical

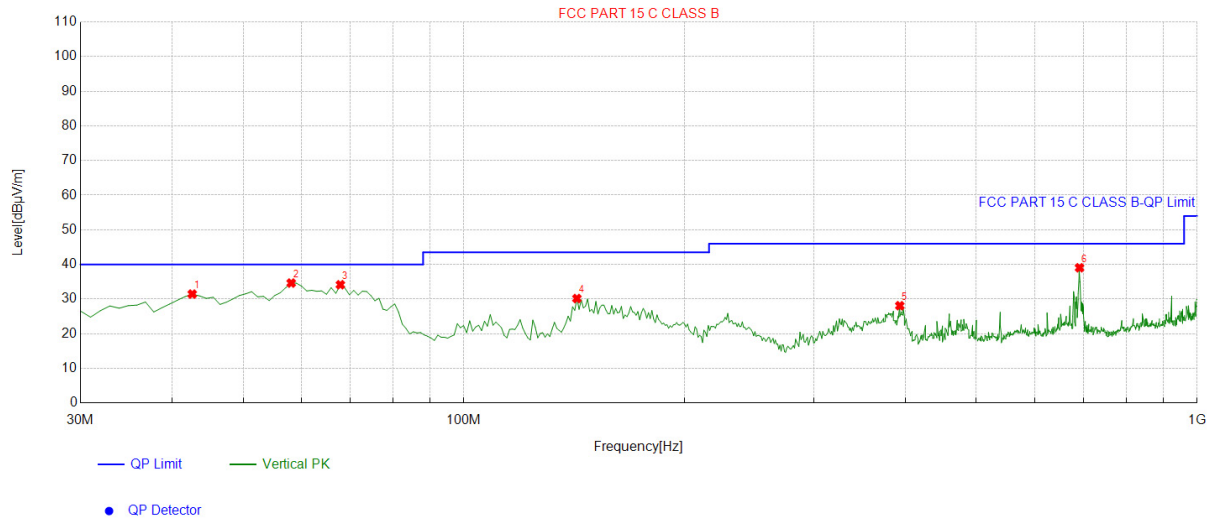

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.6226	-13.31	44.76	31.45	40.00	8.55	100	141	Vertical
2	58.1582	-14.00	48.63	34.63	40.00	5.37	100	173	Vertical
3	67.8679	-16.02	50.17	34.15	40.00	5.85	100	238	Vertical
4	142.6326	-18.41	48.58	30.17	43.50	13.33	100	315	Vertical
5	393.1431	-9.30	37.39	28.09	46.00	17.91	100	18	Vertical
6	691.2312	-4.08	43.12	39.04	46.00	6.96	100	21	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit

Harmonics and Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Above 1GHz

All modes of operation were investigated and the worst-case of Ant. 2 are reported.

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	52.16	-4.59	47.57	68.2	20.63	
11096	49.24	4.21	53.45	74	20.55	peak
11096	38.57	4.21	42.78	54	11.22	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	52.08	-4.59	47.49	68.2	20.71	
11096	48.87	4.21	53.08	74	20.92	peak
11096	36.14	4.21	40.35	54	13.65	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Operation Mode: 802.11a Mode with 5.8G TX CH Mid

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	53.25	-4.59	48.66	68.2	19.54	peak
10523	50.36	4.21	54.57	68.2	13.63	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	57.57	-4.59	52.98	68.2	15.22	peak
10523	52.74	4.21	56.95	68.2	11.25	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11a Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	57.57	-4.59	52.98	74	21.02	peak
2705	45.76	-4.59	41.17	54	12.83	AVG
11717	54.68	4.84	59.52	74	14.48	peak
11717	36.55	4.84	41.39	54	12.61	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.72	-4.59	55.13	74	18.87	peak
2705	44.47	-4.59	39.88	54	14.12	AVG
11717	50.57	4.84	55.41	74	18.59	peak
11717	38.38	4.84	43.22	54	10.78	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

All modes of operation were investigated and the worst-case of MIMO are reported.

Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	61.66	-4.59	57.07	68.2	11.13	
11096	57.46	4.21	61.67	74	12.33	peak
11096	37.98	4.21	42.19	54	11.81	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	61.36	-4.59	56.77	68.2	11.43	
11096	55.36	4.21	59.57	74	14.43	peak
11096	37.74	4.21	41.95	54	12.05	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Operation Mode: 802.11n20 Mode with 5.8G TX CH Mid

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	56.88	-4.59	52.29	68.2	15.91	peak
10523	53.47	4.21	57.68	68.2	10.52	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	55.67	-4.59	51.08	68.2	17.12	peak
10523	52.58	4.21	56.79	68.2	11.41	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11n20 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	58.54	-4.59	53.95	74	20.05	peak
2705	46.77	-4.59	42.18	54	11.82	AVG
11717	50.38	4.84	55.22	74	18.78	peak
11717	38.37	4.84	43.21	54	10.79	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	58.32	-4.59	53.73	74	20.27	peak
2705	46.25	-4.59	41.66	54	12.34	AVG
11717	51.33	4.84	56.17	74	17.83	peak
11717	37.24	4.84	42.08	54	11.92	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	59.45	-4.59	54.86	68.2	13.34	
11096	54.75	4.21	58.96	74	15.04	peak
11096	38.41	4.21	42.62	54	11.38	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	59.54	-4.59	54.95	68.2	13.25	
11096	56.47	4.21	60.68	74	13.32	peak
11096	38.75	4.21	42.96	54	11.04	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11n40 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	57.76	-4.59	53.17	68.2	15.03	peak
10523	53.54	4.21	57.75	68.2	10.45	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	57.56	-4.59	52.97	68.2	15.23	peak
10523	51.57	4.21	55.78	68.2	12.42	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	61.63	-4.59	57.04	68.2	11.16	
11096	51.76	4.21	55.97	74	18.03	peak
11096	34.35	4.21	38.56	54	15.44	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	61.68	-4.59	57.09	68.2	11.11	
11096	57.64	4.21	61.85	74	12.15	peak
11096	37.57	4.21	41.78	54	12.22	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac20 Mode with 5.8G TX CH Mid

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	54.32	-4.59	49.73	68.2	18.47	peak
10523	53.71	4.21	57.92	68.2	10.28	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	59.65	-4.59	55.06	68.2	13.14	peak
10523	52.27	4.21	56.48	68.2	11.72	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac20 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	61.25	-4.59	56.66	74	17.34	peak
2705	47.36	-4.59	42.77	54	11.23	AVG
11717	52.11	4.84	56.95	74	17.05	peak
11717	38.24	4.84	43.08	54	10.92	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	54.27	-4.59	49.68	74	24.32	peak
2705	47.66	-4.59	43.07	54	10.93	AVG
11717	52.68	4.84	57.52	74	16.48	peak
11717	38.67	4.84	43.51	54	10.49	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	60.24	-4.59	55.65	68.2	12.55	
11096	58.8	4.21	63.01	74	10.99	peak
11096	36.58	4.21	40.79	54	13.21	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	61.57	-4.59	56.98	68.2	11.22	
11096	57.24	4.21	61.45	74	12.55	peak
11096	39.64	4.21	43.85	54	10.15	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac40 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	58.21	-4.59	53.62	68.2	14.58	peak
10523	52.47	4.21	56.68	68.2	11.52	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	57.63	-4.59	53.04	68.2	15.16	peak
10523	51.42	4.21	55.63	68.2	12.57	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ac80 Mode with 5.8G TX

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	60.67	-4.59	56.08	68.2	12.12	
11096	57.86	4.21	62.07	74	11.93	peak
11096	36.74	4.21	40.95	54	13.05	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	62.64	-4.59	58.05	68.2	10.15	
11096	54.74	4.21	58.95	74	15.05	peak
11096	37.68	4.21	41.89	54	12.11	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax20 Mode with 5.8G TX CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	61.08	-4.59	56.49	68.2	11.71	peak
11096	55.04	4.21	59.25	74	14.75	peak
11096	38.58	4.21	42.79	54	11.21	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	61.57	-4.59	56.98	68.2	11.22	peak
11096	56.54	4.21	60.75	74	13.25	peak
11096	37.05	4.21	41.26	54	12.74	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax20 Mode with 5.8G TX CH Mid

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	62.35	-4.59	57.76	68.2	10.44	peak
10523	53.47	4.21	57.68	68.2	10.52	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	58.85	-4.59	54.26	68.2	13.94	peak
10523	53.47	4.21	57.68	68.2	10.52	peak
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax20 Mode with 5.8G TX CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	61.25	-4.59	56.66	74	17.34	peak
2705	48.45	-4.59	43.86	54	10.14	AVG
11717	55.67	4.84	60.51	74	13.49	peak
11717	38.65	4.84	43.49	54	10.51	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	60.57	-4.59	55.98	74	18.02	peak
2705	45.98	-4.59	41.39	54	12.61	AVG
11717	52.25	4.84	57.09	74	16.91	peak
11717	37.54	4.84	42.38	54	11.62	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax40 Mode with 5.8G TX CH Low

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	59.23	-4.59	54.64	68.2	13.56	
11096	59.46	4.21	63.67	74	10.33	peak
11096	36.57	4.21	40.78	54	13.22	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	61.65	-4.59	57.06	68.2	11.14	
11096	59.43	4.21	63.64	74	10.36	peak
11096	37.64	4.21	41.85	54	12.15	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.						

Operation Mode: 802.11ax40 Mode with 5.8G TX CH High

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3172	60.64	-4.59	56.05	68.2	12.15	
10523	52.54	4.21	56.75	68.2	11.45	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3172	59.45	-4.59	54.86	68.2	13.34	
10523	50.64	4.21	54.85	68.2	13.35	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Operation Mode: 802.11ax80 Mode with 5.8G TX

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	60.65	-4.59	56.06	68.2	12.14	peak
11096	57.45	4.21	61.66	74	12.34	peak
11096	37.68	4.21	41.89	54	12.11	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	62.57	-4.59	57.98	68.2	10.22	peak
11096	55.74	4.21	59.95	74	14.05	peak
11096	38.54	4.21	42.75	54	11.25	AVG


Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

4.8 Frequency Stability Measurement

4.8.1 Test Specification

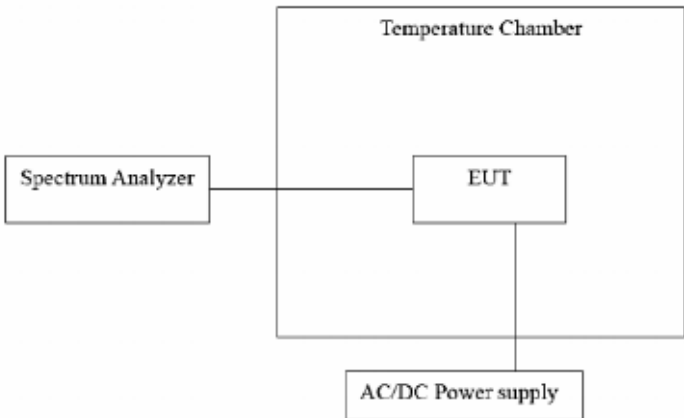Test Requirement:	FCC Part15 Section 15.407(g)
Test Method:	ANSI C63.10: 2020
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	 <pre> graph LR SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end EUT --- P[AC/DC Power supply] </pre>
Test Procedure:	a. The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A

4.8.2 Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
Power meter	Agilent	E4419B	HKE-085	Feb. 19, 2025	Feb. 18, 2026
Power Sensor	Agilent	E9300A	HKE-086	Feb. 19, 2025	Feb. 18, 2026
RF cable	Times	1-40G	HKE-034	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4.8.3 Test Result

Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	40.8V	5744.987	-13	5824.971	-29
	48.0V	5745.014	14	5825.025	25
	55.2V	5745.007	7	5824.987	-13

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5744.989	-11	5824.984	-16
	-20	5744.981	-19	5824.979	-21
	-10	5744.985	-15	5825.024	24
	0	5745.013	13	5825.015	15
	10	5744.982	-18	5825.023	23
	20	5745.027	27	5824.985	-15
	30	5744.964	-36	5825.014	14
	40	5744.977	-23	5825.007	7
	50	5745.027	27	5825.012	12

4.9 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction



The antenna used in this product is an External Antenna, with non-standard SMA connector, need professional installation. It conforms to the standard requirements. The best case gain of the antenna is Antenna port 1: 7.56dBi and Antenna port 2: 7.56dBi.

WIFI ANTENNA

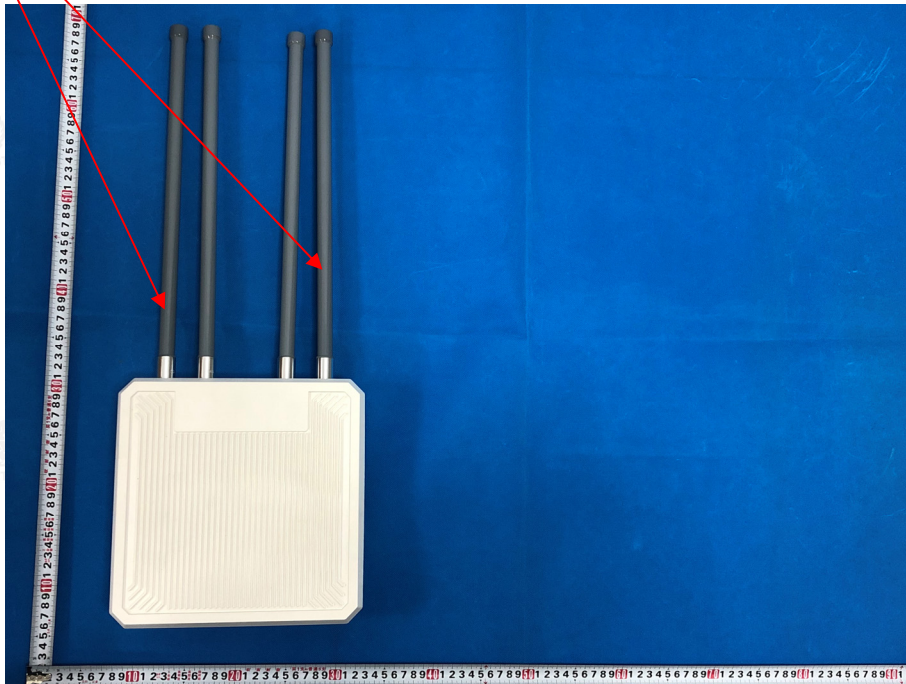

5. Photographs of Test Setup


Radiated Emission

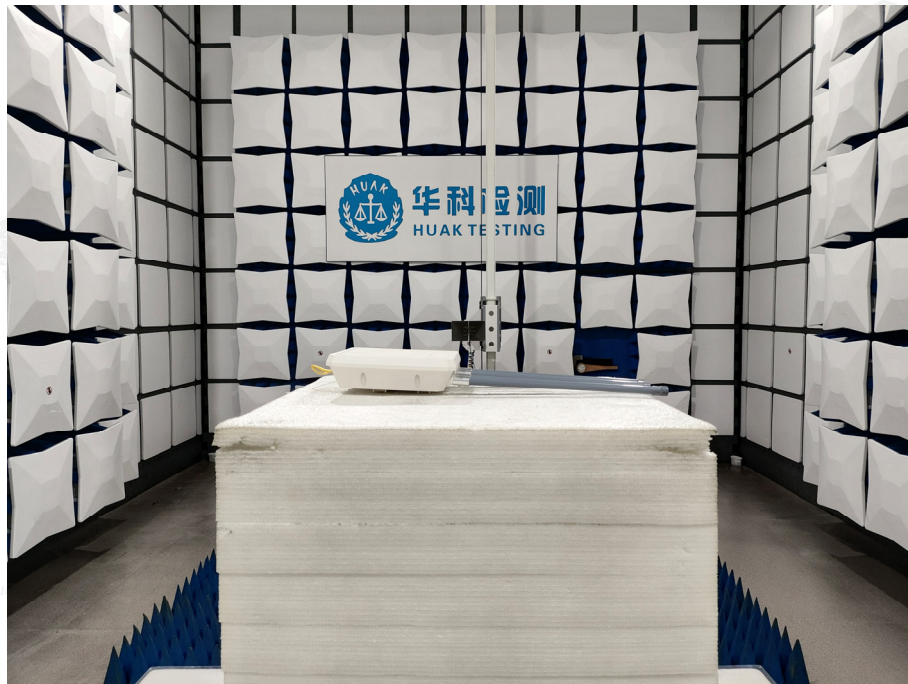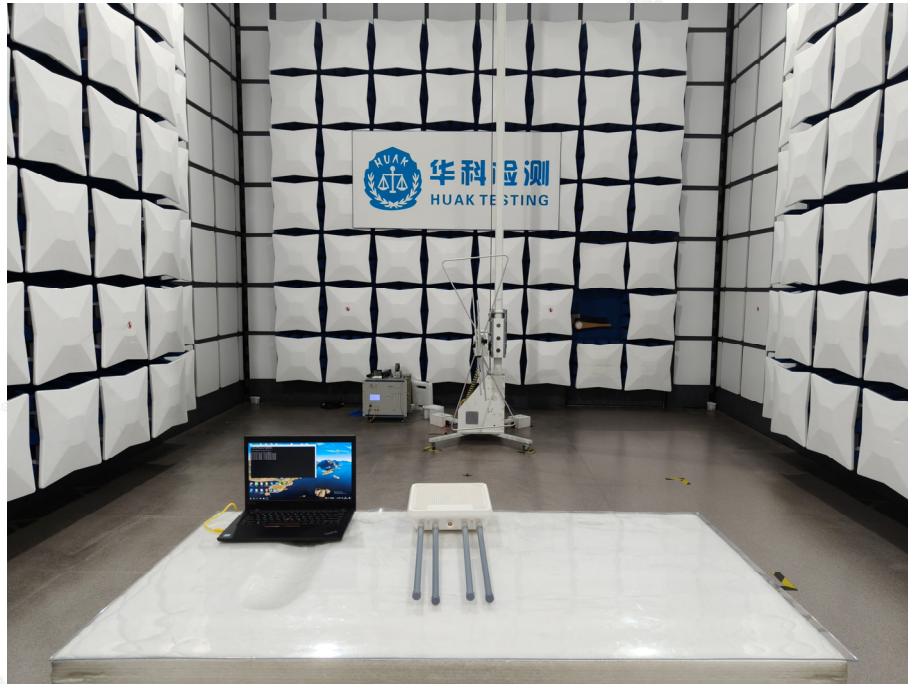


AC Conducted Emission



RF Conducted Emission ANT-1

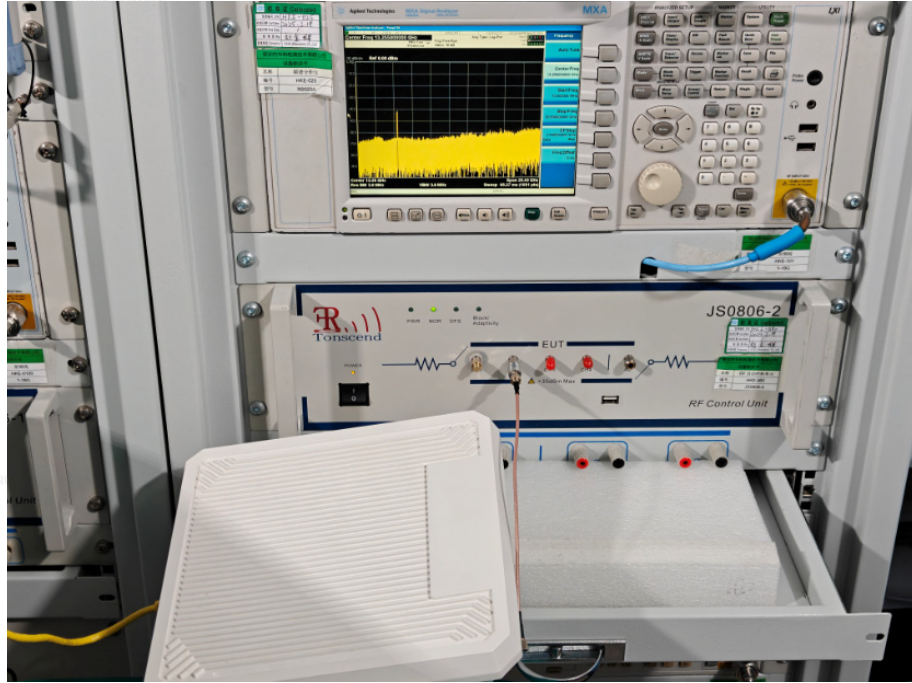

ANT 2

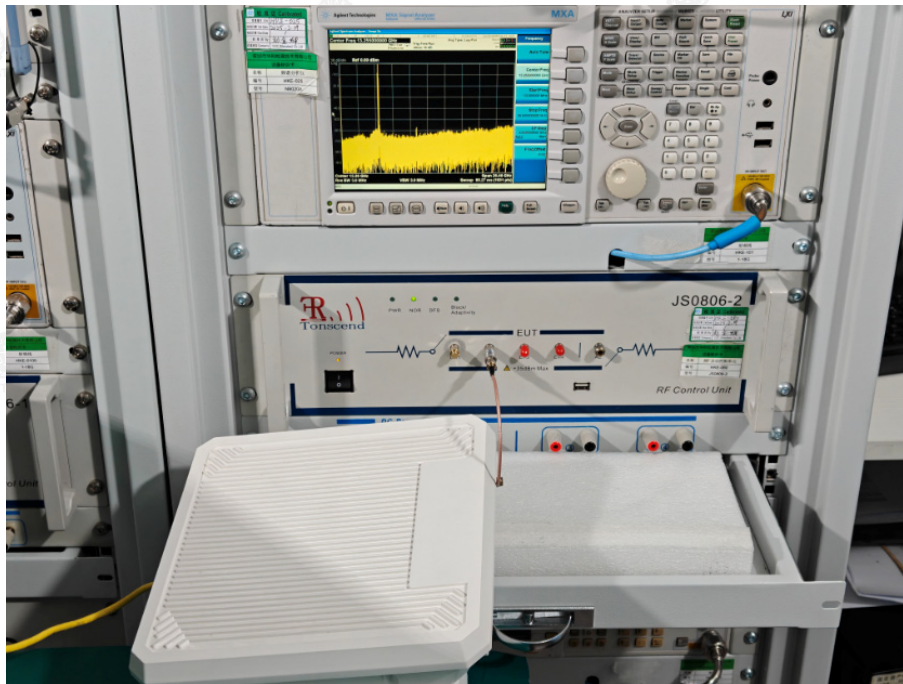

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----