FCC TEST REPORT

For

SHANGHAI KYEE TECHNOLOGY CO.,LTD.

Bedside Interactive Terminal

Model No.: KY-END-BC300W

Prepared For	:	SHANGHAI KYEE TECHNOLOGY CO.,LTD.
Address	:	Room 104, 1/F, Building 4, No.76, Bole Road Jiading Town, Jiading District Shanghai China
Prepared By	:	Shenzhen Anbotek Compliance Laboratory Limited
Address	:	1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102 Tel: (86) 755-26066365 Fax: (86) 755-26014772
Report Number	:	SZAWW180111005-02
Date of Test	:	Jan. 11~Mar. 15, 2018
Date of Report	:	Mar. 15, 2018

Contents

1. General Information....5
1.1. Client Information....5
1.2. Description of Device (EUT)....5
1.3. Auxiliary Equipment Used During Test....5
1.4. Description of Test Modes....6
1.5. List of channels....7
1.6. Description Of Test Setup....8
1.7. Test Equipment List....9
1.8. Measurement Uncertainty....10
1.9. Description of Test Facility....10
2. Summary of Test Results....11
3. Conducted Emission Test....12
3.1. Test Standard and Limit....12
3.2. Test Setup....12
3.3. Test Procedure....12
3.4. Test Data....12
4. Radiation Spurious Emission and Band Edge....15
4.1. Test Standard and Limit....15
4.2. Test Setup....15
4.3. Test Procedure....16
4.4. Test Data....17
5. Maximum Peak Output Power Test....24
5.1. Test Standard and Limit....24
5.2. Test Setup....24
5.3. Test Procedure....24
5.4. Test Data....24
6. 6DB Occupy Bandwidth Test....27
6.1. Test Standard and Limit....27
6.2. Test Setup....27
6.3. Test Procedure....27
6.4. Test Data....27
7. Power Spectral Density Test....30
7.1. Test Standard and Limit....30
7.2. Test Setup....30
7.3. Test Procedure....30
7.4. Test Data....30
8. 100kHz Bandwidth of Frequency Band Edge Requirement....33
8.1. Test Standard and Limit....33
8.2. Test Setup....33
8.3. Test Procedure....33
8.4. Test Data....33
9. Antenna Requirement....37

9.1. Test Standard and Requirement.....37
9.2. Antenna Connected Construction.....37
APPENDIX I -- TEST SETUP PHOTOGRAPH.....38
APPENDIX II -- EXTERNAL PHOTOGRAPH.....39
APPENDIX III -- INTERNAL PHOTOGRAPH.....40

TEST REPORT

Applicant	:	SHANGHAI KYEE TECHNOLOGY CO.,LTD.
Manufacturer	:	SHANGHAI KYEE TECHNOLOGY CO.,LTD.
Product Name	:	Bedside Interactive Terminal
Model No.	:	KY-END-BC300W
Trade Mark	:	N/A
Rating(s)	:	Input: DC 5V, 3A

Test Standard(s)	**:**	**FCC Part15 Subpart C 2017, Section 15.247**
Test Method(s)	**:**	**ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v04**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : : Jan. 11~Mar. 15, 2018

Prepared by : : Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer : : Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer : : Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	SHANGHAI KYEE TECHNOLOGY CO.,LTD.
Address	:	Room 104, 1/F, Building 4, No.76, Bole Road Jiading Town, Jiading District Shanghai China
Manufacturer	:	SHANGHAI KYEE TECHNOLOGY CO.,LTD.
Address	:	Room 104, 1/F, Building 4, No.76, Bole Road Jiading Town, Jiading District Shanghai China

1.2. Description of Device (EUT)

Product Name	:	Bedside Interactive Terminal	
Model No.	:	KY-END-BC300W	
Trade Mark	:	N/A	
Test Power Supply	:	DC 12V	
Product Description	:	Operation Frequency:	2402MHz-2480MHz
		Transfer Rate:	1 Mbits/s
		Number of Channel:	40 Channel
		Modulation Type:	GFSK
		Antenna Type:	PIFA Antenna
		Antenna Gain(Peak):	2.27 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2)This report is for BT4.0.			

1.3. Auxiliary Equipment Used During Test

N/A	:	

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Keeping TX+Charging mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	Keeping TX+Charging mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Keeping TX+Charging mode

Note:
(1) The measurements are performed at the highest, middle, lowest available channels.
(2)The data rate was set in 1Mbps for radiated emission due to the highest RF output power.

1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	09	2420	18	2438	27	2456	36	2474
01	2404	10	2422	19	2440	28	2458	37	2476
02	2406	11	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	39	2480
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		
06	2414	15	2432	24	2450	33	2468		
07	2416	16	2434	25	2452	34	2470		
08	2418	17	2436	26	2454	35	2472		

Note:
1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

1.6. Description Of Test Setup

CE

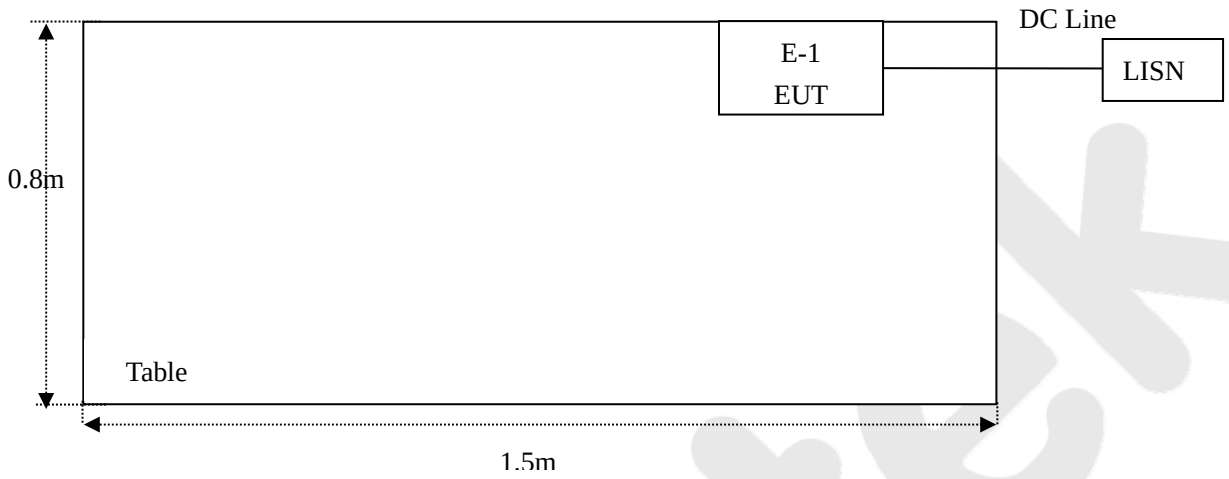

RE

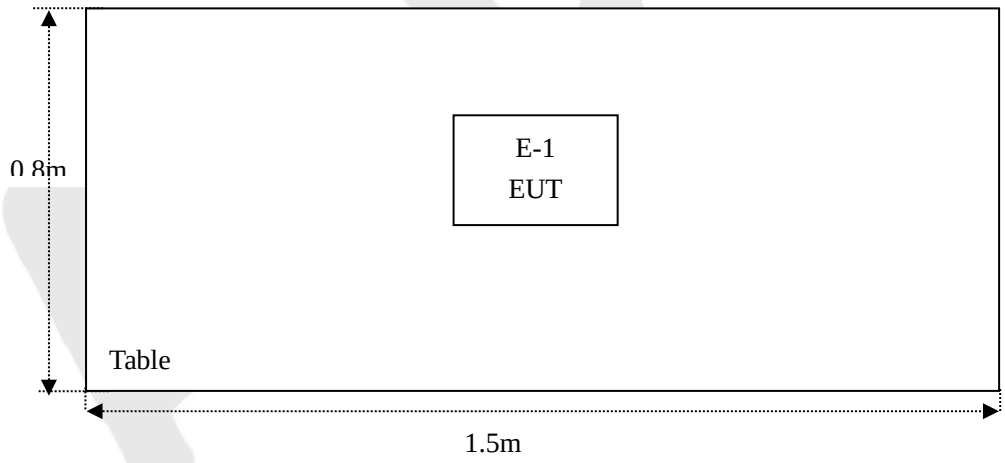

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	Nov. 17, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 17, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Nov. 17, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
11.	Horn Antenna	Schewarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
20.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
21.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80 B	ZJ-17042804	Nov. 01, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registed and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

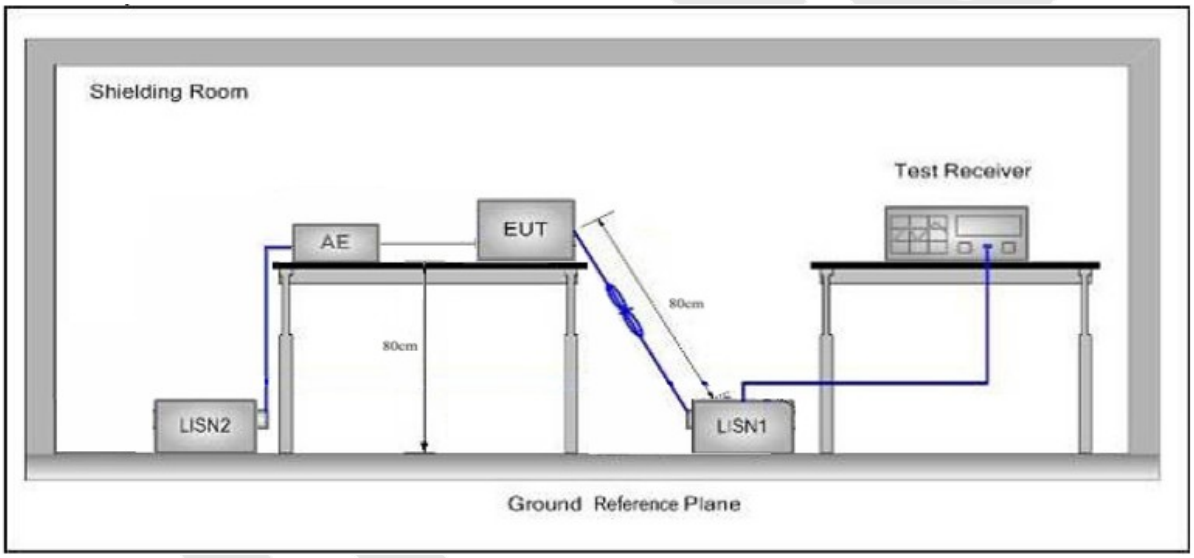

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.
The bandwidth of test receiver (ESCI) set at 9kHz.
The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data

Test Site:	1# Shielded Room
Operating Condition:	Keeping TX+Charging mode
Test Specification:	DC 12V
Comment:	Live Line
	Tem.:25.4℃ Hum.:54%

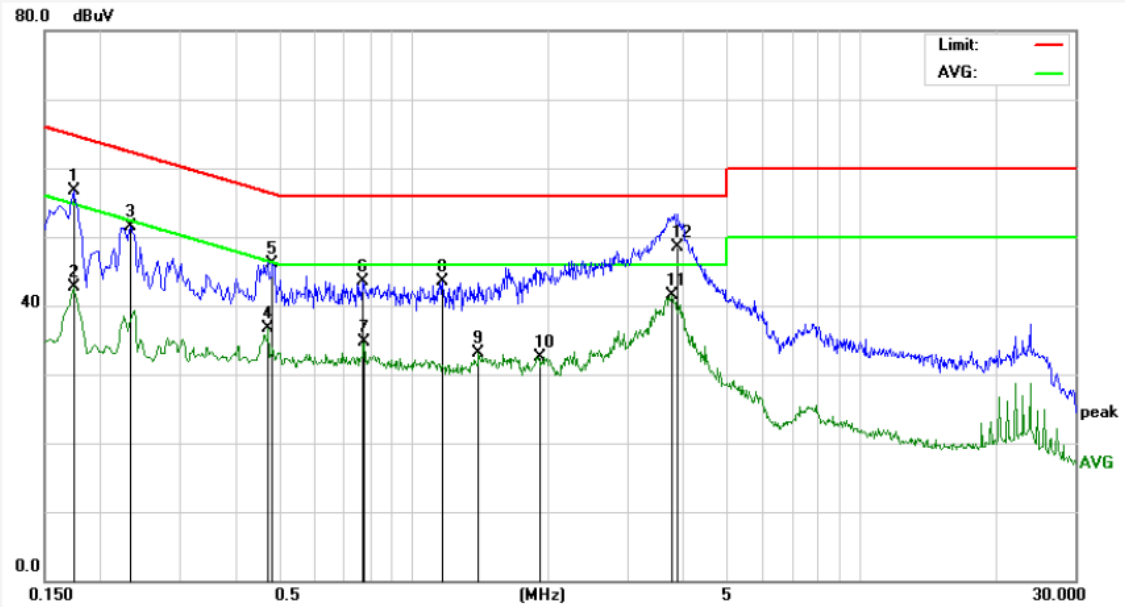

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1737	38.77	17.90	56.67	64.78	-8.11	QP	
2	0.1737	24.75	17.90	42.65	54.78	-12.13	AVG	
3	0.2340	33.63	17.89	51.52	62.30	-10.78	QP	
4	0.4737	18.82	17.97	36.79	46.45	-9.66	AVG	
5	0.4858	28.12	17.97	46.09	56.24	-10.15	QP	
6	0.7740	25.42	18.06	43.48	56.00	-12.52	QP	
7	0.7780	16.70	18.06	34.76	46.00	-11.24	AVG	
8	1.1616	25.35	18.12	43.47	56.00	-12.53	QP	
9	1.4015	14.97	18.13	33.10	46.00	-12.90	AVG	
10	1.9056	14.44	18.14	32.58	46.00	-13.42	AVG	
11	3.7820	23.30	18.18	41.48	46.00	-4.52	AVG	
12	3.8900	30.33	18.18	48.51	56.00	-7.49	QP	

Conducted Emission Test Data

Test Site:	1# Shielded Room
Operating Condition:	Keeping TX+Charging mode
Test Specification:	DC 12V
Comment:	Neutral Line
	Tem.:25.4℃ Hum.:54%

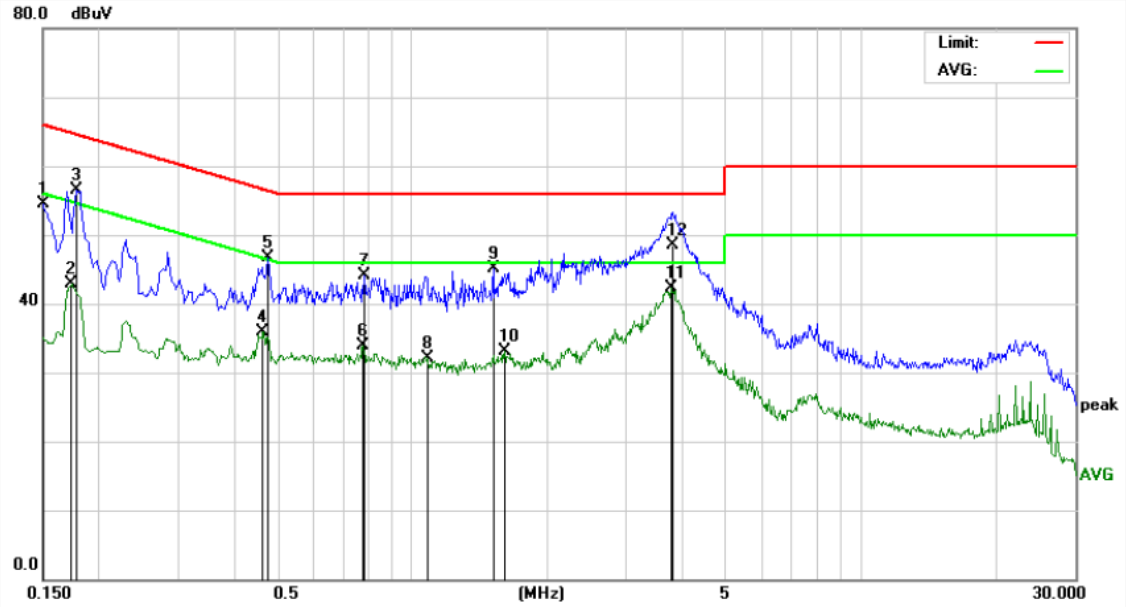

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1499	36.51	17.90	54.41	66.00	-11.59	QP	
2	0.1737	25.02	17.90	42.92	54.78	-11.86	AVG	
3	0.1779	38.53	17.90	56.43	64.58	-8.15	QP	
4	0.4660	17.98	17.96	35.94	46.58	-10.64	AVG	
5	0.4778	28.68	17.97	46.65	56.38	-9.73	QP	
6	0.7780	15.89	18.06	33.95	46.00	-12.05	AVG	
7	0.7820	25.96	18.06	44.02	56.00	-11.98	QP	
8	1.0820	13.93	18.12	32.05	46.00	-13.95	AVG	
9	1.5180	26.90	18.13	45.03	56.00	-10.97	QP	
10	1.6100	14.92	18.13	33.05	46.00	-12.95	AVG	
11	3.7740	24.09	18.18	42.27	46.00	-3.73	AVG	
12	3.8060	30.33	18.18	48.51	56.00	-7.49	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

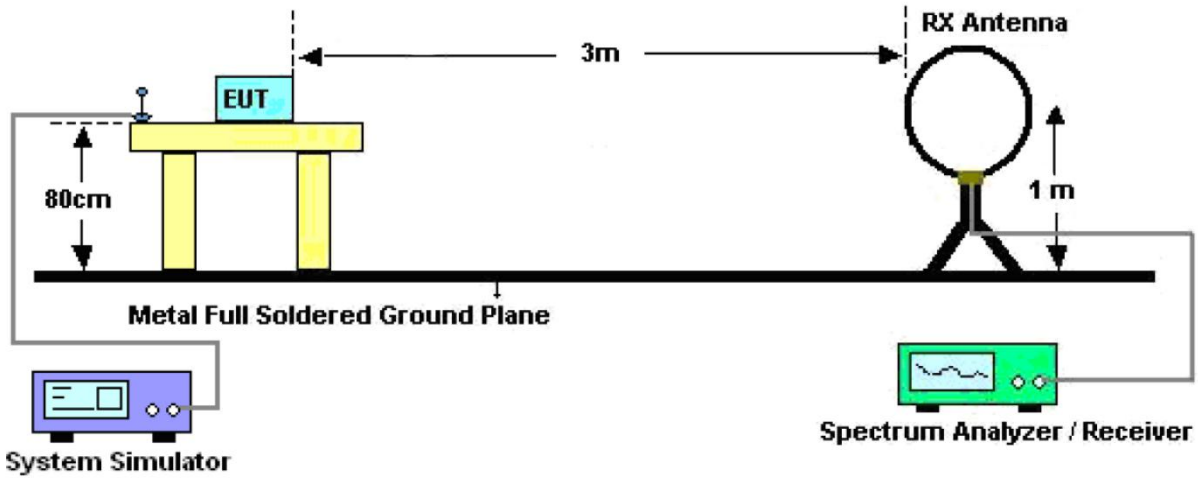

Figure 1. Below 30MHz

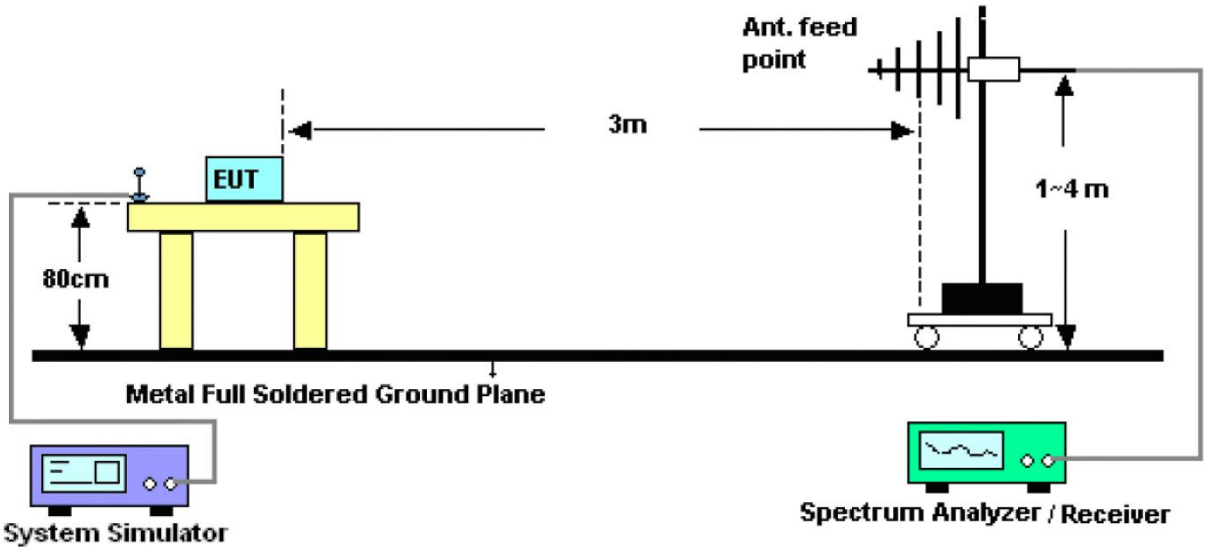

Figure 2. 30MHz to 1GHz

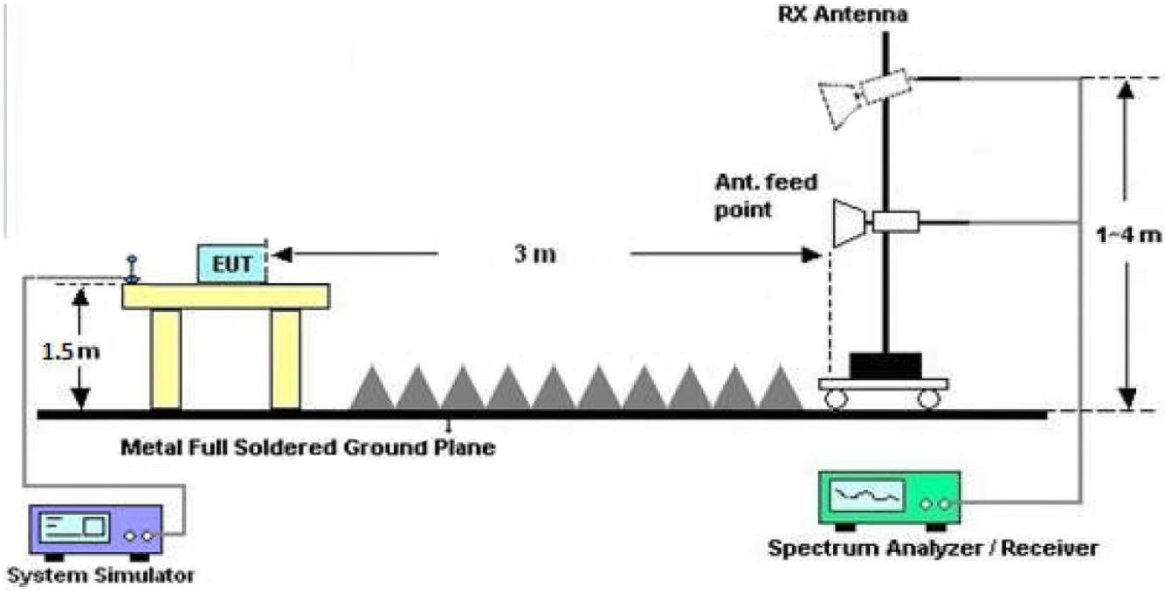

Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.
For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.
The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.
For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying

aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:
RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:
RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:
RBW = 100kHz, VBW =300kHz,Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:
RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.
RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)

Job No.:	SZAWW180111005-02	Temp.(℃)/Hum.(%RH)	24.3℃/55%RH
Standard:	FCC PART 15C	Power Source:	DC 12V
Test Mode:	Keeping TX+Charging mode	Polarization:	Horizontal

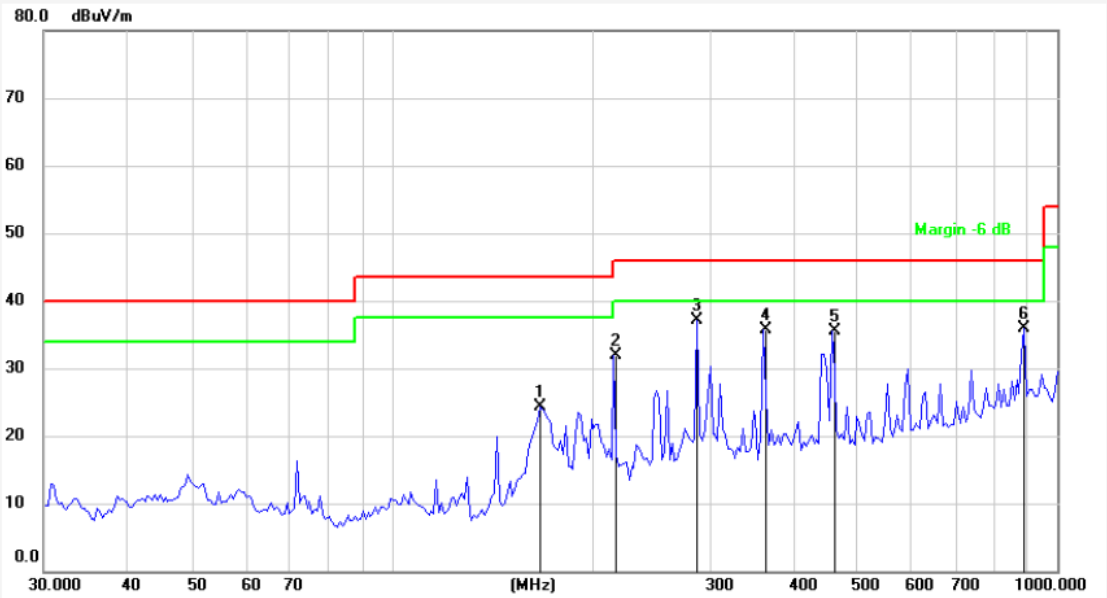

No.	Freq. (MHz)	Reading (dBuV/m)	Factor ()	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	167.2366	43.23	-18.85	24.38	43.50	-19.12	QP	300	0	
2	215.6456	47.67	-15.70	31.97	43.50	-11.53	QP	300	126	
3	287.9904	50.95	-13.85	37.10	46.00	-8.90	QP	300	145	
4	361.7139	47.94	-12.23	35.71	46.00	-10.29	QP	300	236	
5	458.3102	46.01	-10.42	35.59	46.00	-10.41	QP	300	248	
6	892.2907	39.43	-3.44	35.99	46.00	-10.01	QP	300	360	

Test Results (30~1000MHz)

Job No.:	SZAWW180111005-02	Temp.(℃)/Hum.(%RH):	24.3℃/55%RH
Standard:	FCC PART 15C	Power Source:	DC 12V
Test Mode:	Keeping TX+Charging mode	Polarization:	Vertical

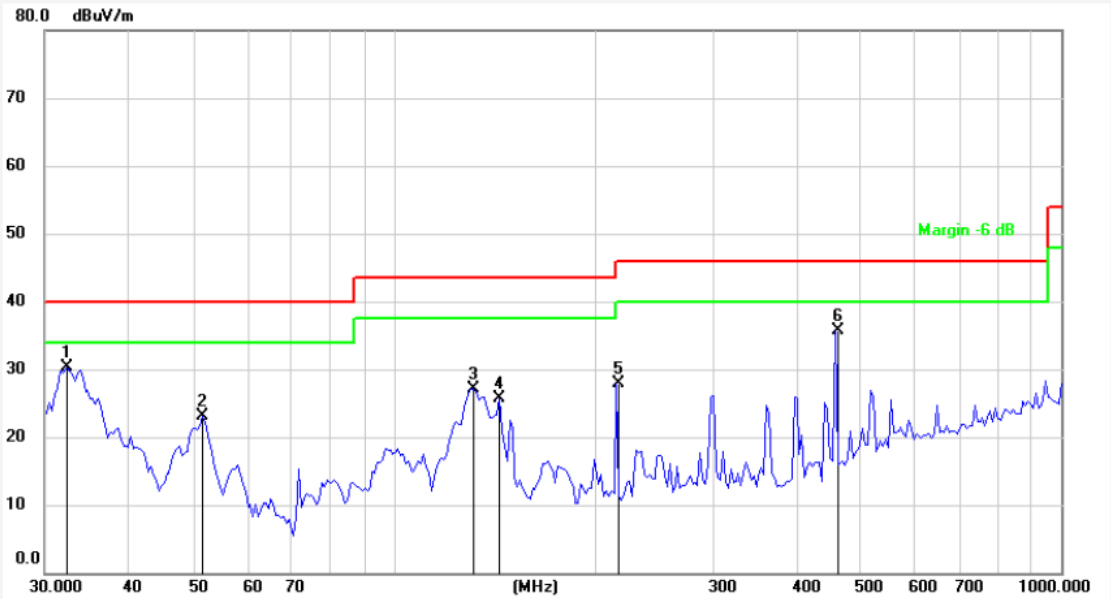

No.	Freq. (MHz)	Reading (dBuV/m)	Factor ()	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.4628	48.10	-17.72	30.38	40.00	-9.62	QP	300	0	
2	51.6613	38.18	-15.14	23.04	40.00	-16.96	QP	300	125	
3	131.9889	46.94	-19.85	27.09	43.50	-16.41	QP	300	134	
4	144.0817	45.69	-20.03	25.66	43.50	-17.84	QP	300	245	
5	215.6456	43.63	-15.70	27.93	43.50	-15.57	QP	300	268	
6	458.3102	46.14	-10.42	35.72	46.00	-10.28	QP	300	360	

Test Results (1GHz-25GHz)

Test Mode: CH 00					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	37.60	34.04	6.58	34.09	44.13	74.00	-29.87	V
7206.00	32.03	37.11	7.73	34.50	42.37	74.00	-31.63	V
9608.00	31.64	39.31	9.23	34.79	45.39	74.00	-28.61	V
12010.00	*					74.00		V
14412.00	*					74.00		V
4804.00	41.95	34.04	6.58	34.09	48.48	74.00	-25.52	H
7206.00	33.81	37.11	7.73	34.50	44.15	74.00	-29.85	H
9608.00	31.10	39.31	9.23	34.79	44.85	74.00	-29.15	H
12010.00	*					74.00		H
14412.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	26.36	34.04	6.58	34.09	32.89	54.00	-21.11	V
7206.00	20.68	37.11	7.73	34.50	31.02	54.00	-22.98	V
9608.00	19.74	39.31	9.23	34.79	33.49	54.00	-20.51	V
12010.00	*					54.00		V
14412.00	*					54.00		V
4804.00	30.62	34.04	6.58	34.09	37.15	54.00	-16.85	H
7206.00	22.87	37.11	7.73	34.50	33.21	54.00	-20.79	H
9608.00	19.49	39.31	9.23	34.79	33.24	54.00	-20.76	H
12010.00	*					54.00		H
14412.00	*					54.00		H

Test Results (1GHz-25GHz)

Test Mode: CH 19					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	36.35	34.38	6.69	34.09	43.33	74.00	-30.67	V
7320.00	31.20	37.22	7.78	34.53	41.67	74.00	-32.33	V
9760.00	30.91	39.46	9.35	34.80	44.92	74.00	-29.08	V
12200.00	*					74.00		V
14640.00	*					74.00		V
4880.00	40.44	34.38	6.69	34.09	47.42	74.00	-26.58	H
7320.00	32.87	37.22	7.78	34.53	43.34	74.00	-30.66	H
9760.00	30.24	39.46	9.35	34.80	44.25	74.00	-29.75	H
12200.00	*					74.00		H
14640.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	25.36	34.38	6.69	34.09	32.34	54.00	-21.66	V
7320.00	20.00	37.22	7.78	34.53	30.47	54.00	-23.53	V
9760.00	19.13	39.46	9.35	34.80	33.14	54.00	-20.86	V
12200.00	*					54.00		V
14640.00	*					54.00		V
4880.00	29.48	34.38	6.69	34.09	36.46	54.00	-17.54	H
7320.00	22.11	37.22	7.78	34.53	32.58	54.00	-21.42	H
9760.00	18.79	39.46	9.35	34.80	32.80	54.00	-21.20	H
12200.00	*					54.00		H
14640.00	*					54.00		H

Test Results (1GHz-25GHz)

Test Mode: CH 39					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	35.82	34.72	6.79	34.09	43.24	74.00	-30.76	V
7440.00	30.84	37.34	7.82	34.57	41.43	74.00	-32.57	V
9920.00	30.59	39.62	9.46	34.81	44.86	74.00	-29.14	V
12400.00	*					74.00		V
14880.00	*					74.00		V
4960.00	39.80	34.72	6.79	34.09	47.22	74.00	-26.78	H
7440.00	32.47	37.34	7.82	34.57	43.06	74.00	-30.94	H
9920.00	29.87	39.62	9.46	34.81	44.14	74.00	-29.86	H
12400.00	*					74.00		H
14880.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	24.95	34.72	6.79	34.09	32.37	54.00	-21.63	V
7440.00	19.73	37.34	7.82	34.57	30.32	54.00	-23.68	V
9920.00	18.89	39.62	9.46	34.81	33.16	54.00	-20.84	V
12400.00	*					54.00		V
14880.00	*					54.00		V
4960.00	29.02	34.72	6.79	34.09	36.44	54.00	-17.56	H
7440.00	21.80	37.34	7.82	34.57	32.39	54.00	-21.61	H
9920.00	18.50	39.62	9.46	34.81	32.77	54.00	-21.23	H
12400.00	*					54.00		H
14880.00	*					54.00		H

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:

Test Mode: CH 00					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	45.61	29.15	3.41	34.01	44.16	74.00	-29.84	H
2400.00	62.79	29.16	3.43	34.01	61.37	74.00	-12.63	H
2390.00	46.42	29.15	3.41	34.01	44.97	74.00	-29.03	V
2400.00	65.12	29.16	3.43	34.01	63.70	74.00	-10.30	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	35.54	29.15	3.41	34.01	34.09	54.00	-19.91	H
2400.00	46.94	29.16	3.43	34.01	45.52	54.00	-8.48	H
2390.00	35.68	29.15	3.41	34.01	34.23	54.00	-19.77	V
2400.00	43.85	29.16	3.43	34.01	42.43	54.00	-11.57	V

Test Mode: CH 39					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	48.04	29.28	3.53	34.03	46.82	74.00	-27.18	H
2500.00	46.69	29.30	3.56	34.03	45.52	74.00	-28.48	H
2483.50	49.34	29.28	3.53	34.03	48.12	74.00	-25.88	V
2500.00	47.95	29.30	3.56	34.03	46.78	74.00	-27.22	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.40	29.28	3.53	34.03	37.18	54.00	-16.82	H
2500.00	36.01	29.30	3.56	34.03	34.84	54.00	-19.16	H
2483.50	39.84	29.28	3.53	34.03	38.62	54.00	-15.38	V
2500.00	36.16	29.30	3.56	34.03	34.99	54.00	-19.01	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW ≥DTS bandwidth.
2. Set the VBW≥3*RBW.
3. Set the span≥ 3*RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

5.4. Test Data

Test Item	:	Max. peak output power	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 12V	Temperature	:	24℃
Test Result	:	PASS	Humidity	:	55%RH

Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
2402	**3.345**	30	PASS
2440	3.248	30	PASS
2480	2.036	30	PASS

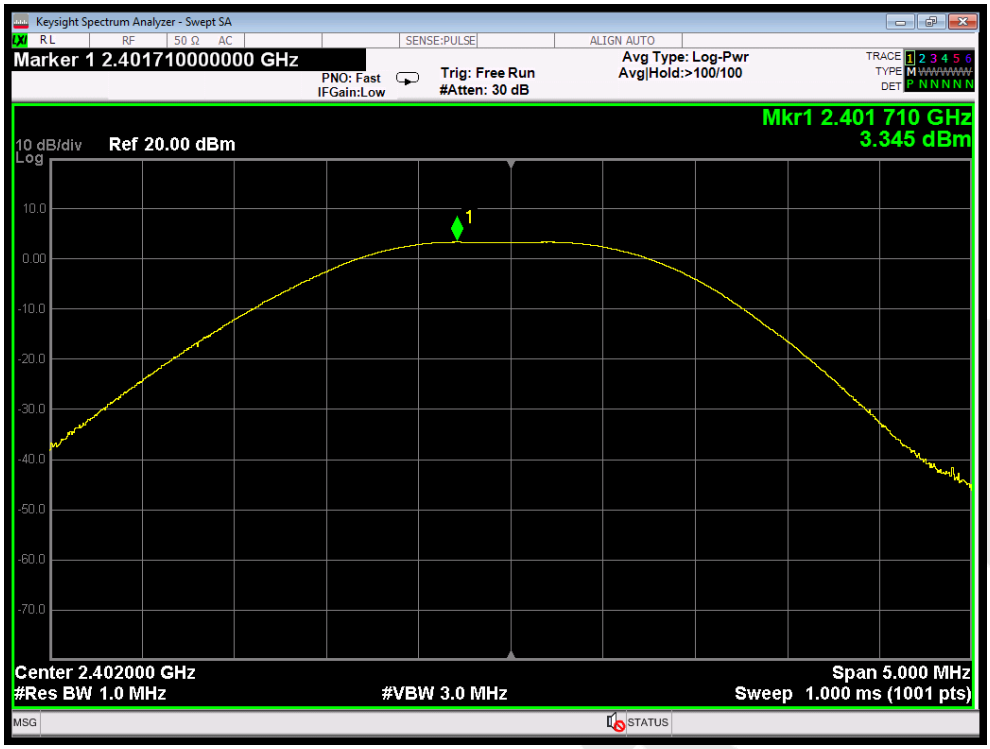

CH: Low

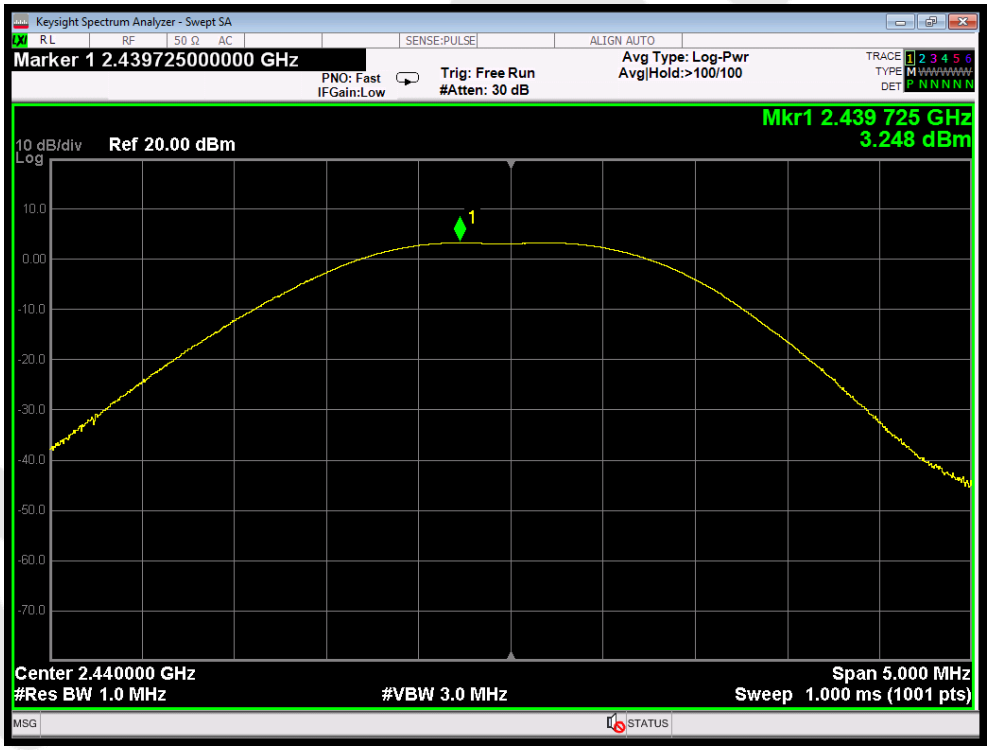

CH: Middle

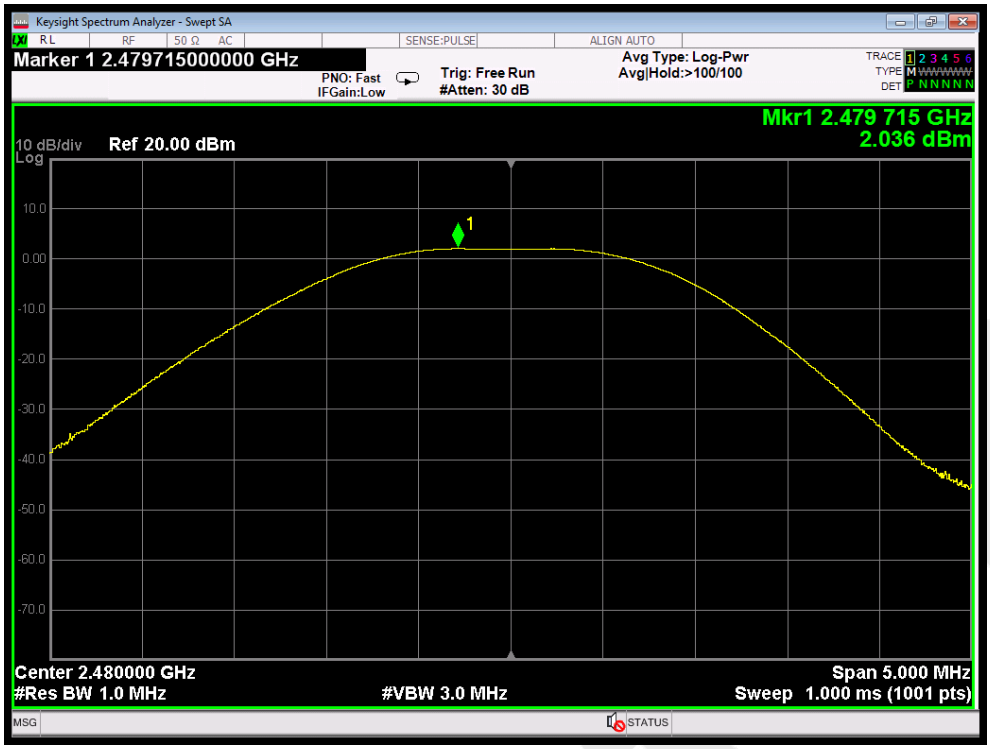
Keysight Spectrum Analyzer - Swept SA
Marker 1 2.479715000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
Mkr1 2.479 715 GHz
2.036 dBm
10 dB/div
Log
Ref 20.00 dBm
Center 2.480000 GHz
#Res BW 1.0 MHz
#VBW 3.0 MHz
Span 5.000 MHz
Sweep 1.000 ms (1001 pts)

CH: High

6. 6DB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
   RBW = 100kHz, VBW⩾3*RBW =300kHz,
   Detector= Peak
   Trace mode= Max hold.
   Sweep- auto couple.
4. Mark the peak frequency and –6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Test Item	:	6dB Bandwidth	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 12V	Temperature	:	24℃
Test Result	:	PASS	Humidity	:	55%RH

Channel	Frequency(MHz)	Bandwidth (kHz)	Limit (kHz)	Results
Low	2402	718.3	>500	PASS
Middle	2440	713.9		PASS
High	2480	714.4		PASS

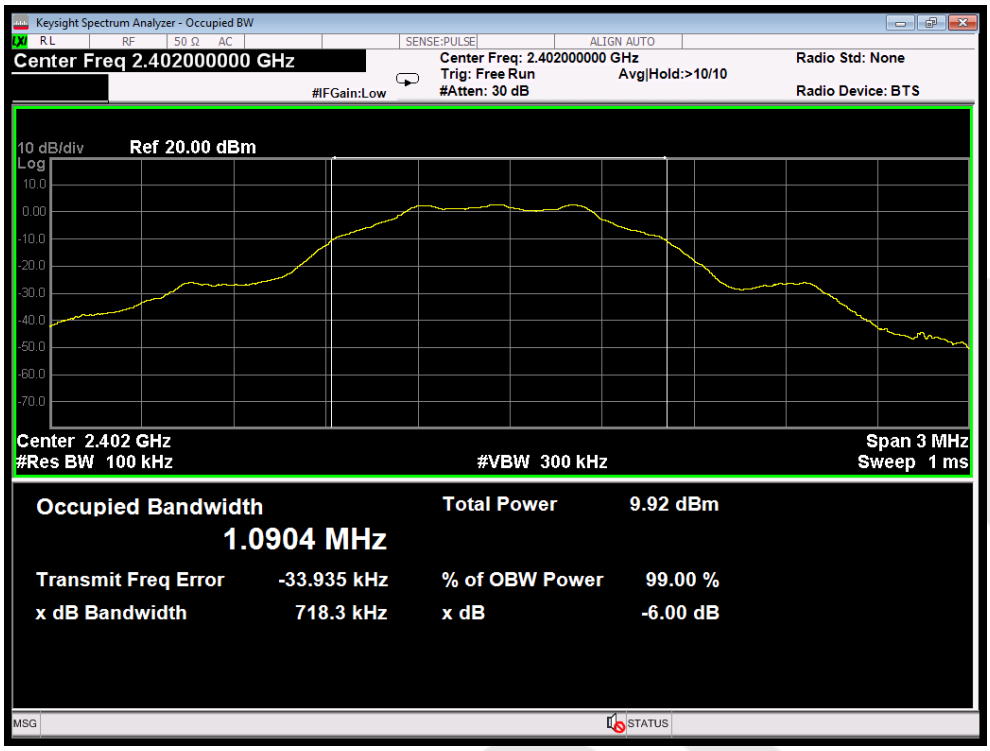

CH: Low

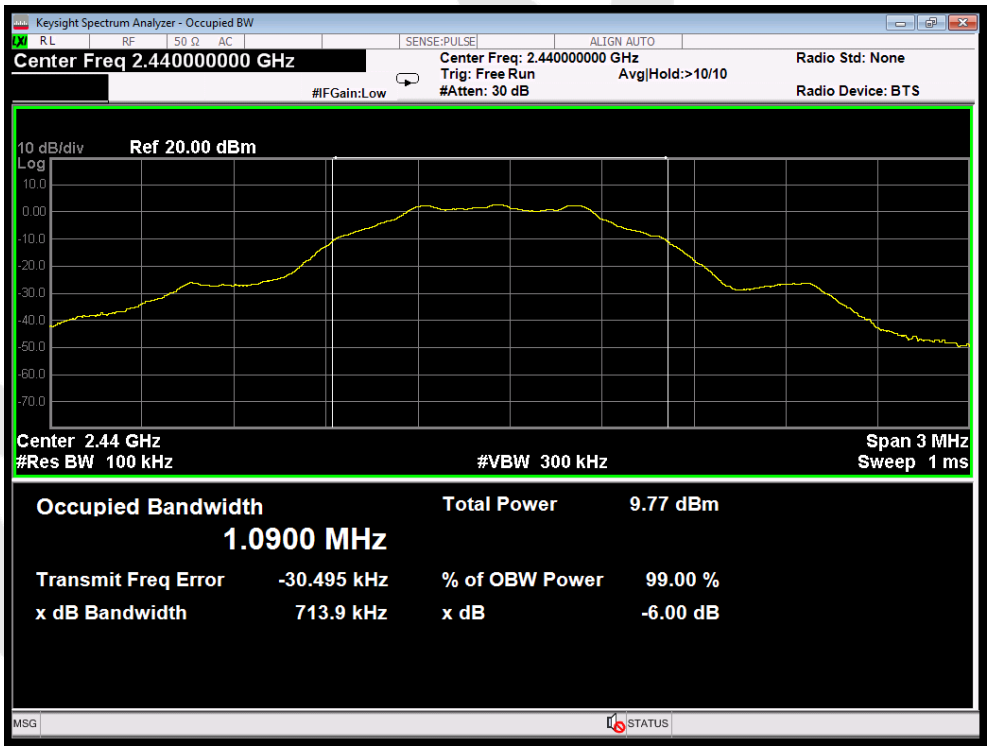

CH: Middle

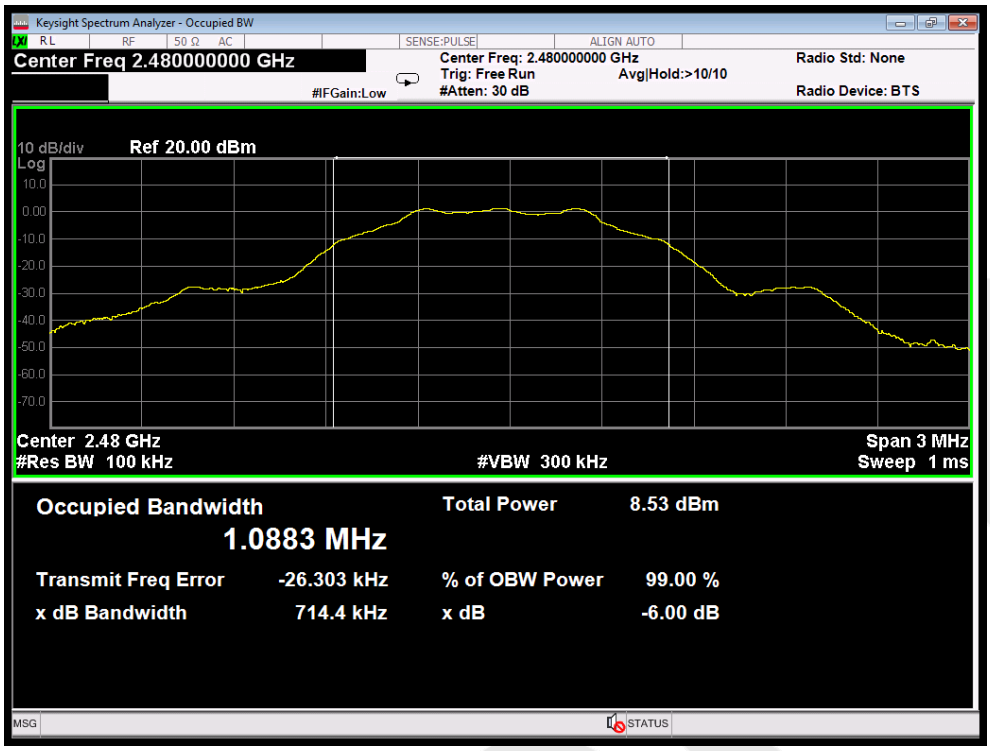
Keysight Spectrum Analyzer - Occupied BW
Center Freq 2.480000000 GHz
Center Freq: 2.480000000 GHz
Trig: Free Run
Avg|Hold:>10/10
#Atten: 30 dB
#IFGain:Low
Radio Std: None
Radio Device: BTS
10 dB/div
Ref 20.00 dBm
Center 2.48 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 3 MHz
Sweep 1 ms
Occupied Bandwidth
1.0883 MHz
Total Power 8.53 dBm
Transmit Freq Error -26.303 kHz
% of OBW Power 99.00 %
x dB Bandwidth 714.4 kHz
x dB -6.00 dB

CH: High

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm

7.2. Test Setup



7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data

Test Item	:	Power Spectral Density	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 12V	Temperature	:	24℃
Test Result	:	PASS	Humidity	:	55%RH

Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
Low	2402	-10.518	8.00	PASS
Middle	2440	-10.902	8.00	PASS
High	2480	-11.979	8.00	PASS

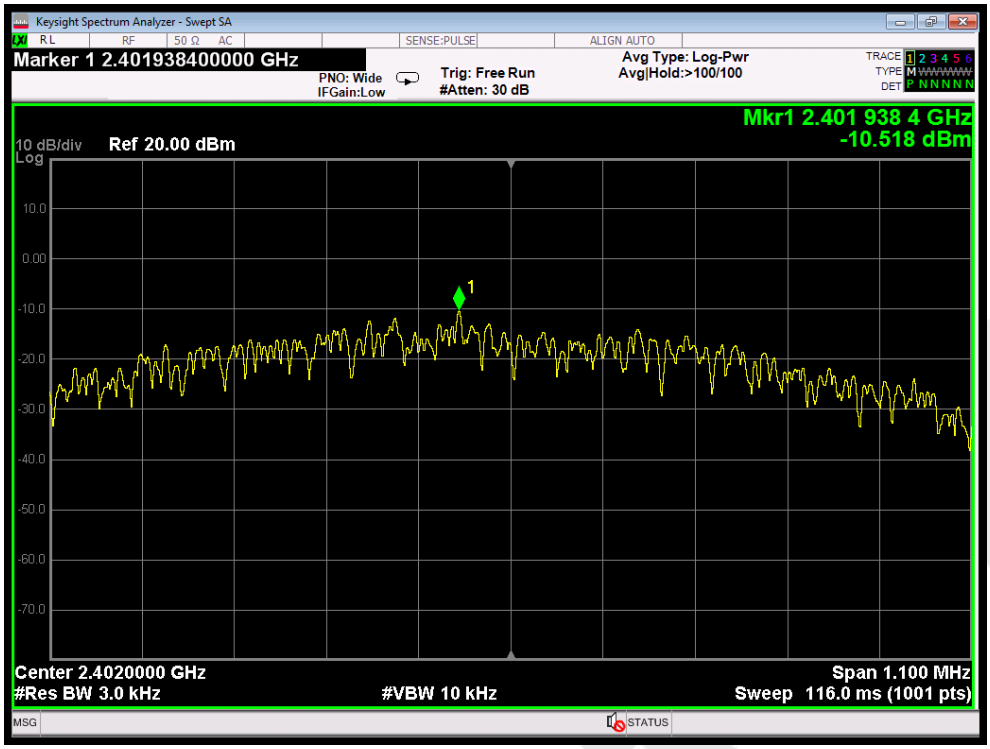

CH: Low

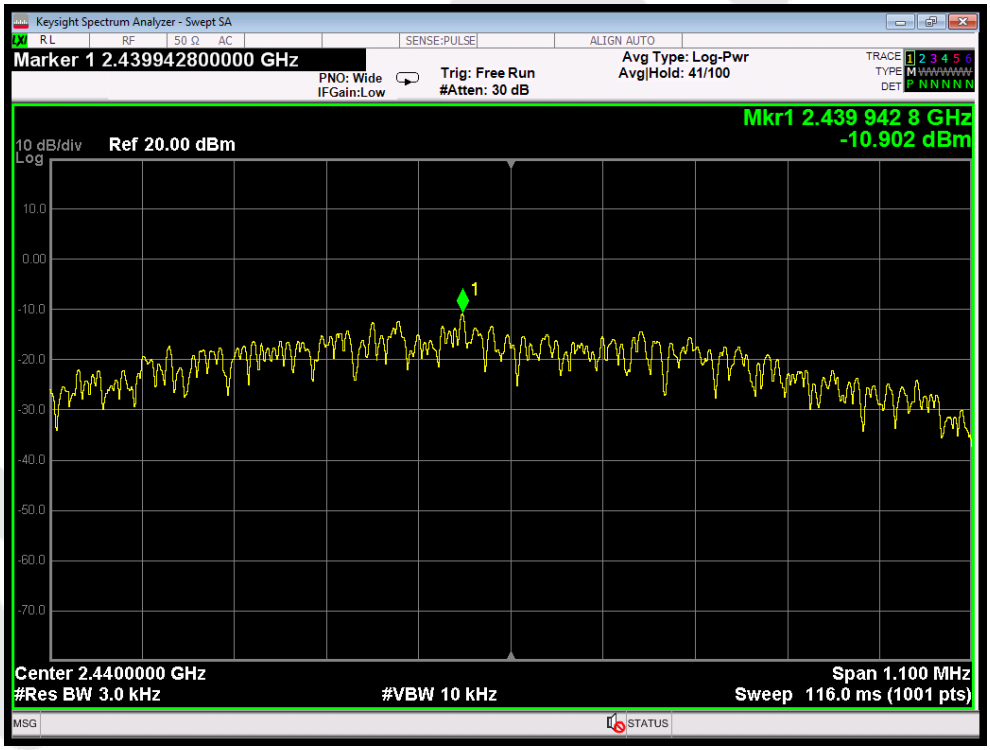

CH: Middle

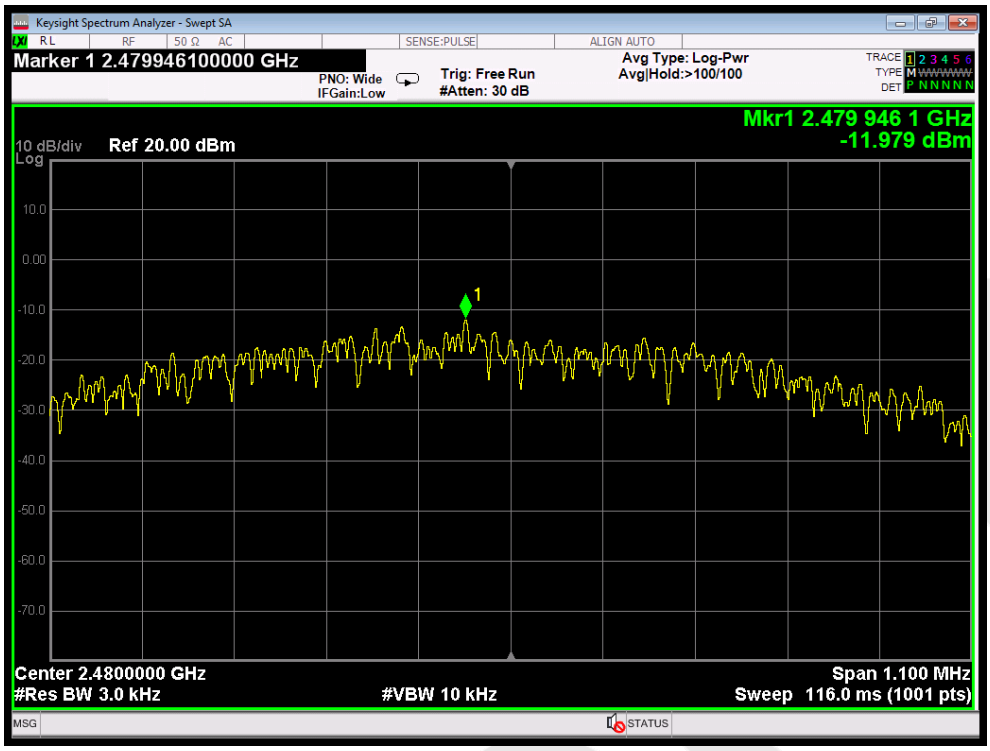
Keysight Spectrum Analyzer - Swept SA
Marker 1 2.479946100000 GHz
PNO: Wide
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
Mkr1 2.479 946 1 GHz
-11.979 dBm
10 dB/div
Ref 20.00 dBm
Log
Center 2.4800000 GHz
#Res BW 3.0 kHz
#VBW 10 kHz
Span 1.100 MHz
Sweep 116.0 ms (1001 pts)

CH: High

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2. Test Setup



8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

8.4. Test Data

Test Item	:	Band edge	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 12V	Temperature	:	24℃
Test Result	:	PASS	Humidity	:	55%RH

Frequency Band (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Results
2400	56.570	>20	PASS
2483.5	59.466	>20	PASS

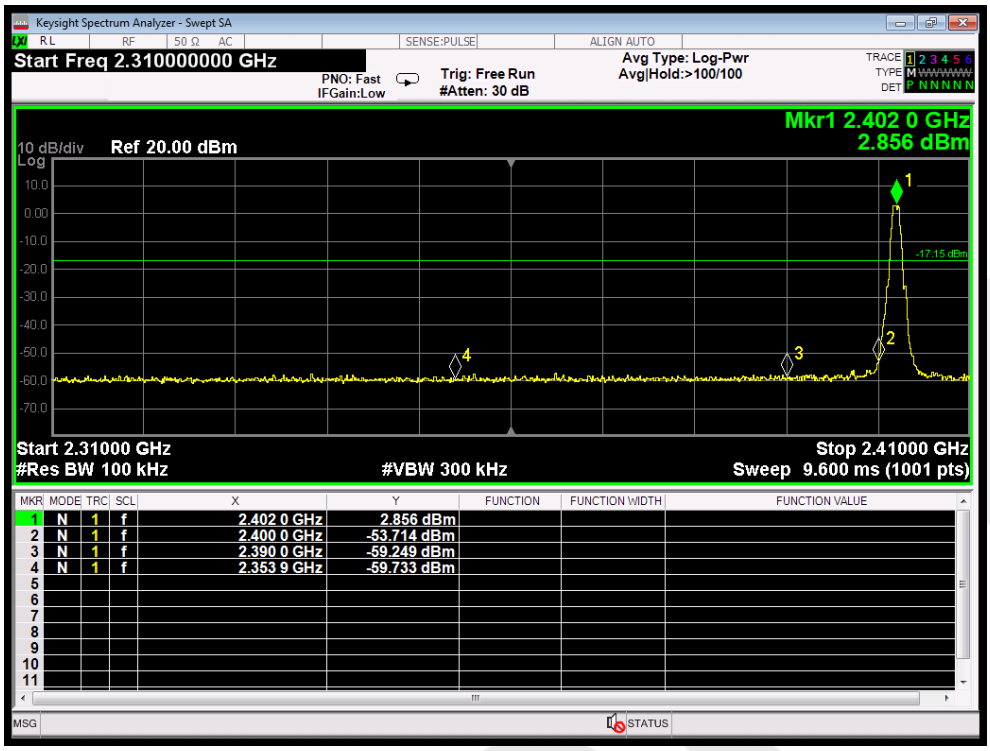

CH: Low

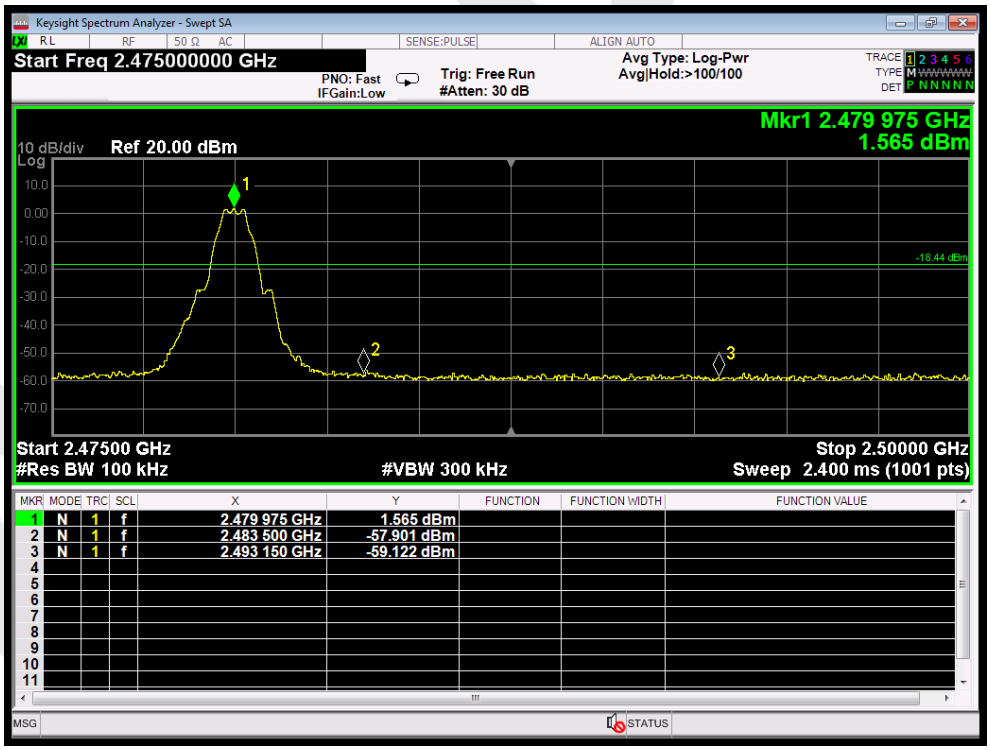

CH: High

Conducted Emission Method

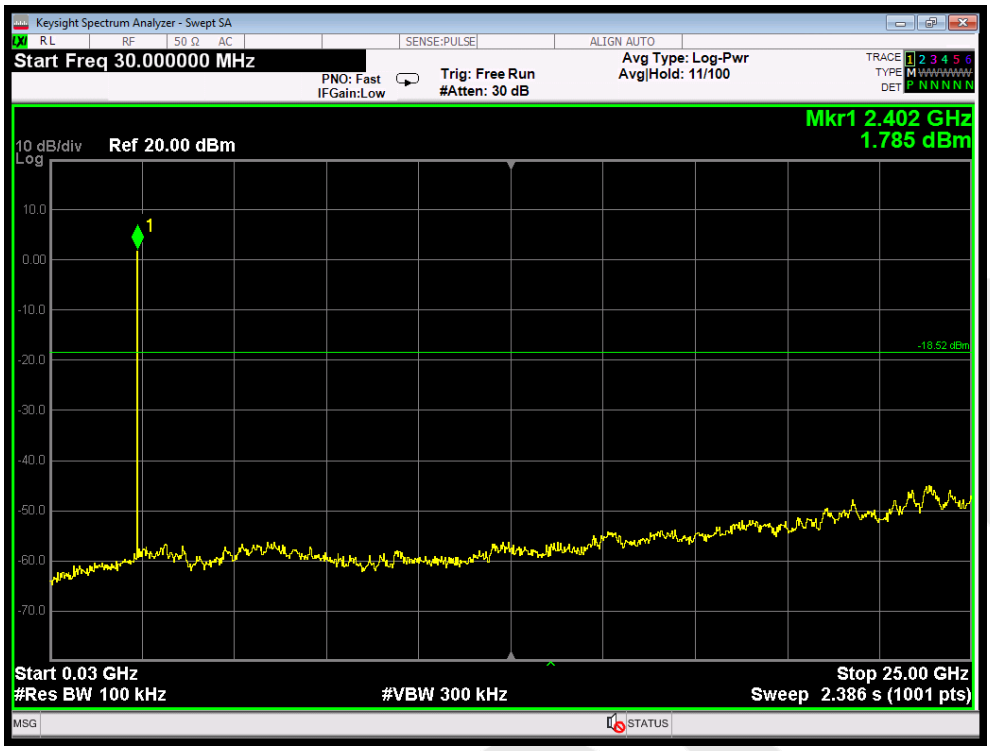

CH: Low

CH: Middle

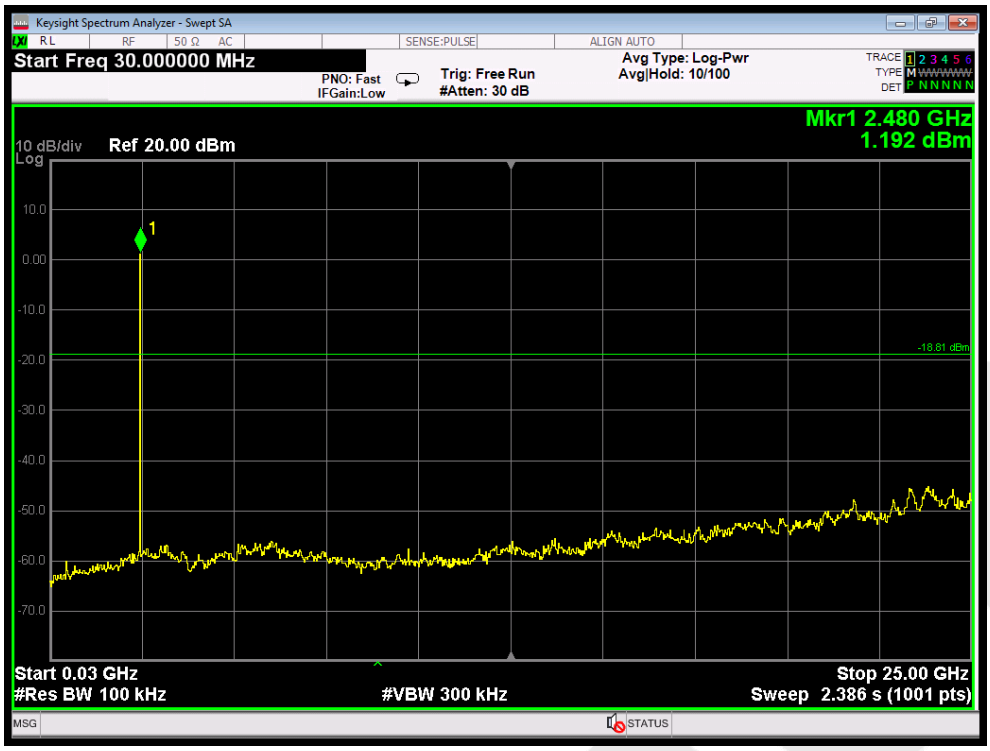
Keysight Spectrum Analyzer - Swept SA
Start Freq 30.000000 MHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold: 10/100
Mkr1 2.480 GHz
1.192 dBm
10 dB/div
Ref 20.00 dBm
-18.81 dBm
Start 0.03 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 25.00 GHz
Sweep 2.386 s (1001 pts)

CH: High

9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.2. Antenna Connected Construction

The BT antenna is a PIFA Antenna which permanently attached, and the best case gain of the antenna is 2.27 dBi. It complies with the standard requirement.

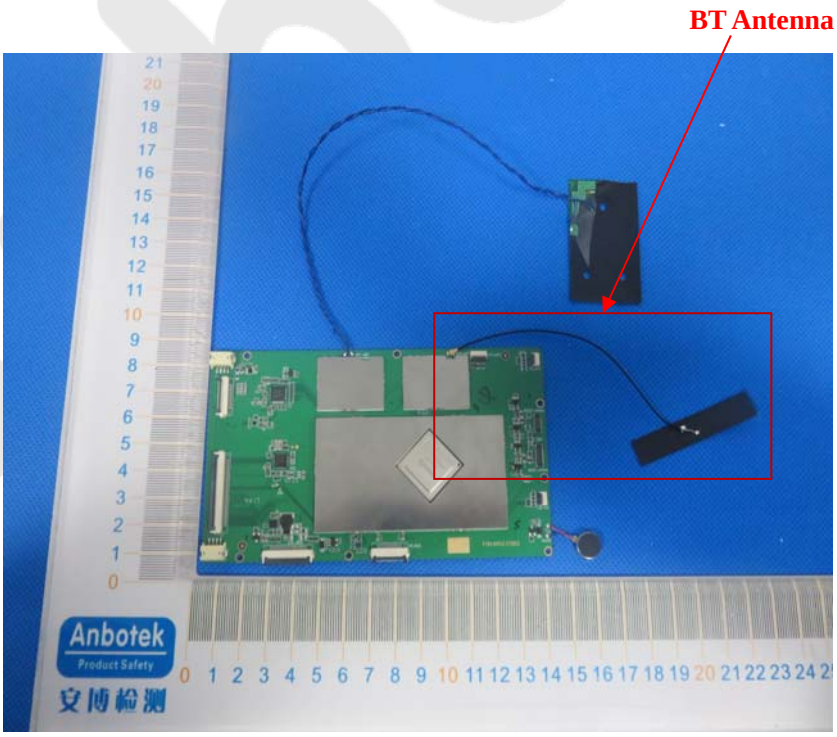

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please see the test report of SZAWW180111005-01

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please see the test report of SZAWW180111005-01

APPENDIX III -- INTERNAL PHOTOGRAPH

Please see the test report of SZAWW180111005-01

End of Report