M2-V23.01

Zwide®

说 明 书
USER MANUAL
ユーザーマニュアル

无线领夹麦克风
Wireless Lavalier Microphone
ワイヤレスピンマイク

简介/Introduction

C2 为双通道无线收音系统，包含两个无线发射器及一个双通道接收器。支持同时录制两个音源的声音。支持远距离无线传输（140米）。
发射器内置全指向型麦克风，同时支持外接麦克风。自带夹子方便随身使用。发射器及接收器配备LCD屏，实时显示录音音量，无线信号，增益，码流，声道模式等信息。通过接收器TRRS/USB-C接口，可连接相机、手机、平板电脑等录音设备，为视频拍摄，直播等提供优质录音效果。标配充电盒可同时为发射器和接收器充电。另接收器拥有监听接口，实时返耳。
发射器内置64GB存储，LP设置为256kb/s，可以录音270小时。SHQ设置为1536kb/s，可以录音45小时

C2 is a dual channel wireless microphone system, including two transmitters (TX) and one receiver (RX), which is able to record two sound sources simultaneously at a distance of up to 140m.
TX has a built-in omnidirectional microphone, supports the use of an external microphone. And it has clip easy to use in any scenario. TX and RX boast LCD, on which users can view the real-time record volume, wireless signal strength, gain, data rate, sound track and more. By utilizing the TRRS/USB-C port, RX can be connected to a camera, mobile phone, tablet, computer or other devices. For video shooting, network broadcast, vlog, interview recording and more scenarios to provide high quality audio. The Charging Case provided is able to charge the TX and RX simultaneously and turn OFF automatically. The RX can also be connected to a computer to use as a microphone and with the monitor port the audio can be monitored in real time.
With the internal 64GB storage, the TX is able to record audio in local storage (recorder pen function), for LP seting was 256kb/s, up to 270 hours; and SHQ seting was 1536kb/s, support to 45 hours.

FCC标准，在室外空旷无干扰环境下测得。
Tested in an obstruction-free outdoor environment.

⚠ 不同套装内所含物品不同，请以实际购买套装为准。如无特殊说明，本文描述均为通用功能。
M2 (Plus) has different combos, which include additional items. The features described in this user manual are general and apply to all combos.

发射器/ TX

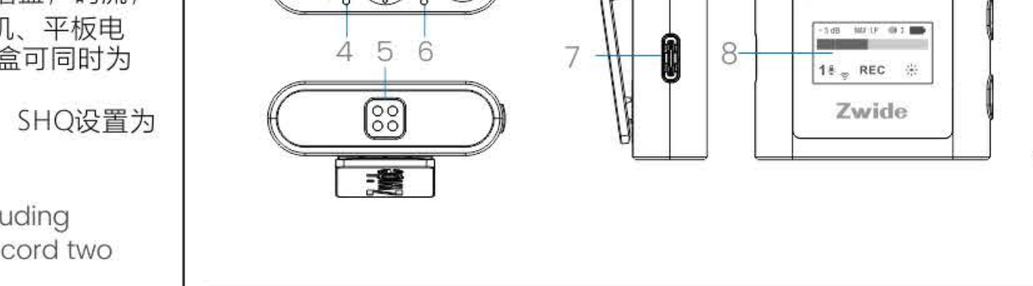

1 外置麦克风接口/External Mic Port
可连接外置3.5mm TRRS麦克风。
注意不可使用供电需要24V或48V的麦克风。
For connecting external microphone. DO NOT connect a microphone with a power supply of 24V or 48V.

2 内置麦克风/Built-in Mic
用于收音。
For recording audio.

3 电源键/ Power Key
长按3秒麦克风开机/关机。开机状态下短按一下，切换LCD的休眠模式（暗标志60秒休眠，亮标志常亮不休眠）或者唤醒LCD。
Hold the key 3s to ON/OFF. the Power Indicator will ON/OFF. TX powered ON, press to switch the LCD sleep mode (Dark symbol: 60s Bright symbol: solid ON, no sleep) or turn ON the LCD.
⚠ 未连接状态下和接收端同时快速按3次重新配对连接。
If TX and RX disconnected, press the key 3 times rapidly with RX simultaneously.

4 录音指示灯/ Recording Indicator
当发射器处于录音时，绿灯亮。关闭录音，灯灭。
TX turned ON recorder pen function, the indicator is ON. Otherwise is OFF.
⚠ 若录音指示灯快闪3秒表示存储已满，请格式化再使用！
If the Recording Indicator blink 3s means the storage was full, please fatmat before using!

5 充电触点/Charging Pad
置入充电盒充电。
Charging will begin when TX was in Charging Case. And TX will OFF automatically.

6 电量指示灯/ Power Indicator
蓝灯，电量充足。 红灯闪烁，电量不足，需要充电。
Solid blue, Battery level ≥ 20%; Blink red, Battery level < 20%, need charging.

7 USB-C Port
用于与电脑数据拷贝，外接充电。
For copying audio after connecting to a computer. Can also be used for charging.

8 显示屏 / LCD
显示麦克风工作状态及电量。
Display the Mic status.

9 录音键 / Record Key
短按一下开启/关闭录音功能。未录音状态下长按切换录音码流。
Press once to turn ON/OFF Voice Recorder Function;
When TX OFF the recorder pen function, hold the key to switch between different record audio data rate.
⚠ 若录音指示灯快闪3秒表示存储已满，请格式化再使用！
If the Recording Indicator blink 3s means the storage was full, please fatmat before using!

10 禁麦键/Mute Key
在配对状态下，短按一下开启/关闭静音功能。
TX connect with RX, press once to Mute/Unmute function.

⚠ 屏幕休眠状态下，RX和TX按任意按键皆可唤醒屏幕。
LCD in sleep mode, press RX and TX any key to turn ON the LCD.

接收器/RX

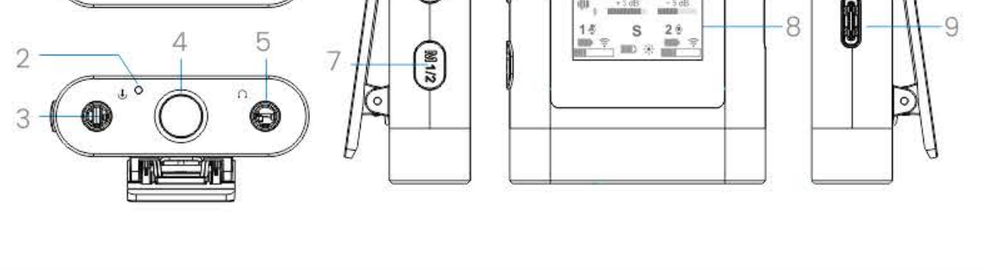

1 充电触点/Charging Pad
置入充电盒充电。
Charging will begin when RX was in Charging Case. And RX will OFF automatically.

2 电量指示灯/ Power Indicator
蓝灯，电量充足。 红灯闪烁，电量不足，需要充电。
Solid blue, Battery level ≥ 20%; Blink red, Battery level < 20%, need charging.

3 音频输出口/ Audio Output Port
模拟音频输出接口，通过音频拓展设备连接手机、电脑、照相机等。
注意不可连接对外输出为24V或48V的设备。
For output analog audio via 3.5mm TRRS cable to connect a mobile phone, camera or other devices.
DO NOT connect to a device with an output of 24V or 48V.

4 电源键/ Power Key
长按3秒麦克风开机/关机。开机状态下短按一下，切换LCD的休眠模式（暗标志10秒休眠，亮标志30秒休眠）或者唤醒LCD。
Hold the key 3s to ON/OFF. the Power Indicator will ON/OFF. RX powered ON, press to switch the LCD sleep mode (dark symbol: 10s; bright symbol: 30s) or turn ON the LCD.

5 监听耳机接口/ Monitor Port
可连接耳机，实时返耳。
Plug in a 3.5mm TRRS headphone to monitor the transmitter recording.

6 功能确认键/ Mute/Confirm Key
短按功能确认键，确定功能状态/参数。
For function confirmation, or confirm status/parameter.

7 功能模式选择键/ Mode Select Key
短按模式选择键，切换麦克风的功能模式。
Select mode or switch microphone's feature mode.

8 显示屏 / LCD
显示麦克风工作状态及电量。
Display the Mic status.

9 USB-C Port
用于与电脑连接，数字音频输出，外接充电。
For digital audio output via USB-C cable just like to connect a computer. Can also be used for charging.

充电盒/Charging Case

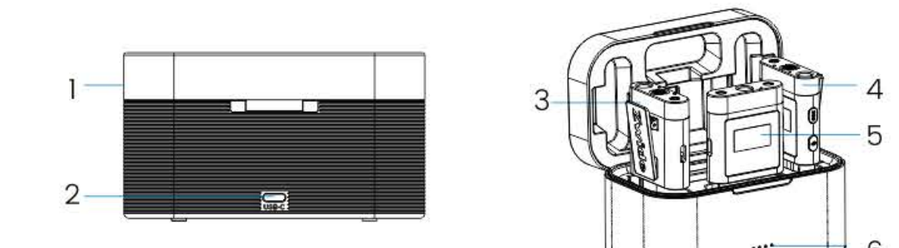

1 充电盒/ Charging Case
推荐使用 5V/1A 规格的充电器给充电盒充电。充电盒内置 3500 mAh 容量电池，将发射器*2和接收器放置于充电盒内即可同时开始充电直至充满。
配合充电盒使用时，发射器与接收器总续航时间最长为 24 小时。
充电盒可放置两个发射器及一个接收器。
It's recommended to charge the Charging Case using a 5V/1A charger. The Charging Case built-in battery with a 3500 mAh. Place the TXs and RX into the Charging Case, it will be OFF automatically and begin charging simultaneously until full. The total operating time is approximately 24 hours when using the TX, RX and the Charging Case together.
2 TXs and 1 RX can be placed into Charging Case.

2 USB-C Port
用于给充电盒充电接口。
Charging for the Charging Case.

3 发射器1/TX1
录音发射设备。
Transmitter.

4 发射器2/TX2
录音发射设备。
Transmitter.

5 接收器 / RX
录音接收设备。
Receiver.

6 电量指示灯 / Power Indicator
表示充电盒电量。详情见下表：
Indicates the battery level of Charging Case. Details below:

LED1	LED2	LED3	LED4	电量指示（充电过程LED依次闪烁） Power Level (LED blink in sequence)
●	●	●	●	76-99%
●	●	●	○	51-75%
●	●	○	○	26-50%
●	○	○	○	15-25%
●	○	○	○	5-15% （LED闪烁立即充电） Must charging when LED blinks

操作/Operating Instruction

配对/Linking
发射器与接收器出厂默认已配对，若发射器与接收器断开，可通以下方式配对：
1.在发射器与接收器同时开启的情况下，连续短按发射器电源键三次，会重新配对。
2.关机重启接收器及发射器，重新配对。
The TX and RX are linked by default. Follow the steps below to link if the TX and RX are disconnected.
1. Power ON TX and RX, press the TX 3 times rapidly to start link.
2. Restart RX and TX to link.

使用场景/Using
发射器 TX
发射器可直接夹在衣领，帽子边沿上使用。用外置麦克风时，发射器可放入口袋及夹在腰间。
TX can be clip to either clothes or cap. If connect with a Wired Microphone, TX can be put in pocket or clip to your waist.

在户外或者有风的环境中，推荐使用防风套。
将防风套对准发射器内置麦克风卡口，嵌入后旋转防风套卡紧。
It is recommended to use the Windscreen when using the TX outdoors or in a windy environment. Attach the Windscreen to the TX by aligning it with the Built-in Mic and rotate the Windscreen to lock in place.

接收器 RX
1.搭配相机使用/ Using with a camera
通过热靴夹子安装在相机的冷靴/热靴口，并使用Zwide相机音频线连接至相机麦克风接口发射器传输到接收器的音频可以传输至相机。
To record audio and transmit to a camera, clip the RX to a camera's hot/cold shoe and connect to the microphone port of the camera using the Camera Cable.

2.搭配手机使用/ Using with a mobile phone or tablet
使用Zwide的USB-C或Lightning 充电/音频线连接手机音频接口，另一个USB-C接口可以连接充电器给手机及接收器充电。
使用手机拍摄视频时，发射器的音频即可传输至手机。
断开手机与接收器连接后，手机设备即可输出声音。
Attach the RX to a mobile phone using the USB-C or Lightning Charging/Audio Cable to record audio and transmit to a mobile phone. The USB-C Port which on the other side of the Cable can be charging for the mobile phone and RX.
Take video by the mobile phone, the sound from TX can be transmitted to the phone.
Audio can be played after the RX is disconnected from the mobile phone.

⚠ 接收器插上音频转接线后，接收器的USB-C输出接口停止对外输出。
The USB-C/Lightning port of mobile phone or tablet cannot output after connecting to the Adapter.
若接收器与手机未连接，是接口未插紧，请重新连接。
If the moible phone or tablet haven't detect the RX, please check if the USB-C/Lightning Adapter is properly connected.
部分设备USB-C接口并未实现音频输入功能，通过USB-C连接接收器将无法工作，此时请通过3.5mm TRRS接口连接。
Several device USB-C Port haven't implement mic function, RX may not working via USB-C Adapter. Please change connect by the device TRRS port.
OPPO/vivo/iQOO/真我/一加品牌的手机每次连接使用需要到"设置"里面搜索"OTG"—>打开"OTG连接"或"OTG供电"才能正常使用；
部分型号需要搜索"默认录音设备"—>选择"外接设备"。
OPPO/vivo/iQOO/realme/OnePlus brand phones can be used normally only search "OTG" in "Settings"—>turn ON " OTG connection" or "OTG power supply"; Several models need to search "Default recorder"—>select "Add-on".

3.搭配电脑使用/Using with a computer
接受器通过USB-A~USB-C 数字音频线连接电脑，配合发射器当作麦克风使用。
Connect the RX to a computer via USB-A ~ USB-C Digital Audio Cable as a microphone for the computer.

⚠ 通过标配音频线连接，进入电脑音频输入设置页面进行相关设置。
Use a standard charging cable to connect RX with a computer and enter the related input settings on the computer.

发射器独立录音/TX Voice Recorder Function

开启发射器后，短按发射器录音按键即开始独立录音，再次短按停止录音。未录音状态下长按录音键切换录音码流（LP / SHQ）。
LP设置为256kb/s，可以录音270小时。SHQ设置为1536kb/s，可以录音45小时。
When TX OFF the Voice Recorder Function, hold the Record Key to switch between different record audio data rate(LP/SHQ).
LP seting was 256kb/s, up to 270 hours; and SHQ seting was 1536kb/s, support to 45 hours.
若录音指示灯快闪3秒表示存储已满，请格式化再使用！
If the Recording Indicator blink 3s means the storage was full, please fatmat before using!



L P： 256kb/s
SHQ：1536kb/s

⚠ 发射器音频文件可连接至电脑导出或删除。
Audio file in the TX can be export or delete by connect with the computer via USB-A ~ USB-C Digital Audio Cable.

屏幕介绍 /Introduce the LCD Display

接收器屏幕
RX LCD



- 降噪标志：1-3档降噪。 Noice Cancellation: 0~3 levels.
- +3 dB：发射器1/TX1增益及状态条：-5~+5 档增益调节。可调节接收器输出增益，如果声音过曝，优先调小 RX 增益。 TX1 gain: -5~+5 levels. Adjust the TX1 input gian, reduce the gain to prevent sound exposure.
- -5 dB：发射器2/TX2增益及状态条：-5~+5 档增益调节。可调节接收器输出增益，如果声音过曝，优先调小 RX 增益。 TX2 gain: -5~+5 levels. Adjust the TX2 input gian, reduce the gain to prevent sound exposure.
- 1：发射器1 麦克风禁麦及录音标志。 TX1 Mute/Unmute.
  - 发射器1电量标志。 Power level of TX1.
  - 发射器1 无线信号标志。 Wireless signal strength level between TX1 and RX.
  - 发射器1/TX1 录音能量条。 TX1 real-time input audio volume.
- S：表示接收器左右声道输出分别对应发射器 1 和 2 两个声源的声音，对应关系可交换。 Stereo :The audio will be separated into left and right channels.
- M：表示接收器左右声道输出的内容完全一致。 Mono :The audio recorded by the two TXs will be in one channel.
- MS：与单声道相似，右声道的输出增益比左声道小 6 dB，以防止音量过爆。 Mono with Safety Track : Similar to Mono mode, the right channel audio will be recorded in -6dB incase the left channel gets distorted due to a sudden increase in the audio volume of the source.
- 接收器电量标志。 Power level of RX.
- 屏/LCD 暗/亮标志。开机状态下短按一下，切换LCD的休眠模式（暗标志10秒休眠，亮标志30秒休眠）或者唤醒LCD。 Dark/bright symbol. RX powered ON, press to switch the LCD sleep mode (dark symbol: 10s; bright symbol: 30s) or turn ON the LCD.
- 2：发射器2麦克风禁麦及录音标志。 Tx2 Mute/Unmute.
  - 发射器2/TX2 电量标志。 Power level of TX2.
  - 发射器2/TX2 无线信号标志。 Wireless signal strength level between TX2 and RX.
  - 发射器2/TX2 录音能量条。 TX2 real-time input audio volume.

发射器屏幕
TX LCD

- -5 dB：发射器/TX增益图标，此功能在接收端调节。 TX gain: -5~+5 levels, adjust in RX side.
- WAV : LP：录音码流标志总共2档（LP:256kb/s-SHQ:1536kb/S），未录音状态下长按录音键切换录音码流。 Record audio data rate, 2 settings(LP:256kb/s; SHQ:1536kb/s). When TX OFF the recorder pen function, hold the Record Key to switch between different record audio data rate.
- 降噪标志：1-3档降噪，此功能在接收端调节。 Noice Cancellation: 0~3 levels, adjust in RX side
- 发射器电量标志。 Power level of TX.
- 发射器录音能量条。 TX real-time input audio volume.
- 1：发射器麦克风禁麦及录音标志。 TX Mute/Unmute.
  - 发射器无线信号标志。 Wireless signal strength level between RX and TX.
- REC：发射器单独录音标志。 TX recorder pen function.
  ⚠ 若录音指示灯快闪3秒表示存储已满，请格式化再使用！ If the Recording Indicator blink 3s means the storage was full, please fatmat before using!
- 屏/LCD 暗/亮标志。开机状态下短按一下，切换LCD的休眠模式（暗标志10秒休眠，亮标志30秒休眠）或者唤醒LCD。 Dark/bright symbol. TX powered ON, press to switch the LCD sleep mode (dark symbol: 10s; bright symbol: 30s) or turn ON the LCD.

基本参数 / The Basic Parameters

名称/Name	接收器/RX ，发射器/TX
型号/Model	M2(Plus)
频率范围/Working Frequency	2.4GHz
采样频率/Recording Sampling Frequency	48kbps
频响范围/Frequency Response Range	100Hz-8000Hz
传输延迟/Transmission Delay	20ms
电池/Battery	250 mAh
工作时间/ Working Time(RX)	~5.5h
工作时间/ Working Time(TX)	~4.5h
充电电压/Charging Voltage	DC 5V
充电时间/Charging Time	~2.5h
咪头灵敏度/Mic Sensitivity	-42dB±3dB
无障碍传输距离/Transmission Distance	140m
内存/EMMC (TX)	64GB
尺寸/Size	47.0x44.0x13.5mm

名称/Name	充电盒/Charging Case
型号/Model	C2
输入/ Input	5V⎓1A
输出/Output	5V⎓0.5A
电池容量/ Battery	3500 mAh 3.8V 13.3Wh
尺寸/ Size	120x70x67mm

包装清单

(1) 麦克风发射端 x2
(2) 麦克风接收端 x1
(3) 防风罩 x2
(4) 收纳袋 x1
(5) 监听耳机 x1
(6) USB-A~USB-C数字音频线 x1
(7) 相机音频线 x1
(8) 3.5mm TRRS 音频线 x1
(9) USB-C充电/音频线 x1
(10) Lightning 充电/音频线 x1
(11) 有线麦克风 x2
(12) 说明书 x1
(13) 感谢信 x1
(14) 充电盒 x1

Packing list

(1) Mic TX x2
(2) Mic RX x1
(3) Windscreen x2
(4) Carrying Pouch x1
(5) Monitor Earphone x1
(6) USB-A ~ USB-C Digital Audio Cable x1
(7) Camera Cable x1
(8) 3.5mm TRRS Cable x1
(9) USB-C Charging/Audio Cable x1
(10) Lightning Charging/Audio Cable x1
(11) Wired Microphone x2
(12) User Manual x1
(13) Thanks Note x1
(14) Charging Case x1

製品紹介

C2 は、２台の送信機と１台の受信機が同梱された、デュアルチャンネル録音ができるワイヤレスマイクシステムです。最大140m先にある二つの音源を同時に録音できます。
無指向性マイクを内蔵し、外部マイクの使用にも対応できます。クリップの設計されて、使い易いです。受信機と送信機には、LCD画面を搭載され、リアルタイムで録音音量、ワイヤレス信号、ゲイン、コードストリーム、チャンネルモードなどを確認することができます。TRRS/USB-C接続口を利用することで、カメラ、スマホやタブレットに接続して、ビデオ撮影や生放送などの高音質の録音を実現します。付属の充電ケースは、受信機と送信機を同時に充電し。
送信機は64GBの内蔵ストレージを搭載し、256kb/s Lp設定で最大270時間、1536kb/s SHQ設定で最大45時間まで音声を録音できます。

FCCに準拠し、障害物のない、屋外環境で測定。

⚠ セットによって含まれる部品が異なりますので、実際に購入されたセットでご確認ください。

送信機 TX

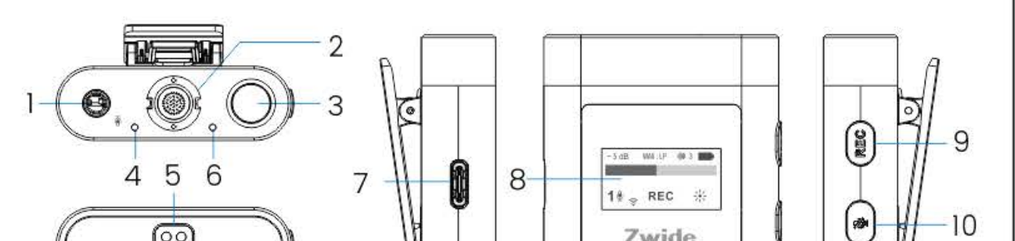

1 外付けマイク接続口
3.5mmTRRSマイク接続用です。

2 内部マイク
音声の録音用です。

3 電源ボタン
電源ボタン 電源ボタンを３秒間押し続け、電源をオン/オフします。電源を入れた状態で１回を短押すと、LCDをスリープモード（LCDオフ：10秒スリープ LCDオン：30秒スリープ)に切り替えるか、LCDを起動させることができます。

4 録音指示ランプ
録音開始=指示ランプが緑色に点灯，録音停止=指示ランプが消灯。
⚠ 録画ランプが3秒間点滅した場合は、容量がいっぱいになっていますので、フォーマットしてからお使いください!

5 充電用 接点端子
送信機を充電ケースに収納し、接点端子同士が接触すると、充電を開始します。

6 バッテリー残量指示ランプ
青色点灯=電池残量あり，ランプが赤い点滅=充電は必要があり。

7 USB-C
データ転送や外部充電用です。

8 LCD画面表示
マイクの状態と電量の情報を表示します。

9 録音ボタン
ペアリングされない状態で、録音を開始/停止します。録音しない時に長押しすると、録音ビットレートを切り替えます。
⚠ 録画ランプが3秒間点滅した場合は、容量がいっぱいになっていますので、フォーマットしてからお使いください!

10 消音ボタン
ペアリングされた状態で、消音ボタンを短押すと、消音機能をオン/オフします。

⚠ LCDをスリープモードにした状態で、いずれかのキーを押すとLCDがONになります。

受信機 RX

1 充電用 接点端子
受信機を充電ケースに収納し、接点端子同士が接触すると、充電を開始します。

2 バッテリー残量指示ランプ
青色点灯=電池残量あり，ランプが赤い点滅=充電は必要があり。

3 オーディオ出力ポート
スマホ、パソコン、カメラなどをオーディオ拡張機器で接続するためのアナログ音声出力ポートです。

4 電源ボタン
電源ボタン 電源ボタンを３秒間押し続け、電源をオン/オフします。電源を入れた状態で１回を短押すと、LCDをスリープモード（LCDオフ：10秒スリープ LCDオン：30秒スリープ)に切り替えるか、LCDを起動させることができます。

5 監視イヤホン接続口
監視イヤホンを接続して、リアルタイムに耳返しを行うことができます。

6 機能確認ボタン
確認ボタンを短押すと、モードの状態を確認します。

7 モードボタン
モードボタンを短押すと、モードを切り替えます。

8 LCD画面表示
マイクの状態と電量の情報を表示します。

9 USB-C
パソコンとの接続、デジタル音声出力、外部充電用です。

⚠ LCDをスリープモードにした状態で、いずれかのキーを押すとLCDがONになります。

充電ケース

1 充電ケース
5V/1Aの充電器でケースを充電することをお勧めします。充電ケースには3500mAhのバッテリーが内蔵されているので、充電ケースに送信機※2と受信機を入れ、満充電になるまで同時に充電を開始することができます。充電ケースと併用した場合、送信機と受信機の合計のバッテリー持続時間は最大24時間で、充電ケースには送信機2台と受信機1台を収納できます。

2 USB-C
充電ケースの充電用です。

3 送信機 TX1
録音用送信機

4 送信機 TX2
録音用送信機

5 受信機 RX
録音用受信機

6 バッテリー残量指示ランプ
充電ケースのバッテリー残量を表示します。

LED1	LED2	LED3	LED4	充電中のバッテリー残量（LEDが順番に点滅）
●	●	●	●	76-99%
●	●	●	○	51-75%
●	●	○	○	26-50%
●	○	○	○	15-25%
●	○	○	○	5-15% LEDが点滅=充電開始

使用方法

送信機と受信機はデフォルトでリンク済みです。送信機と受信機が切断されている場合、以下のいずれかの手順に従ってリンクします。
1.送信機と受信機の電源を同時に入れて、送信機の電源ボタンを連続して3回押すと、再びペアリングします。
2.電源をオフにして受信機と送信機を再起動すると、再びペアリングされます。

使用場所
送信機 TX
クリップを使用して、服や安定した表面に装着できます。
外部マイクを使用する場合は、送信機をポケットに入れたり、腰にクリップで留めたりして使用します。

屋外または風の強い環境で使用する場合は、ファーウインドシールドをお勧めします。ファーウインドシールドを内蔵マイクの位置に合わせ、送信機に取り付け、ファーウインドシールドを回転させて位置に固定します。

受信機 RX
1.カメラとの併用
クリップを使用してカメラに装着し、付属のカメラ用ケーブルを使用してカメラのマイクポートに接続します。

2.スマホとの併用
ZwideのUSB-CまたはLightning充電/オーディオケーブルを使用して、スマホのオーディオ接続口に接続し、もう一つのUSB-Cポートを充電器に接続して、スマホと受信機を充電することができます。
スマホで動画を撮影すると、送信機からの音声がスマホに転送されます。
受信機をスマホから外すと、音声はスマホから出力されます。

⚠ OPPO/vivo/iQOO/realme/OnePlusブランドのスマホは、「設定」の「OTG」を検索→「OTG接続」または「OTG電源」をONにするだけで正常に使用できますが、一部の機種は「デフォルトレコーダー」を検索→「アドオン」を選択する必要があります。

⚠ アダプターに受信機を差し込むと、受信機のUSB-C出力端子から外部への出力が停止します。
受信機が携帯電話に接続されていない場合、アダプターがしっかりと差し込まれていませんので、再び接続してください。

3.パソコンとの併用
受信機はUSB-A ~ USB-C オーディオケーブルを介してパソコンに接続し、パソコンのマイクとして使用します。

⚠ 標準のUSB-A ~ USB-Cオーディオケーブルを使用してマイクをパソコンに接続し、パソコン上で関連する入力設定画面で設定を行います。

送信機の録音機能

送信機の電源をいれた後、録音ボタンを１回短押すと録音を開始し、もう１回押すと停止します。
録音していない時に録音ボタンを長押しすると、録音ビットレートを切り替えます（LP /SHQ）。
256kb/s LP設定で最大270時間、1536kb/s SHQ設定で最大45時間まで音声を録音できます。
録画ランプが3秒間点滅した場合は、容量がいっぱいになっていますので、フォーマットしてからお使いください!

L P： 256kb/s
SHQ：1536kb/s

⚠ パソコンに接続すると、録音済み音声ファイルのエクスポートや削除できます。

LCD画面の説明

受信機 RX
LCD

- 低減機能表示 1-3階段。
- +3 dB：送信機1/TX1ゲイン：-5-+5 10階段。音声がひずんでいる場合は下げることができます。
- -5 dB：送信機2/TX2ゲイン：-5-+5 10階段。音声がひずんでいる場合は下げることができます。
- 1：送信機1/TX1 録音・消音ボタン。
  - 送信機1/TX1 バッテリー残量表示。
  - 送信機1/TX1 無線信号表示。
  - 送信機1/TX1 録音の状態が表示されます。
- S：S ステレオ ステレオモードでは、音声は左右のチャンネルに分けられます。
- M：M モノラル モノラルモードでは、２台の送信機による録音された音声は一つのチャンネルになります。
- MS：Ms モノラルセーフティトラック モノラルモードと同様に録音しますが、音源の音量が急激に大きくなったことでメイントラックに音声ひずみが生じる場合に備えて、音量を６dB下げた状態で録音します。
- レシーバ電力量フラグ。
- LCD オン/オフ表示 電源を入れた状態で１回を短押すと、LCDをスリープモード（LCDオフ：10秒スリープ LCDオン：30秒スリープ)に切り替えるか、LCDを起動させることができます。
- 2：送信機2/TX2 録音・消音ボタン。
  - 送信機2/TX2 バッテリー残量表示。
  - 送信機2/TX2 無線信号表示。
  - 送信機2/TX2 録音の状態が表示されます。

送信機TX
LCD

- -5 dB：送信機ゲイン： この機能は受信機で調整します。
- WAV : LP：録音ビットレート：合計2段階（LP：256kb/s-SHQ：1536kb/s）、非録音時に録音ボタン長押しで録音ビットレートを切り替えます。
- 低減機能表示 1-3階段 この機能は受信機で調整します。
- 送信機/TX バッテリー残量表示。
- 送信機/TX 録音の状態が表示されます。
- 1：送信機/TX 録音・消音ボタン。
  - 送信機/TX 無線信号表示。
- REC：送信機の録音表示。 ⚠ 録画ランプが3秒間点滅した場合は、容量がいっぱいになっていますので、フォーマットしてからお使いください!
- LCD オン/オフ表示 電源を入れた状態で１回を短押すと、LCDをスリープモード（LCDオフ：10秒スリープ LCDオン：30秒スリープ)に切り替えるか、LCDを起動させることができます。

製品仕様

品名	RX/受信機、TX/送信機
型番	C2
送受信周波数	2.4GHz
録音周波数	48kbps
周波数特性	100Hz-8000Hz
伝送遅延	20ms
バッテリー容量	250 mAh
(RX)バッテリー持続使用可能時間	約5.5h
(TX)バッテリー持続使用可能時間	約4.5h
充電電圧	DC 5V
充電時間	約2.5h
マイク感度	-42dB±3dB
転送距離	バリアフリー距離 約140m
(TX)内蔵ストレージ	64GB
サイズ	47.0x44.0x13.5mm

品名	充電ケース
型番	C2
入力	5V⎓1A
出力	5V⎓0.5A
バッテリー容量	3500 mAh 3.8V 13.3Wh
サイズ	120x70x67mm

セット内容

1. 送信機 x2
2. 受信機 x1
3. ファーウインドシールド x2
4. 収納袋 x1
5. 監視イヤホン x1
6. USB-A~USB-C デジタルオーディオケーブル x1
7. カメラ用ケーブル x1
8. 3.5mm TRRSケーブル x1
9. USB-C充電/オーディオケーブル x1
10. Lightning充電/オーディオケーブル x1
11. 外付けマイク x2
12. 日本語説明書 x1
13. サンクスレター x1
14. 充電ケース x1

Compliance Information

FCC Compliance Notice
Supplier's Declaration of Conformity
Product Name: Wireless Lavalier Microphone
Model Number: M2(Plus)
FCC ID: 2A8SQ- M2PLUS
Responsible Party: Zwide Inc.

We, Zwide Inc., being the responsible party, declares that the above mentioned model was tested to demonstrate complying with all applicable FCC rules and regulations.

FCC Statement
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure Information
The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.

IC Statement
This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:
(1) This device may not cause interference; and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage, et
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Zwide®

深 圳 市 智 纬 科 技 有 限 公 司
SHENZHEN ZHIWEI TECHNOLOGY CO., LTD

Zwide is a trademark of SHENZHEN ZHIWEI TECHNOLOGY CO., LTD
Copyright ©2022 Zwide Inc. All Rights Reserved.
Zwide 是深圳市智纬科技有限公司的商标
Copyright ©2022 智纬科技 版权所有
Made in China 中国制造

The Apple logo, iPhone, iPad and Lightning are trademarks of Apple Inc., registered in the U.S. and other countries.
The trademark of "iPhone" is used in Japan with a license from Aiphone K.K
Android is trademark of Google LLC, registered in the U.S. and other countries.
USB-C and USB Type-C are registered trademarks of USB Implementers Forum.
Bluetooth logo and bluetooth are trademarks of Bluetooth SIG, Inc., registered in the U.S. and other countries.
All other company names, product names and logos are the trademarks or registered trademarks of their respective owners.

合格证 Qualified Certificate

合格证
经检验为合格产品
特此证明
深圳市智纬科技有限公司

QUALIFIED CERTIFICATE
Upon inspection and test this product is qualified
Shenzhen Zhiwei Technology Co., Ltd

保修卡 Warranty Card

保修范围：如有产品故障，凭厂商授权服务中心的检测证明，享受15日包换，365日免费维修服务!
Warranty scope:In case of product failure, you can get a replacement within 15 days and free repair service for 365 days, with inspection report issued by authorized service center.

保証書

【1年日本国内保証付き】保証期間に正常な使用状態でご使用の場合に限り品質を保証しております。万一保証期間で故障がありました場合は、お買い上げの販売店へお問い合わせください。
保証書は再発行いたしませんので、大切に保管してください。

产品型号 Model No. 型　番	M2(Plus)
购买日期 Date of Purchase お買い上げ日	
订单号 Order No. ご注文番号	
经销商 Dealer 販売店名	
客户姓名 Customer Name お名前	
联系电话 Contact No. 電　話	
联系地址 Contact Address ご住所	
维修记录 Maintenance Record 修理記録	

SUBSCRIBE FOR MORE INFO
关注Zwide智纬及时获取最新资讯
http://www.zwide.com

RoHS　PSE　FC　CE　RECYCLABLE

地址：广东省深圳市龙华区龙华街道油松社区利金城工业园3号厂房3层东侧分隔体、6#厂房四楼、五楼
Address: 4th ~ 5th Floor , Bld 6 and East side of 3rd Floor Bld 3, Lijincheng Industrial Park, Yousong Community, Longhua Street, Longhua District, Shenzhen, China 518109

臻享纯净 以声相许
ENJOY THE PURITY PROMISE THE VOICE

FCC Caution:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates , uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
If this equipment does cause harmful interference to radio or television reception,which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.
To maintain compliance with FCC’s RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 0cm the radiator your body: Use only the supplied antenna.