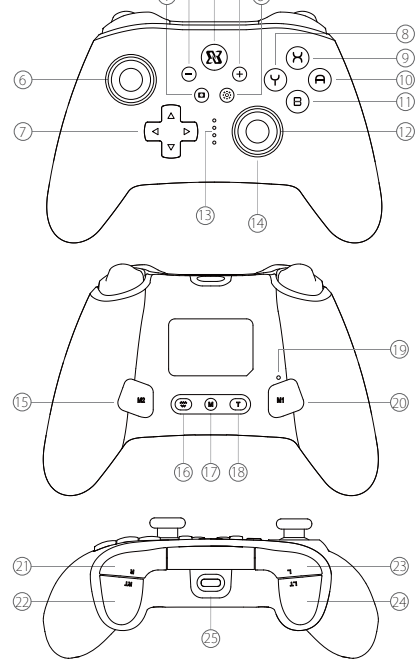
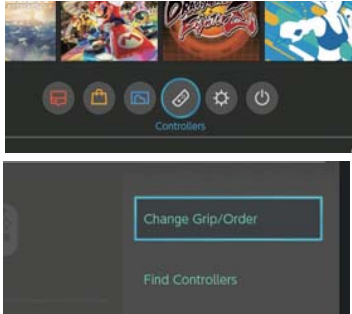
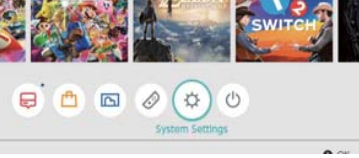
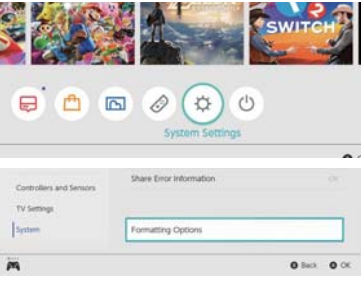


Welcome Guide Wireless controller X02	Button Layout  [1]	Specifications 1. Working voltage: DC3.7-4.2V 2. Input voltage/current: DC5V/1A 3. Charging time: about 3 hours 4. Continuous running time: >10 hours 5. Battery capacity: 1000mAh 2. - Button 4. + Button 6. Left Stick / L3 Button 8. Y Button 10. A Button 12. Right Stick / R3 Button 14. Light Ring 16. Vibration Button 18. Turbo Button 20. M1 Button 22. ZR Button 24. ZL Button 25. Type-C Charging Interface Connection 1 USB Port Switch(TV Mode) connect USB cable TV Controller [2]	1 In TV mode, connect the controller to the dock of switch with a USB cable. 2 disconnect USB cable Controller Press 1 seconds 2.After the wired connection is successful, unplug the USB cable, and the controller will automatically connect wirelessly. Wireless Pairing ①Press the Switch power button to start the switch. ②After booting up, do the following: first step enter the "Controller Settings - Change Grip / Order" page, press the "Right" of "Direction" and "Home" button (il the light of "Home" button turns red and flashes quickly.  [3]	Press L + R on the controller. 23 2 3 Press A when you're ready. ① After successfully connected, the light of "Home" button will always light on. Reconnection After the first successful connection, short press the "Home" button, the controller will turn on and automatically reconnect to the Switch. After successfully connected, the 4 LED lights indicate the corresponding game player. Connection Problem If the controller can not connect with the Switch, please try the following solutions: 1.Fully charged via USB cable if power low then attempt to connect. 2.Try connecting to the Switch via a USB cable first, then connect wirelessly. In this step, please make sure that the Switch has turned on the wired connection mode, as pictures shown (Setting - Controllers and Sensors - Pro Controller Wired Communication).  [4]	Notifications Controller Vibration Sleep Mode Controllers and Sensors TV Settings System 3.Clear the switch connection cache if 1&2 methods can not work out, as pictures shown(Setting - System - Formatting Options - Reset Cache). Too much bluetooth data may cause connection error. In order to avoid this situation, clearing the Bluetooth data before connected is necessary.  4.If it still can not connect after tried the above methods, you can reset it by pressing the "Reset" button on the back of the controller. Light Normal Mode When the controller is turned on for the first time, all lights are always on. [5]
Colors: Press the "Light" button once to change the color of lights successively(red-orange-yellow-green-blue-cyan-purple-off). Note: In any mode, press the "Light" button once, all lights will return to normal mode. Rainbow Mode In "normal mode" or lights off state, press the "Light" button twice, all lights enter the rainbow mode and always on. Single Color Gradient Mode In "rainbow mode", press the "Light" button twice, all lights display in the same color and change automatically. Double Color Gradient Mode In "single color gradient mode", press the "Light" button twice, all lights display in two colors and change automatically. Lights Off In "double color gradient mode", press the "Light" button twice, all lights go out. Brightness Adjustment In any mode, press the "Light" button for 1 second to start adjusting the brightness (0%-25%-50%-75%-100% cycle). Note: The controller will vibrate when you change the lights. No Dead Zone Mode Description In this mode, there is no dead zone in the center area of the corresponding joystick. when setting or canceling, press the "M+L3" button is only valid for [6]	the "Left Stick", press the "M+R3" button is valid only for the "Right Stick". Seting Hold the "M" button then press the "L3/R3" button to turn on the "no dead zone mode" of the corresponding joystick. Note 1: The controller will vibrate once when you when you set the mode. Note: The mode will reset every time the controller is restarted. Cancel After setting, Hold the "M" button then press the press "L3/R3" button to cancel the "no dead zone mode" of the corresponding joystick. Note 1: The controller will vibrate twice when you cancel the mode. Button Assaign Function Buttons can be set A / B / X / Y / R / ZR / L / ZL / L3 / R3 and direction buttons and left or right joysticks (joystick counts as eight keys). Seting ①Hold the "M" button and press any of "M1/M2" button to enter the programming mode. ②Then input the button or button combination you want to set. *Each programmed button(M1/M2) can record up to 21 inputs. (Each press of function buttons is regarded as an input). When the input exceeds 21 times, the programming will automatically end. ③When you're done , press the "M1/M2" button that was pressed earlier to end the programming. Note: The controller will vibrate when you when you start or end the programming. [7]	Cancel Method a: After entering the programming mode, directly press the "M1/M2" button that was pressed earlier to exit without setting any buttons (at this time, "M1/M2" button is empty and there is no function). Method b: Press the "M" button for 5s to reset the assaign function. Note: The controller will vibrate when you when you cancel the assaign function. Turbo Function Seting and Cancel 1.Hold the "Turbo" button and press any of A/B/X/Y/L/R/ZL/ZR button (for the first time) to turn on the turbo function. 2.Hold the "Turbo" button and press any of A/B/X/Y/L/R/ZL/ZR button(for the second time) to turn off the automatic turbo function. *Hold the "Turbo" button for 5 seconds to cancel all turbo function. Note1: The controller will vibrate when you turn on or turn off the turbo function. Note2: Turbo function will reset every time the controller is restarted. Turbo Speed Adjustment *there are 3 gears of turbo speed: 5/12/20 times per second. a. Hold down the "Turbo" button and move the "Right Stick" up to increase the TURBO speed. b. Hold down the "Turbo" button and move the "Right Stick" down to reduce the TURBO speed. Note: The controller will vibrate when the adjustment is successful. [8]	Vibration Adjustment 1.There are 5 levels of vibration intensity on the controller: 0%, 30%, 50%, 100%. 2.Press the "Vibrate" button to adjust the vibration intensity of the controller. It will cycle to 0% after reaching 100%. Note: The controller will vibrate when the adjustment is successful. Status Low Battery When the battery power is low, the LED1-LED4 indicator lights flash quickly. Charging When the controller is charging, the LED1-LED4 indicator lights slowly. When the power is full, the LED1-LED4 indicator lights will be off. Wake Up After the first successful connection, press the "Home" button to wake up and reconnect (other buttons can not wake up). ----- f Binbok Marketing t @BINBOKOfficial globe Official Homepage : binbok.com (Register on this web to activate aftersales.) envelope support@binbok.com Business Contact: contact@binbok.com [9]	FCC Warning This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: — Reorient or relocate the receiving antenna. — Increase the separation between the equipment and receiver. — Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. — Consult the dealer or an experienced radio/TV technician for help. The device has been evaluated to meet general RF exposure requirement. The device can be u sed in portable exposure condition without restriction	