

EXHIBIT E- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

LTE-B2-1.4-LCH-H-TX

Test result

Project Number: Certification

Test Time: 2020-02-12_14.01.00

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

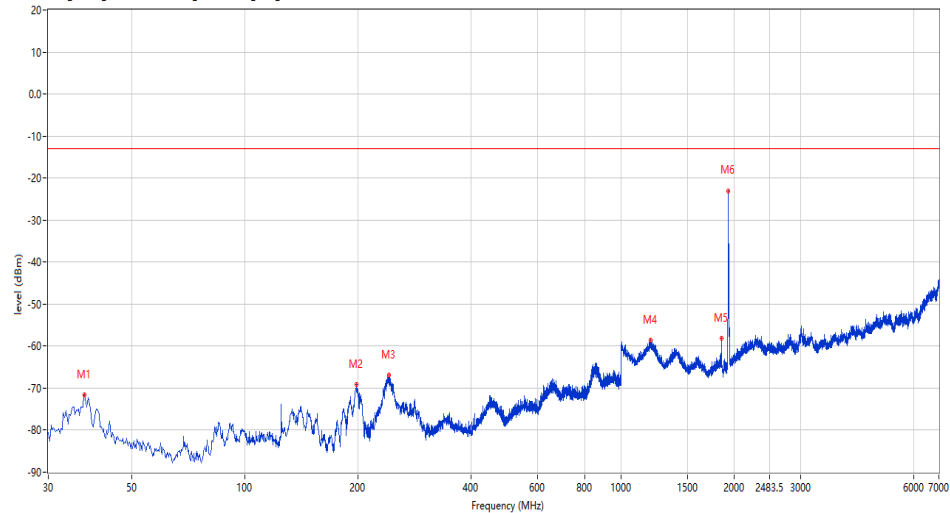

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-71.57	-11.16	-13.0	-58.57	301.10	Horizontal	Vertical	Pass
197.768	-69.19	-11.16	-13.0	-56.19	14.60	Horizontal	Vertical	Pass
241.165	-66.77	-3.86	-13.0	-53.77	311.90	Horizontal	Vertical	Pass
1196.951	-58.68	-3.71	-13.0	-45.68	100.00	Horizontal	Vertical	Pass
1850.787	-58.11	-7.96	-13.0	-45.11	261.40	Horizontal	Vertical	Pass
1930.267	-23.05	-8.28	-13.0	-10.05	247.70	Horizontal	Vertical	Pass

Document number : EXHIBIT E of SHE19020010-03AE

Test result

Project Number: Certification

Test Time: 2020-02-15_15.23.28

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

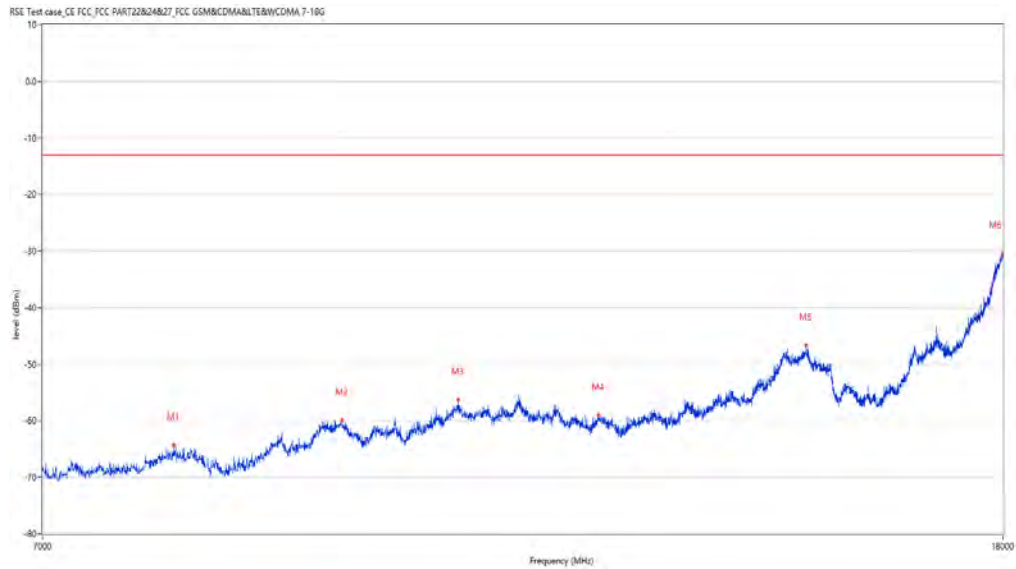

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7965.009	-64.25	8.79	-13.0	-51.25	1.70	Horizontal	Vertical	Pass
9400.150	-59.91	15.31	-13.0	-46.91	80.90	Horizontal	Vertical	Pass
10532.867	-56.29	16.27	-13.0	-43.29	247.20	Horizontal	Vertical	Pass
12088.978	-58.93	14.79	-13.0	-45.93	298.20	Horizontal	Vertical	Pass
14830.042	-46.63	25.71	-13.0	-33.63	332.10	Horizontal	Vertical	Pass
17991.752	-30.44	42.92	-13.0	-17.44	24.40	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_13.55.07

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27_FCC PART 24.1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

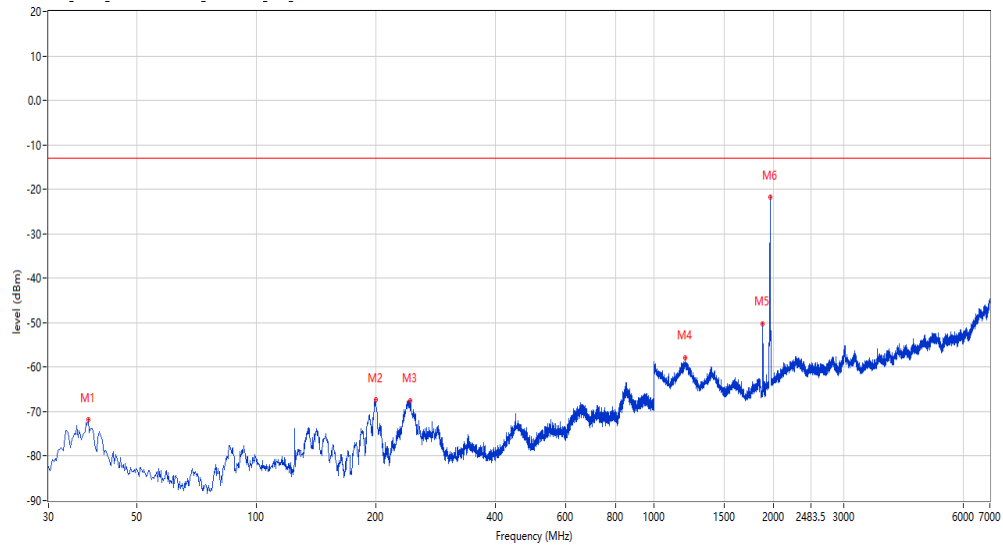

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.758	-71.83	-11.12	-13.0	-58.83	153.60	Horizontal	Vertical	Pass
199.465	-67.29	-9.56	-13.0	-54.29	77.30	Horizontal	Vertical	Pass
243.589	-67.44	-4.49	-13.0	-54.44	329.50	Horizontal	Vertical	Pass
1199.450	-57.81	-3.60	-13.0	-44.81	62.00	Horizontal	Vertical	Pass
1879.280	-50.19	-8.18	-13.0	-37.19	257.70	Horizontal	Vertical	Pass
1960.260	-21.84	-8.30	-13.0	-8.84	143.10	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.24.52

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8118.970	-65.10	9.97	-13.0	-52.10	273.20	Horizontal	Vertical	Pass
10516.371	-56.89	16.40	-13.0	-43.89	110.30	Horizontal	Vertical	Pass
12652.587	-57.77	14.59	-13.0	-44.77	62.30	Horizontal	Vertical	Pass
14500.125	-46.73	24.24	-13.0	-33.73	124.00	Horizontal	Vertical	Pass
16482.379	-46.36	24.33	-13.0	-33.36	85.00	Horizontal	Vertical	Pass
17975.256	-29.57	42.39	-13.0	-16.57	68.20	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.04.07

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
38.243	-71.03	-11.05	-13.0	-58.03	174.40	Horizontal	Vertical	Pass
197.768	-69.39	-11.16	-13.0	-56.39	52.60	Horizontal	Vertical	Pass
239.710	-65.88	-3.66	-13.0	-52.88	319.10	Horizontal	Vertical	Pass
1176.956	-58.26	-4.67	-13.0	-45.26	312.40	Horizontal	Vertical	Pass
1908.773	-57.20	-8.32	-13.0	-44.20	254.80	Horizontal	Vertical	Pass
1988.753	-20.54	-7.87	-13.0	-7.54	236.20	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.21.52

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9380.905	-58.96	15.04	-13.0	-45.96	44.10	Horizontal	Vertical	Pass
11203.699	-56.75	15.98	-13.0	-43.75	269.80	Horizontal	Vertical	Pass
13180.455	-56.52	15.65	-13.0	-43.52	171.40	Horizontal	Vertical	Pass
14483.629	-47.71	23.73	-13.0	-34.71	177.00	Horizontal	Vertical	Pass
16498.875	-46.87	24.97	-13.0	-33.87	359.80	Horizontal	Vertical	Pass
17989.003	-29.94	42.83	-13.0	-16.94	355.40	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.12.38

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

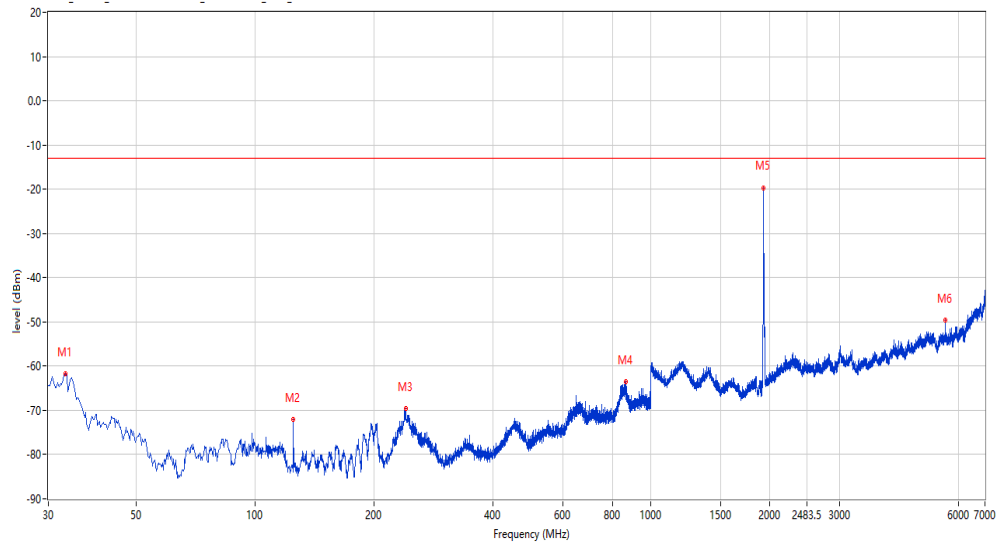

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
33.152	-61.78	-11.93	-13.0	-48.78	102.50	Vertical	Vertical	Pass
124.794	-72.06	-15.68	-13.0	-59.06	359.20	Vertical	Vertical	Pass
240.437	-69.58	-3.67	-13.0	-56.58	275.10	Vertical	Vertical	Pass
865.204	-63.54	3.80	-13.0	-50.54	51.80	Vertical	Vertical	Pass
1930.767	-19.81	-8.28	-13.0	-6.81	196.00	Vertical	Vertical	Pass
5551.362	-49.59	2.36	-13.0	-36.59	155.80	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.36.32

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

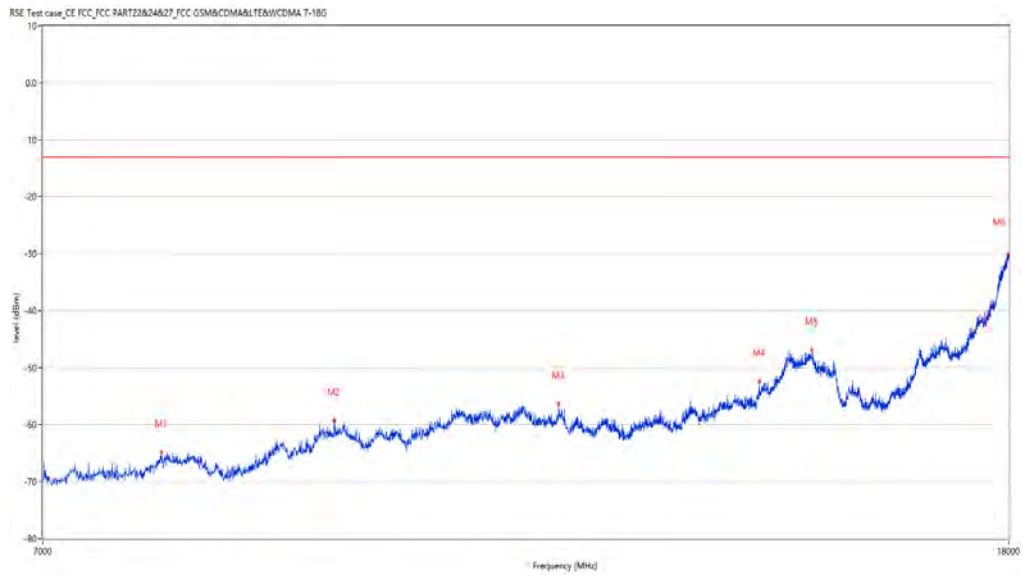

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7860.535	-64.78	8.99	-13.0	-51.78	188.70	Vertical	Vertical	Pass
9309.423	-59.22	13.56	-13.0	-46.22	295.90	Vertical	Vertical	Pass
11594.101	-56.24	16.45	-13.0	-43.24	216.60	Vertical	Vertical	Pass
14101.475	-52.38	19.83	-13.0	-39.38	16.80	Vertical	Vertical	Pass
14852.037	-46.96	25.63	-13.0	-33.96	22.40	Vertical	Vertical	Pass
17986.253	-30.02	42.74	-13.0	-17.02	146.30	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.15.40

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

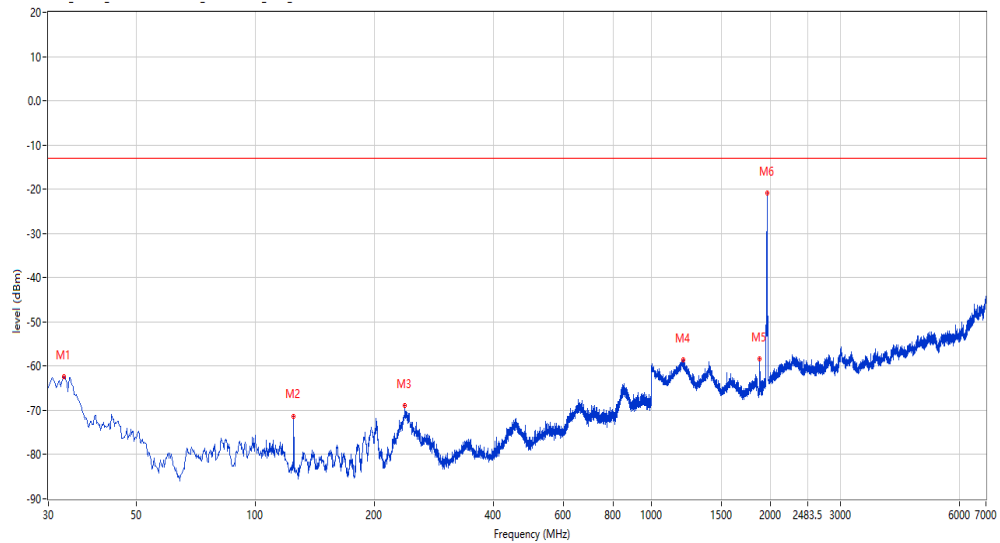

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.909	-62.39	-11.98	-13.0	-49.39	359.40	Vertical	Vertical	Pass
124.794	-71.36	-15.68	-13.0	-58.36	156.00	Vertical	Vertical	Pass
238.255	-68.82	-4.24	-13.0	-55.82	310.40	Vertical	Vertical	Pass
1201.450	-58.58	-3.66	-13.0	-45.58	291.90	Vertical	Vertical	Pass
1879.280	-58.36	-8.18	-13.0	-45.36	297.10	Vertical	Vertical	Pass
1959.760	-20.86	-8.31	-13.0	-7.86	187.30	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.38.42

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7912.772	-64.14	9.50	-13.0	-51.14	314.90	Vertical	Vertical	Pass
9367.158	-59.84	14.85	-13.0	-46.84	185.40	Vertical	Vertical	Pass
11272.432	-56.87	15.44	-13.0	-43.87	278.80	Vertical	Vertical	Pass
13763.309	-54.16	17.81	-13.0	-41.16	115.10	Vertical	Vertical	Pass
16886.528	-44.79	26.19	-13.0	-31.79	179.80	Vertical	Vertical	Pass
17953.262	-30.01	41.68	-13.0	-17.01	168.70	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.08.45

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: LYT


Test Standard: FCC

Work Addition: Normal

Load: full load

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

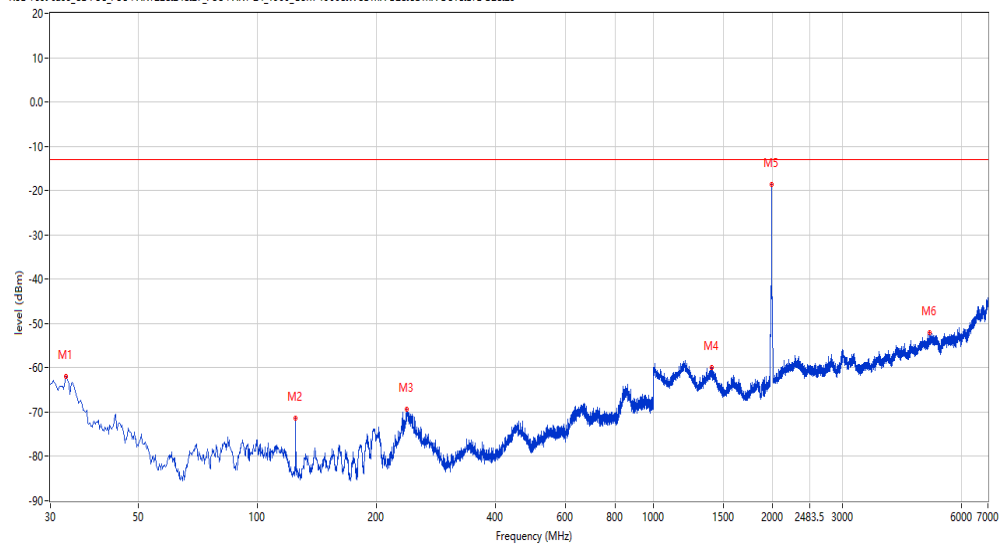

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.909	-62.01	-11.98	-13.0	-49.01	23.50	Vertical	Vertical	Pass
124.794	-71.42	-15.68	-13.0	-58.42	92.40	Vertical	Vertical	Pass
238.740	-69.32	-4.05	-13.0	-56.32	305.60	Vertical	Vertical	Pass
1405.899	-60.02	-6.03	-13.0	-47.02	175.50	Vertical	Vertical	Pass
1989.253	-18.63	-7.86	-13.0	-5.63	194.40	Vertical	Vertical	Pass
4996.501	-52.03	2.94	-13.0	-39.03	134.50	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15:27:22

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

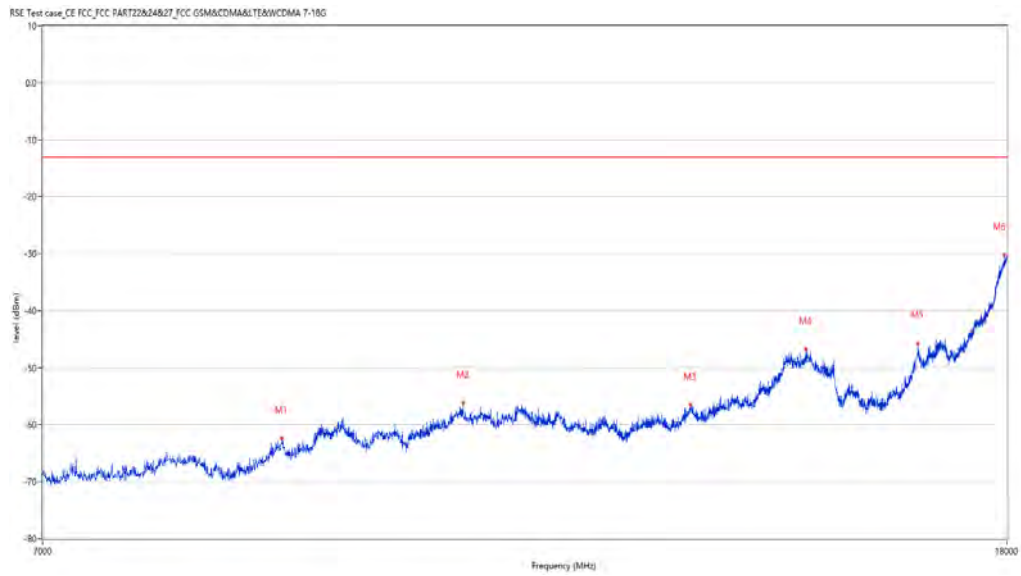

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8847.538	-62.31	11.57	-13.0	-49.31	241.20	Vertical	Vertical	Pass
10568.608	-56.11	16.14	-13.0	-43.11	334.30	Vertical	Vertical	Pass
13199.700	-56.58	16.07	-13.0	-43.58	189.10	Vertical	Vertical	Pass
14783.304	-46.79	25.51	-13.0	-33.79	70.80	Vertical	Vertical	Pass
16493.377	-45.65	24.75	-13.0	-32.65	283.70	Vertical	Vertical	Pass
17958.760	-30.19	41.86	-13.0	-17.19	76.80	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.42.57

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

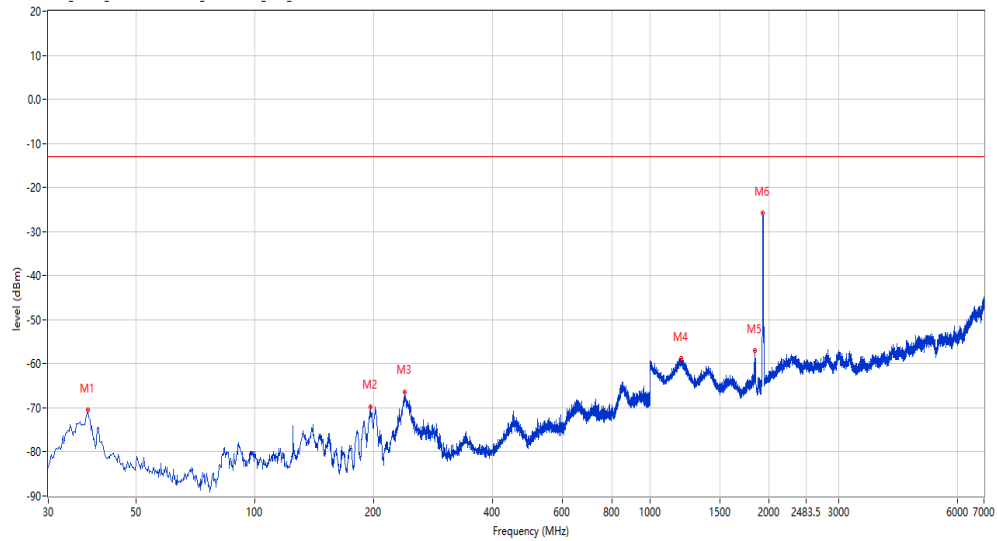

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.758	-70.57	-11.12	-13.0	-57.57	36.10	Horizontal	Vertical	Pass
196.313	-69.72	-12.53	-13.0	-56.72	63.10	Horizontal	Vertical	Pass
238.983	-66.35	-3.95	-13.0	-53.35	307.70	Horizontal	Vertical	Pass
1198.950	-58.86	-3.63	-13.0	-45.86	223.50	Horizontal	Vertical	Pass
1840.290	-56.99	-7.89	-13.0	-43.99	261.40	Horizontal	Vertical	Pass
1930.767	-25.87	-8.28	-13.0	-12.87	242.80	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.51.41

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

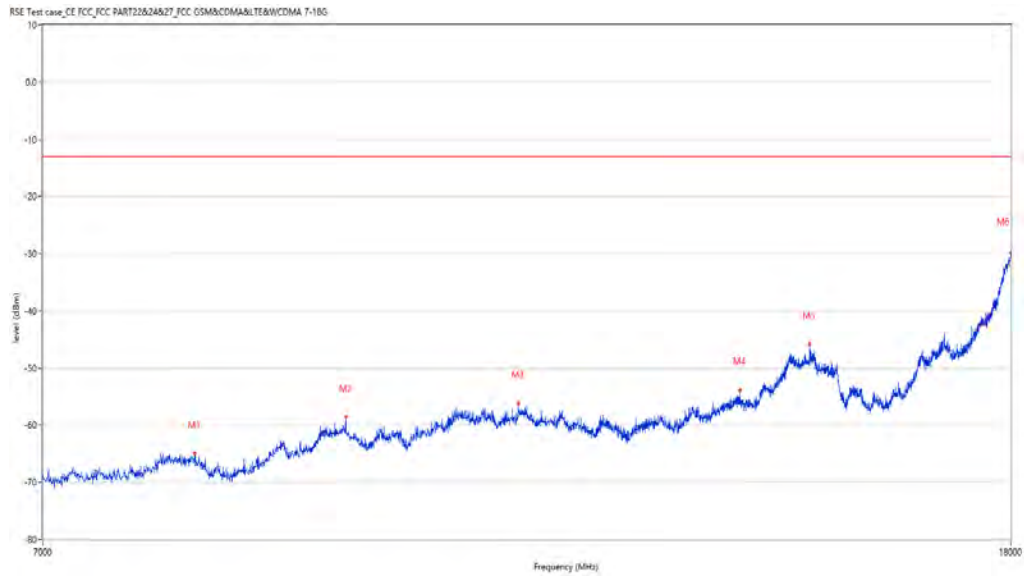

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8118.970	-64.89	9.97	-13.0	-51.89	3.80	Horizontal	Vertical	Pass
9408.398	-58.53	15.14	-13.0	-45.53	144.10	Horizontal	Vertical	Pass
11134.966	-56.08	15.38	-13.0	-43.08	321.60	Horizontal	Vertical	Pass
13815.546	-53.85	17.66	-13.0	-40.85	327.60	Horizontal	Vertical	Pass
14794.301	-45.79	25.65	-13.0	-32.79	0.10	Horizontal	Vertical	Pass
18000.000	-29.90	43.18	-13.0	-16.90	189.10	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.40.46

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

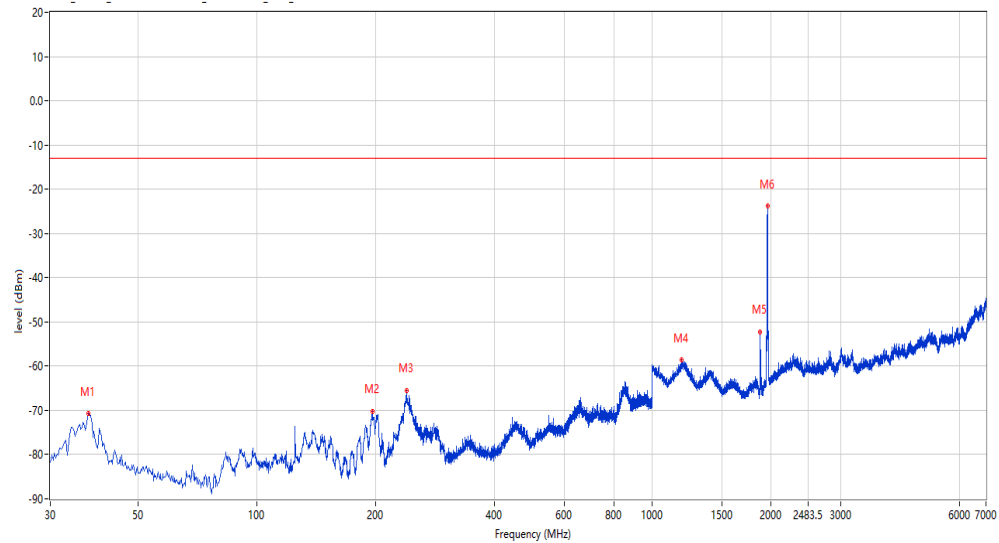

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-70.79	-11.16	-13.0	-57.79	29.20	Horizontal	Vertical	Pass
196.313	-70.15	-12.53	-13.0	-57.15	56.70	Horizontal	Vertical	Pass
239.225	-65.59	-3.86	-13.0	-52.59	315.50	Horizontal	Vertical	Pass
1190.452	-58.62	-3.99	-13.0	-45.62	326.90	Horizontal	Vertical	Pass
1879.280	-52.23	-8.18	-13.0	-39.23	232.00	Horizontal	Vertical	Pass
1959.760	-23.79	-8.31	-13.0	-10.79	237.30	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.53.20

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

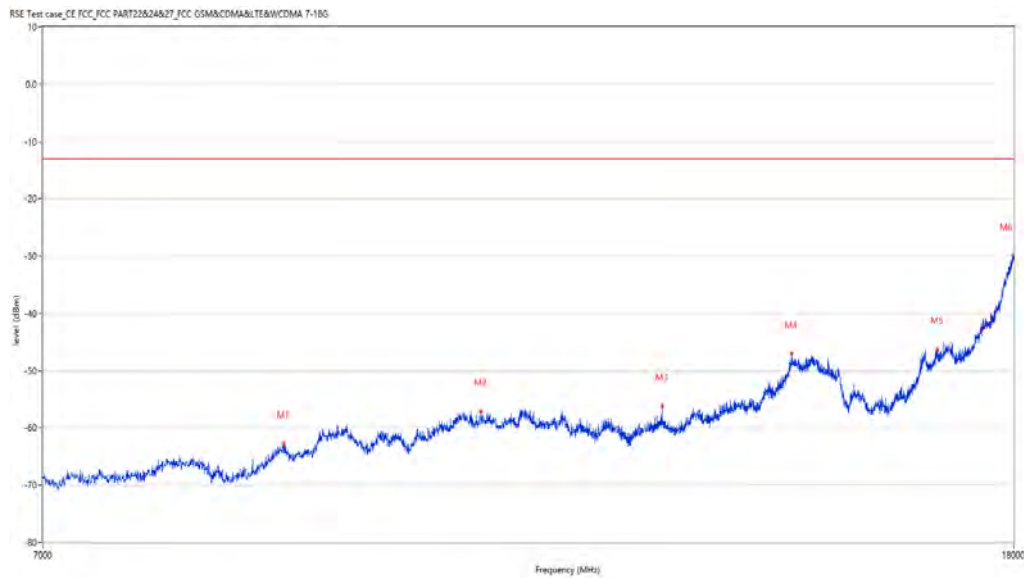

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8844.789	-62.81	11.53	-13.0	-49.81	180.90	Horizontal	Vertical	Pass
10719.820	-57.06	16.24	-13.0	-44.06	144.80	Horizontal	Vertical	Pass
12787.303	-56.16	14.84	-13.0	-43.16	82.70	Horizontal	Vertical	Pass
14500.125	-47.10	24.24	-13.0	-34.10	228.50	Horizontal	Vertical	Pass
16705.074	-46.22	25.71	-13.0	-33.22	10.50	Horizontal	Vertical	Pass
17991.752	-29.90	42.92	-13.0	-16.90	180.90	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.45.23

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27 FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

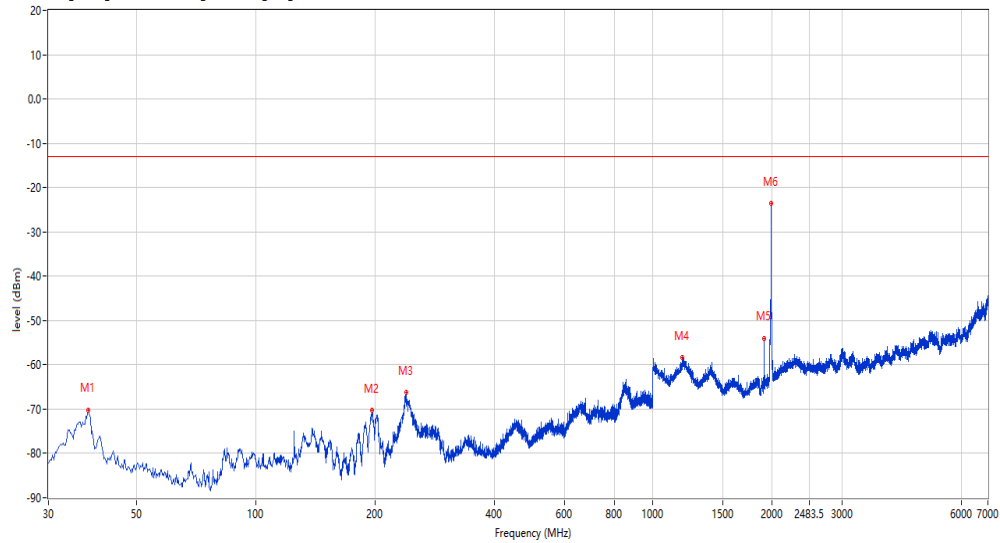

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.758	-70.16	-11.12	-13.0	-57.16	1.10	Horizontal	Vertical	Pass
196.556	-70.22	-12.30	-13.0	-57.22	55.80	Horizontal	Vertical	Pass
239.710	-66.29	-3.66	-13.0	-53.29	301.40	Horizontal	Vertical	Pass
1189.953	-58.30	-4.02	-13.0	-45.30	254.20	Horizontal	Vertical	Pass
1907.273	-54.14	-8.32	-13.0	-41.14	237.10	Horizontal	Vertical	Pass
1987.253	-23.52	-7.91	-13.0	-10.52	234.10	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.49.43

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8842.039	-62.05	11.50	-13.0	-49.05	259.70	Horizontal	Vertical	Pass
10519.120	-56.30	16.38	-13.0	-43.30	251.20	Horizontal	Vertical	Pass
12165.959	-58.61	14.42	-13.0	-45.61	111.70	Horizontal	Vertical	Pass
14527.618	-45.36	24.24	-13.0	-32.36	173.00	Horizontal	Vertical	Pass
16864.534	-44.43	26.20	-13.0	-31.43	49.90	Horizontal	Vertical	Pass
17994.501	-30.24	43.00	-13.0	-17.24	214.30	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.21.38

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

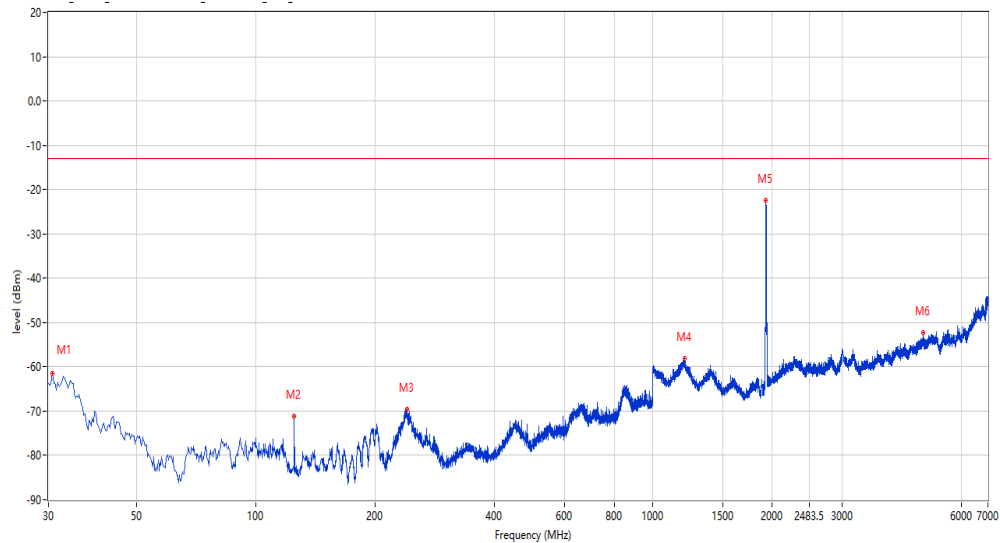

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
30.000	-63.81	-12.58	-13.0	-50.81	359.00	Vertical	Vertical	Pass
124.794	-71.09	-15.68	-13.0	-58.09	112.40	Vertical	Vertical	Pass
239.953	-69.63	-3.57	-13.0	-56.63	301.90	Vertical	Vertical	Pass
1201.950	-58.12	-3.69	-13.0	-45.12	199.80	Vertical	Vertical	Pass
1931.767	-22.54	-8.29	-13.0	-9.54	194.60	Vertical	Vertical	Pass
4800.550	-52.28	1.97	-13.0	-39.28	252.90	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.45.34

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

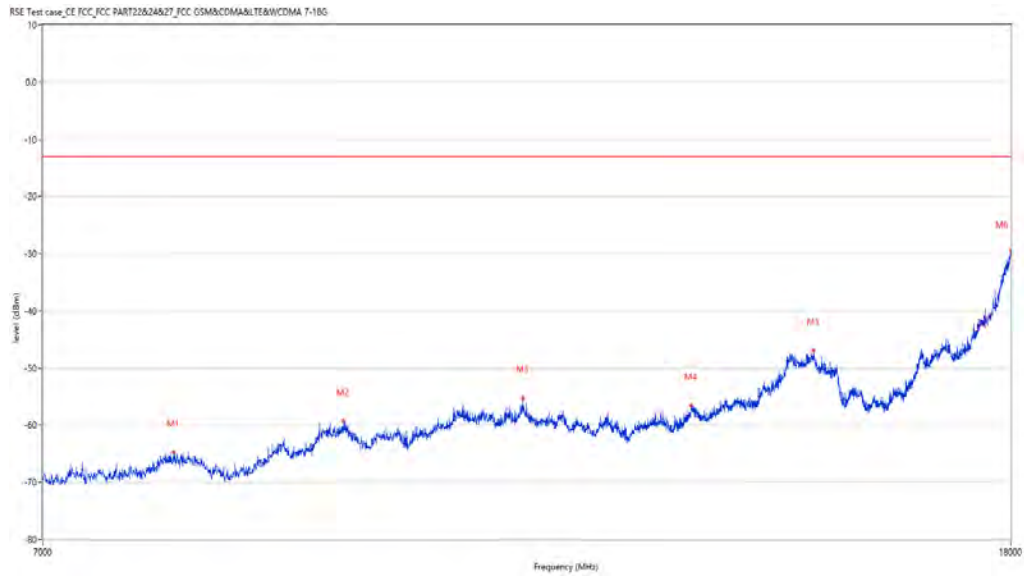

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7951.262	-64.71	8.71	-13.0	-51.71	236.10	Vertical	Vertical	Pass
9383.654	-59.20	15.08	-13.0	-46.20	100.70	Vertical	Vertical	Pass
11184.454	-55.24	15.89	-13.0	-42.24	308.70	Vertical	Vertical	Pass
13180.455	-56.58	15.65	-13.0	-43.58	258.50	Vertical	Vertical	Pass
14852.037	-46.96	25.63	-13.0	-33.96	0.10	Vertical	Vertical	Pass
18000.000	-29.63	43.18	-13.0	-16.63	305.70	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.18.34

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: LYT


Test Standard: FCC

Work Addition: Normal

Load: full load

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

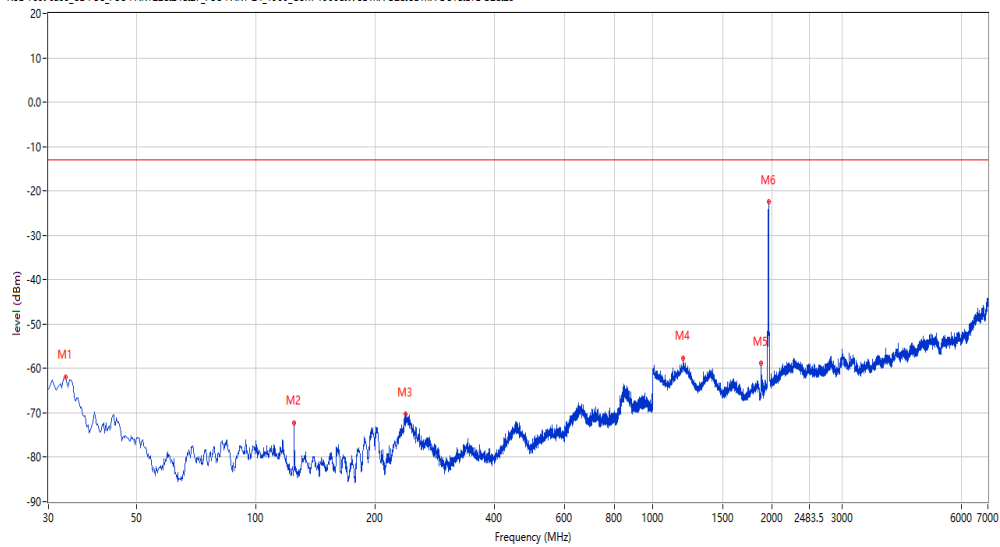

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
33.152	-61.85	-11.93	-13.0	-48.85	130.90	Vertical	Vertical	Pass
124.794	-72.17	-15.68	-13.0	-59.17	141.70	Vertical	Vertical	Pass
238.498	-70.18	-4.14	-13.0	-57.18	292.80	Vertical	Vertical	Pass
1193.452	-57.56	-3.86	-13.0	-44.56	138.60	Vertical	Vertical	Pass
1878.780	-58.84	-8.17	-13.0	-45.84	294.60	Vertical	Vertical	Pass
1960.260	-22.53	-8.30	-13.0	-9.53	160.20	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.47.01

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

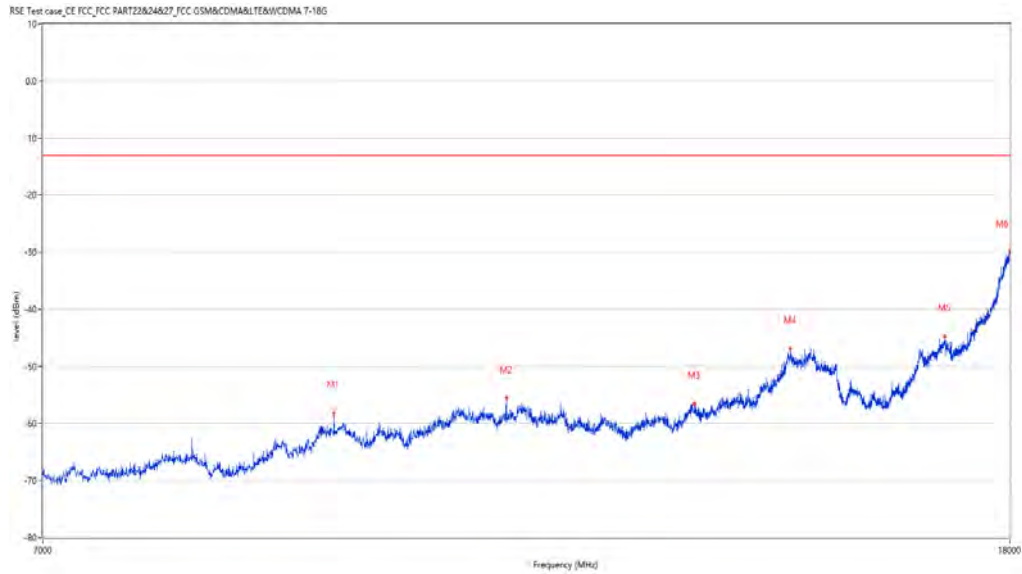

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9303.924	-58.12	13.42	-13.0	-45.12	76.50	Vertical	Vertical	Pass
11008.498	-55.53	16.77	-13.0	-42.53	359.60	Vertical	Vertical	Pass
13229.943	-56.52	15.90	-13.0	-43.52	348.80	Vertical	Vertical	Pass
14530.367	-46.93	24.24	-13.0	-33.93	17.30	Vertical	Vertical	Pass
16892.027	-44.71	26.19	-13.0	-31.71	169.90	Vertical	Vertical	Pass
18000.000	-29.86	43.18	-13.0	-16.86	130.10	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.24.38

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

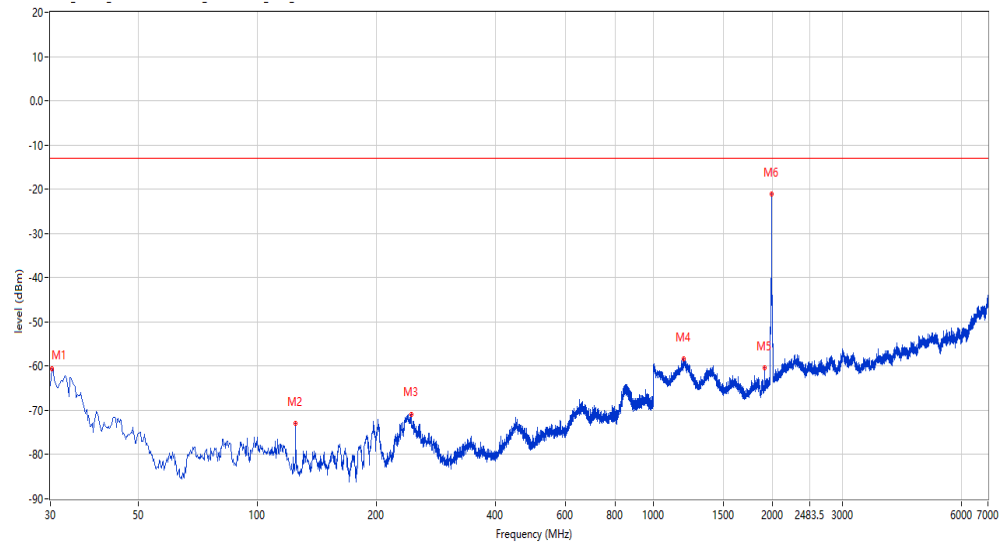

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
30.000	-64.43	-12.58	-13.0	-51.43	150.20	Vertical	Vertical	Pass
124.794	-72.90	-15.68	-13.0	-59.90	41.90	Vertical	Vertical	Pass
244.559	-70.83	-4.75	-13.0	-57.83	294.10	Vertical	Vertical	Pass
1195.951	-58.31	-3.76	-13.0	-45.31	203.40	Vertical	Vertical	Pass
1907.773	-60.40	-8.32	-13.0	-47.40	292.00	Vertical	Vertical	Pass
1987.253	-21.09	-7.91	-13.0	-8.09	192.20	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.41.06

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

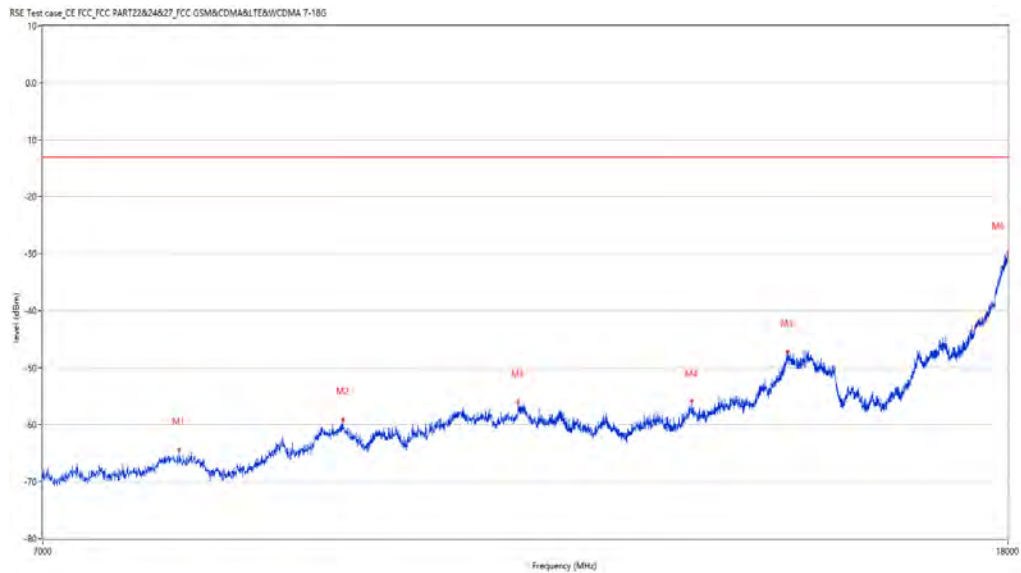

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8000.750	-64.42	9.01	-13.0	-51.42	221.70	Vertical	Vertical	Pass
9389.153	-59.15	15.16	-13.0	-46.15	82.50	Vertical	Vertical	Pass
11148.713	-56.02	15.60	-13.0	-43.02	85.10	Vertical	Vertical	Pass
13210.697	-55.93	16.01	-13.0	-42.93	360.00	Vertical	Vertical	Pass
14505.624	-47.18	24.24	-13.0	-34.18	349.10	Vertical	Vertical	Pass
18000.000	-29.83	43.18	-13.0	-16.83	0.30	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.51.02

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: LYT


Test Standard: FCC

Work Addition: Normal

Load: full load

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

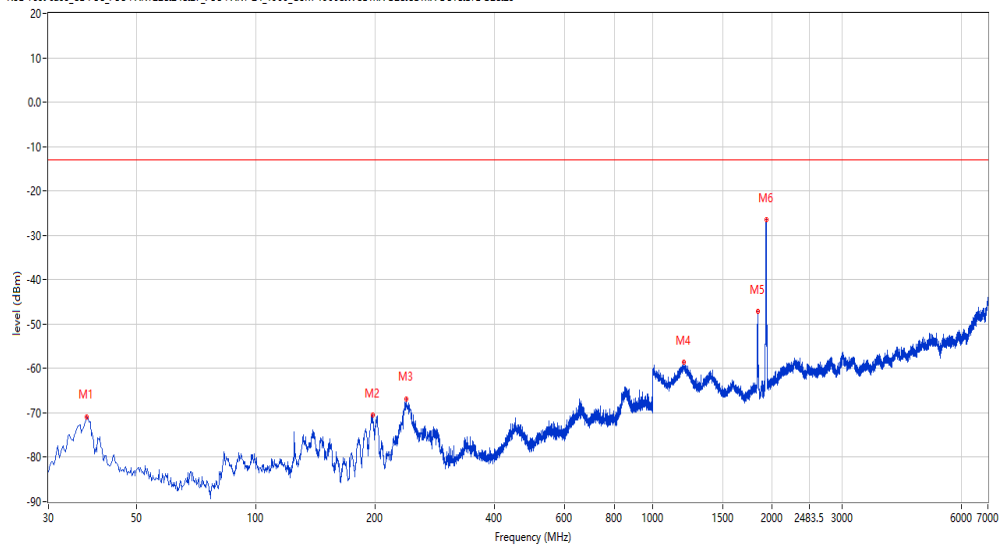

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-70.82	-11.16	-13.0	-57.82	360.00	Horizontal	Vertical	Pass
196.798	-70.44	-12.08	-13.0	-57.44	60.60	Horizontal	Vertical	Pass
239.225	-66.81	-3.86	-13.0	-53.81	301.40	Horizontal	Vertical	Pass
1197.951	-58.57	-3.67	-13.0	-45.57	217.90	Horizontal	Vertical	Pass
1841.790	-47.17	-7.90	-13.0	-34.17	258.90	Horizontal	Vertical	Pass
1933.267	-26.49	-8.30	-13.0	-13.49	149.90	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.57.10

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

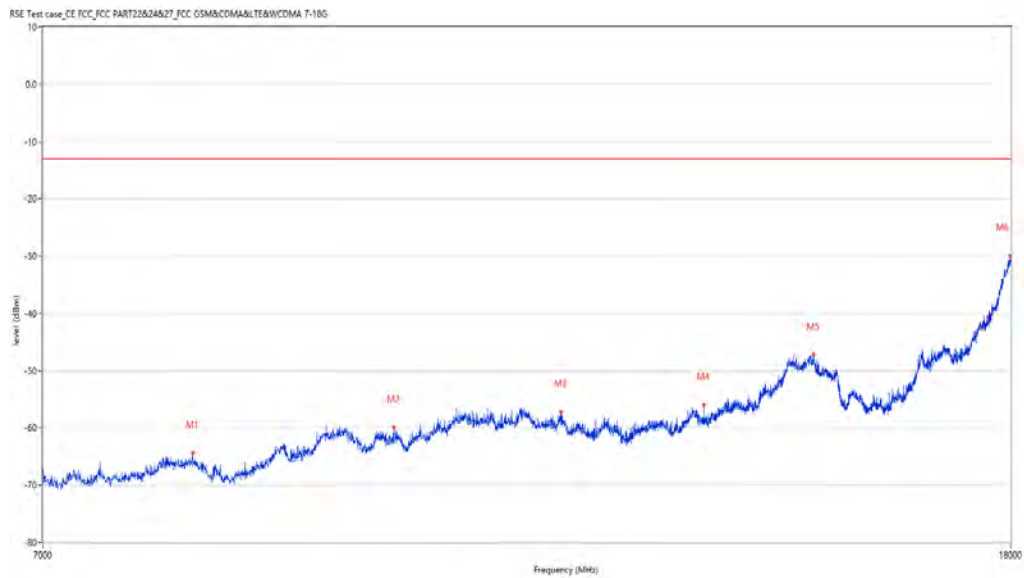

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8102.474	-64.43	10.20	-13.0	-51.43	311.40	Horizontal	Vertical	Pass
9859.285	-59.93	13.23	-13.0	-46.93	183.40	Horizontal	Vertical	Pass
11605.099	-57.22	16.41	-13.0	-44.22	319.60	Horizontal	Vertical	Pass
13339.915	-56.02	16.66	-13.0	-43.02	45.10	Horizontal	Vertical	Pass
14849.288	-47.25	25.70	-13.0	-34.25	2.50	Horizontal	Vertical	Pass
17983.504	-29.98	42.65	-13.0	-16.98	311.40	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.48.01

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

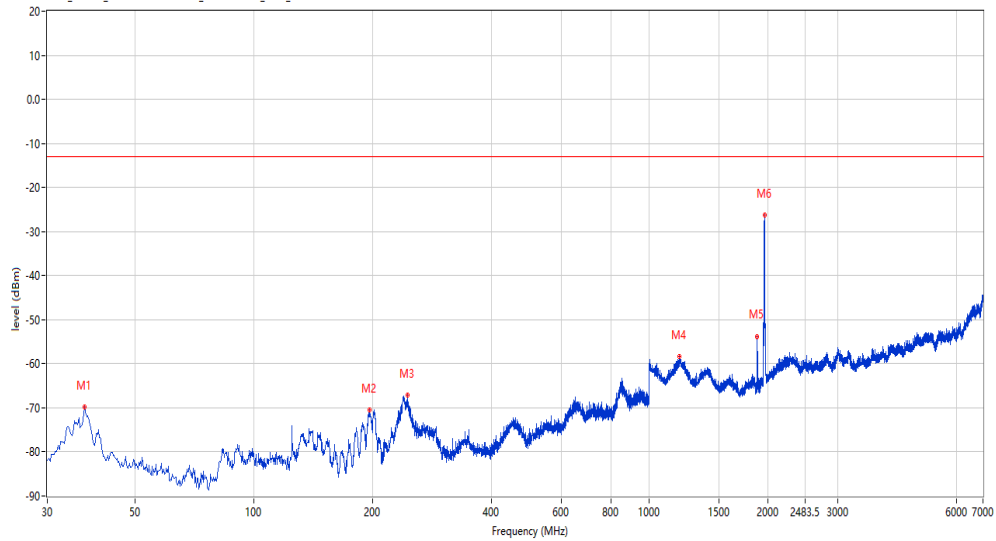

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.273	-69.89	-11.20	-13.0	-56.89	345.00	Horizontal	Vertical	Pass
196.556	-70.53	-12.30	-13.0	-57.53	44.40	Horizontal	Vertical	Pass
244.801	-67.18	-4.81	-13.0	-54.18	318.20	Horizontal	Vertical	Pass
1191.452	-58.35	-3.95	-13.0	-45.35	261.80	Horizontal	Vertical	Pass
1879.280	-53.81	-8.18	-13.0	-40.81	258.80	Horizontal	Vertical	Pass
1959.760	-26.31	-8.31	-13.0	-13.31	239.50	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.59.18

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

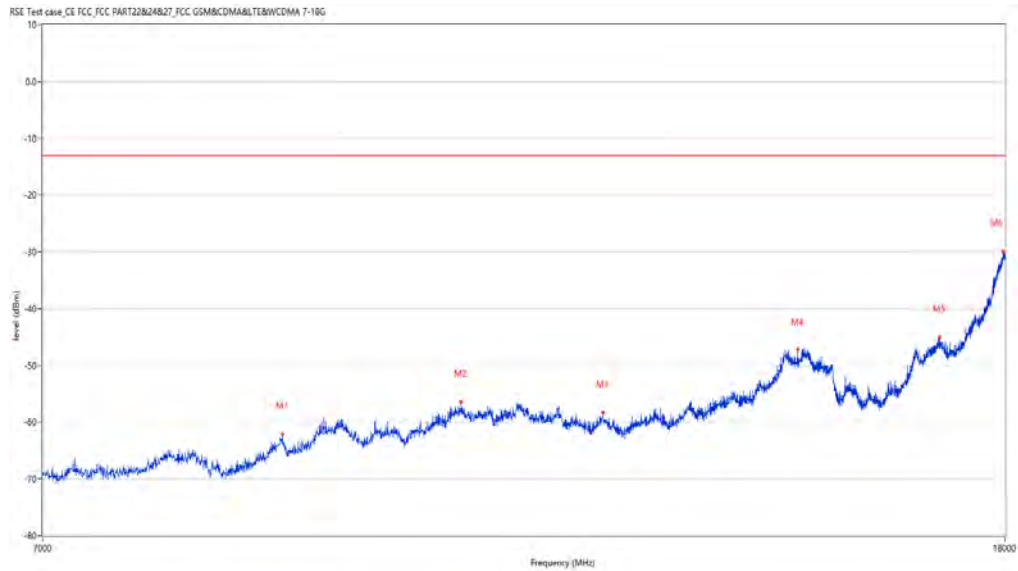

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8855.786	-62.11	11.45	-13.0	-49.11	269.60	Horizontal	Vertical	Pass
10557.611	-56.45	16.14	-13.0	-43.45	280.80	Horizontal	Vertical	Pass
12130.217	-58.30	14.78	-13.0	-45.30	123.40	Horizontal	Vertical	Pass
14684.329	-47.26	25.22	-13.0	-34.26	19.90	Horizontal	Vertical	Pass
16886.528	-44.96	26.19	-13.0	-31.96	14.00	Horizontal	Vertical	Pass
17969.758	-30.01	42.21	-13.0	-17.01	359.60	Horizontal	Vertical	Pass

LTE-B2-5-HCH-H-TX

Test result

Project Number: Certification

Test Time: 2020-02-12_14.53.23

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: LYT


Test Standard: FCC

Work Addition: Normal

Load: full load

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

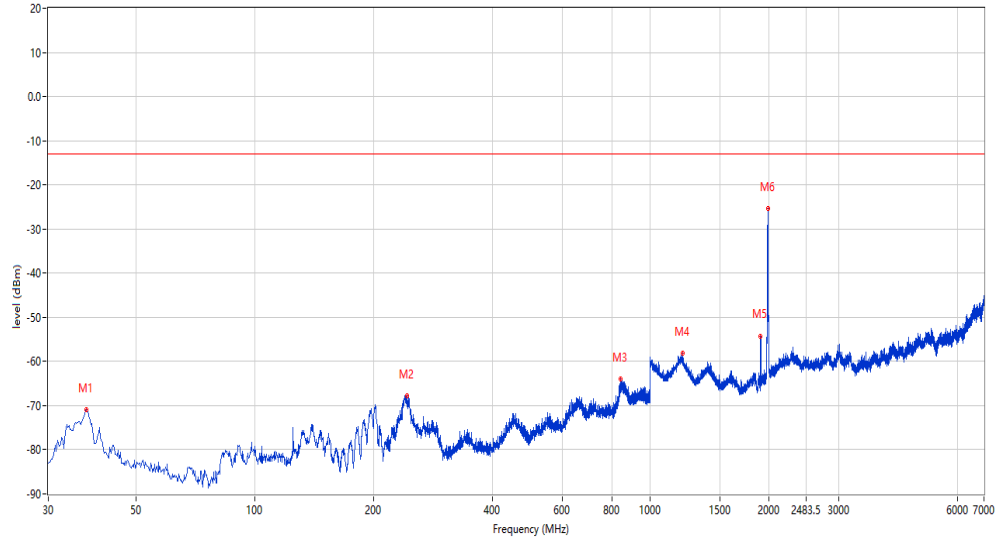

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-71.01	-11.16	-13.0	-58.01	58.10	Horizontal	Vertical	Pass
243.104	-67.88	-4.37	-13.0	-54.88	321.90	Horizontal	Vertical	Pass
843.869	-63.98	4.01	-13.0	-50.98	41.70	Horizontal	Vertical	Pass
1209.448	-58.04	-4.11	-13.0	-45.04	359.20	Horizontal	Vertical	Pass
1905.274	-54.39	-8.32	-13.0	-41.39	237.20	Horizontal	Vertical	Pass
1988.753	-25.42	-7.87	-13.0	-12.42	237.20	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_15.55.47

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

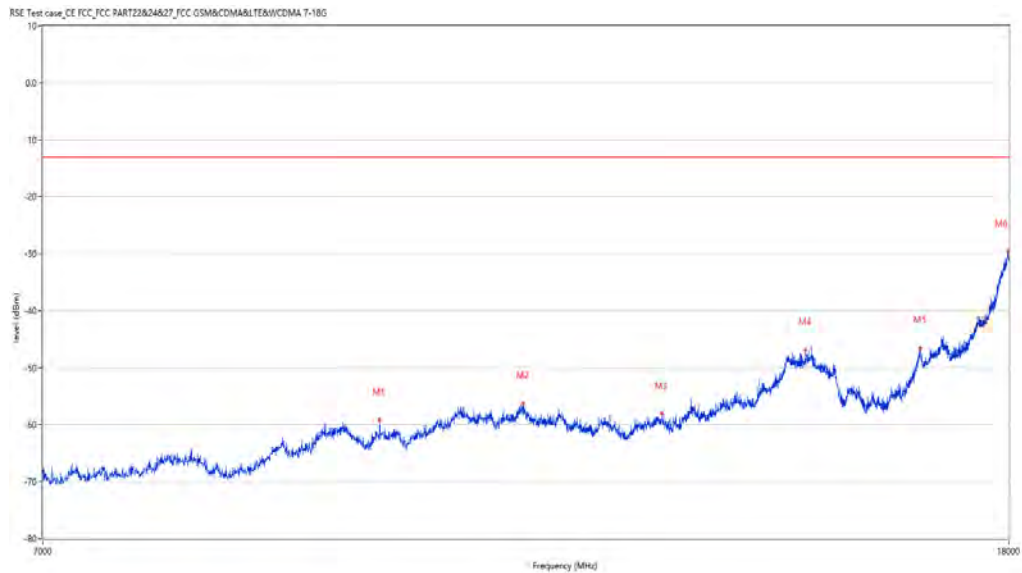

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9730.067	-59.18	13.85	-13.0	-46.18	195.30	Horizontal	Vertical	Pass
11192.702	-56.25	15.96	-13.0	-43.25	324.20	Horizontal	Vertical	Pass
12817.546	-58.10	14.81	-13.0	-45.10	169.60	Horizontal	Vertical	Pass
14753.062	-46.88	25.14	-13.0	-33.88	192.30	Horizontal	Vertical	Pass
16504.374	-46.53	24.86	-13.0	-33.53	57.60	Horizontal	Vertical	Pass
17983.504	-29.61	42.65	-13.0	-16.61	46.10	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_15.02.03

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: LYT


Test Standard: FCC

Work Addition: Normal

Load: full load

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

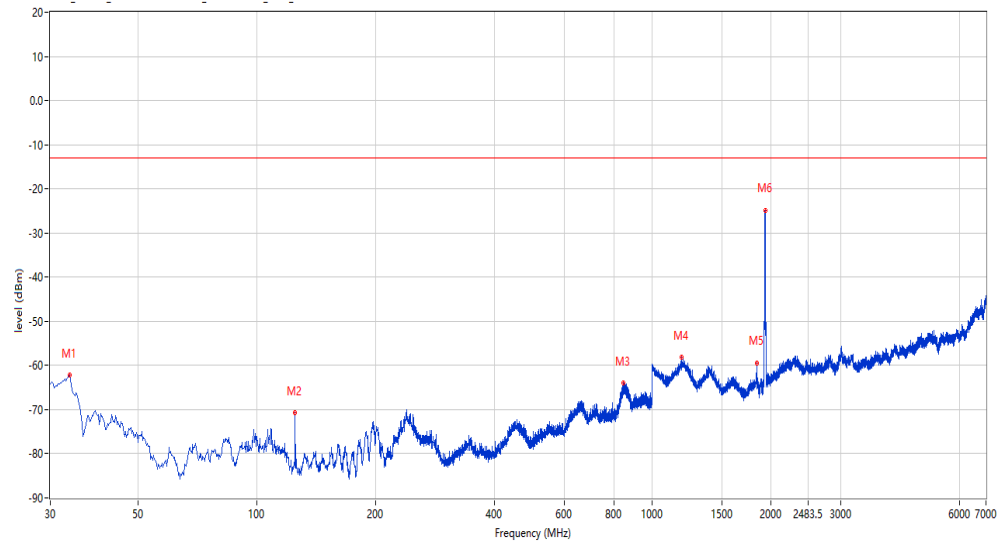

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
33.637	-62.20	-11.83	-13.0	-49.20	106.20	Vertical	Vertical	Pass
124.794	-70.72	-15.68	-13.0	-57.72	149.70	Vertical	Vertical	Pass
846.293	-63.94	4.25	-13.0	-50.94	7.50	Vertical	Vertical	Pass
1189.453	-58.09	-4.04	-13.0	-45.09	58.40	Vertical	Vertical	Pass
1839.290	-59.40	-7.94	-13.0	-46.40	291.30	Vertical	Vertical	Pass
1933.267	-24.82	-8.30	-13.0	-11.82	190.50	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.05.50

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

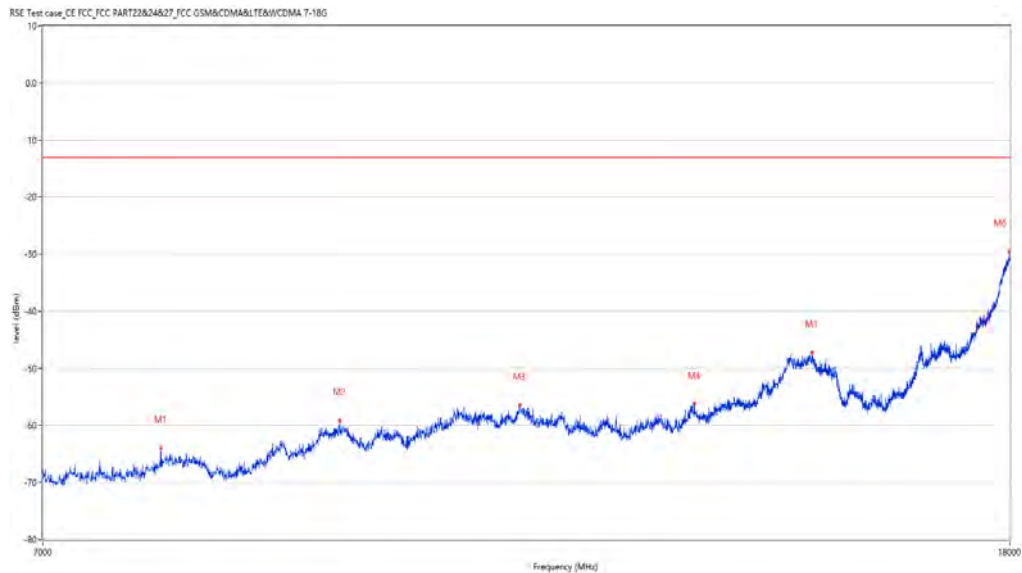

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7855.036	-63.95	8.88	-13.0	-50.95	341.70	Vertical	Vertical	Pass
9353.412	-59.08	14.65	-13.0	-46.08	256.80	Vertical	Vertical	Pass
11151.462	-56.40	15.63	-13.0	-43.40	1.60	Vertical	Vertical	Pass
13229.943	-56.20	15.90	-13.0	-43.20	1.60	Vertical	Vertical	Pass
14841.040	-47.23	25.70	-13.0	-34.23	203.30	Vertical	Vertical	Pass
17989.003	-29.63	42.83	-13.0	-16.63	73.70	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_15.04.25

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27 FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

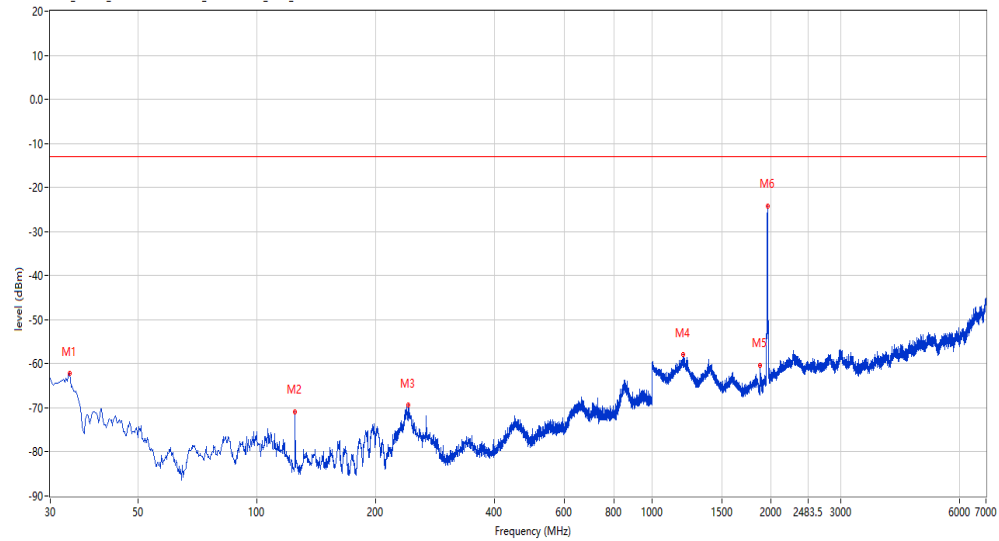

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
33.637	-62.11	-11.83	-13.0	-49.11	107.90	Vertical	Vertical	Pass
124.794	-70.82	-15.68	-13.0	-57.82	150.00	Vertical	Vertical	Pass
241.650	-69.31	-3.98	-13.0	-56.31	272.10	Vertical	Vertical	Pass
1200.450	-57.80	-3.61	-13.0	-44.80	20.80	Vertical	Vertical	Pass
1879.780	-60.30	-8.18	-13.0	-47.30	301.20	Vertical	Vertical	Pass
1960.760	-24.16	-8.28	-13.0	-11.16	194.50	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.07.42

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9114.221	-63.11	11.32	-13.0	-50.11	206.70	Vertical	Vertical	Pass
10519.120	-57.28	16.38	-13.0	-44.28	280.70	Vertical	Vertical	Pass
12088.978	-57.26	14.79	-13.0	-44.26	330.60	Vertical	Vertical	Pass
14480.880	-47.07	23.64	-13.0	-34.07	310.90	Vertical	Vertical	Pass
16856.286	-45.21	26.20	-13.0	-32.21	300.10	Vertical	Vertical	Pass
17980.755	-30.16	42.56	-13.0	-17.16	50.60	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_14.59.03

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

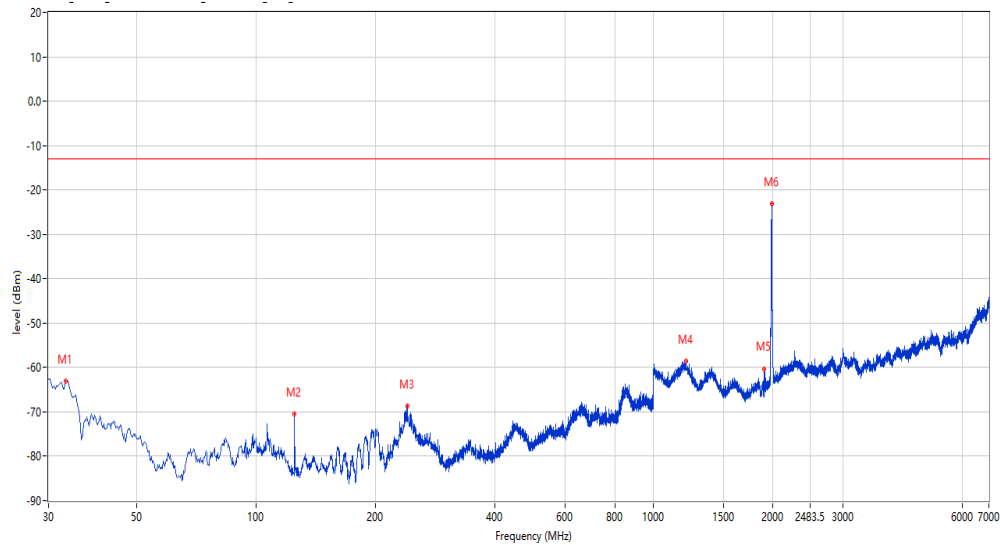

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
33.152	-63.01	-11.93	-13.0	-50.01	3.50	Vertical	Vertical	Pass
124.794	-70.56	-15.68	-13.0	-57.56	137.90	Vertical	Vertical	Pass
239.953	-68.78	-3.57	-13.0	-55.78	284.90	Vertical	Vertical	Pass
1206.948	-58.65	-3.97	-13.0	-45.65	3.90	Vertical	Vertical	Pass
1905.774	-60.28	-8.32	-13.0	-47.28	296.10	Vertical	Vertical	Pass
1985.754	-23.10	-7.95	-13.0	-10.10	203.40	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.02.05

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9103.224	-62.01	10.93	-13.0	-49.01	121.30	Vertical	Vertical	Pass
10486.128	-57.14	16.46	-13.0	-44.14	132.50	Vertical	Vertical	Pass
12083.479	-57.76	14.71	-13.0	-44.76	161.10	Vertical	Vertical	Pass
14541.365	-47.26	24.24	-13.0	-34.26	359.30	Vertical	Vertical	Pass
16482.379	-46.33	24.33	-13.0	-33.33	39.50	Vertical	Vertical	Pass
17994.501	-30.19	43.00	-13.0	-17.19	192.40	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_15.51.44

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: LYT


Test Standard: FCC

Work Addition: Normal

Load: full load

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

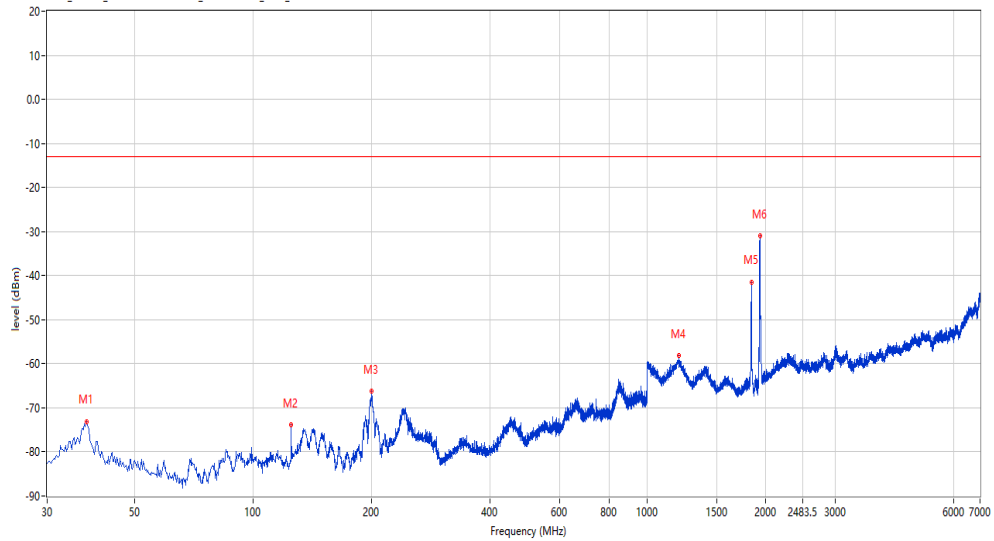

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.758	-73.05	-11.12	-13.0	-60.05	347.50	Horizontal	Vertical	Pass
124.794	-73.94	-15.68	-13.0	-60.94	347.50	Horizontal	Vertical	Pass
200.192	-66.20	-9.17	-13.0	-53.20	77.80	Horizontal	Vertical	Pass
1202.949	-58.15	-3.75	-13.0	-45.15	360.10	Horizontal	Vertical	Pass
1842.289	-41.42	-7.90	-13.0	-28.42	271.90	Horizontal	Vertical	Pass
1936.766	-30.99	-8.32	-13.0	-17.99	148.70	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.18.29

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

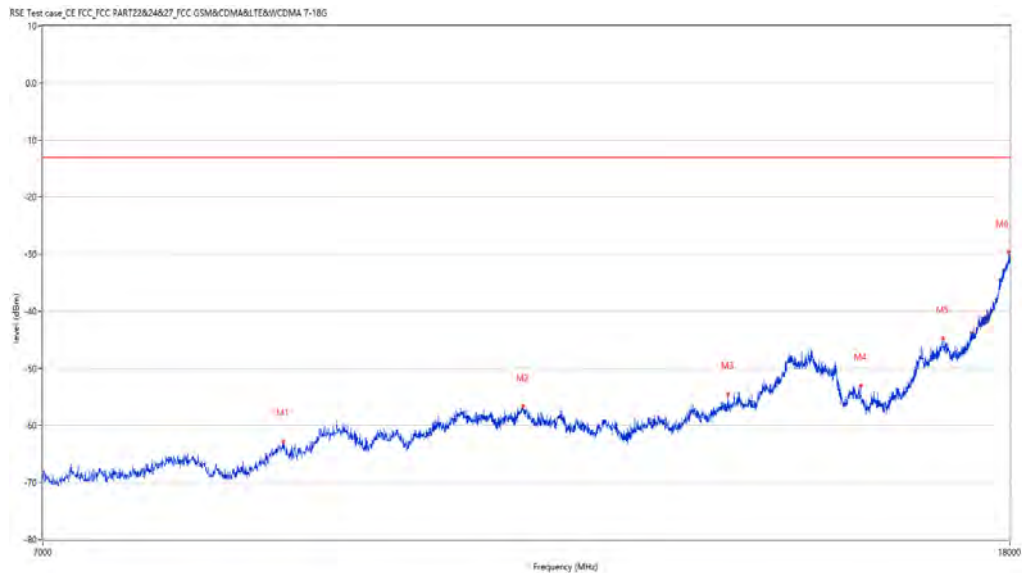

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8853.037	-62.80	11.52	-13.0	-49.80	138.50	Horizontal	Vertical	Pass
11189.953	-56.62	15.94	-13.0	-43.62	132.90	Horizontal	Vertical	Pass
13669.833	-54.51	17.79	-13.0	-41.51	349.50	Horizontal	Vertical	Pass
15564.109	-53.02	17.43	-13.0	-40.02	118.80	Horizontal	Vertical	Pass
16859.035	-44.79	26.20	-13.0	-31.79	201.00	Horizontal	Vertical	Pass
17978.005	-29.63	42.48	-13.0	-16.63	113.20	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_15.57.08

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

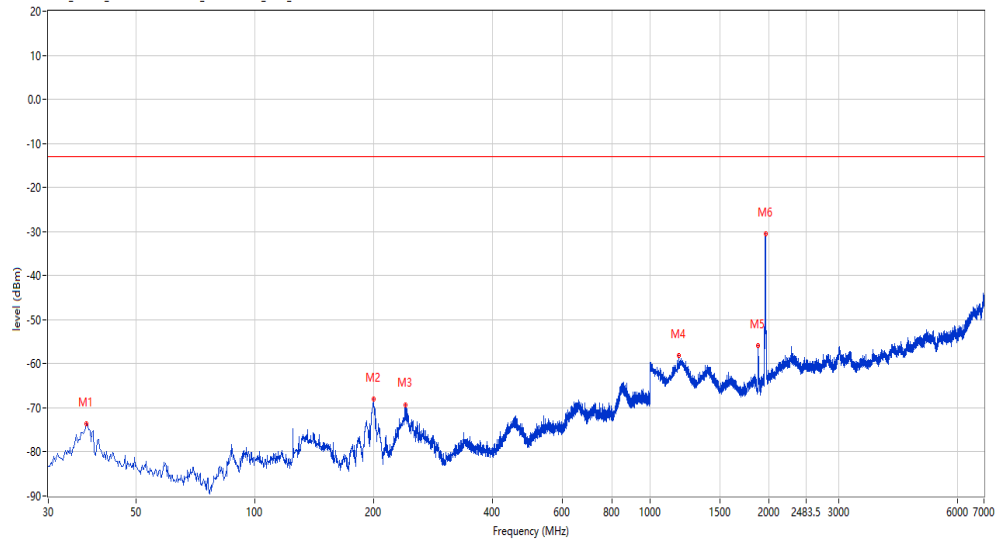

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-73.66	-11.16	-13.0	-60.66	95.00	Horizontal	Vertical	Pass
199.465	-68.05	-9.56	-13.0	-55.05	210.00	Horizontal	Vertical	Pass
239.953	-69.26	-3.57	-13.0	-56.26	288.90	Horizontal	Vertical	Pass
1182.454	-58.22	-4.39	-13.0	-45.22	223.80	Horizontal	Vertical	Pass
1878.780	-55.88	-8.17	-13.0	-42.88	262.50	Horizontal	Vertical	Pass
1959.260	-30.52	-8.31	-13.0	-17.52	242.80	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.19.54

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

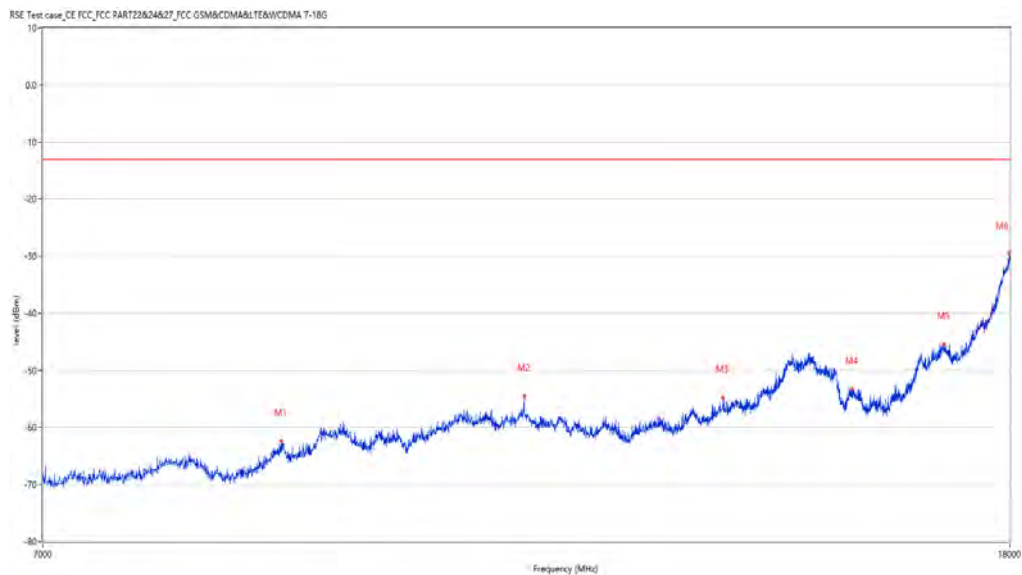

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8836.541	-62.32	11.44	-13.0	-49.32	300.60	Horizontal	Vertical	Pass
11200.950	-54.53	16.01	-13.0	-41.53	264.10	Horizontal	Vertical	Pass
13601.100	-54.81	18.37	-13.0	-41.81	49.50	Horizontal	Vertical	Pass
15429.393	-53.33	17.89	-13.0	-40.33	348.90	Horizontal	Vertical	Pass
16878.280	-45.39	26.20	-13.0	-32.39	255.50	Horizontal	Vertical	Pass
17983.504	-29.39	42.65	-13.0	-16.39	359.50	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_15.54.29

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

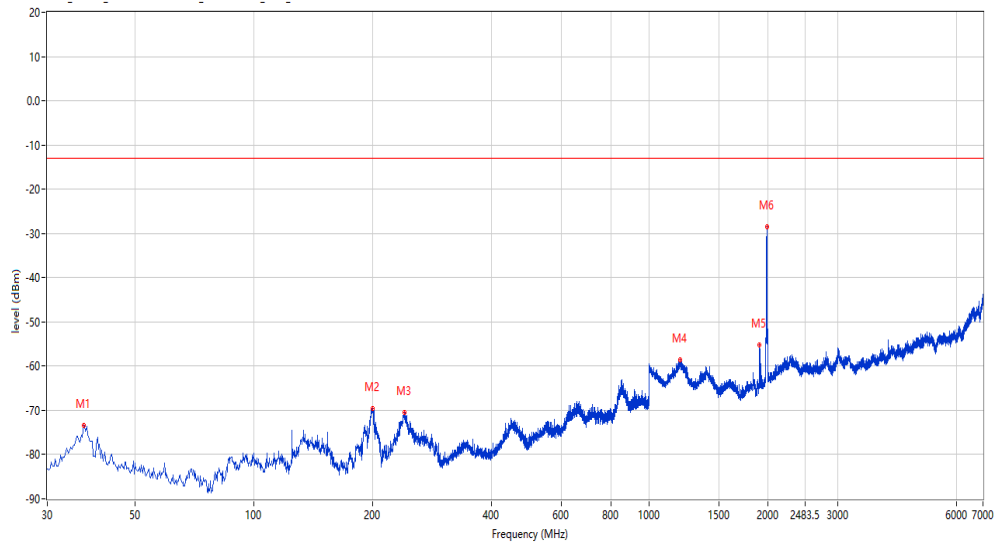

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.031	-73.46	-11.23	-13.0	-60.46	279.00	Horizontal	Vertical	Pass
200.192	-69.57	-9.17	-13.0	-56.57	72.70	Horizontal	Vertical	Pass
240.437	-70.50	-3.67	-13.0	-57.50	330.80	Horizontal	Vertical	Pass
1197.951	-58.68	-3.67	-13.0	-45.68	154.00	Horizontal	Vertical	Pass
1904.774	-55.15	-8.32	-13.0	-42.15	236.90	Horizontal	Vertical	Pass
1987.253	-28.52	-7.91	-13.0	-15.52	242.50	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.16.51

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8853.037	-61.46	11.52	-13.0	-48.46	102.00	Horizontal	Vertical	Pass
10513.622	-56.27	16.42	-13.0	-43.27	359.20	Horizontal	Vertical	Pass
12735.066	-58.03	14.67	-13.0	-45.03	116.20	Horizontal	Vertical	Pass
14819.045	-47.18	25.71	-13.0	-34.18	87.80	Horizontal	Vertical	Pass
16867.283	-44.60	26.20	-13.0	-31.60	359.60	Horizontal	Vertical	Pass
17978.005	-30.02	42.48	-13.0	-17.02	303.30	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_15.26.26

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

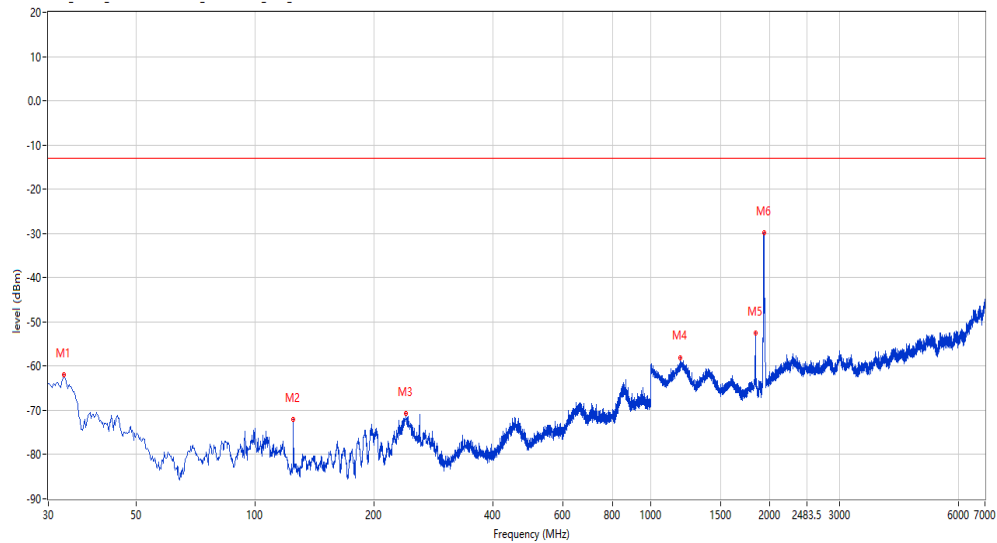

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.424	-63.83	-12.08	-13.0	-50.83	83.60	Vertical	Vertical	Pass
124.794	-72.05	-15.68	-13.0	-59.05	124.20	Vertical	Vertical	Pass
240.195	-70.90	-3.60	-13.0	-57.90	8.10	Vertical	Vertical	Pass
1190.452	-59.31	-3.99	-13.0	-46.31	355.90	Vertical	Vertical	Pass
1842.289	-52.50	-7.90	-13.0	-39.50	296.80	Vertical	Vertical	Pass
1933.767	-29.89	-8.30	-13.0	-16.89	193.00	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.11.34

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

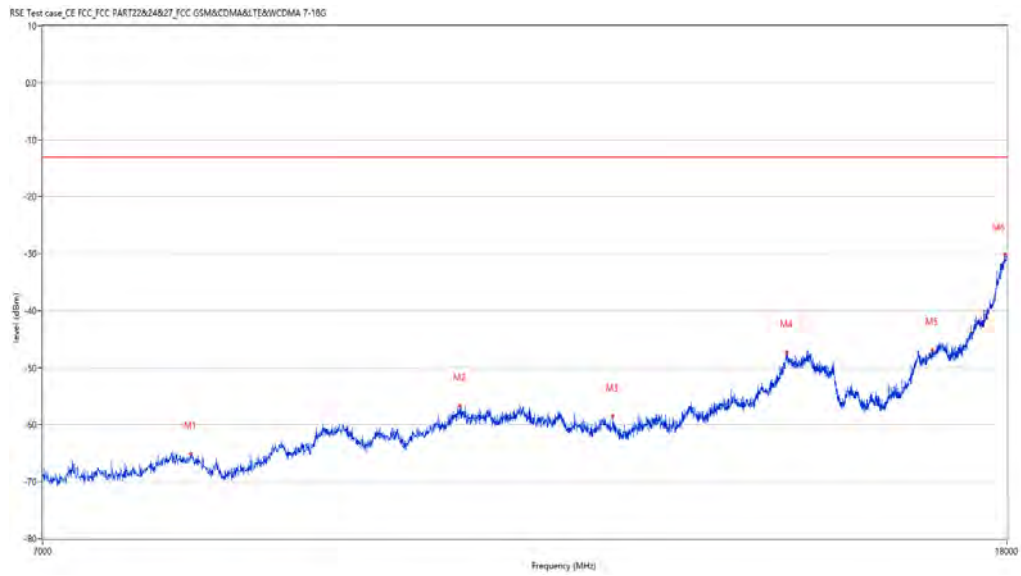

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8091.477	-65.07	10.05	-13.0	-52.07	226.30	Vertical	Vertical	Pass
10532.867	-56.63	16.27	-13.0	-43.63	231.90	Vertical	Vertical	Pass
12234.691	-58.59	14.09	-13.0	-45.59	131.40	Vertical	Vertical	Pass
14513.872	-47.36	24.24	-13.0	-34.36	325.60	Vertical	Vertical	Pass
16735.316	-46.96	25.14	-13.0	-33.96	280.20	Vertical	Vertical	Pass
17967.008	-30.10	42.12	-13.0	-17.10	10.80	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_15.19.41

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27 FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

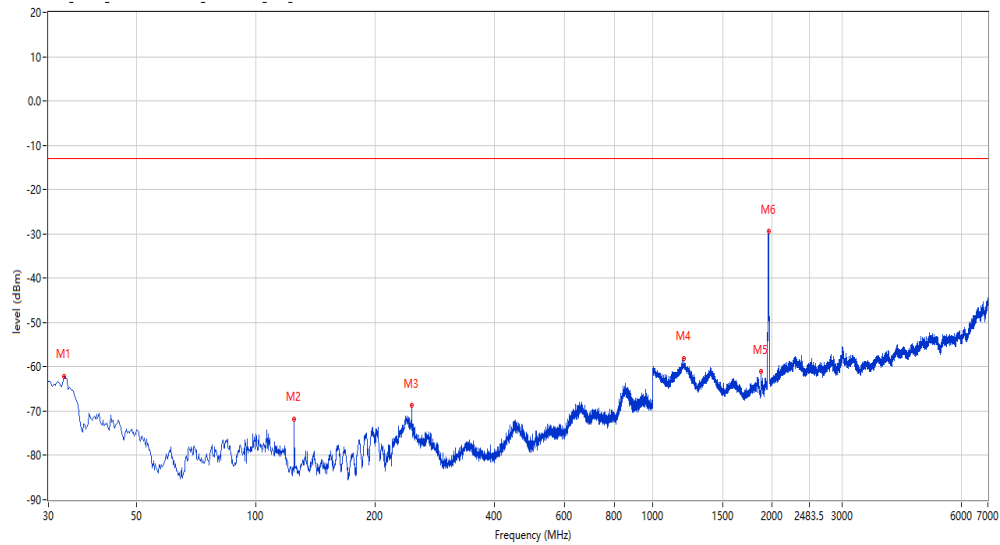

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.424	-64.39	-12.08	-13.0	-51.39	38.60	Vertical	Vertical	Pass
124.794	-71.74	-15.68	-13.0	-58.74	146.90	Vertical	Vertical	Pass
247.226	-68.61	-5.45	-13.0	-55.61	308.70	Vertical	Vertical	Pass
1197.951	-58.05	-3.67	-13.0	-45.05	247.30	Vertical	Vertical	Pass
1878.780	-61.05	-8.17	-13.0	-48.05	287.90	Vertical	Vertical	Pass
1960.760	-29.40	-8.28	-13.0	-16.40	185.50	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.13.59

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

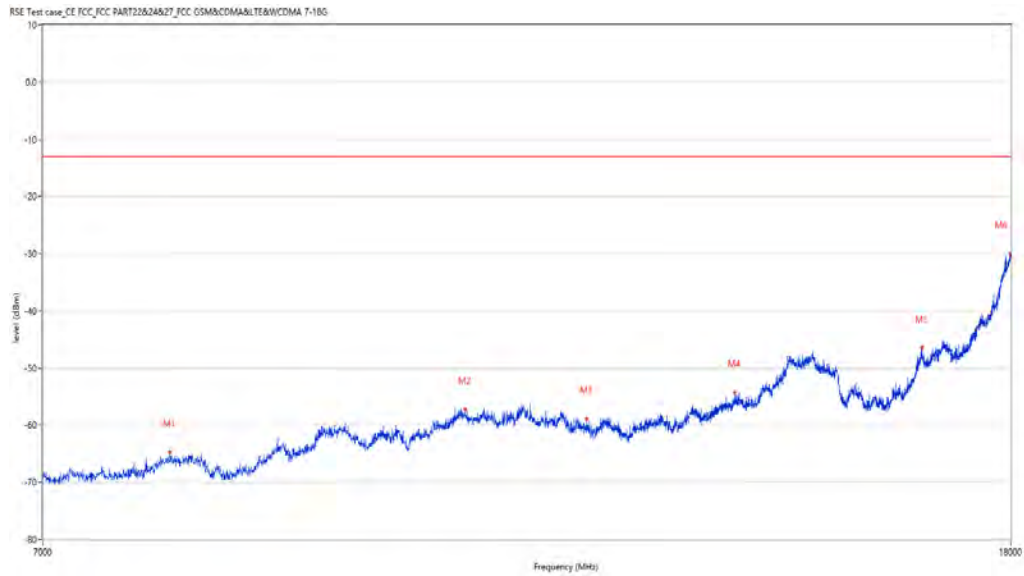

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7923.769	-64.66	9.27	-13.0	-51.66	31.60	Vertical	Vertical	Pass
10568.608	-57.17	16.14	-13.0	-44.17	296.70	Vertical	Vertical	Pass
11902.024	-58.92	13.48	-13.0	-45.92	91.30	Vertical	Vertical	Pass
13749.563	-54.18	17.85	-13.0	-41.18	358.80	Vertical	Vertical	Pass
16501.625	-46.45	24.96	-13.0	-33.45	85.30	Vertical	Vertical	Pass
17983.504	-30.01	42.65	-13.0	-17.01	71.50	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_15.47.48

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

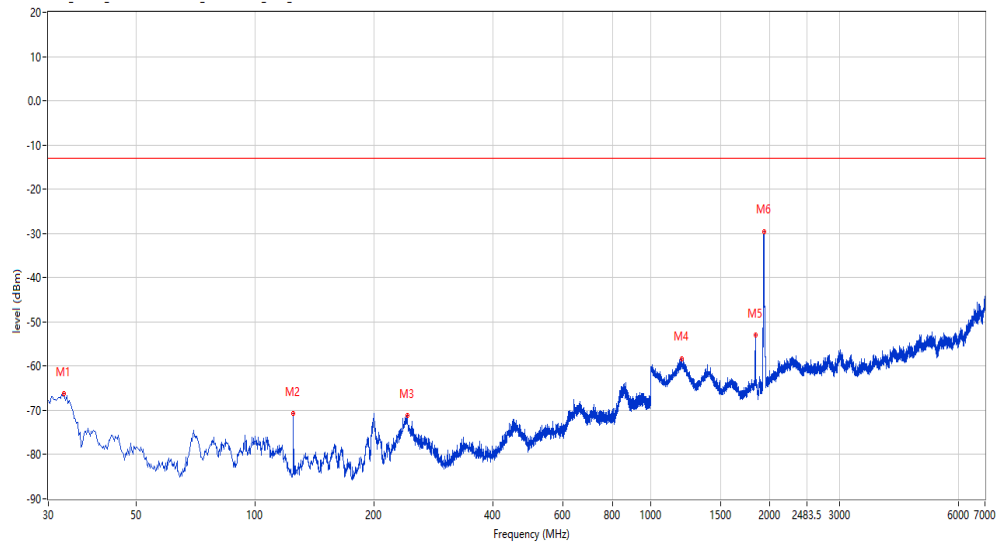

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.909	-66.32	-11.98	-13.0	-53.32	331.30	Vertical	Vertical	Pass
124.794	-72.07	-15.68	-13.0	-59.07	359.00	Vertical	Vertical	Pass
242.619	-71.17	-4.24	-13.0	-58.17	255.80	Vertical	Vertical	Pass
1196.951	-58.26	-3.71	-13.0	-45.26	8.90	Vertical	Vertical	Pass
1842.289	-52.97	-7.90	-13.0	-39.97	294.70	Vertical	Vertical	Pass
1932.267	-29.62	-8.29	-13.0	-16.62	164.00	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.09.43

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

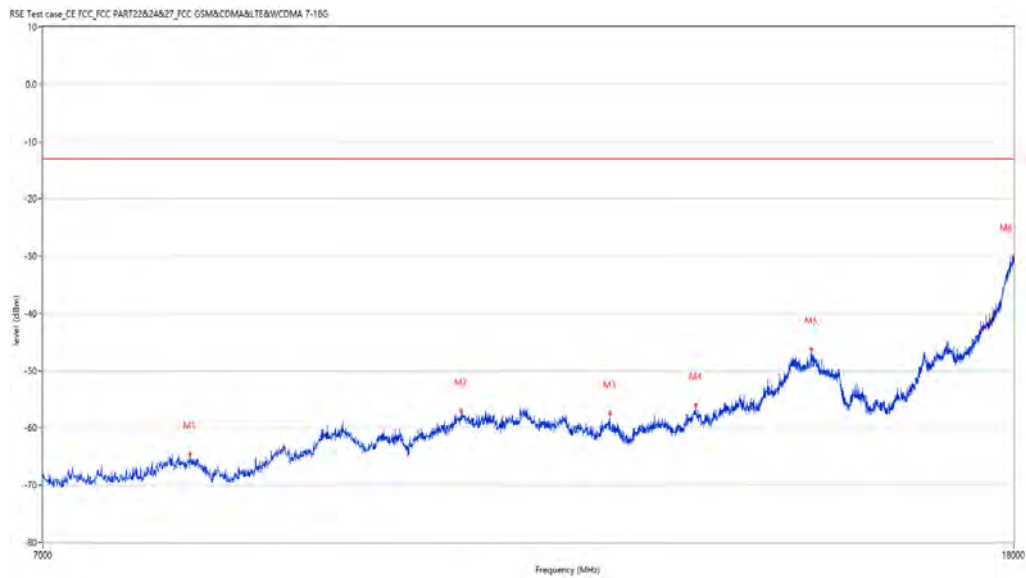

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8074.981	-64.55	9.71	-13.0	-51.55	191.70	Vertical	Vertical	Pass
10516.371	-57.02	16.40	-13.0	-44.02	335.30	Vertical	Vertical	Pass
12152.212	-57.47	14.65	-13.0	-44.47	53.60	Vertical	Vertical	Pass
13207.948	-56.05	16.03	-13.0	-43.05	359.60	Vertical	Vertical	Pass
14786.053	-46.24	25.55	-13.0	-33.24	310.40	Vertical	Vertical	Pass
18000.000	-30.02	43.18	-13.0	-17.02	315.60	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.02.29

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

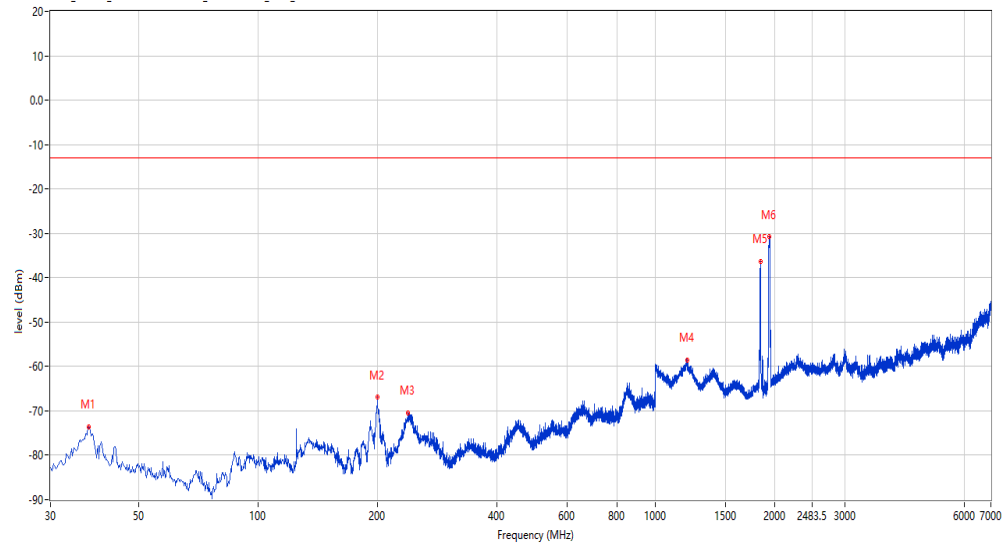

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-73.54	-11.16	-13.0	-60.54	344.10	Horizontal	Vertical	Pass
199.950	-66.85	-9.11	-13.0	-53.85	75.10	Horizontal	Vertical	Pass
238.255	-70.36	-4.24	-13.0	-57.36	183.40	Horizontal	Vertical	Pass
1204.449	-58.48	-3.83	-13.0	-45.48	252.50	Horizontal	Vertical	Pass
1839.290	-36.26	-7.94	-13.0	-23.26	266.30	Horizontal	Vertical	Pass
1937.266	-30.78	-8.32	-13.0	-17.78	241.70	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.24.52

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

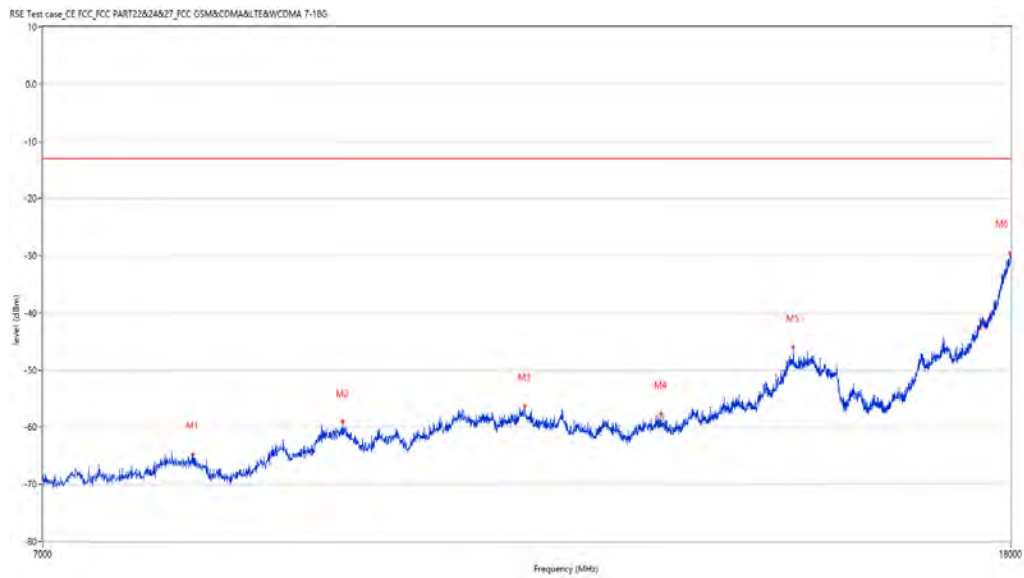

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8105.224	-64.68	10.16	-13.0	-51.68	232.60	Horizontal	Vertical	Pass
9380.905	-59.06	15.04	-13.0	-46.06	86.80	Horizontal	Vertical	Pass
11200.950	-56.27	16.01	-13.0	-43.27	360.00	Horizontal	Vertical	Pass
12798.300	-57.67	14.87	-13.0	-44.67	235.20	Horizontal	Vertical	Pass
14555.111	-45.99	24.27	-13.0	-32.99	139.30	Horizontal	Vertical	Pass
17991.752	-29.60	42.92	-13.0	-16.60	359.80	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_15.59.58

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

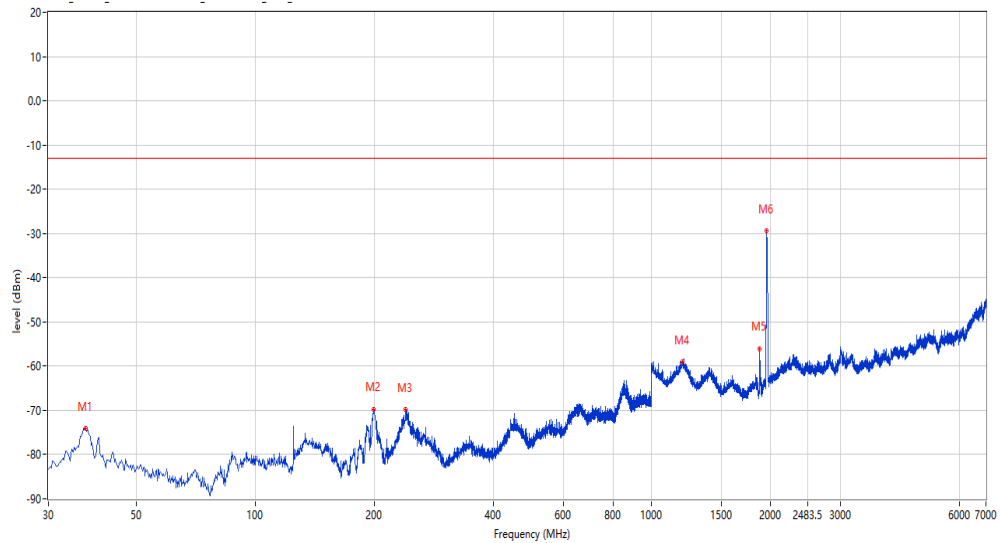

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.273	-74.13	-11.20	-13.0	-61.13	323.00	Horizontal	Vertical	Pass
198.738	-69.82	-10.25	-13.0	-56.82	64.00	Horizontal	Vertical	Pass
239.710	-69.89	-3.66	-13.0	-56.89	306.60	Horizontal	Vertical	Pass
1198.450	-59.02	-3.65	-13.0	-46.02	64.60	Horizontal	Vertical	Pass
1879.280	-56.13	-8.18	-13.0	-43.13	257.00	Horizontal	Vertical	Pass
1957.761	-29.48	-8.31	-13.0	-16.48	245.80	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.26.28

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

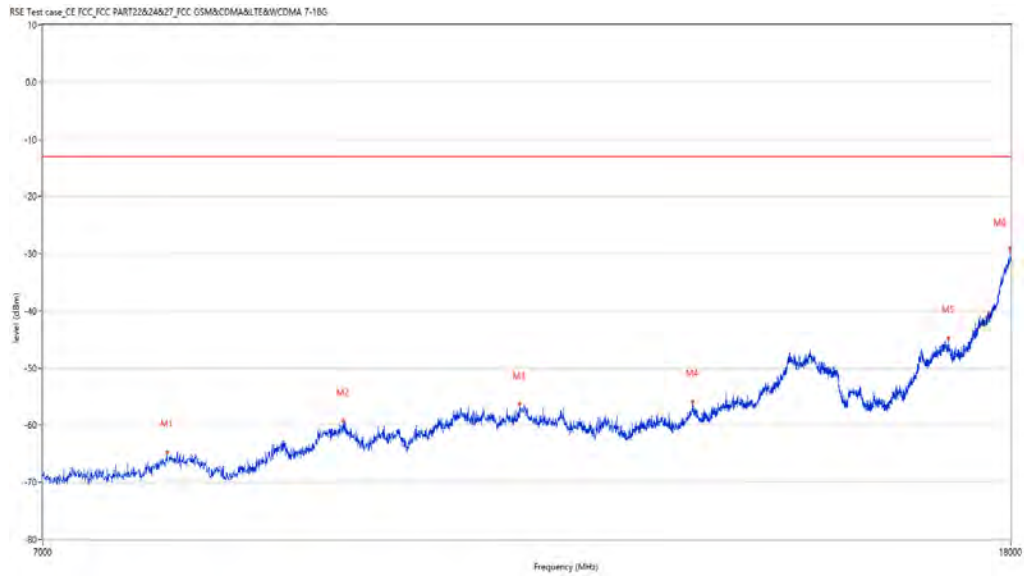

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7901.775	-64.71	9.74	-13.0	-51.71	155.60	Horizontal	Vertical	Pass
9386.403	-59.20	15.12	-13.0	-46.20	121.70	Horizontal	Vertical	Pass
11143.214	-56.34	15.51	-13.0	-43.34	243.10	Horizontal	Vertical	Pass
13196.951	-55.87	16.01	-13.0	-42.87	231.90	Horizontal	Vertical	Pass
16936.016	-44.76	26.48	-13.0	-31.76	129.50	Horizontal	Vertical	Pass
17989.003	-29.11	42.83	-13.0	-16.11	37.60	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.05.29

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

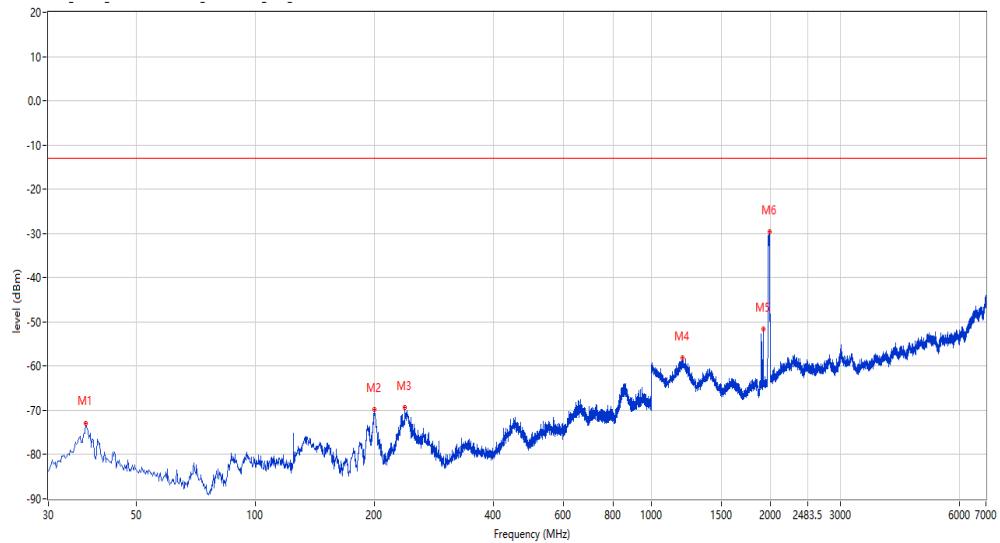

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.273	-73.32	-11.20	-13.0	-60.32	341.30	Horizontal	Vertical	Pass
200.192	-69.82	-9.17	-13.0	-56.82	62.80	Horizontal	Vertical	Pass
238.255	-69.29	-4.24	-13.0	-56.29	312.20	Horizontal	Vertical	Pass
1200.950	-58.23	-3.63	-13.0	-45.23	236.90	Horizontal	Vertical	Pass
1921.270	-51.55	-8.29	-13.0	-38.55	250.70	Horizontal	Vertical	Pass
1987.753	-29.70	-7.89	-13.0	-16.70	236.90	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.22.20

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

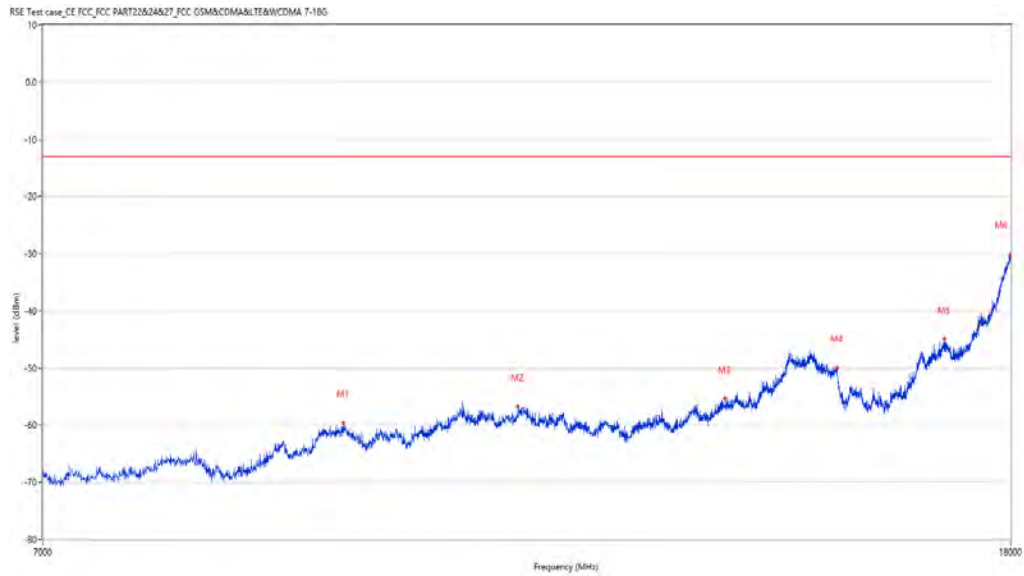

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9383.654	-59.54	15.08	-13.0	-46.54	266.90	Horizontal	Vertical	Pass
11123.969	-56.66	15.22	-13.0	-43.66	39.40	Horizontal	Vertical	Pass
13617.596	-55.27	18.21	-13.0	-42.27	241.60	Horizontal	Vertical	Pass
15192.952	-49.93	21.47	-13.0	-36.93	298.50	Horizontal	Vertical	Pass
16872.782	-44.88	26.20	-13.0	-31.88	0.70	Horizontal	Vertical	Pass
17986.253	-30.16	42.74	-13.0	-17.16	193.90	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.15.04

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

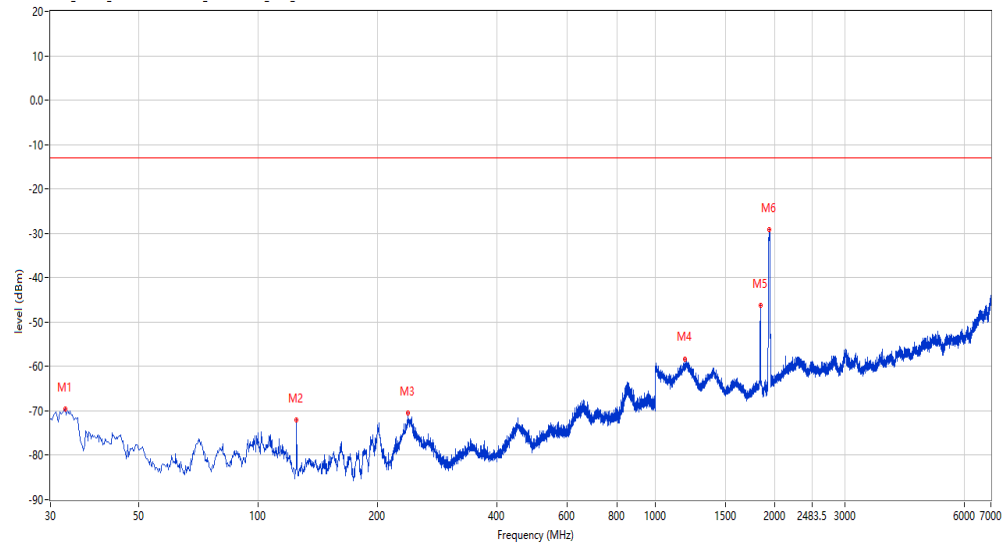

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.667	-69.59	-12.03	-13.0	-56.59	243.30	Vertical	Vertical	Pass
124.794	-72.12	-15.68	-13.0	-59.12	359.90	Vertical	Vertical	Pass
238.498	-70.54	-4.14	-13.0	-57.54	328.20	Vertical	Vertical	Pass
1186.453	-58.33	-4.19	-13.0	-45.33	204.20	Vertical	Vertical	Pass
1840.790	-46.17	-7.89	-13.0	-33.17	286.00	Vertical	Vertical	Pass
1936.766	-29.14	-8.32	-13.0	-16.14	193.40	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.31.13

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8052.987	-63.97	9.25	-13.0	-50.97	188.70	Vertical	Vertical	Pass
10136.966	-59.44	13.64	-13.0	-46.44	79.60	Vertical	Vertical	Pass
12160.460	-58.33	14.51	-13.0	-45.33	85.20	Vertical	Vertical	Pass
13771.557	-54.13	17.78	-13.0	-41.13	0.00	Vertical	Vertical	Pass
16504.374	-46.23	24.86	-13.0	-33.23	0.90	Vertical	Vertical	Pass
17994.501	-29.56	43.00	-13.0	-16.56	14.90	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.17.11

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

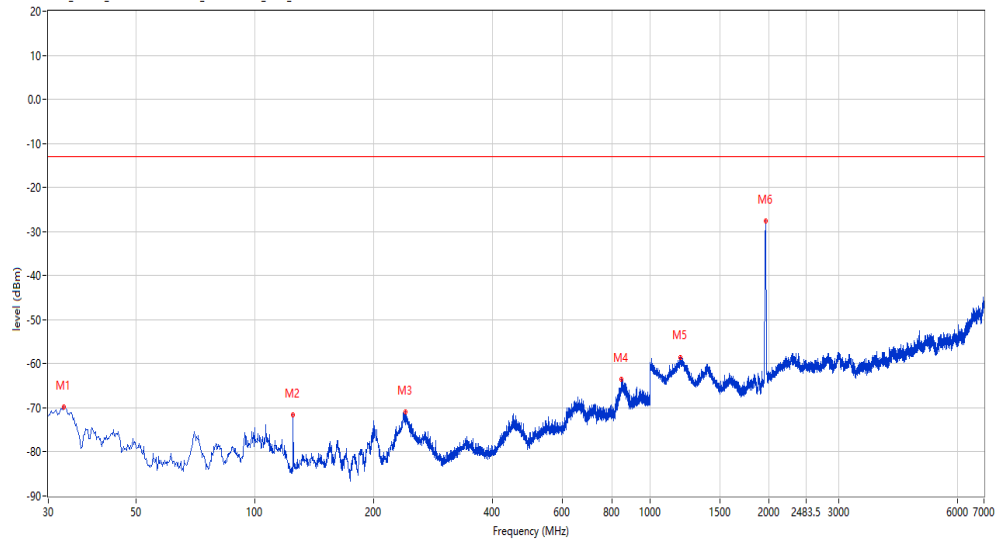

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.909	-69.77	-11.98	-13.0	-56.77	116.70	Vertical	Vertical	Pass
124.794	-71.56	-15.68	-13.0	-58.56	149.50	Vertical	Vertical	Pass
240.195	-71.02	-3.60	-13.0	-58.02	94.80	Vertical	Vertical	Pass
846.051	-63.56	4.23	-13.0	-50.56	127.50	Vertical	Vertical	Pass
1191.452	-58.49	-3.95	-13.0	-45.49	156.20	Vertical	Vertical	Pass
1961.260	-27.55	-8.27	-13.0	-14.55	189.30	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.32.58

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

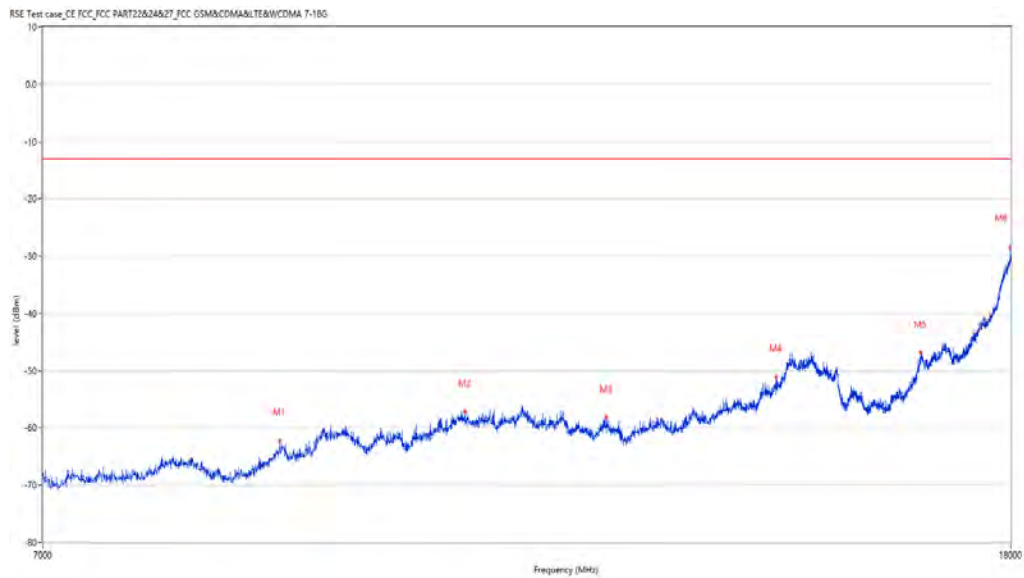

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8820.045	-62.23	11.24	-13.0	-49.23	0.00	Vertical	Vertical	Pass
10568.608	-57.16	16.14	-13.0	-44.16	35.40	Vertical	Vertical	Pass
12130.217	-58.23	14.78	-13.0	-45.23	163.40	Vertical	Vertical	Pass
14315.921	-51.16	21.56	-13.0	-38.16	136.20	Vertical	Vertical	Pass
16482.379	-46.85	24.33	-13.0	-33.85	0.00	Vertical	Vertical	Pass
17986.253	-28.29	42.74	-13.0	-15.29	66.70	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.11.52

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

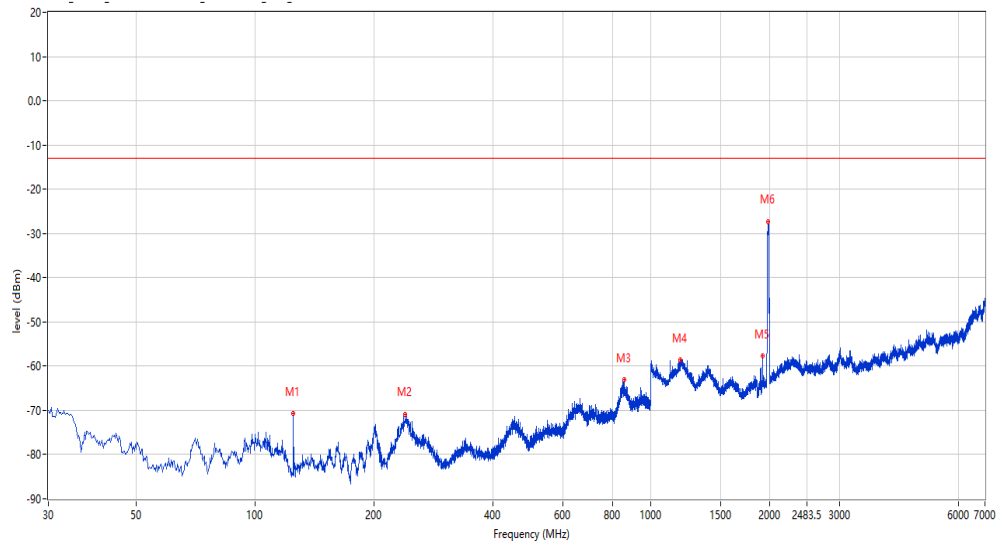

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
124.794	-70.66	-15.68	-13.0	-57.66	151.30	Vertical	Vertical	Pass
239.225	-70.81	-3.86	-13.0	-57.81	267.10	Vertical	Vertical	Pass
856.476	-63.12	4.39	-13.0	-50.12	337.20	Vertical	Vertical	Pass
1190.452	-58.57	-3.99	-13.0	-45.57	305.80	Vertical	Vertical	Pass
1921.270	-57.78	-8.29	-13.0	-44.78	297.60	Vertical	Vertical	Pass
1983.754	-27.28	-8.00	-13.0	-14.28	183.30	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.29.32

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7956.761	-64.32	8.74	-13.0	-51.32	74.00	Vertical	Vertical	Pass
10458.635	-57.63	16.35	-13.0	-44.63	113.10	Vertical	Vertical	Pass
12251.187	-58.35	14.18	-13.0	-45.35	192.10	Vertical	Vertical	Pass
14535.866	-47.35	24.24	-13.0	-34.35	0.00	Vertical	Vertical	Pass
16768.308	-45.45	24.95	-13.0	-32.45	0.80	Vertical	Vertical	Pass
17986.253	-30.53	42.74	-13.0	-17.53	183.50	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.31.34

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

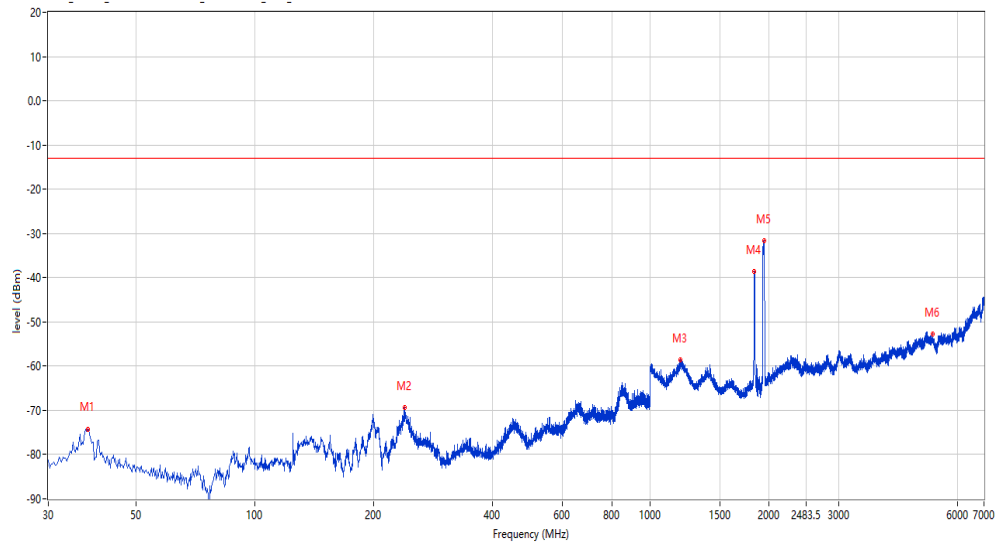

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.758	-74.23	-11.12	-13.0	-61.23	31.70	Horizontal	Vertical	Pass
238.983	-69.42	-3.95	-13.0	-56.42	304.30	Horizontal	Vertical	Pass
1194.451	-58.60	-3.82	-13.0	-45.60	357.90	Horizontal	Vertical	Pass
1837.791	-38.68	-8.07	-13.0	-25.68	260.30	Horizontal	Vertical	Pass
1945.264	-31.70	-8.32	-13.0	-18.70	238.00	Horizontal	Vertical	Pass
5187.453	-52.70	2.93	-13.0	-39.70	21.30	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.44.24

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8088.728	-64.75	10.00	-13.0	-51.75	234.00	Horizontal	Vertical	Pass
10252.437	-58.91	14.93	-13.0	-45.91	301.50	Horizontal	Vertical	Pass
12152.212	-58.47	14.65	-13.0	-45.47	70.80	Horizontal	Vertical	Pass
14588.103	-47.34	24.49	-13.0	-34.34	188.10	Horizontal	Vertical	Pass
16496.126	-45.91	24.86	-13.0	-32.91	171.00	Horizontal	Vertical	Pass
17980.755	-29.93	42.56	-13.0	-16.93	129.60	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.34.15

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
38.000	-74.26	-11.09	-13.0	-61.26	360.00	Horizontal	Vertical	Pass
198.980	-71.44	-10.02	-13.0	-58.44	58.20	Horizontal	Vertical	Pass
244.559	-67.97	-4.75	-13.0	-54.97	302.70	Horizontal	Vertical	Pass
1199.950	-57.97	-3.58	-13.0	-44.97	180.30	Horizontal	Vertical	Pass
1879.280	-55.73	-8.18	-13.0	-42.73	243.50	Horizontal	Vertical	Pass
1967.758	-30.77	-8.06	-13.0	-17.77	243.50	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.48.36

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

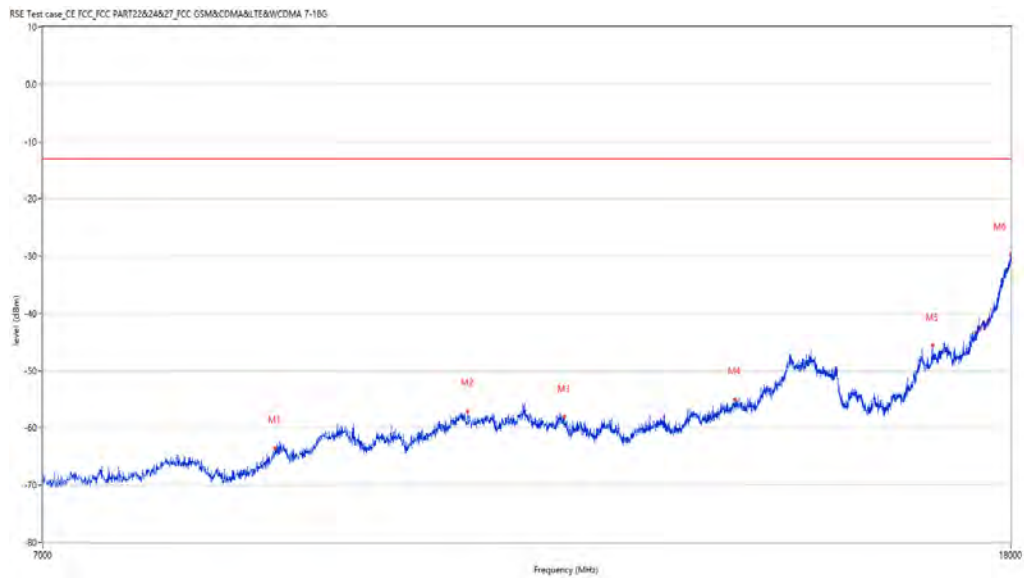

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8778.805	-63.60	10.83	-13.0	-50.60	51.00	Horizontal	Vertical	Pass
10593.352	-57.07	16.13	-13.0	-44.07	70.70	Horizontal	Vertical	Pass
11643.589	-58.10	15.42	-13.0	-45.10	82.30	Horizontal	Vertical	Pass
13749.563	-55.03	17.85	-13.0	-42.03	291.10	Horizontal	Vertical	Pass
16672.082	-45.63	25.35	-13.0	-32.63	251.50	Horizontal	Vertical	Pass
17994.501	-29.73	43.00	-13.0	-16.73	22.80	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.28.48

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

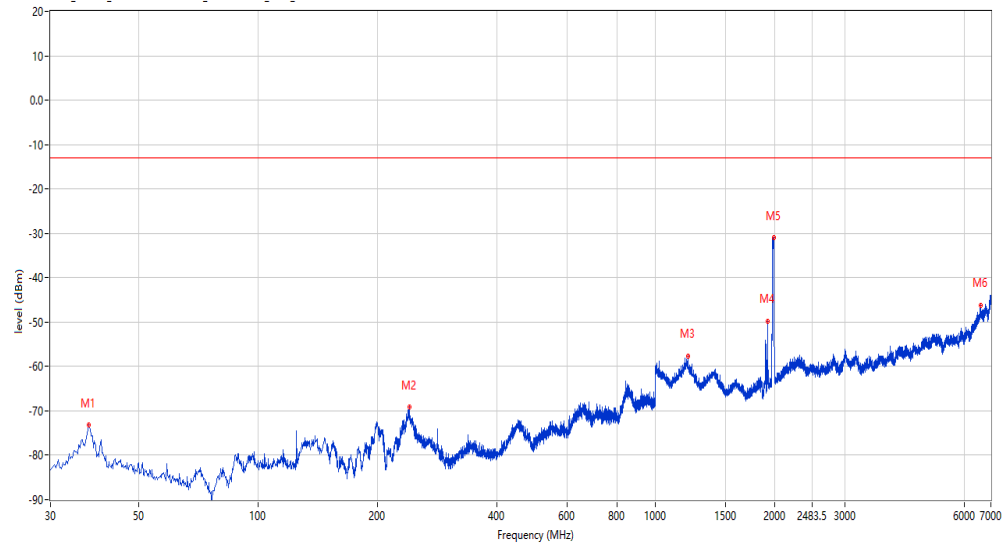

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-73.18	-11.16	-13.0	-60.18	141.80	Horizontal	Vertical	Pass
240.680	-69.03	-3.73	-13.0	-56.03	326.70	Horizontal	Vertical	Pass
1207.448	-57.57	-4.00	-13.0	-44.57	255.50	Horizontal	Vertical	Pass
1921.270	-49.75	-8.29	-13.0	-36.75	249.50	Horizontal	Vertical	Pass
1986.753	-31.03	-7.92	-13.0	-18.03	236.10	Horizontal	Vertical	Pass
6606.098	-46.24	7.96	-13.0	-33.24	99.20	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.41.19

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

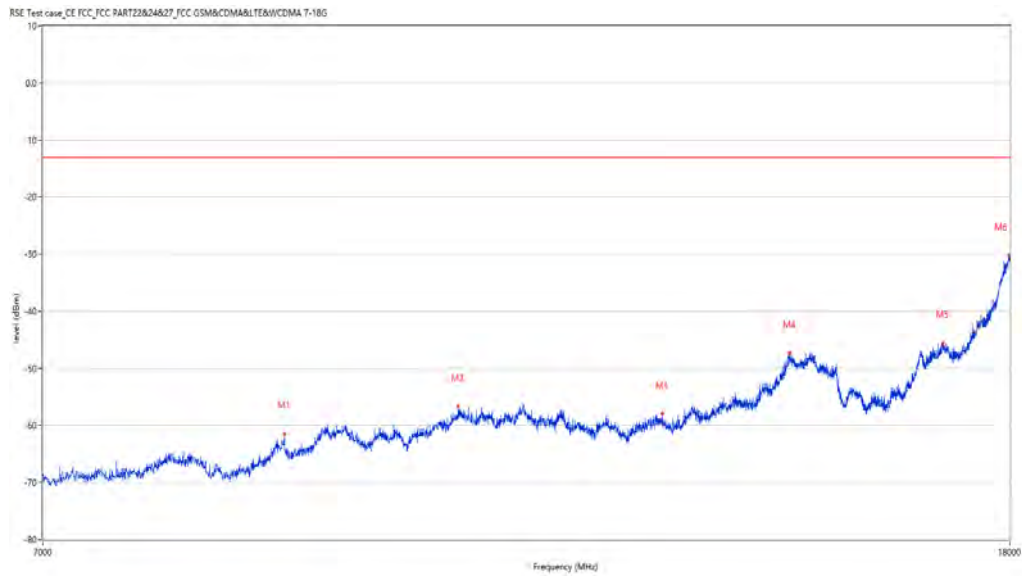

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8864.034	-61.42	11.24	-13.0	-48.42	15.70	Horizontal	Vertical	Pass
10502.624	-56.65	16.50	-13.0	-43.65	325.60	Horizontal	Vertical	Pass
12817.546	-57.97	14.81	-13.0	-44.97	13.10	Horizontal	Vertical	Pass
14516.621	-47.33	24.24	-13.0	-34.33	52.20	Horizontal	Vertical	Pass
16856.286	-45.52	26.20	-13.0	-32.52	21.30	Horizontal	Vertical	Pass
17983.504	-30.30	42.65	-13.0	-17.30	333.80	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.22.35

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

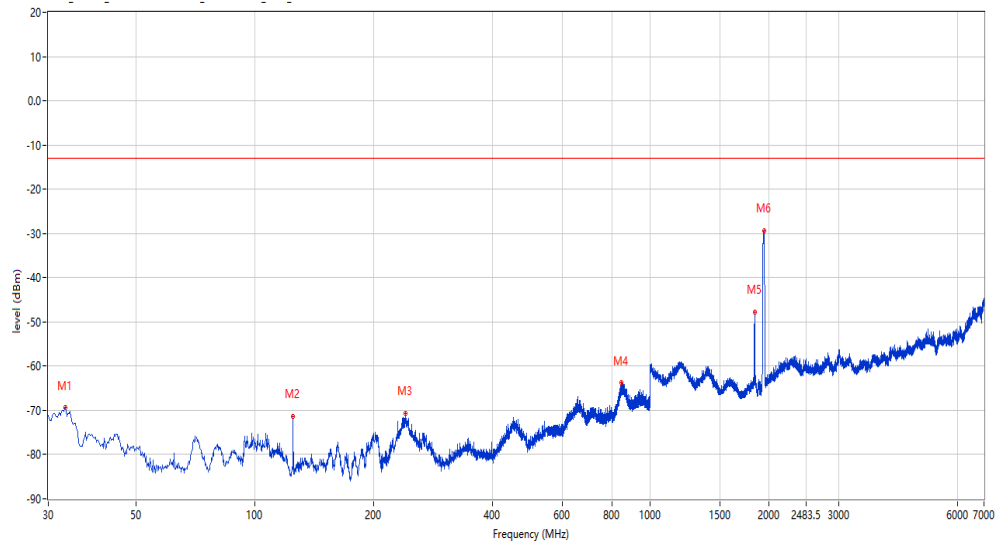

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
33.152	-69.39	-11.93	-13.0	-56.39	57.90	Vertical	Vertical	Pass
124.794	-71.29	-15.68	-13.0	-58.29	111.90	Vertical	Vertical	Pass
240.437	-70.63	-3.67	-13.0	-57.63	301.70	Vertical	Vertical	Pass
845.324	-63.84	4.16	-13.0	-50.84	196.00	Vertical	Vertical	Pass
1840.290	-47.70	-7.89	-13.0	-34.70	291.60	Vertical	Vertical	Pass
1945.764	-29.38	-8.32	-13.0	-16.38	190.30	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.36.46

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

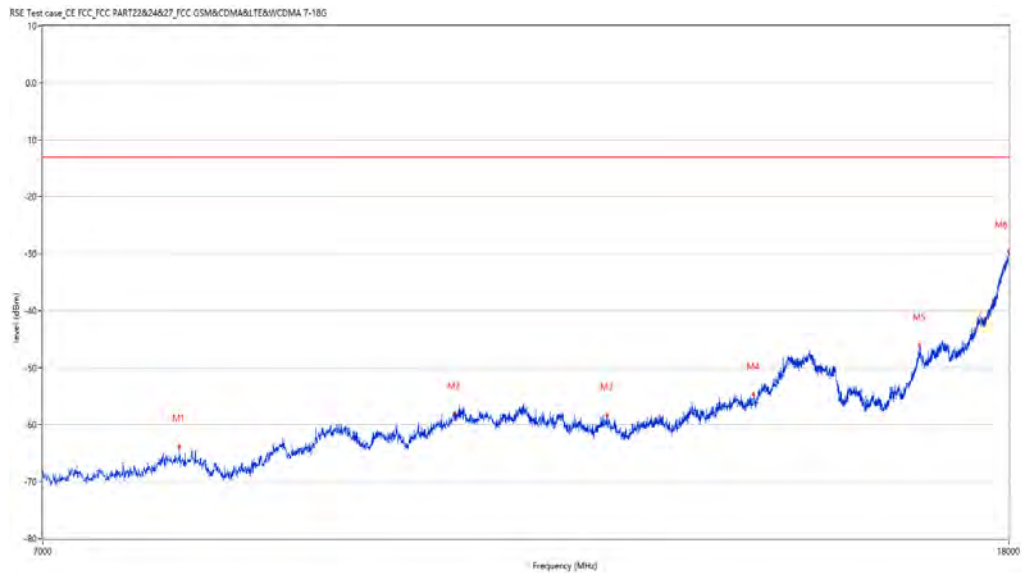

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8000.750	-63.92	9.01	-13.0	-50.92	271.10	Vertical	Vertical	Pass
10469.633	-58.10	16.40	-13.0	-45.10	81.90	Vertical	Vertical	Pass
12154.961	-58.29	14.61	-13.0	-45.29	228.30	Vertical	Vertical	Pass
14021.745	-54.72	18.76	-13.0	-41.72	10.80	Vertical	Vertical	Pass
16496.126	-46.12	24.86	-13.0	-33.12	324.80	Vertical	Vertical	Pass
18000.000	-29.59	43.18	-13.0	-16.59	265.50	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.19.51

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE_FCC_FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

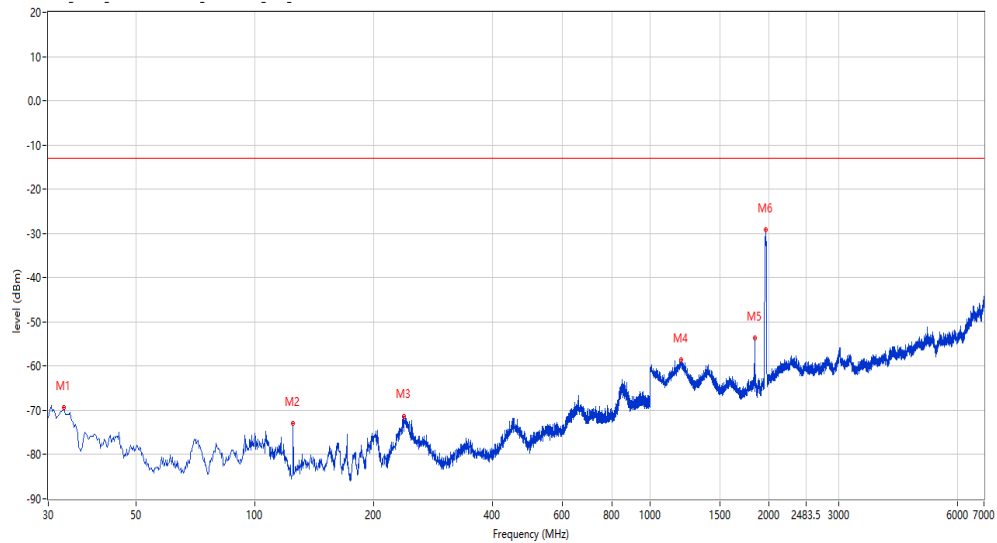

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.909	-69.31	-11.98	-13.0	-56.31	124.70	Vertical	Vertical	Pass
124.794	-73.04	-15.68	-13.0	-60.04	179.50	Vertical	Vertical	Pass
238.740	-71.40	-4.05	-13.0	-58.40	150.80	Vertical	Vertical	Pass
1196.951	-58.58	-3.71	-13.0	-45.58	122.90	Vertical	Vertical	Pass
1842.289	-53.54	-7.90	-13.0	-40.54	197.40	Vertical	Vertical	Pass
1959.260	-29.27	-8.31	-13.0	-16.27	189.20	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.38.18

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

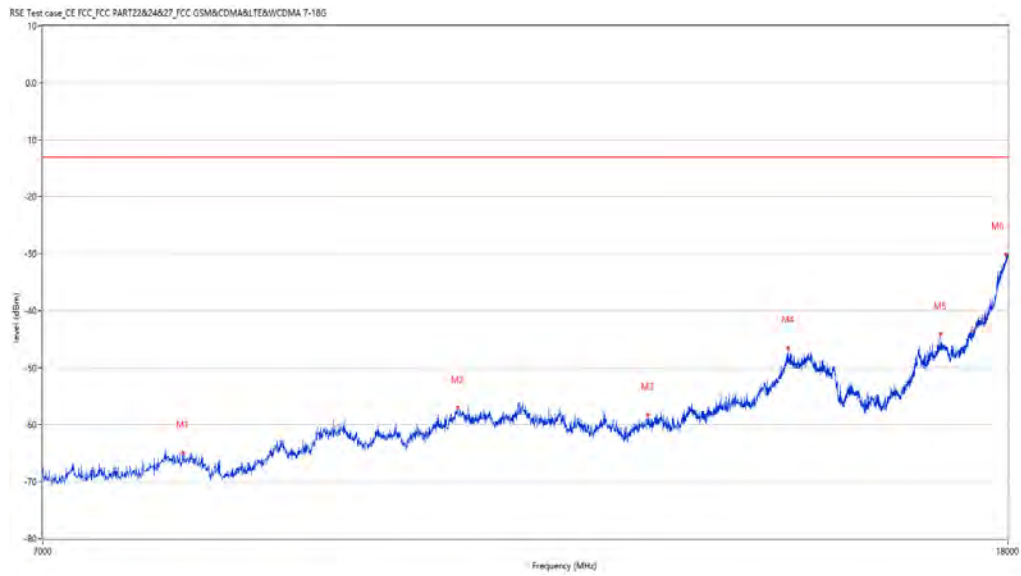

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8028.243	-64.97	9.11	-13.0	-51.97	43.90	Vertical	Vertical	Pass
10505.374	-57.02	16.48	-13.0	-44.02	251.60	Vertical	Vertical	Pass
12655.336	-58.28	14.58	-13.0	-45.28	141.80	Vertical	Vertical	Pass
14516.621	-46.56	24.24	-13.0	-33.56	119.50	Vertical	Vertical	Pass
16848.038	-44.14	26.16	-13.0	-31.14	55.50	Vertical	Vertical	Pass
17967.008	-30.11	42.12	-13.0	-17.11	0.70	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.24.57

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1&LTE B2&25

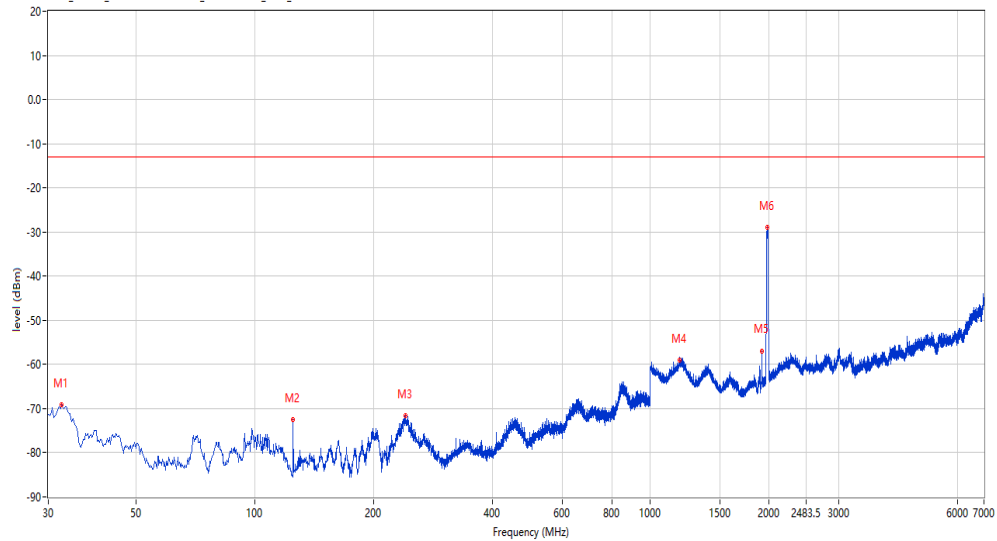

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.424	-69.14	-12.08	-13.0	-56.14	102.00	Vertical	Vertical	Pass
124.794	-72.49	-15.68	-13.0	-59.49	360.00	Vertical	Vertical	Pass
240.437	-71.69	-3.67	-13.0	-58.69	142.90	Vertical	Vertical	Pass
1189.453	-59.00	-4.04	-13.0	-46.00	358.80	Vertical	Vertical	Pass
1921.270	-56.89	-8.29	-13.0	-43.89	283.80	Vertical	Vertical	Pass
1979.755	-28.98	-8.09	-13.0	-15.98	192.60	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.35.06

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

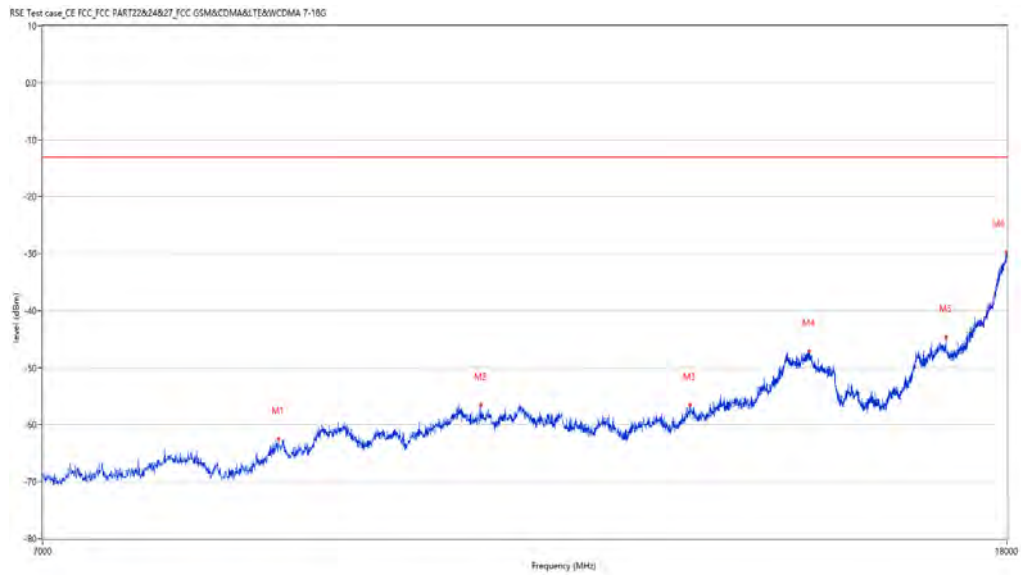

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8817.296	-62.53	11.21	-13.0	-49.53	64.40	Vertical	Vertical	Pass
10752.812	-56.52	16.66	-13.0	-43.52	207.00	Vertical	Vertical	Pass
13196.951	-56.58	16.01	-13.0	-43.58	175.70	Vertical	Vertical	Pass
14830.042	-47.12	25.71	-13.0	-34.12	226.70	Vertical	Vertical	Pass
16952.512	-44.61	26.51	-13.0	-31.61	126.10	Vertical	Vertical	Pass
17986.253	-29.86	42.74	-13.0	-16.86	0.00	Vertical	Vertical	Pass

Test result

Project Number: 1744444

Test Time: 2020-02-12_16.51.01

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-72.06	-10.79	-13.0	-59.06	174.90	Horizontal	Vertical	Pass
138.370	-71.20	-13.91	-13.0	-58.20	161.20	Horizontal	Vertical	Pass
239.468	-68.14	-1.78	-13.0	-55.14	292.50	Horizontal	Vertical	Pass
1202.475	-56.63	-3.80	-13.0	-43.63	93.60	Horizontal	Vertical	Pass
2110.611	-32.69	-5.54	-13.0	-19.69	231.30	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.53.20

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

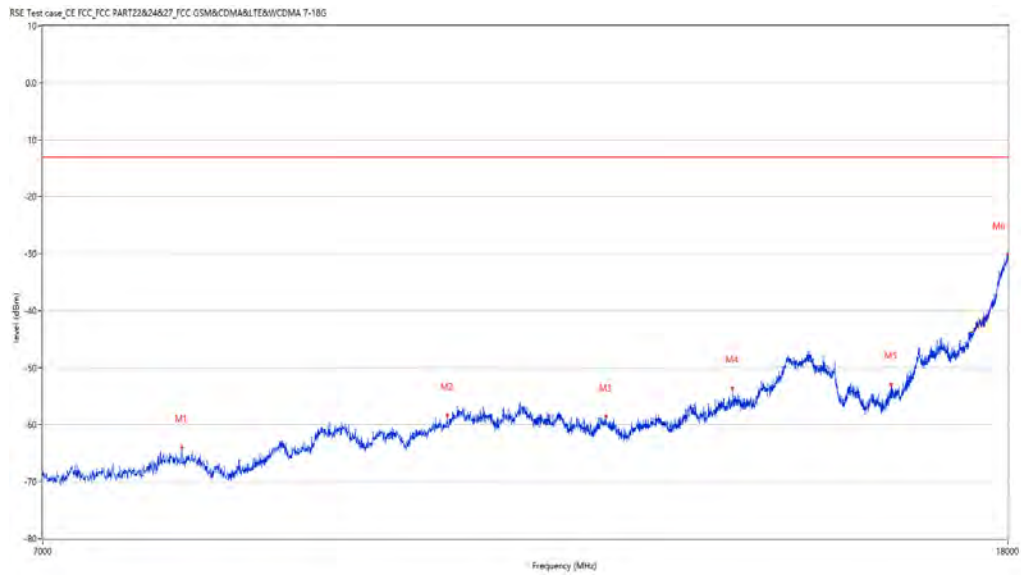

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8019.995	-63.94	9.08	-13.0	-50.94	254.60	Horizontal	Vertical	Pass
10398.150	-58.26	15.68	-13.0	-45.26	278.10	Horizontal	Vertical	Pass
12143.964	-58.55	14.72	-13.0	-45.55	27.60	Horizontal	Vertical	Pass
13746.813	-53.51	17.84	-13.0	-40.51	295.90	Horizontal	Vertical	Pass
16061.735	-52.90	17.70	-13.0	-39.90	286.60	Horizontal	Vertical	Pass
18000.000	-30.00	43.18	-13.0	-17.00	155.60	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.44.25

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case_CE FCC PART22&24&27 FCC PART 27_1700_WCDMA B4&LTE B4

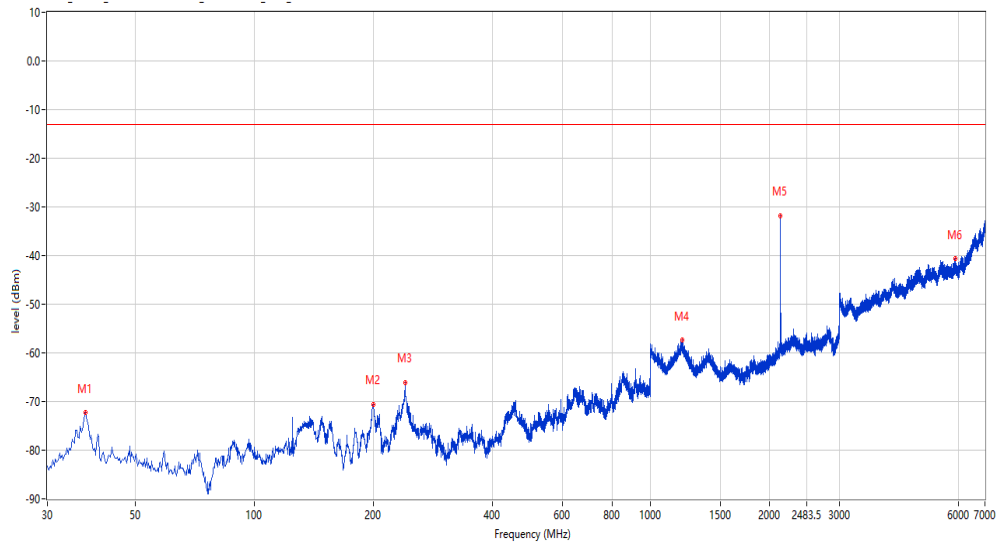

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-72.31	-10.79	-13.0	-59.31	244.10	Horizontal	Vertical	Pass
199.708	-70.54	-8.89	-13.0	-57.54	87.90	Horizontal	Vertical	Pass
240.437	-66.03	-1.68	-13.0	-53.03	288.50	Horizontal	Vertical	Pass
1204.474	-57.42	-3.90	-13.0	-44.42	212.00	Horizontal	Vertical	Pass
2132.358	-31.83	-5.11	-13.0	-18.83	231.70	Horizontal	Vertical	Pass
5895.138	-40.68	3.28	-13.0	-27.68	49.00	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.54.57

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8135.466	-64.59	9.74	-13.0	-51.59	341.20	Horizontal	Vertical	Pass
9864.784	-59.63	13.33	-13.0	-46.63	42.30	Horizontal	Vertical	Pass
11640.840	-57.67	15.49	-13.0	-44.67	68.00	Horizontal	Vertical	Pass
14502.874	-47.28	24.24	-13.0	-34.28	253.70	Horizontal	Vertical	Pass
16471.382	-45.65	23.90	-13.0	-32.65	0.10	Horizontal	Vertical	Pass
17986.253	-29.50	42.74	-13.0	-16.50	229.10	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.53.32

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.273	-73.21	-10.77	-13.0	-60.21	9.30	Horizontal	Vertical	Pass
198.980	-69.35	-9.64	-13.0	-56.35	47.30	Horizontal	Vertical	Pass
239.468	-67.60	-1.78	-13.0	-54.60	311.50	Horizontal	Vertical	Pass
1219.473	-57.76	-4.79	-13.0	-44.76	74.70	Horizontal	Vertical	Pass
2154.106	-30.70	-4.91	-13.0	-17.70	236.50	Horizontal	Vertical	Pass
5207.224	-42.14	2.80	-13.0	-29.14	358.70	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_16.50.40

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

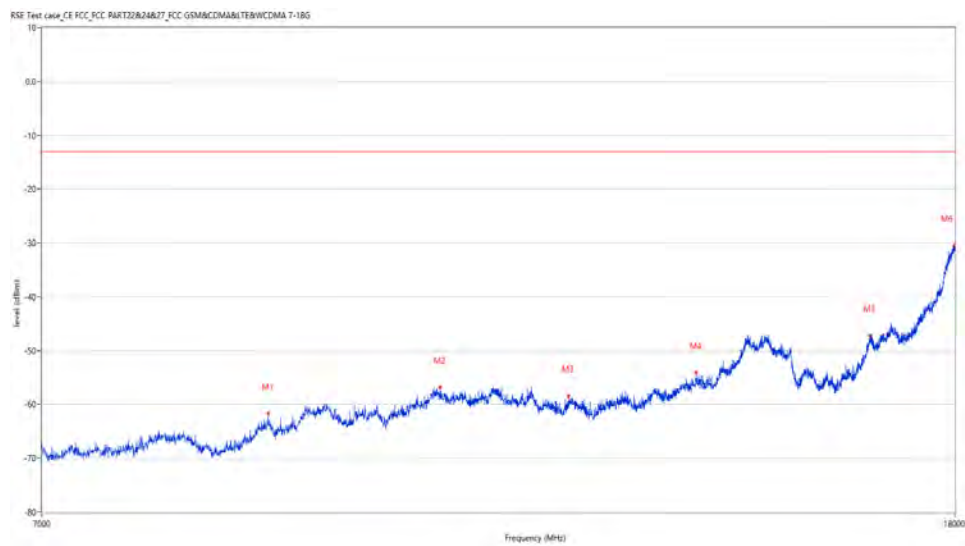

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8847.538	-61.70	11.57	-13.0	-48.70	287.00	Horizontal	Vertical	Pass
10568.608	-56.77	16.14	-13.0	-43.77	106.10	Horizontal	Vertical	Pass
12069.733	-58.49	14.53	-13.0	-45.49	224.10	Horizontal	Vertical	Pass
13771.557	-54.13	17.78	-13.0	-41.13	212.90	Horizontal	Vertical	Pass
16482.379	-47.23	24.33	-13.0	-34.23	246.80	Horizontal	Vertical	Pass
17983.504	-30.47	42.65	-13.0	-17.47	52.50	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.00.10

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case: FCC_FCC PART2282MHz7_FCC PART 27_1700_MCDMA B4BLTE B4

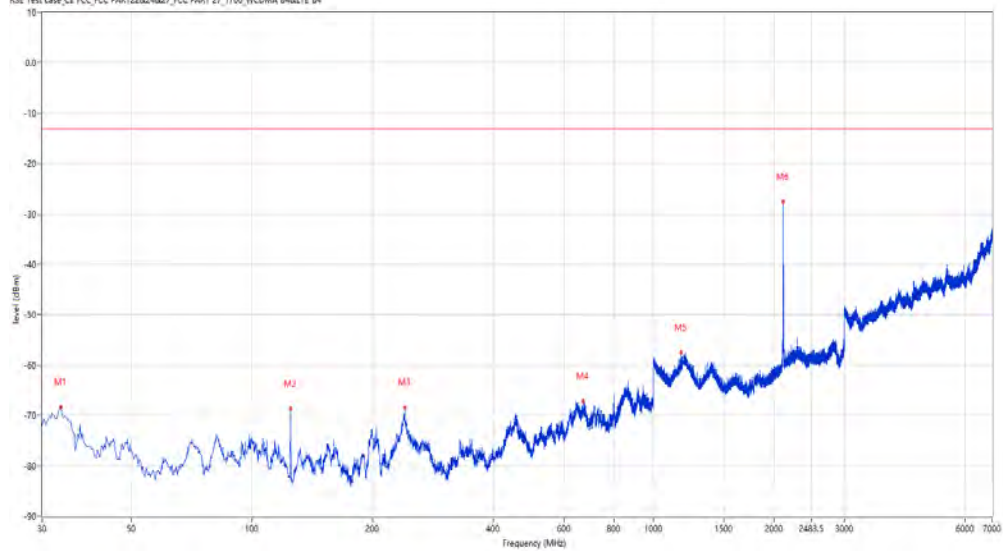

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
33.394	-68.38	-11.77	-13.0	-55.38	112.10	Vertical	Vertical	Pass
124.794	-68.59	-14.48	-13.0	-55.59	136.30	Vertical	Vertical	Pass
240.437	-68.39	-1.68	-13.0	-55.39	275.80	Vertical	Vertical	Pass
667.858	-67.16	0.36	-13.0	-54.16	44.40	Vertical	Vertical	Pass
1173.228	-57.53	-4.93	-13.0	-44.53	124.60	Vertical	Vertical	Pass
2110.361	-27.53	-5.55	-13.0	-14.53	212.00	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_17.06.30

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

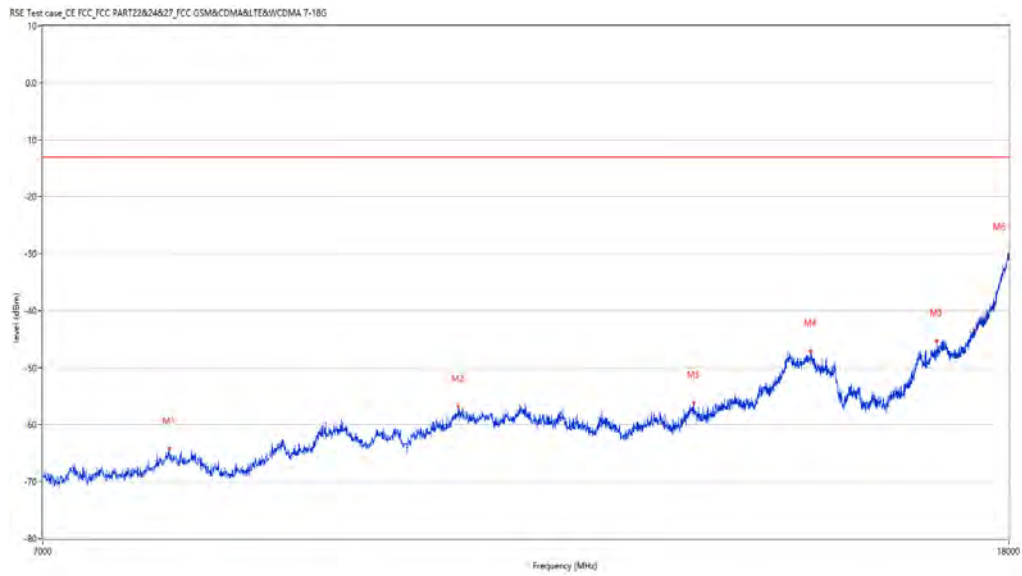

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7921.020	-64.20	9.33	-13.0	-51.20	218.50	Vertical	Vertical	Pass
10508.123	-56.84	16.46	-13.0	-43.84	284.00	Vertical	Vertical	Pass
13227.193	-56.14	15.91	-13.0	-43.14	359.50	Vertical	Vertical	Pass
14830.042	-47.03	25.71	-13.0	-34.03	130.30	Vertical	Vertical	Pass
16776.556	-45.33	25.00	-13.0	-32.33	252.70	Vertical	Vertical	Pass
17994.501	-30.08	43.00	-13.0	-17.08	179.40	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.02.46

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
33.394	-68.60	-11.77	-13.0	-55.60	130.30	Vertical	Vertical	Pass
124.794	-70.04	-14.48	-13.0	-57.04	0.00	Vertical	Vertical	Pass
239.953	-69.59	-1.47	-13.0	-56.59	160.40	Vertical	Vertical	Pass
1208.974	-58.02	-4.11	-13.0	-45.02	353.90	Vertical	Vertical	Pass
2132.608	-28.38	-5.11	-13.0	-15.38	175.80	Vertical	Vertical	Pass
5405.199	-41.27	2.48	-13.0	-28.27	83.70	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_17.08.27

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

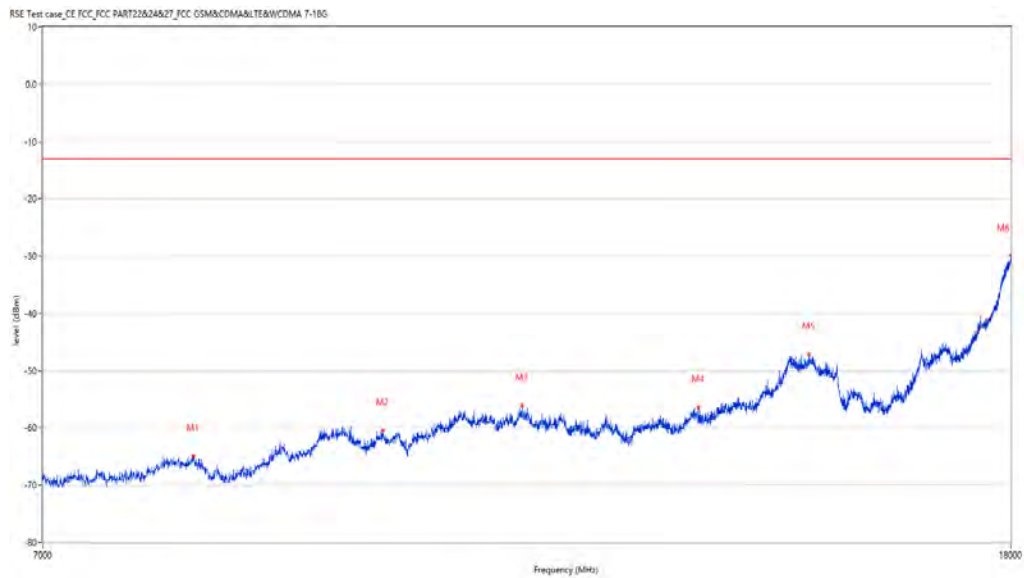

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8107.973	-64.95	10.12	-13.0	-51.95	163.00	Vertical	Vertical	Pass
9752.062	-60.45	13.64	-13.0	-47.45	107.20	Vertical	Vertical	Pass
11173.457	-56.10	15.80	-13.0	-43.10	302.20	Vertical	Vertical	Pass
13271.182	-56.45	15.81	-13.0	-43.45	237.80	Vertical	Vertical	Pass
14780.555	-47.18	25.48	-13.0	-34.18	104.70	Vertical	Vertical	Pass
18000.000	-29.90	43.18	-13.0	-16.90	262.70	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_16.57.18

EUT Name:

N.A

Test Engineer:

LYT

Manufacturer:

N.A

Test Standard:

FCC

Model:

N.A

Work Addition:

Normal

Temp.(oC):

20.1

Load:


full load

Hum.:

54

Remark:

DR-RSE01-E19020010-06#03

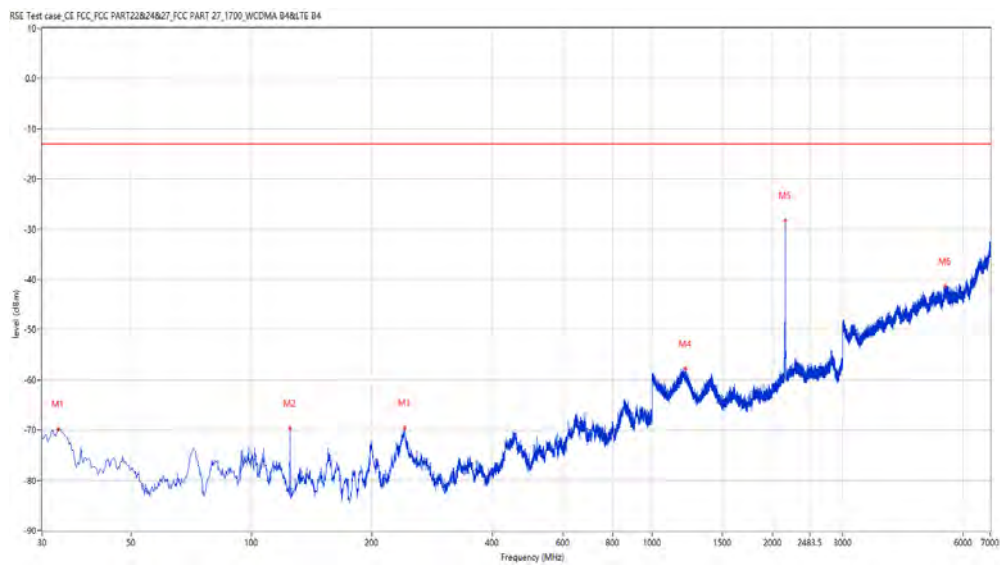

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.909	-69.78	-11.99	-13.0	-56.78	135.20	Vertical	Vertical	Pass
124.794	-69.64	-14.48	-13.0	-56.64	140.80	Vertical	Vertical	Pass
241.407	-69.56	-2.23	-13.0	-56.56	273.60	Vertical	Vertical	Pass
1213.473	-57.79	-4.39	-13.0	-44.79	332.10	Vertical	Vertical	Pass
2154.106	-33.10	-4.91	-13.0	-20.10	238.00	Vertical	Vertical	Pass
5411.199	-41.32	2.46	-13.0	-28.32	40.70	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_17.02.47

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8063.984	-64.18	9.48	-13.0	-51.18	288.50	Vertical	Vertical	Pass
9224.194	-59.97	13.59	-13.0	-46.97	58.50	Vertical	Vertical	Pass
11203.699	-56.16	15.98	-13.0	-43.16	307.80	Vertical	Vertical	Pass
13185.954	-56.24	15.77	-13.0	-43.24	27.60	Vertical	Vertical	Pass
14797.051	-46.39	25.68	-13.0	-33.39	201.10	Vertical	Vertical	Pass
17994.501	-29.16	43.00	-13.0	-16.16	316.00	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.16.39

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

RSE Test case: CT FCC_PCC PART2282M27_PCC PART 27_1700_WCDMA B4&LTE B4

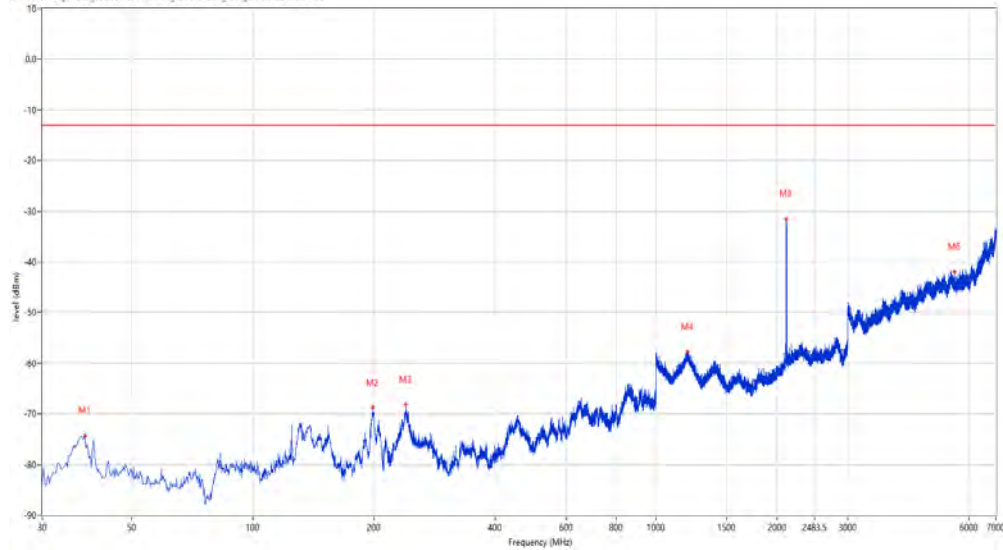

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
38.243	-74.27	-10.84	-13.0	-61.27	294.10	Horizontal	Vertical	Pass
198.495	-68.72	-10.15	-13.0	-55.72	57.40	Horizontal	Vertical	Pass
239.953	-68.21	-1.47	-13.0	-55.21	326.80	Horizontal	Vertical	Pass
1199.975	-57.81	-3.68	-13.0	-44.81	40.90	Horizontal	Vertical	Pass
2110.861	-31.61	-5.54	-13.0	-18.61	236.90	Horizontal	Vertical	Pass
5526.184	-41.97	2.20	-13.0	-28.97	358.60	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-18_13.40.14

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

RSE Test case_CE FCC FCC PART22&24&27_FCC GSM&CDMA&LTE&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8113.472	-65.06	10.04	-13.0	-52.06	293.00	Horizontal	Vertical	Pass
9400.150	-59.70	15.31	-13.0	-46.70	360.00	Horizontal	Vertical	Pass
10546.613	-57.28	16.17	-13.0	-44.28	198.40	Horizontal	Vertical	Pass
11583.104	-56.86	16.29	-13.0	-43.86	252.40	Horizontal	Vertical	Pass
14549.613	-47.77	24.24	-13.0	-34.77	266.60	Horizontal	Vertical	Pass
14769.558	-47.16	25.34	-13.0	-34.16	290.40	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.20.10

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
199.465	-69.45	-9.14	-13.0	-56.45	74.70	Horizontal	Vertical	Pass
240.195	-67.69	-1.55	-13.0	-54.69	325.10	Horizontal	Vertical	Pass
451.360	-68.61	-1.55	-13.0	-55.61	223.50	Horizontal	Vertical	Pass
1193.976	-56.38	-3.96	-13.0	-43.38	360.10	Horizontal	Vertical	Pass
2131.859	-31.00	-5.12	-13.0	-18.00	239.10	Horizontal	Vertical	Pass
5415.698	-41.37	2.43	-13.0	-28.37	263.70	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-18_13.38.44

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

RSE Test case_CE FCC FCC PART22&24&27_FCC GSM&CDMA&LTE&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8058.485	-65.11	9.37	-13.0	-52.11	0.00	Horizontal	Vertical	Pass
8795.301	-62.81	10.97	-13.0	-49.81	30.20	Horizontal	Vertical	Pass
9427.643	-59.49	14.75	-13.0	-46.49	104.20	Horizontal	Vertical	Pass
10557.611	-56.63	16.14	-13.0	-43.63	81.50	Horizontal	Vertical	Pass
14835.541	-46.90	25.71	-13.0	-33.90	16.00	Horizontal	Vertical	Pass
16482.379	-46.29	24.33	-13.0	-33.29	21.60	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.14.18

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
37.516	-74.01	-10.79	-13.0	-61.01	297.80	Horizontal	Vertical	Pass
240.922	-66.88	-1.96	-13.0	-53.88	0.90	Horizontal	Vertical	Pass
853.324	-63.41	5.07	-13.0	-50.41	45.90	Horizontal	Vertical	Pass
1184.227	-56.75	-4.44	-13.0	-43.75	347.80	Horizontal	Vertical	Pass
2154.106	-30.84	-4.91	-13.0	-17.84	232.40	Horizontal	Vertical	Pass
5919.635	-40.33	3.19	-13.0	-27.33	160.30	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-18_13.40.59

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

RSE Test case_CE FCC FCC PART22824&27 FCC GSM&CDMA&LTE&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8102.474	-64.92	10.20	-13.0	-51.92	0.60	Horizontal	Vertical	Pass
9204.949	-60.23	13.75	-13.0	-47.23	12.70	Horizontal	Vertical	Pass
10579.605	-57.13	16.14	-13.0	-44.13	75.60	Horizontal	Vertical	Pass
13766.058	-54.42	17.80	-13.0	-41.42	126.60	Horizontal	Vertical	Pass
14519.370	-46.83	24.24	-13.0	-33.83	164.50	Horizontal	Vertical	Pass
16883.779	-45.22	26.19	-13.0	-32.22	50.30	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.07.55

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.909	-68.93	-11.99	-13.0	-55.93	76.00	Vertical	Vertical	Pass
124.794	-69.54	-14.48	-13.0	-56.54	360.00	Vertical	Vertical	Pass
862.052	-63.94	4.30	-13.0	-50.94	208.40	Vertical	Vertical	Pass
1191.976	-57.76	-4.06	-13.0	-44.76	342.20	Vertical	Vertical	Pass
2111.861	-26.48	-5.52	-13.0	-13.48	181.80	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_17.14.34

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

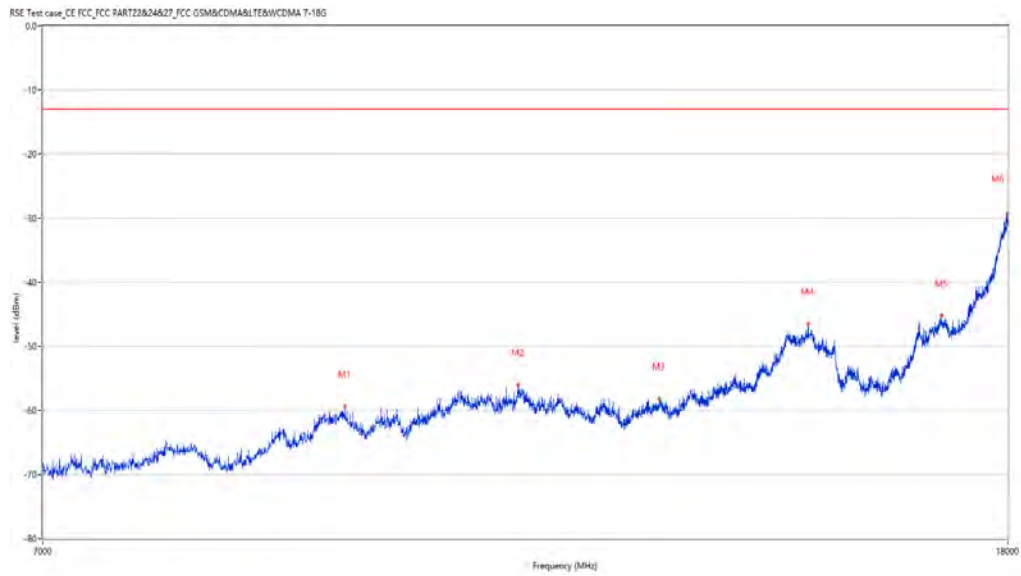

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9408.398	-59.35	15.14	-13.0	-46.35	265.60	Vertical	Vertical	Pass
11148.713	-55.97	15.60	-13.0	-42.97	234.60	Vertical	Vertical	Pass
12795.551	-58.19	14.86	-13.0	-45.19	201.50	Vertical	Vertical	Pass
14799.800	-46.48	25.72	-13.0	-33.48	84.30	Vertical	Vertical	Pass
16875.531	-45.19	26.20	-13.0	-32.19	65.00	Vertical	Vertical	Pass
17983.504	-29.40	42.65	-13.0	-16.40	215.30	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.05.23

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
31.455	-69.13	-12.63	-13.0	-56.13	358.90	Vertical	Vertical	Pass
124.794	-68.80	-14.48	-13.0	-55.80	141.40	Vertical	Vertical	Pass
239.468	-69.48	-1.78	-13.0	-56.48	125.40	Vertical	Vertical	Pass
851.870	-63.23	5.17	-13.0	-50.23	355.90	Vertical	Vertical	Pass
1200.225	-57.67	-3.69	-13.0	-44.67	68.40	Vertical	Vertical	Pass
2132.108	-26.67	-5.12	-13.0	-13.67	186.00	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_17.16.15

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Addition:

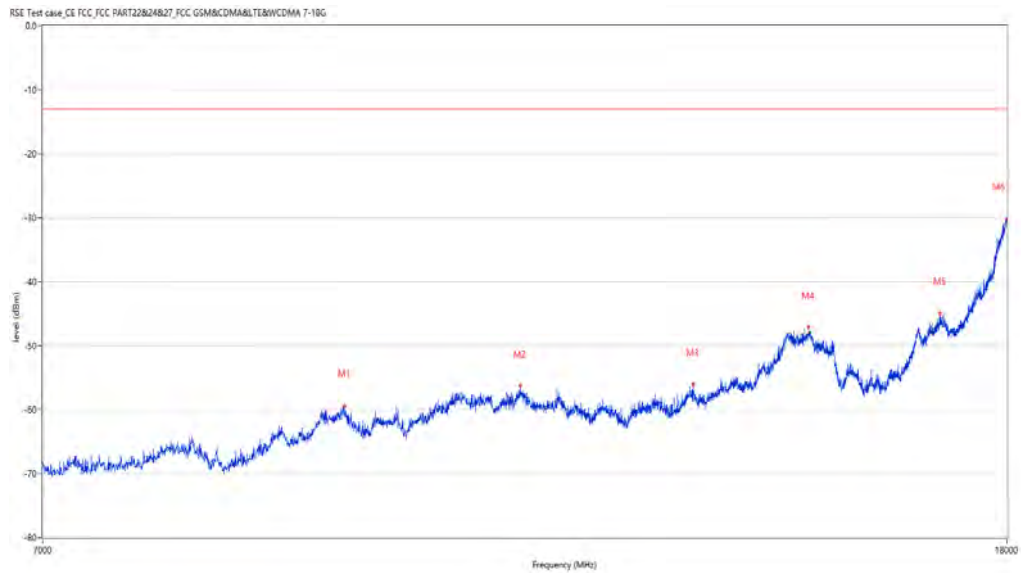

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9411.147	-59.39	15.08	-13.0	-46.39	314.50	Vertical	Vertical	Pass
11173.457	-56.32	15.80	-13.0	-43.32	168.60	Vertical	Vertical	Pass
13235.441	-56.08	15.86	-13.0	-43.08	62.90	Vertical	Vertical	Pass
14816.296	-47.15	25.71	-13.0	-34.15	46.60	Vertical	Vertical	Pass
16861.785	-44.94	26.20	-13.0	-31.94	165.60	Vertical	Vertical	Pass
17994.501	-30.24	43.00	-13.0	-17.24	154.10	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.10.29

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03

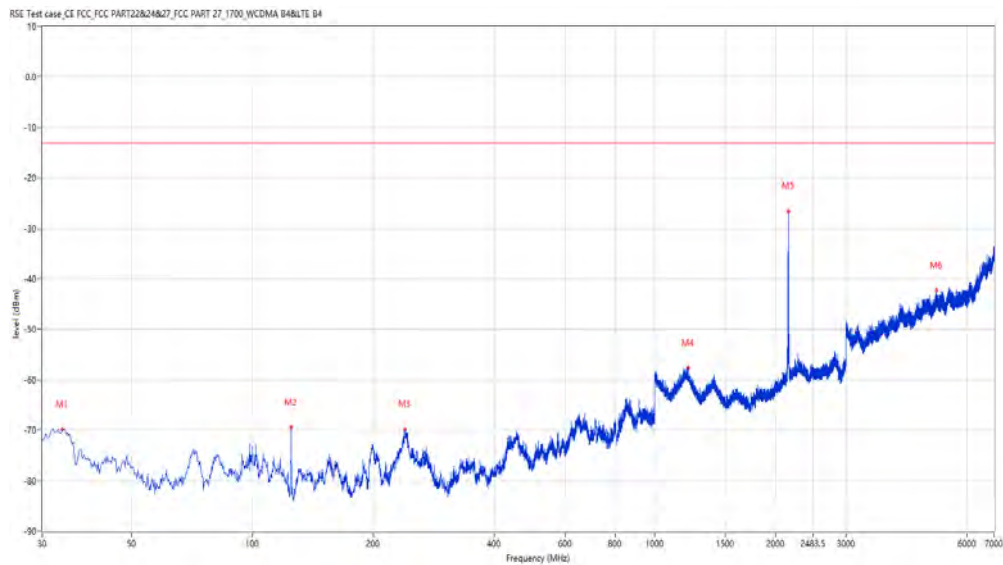

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
33.637	-69.78	-11.67	-13.0	-56.78	297.00	Vertical	Vertical	Pass
124.794	-69.35	-14.48	-13.0	-56.35	137.00	Vertical	Vertical	Pass
239.953	-69.75	-1.47	-13.0	-56.75	120.60	Vertical	Vertical	Pass
1215.473	-57.60	-4.53	-13.0	-44.60	3.40	Vertical	Vertical	Pass
2153.606	-26.59	-4.91	-13.0	-13.59	189.70	Vertical	Vertical	Pass
5034.246	-42.24	2.85	-13.0	-29.24	359.00	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-15_17.12.50

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:


Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

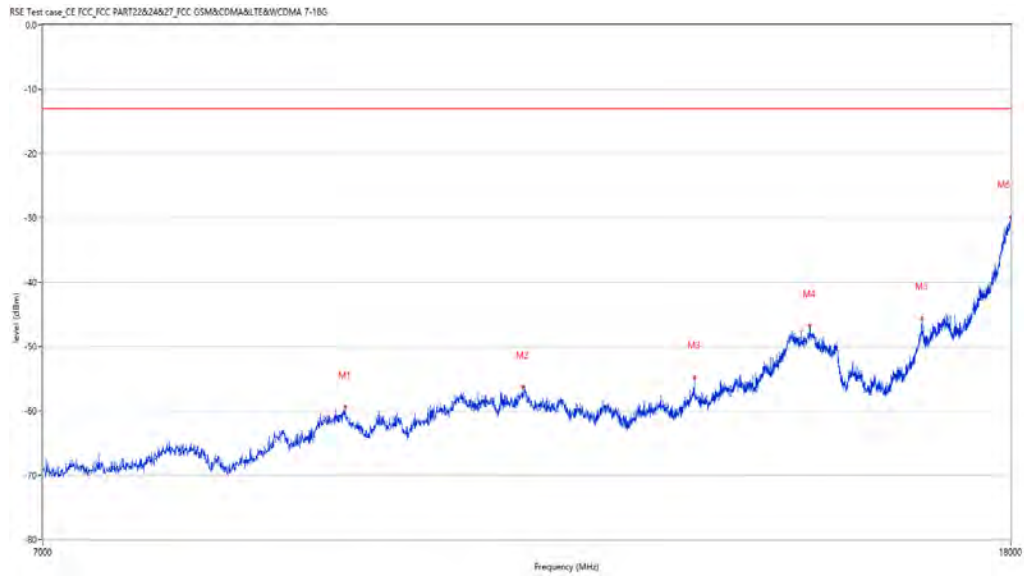

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9405.649	-59.43	15.20	-13.0	-46.43	294.30	Vertical	Vertical	Pass
11181.705	-56.28	15.87	-13.0	-43.28	73.30	Vertical	Vertical	Pass
13218.945	-54.79	15.96	-13.0	-41.79	90.80	Vertical	Vertical	Pass
14791.552	-46.78	25.62	-13.0	-33.78	107.60	Vertical	Vertical	Pass
16507.123	-45.65	24.77	-13.0	-32.65	342.30	Vertical	Vertical	Pass
17994.501	-29.88	43.00	-13.0	-16.88	336.70	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.24.44

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
130.855	-71.17	-14.27	-13.0	-58.17	161.20	Horizontal	Vertical	Pass
198.738	-68.69	-9.89	-13.0	-55.69	69.60	Horizontal	Vertical	Pass
239.953	-68.92	-1.47	-13.0	-55.92	147.40	Horizontal	Vertical	Pass
1202.725	-57.89	-3.81	-13.0	-44.89	358.70	Horizontal	Vertical	Pass
1702.162	-59.51	-9.82	-13.0	-46.51	278.90	Horizontal	Vertical	Pass
2113.111	-31.87	-5.50	-13.0	-18.87	232.00	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-18_13.42.49

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC


Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

RSE Test case_CE FCC FCC PART22&24&27_FCC GSM&CDMA&LTE&WCDMA 7-18G

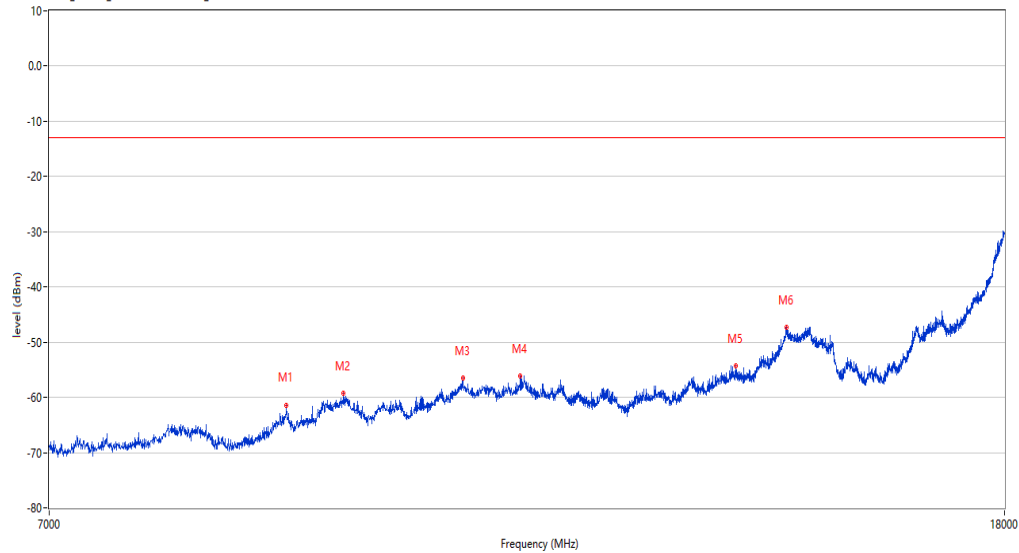

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
8850.287	-61.38	11.59	-13.0	-48.38	145.80	Horizontal	Vertical	Pass
9364.409	-59.29	14.81	-13.0	-46.29	13.10	Horizontal	Vertical	Pass
10535.616	-56.44	16.25	-13.0	-43.44	236.60	Horizontal	Vertical	Pass
11151.462	-56.19	15.63	-13.0	-43.19	239.20	Horizontal	Vertical	Pass
13801.800	-54.25	17.68	-13.0	-41.25	93.90	Horizontal	Vertical	Pass
14505.624	-47.29	24.24	-13.0	-34.29	105.90	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-12_17.22.21

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E19020010-06#03



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
124.794	-71.40	-14.48	-13.0	-58.40	357.90	Horizontal	Vertical	Pass
199.708	-69.97	-8.89	-13.0	-56.97	82.50	Horizontal	Vertical	Pass
239.468	-67.82	-1.78	-13.0	-54.82	302.50	Horizontal	Vertical	Pass
1195.476	-57.06	-3.89	-13.0	-44.06	222.40	Horizontal	Vertical	Pass
2133.858	-31.67	-5.09	-13.0	-18.67	148.70	Horizontal	Vertical	Pass
5456.193	-41.43	2.23	-13.0	-28.43	360.00	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-02-18_13.41.44

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E19020010-06#03

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: LYT

Model Name:

Test Standard: FCC

Templ.(oC):

Work Addition: Normal

Hum:

Work Additon:

RSE Test case_CE FCC PART22&24&27_FCC GSM&CDMA&LTE&WCDMA 7-18G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7877.031	-64.54	9.32	-13.0	-51.54	358.80	Horizontal	Vertical	Pass
9185.704	-60.08	13.45	-13.0	-47.08	348.90	Horizontal	Vertical	Pass
10560.360	-56.83	16.14	-13.0	-43.83	308.70	Horizontal	Vertical	Pass
11211.947	-56.33	15.91	-13.0	-43.33	240.60	Horizontal	Vertical	Pass
14821.795	-47.10	25.71	-13.0	-34.10	345.50	Horizontal	Vertical	Pass
16914.021	-45.29	26.30	-13.0	-32.29	303.50	Horizontal	Vertical	Pass