RADIO REPORT

FCC 47 CFR Part 15C
ISED Canada RSS-247

Digital transmission systems operating within the 2400 – 2483.5 MHz band

Report Reference No	G0M-1802-7258-TFC247DT-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 IC Testing Laboratory site: 3470A-2
Applicant	spaceti s.r.o.
Address	Palace Adria Jungmannova 36/31 110 00 PRAGUE CZECH REPUBLIC
Test Specification	According to FCC/ISED rules
Standard	47 CFR Part 15C RSS-247, Issue 2, 2017-02
Non-Standard Test Method	None
Test Scope	Full compliance test
Equipment under Test (EUT):	
Product Description	Spaceti Stone
Model(s)	Spaceti Stone CO2
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	018
Software Version(s)	1.1.6
FCC-ID	2APJ3-SC20L1V100
IC	23792-SC20L1V100
Test Result	**PASSED**

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
not applicable to EUT	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2018-03-26	
Report:		
Compiled by	Wilfried Treffke	
Tested by (+ signature) (Responsible for Test)	Wilfried Treffke	W. Treffke .....
Approved by (+ signature) (Deputy Head of Lab)	Toralf Jahn	T. J .....
Date of Issue	2018-07-24	
Total number of pages	61	
General Remarks:		
The test results presented in this report relate only to the object tested. **The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.** This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		

Additional Comments:
The applicant has declared additional models of the series. These models were neither tested nor assessed nor evaluated. #1. HVIN: Spaceti Stone LOCATION PMN: Spaceti Stone LOCATION FVIN: -/- HMN: -/- #2. HVIN: Spaceti Stone STANDARD PMN: Spaceti Stone STANDARD FVIN: -/- HMN: -/- #3. HVIN: Spaceti Stone CHAIR PMN: Spaceti Stone CHAIR FVIN: -/- HMN: -/- #4. HVIN: Spaceti Stone PARKING PMN: Spaceti Stone PARKING FVIN: -/- HMN: -/-

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2018-07-24	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V_{NOM}	Nominal supply voltage

REPORT INDEX

1 Equipment (Test Item) Under Test 7
1.1 Photos – Equipment External 8
1.2 Photos – Equipment Internal 9
1.3 Photos – Test Setup 12
1.4 Support Equipment 13
1.5 Test mode duty cycle 14
1.6 Test Modes 16
1.7 Test Frequencies 17
1.8 Sample emission level calculation 18
2 Result Summary 19
3 Test Conditions and Results 20
3.1 Test Conditions and Results - Occupied bandwidth 20
3.2 Test Conditions and Results - 6 dB bandwidth 23
3.3 Test Conditions and Results - Maximum peak conducted output power 26
3.4 Test Conditions and Results - Power spectral density 28
3.5 Test Conditions and Results - Band-edge compliance 31
3.6 Test Conditions and Results - Conducted spurious emissions 35
3.7 Test Conditions and Results - Transmitter radiated emissions 38
3.8 Test Conditions and Results - Receiver radiated emissions 41

ANNEX A Transmitter spurious emissions 44
ANNEX B Receiver spurious emissions 54

1 Equipment (Test Item) Under Test

Description	Spaceti Stone	
Model	Spaceti Stone CO2	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	None	
Hardware Version(s)	018	
Software Version(s)	1.1.6	
PMN	Spaceti Stone CO2	
HVIN	Spaceti Stone CO2	
FVIN	None	
HMN	None	
FCC-ID	2APJ3-SC20L1V100	
IC	23792-SC20L1V100	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	902 - 928 MHz	
Radio technology	Digital Modulation	
Modulation	2-GFSK	
Number of antenna ports	1	
Antenna	Type	Integral antenna
	Model	Chip antenna
	Manufacturer	Johanson
	Gain	4.0 dBi (customer declaration)
Supply Voltage	V_{NOM}	3.6 VDC
Operating Temperature	T_{NOM}	25 °C
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A
Manufacturer	spaceti s.r.o. Palace Adria Jungmannova 36/31 110 00 PRAGUE CZECH REPUBLIC	

1.1 Photos – Equipment External

EUT Top

EUT Bottom

1.2 Photos – Equipment Internal

EUT Open
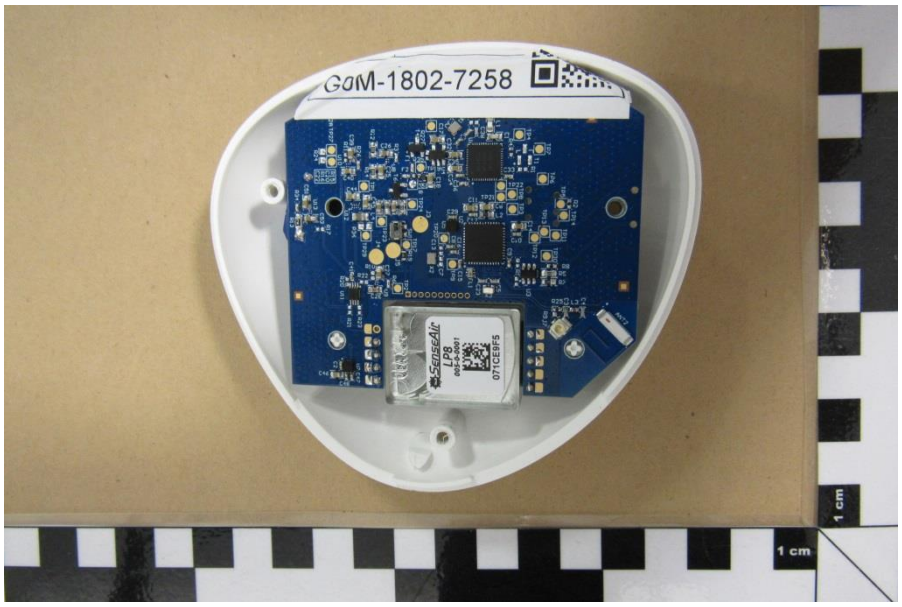

PCB Top
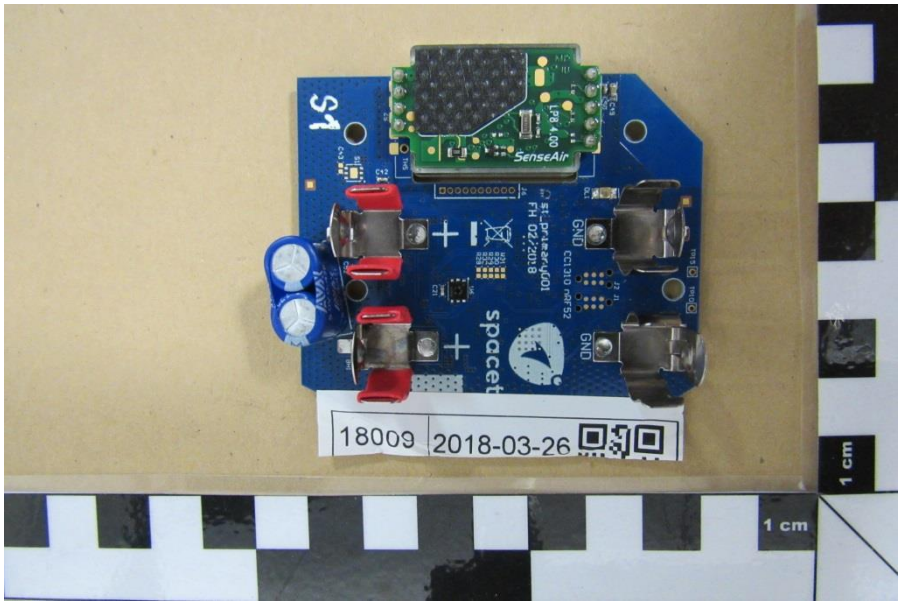

PCB Bottom

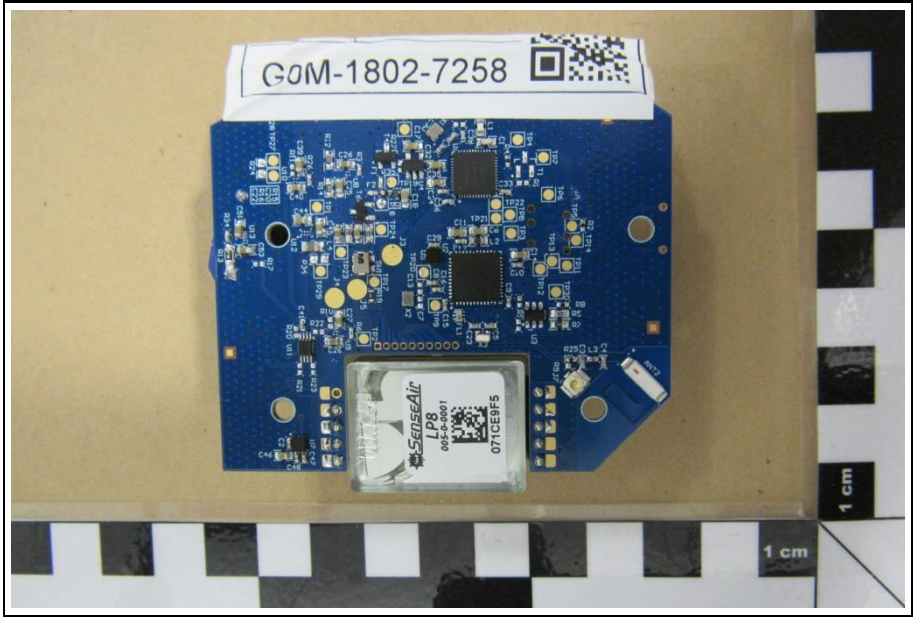

Conducted Sample Top

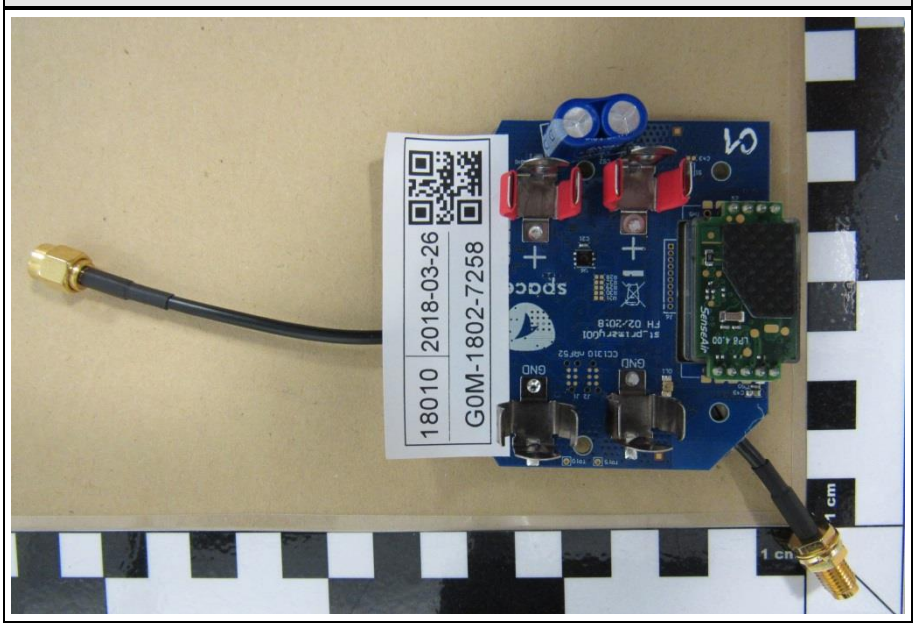

Conducted Sample Bottom
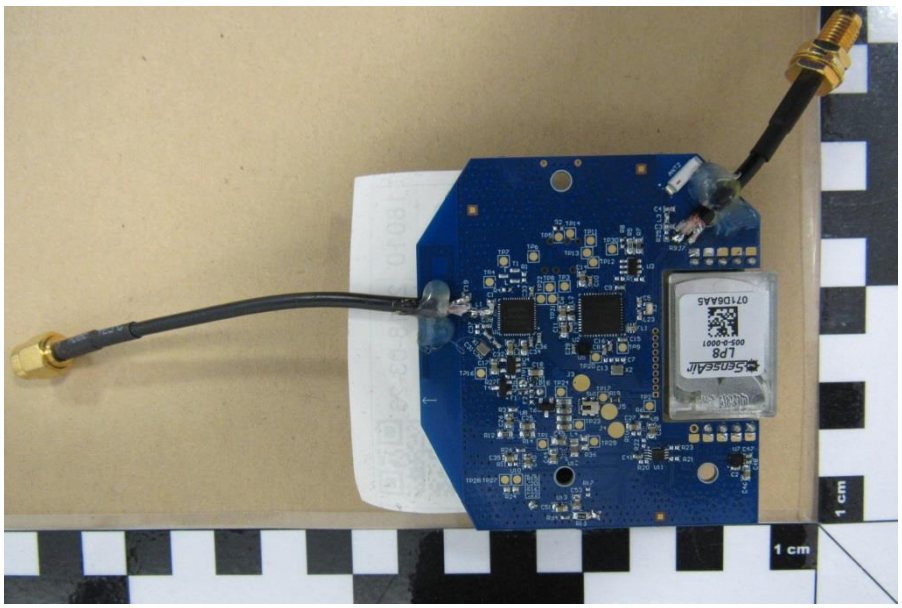

1.3 Photos – Test Setup

Setup Radiated Overview
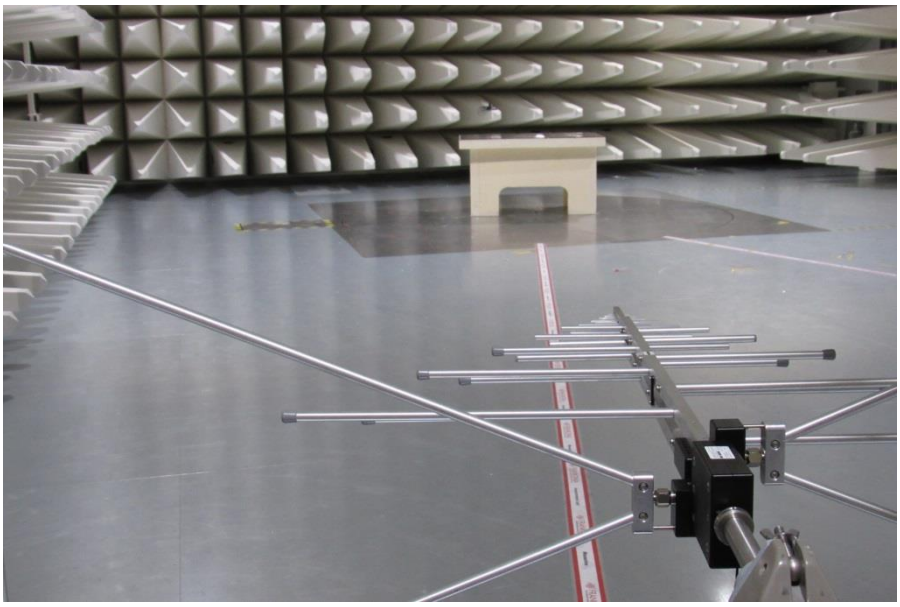

Setup Radiated EUT

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
None				
Description:				
AE	Auxillary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.5 Test mode duty cycle

1.5.1 Information

Test Information	
Measurement Method	ANSI C63.10 11.6

1.5.2 Requirements

Requirements	
Duty cycle	Duty cycle correction
≥ 98 %	No correction required
< 98 %	Correction required (10 x Log_{10}(1/DC)

1.5.3 Setup

Test Setup



1.5.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

1.5.5 Procedure

Test Procedure

1. EUT set to test mode
2. Span is set to zero span
3. Detector set to peak
4. Sweep time is set long enough to capture at least 5 bursts
5. Envelope peak value of emission spectrum is selected
6. The maximum burst duration T_{ON} is measured using two markers set to the start and the end of the longest burst
7. The minimum idle duration T_{OFF} is measured using two markers set to the start and the end of the shortest idle period
8. The duty cycle is calculated by DC = T_{ON} / (T_{ON} + T_{OFF})
9. The duty cycle correction is calculated by DC = 10 x Log_{10}(T_{ON} / (T_{ON} + T_{OFF}))

1.5.6 Results

Duty Cycle Results		
Mode	Duty Cycle	Correction Factor [dB]
Transmit	100	0

1.6 Test Modes

Mode	Description
Transmit	Mode = Transmit Modulation = 2-GFSK Duty cycle = 100 %
Receive	Mode = Receive Modulation = 2-GFSK
Comment:	

1.7 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	1	915

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

Reading on Analyzer (dBµV) + A.F. (dB) = Net field strength (dBµV/m)

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

Limit (dBµV/m) = 20*log (µV/m)

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading	- FCC limit	= Margin
+21.5 dBµV	+ 26 dB = 47.5 dBµV/m	:	47.5 dBµV/m	- 57.0 dBµV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	**Requirement**	**Reference Method**	**Result**	**Remarks**
RSS-Gen 6.6 Issue 4	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247 § 5.2 Issue 2	6 dB Bandwidth	ANSI C63.10-2013	PASS	
FCC § 15.247(b)(3) ISED RSS-247 § 5.4 Issue 2	Maximum peak conducted power	ANSI C63.10-2013	PASS	
FCC § 15.247(e) ISED RSS-247 § 5.2 Issue 2	Power spectral density	ANSI C63.10-2013	PASS	
FCC § 15.207 ISED RSS-247 § 3.1 Issue 2	AC power line conducted emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5 Issue 2	Band edge compliance	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5 Issue 2	Conducted spurious emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-GEN § 8.9 Issue 4	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247 § 3.1 Issue 2	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth

3.1.1 Information

Test Information	
Reference	ISED RSS-Gen 6.6
Measurement Method	ANSI C63.10 6.9.3
Operator	Wilfried Treffke
Date	2018-03-27

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

Test Setup


3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.1.5 Procedure

Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to 1 % of the bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function

3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
Transmit	915	0.557

Occupied Bandwidth

Project Number:	G0M-1802-7258
Applicant:	spaceti
Model Description:	Spaceti stone
Model:	Spaceti stone CO2
Test Sample ID:	18010
Reference Standards:	FCC 15.247, RSS-247
Reference Method:	ANSI C63.10:2013, Section 6.9.3
Operational Mode:	2-GFSK, Channel: 915.0 MHz
Operating Conditions:	Tnom/Vnom
Operator:	W. Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2018-03-27
Occupied Bandwidth [MHz]:	0.557

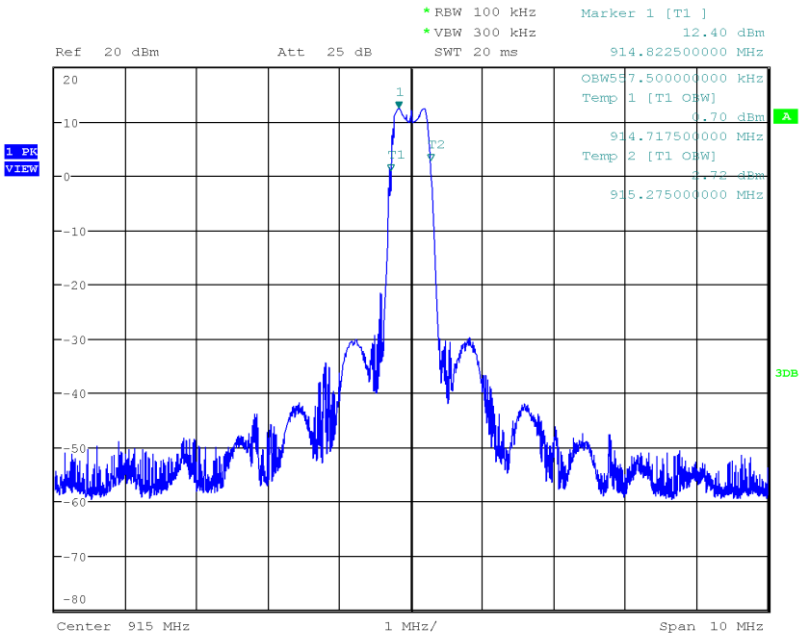

Date: 27.MAR.2018 11:46:00

3.2 Test Conditions and Results - 6 dB bandwidth

3.2.1 Information

Test Information	
Reference	FCC 15.247(a)(2) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.8
Operator	Wilfried Treffke
Date	2018-03-27

3.2.2 Limits

Limits
≥ 500kHz

3.2.3 Setup

Test Setup



3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.2.5 Procedure

Test Procedure

1. EUT set to test mode
2. Span set to at least twice the emission spectrum
3. Detector set to peak and max hold and RBW is set to 100 kHz
4. Envelope peak value of emission spectrum is selected
5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak
6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak
7. 6 dB Bandwidth is determined by marker frequency separation

3.2.6 Results

Test Results				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
Transmit	915	522.7	500	Pass

DTS (6 dB) Bandwidth

Project Number:	G0M-1802-7258
Applicant:	spaceti
Model Description:	Spaceti stone
Model:	Spaceti stone CO2
Test Sample ID:	18010
Reference Standards:	FCC 15.247, RSS-247
Reference Method:	ANSI C63.10:2013, Section 11.8.1 Option 1
Operational Mode:	2-GFSk, Channel: 915.0 MHz
Operating Conditions:	Tnom/Vnom
Operator:	W. Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2018-03-27
Lower Frequency [MHz]:	914.730
Upper Frequency [MHz]:	915.253
6 dB Bandwidth [kHz]:	522.7

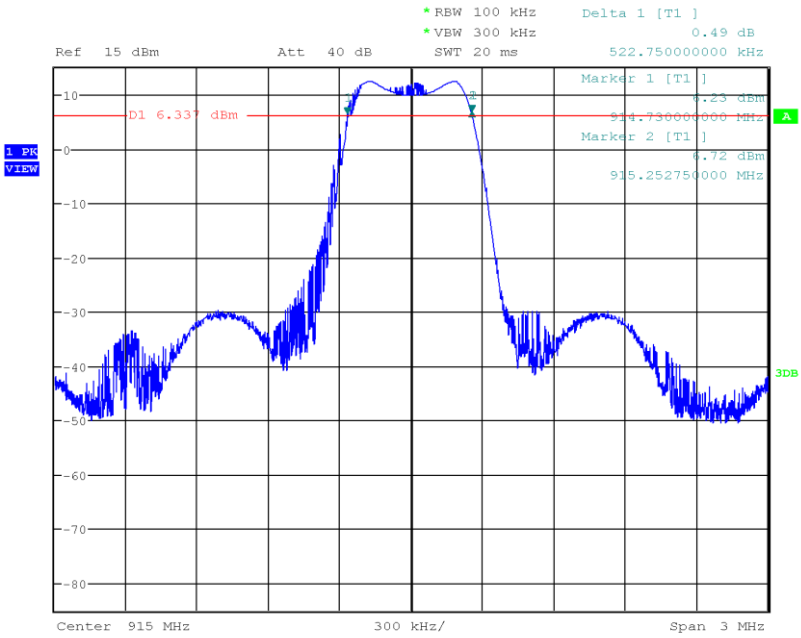

Date: 27.MAR.2018 12:05:52

3.3 Test Conditions and Results - Maximum peak conducted output power

3.3.1 Information

Test Information	
Reference	FCC 15.247(b)(1) / ISED RSS-247 5.4
Measurement Method	ANSI C63.10 11.9.2
Operator	Wilfried Treffke
Date	2018-03-27

3.3.2 Limits

Limits
1 W (30 dBm)
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3 Setup

Test Setup



3.3.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.3.5 Procedure

Test Procedure

1. EUT set to test hopping mode (Communication tester is used if needed)
2. Analyzer resolution bandwidth is set ≥ DTS bandwidth
3. Detector set to RMS and max hold
4. Sweep time is set to auto
5. After the trace has stabilized a marker is set to peak of envelope

3.3.6 Results

Test Results				
Channel [MHz]	Power [dBm]	Power [W]	Limit [W]	Verdict
915	13.08	0.02032	1.0	PASS

3.4 Test Conditions and Results - Power spectral density

3.4.1 Information

Test Information	
Reference	FCC 15.247(e) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.10.3, 14.3.2
Operator	Wilfried Treffke
Date	2018-03-27

3.4.2 Limits

Limits
8 dBm / 3 kHz

3.4.3 Setup

Test Setup



3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.4.5 Procedure

Test Procedure

1. EUT set to test mode
2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth
3. The RBW is set to 100 kHz with VBW ≥ RBW and the detector is set to RMS with max hold
4. After the trace has stabilized a marker is set to the envelope maximum
5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated
6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain

3.4.6 Results

Test Results			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
915	2.82	8.0	PASS
RBW = 3 kHz			

Power Spectral Density

Project Number:	G0M-1802-7258
Applicant:	spaceti
Model Description:	Spaceti stone
Model:	Spaceti stone CO2
Test Sample ID:	18010
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2018-03-27
Note 1:	FCC 15.247, RSS-247
Note 2:	ANSI C63.10:2013, Section 11.10.3
Result:	2.82 dBm/3kHz

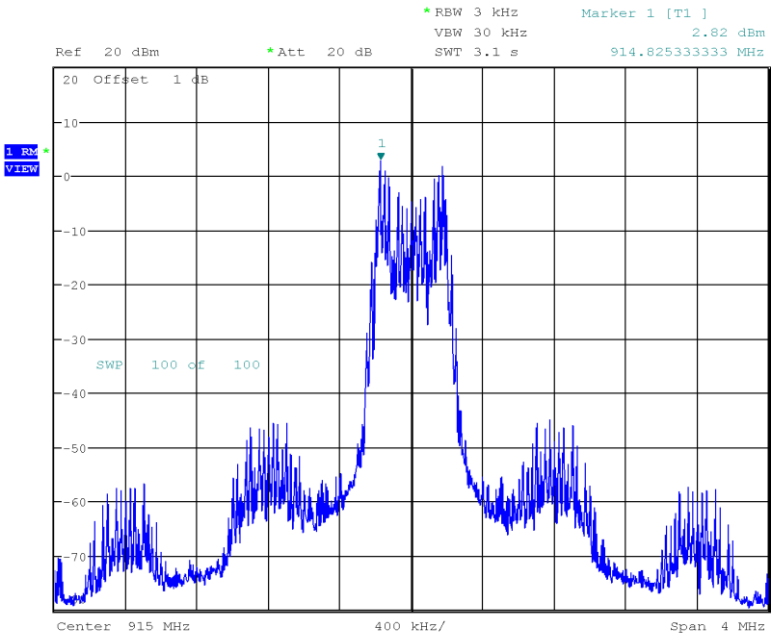

3.5 Test Conditions and Results - Band-edge compliance

3.5.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.13
Operator	Wilfried Treffke
Date	2018-03-27

3.5.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.5.3 Setup

Test Setup



3.5.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.5.5 Procedure

Test Procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span set around lower band edge and detector is set to peak and max hold
3. Resolution bandwidth is set to 100 kHz
4. Markers are set to peak emission levels within frequency band and outside frequency band
5. Band edge attenuation is determined from level difference

3.5.6 Results

Test Results				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
Lower Band-edge	915	-53.8	-30	PASS
Upper Band-edge	915	-53.9	-30	PASS

Band-edge Compliance

Project Number:	G0M-1802-7258
Applicant:	spaceti
Model Description:	Spaceti stone
Model:	Spaceti stone CO2
Test Sample ID:	18010
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2018-03-27
Note 1:	FCC 15.247, RSS-247
Note 2:	ANSI C63.10:2013, Section 11.13.2
Note 3:	RMS Average
Result:	-53.8 dBc

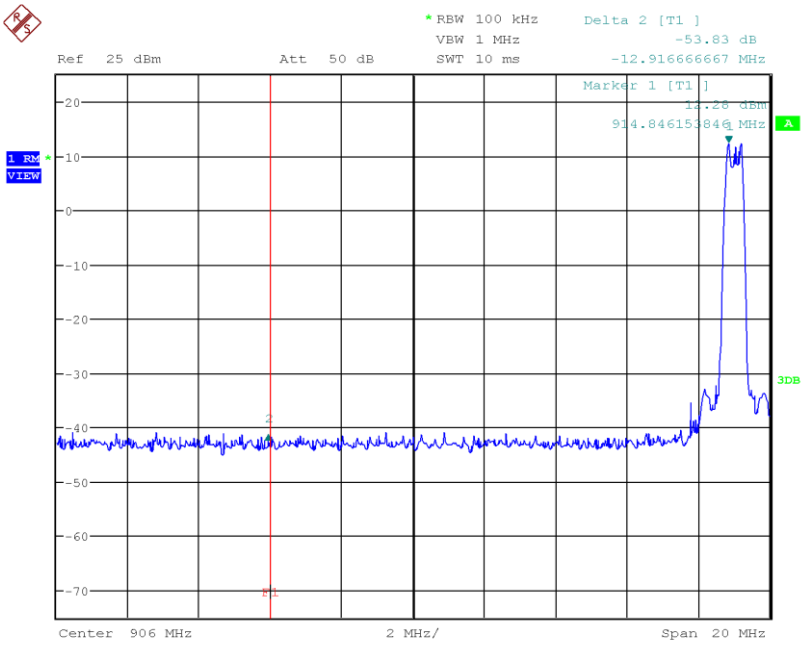

Date: 27.MAR.2018 15:06:09

Band-edge Compliance (Upper Band-edge)

Project Number:	G0M-1802-7258
Applicant:	spaceti
Model Description:	Spaceti stone
Model:	Spaceti stone CO2
Test Sample ID:	18010
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2018-03-27
Note 1:	FCC 15.247, RSS-247
Note 2:	ANSI C63.10:2013, Section 11.13.2
Note 3:	RMS Average
Result:	-53.9 dBc

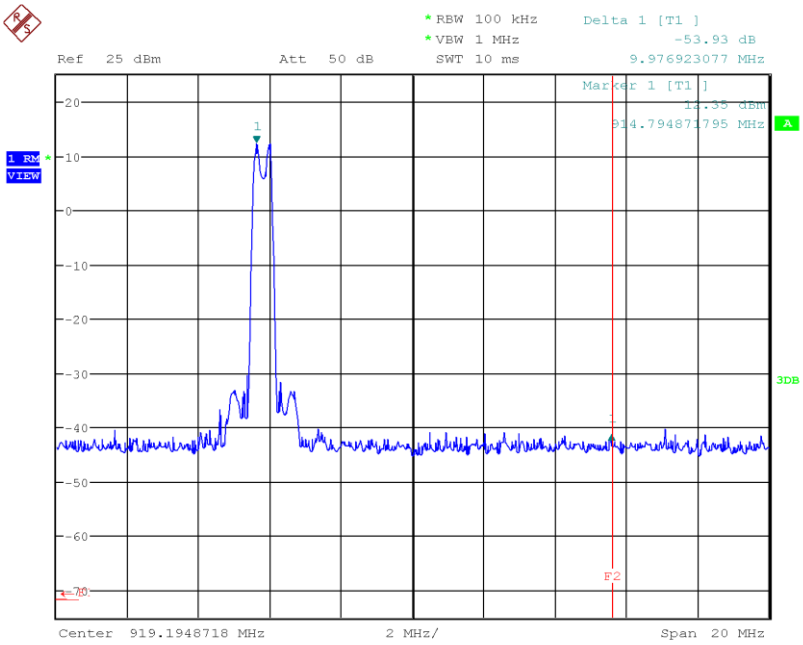

3.6 Test Conditions and Results - Conducted spurious emissions

3.6.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.11
Operator	Wilfried Treffke
Date	2018-03-27

3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.6.3 Setup

Test Setup



3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.6.5 Procedure

Test Procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span set around lower band edge and detector is set to peak and max hold
3. Resolution bandwidth is set to 100 kHz
4. Markers are set to peak emission levels within frequency band and outside frequency band
5. Band edge attenuation is determined from level difference

3.6.6 Results

Test Results		
Mode	Channel [MHz]	Verdict
Transmit	915	PASS

Conducted Spurious Emissions

Project Number:	G0M-1802-7258
Applicant:	spaceti
Model Description:	Spaceti stone
Model:	Spaceti stone CO2
Test Sample ID:	18010
Reference Standards:	FCC 15.247, RSS-247
Reference Method:	ANSI C63.10:2013, Section 11.11
Operational Mode:	2-GFSK, Channel: 915 MHz
Operating Conditions:	Tnom/Vnom
Operator:	Wilfried Treffke
Test Site:	Eurofins Product Service GmbH
Test Date:	2018-03-27
Max. in-band Frequency [MHz]:	915.2
Max. in-band Level [dBm/100 kHz]:	13.2
Out-of-band Limit [dBm/100 kHz]:	-16.8

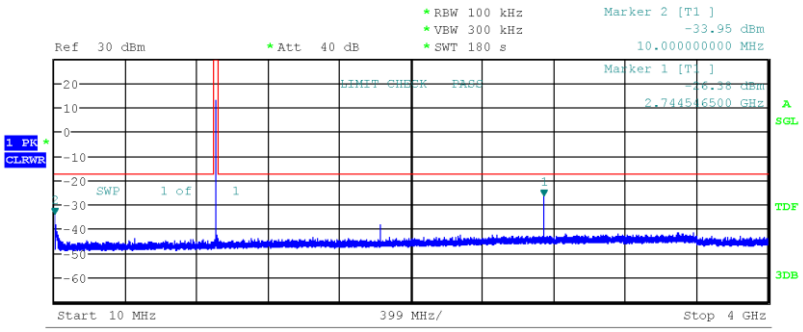

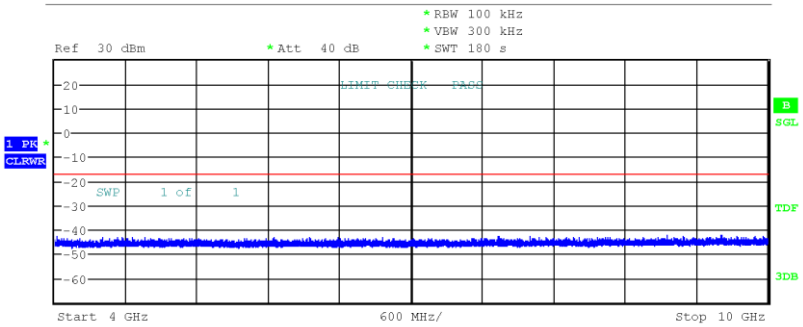

Date: 27.MAR.2018 15:44:21

3.7 Test Conditions and Results - Transmitter radiated emissions

3.7.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-GEN 8.9
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2018-03-26

3.7.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [µV/m]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.7.3 Setup

Test Setup 30 - 1000 MHz

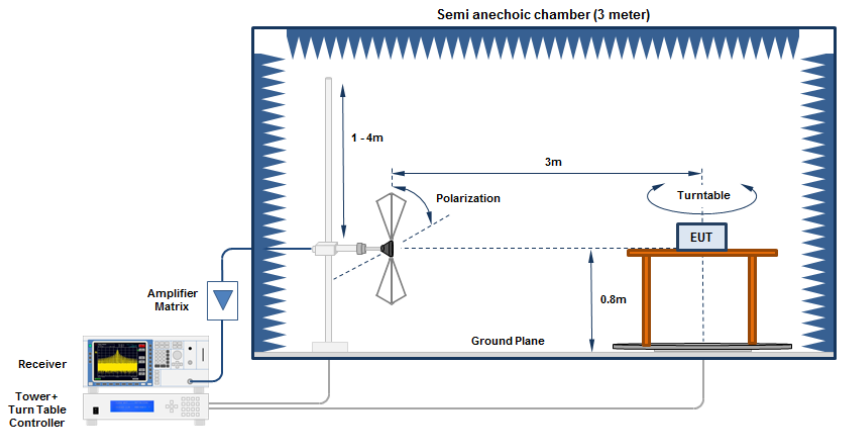

Test Setup > 1 GHz

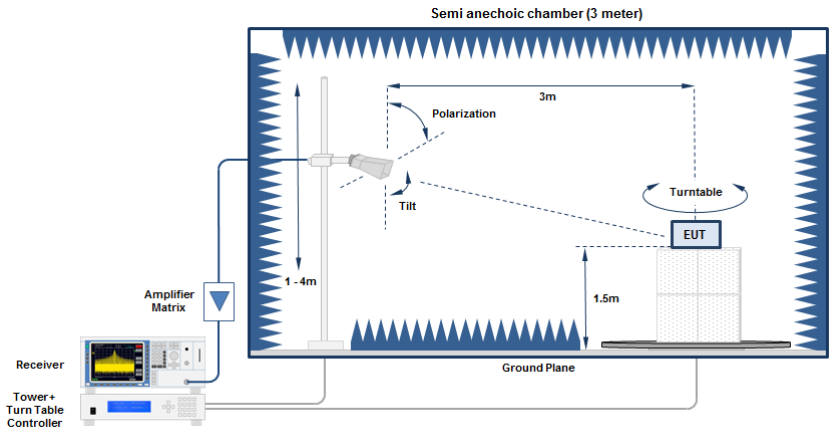

3.7.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC6	EF00910	2017-03	2020-03
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	VULB 9162	EF00978	2016-11	2019-11

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC6	EF00910	2017-03	2020-03
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2017-10	2018-10

3.7.5 Procedure

Test Procedure < 30 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The EUT is rotated through 360° 4. The emissions are measured with peak detector and max hold 5. All significant emissions are measured again using the corresponding final detector

Test Procedure 30 - 1000 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.7.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBµV/m]	Det.	Pol.	Limit [dBµV/m]	Margin [dB]
915	2740	43.79	pk	hor	74.00	-30.21
915	4568	42.56	pk	hor	74.00	-31.44

3.8 Test Conditions and Results - Receiver radiated emissions

3.8.1 Information

Test Information	
Reference	ISED RSS-247 3.1
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2018-03-26

3.8.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dBµV/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.8.3 Setup

Test Setup 30 - 1000 MHz

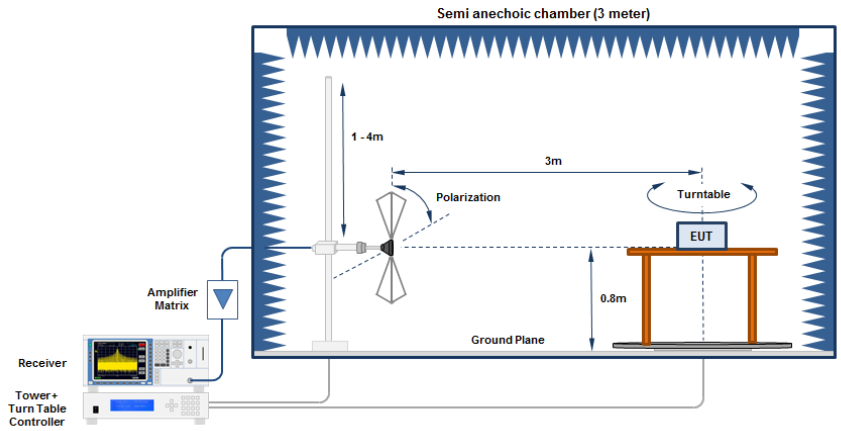

Test Setup > 1 GHz
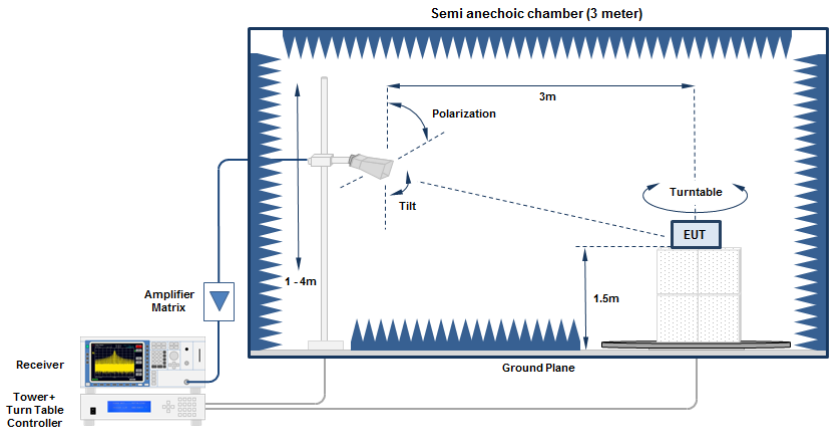

3.8.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC6	EF00910	2017-03	2020-03
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	VULB 9162	EF00978	2016-11	2019-11

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC6	EF00910	2017-03	2020-03
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09

3.8.5 Procedure

Test Procedure 30 - 1000 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.8.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBµV/m]	Det.	Pol.	Limit [dBµV/m]	Margin [dB]
915	4568	47.46	pk	ver	53.98	-06.52

ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 15.247

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 57

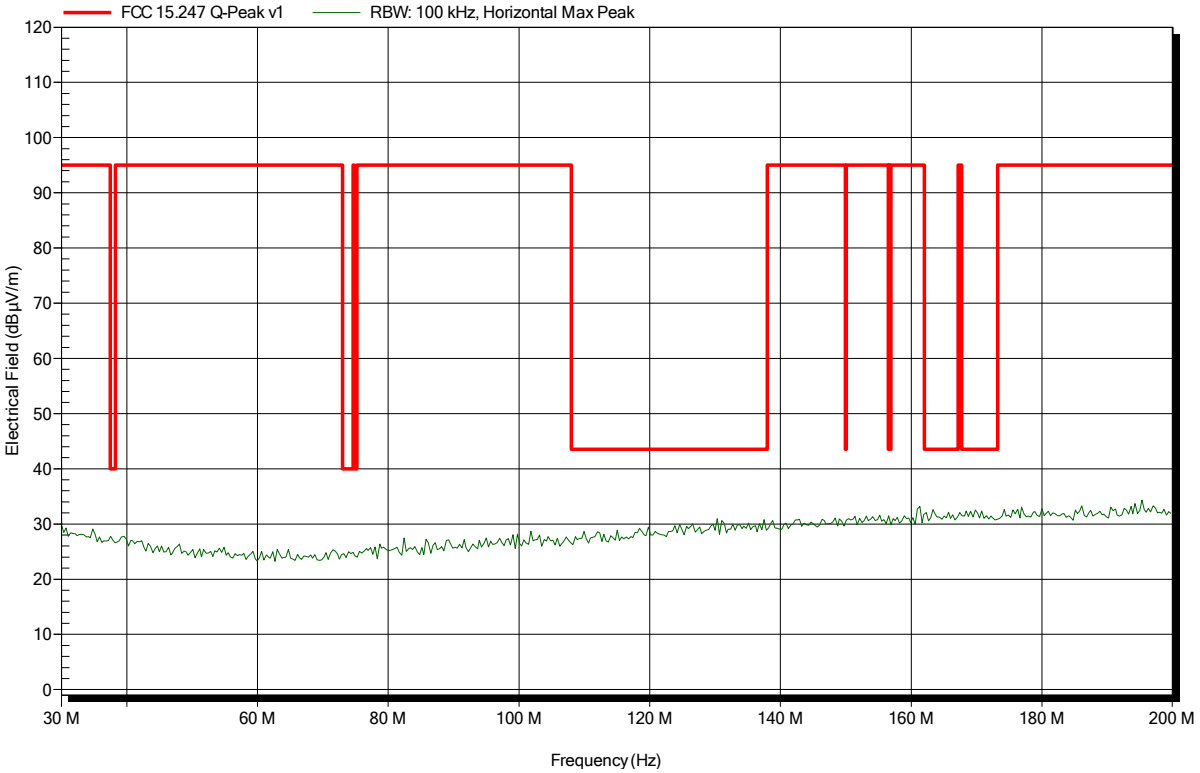

Spurious emissions according to FCC 15.247

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 58

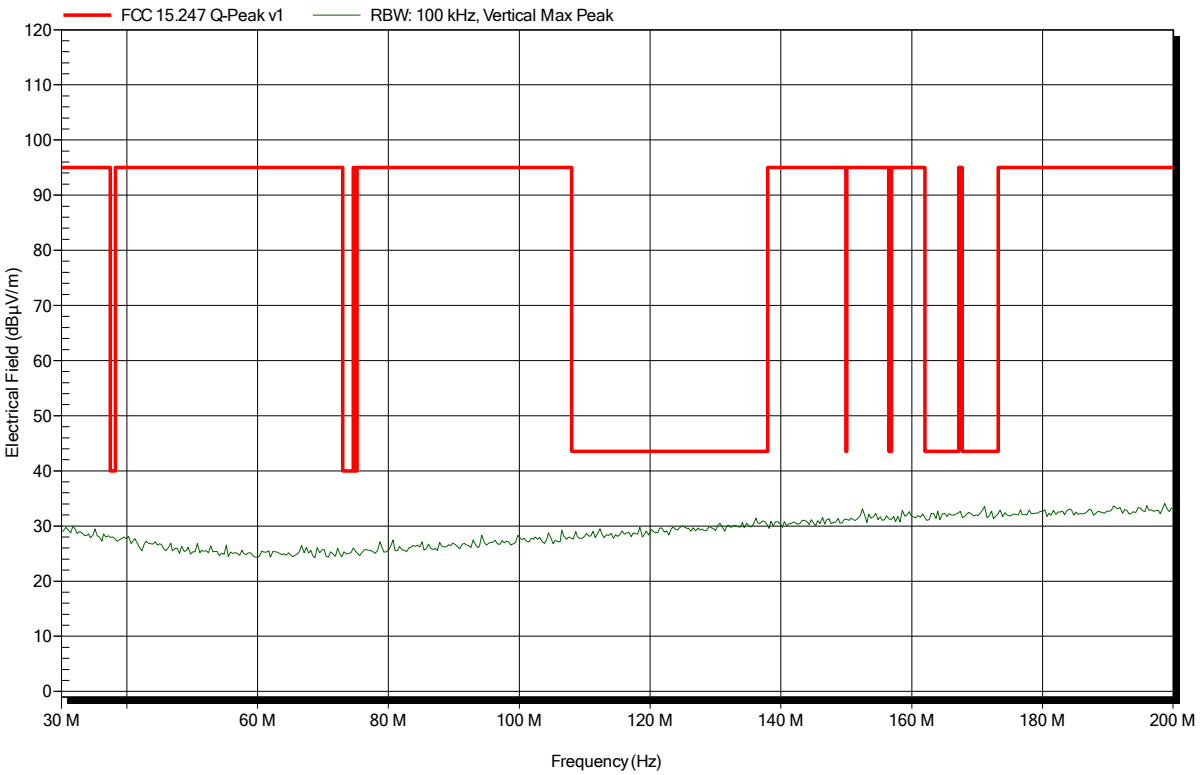

Spurious emissions according to FCC 15.247

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 56

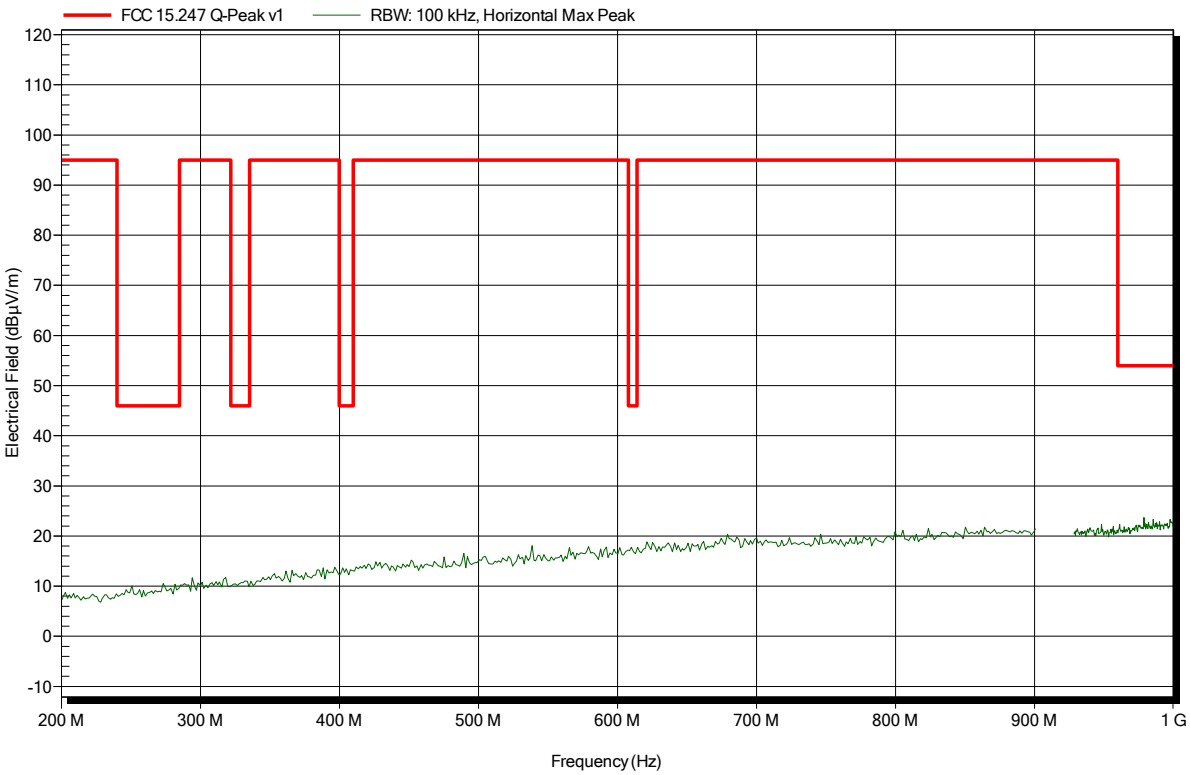

Spurious emissions according to FCC 15.247

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 59

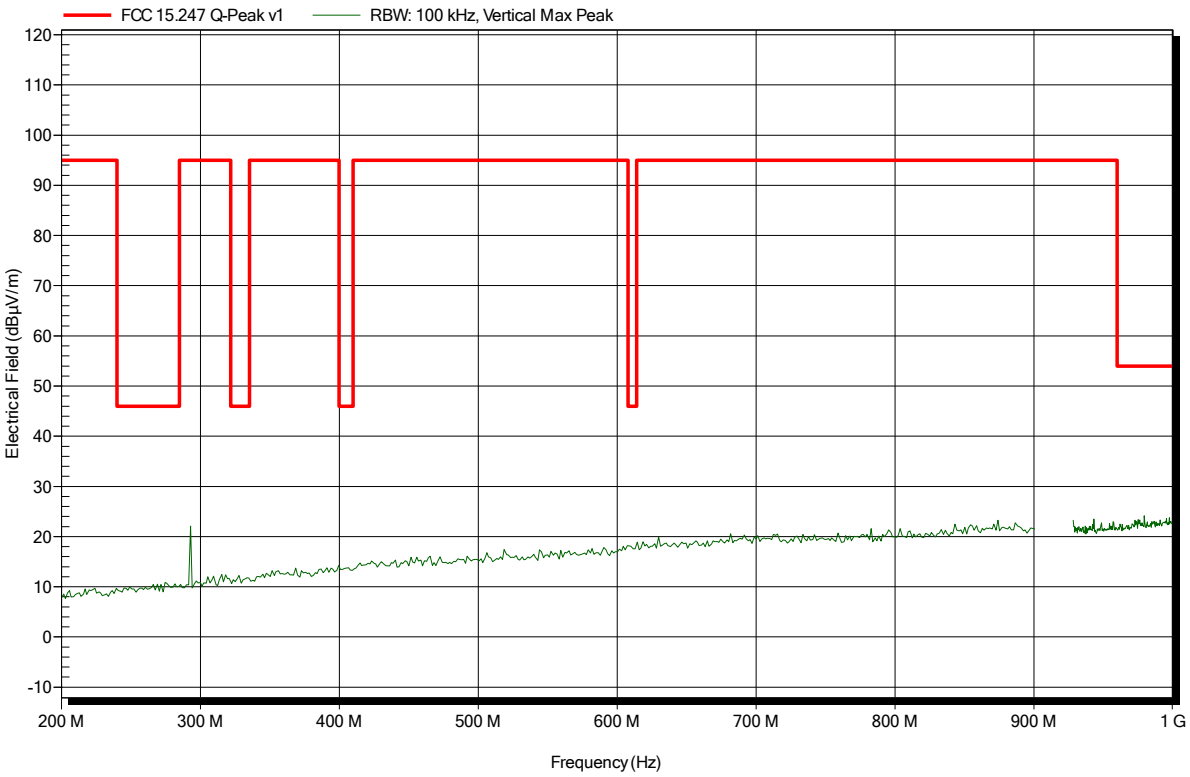

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 60

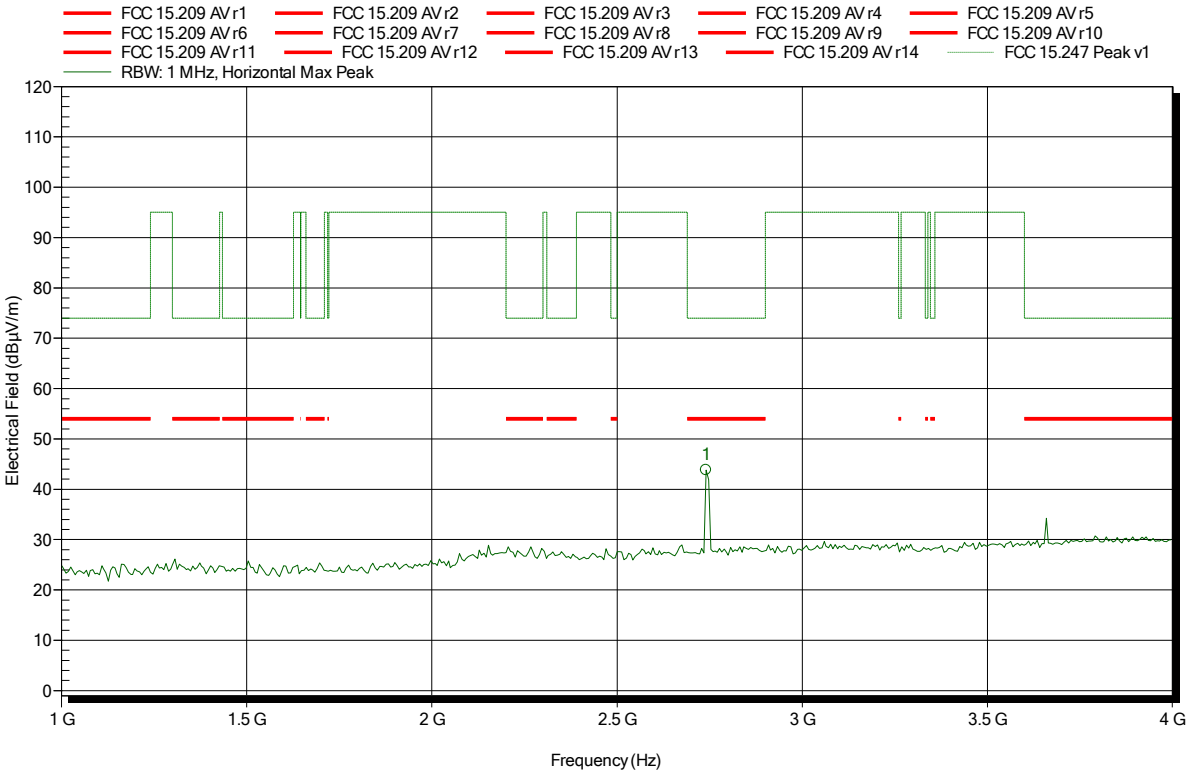

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.74 GHz	43.79 dBµV/m	74 dBµV/m	-30.21 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 63

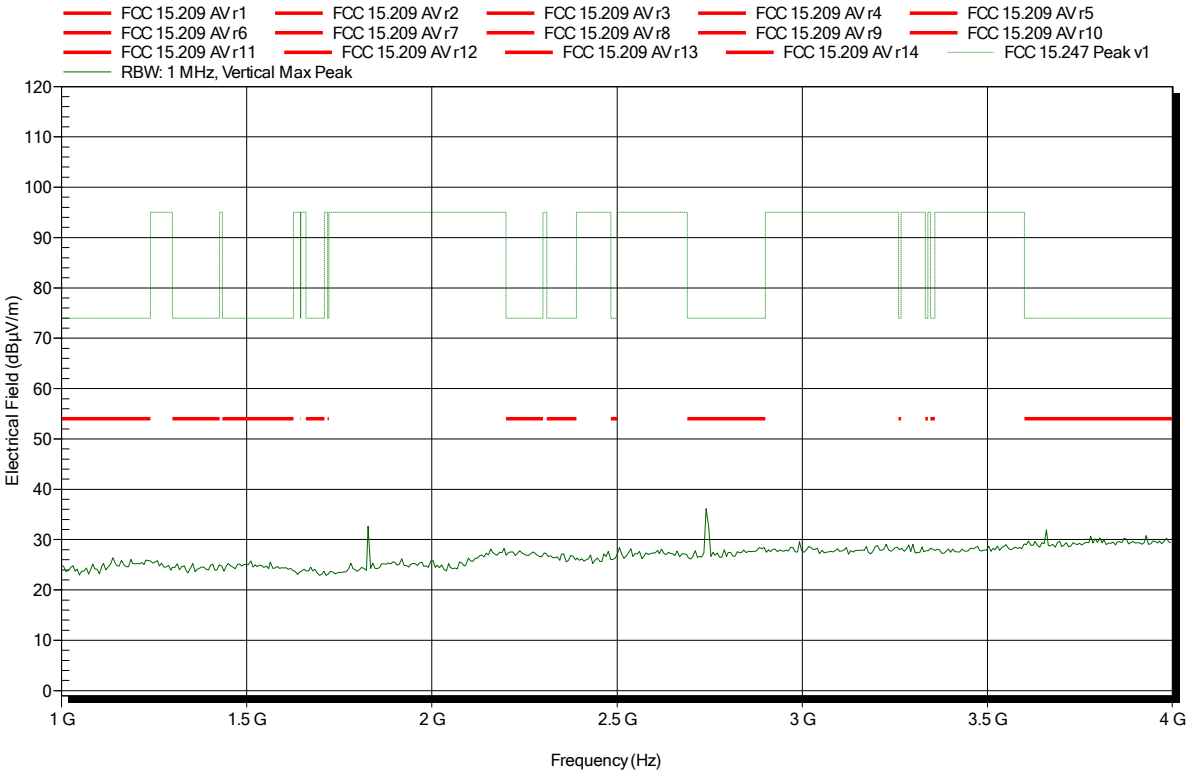

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 64

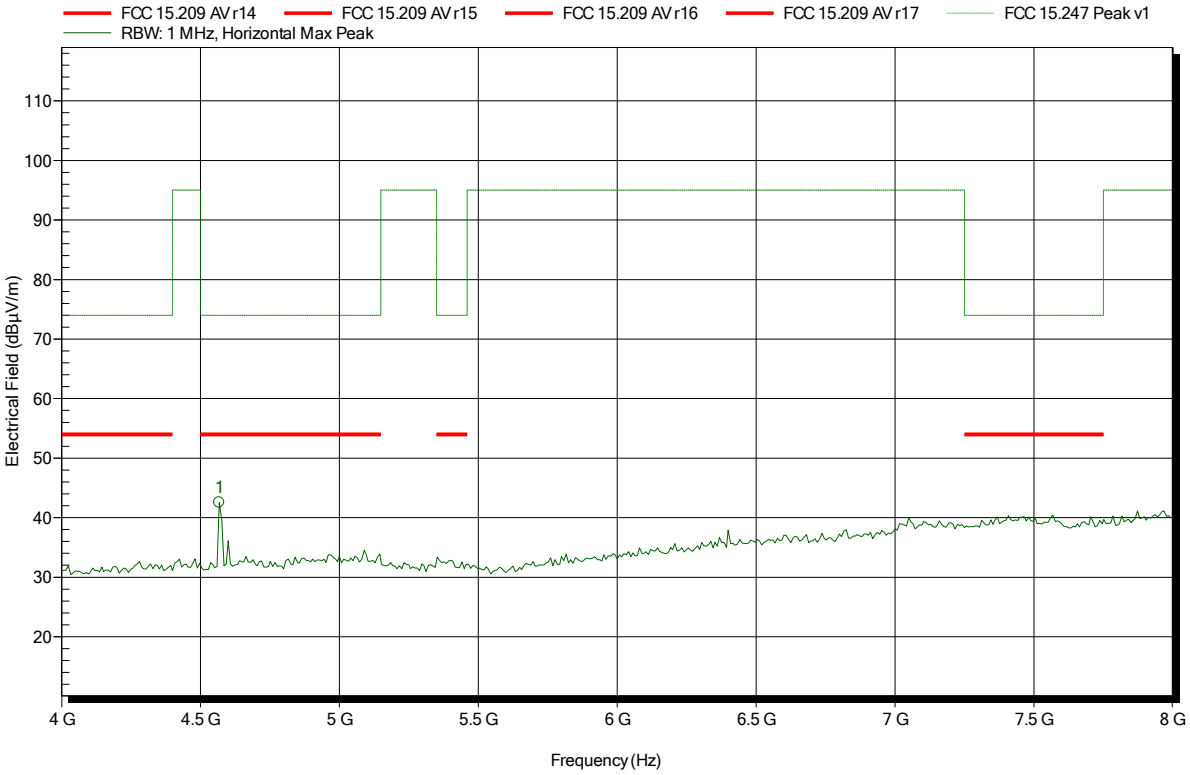

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.568 GHz	42.56 dBµV/m	74 dBµV/m	-31.44 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 65

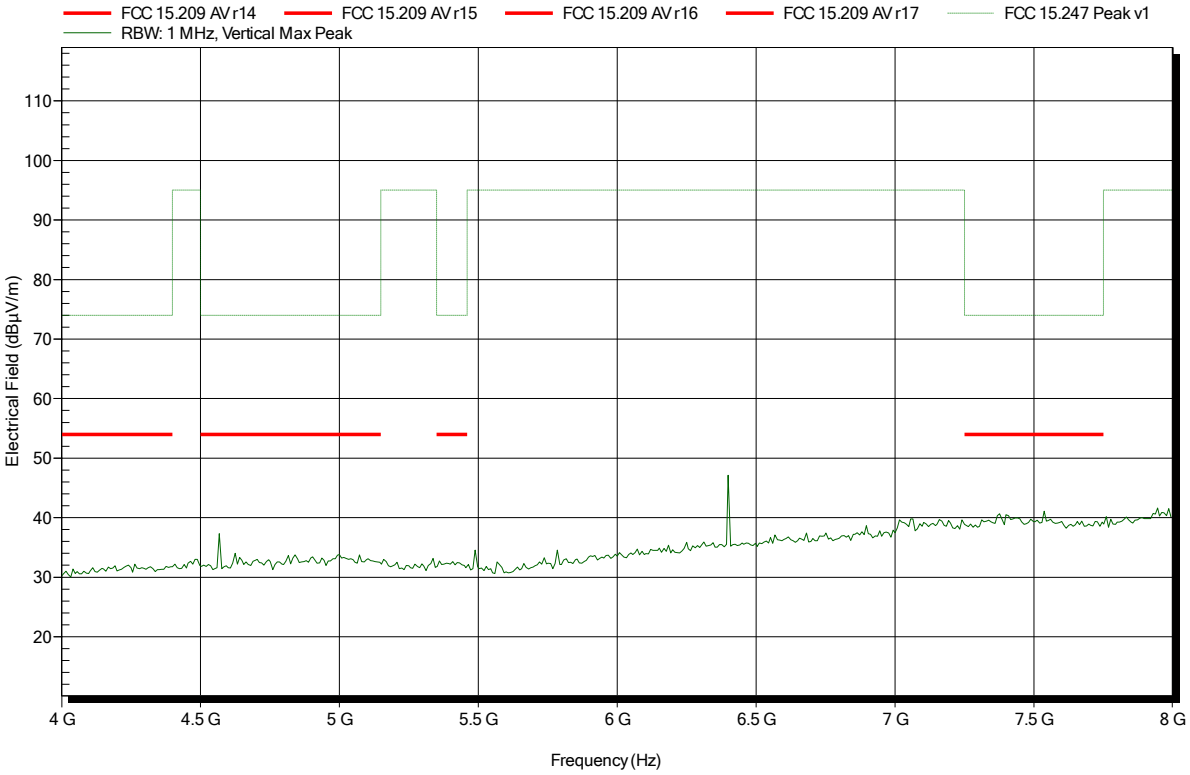

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 62

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 66

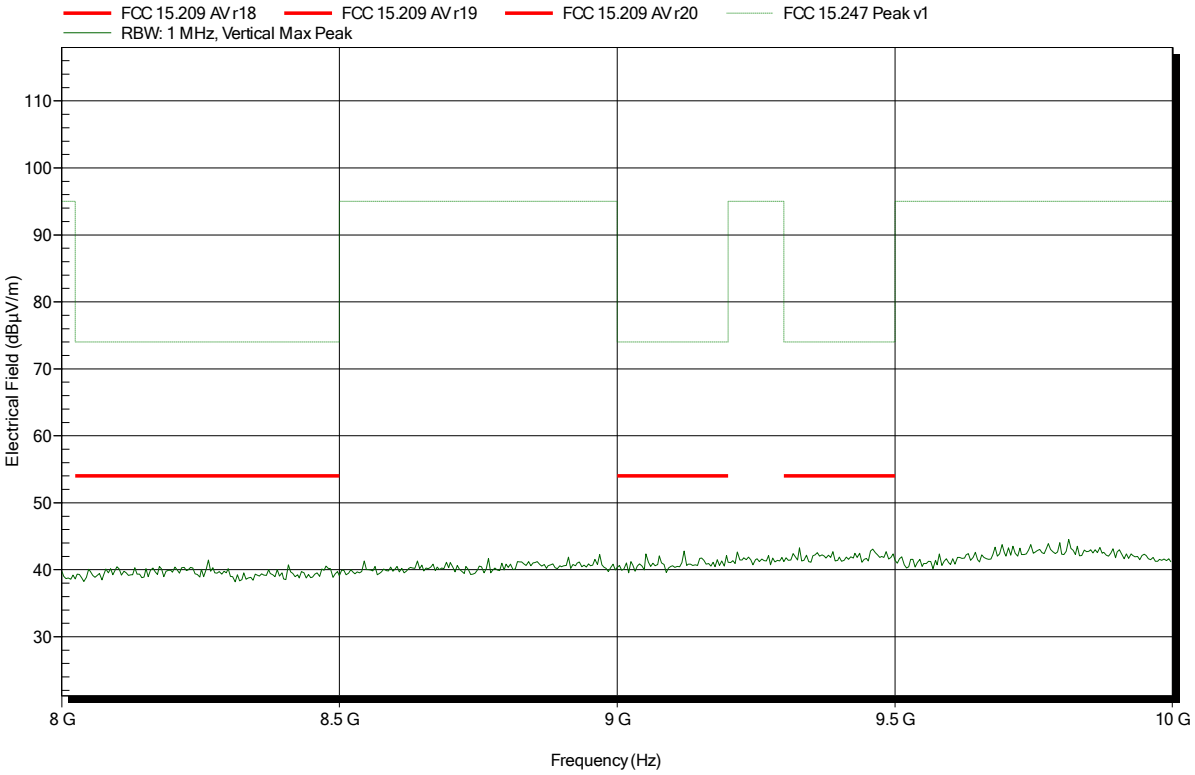

ANNEX B Receiver spurious emissions

Spurious emissions according to RSS-Gen Issue 4

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	RX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 71

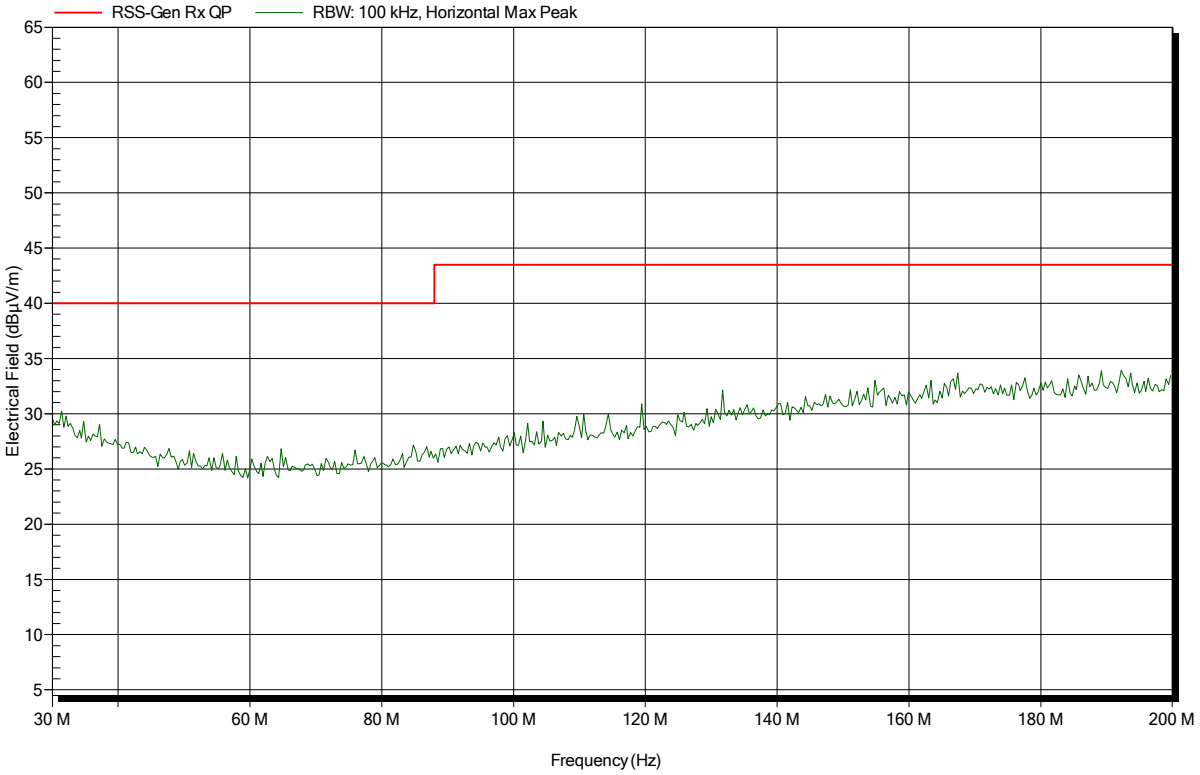

Spurious emissions according to RSS-Gen Issue 4

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	RX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 72

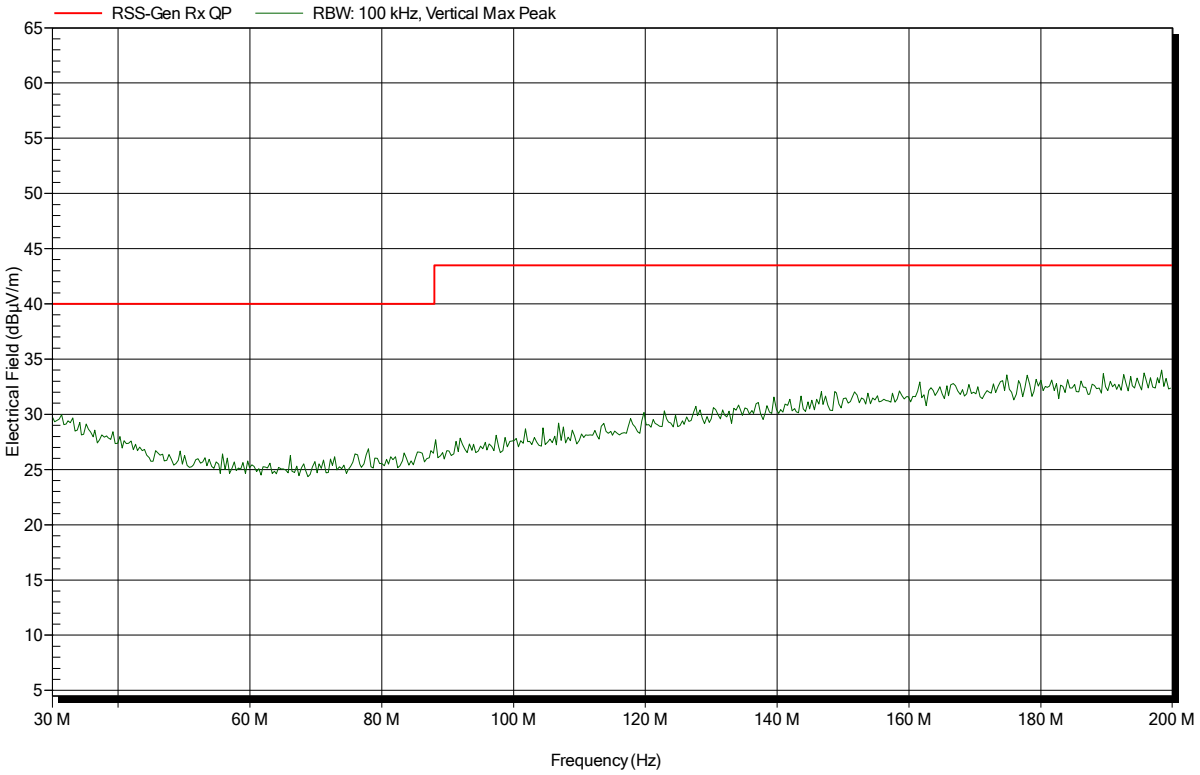

Spurious emissions according to RSS-Gen Issue 4

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	RX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 73

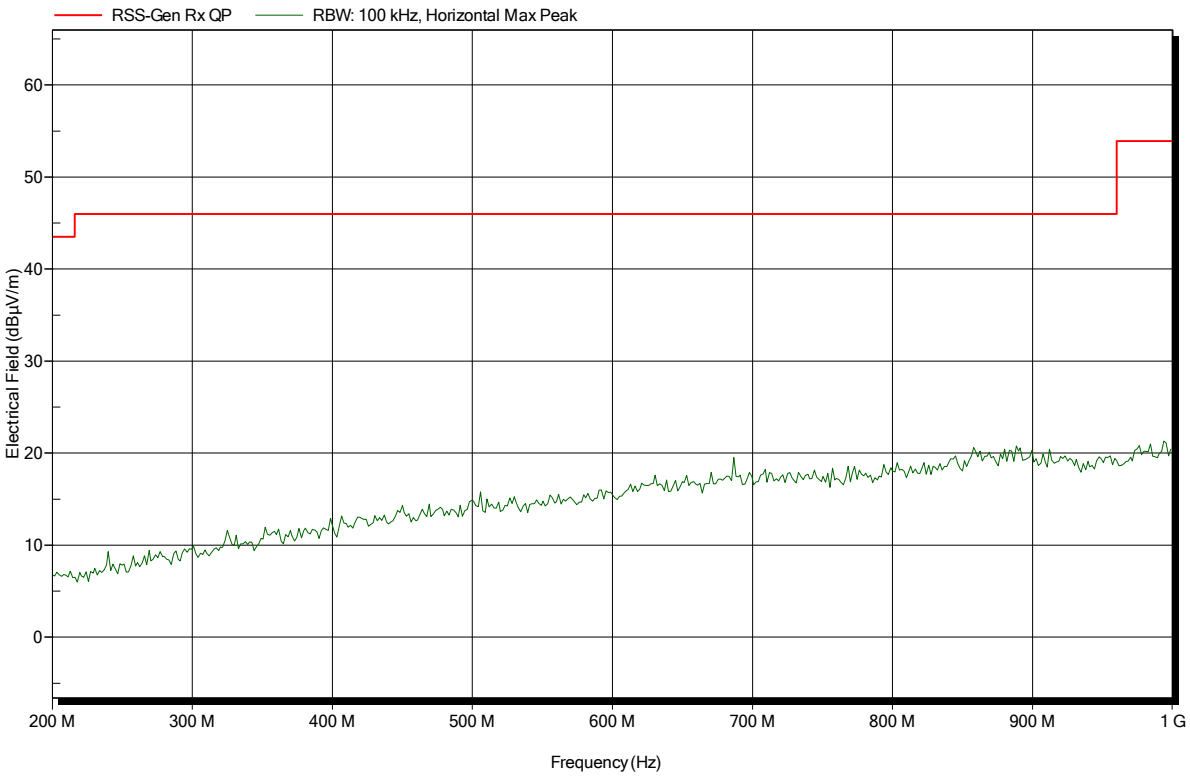

Spurious emissions according to RSS-Gen Issue 4

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	RX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 74

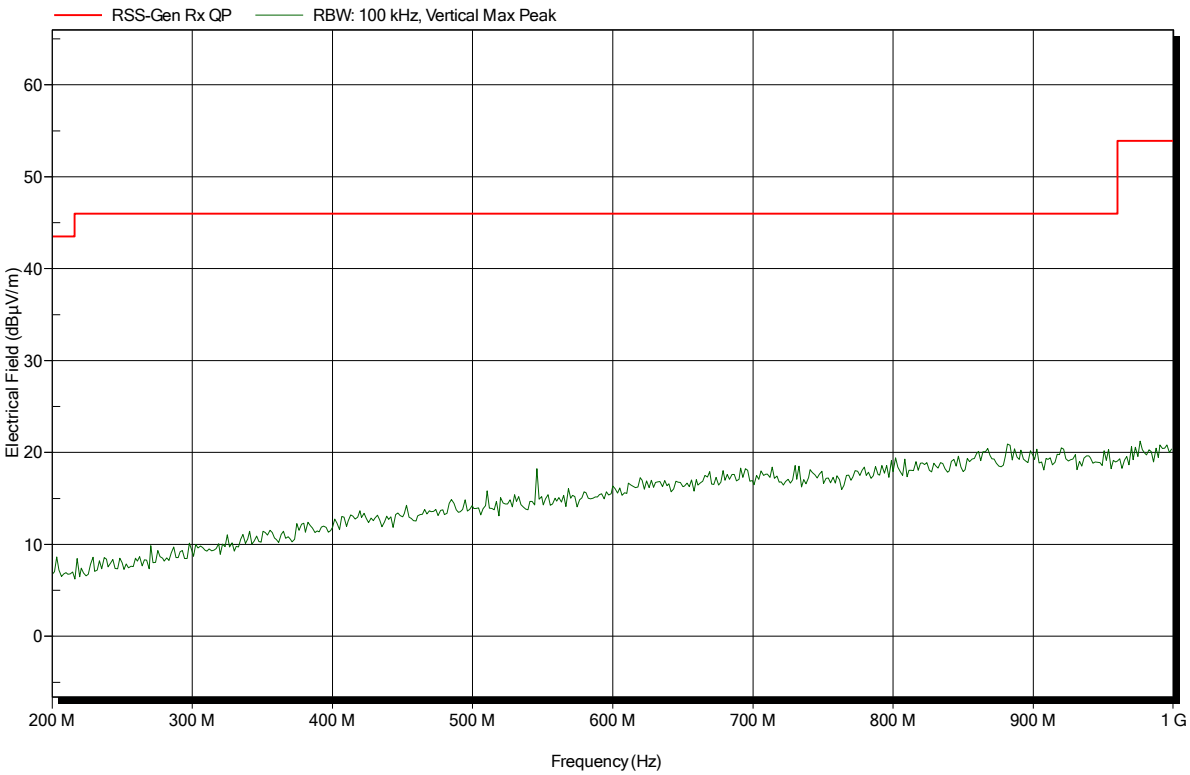

Spurious emissions according to RSS-Gen Issue 4

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 67

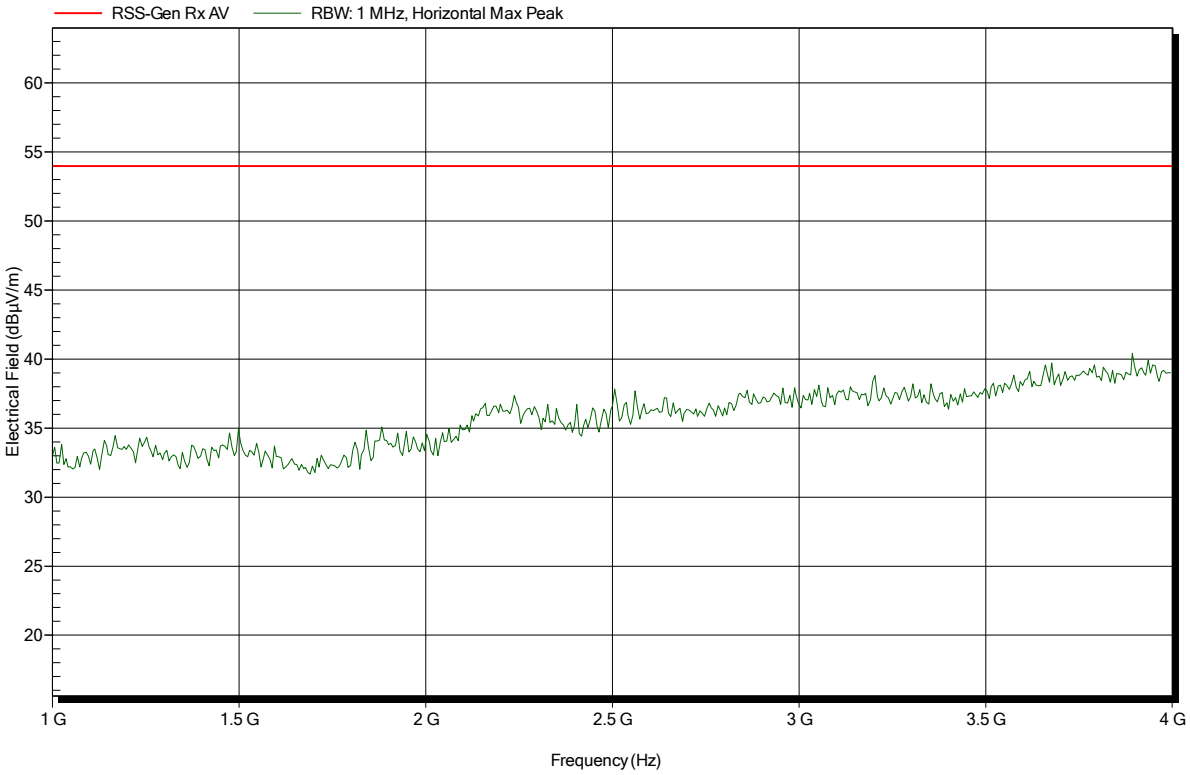

Spurious emissions according to RSS-Gen Issue 4

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	RX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 69

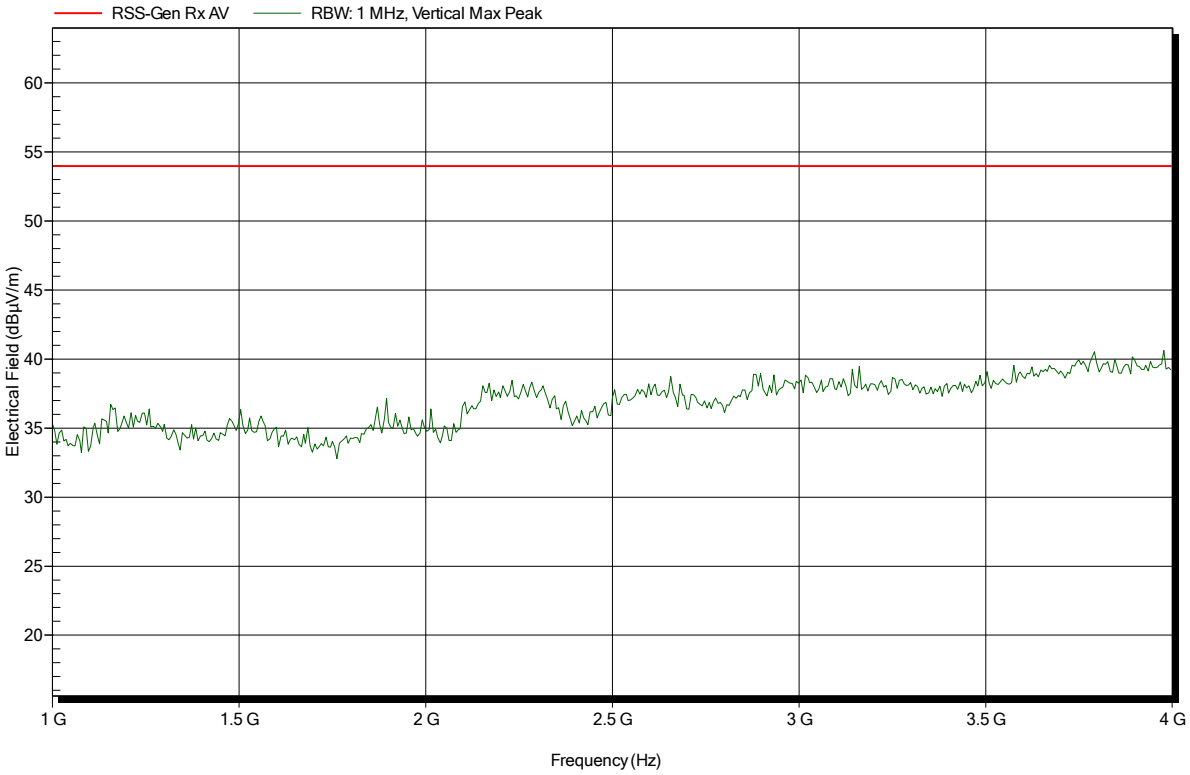

Spurious emissions according to RSS-Gen Issue 4

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 68

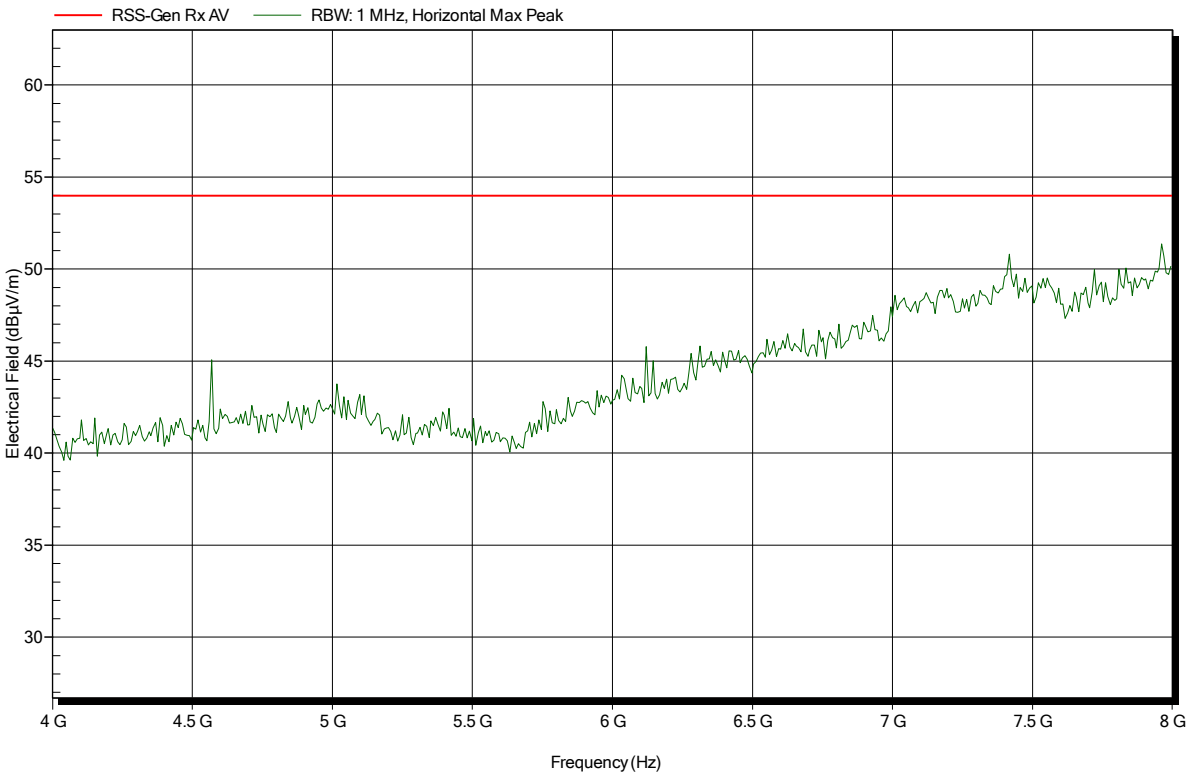

Spurious emissions according to RSS-Gen Issue 4

Project number:	G0M-1802-7258
Applicant:	spaceti
EUT Name:	Spaceti stone
Model:	Spaceti stone CO2
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	RX; SRD; 2-GFSK; 915 MHz
Test Date:	2018-03-26
Note:	

Index 70

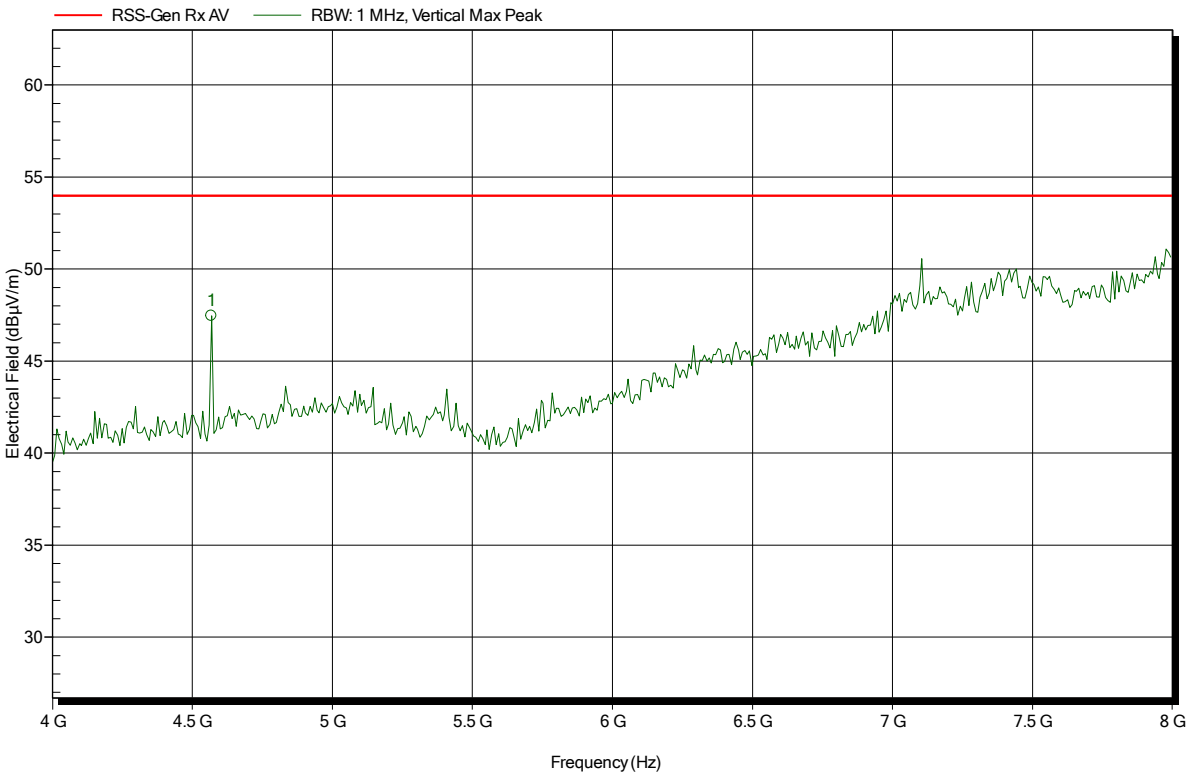

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.568 GHz	47.46 dBµV/m	53.98 dBµV/m	-6.52 dB	Pass