



承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称

CUSTOMER NAME:

产 品 名 称

PRODUCT NAME: 433 螺旋天线/433 spiral antenna

客 户 料 号

CUSTOMER P/N:

晟达电子料号

SD P/N: B0010072Q06 REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:		
APPROVED BY:		
DATE:	2022/1/21	

Contents

地址/Address: 深圳市龙岗爱联嶂背汉光科技园/Shenzhen City,
Longgang Love Lianzhang back Hanguang Science and Technology
Park



<i>Item</i>	<i>Description</i>
1.-----	规格表/Specification sheet
2.-----	成品图/Finished drawing
3.-----	测试报告/Test report

地址/Address: 深圳市龙岗爱联嶂背汉光科技园/Shenzhen City, Longgang Love Lianzhang back Hanguang Science and Technology Park



深圳市晟达通讯有限公司



Shenzhen Shengda Communication Equipment Co., Ltd.

主要技术指标		Main technical specifications	
频率范围 (MHZ)	433	Frequency Range (MHZ)	433
特性阻抗(Ω)	50	Impedance(Ω)	50
增益(dBi)	2	Gain(dBi)	2
输出电压 驻波比	≤ 2.0	VSWR	≤ 2.0
最大功率	50W	Admitted Power	50W
极化方式	垂直极化	Polarization	Linear, Vertical
连接方式	焊接	Connector Type	Welding
物理性能		Physical Properties	
天线本体材料	铜	Antenna Base	Cu
天线尺寸	$\Phi 6*26.5\text{mm}$	Antenna size	$\Phi 6*26.5\text{mm}$
工作温度	$-20^{\circ}\text{C}\sim+65^{\circ}\text{C}$	Operating Temp	$-20^{\circ}\text{C}\sim+65^{\circ}\text{C}$
保存温度	$-30^{\circ}\text{C}\sim+75^{\circ}\text{C}$	Storage Temp	$-30^{\circ}\text{C}\sim+75^{\circ}\text{C}$

地址/Address: 深圳市龙岗爱联嶂背汉光科技园/Shenzhen City, Longgang Love Lianzhang back Hanguang Science and Technology Park

此图不得复制、泄露、或其他用途，除非有深圳市晟达通讯设备有限公司的书面同意，否则不能向外提供图纸的全部或部分内容。

This drawing shall not be reproduced, leaked or used for any other purpose. Unless with the written consent of Shenzhen Shengda Communication Equipment Co., Ltd. .

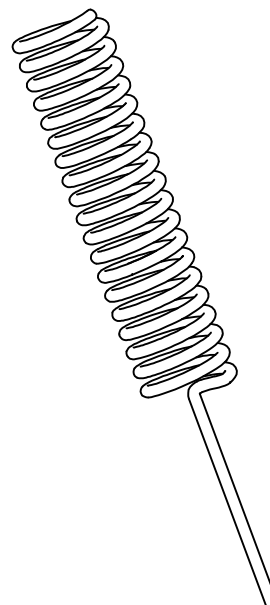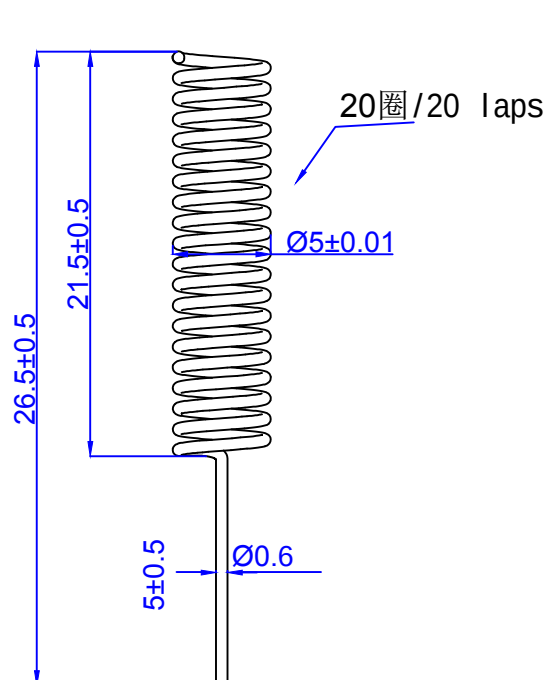

单位/Unit : mm

比例/Proportion : 1 : 1

图号/Drawing number : 20220313

技术要求/technical requirements/specifications

1. 无外观不良 / No appearance defect
2. 尺寸按图纸要求 / Size according to the drawing requirements
3. 物料均符合ROHS要求 / Conform to the requirements of the ROHS

注:

所有注明尺寸按图纸要求加工,
未标注公差尺寸不得超过 ± 0.1 毫米

Note:

All dimensions indicated shall
be machined according to the
requirements of the drawings,
and the unspecified tolerance
size shall not exceed ± 0.1 mm