




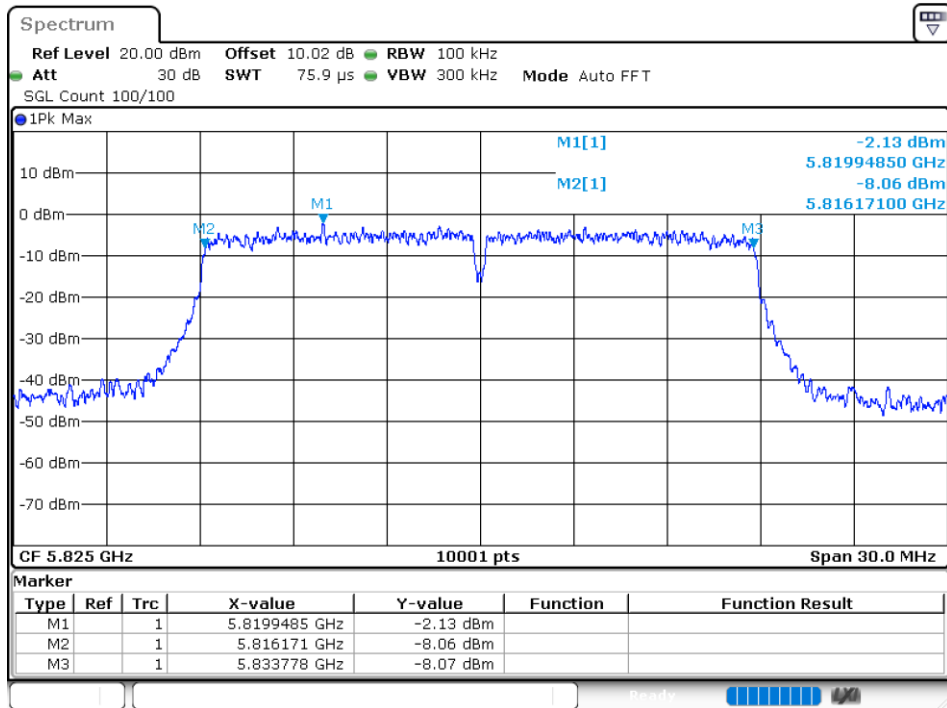


-6dB Bandwidth NVNT ac20 5745MHz Ant 2

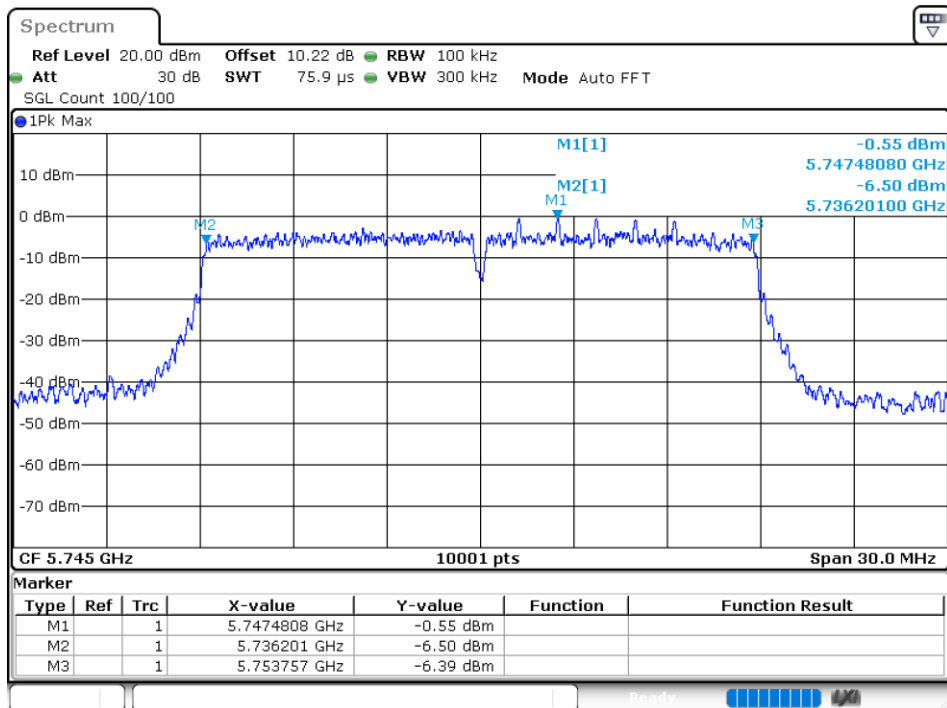


-6dB Bandwidth NVNT ac20 5785MHz Ant 2

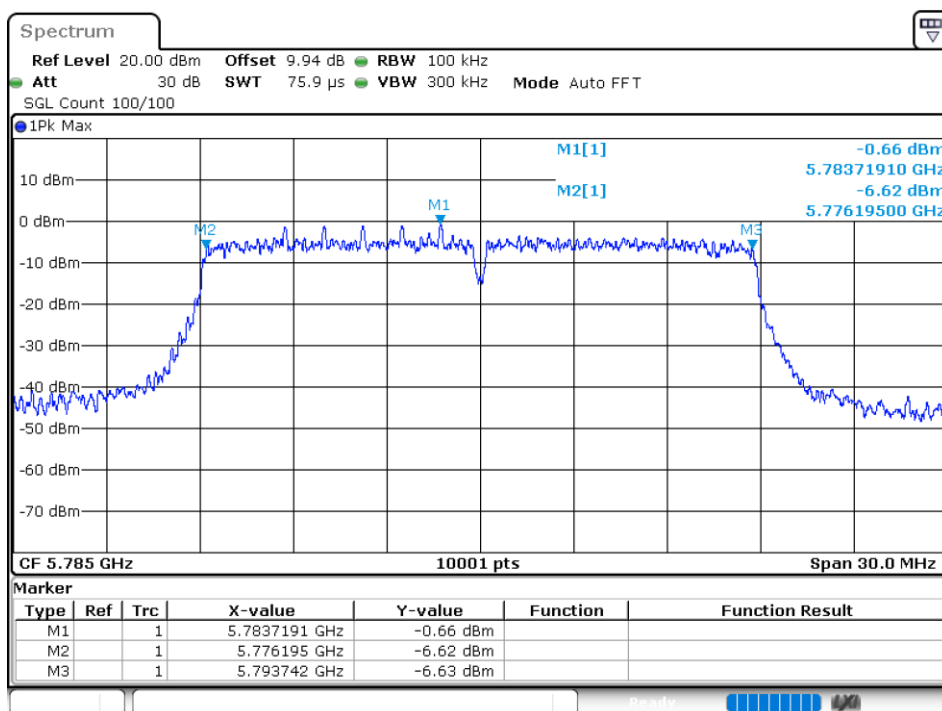


-6dB Bandwidth NVNT ac20 5825MHz Ant 2

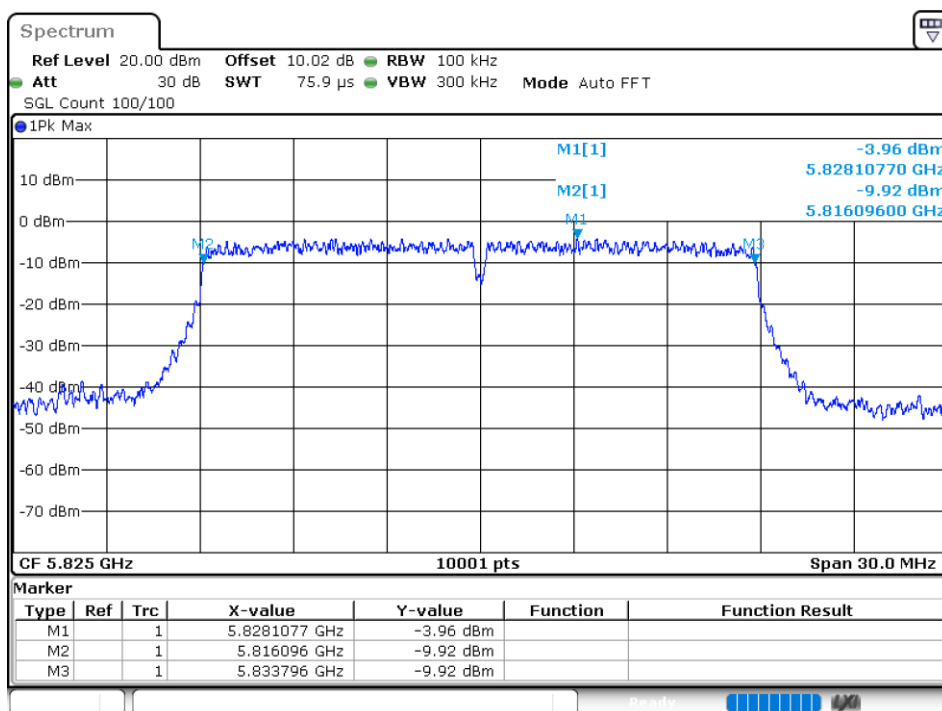


-6dB Bandwidth NVNT ac40 5755MHz Ant 1

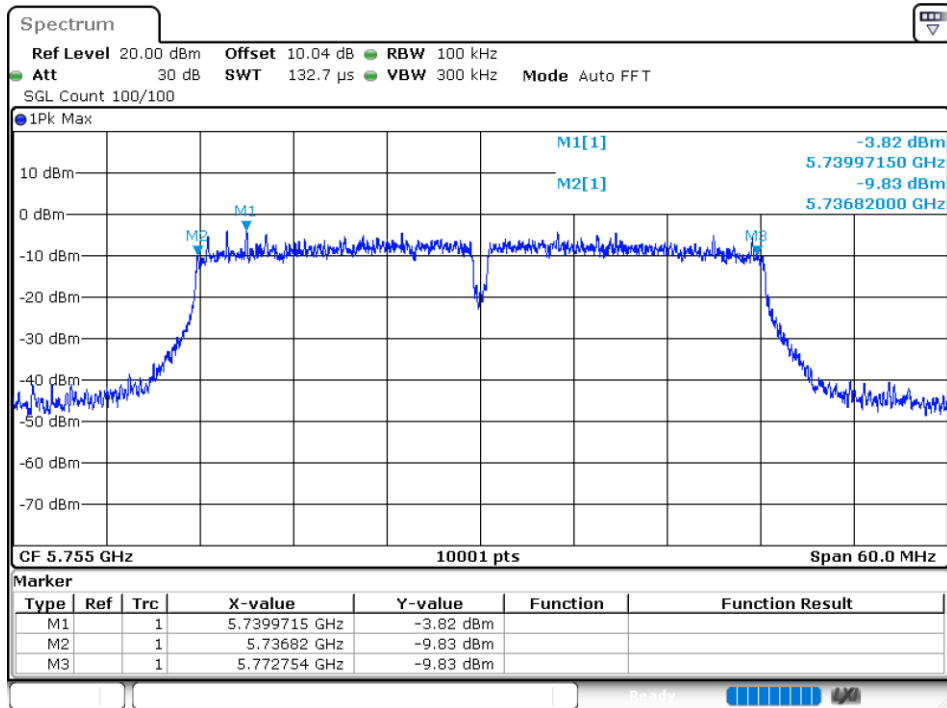


-6dB Bandwidth NVNT ac40 5795MHz Ant 1

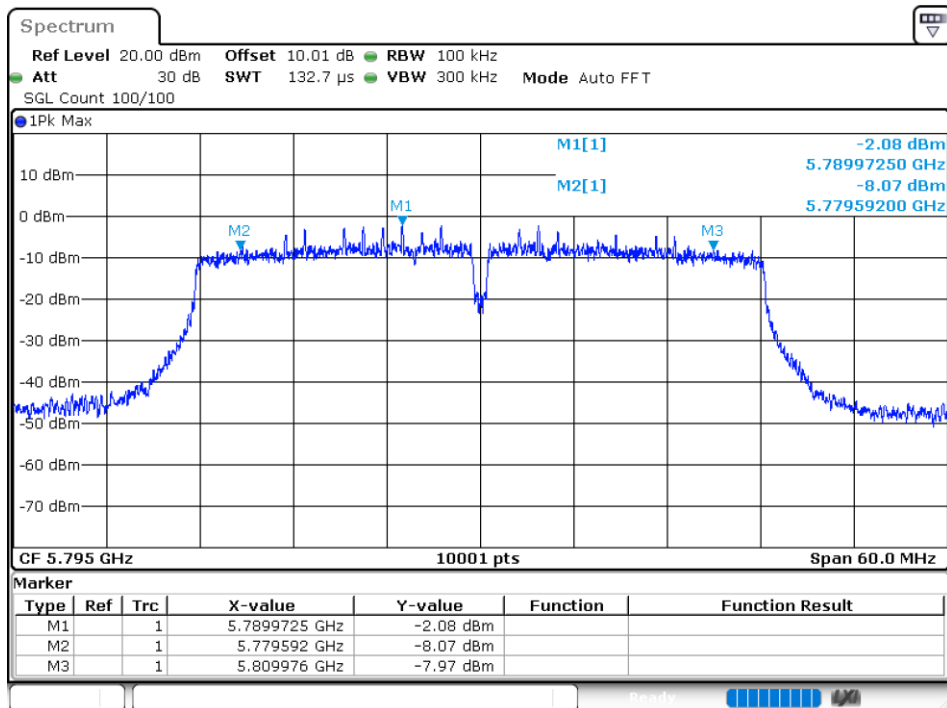


-6dB Bandwidth NVNT ac40 5755MHz Ant 2

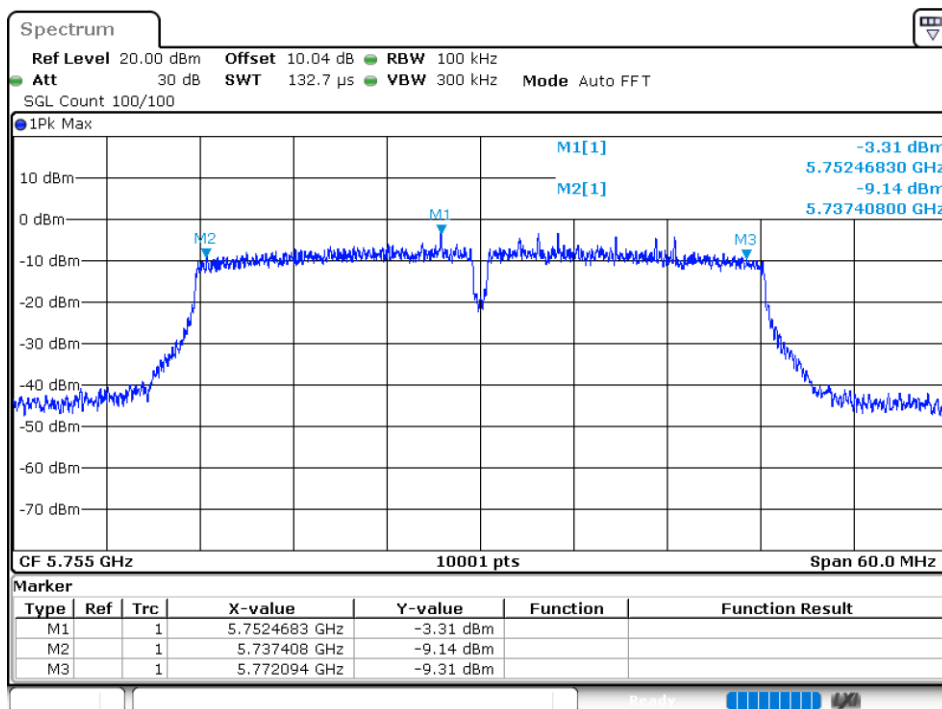


-6dB Bandwidth NVNT ac40 5795MHz Ant 2

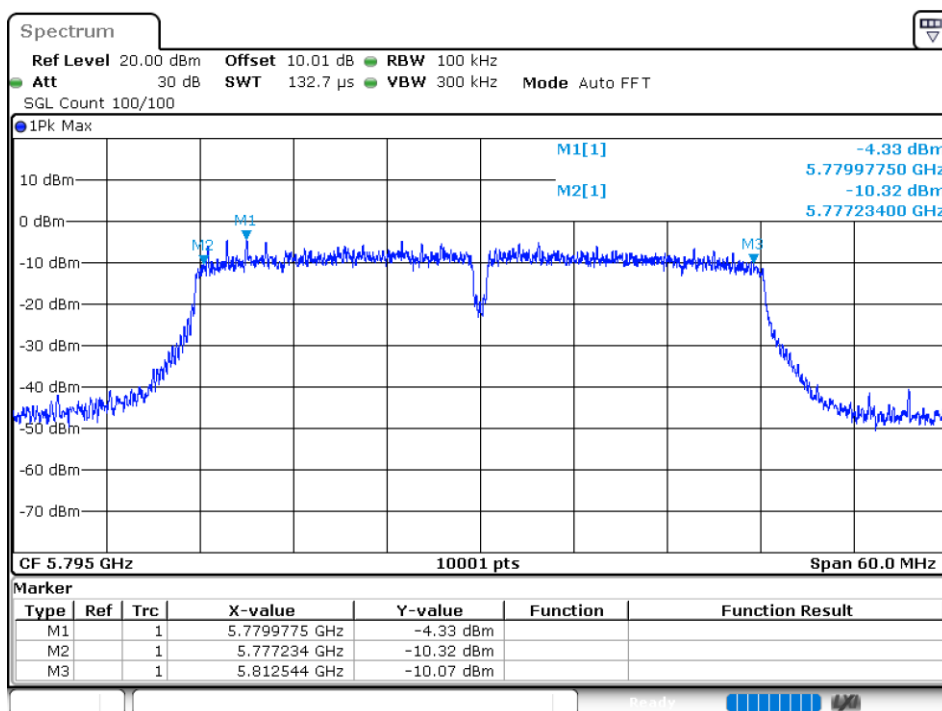


-6dB Bandwidth NVNT ac80 5775MHz Ant 1

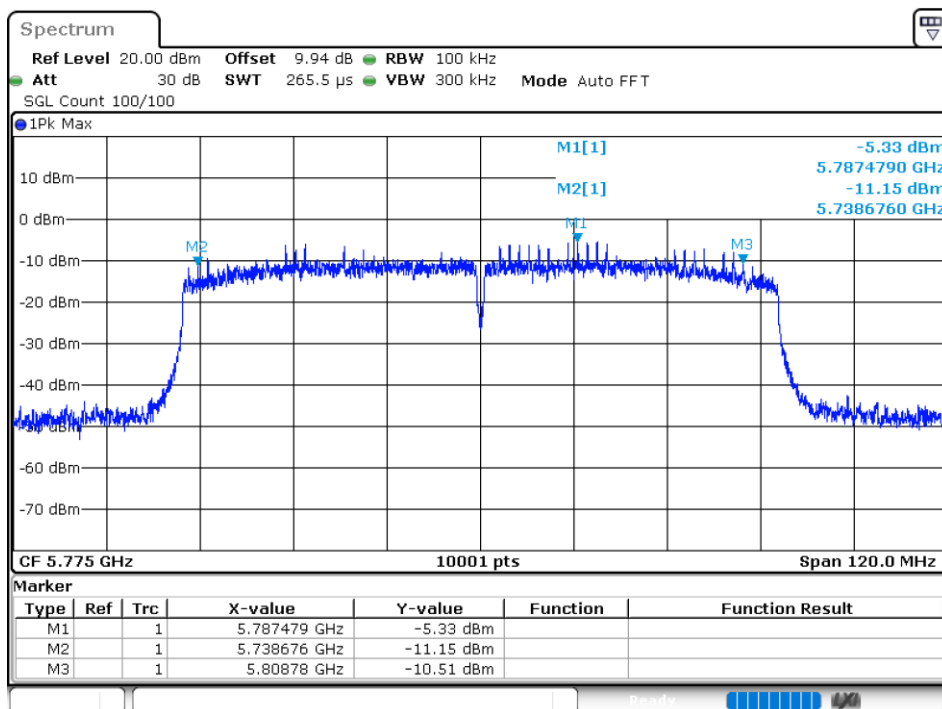


-6dB Bandwidth NVNT ac80 5775MHz Ant 2

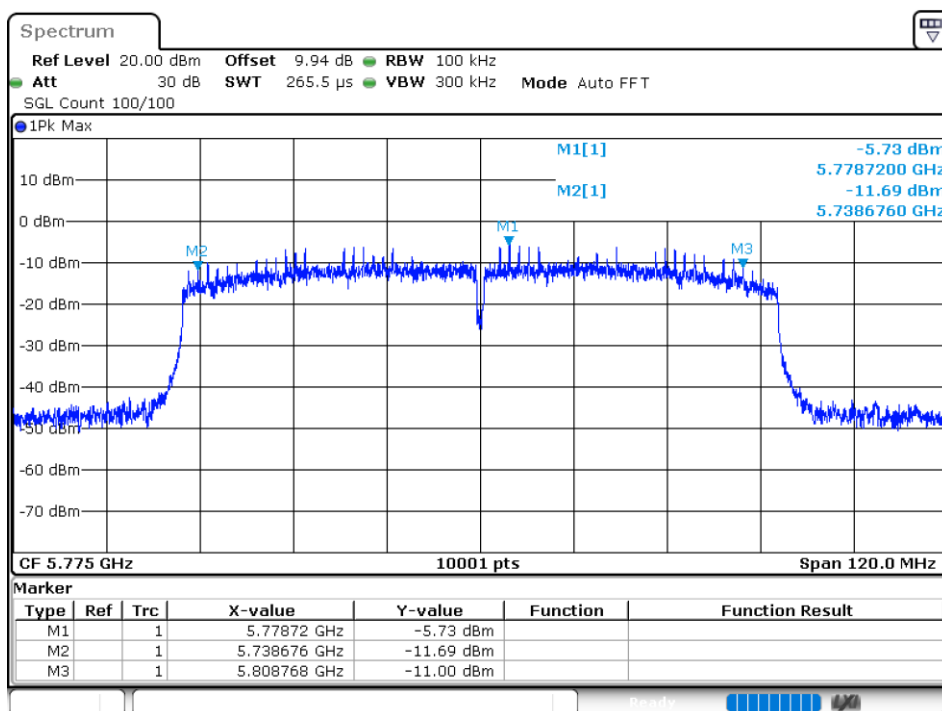


-6dB Bandwidth NVNT n20 5745MHz Ant 1

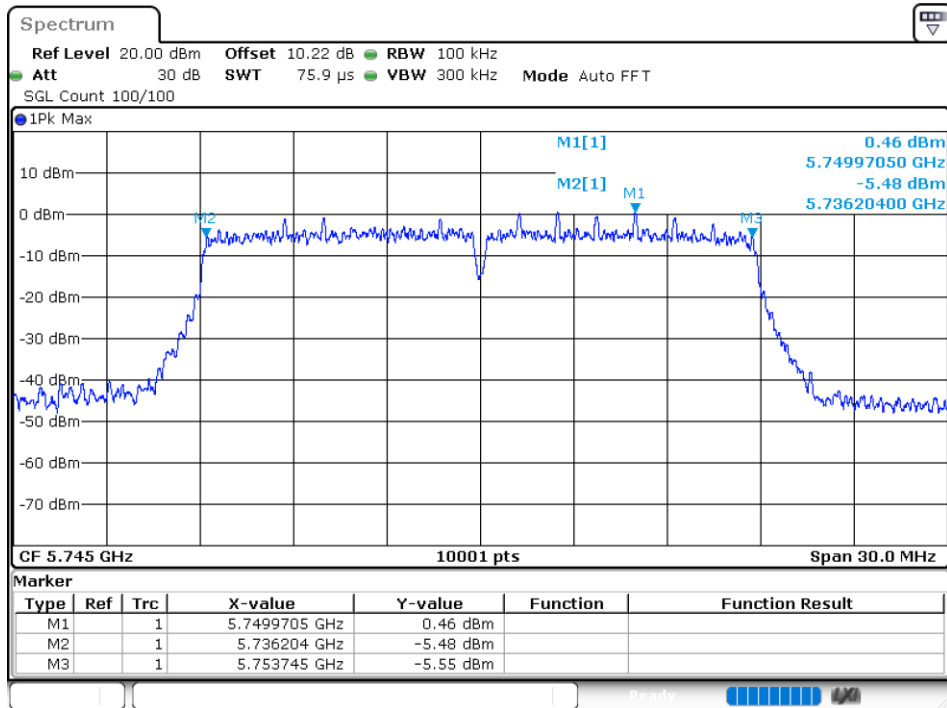


-6dB Bandwidth NVNT n20 5785MHz Ant 1

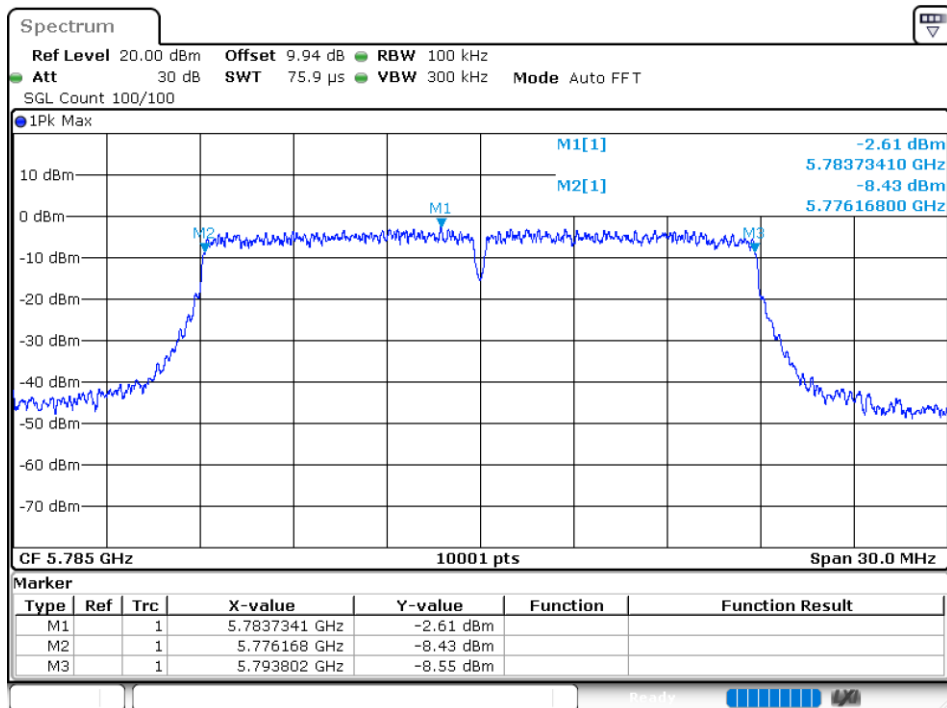


-6dB Bandwidth NVNT n20 5825MHz Ant 1

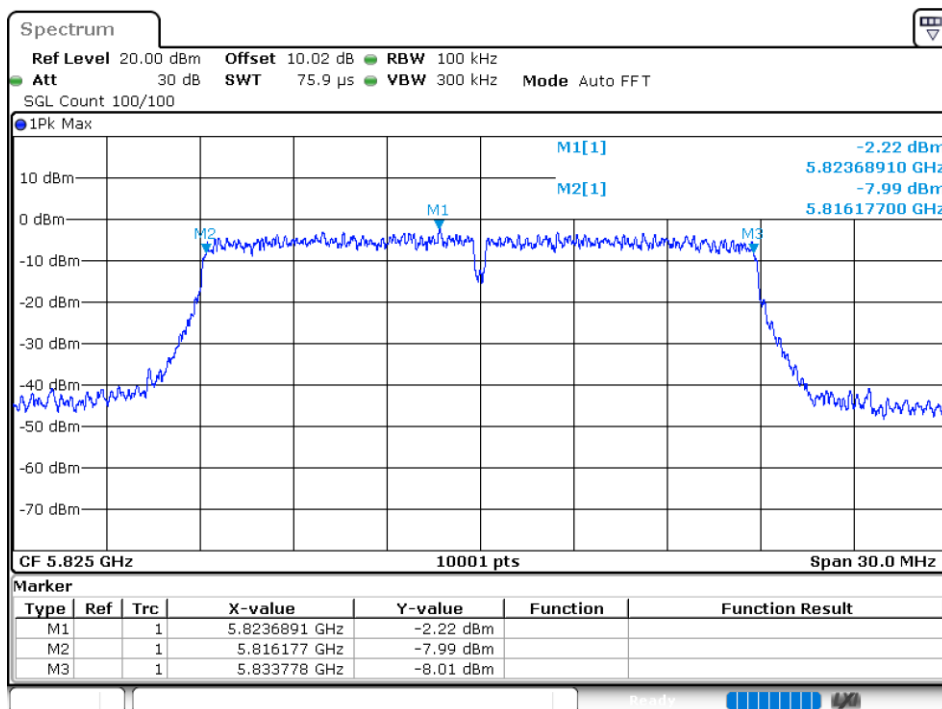


-6dB Bandwidth NVNT n20 5745MHz Ant 2

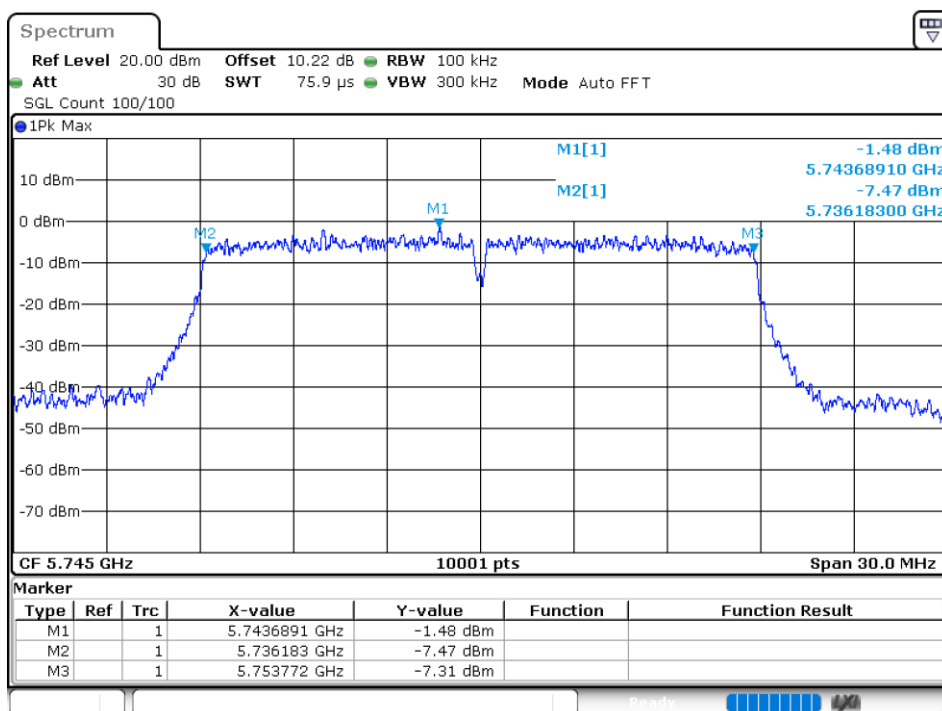


-6dB Bandwidth NVNT n20 5785MHz Ant 2

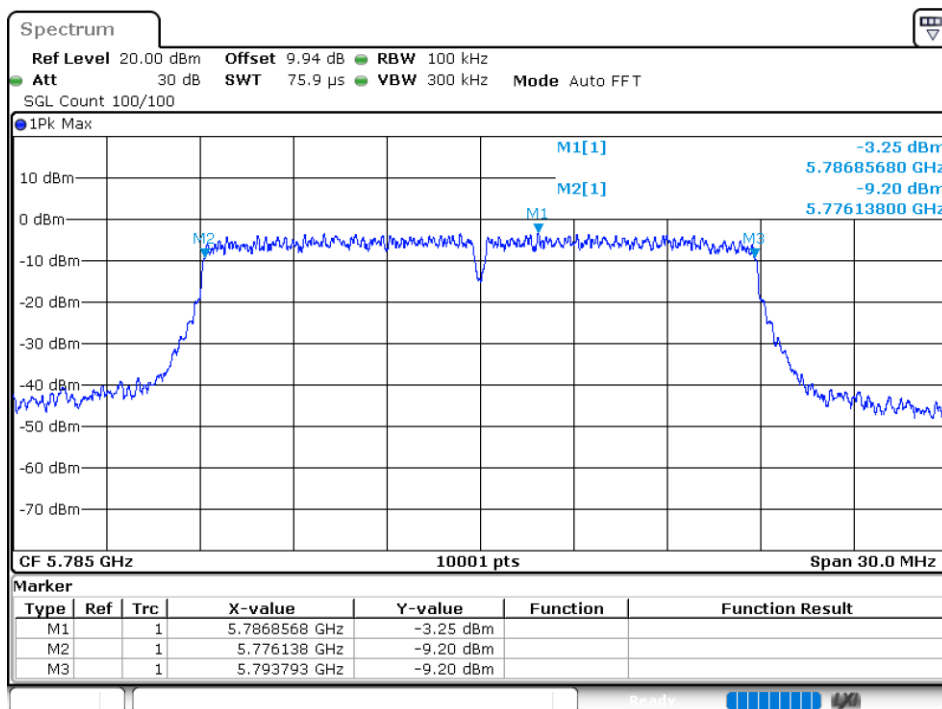


-6dB Bandwidth NVNT n20 5825MHz Ant 2

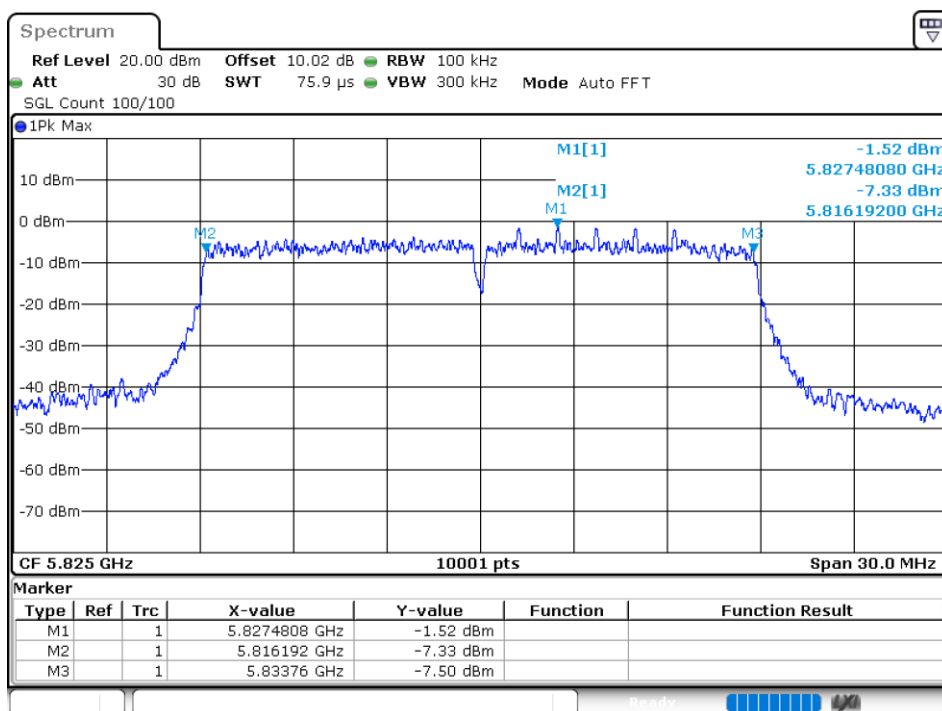


-6dB Bandwidth NVNT n40 5755MHz Ant 1

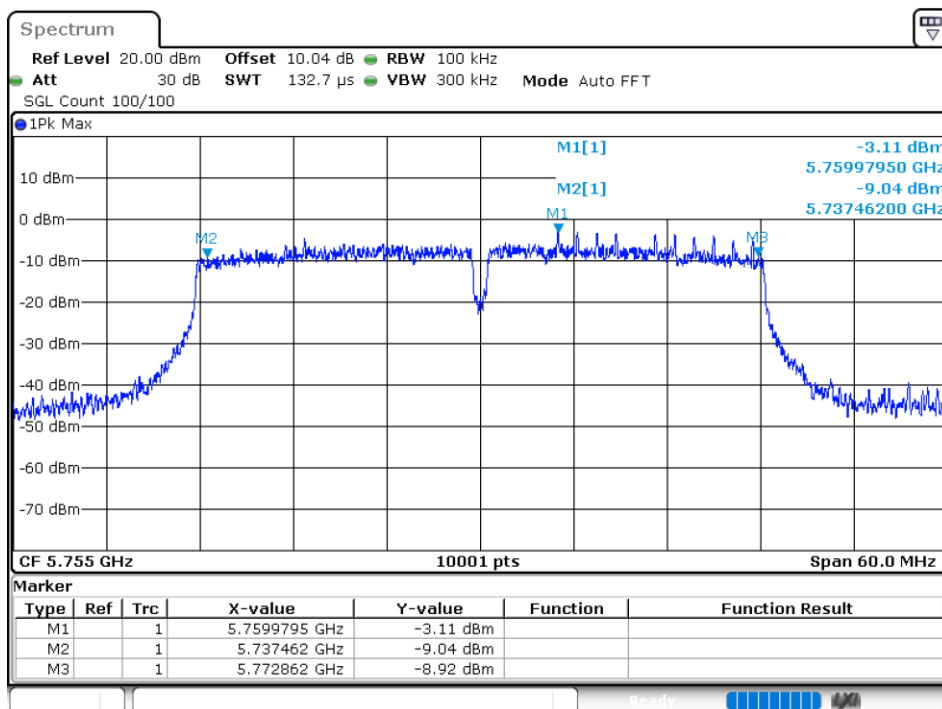


-6dB Bandwidth NVNT n40 5795MHz Ant 1

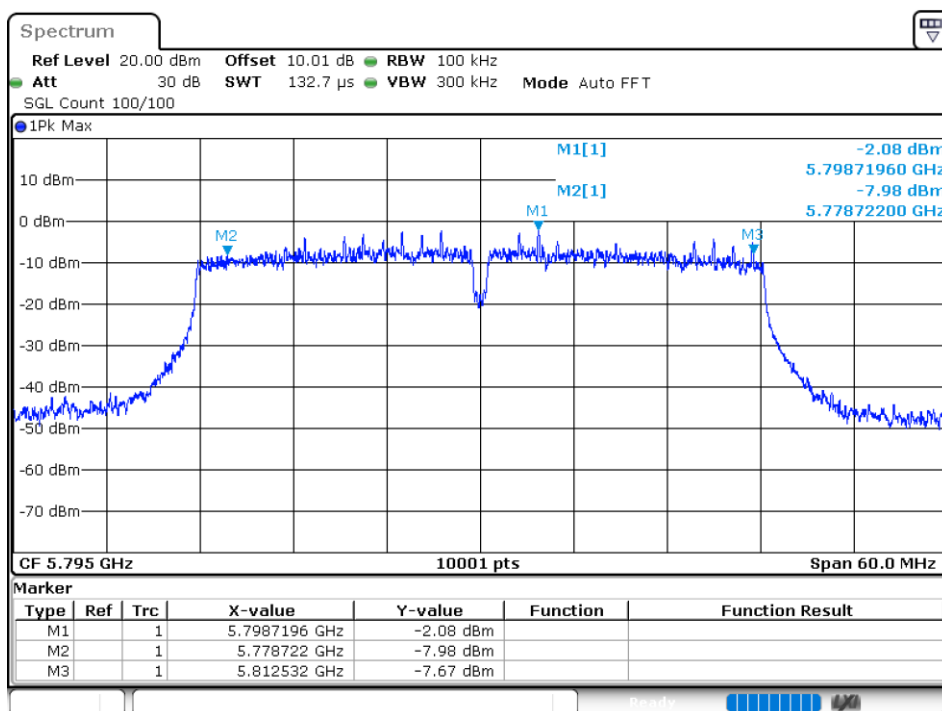

-6dB Bandwidth NVNT n40 5755MHz Ant 2

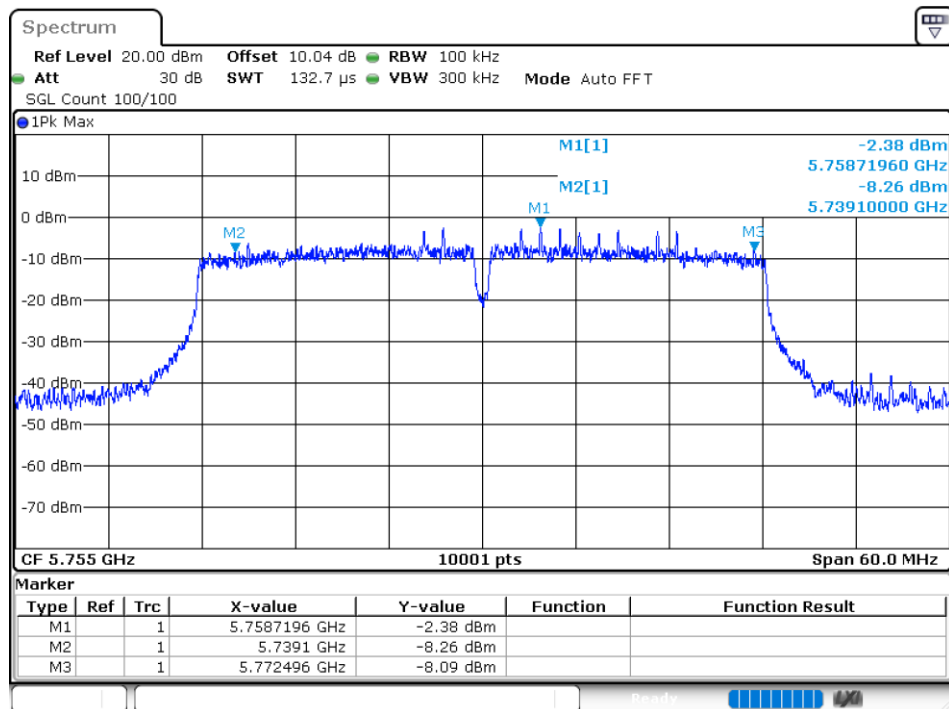


-6dB Bandwidth NVNT n40 5795MHz Ant 2

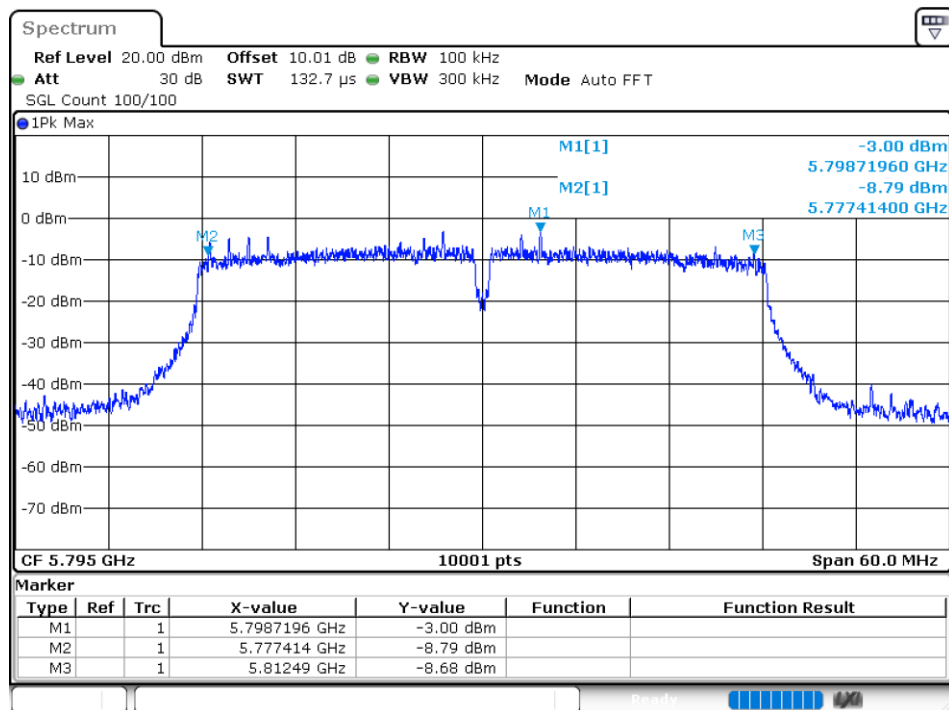


## Occupied Channel Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|------|-----------------|---------|---------------|
| NVNT      | a    | 5745            | Ant 1   | 16.399        |
| NVNT      | a    | 5785            | Ant 1   | 16.369        |
| NVNT      | a    | 5825            | Ant 1   | 16.357        |
| NVNT      | a    | 5745            | Ant 2   | 16.351        |
| NVNT      | a    | 5785            | Ant 2   | 16.318        |
| NVNT      | a    | 5825            | Ant 2   | 16.351        |
| NVNT      | ac20 | 5745            | Ant 1   | 17.551        |
| NVNT      | ac20 | 5785            | Ant 1   | 17.506        |
| NVNT      | ac20 | 5825            | Ant 1   | 17.527        |
| NVNT      | ac20 | 5745            | Ant 2   | 17.518        |
| NVNT      | ac20 | 5785            | Ant 2   | 17.527        |
| NVNT      | ac20 | 5825            | Ant 2   | 17.506        |
| NVNT      | ac40 | 5755            | Ant 1   | 36.116        |
| NVNT      | ac40 | 5795            | Ant 1   | 36.056        |
| NVNT      | ac40 | 5755            | Ant 2   | 36.146        |
| NVNT      | ac40 | 5795            | Ant 2   | 36.086        |
| NVNT      | ac80 | 5775            | Ant 1   | 74.729        |
| NVNT      | ac80 | 5775            | Ant 2   | 74.609        |
| NVNT      | n20  | 5745            | Ant 1   | 17.524        |
| NVNT      | n20  | 5785            | Ant 1   | 17.503        |
| NVNT      | n20  | 5825            | Ant 1   | 17.533        |
| NVNT      | n20  | 5745            | Ant 2   | 17.497        |
| NVNT      | n20  | 5785            | Ant 2   | 17.527        |
| NVNT      | n20  | 5825            | Ant 2   | 17.527        |
| NVNT      | n40  | 5755            | Ant 1   | 36.14         |
| NVNT      | n40  | 5795            | Ant 1   | 36.128        |
| NVNT      | n40  | 5755            | Ant 2   | 36.11         |
| NVNT      | n40  | 5795            | Ant 2   | 36.092        |


OBW NVNT a 5745MHz Ant 1

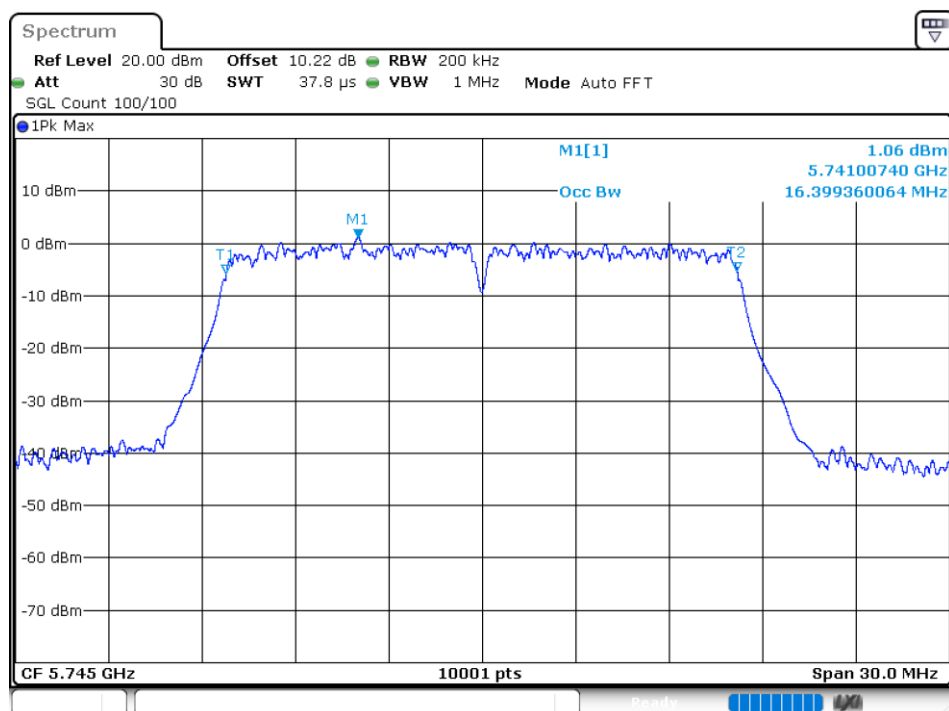


OBW NVNT a 5785MHz Ant 1

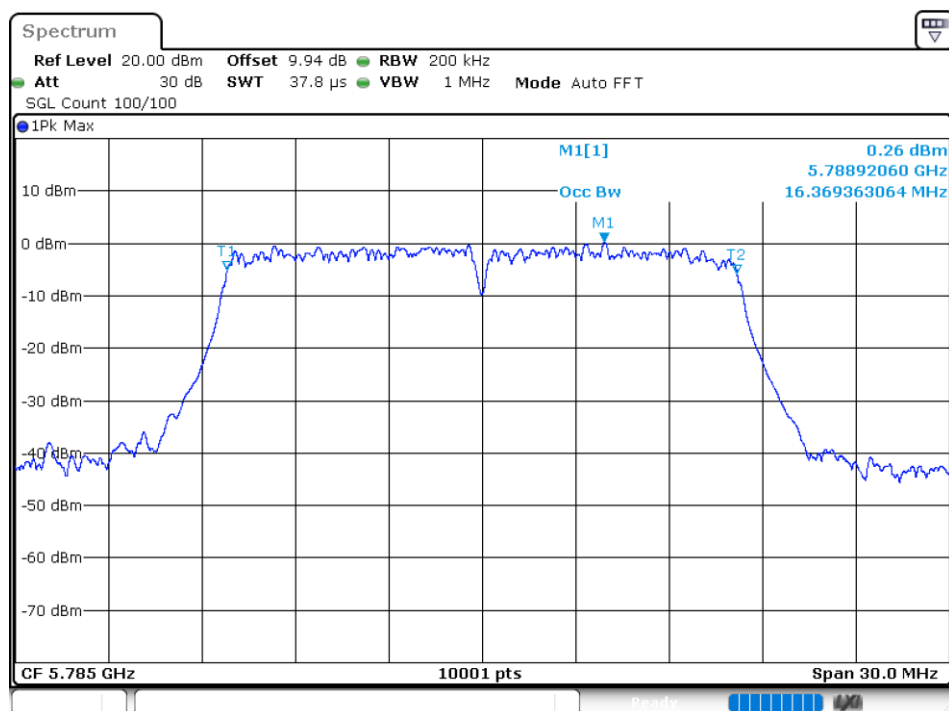


OBW NVNT a 5825MHz Ant 1

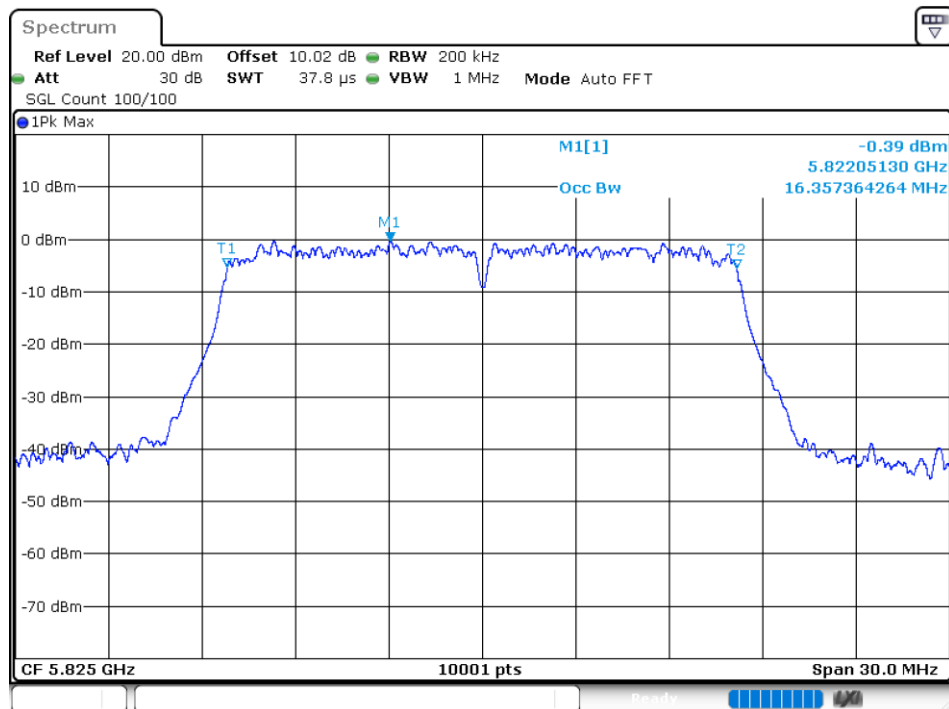


OBW NVNT a 5745MHz Ant 2

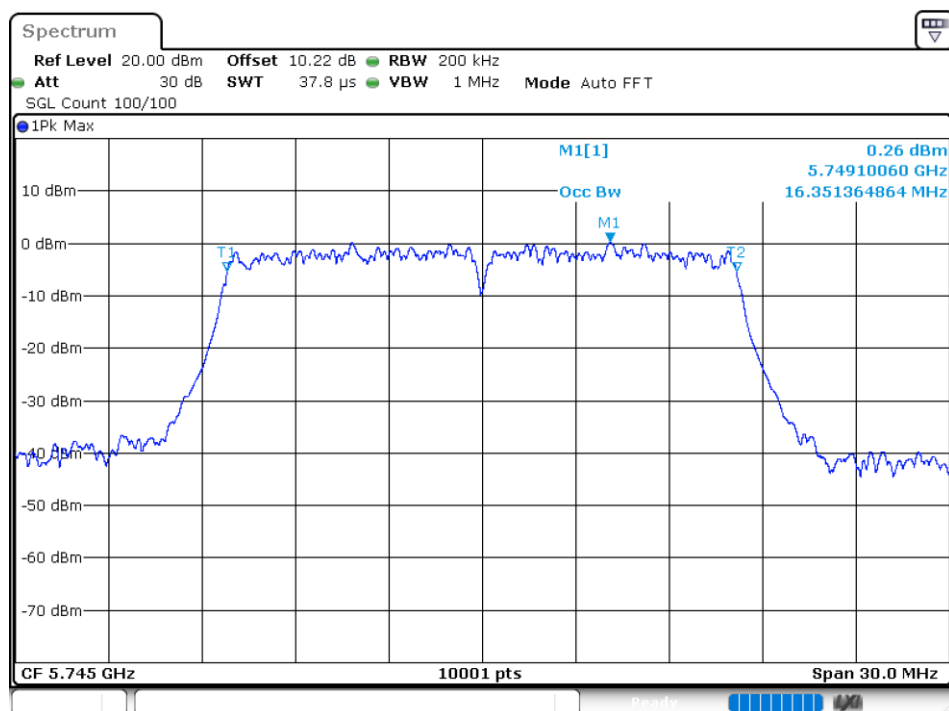


OBW NVNT a 5785MHz Ant 2

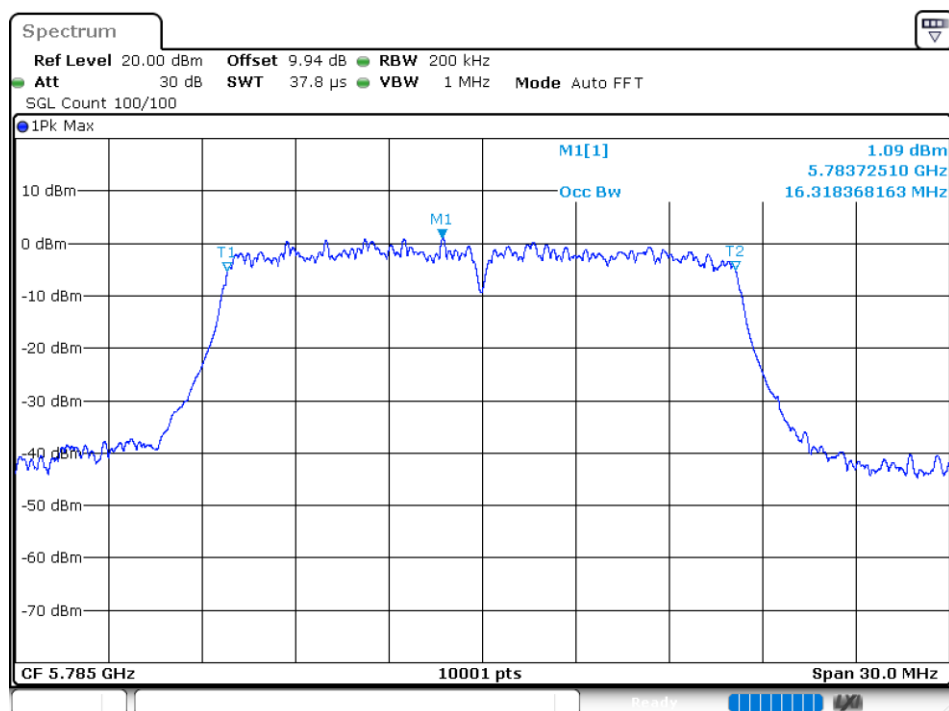


OBW NVNT a 5825MHz Ant 2

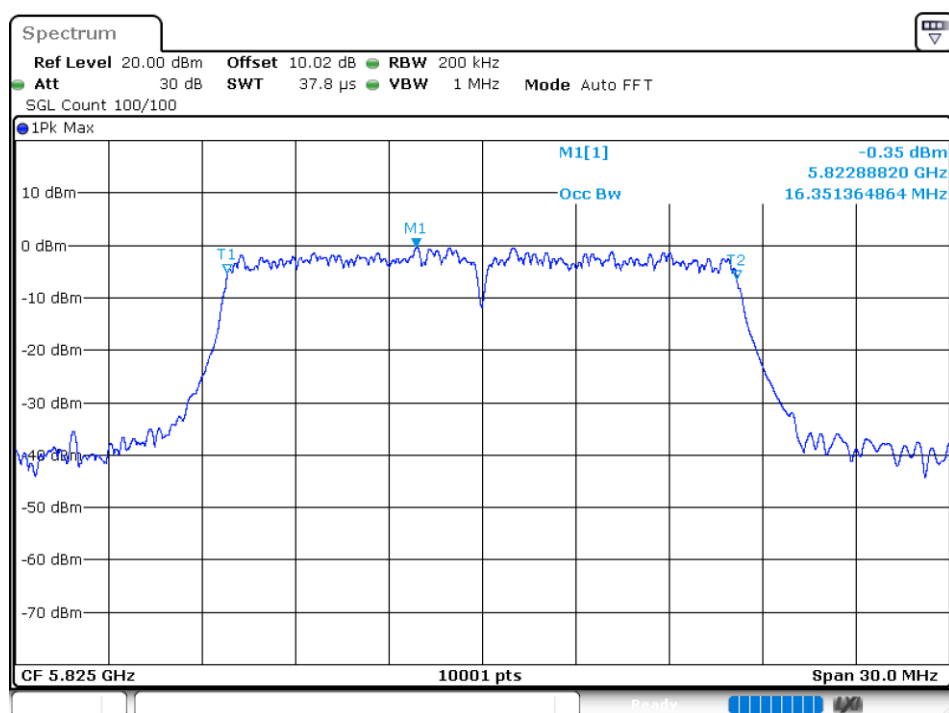


OBW NVNT ac20 5745MHz Ant 1

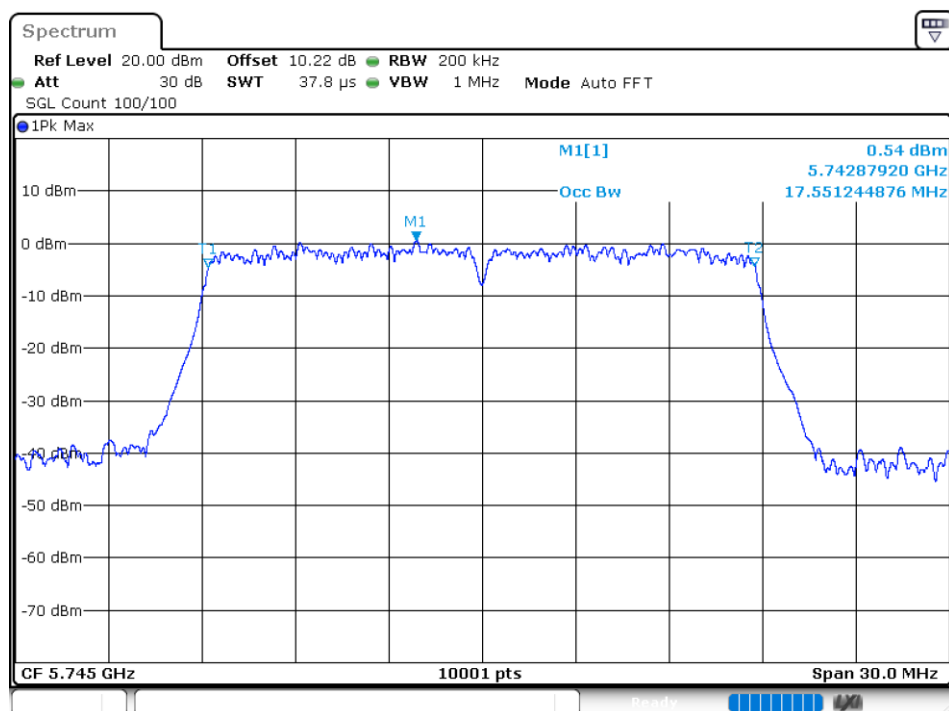


OBW NVNT ac20 5785MHz Ant 1

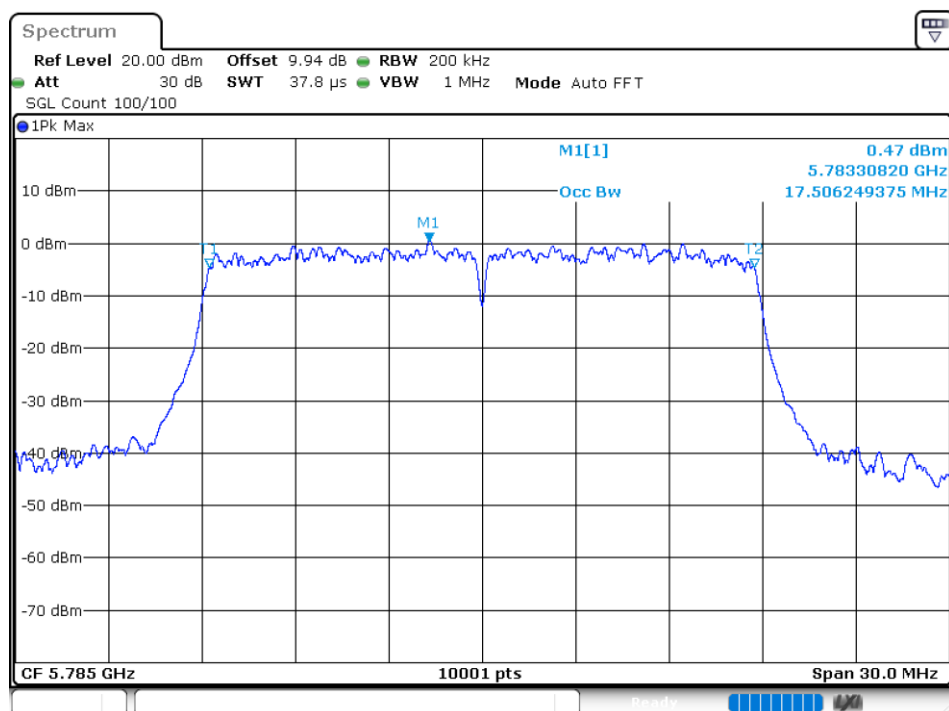


OBW NVNT ac20 5825MHz Ant 1

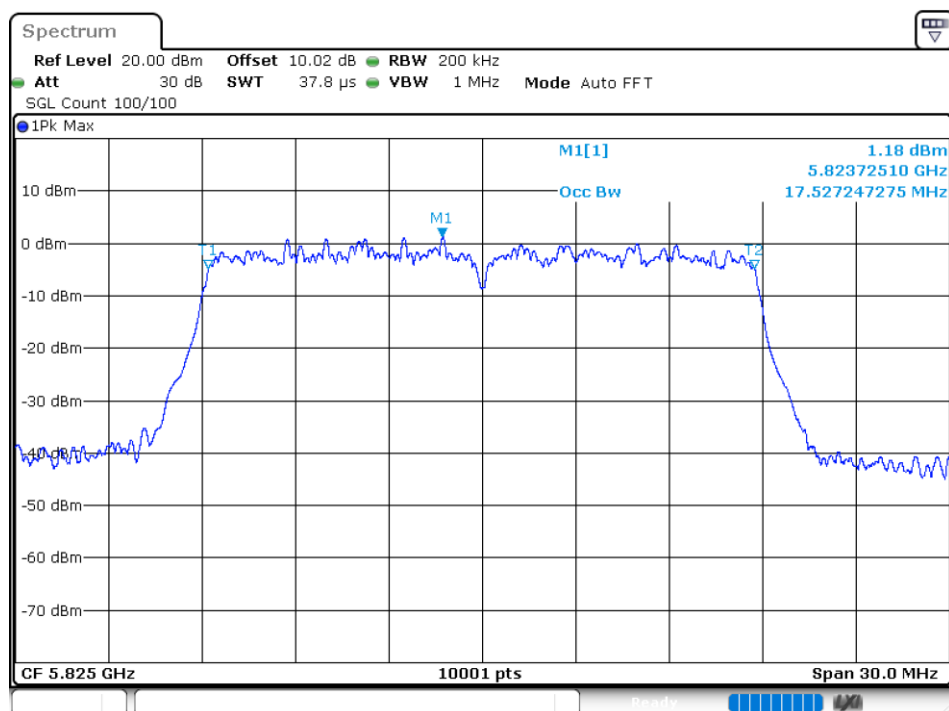


OBW NVNT ac20 5745MHz Ant 2

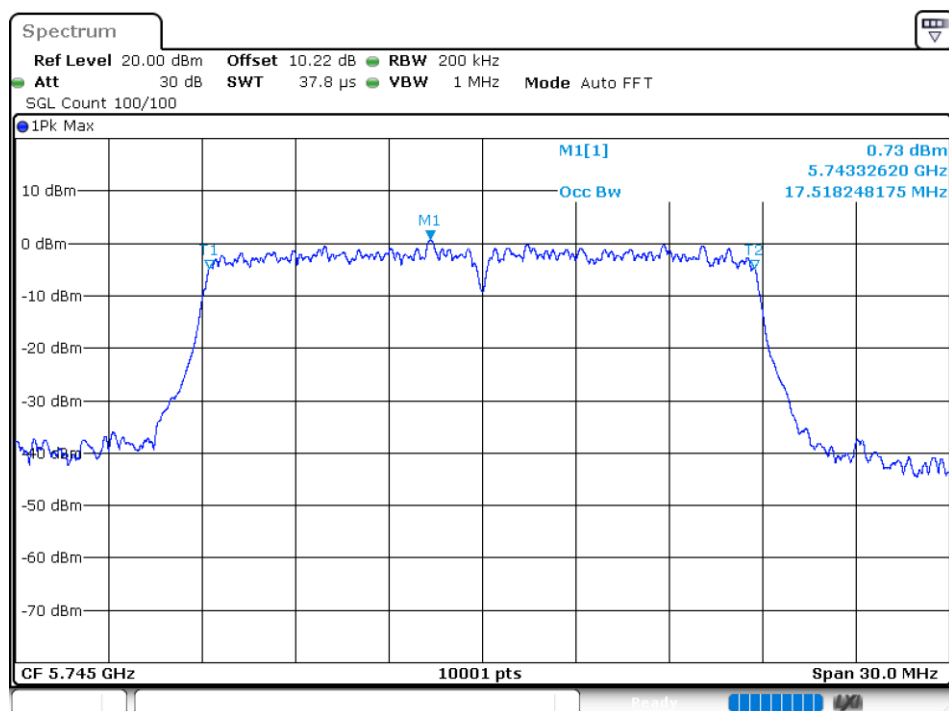


OBW NVNT ac20 5785MHz Ant 2

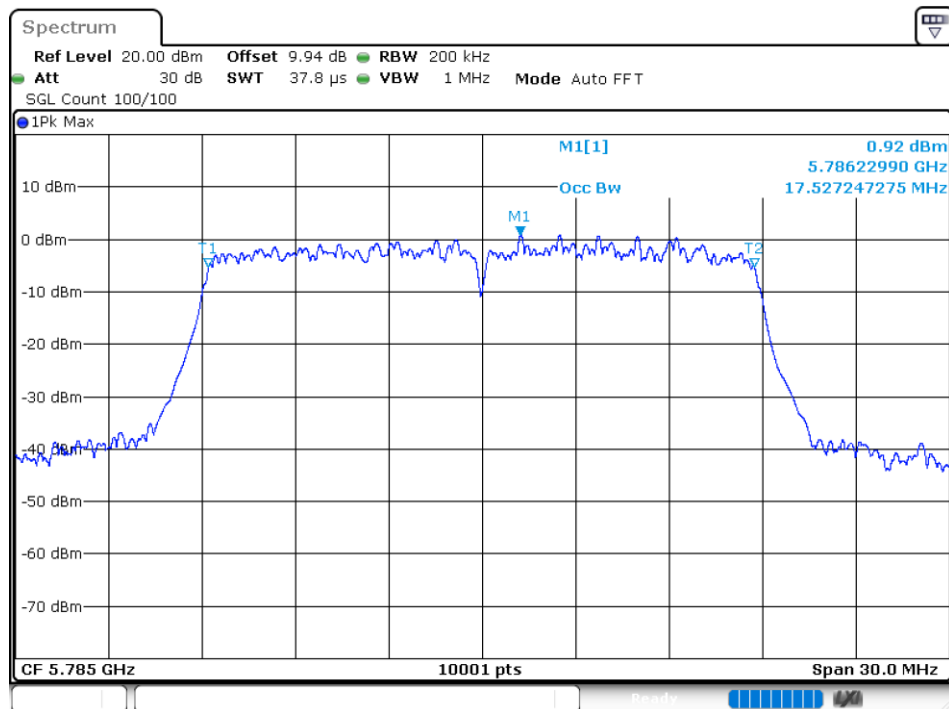


OBW NVNT ac20 5825MHz Ant 2

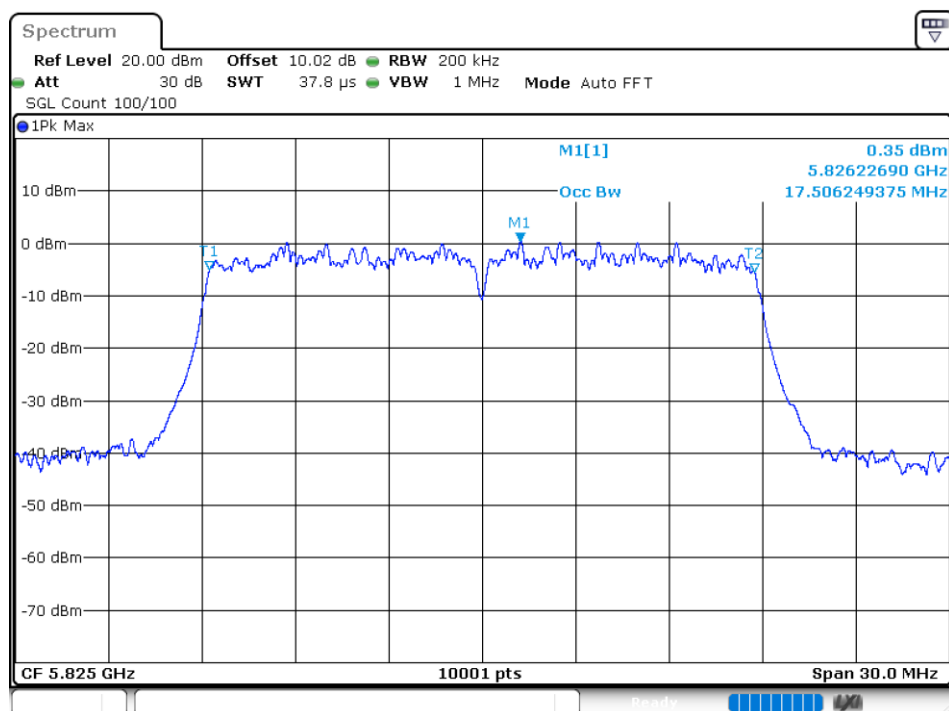


OBW NVNT ac40 5755MHz Ant 1

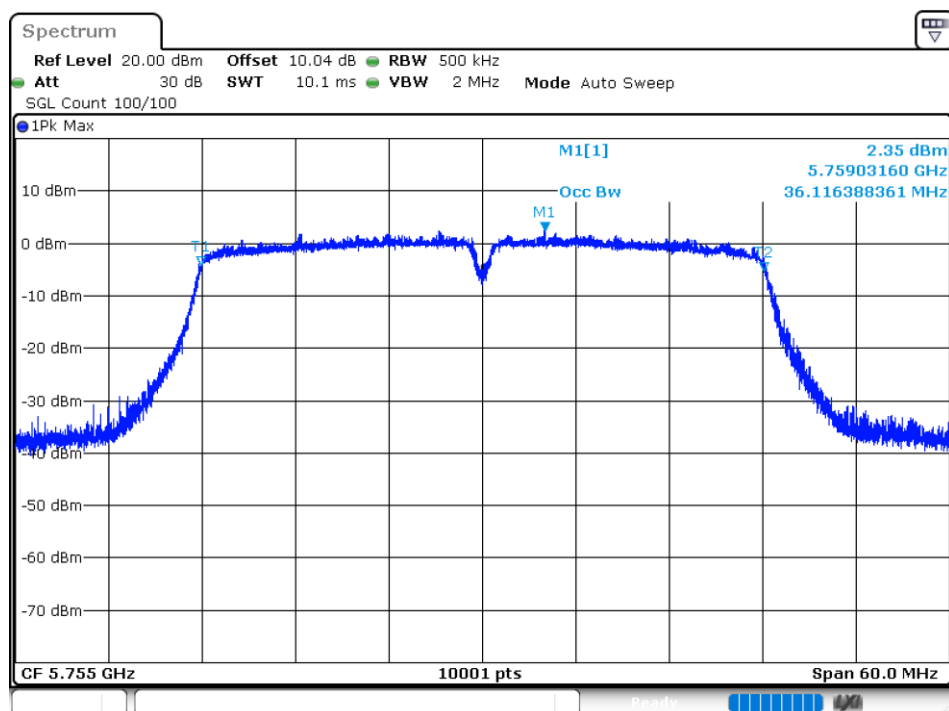


OBW NVNT ac40 5795MHz Ant 1

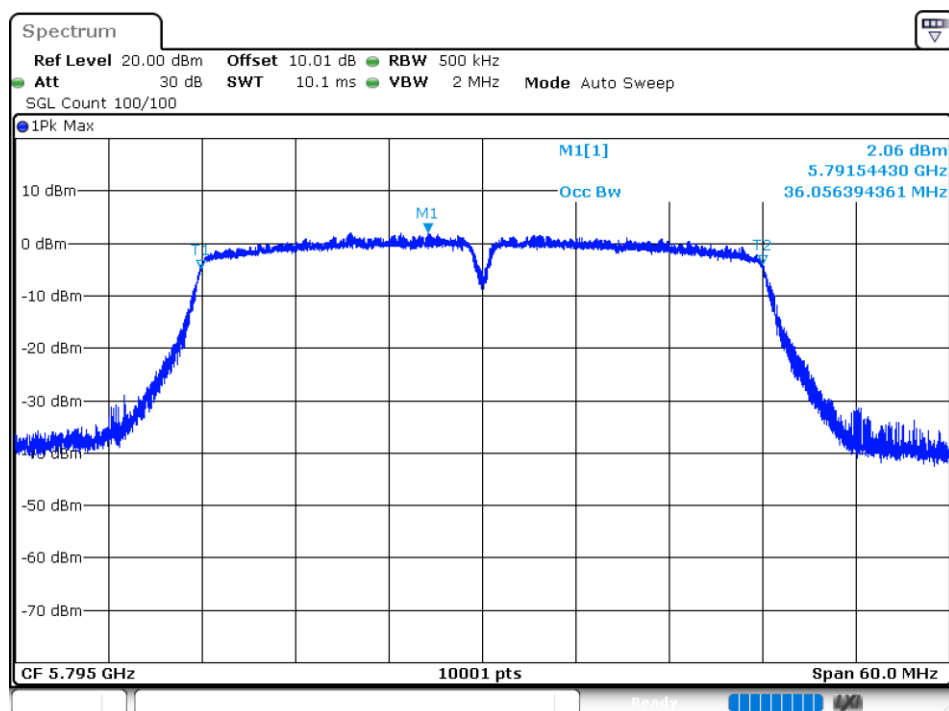


OBW NVNT ac40 5755MHz Ant 2

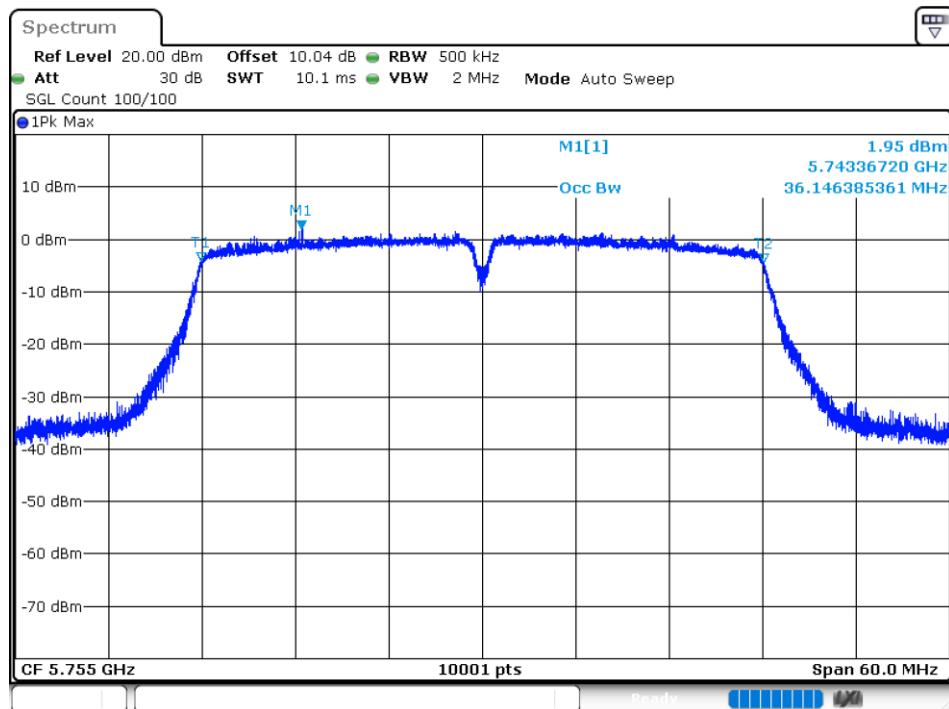


OBW NVNT ac40 5795MHz Ant 2

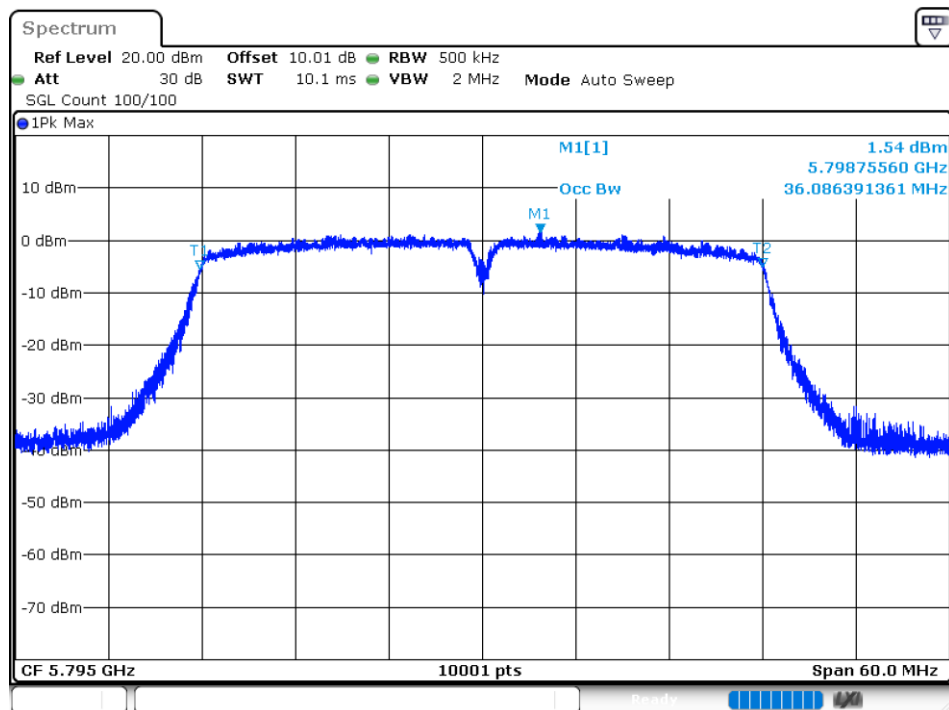


OBW NVNT ac80 5775MHz Ant 1

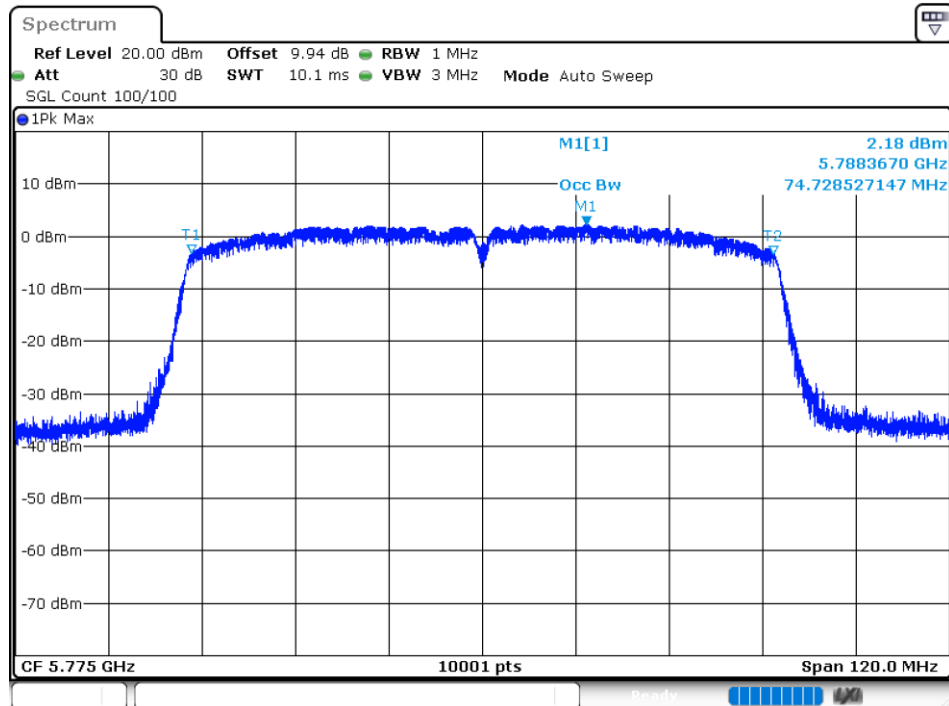


OBW NVNT ac80 5775MHz Ant 2

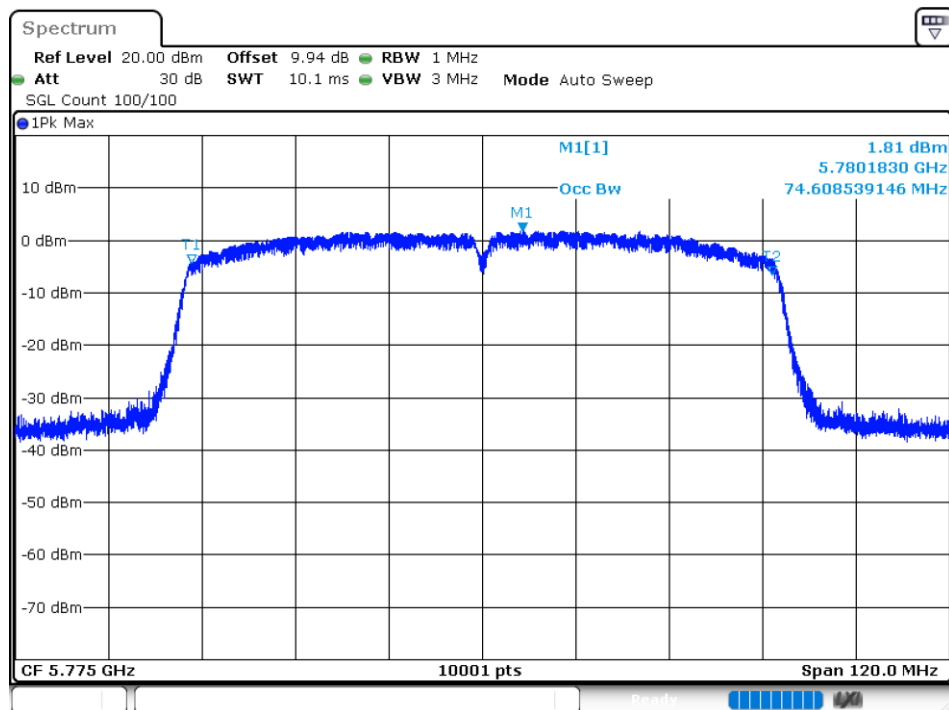


OBW NVNT n20 5745MHz Ant 1

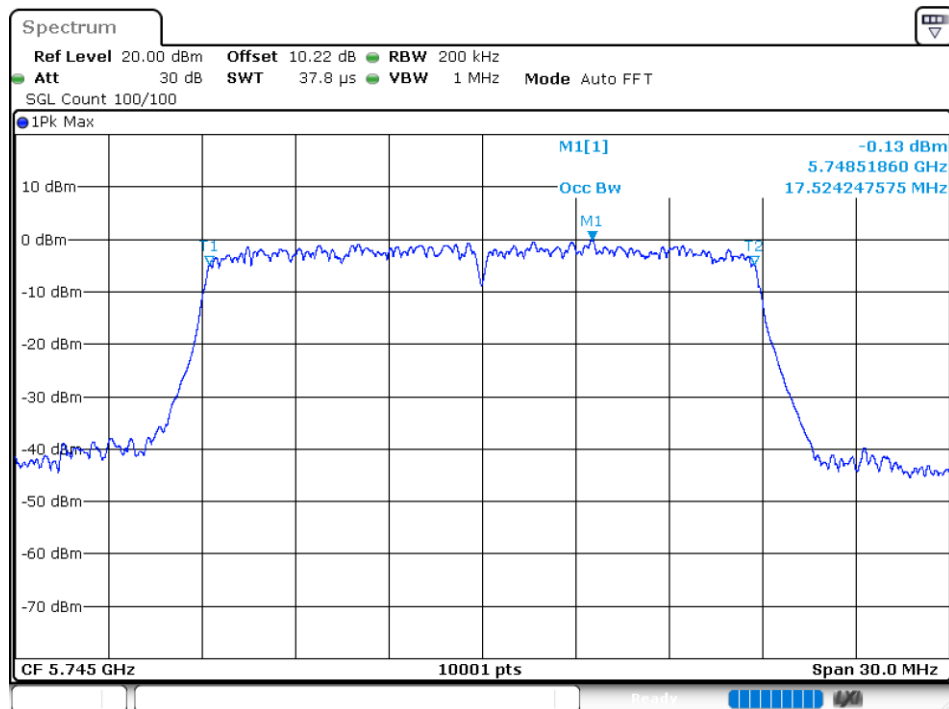


OBW NVNT n20 5785MHz Ant 1

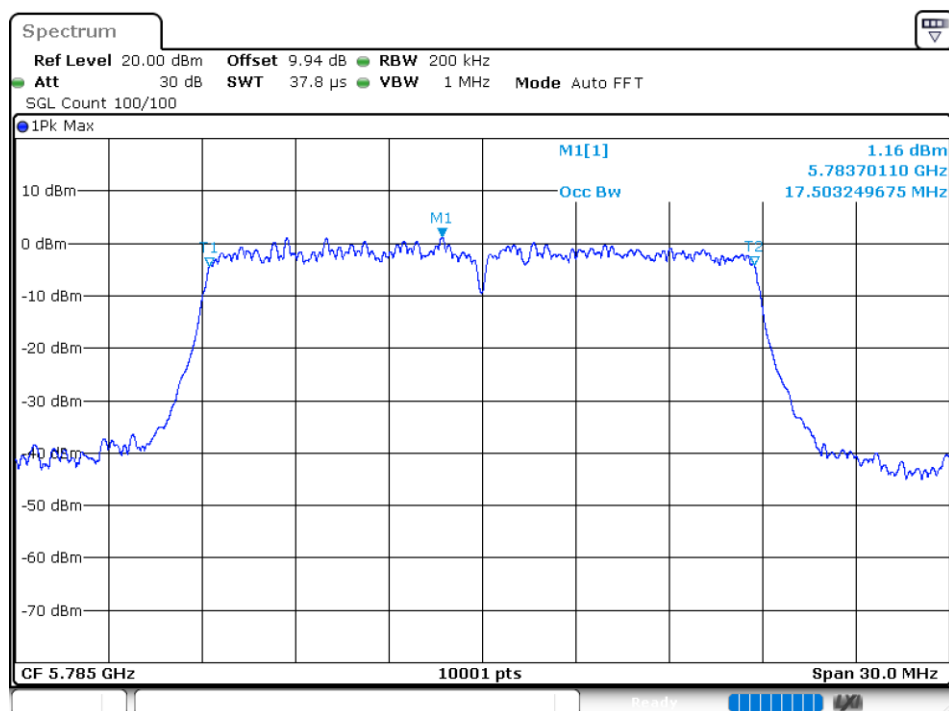


OBW NVNT n20 5825MHz Ant 1

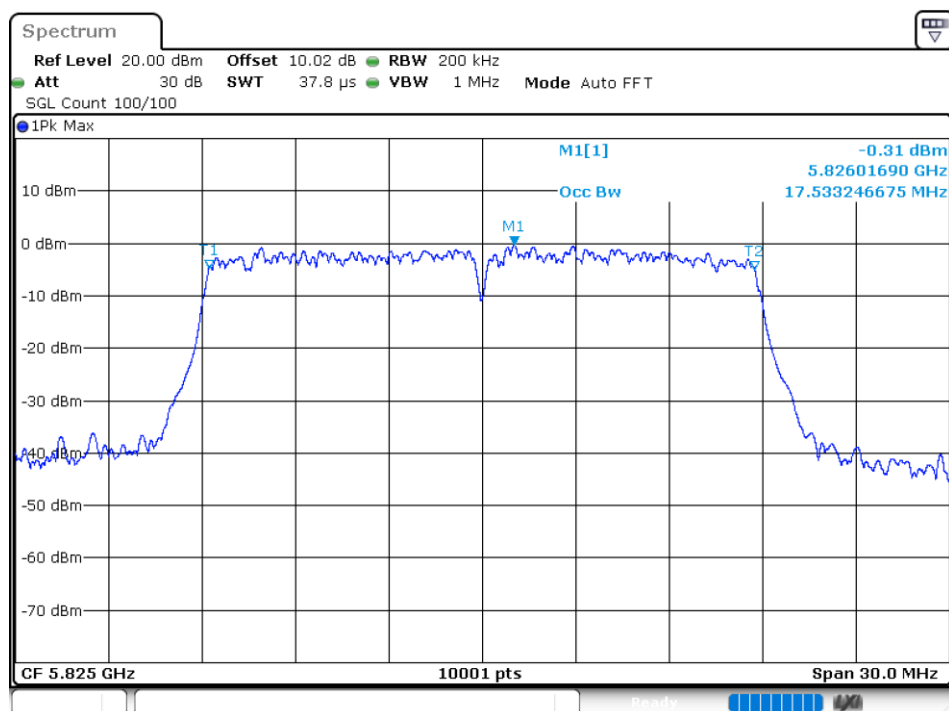


OBW NVNT n20 5745MHz Ant 2

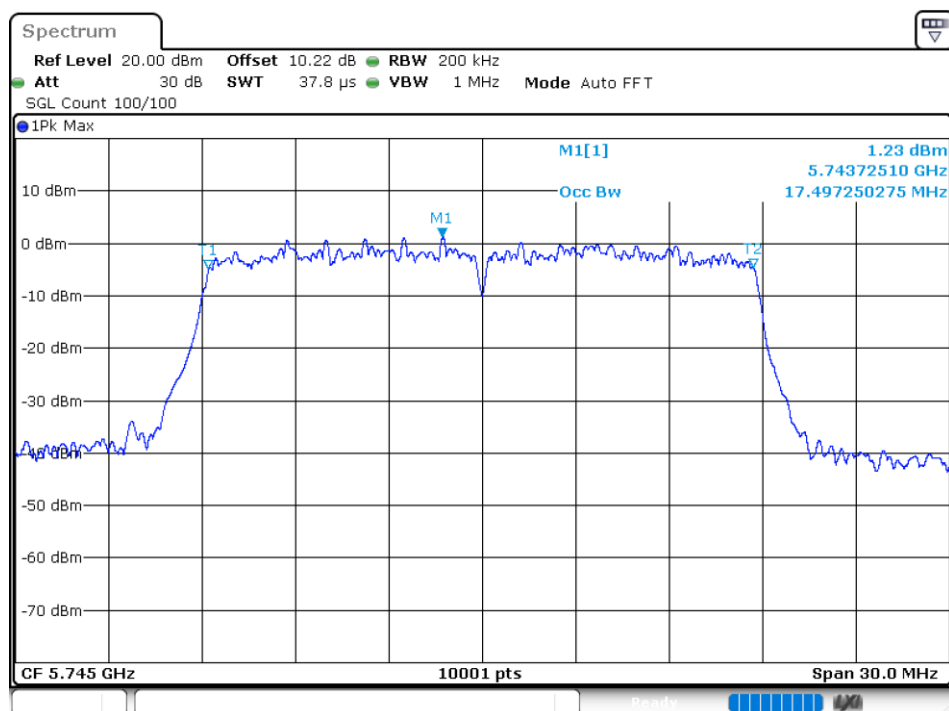


OBW NVNT n20 5785MHz Ant 2

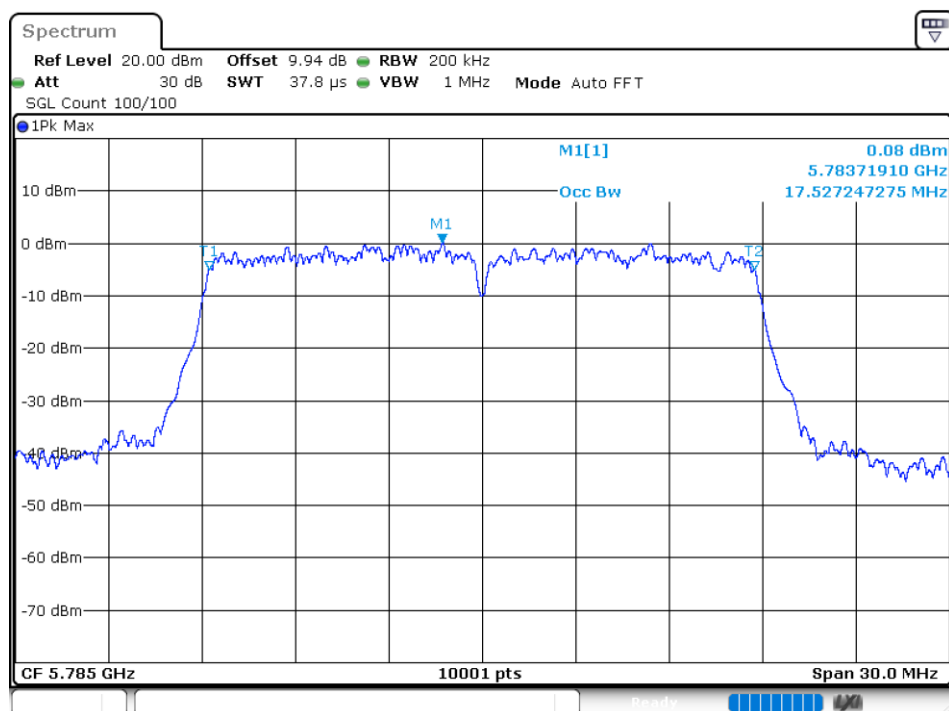


OBW NVNT n20 5825MHz Ant 2

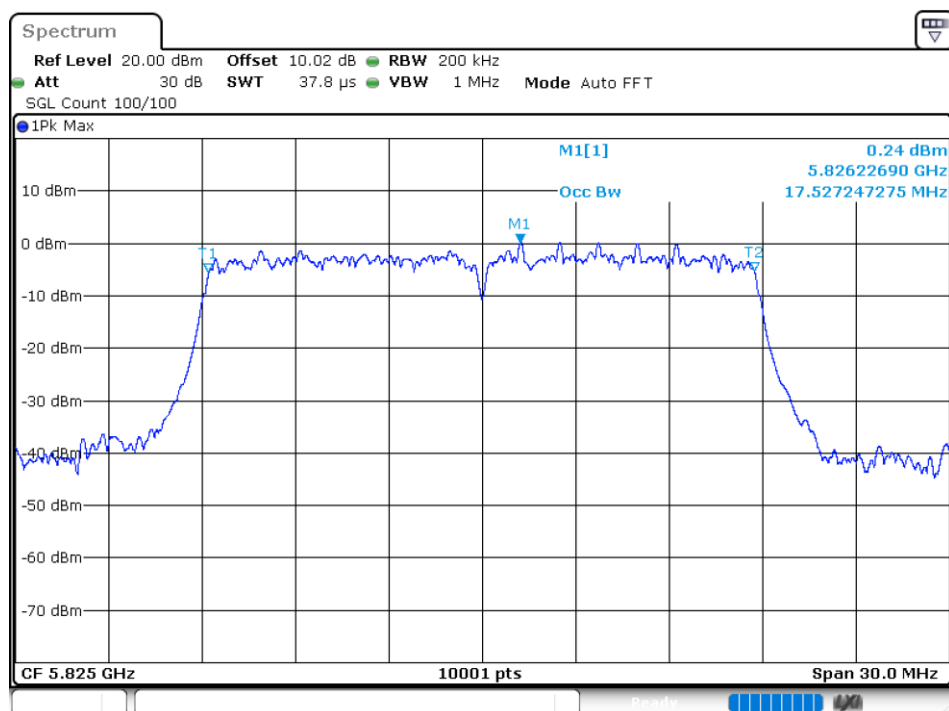


OBW NVNT n40 5755MHz Ant 1

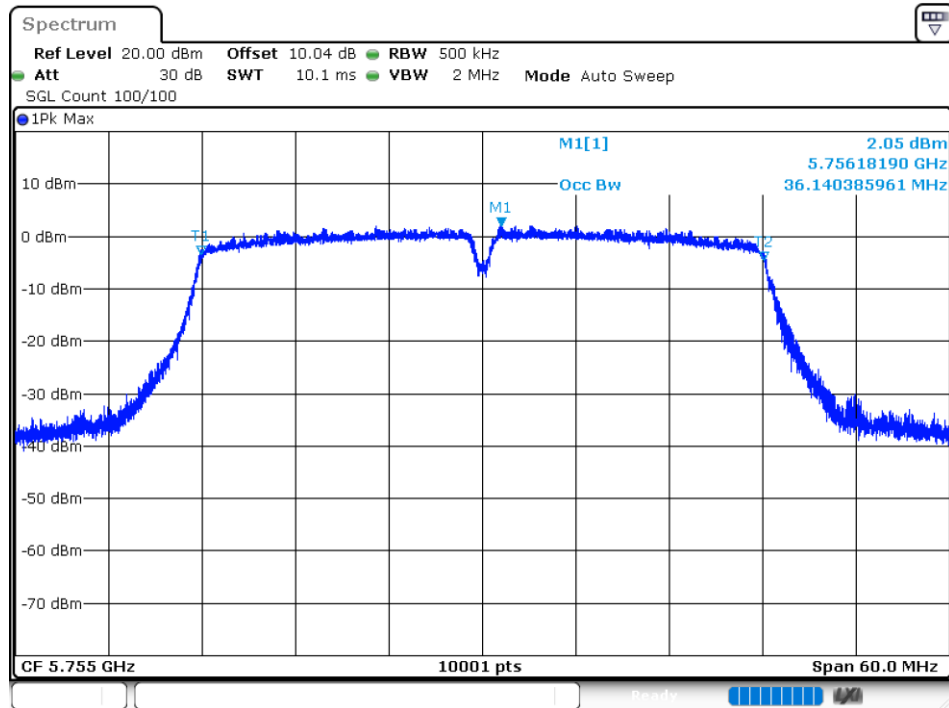


OBW NVNT n40 5795MHz Ant 1

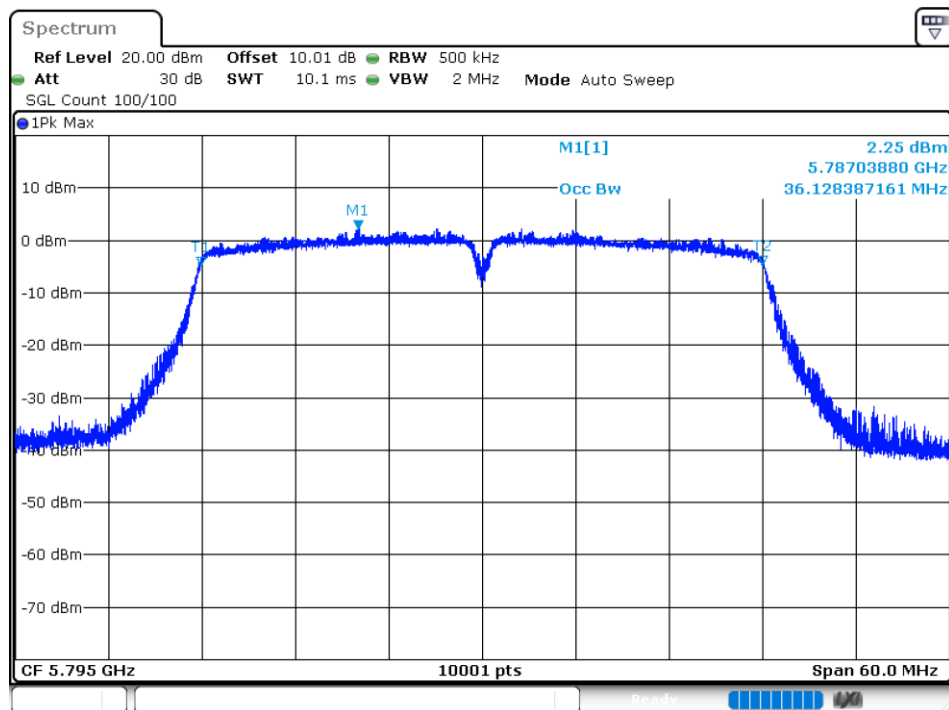

OBW NVNT n40 5755MHz Ant 2

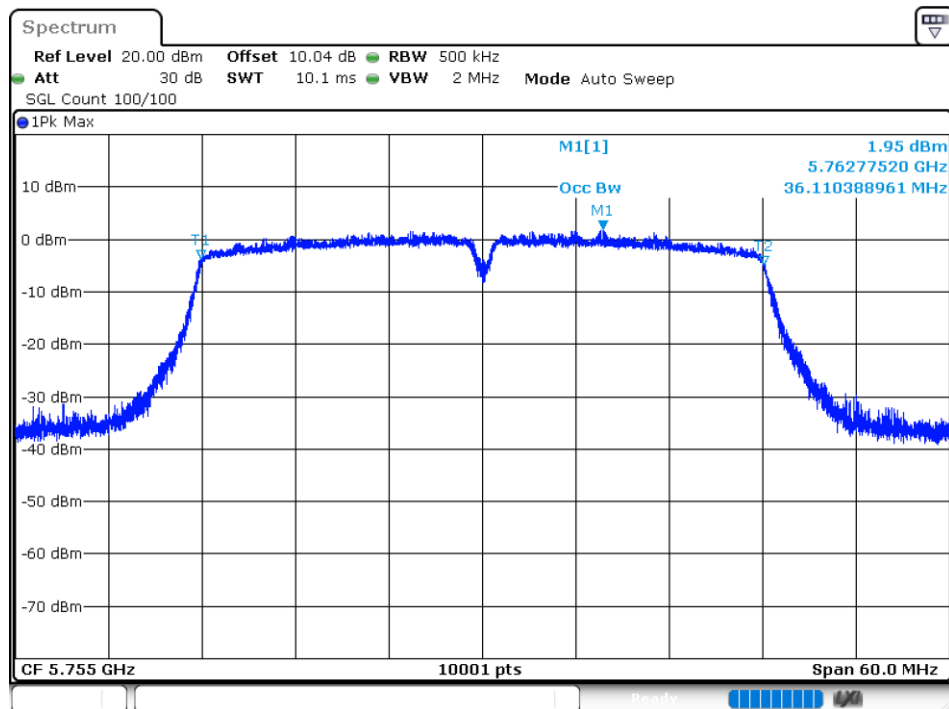


OBW NVNT n40 5795MHz Ant 2

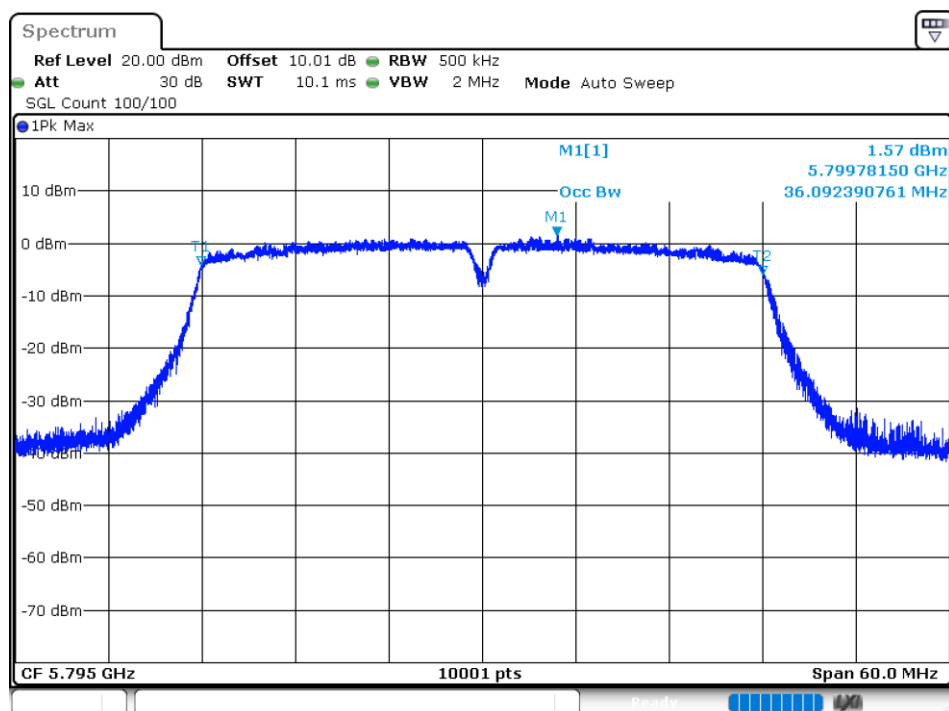


### Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm) | Duty Factor (dB) | Total PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|---------------------|------------------|-----------------|-------------|---------|
| NVNT      | a    | 5745            | Ant 1   | -4.64               | 0.32             | -4.32           | 30          | Pass    |
| NVNT      | a    | 5785            | Ant 1   | -4.56               | 0.3              | -4.26           | 30          | Pass    |
| NVNT      | a    | 5825            | Ant 1   | -5.3                | 0.33             | -4.97           | 30          | Pass    |
| NVNT      | a    | 5745            | Ant 2   | -5.35               | 0.3              | -5.05           | 30          | Pass    |
| NVNT      | a    | 5785            | Ant 2   | -5.6                | 0.3              | -5.3            | 30          | Pass    |
| NVNT      | a    | 5825            | Ant 2   | -5.47               | 0.29             | -5.18           | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant 1   | -4.87               | 0.43             | -4.44           | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant 1   | -6.04               | 0.37             | -5.67           | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant 1   | -5.87               | 0.38             | -5.49           | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant 2   | -6.03               | 0.38             | -5.65           | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant 2   | -5.41               | 0.39             | -5.02           | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant 2   | -6.45               | 0.37             | -6.08           | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant 1   | -9.03               | 0.72             | -8.31           | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant 1   | -10.67              | 0.74             | -9.93           | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant 2   | -10.79              | 0.73             | -10.06          | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant 2   | -10.38              | 0.75             | -9.63           | 30          | Pass    |
| NVNT      | ac80 | 5775            | Ant 1   | -18.07              | 1.36             | -16.71          | 30          | Pass    |
| NVNT      | ac80 | 5775            | Ant 2   | -18.61              | 1.36             | -17.25          | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant 1   | -4.81               | 0.35             | -4.46           | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant 1   | -5.31               | 0.32             | -4.99           | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant 1   | -5.63               | 0.33             | -5.3            | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant 2   | -5.09               | 0.32             | -4.77           | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant 2   | -6.05               | 0.33             | -5.72           | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant 2   | -5.81               | 0.33             | -5.48           | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant 1   | -10.35              | 0.65             | -9.7            | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant 1   | -8.99               | 0.65             | -8.34           | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant 2   | -11.43              | 0.67             | -10.76          | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant 2   | -9.93               | 0.65             | -9.28           | 30          | Pass    |


PSD NVNT a 5745MHz Ant 1

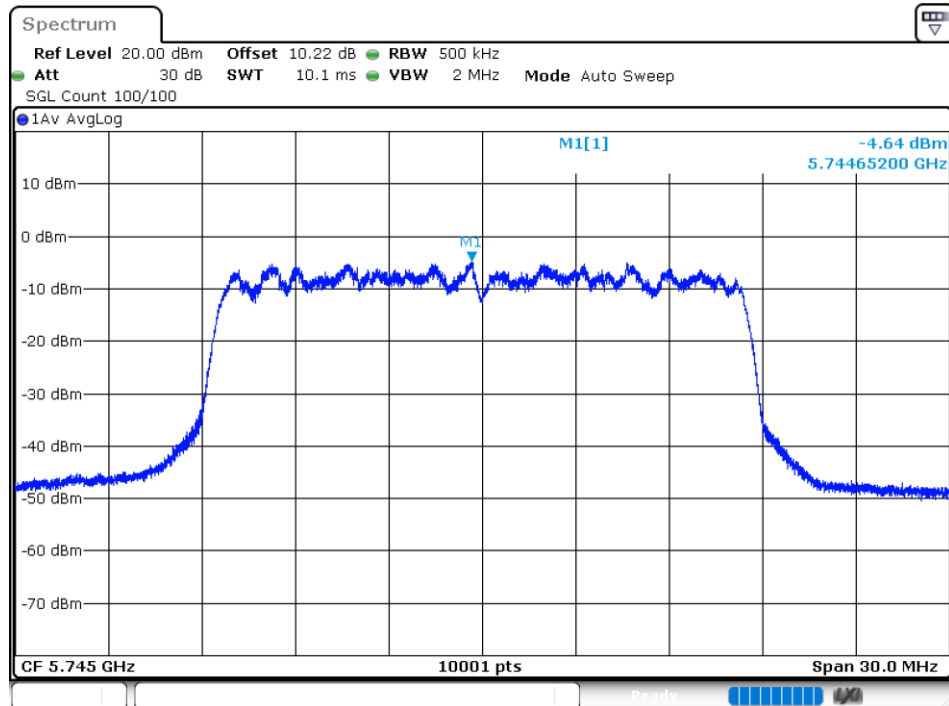


PSD NVNT a 5785MHz Ant 1

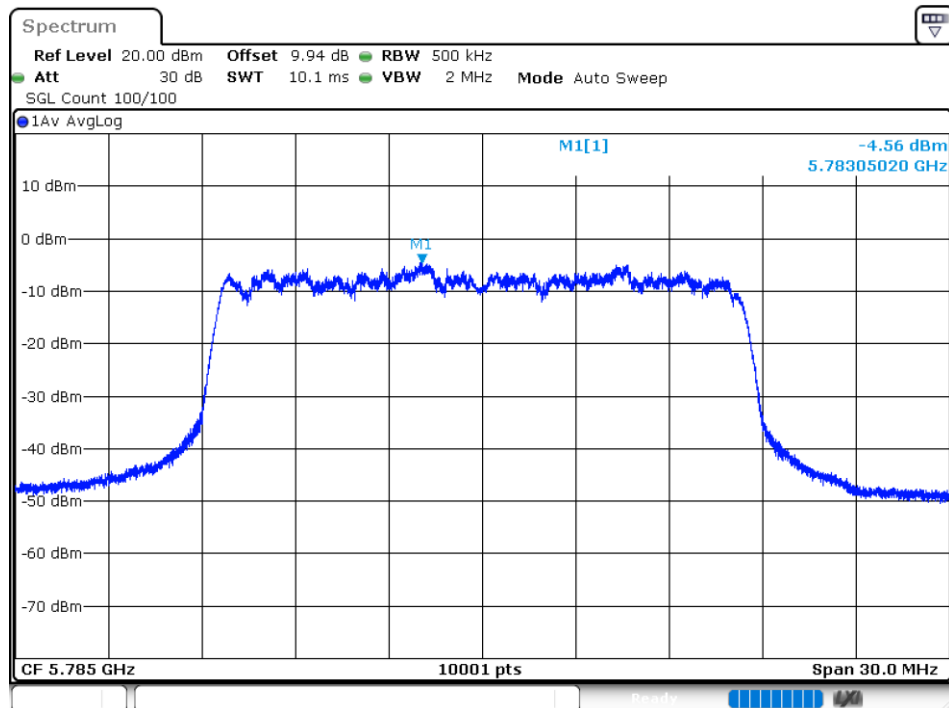


PSD NVNT a 5825MHz Ant 1

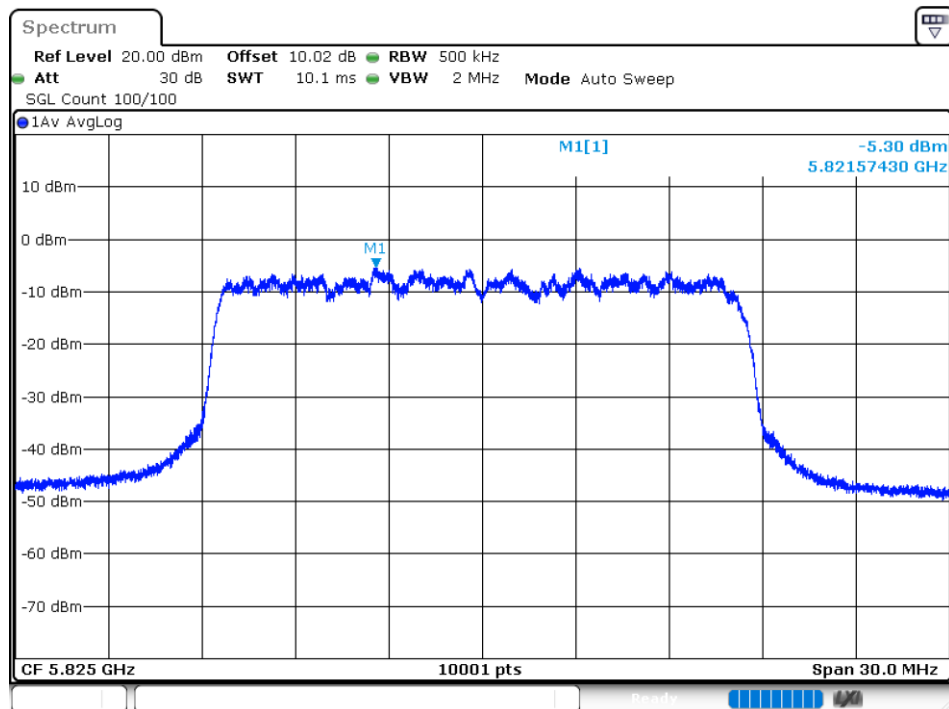


PSD NVNT a 5745MHz Ant 2

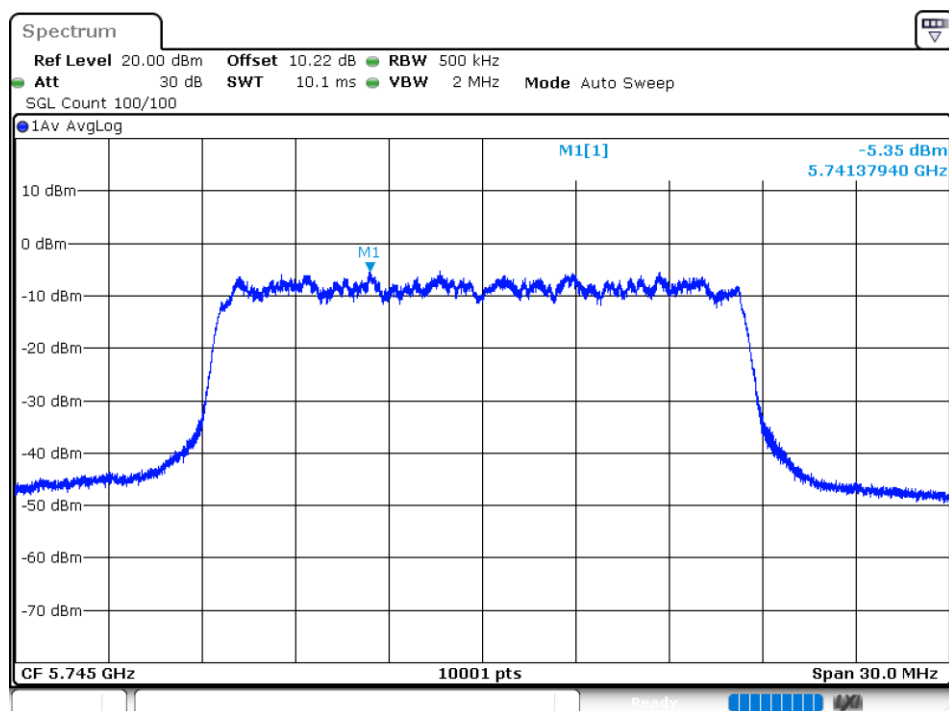


PSD NVNT a 5785MHz Ant 2

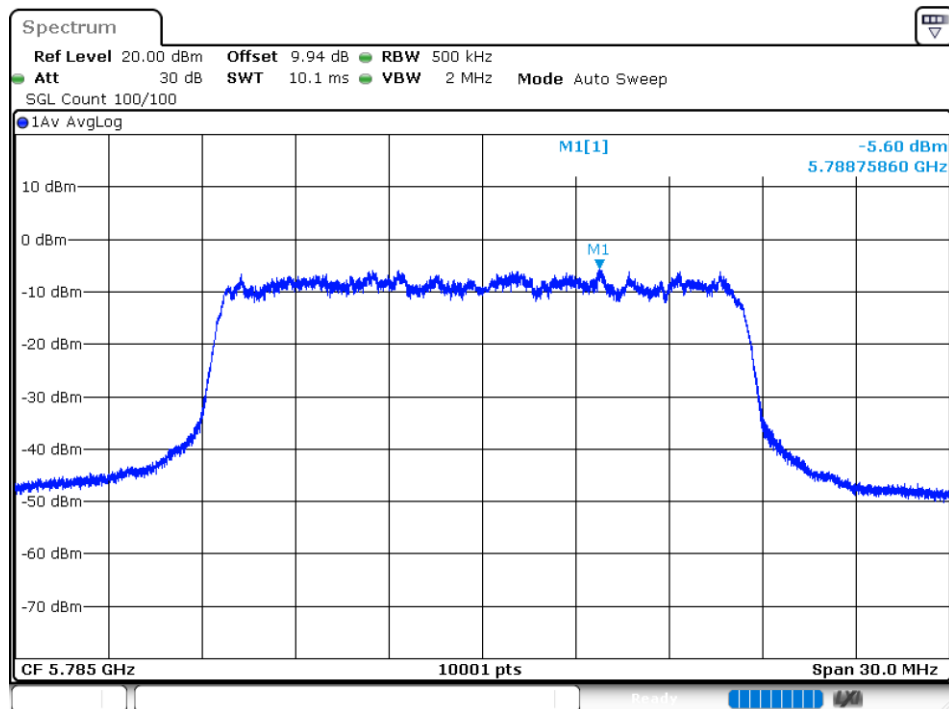


PSD NVNT a 5825MHz Ant 2

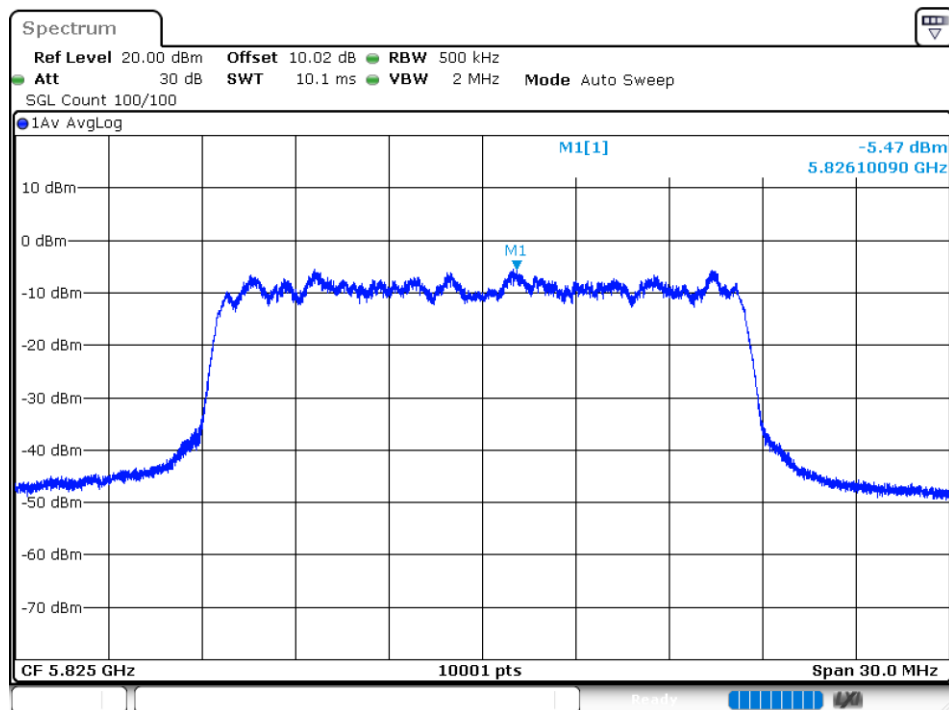


PSD NVNT ac20 5745MHz Ant 1

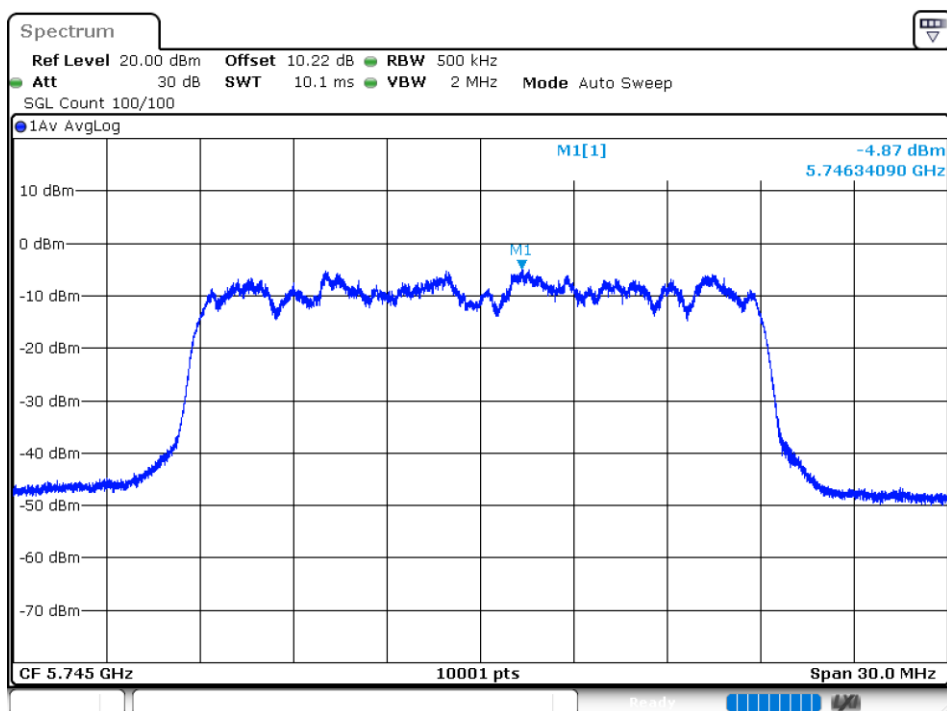


PSD NVNT ac20 5785MHz Ant 1

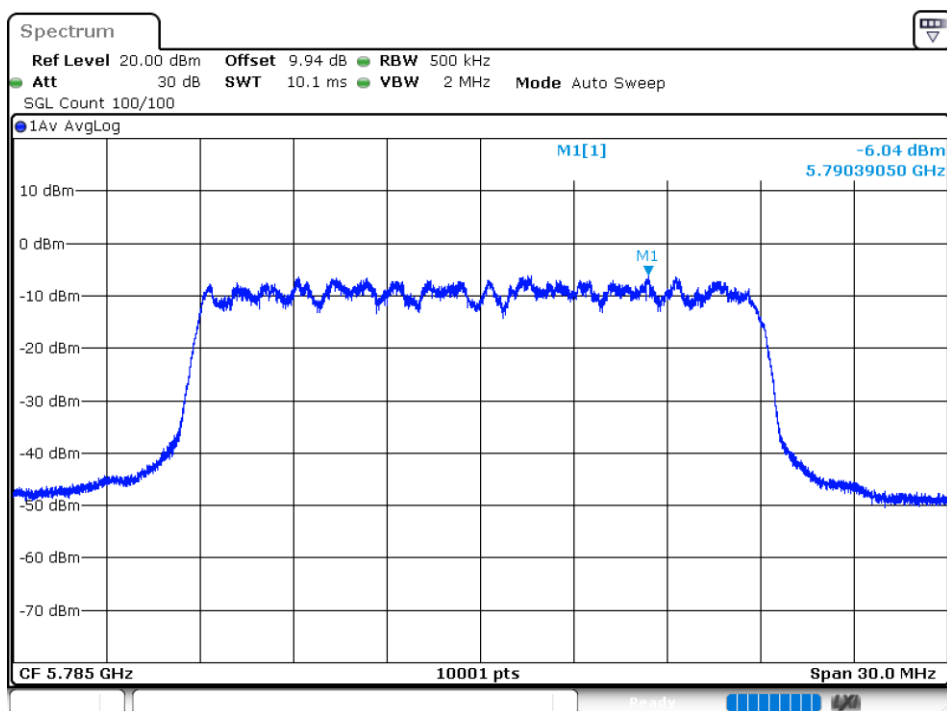


PSD NVNT ac20 5825MHz Ant 1

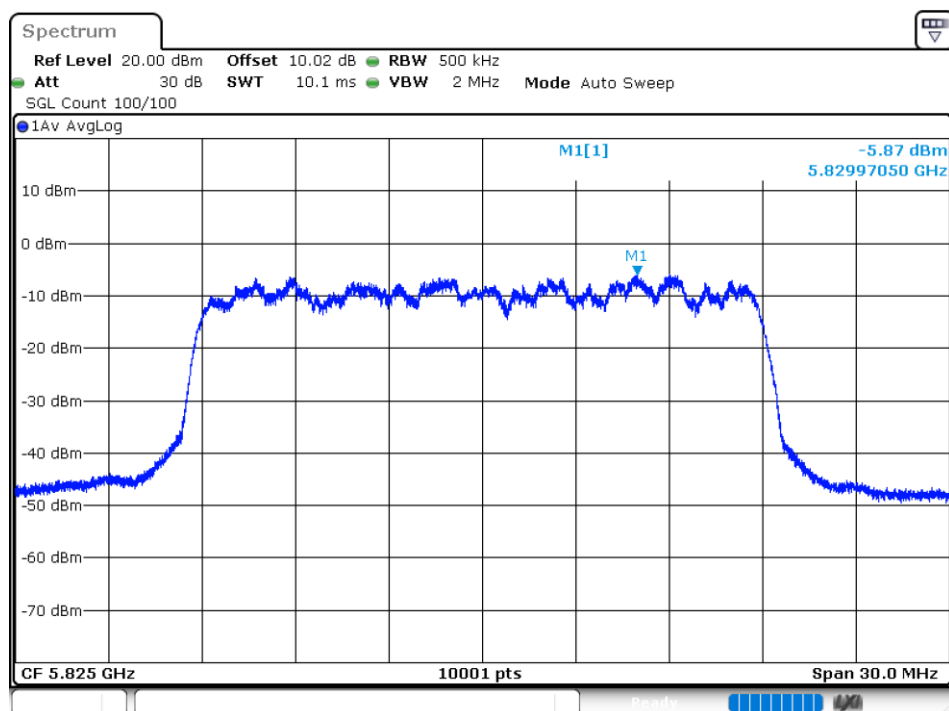


PSD NVNT ac20 5745MHz Ant 2

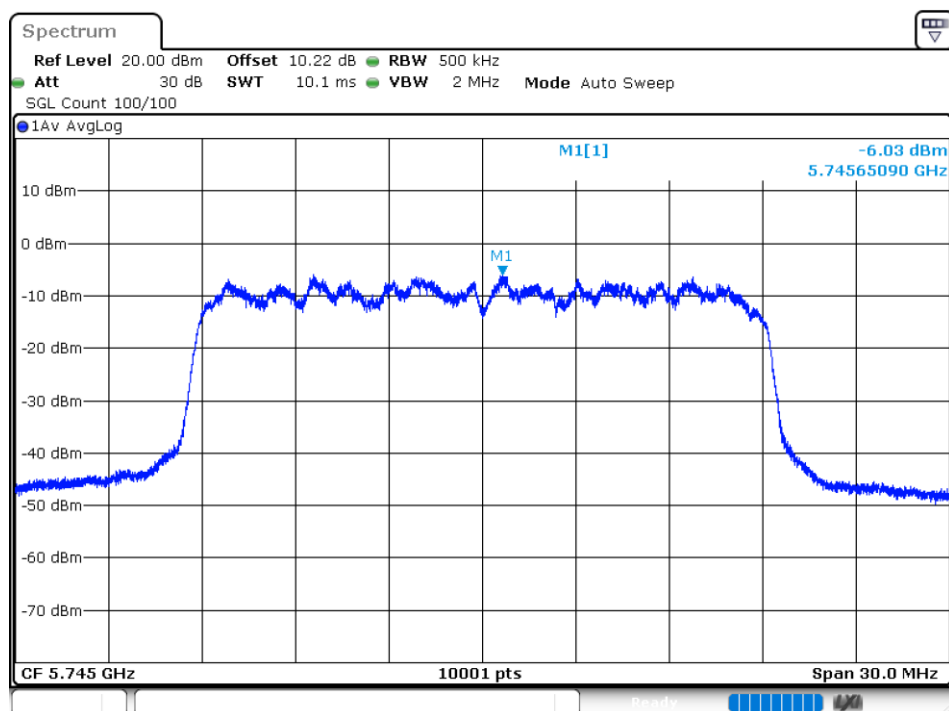


PSD NVNT ac20 5785MHz Ant 2

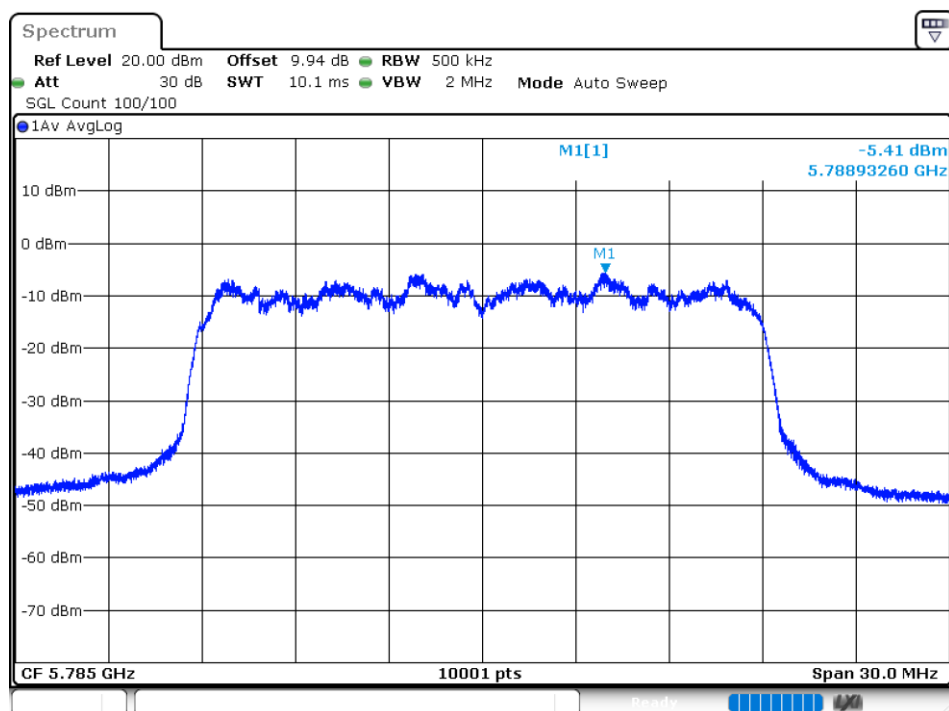


PSD NVNT ac20 5825MHz Ant 2

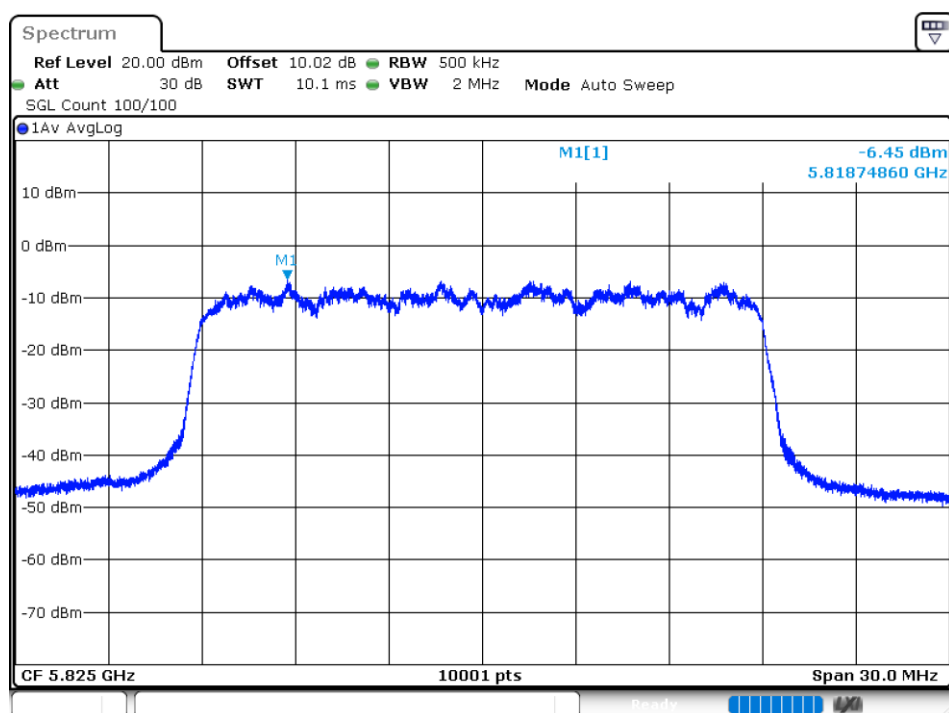


PSD NVNT ac40 5755MHz Ant 1

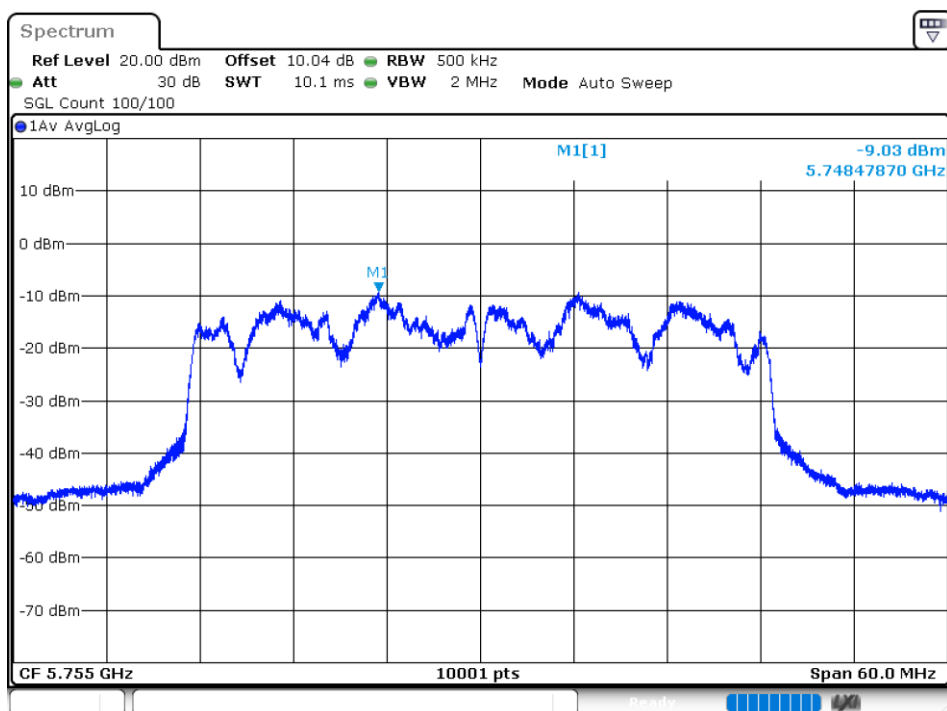


PSD NVNT ac40 5795MHz Ant 1

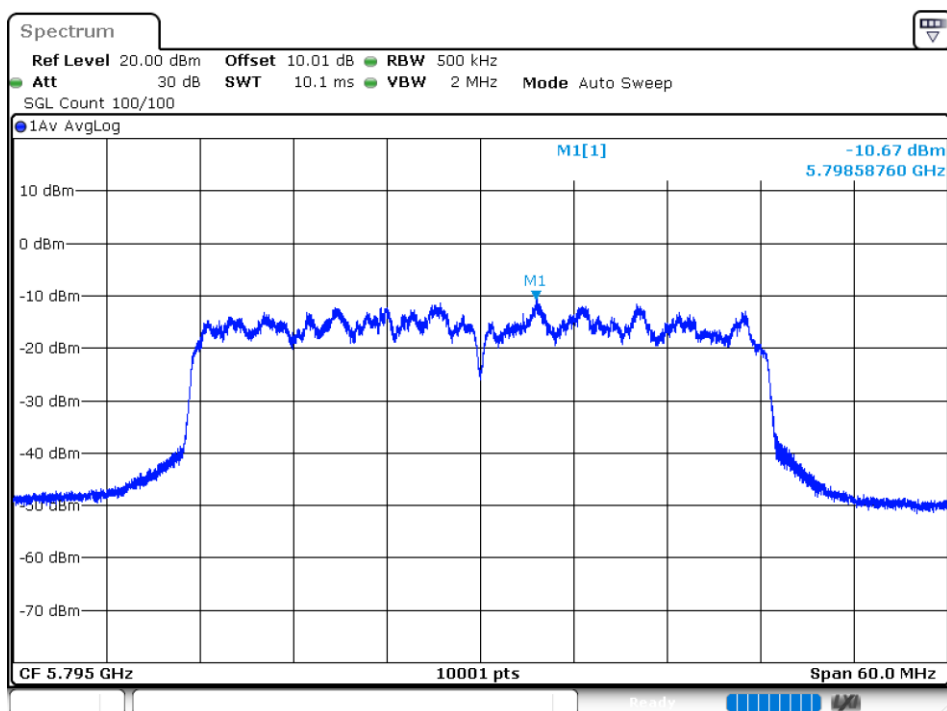


PSD NVNT ac40 5755MHz Ant 2

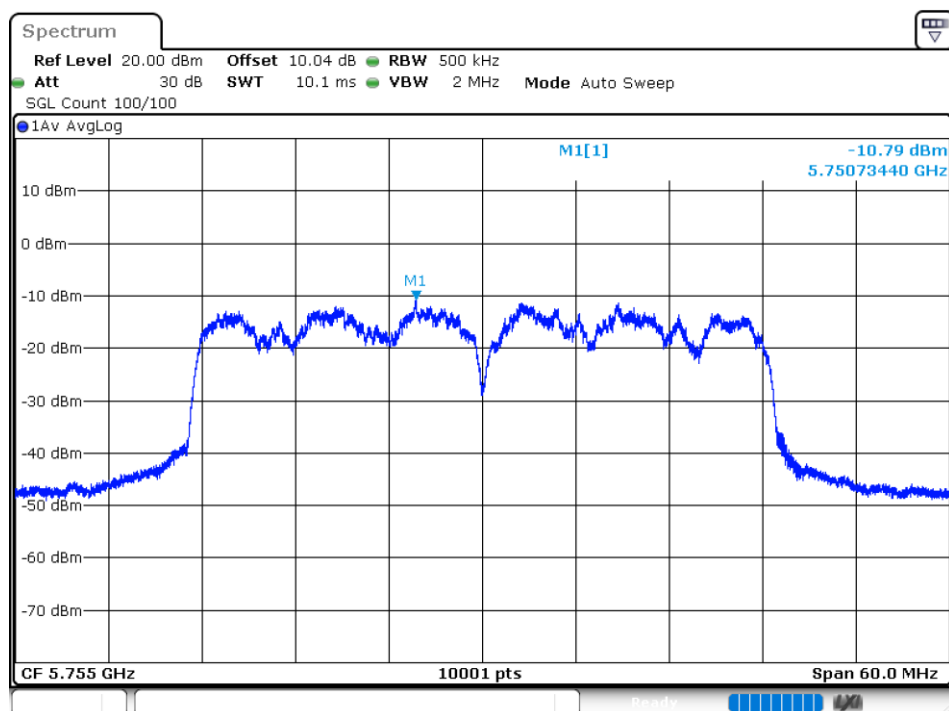


PSD NVNT ac40 5795MHz Ant 2

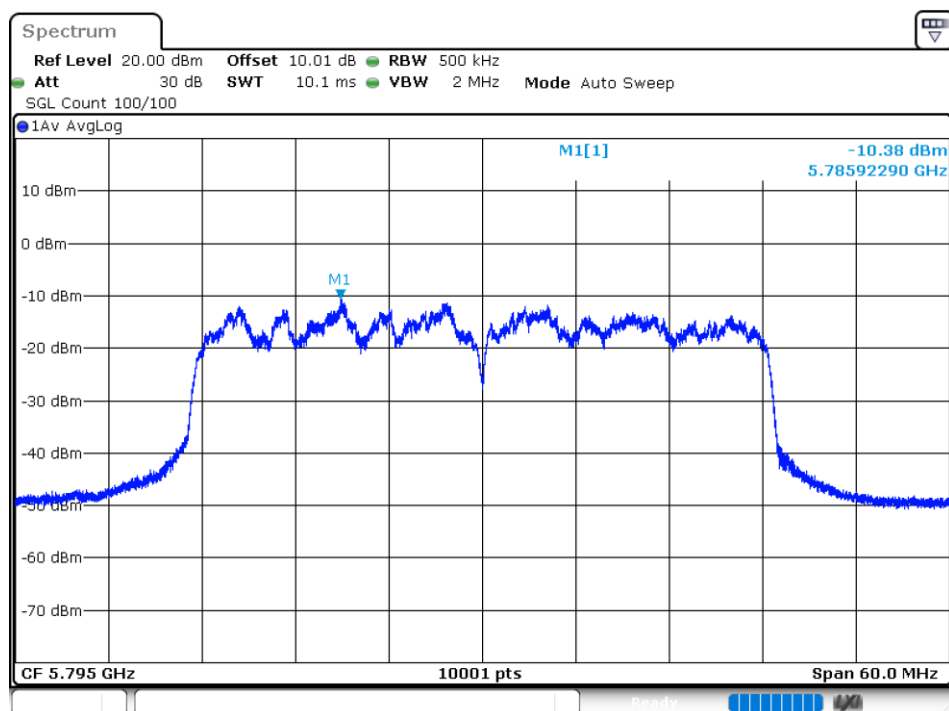


PSD NVNT ac80 5775MHz Ant 1

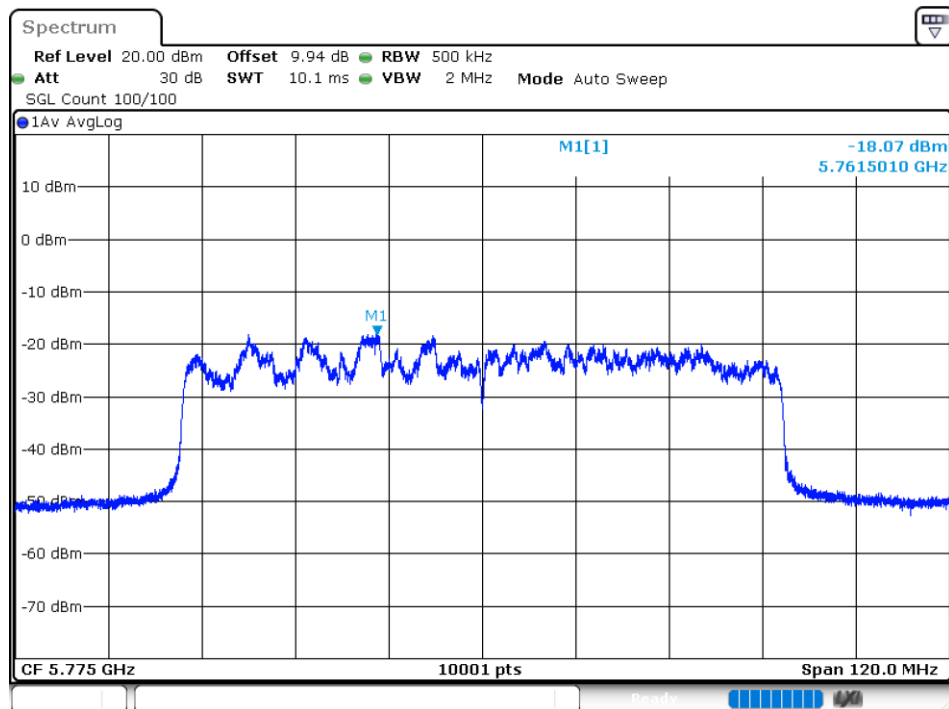


PSD NVNT ac80 5775MHz Ant 2

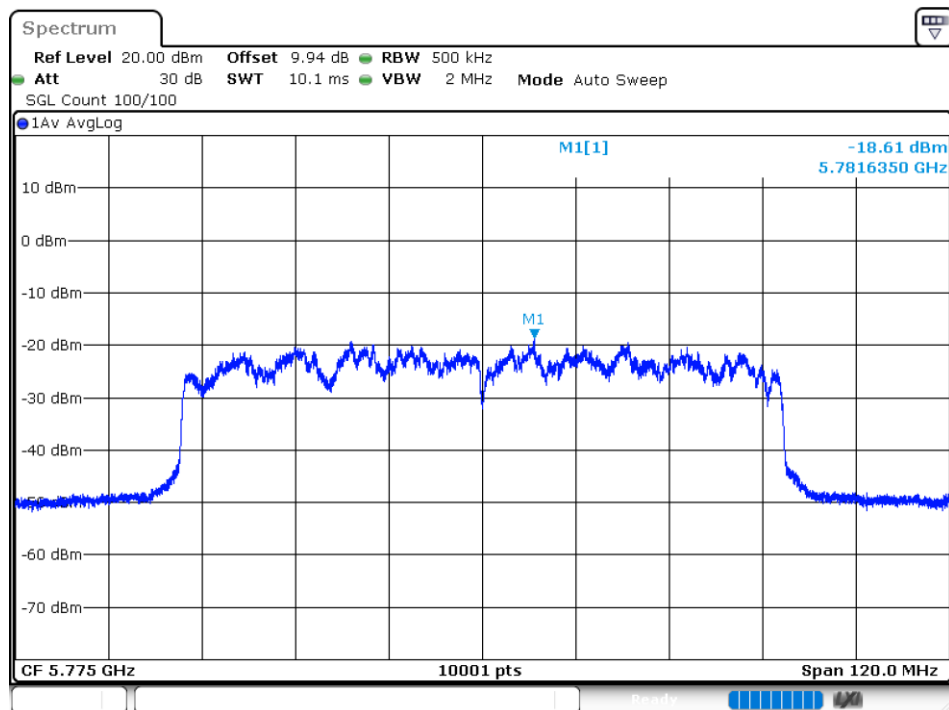


PSD NVNT n20 5745MHz Ant 1

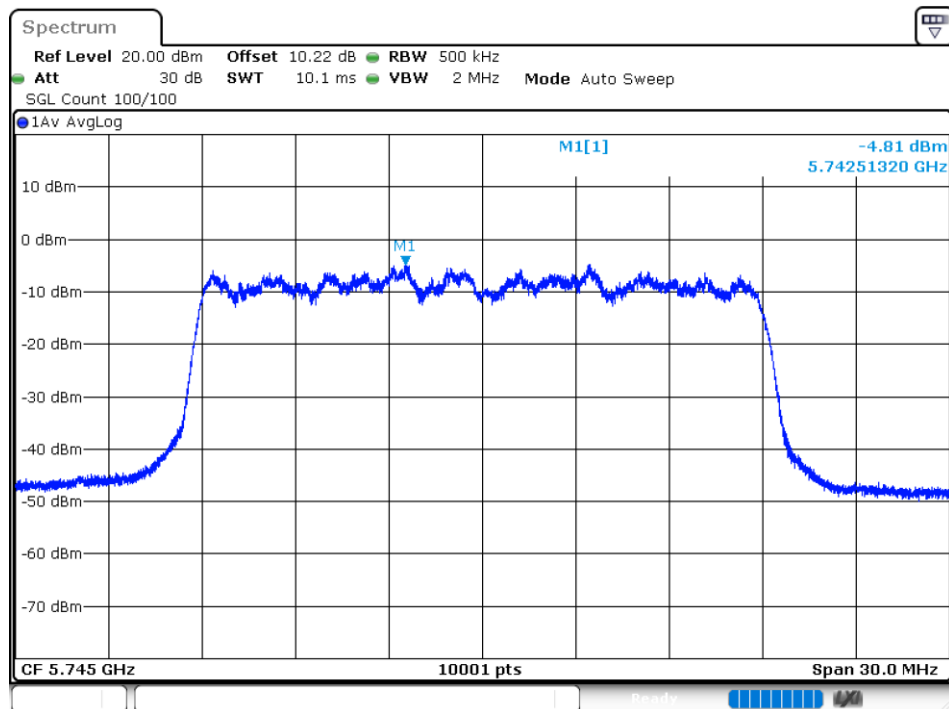


PSD NVNT n20 5785MHz Ant 1

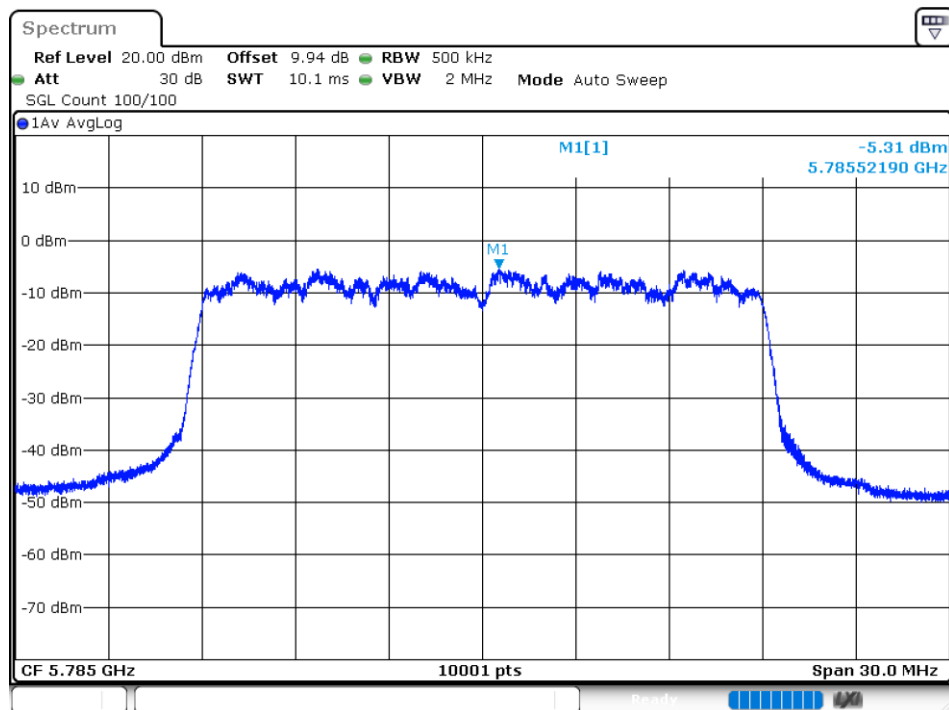


PSD NVNT n20 5825MHz Ant 1

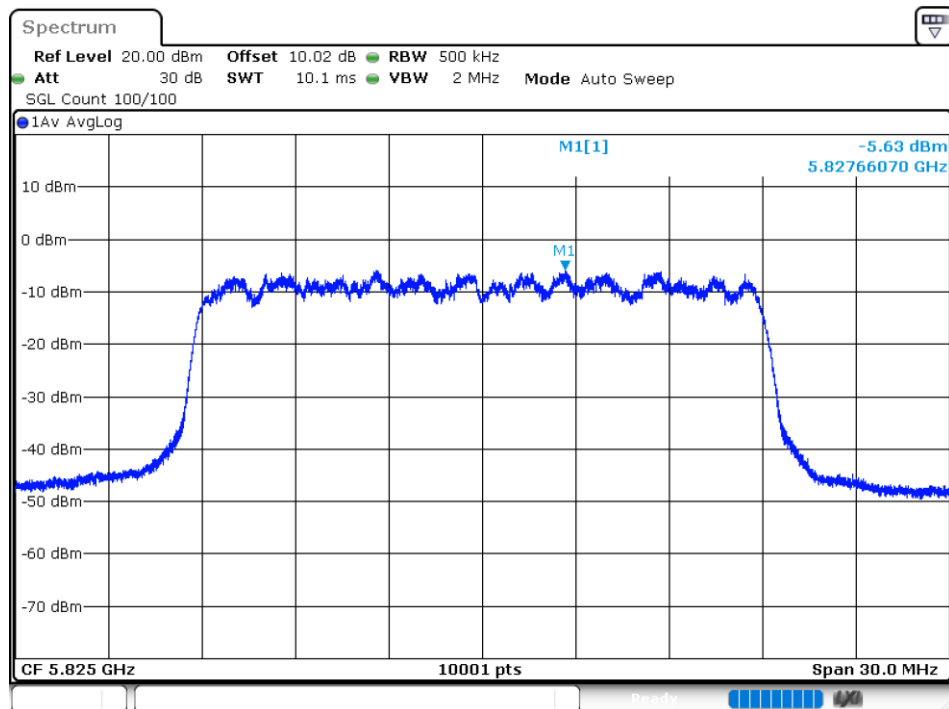


PSD NVNT n20 5745MHz Ant 2

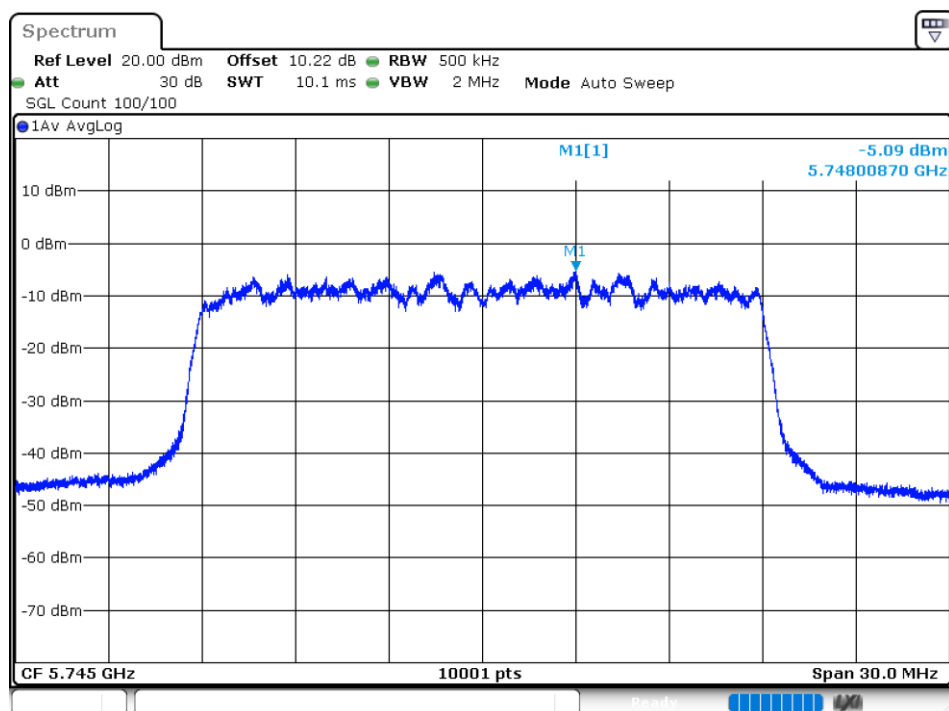


PSD NVNT n20 5785MHz Ant 2

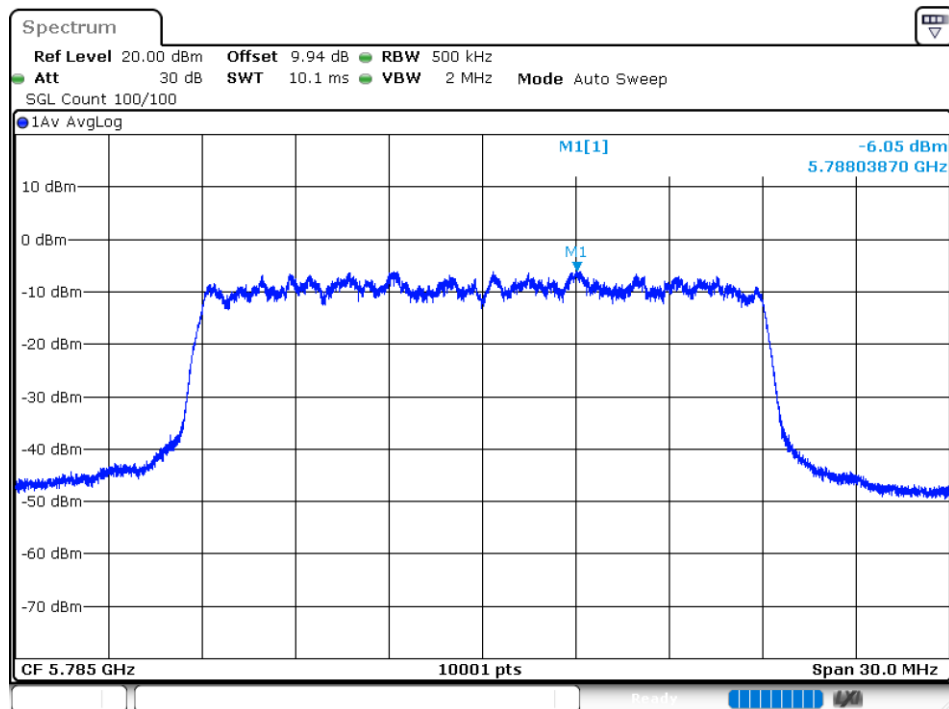


PSD NVNT n20 5825MHz Ant 2

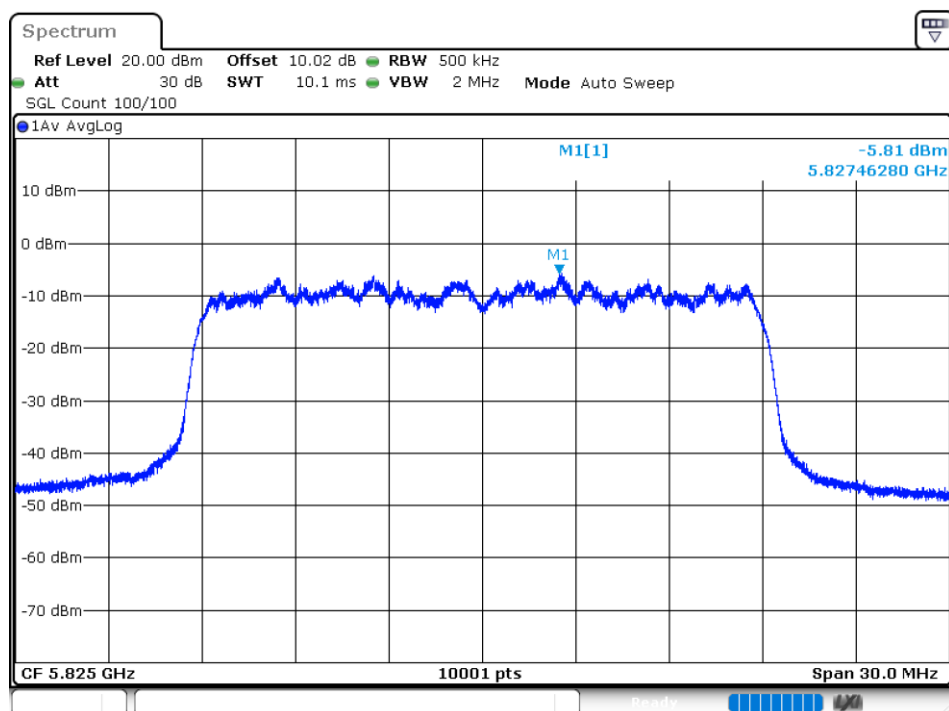


PSD NVNT n40 5755MHz Ant 1

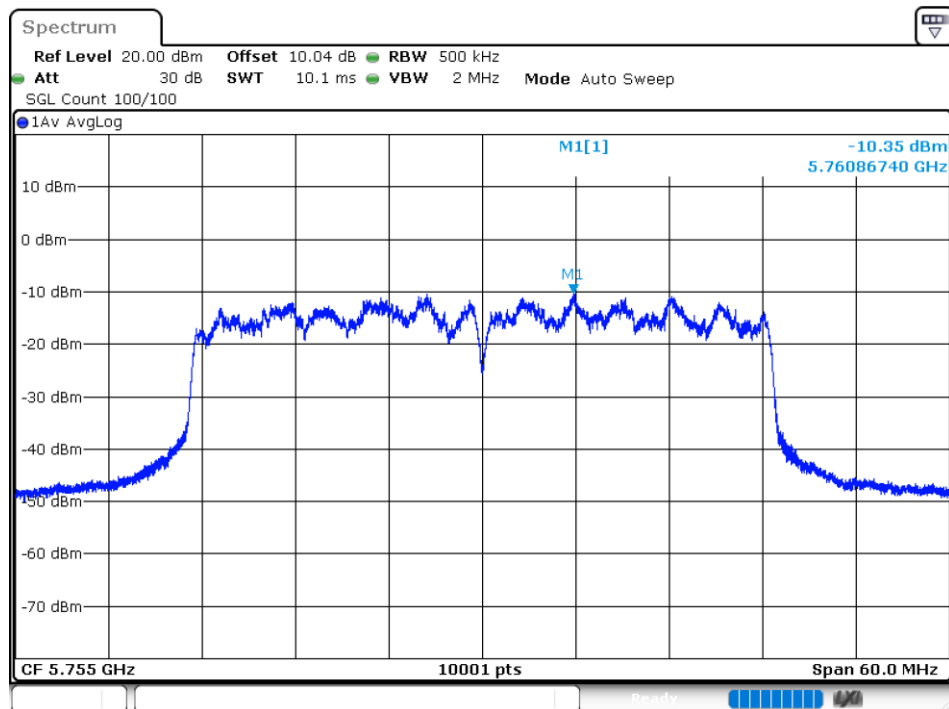


PSD NVNT n40 5795MHz Ant 1

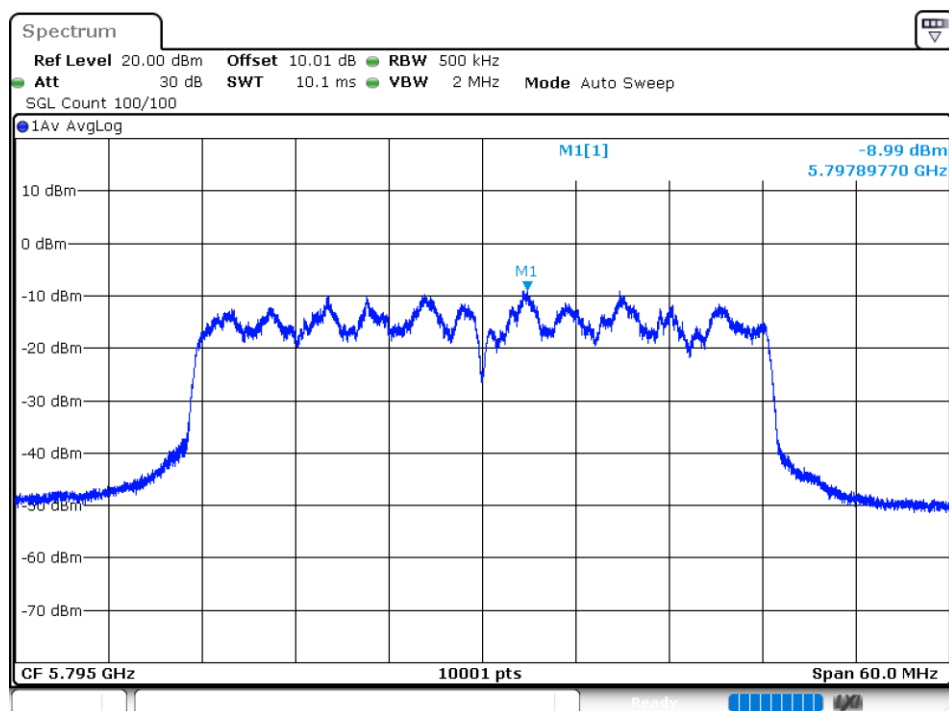

PSD NVNT n40 5755MHz Ant 2

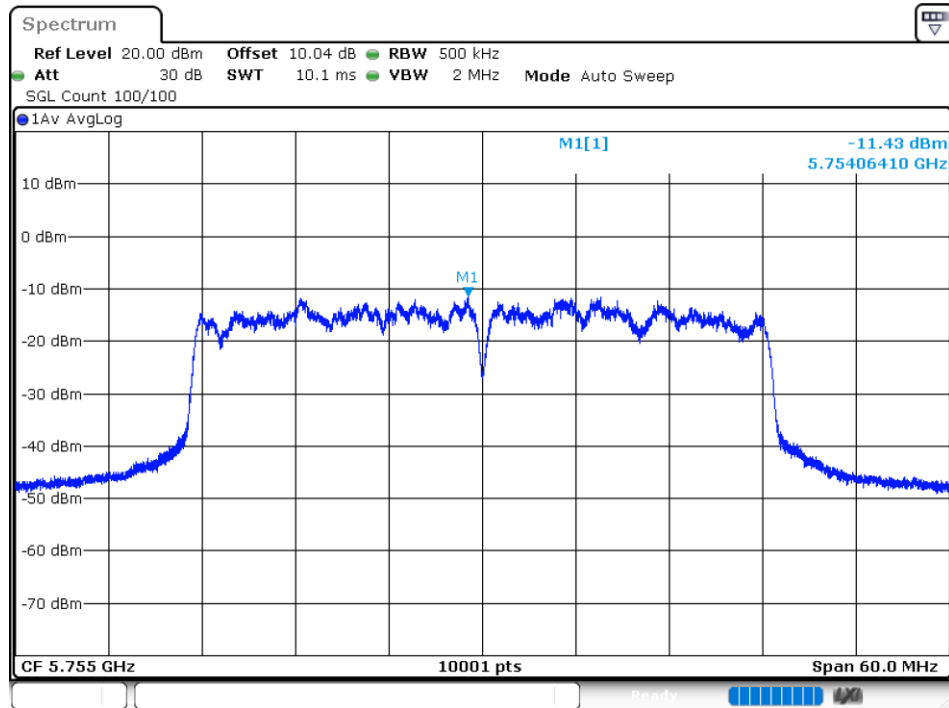


PSD NVNT n40 5795MHz Ant 2

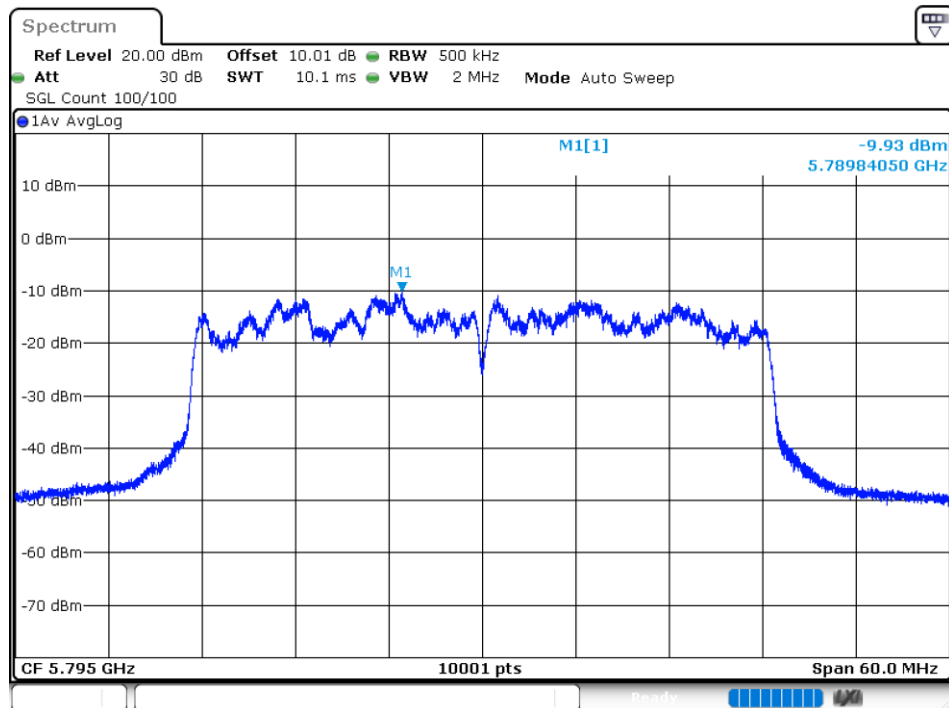


## Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | a    | 5745            | Ant 1   | -28.74          |             | Pass    |
| NVNT      | a    | 5825            | Ant 1   | -31.64          |             | Pass    |
| NVNT      | a    | 5745            | Ant 2   | -31.12          |             | Pass    |
| NVNT      | a    | 5825            | Ant 2   | -32.19          |             | Pass    |
| NVNT      | ac20 | 5745            | Ant 1   | -29.98          |             | Pass    |
| NVNT      | ac20 | 5825            | Ant 1   | -31.24          |             | Pass    |
| NVNT      | ac20 | 5745            | Ant 2   | -29.87          |             | Pass    |
| NVNT      | ac20 | 5825            | Ant 2   | -31.44          |             | Pass    |
| NVNT      | ac40 | 5755            | Ant 1   | -29.6           |             | Pass    |
| NVNT      | ac40 | 5795            | Ant 1   | -31.67          |             | Pass    |
| NVNT      | ac40 | 5755            | Ant 2   | -28.91          |             | Pass    |
| NVNT      | ac40 | 5795            | Ant 2   | -31.78          |             | Pass    |
| NVNT      | ac80 | 5775            | Ant 1   | -31.17          |             | Pass    |
| NVNT      | ac80 | 5775            | Ant 2   | -31.4           |             | Pass    |
| NVNT      | n20  | 5745            | Ant 1   | -30.82          |             | Pass    |
| NVNT      | n20  | 5825            | Ant 1   | -31.43          |             | Pass    |
| NVNT      | n20  | 5745            | Ant 2   | -30.68          |             | Pass    |
| NVNT      | n20  | 5825            | Ant 2   | -31.4           |             | Pass    |
| NVNT      | n40  | 5755            | Ant 1   | -30.17          |             | Pass    |
| NVNT      | n40  | 5795            | Ant 1   | -32.11          |             | Pass    |
| NVNT      | n40  | 5755            | Ant 2   | -27.99          |             | Pass    |
| NVNT      | n40  | 5795            | Ant 2   | -32.5           |             | Pass    |

### Band Edge NVNT a 5745MHz Low Ant 1

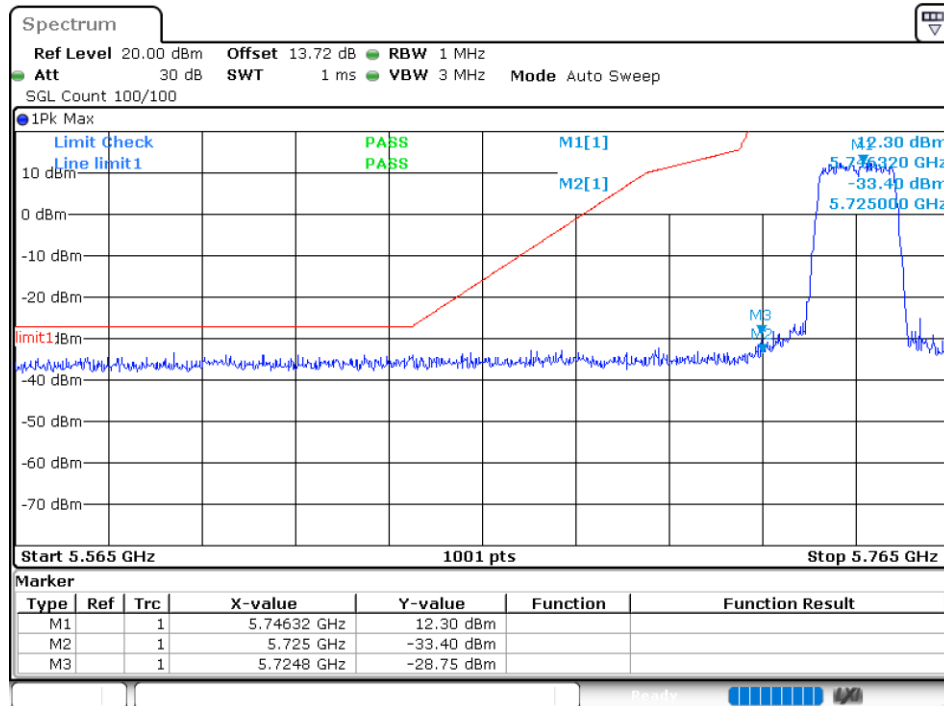

### Band Edge NVNT a 5825MHz High Ant 1

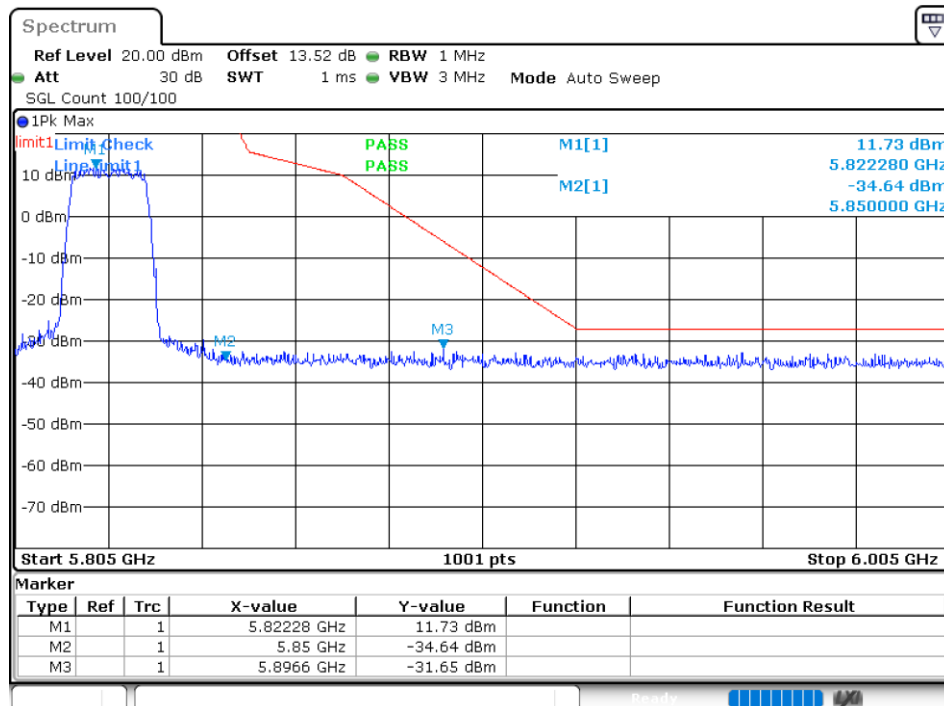

### Band Edge NVNT a 5745MHz Low Ant 2