

Appendix B

Test Information:

Serial No.:	3FMW-3	Test Date:	2026/01/12~2026/01/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	Fermin Fu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	20.2~21.7	Relative Humidity: (%)	40~43	ATM Pressure: (kPa)	101.4~101.6
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Minl-Clr circuits	Coaxial Power Splitters & Combiner	ZFRSC-183-S+	SF448201614	2025/02/25	2026/02/24
Micro-Coax	Coaxial Cable	UFB205A	323308-015	2025/06/01	2026/05/31
HUBER+SUHNER	Coaxial Attenuator	6610_SMA-50-1	0064	2025/06/06	2026/06/05
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM504	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101947	2025/07/28	2026/07/27
GLOBAL	TEMP&HUMI Test Chamber	BTH-150-40	30173	2025/08/01	2026/07/31
R&S	Wideband Radio Communication Tester	CMW500	144976	2025/08/01	2026/07/31
All-sun	Multimeter	EM305A	8348897	2025/08/18	2026/08/17
TDK-Lambda	DC Power Supply	Z+60-14	F-08-EM038-1	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Frequency stability vs. temperature &Frequency stability vs. voltage Compliance

FCC Part 22H

WCDMA Band 5

Mode	Test Channel (MHz)	Frequency Error		Limit (ppm)	Verdict
		(Hz)	(ppm)		
R99_Middle_TN/VN	836.6	-10.41	-0.0124	±2.5	Pass
R99_Middle_T1/VN	836.6	-3.92	-0.0047	±2.5	Pass
R99_Middle_T2/VN	836.6	-3.83	-0.0046	±2.5	Pass
R99_Middle_T3/VN	836.6	-8.59	-0.0103	±2.5	Pass
R99_Middle_T4/VN	836.6	-4.71	-0.0056	±2.5	Pass
R99_Middle_T5/VN	836.6	-6.66	-0.0080	±2.5	Pass
R99_Middle_T6/VN	836.6	-6.56	-0.0078	±2.5	Pass
R99_Middle_T7/VN	836.6	-10.41	-0.0124	±2.5	Pass
R99_Middle_T8/VN	836.6	-6.84	-0.0082	±2.5	Pass
R99_Middle_TN/VH	836.6	-7.94	-0.0095	±2.5	Pass
R99_Middle_TN/VL	836.6	-11.17	-0.0134	±2.5	Pass

Note:

Frequency Error (ppm)=Frequency Error (MHz)/Test Channel(MHz)*10⁶

TN: 20°C; T1: -30°C; T2: -20°C; T3: -10°C; T4: 0°C; T5: 10°C; T6: 30°C; T7: 40°C; T8: 50°C.

VN: Normal Voltage; VL: Low Voltage; VH: High Voltage.

FCC Part 24E & IC RSS-133

WCDMA Band 2

Mode	Result (MHz)	Limit (MHz)	Verdict
R99_Low_TN/VN	1850.305	1850	Pass
R99_Low_T1/VN	1850.315	1850	Pass
R99_Low_T2/VN	1850.325	1850	Pass
R99_Low_T3/VN	1850.315	1850	Pass
R99_Low_T4/VN	1850.305	1850	Pass
R99_Low_T5/VN	1850.315	1850	Pass
R99_Low_T6/VN	1850.315	1850	Pass
R99_Low_T7/VN	1850.325	1850	Pass
R99_Low_T8/VN	1850.325	1850	Pass
R99_Low_TN/VH	1850.305	1850	Pass
R99_Low_TN/VL	1850.305	1850	Pass
R99_High_TN/VN	1909.685	1910	Pass
R99_High_T1/VN	1909.685	1910	Pass
R99_High_T2/VN	1909.695	1910	Pass
R99_High_T3/VN	1909.685	1910	Pass
R99_High_T4/VN	1909.685	1910	Pass
R99_High_T5/VN	1909.685	1910	Pass
R99_High_T6/VN	1909.685	1910	Pass
R99_High_T7/VN	1909.695	1910	Pass
R99_High_T8/VN	1909.685	1910	Pass
R99_High_TN/VH	1909.695	1910	Pass
R99_High_TN/VL	1909.685	1910	Pass

Note:
TN: 20°C; T1: -30°C; T2: -20°C; T3: -10°C; T4: 0°C; T5: 10°C; T6: 30°C; T7: 40°C; T8: 50°C.
VN: Normal Voltage; VL: Low Voltage; VH: High Voltage.

FCC Part 27 & IC RSS-139

WCDMA Band 4

Mode	Result (MHz)	Limit (MHz)	Verdict
R99_Low_TN/VN	1710.305	1710	Pass
R99_Low_T1/VN	1710.305	1710	Pass
R99_Low_T2/VN	1710.315	1710	Pass
R99_Low_T3/VN	1710.305	1710	Pass
R99_Low_T4/VN	1710.295	1710	Pass
R99_Low_T5/VN	1710.315	1710	Pass
R99_Low_T6/VN	1710.305	1710	Pass
R99_Low_T7/VN	1710.315	1710	Pass
R99_Low_T8/VN	1710.315	1710	Pass
R99_Low_TN/VH	1710.315	1710	Pass
R99_Low_TN/VL	1710.325	1710	Pass
R99_High_TN/VN	1754.705	1755	Pass
R99_High_T1/VN	1754.695	1755	Pass
R99_High_T2/VN	1754.695	1755	Pass
R99_High_T3/VN	1754.675	1755	Pass
R99_High_T4/VN	1754.695	1755	Pass
R99_High_T5/VN	1754.695	1755	Pass
R99_High_T6/VN	1754.695	1755	Pass
R99_High_T7/VN	1754.695	1755	Pass
R99_High_T8/VN	1754.685	1755	Pass
R99_High_TN/VH	1754.695	1755	Pass
R99_High_TN/VL	1754.695	1755	Pass

Note:
TN: 20°C; T1: -30°C; T2: -20°C; T3: -10°C; T4: 0°C; T5: 10°C; T6: 30°C; T7: 40°C; T8: 50°C.
VN: Normal Voltage; VL: Low Voltage; VH: High Voltage.

IC RSS 132

WCDMA Band 5

Mode	Result (MHz)	Limit (MHz)	Verdict
R99_Low_TN/VN	824.315	824	Pass
R99_Low_T1/VN	824.305	824	Pass
R99_Low_T2/VN	824.315	824	Pass
R99_Low_T3/VN	824.315	824	Pass
R99_Low_T4/VN	824.295	824	Pass
R99_Low_T5/VN	824.305	824	Pass
R99_Low_T6/VN	824.315	824	Pass
R99_Low_T7/VN	824.315	824	Pass
R99_Low_T8/VN	824.305	824	Pass
R99_Low_TN/VH	824.305	824	Pass
R99_Low_TN/VL	824.315	824	Pass
R99_High_TN/VN	848.675	849	Pass
R99_High_T1/VN	848.675	849	Pass
R99_High_T2/VN	848.685	849	Pass
R99_High_T3/VN	848.675	849	Pass
R99_High_T4/VN	848.685	849	Pass
R99_High_T5/VN	848.675	849	Pass
R99_High_T6/VN	848.685	849	Pass
R99_High_T7/VN	848.695	849	Pass
R99_High_T8/VN	848.685	849	Pass
R99_High_TN/VH	848.695	849	Pass
R99_High_TN/VL	848.695	849	Pass

Note:
TN: 20°C; T1: -30°C; T2: -20°C; T3: -10°C; T4: 0°C; T5: 10°C; T6: 30°C; T7: 40°C; T8: 50°C.
VN: Normal Voltage; VL: Low Voltage; VH: High Voltage.

Occupied Bandwidth


FCC Part 22H & IC RSS-132

WCDMA Band 5, Normal

Mode	99% OBW (MHz)	26dB BW (MHz)
R99_Low	4.190	4.735
R99_Middle	4.170	4.715
R99_High	4.180	4.735
HSDPA_Low_Subtest1	4.200	4.715
HSDPA_Middle_Subtest1	4.180	4.745
HSDPA_High_Subtest1	4.190	4.715
HSUPA_Low_Subtest1	4.190	4.735
HSUPA_Middle_Subtest1	4.170	4.725
HSUPA_High_Subtest1	4.190	4.705


WCDMA Band 5, Normal

R99_Low

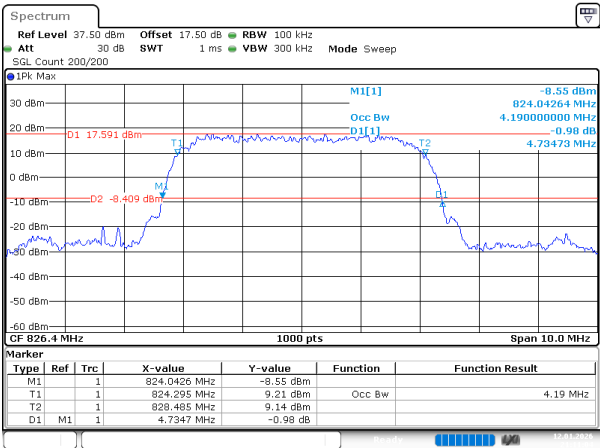


ProjectNo.:2602P27730E-RF Tester:Permin Fu
Date: 12.JAN.2026 21:11:04

R99_Middle

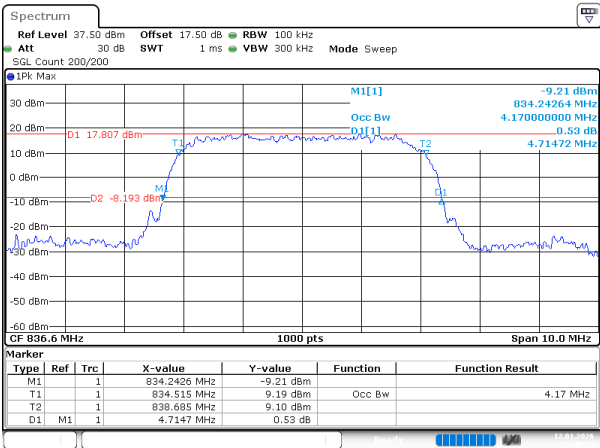


ProjectNo.:2602P27730E-RF Tester:Permin Fu
Date: 12.JAN.2026 22:49:55

R99_High

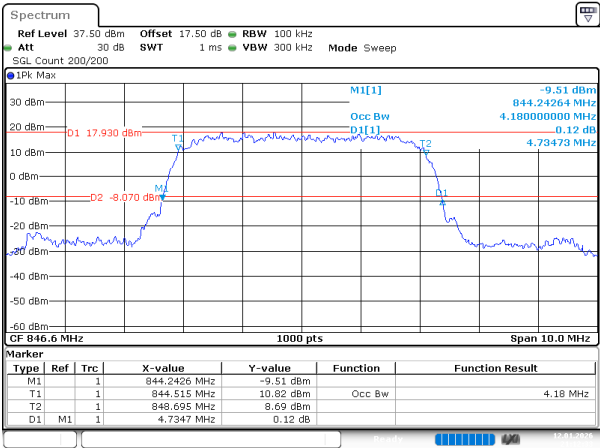


ProjectNo.:2602P27730E-RF Tester:Permin Fu
Date: 12.JAN.2026 21:12:34

HSDPA_Low_Subtest1

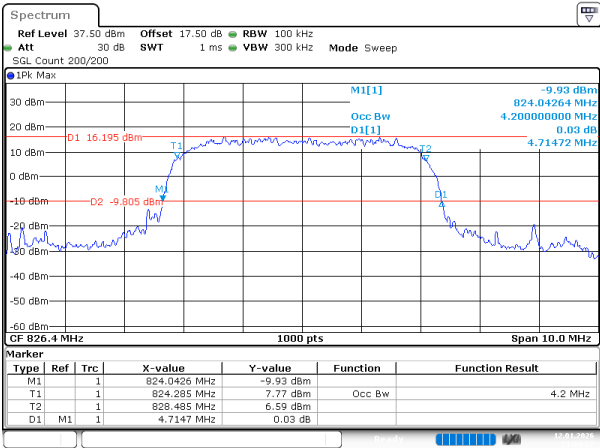


ProjectNo.:2602P27730E-RF Tester:Permin Fu
Date: 12.JAN.2026 21:34:27

HSDPA_Middle_Subtest1

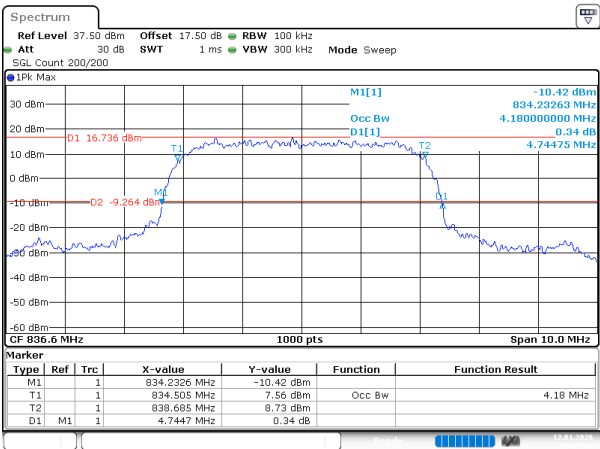


ProjectNo.:2602P27730E-RF Tester:Permin Fu
Date: 12.JAN.2026 21:37:14

HSDPA_High_Subtest1

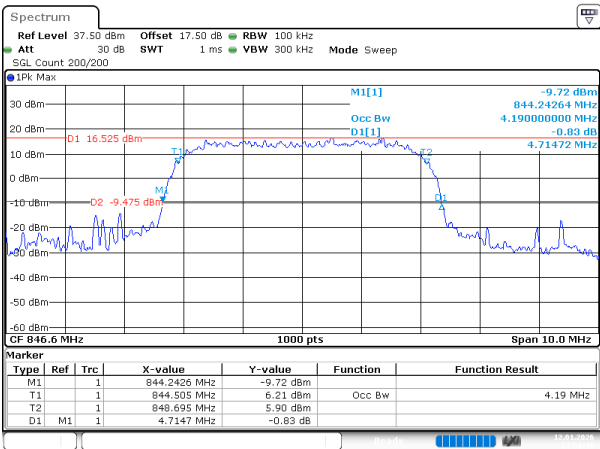


ProjectNo.:2602P27730E-RF Tester:Permin Fu
Date: 12.JAN.2026 21:51:18

HSUPA_Low_Subtest1

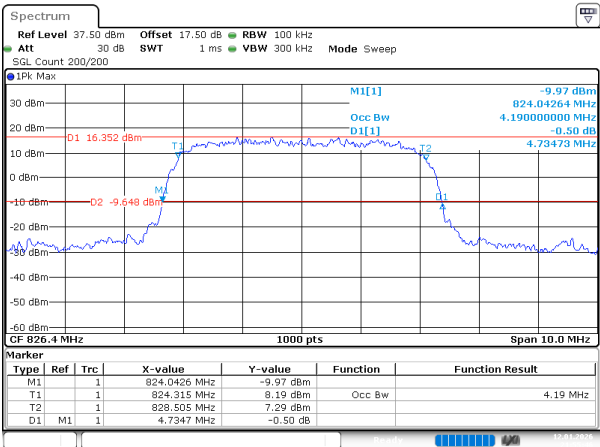


ProjectNo.:2602P27730E-RF Tester:Permin Pu
Date: 12.JAN.2026 21:55:46

HSUPA_Middle_Subtest1

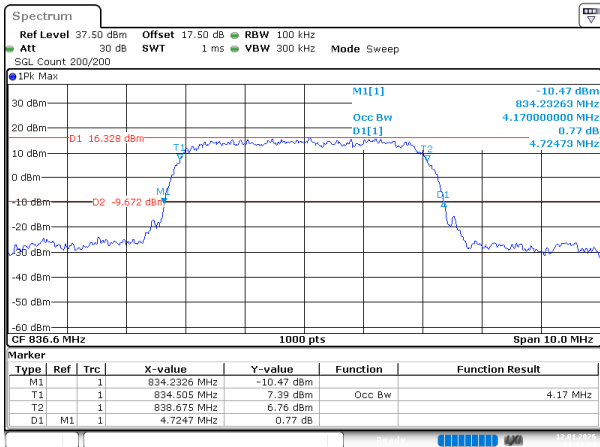

ProjectNo.:2602P27730E-RF Tester:Permin Pu
Date: 12.JAN.2026 21:57:24

HSUPA_High_Subtest1

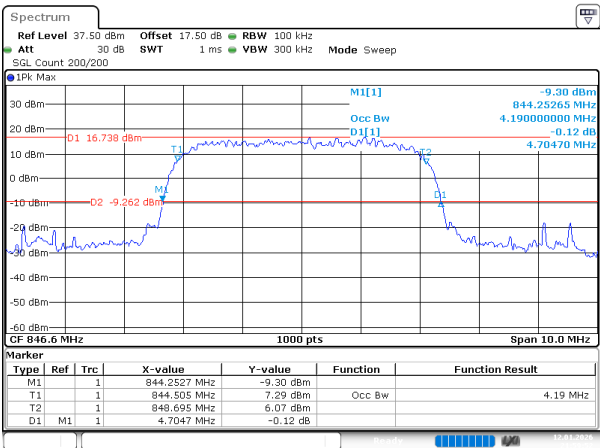

ProjectNo.:2602P27730E-RF Tester:Permin Pu
Date: 12.JAN.2026 21:59:53


FCC Part 24E & IC RSS-133

WCDMA Band 2, Normal


Mode	99% OBW (MHz)	26dB BW (MHz)
R99_Low	4.190	4.745
R99_Middle	4.180	4.735
R99_High	4.170	4.745
HSDPA_Low_Subtest1	4.190	4.745
HSDPA_Middle_Subtest1	4.180	4.715
HSDPA_High_Subtest1	4.170	4.725
HSUPA_Low_Subtest1	4.170	4.725
HSUPA_Middle_Subtest1	4.190	4.725
HSUPA_High_Subtest1	4.180	4.725

WCDMA Band 2, Normal


R99_Low

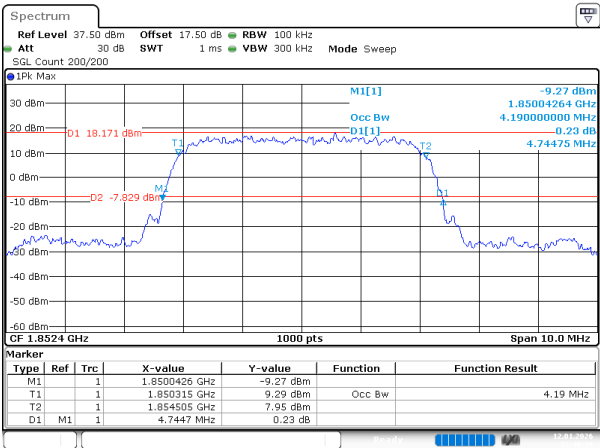


R99_Middle

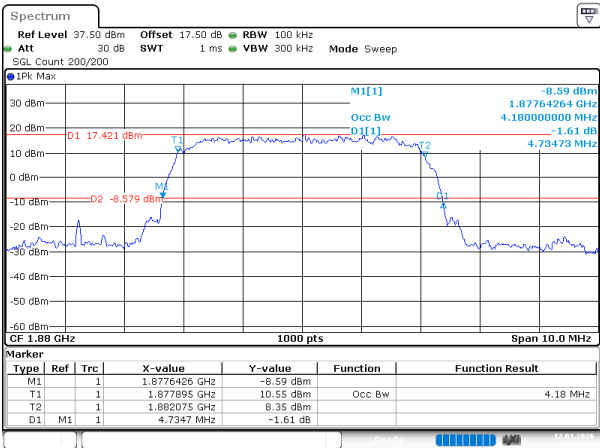


R99_High

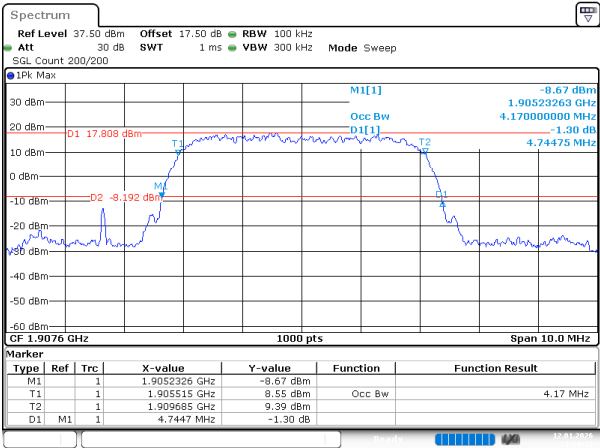


HSDPA_Low_Subtest1

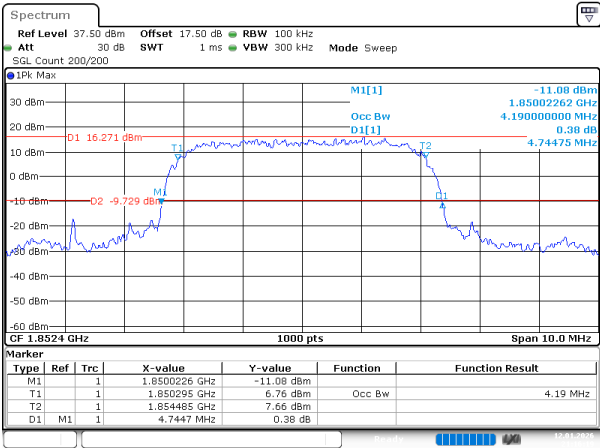


HSDPA_Middle_Subtest1

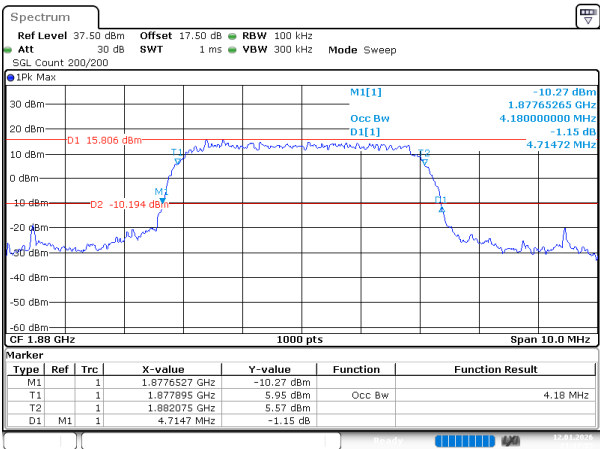

HSDPA_High_Subtest1

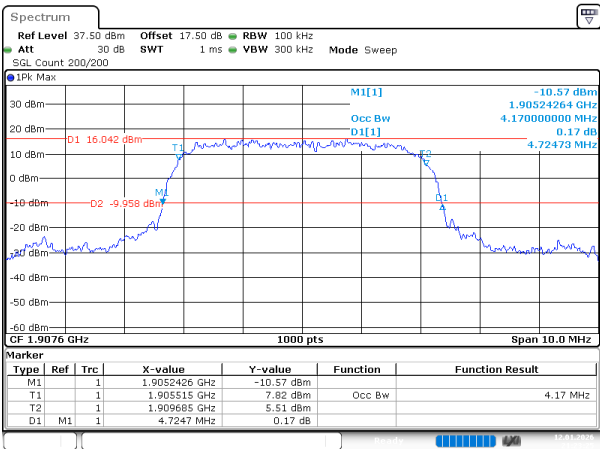


HSUPA_Low_Subtest1

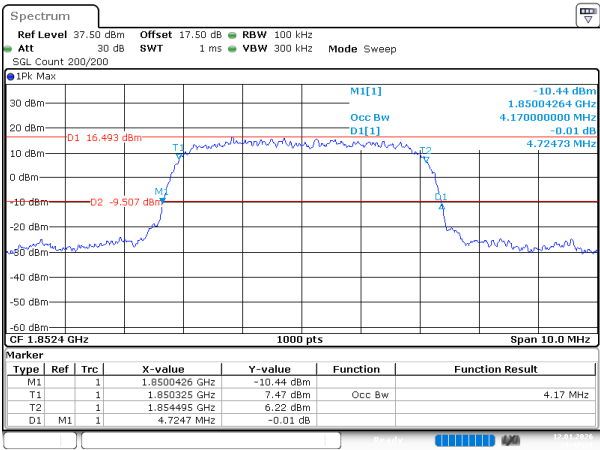


ProjectNo.:2602P27730E-RF Tester:Permin Fu
Date: 12.JAN.2026 21:47:21

HSUPA_Middle_Subtest1

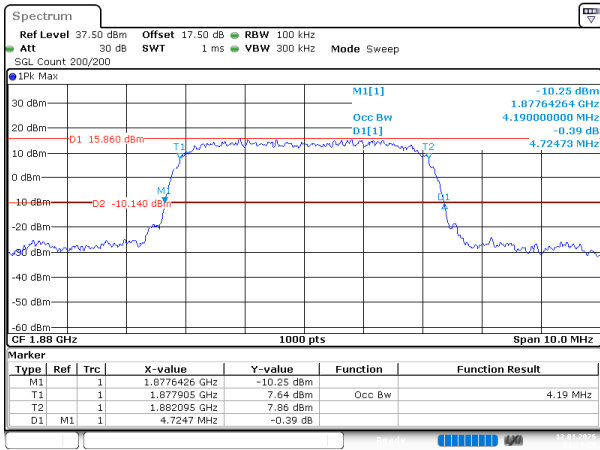

ProjectNo.:2602P27730E-RF Tester:Permin Fu
Date: 12.JAN.2026 21:29:29

HSUPA_High_Subtest1

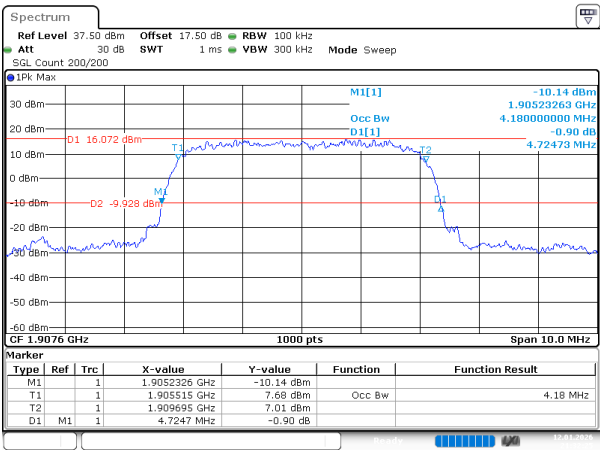

ProjectNo.:2602P27730E-RF Tester:Permin Fu
Date: 12.JAN.2026 21:32:25


FCC Part 27 & IC RSS-139

WCDMA Band 4, Normal


Mode	99% OBW (MHz)	26dB BW (MHz)
R99_Low	4.190	4.725
R99_Middle	4.190	4.715
R99_High	4.180	4.725
HSDPA_Low_Subtest1	4.190	4.715
HSDPA_Middle_Subtest1	4.210	4.695
HSDPA_High_Subtest1	4.210	4.715
HSUPA_Low_Subtest1	4.160	4.705
HSUPA_Middle_Subtest1	4.190	4.705
HSUPA_High_Subtest1	4.190	4.705

WCDMA Band 4, Normal


R99_Low

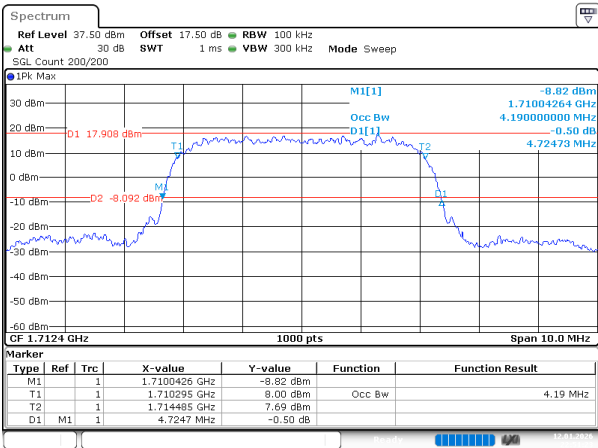


R99_Middle

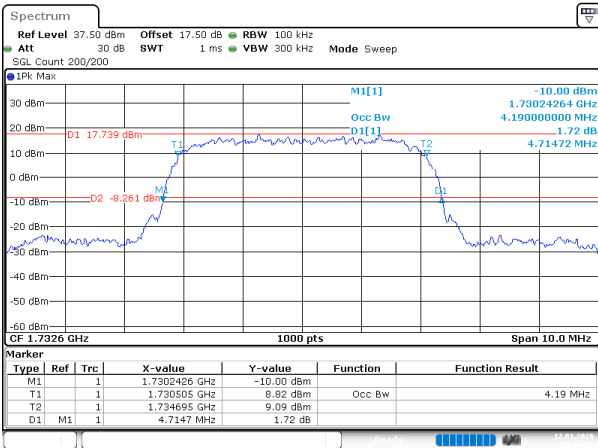


R99_High

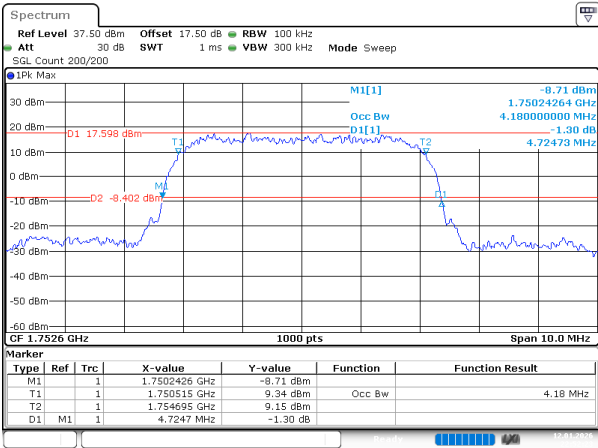


HSDPA_Low_Subtest1

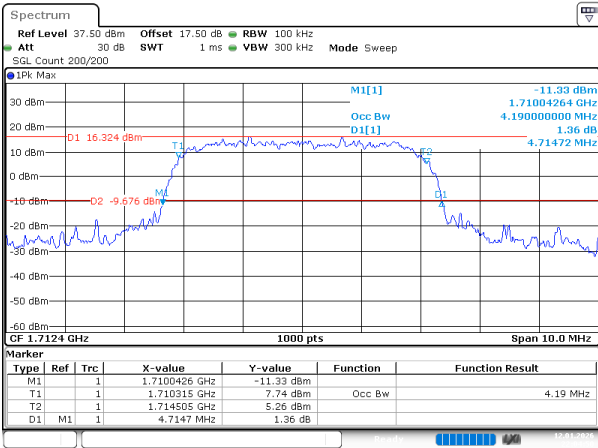


HSDPA_Middle_Subtest1

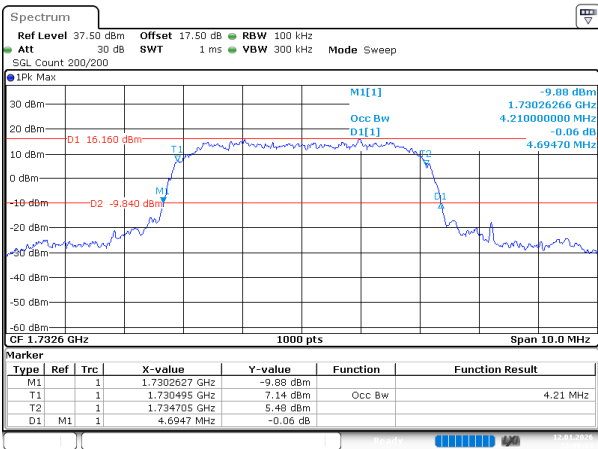

HSDPA_High_Subtest1

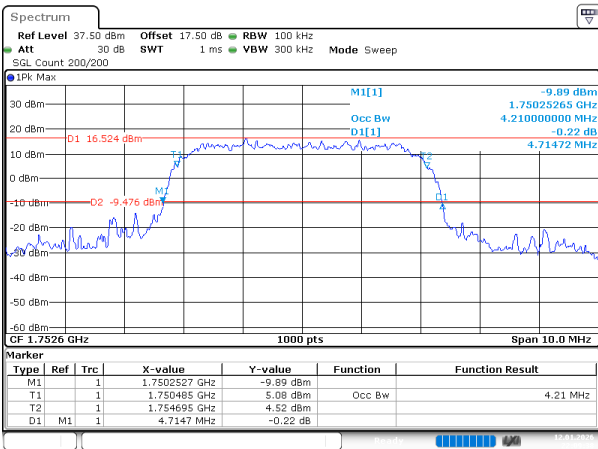


HSUPA_Low_Subtest1

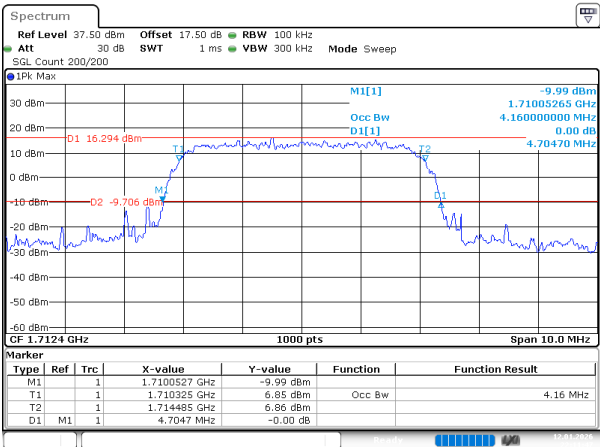


ProjectNo.:2602P27730E-RF Tester:Permin Pu
Date: 12.JAN.2026 22:11:47

HSUPA_Middle_Subtest1

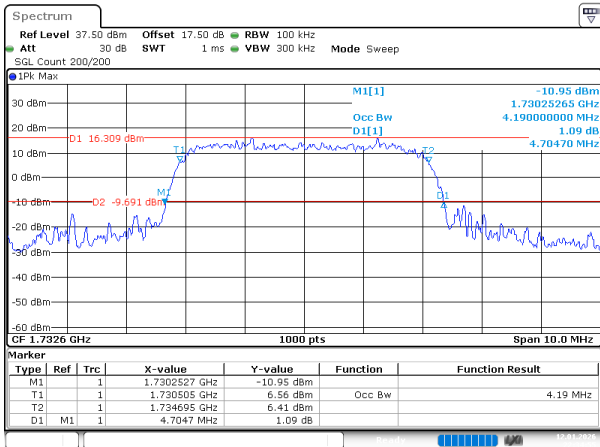

ProjectNo.:2602P27730E-RF Tester:Permin Pu
Date: 12.JAN.2026 22:34:56

HSUPA_High_Subtest1

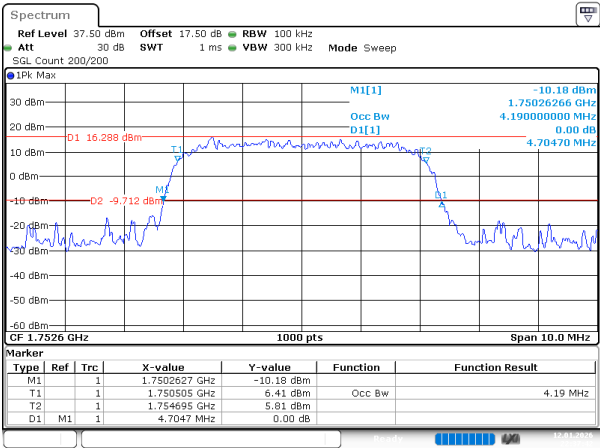

ProjectNo.:2602P27730E-RF Tester:Permin Pu
Date: 12.JAN.2026 22:37:43

RF Output Power**FCC Part 22H & IC RSS-132****WCDMA Band 5, Normal**

Mode	Average Conducted Power(dBm)	ERP (dBm)	FCC Limit (dBm)	IC Limit (dBm)	Verdict
R99_Low	23.80	18.63	38.45	34.77	Pass
R99_Middle	23.85	18.68	38.45	34.77	Pass
R99_High	23.84	18.67	38.45	34.77	Pass
HSDPA_Low_Subtest1	21.89	16.72	38.45	34.77	Pass
HSDPA_Low_Subtest2	22.01	16.84	38.45	34.77	Pass
HSDPA_Low_Subtest3	21.96	16.79	38.45	34.77	Pass
HSDPA_Low_Subtest4	21.94	16.77	38.45	34.77	Pass
HSDPA_Middle_Subtest1	21.88	16.71	38.45	34.77	Pass
HSDPA_Middle_Subtest2	22.01	16.84	38.45	34.77	Pass
HSDPA_Middle_Subtest3	21.91	16.74	38.45	34.77	Pass
HSDPA_Middle_Subtest4	21.89	16.72	38.45	34.77	Pass
HSDPA_High_Subtest1	21.86	16.69	38.45	34.77	Pass
HSDPA_High_Subtest2	22.00	16.83	38.45	34.77	Pass
HSDPA_High_Subtest3	21.92	16.75	38.45	34.77	Pass
HSDPA_High_Subtest4	21.88	16.71	38.45	34.77	Pass
HSUPA_Low_Subtest1	22.28	17.11	38.45	34.77	Pass
HSUPA_Low_Subtest2	22.27	17.10	38.45	34.77	Pass
HSUPA_Low_Subtest3	22.28	17.11	38.45	34.77	Pass
HSUPA_Low_Subtest4	22.27	17.10	38.45	34.77	Pass
HSUPA_Low_Subtest5	22.27	17.10	38.45	34.77	Pass
HSUPA_Middle_Subtest1	22.32	17.15	38.45	34.77	Pass
HSUPA_Middle_Subtest2	22.33	17.16	38.45	34.77	Pass
HSUPA_Middle_Subtest3	22.34	17.17	38.45	34.77	Pass
HSUPA_Middle_Subtest4	22.33	17.16	38.45	34.77	Pass
HSUPA_Middle_Subtest5	22.33	17.16	38.45	34.77	Pass
HSUPA_High_Subtest1	22.30	17.13	38.45	34.77	Pass
HSUPA_High_Subtest2	22.31	17.14	38.45	34.77	Pass
HSUPA_High_Subtest3	22.32	17.15	38.45	34.77	Pass
HSUPA_High_Subtest4	22.32	17.15	38.45	34.77	Pass
HSUPA_High_Subtest5	22.31	17.14	38.45	34.77	Pass

Note:

ERP = Average Conducted Power(dBm) + Antenna Gain(dBd) - Cable Loss(dB)

Antenna Gain(dBd) = Antenna Gain(dBi) - 2.15

1.Antenna Gain = -3.02dBi;

2.Cable Loss = 0dB.

FCC Part 24E & IC RSS-133**WCDMA Band 2, Normal**

Mode	Average Conducted Power(dBm)	EIRP (dBm)	Limit (dBm)	Verdict
R99_Low	23.77	20.43	33	Pass
R99_Middle	23.79	20.45	33	Pass
R99_High	23.90	20.56	33	Pass
HSDPA_Low_Subtest1	21.83	18.49	33	Pass
HSDPA_Low_Subtest2	21.88	18.54	33	Pass
HSDPA_Low_Subtest3	21.77	18.43	33	Pass
HSDPA_Low_Subtest4	21.80	18.46	33	Pass
HSDPA_Middle_Subtest1	21.81	18.47	33	Pass
HSDPA_Middle_Subtest2	21.92	18.58	33	Pass
HSDPA_Middle_Subtest3	21.83	18.49	33	Pass
HSDPA_Middle_Subtest4	21.78	18.44	33	Pass
HSDPA_High_Subtest1	21.80	18.46	33	Pass
HSDPA_High_Subtest2	22.01	18.67	33	Pass
HSDPA_High_Subtest3	21.91	18.57	33	Pass
HSDPA_High_Subtest4	21.94	18.60	33	Pass
HSUPA_Low_Subtest1	22.16	18.82	33	Pass
HSUPA_Low_Subtest2	22.16	18.82	33	Pass
HSUPA_Low_Subtest3	22.10	18.76	33	Pass
HSUPA_Low_Subtest4	22.14	18.80	33	Pass
HSUPA_Low_Subtest5	22.14	18.80	33	Pass
HSUPA_Middle_Subtest1	22.17	18.83	33	Pass
HSUPA_Middle_Subtest2	22.22	18.88	33	Pass
HSUPA_Middle_Subtest3	22.23	18.89	33	Pass
HSUPA_Middle_Subtest4	22.23	18.89	33	Pass
HSUPA_Middle_Subtest5	22.19	18.85	33	Pass
HSUPA_High_Subtest1	22.31	18.97	33	Pass
HSUPA_High_Subtest2	22.26	18.92	33	Pass
HSUPA_High_Subtest3	22.28	18.94	33	Pass
HSUPA_High_Subtest4	22.26	18.92	33	Pass
HSUPA_High_Subtest5	22.29	18.95	33	Pass

Note:

EIRP = Average Conducted Power(dBm) + Antenna Gain(dBi) - Cable Loss(dB)

1.Antenna Gain = -3.34dBi;

2.Cable Loss = 0dB.

FCC Part 27 & IC RSS-139**WCDMA Band 4, Normal**

Mode	Average Conducted Power(dBm)	EIRP (dBm)	Limit (dBm)	Verdict
R99_Low	23.46	21.17	30	Pass
R99_Middle	23.48	21.19	30	Pass
R99_High	23.48	21.19	30	Pass
HSDPA_Low_Subtest1	21.58	19.29	30	Pass
HSDPA_Low_Subtest2	21.64	19.35	30	Pass
HSDPA_Low_Subtest3	21.54	19.25	30	Pass
HSDPA_Low_Subtest4	21.57	19.28	30	Pass
HSDPA_Middle_Subtest1	21.61	19.32	30	Pass
HSDPA_Middle_Subtest2	21.62	19.33	30	Pass
HSDPA_Middle_Subtest3	21.54	19.25	30	Pass
HSDPA_Middle_Subtest4	21.53	19.24	30	Pass
HSDPA_High_Subtest1	21.57	19.28	30	Pass
HSDPA_High_Subtest2	21.56	19.27	30	Pass
HSDPA_High_Subtest3	21.47	19.18	30	Pass
HSDPA_High_Subtest4	21.48	19.19	30	Pass
HSUPA_Low_Subtest1	21.90	19.61	30	Pass
HSUPA_Low_Subtest2	21.88	19.59	30	Pass
HSUPA_Low_Subtest3	21.88	19.59	30	Pass
HSUPA_Low_Subtest4	21.88	19.59	30	Pass
HSUPA_Low_Subtest5	21.88	19.59	30	Pass
HSUPA_Middle_Subtest1	21.91	19.62	30	Pass
HSUPA_Middle_Subtest2	21.92	19.63	30	Pass
HSUPA_Middle_Subtest3	21.92	19.63	30	Pass
HSUPA_Middle_Subtest4	21.92	19.63	30	Pass
HSUPA_Middle_Subtest5	21.91	19.62	30	Pass
HSUPA_High_Subtest1	21.90	19.61	30	Pass
HSUPA_High_Subtest2	21.89	19.60	30	Pass
HSUPA_High_Subtest3	21.89	19.60	30	Pass
HSUPA_High_Subtest4	21.91	19.62	30	Pass
HSUPA_High_Subtest5	21.90	19.61	30	Pass

Note:

EIRP = Average Conducted Power(dBm) + Antenna Gain(dBi) - Cable Loss(dB)

1.Antenna Gain = -2.29dBi;

2.Cable Loss = 0dB.

Peak-to-average Ratio(PAR)

FCC Part 22H & IC RSS-132

WCDMA Band 5, Normal

Mode	Result (dB)	Limit (dB)
R99_Low	3.22	13
R99_Middle	3.13	13
R99_High	3.07	13
HSDPA_Low_Subtest1	4.06	13
HSDPA_Middle_Subtest1	3.59	13
HSDPA_High_Subtest1	3.97	13
HSUPA_Low_Subtest1	4.78	13
HSUPA_Middle_Subtest1	4.84	13
HSUPA_High_Subtest1	4.81	13

FCC Part 24E & IC RSS-133

WCDMA Band 2, Normal

Mode	Result (dB)	Limit (dB)
R99_Low	3.10	13
R99_Middle	3.10	13
R99_High	2.99	13
HSDPA_Low_Subtest1	3.97	13
HSDPA_Middle_Subtest1	4.03	13
HSDPA_High_Subtest1	3.19	13
HSUPA_Low_Subtest1	4.81	13
HSUPA_Middle_Subtest1	4.72	13
HSUPA_High_Subtest1	4.64	13

FCC Part 27 & IC RSS-139

WCDMA Band 4, Normal


Mode	Result (dB)	Limit (dB)
R99_Low	3.10	13
R99_Middle	3.13	13
R99_High	2.99	13
HSDPA_Low_Subtest1	4.06	13
HSDPA_Middle_Subtest1	4.46	13
HSDPA_High_Subtest1	3.97	13
HSUPA_Low_Subtest1	4.72	13
HSUPA_Middle_Subtest1	4.87	13
HSUPA_High_Subtest1	4.61	13

Out of band emission,Band Edge

FCC Part 22H & IC RSS-132


WCDMA Band 5, Normal

R99_Low

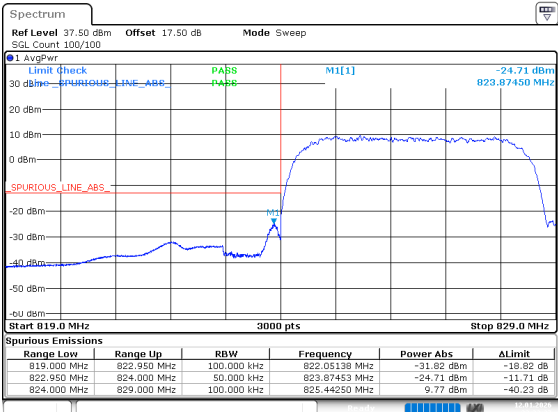


ProjectNo.:2602P27730E-RF Tester:Feimin Fu
Date: 12.JAN.2026 23:33:27

R99_High

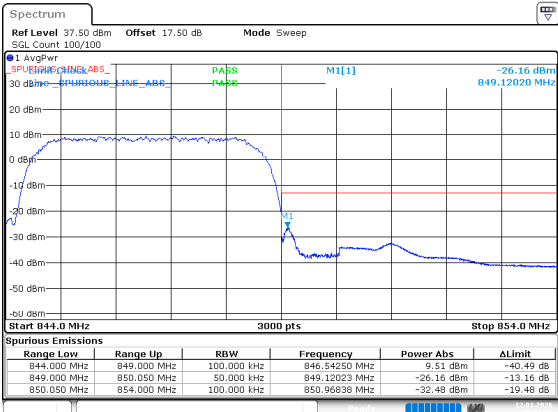


ProjectNo.:2602P27730E-RF Tester:Feimin Fu
Date: 12.JAN.2026 23:34:10

HSDPA_Low_Subtest1

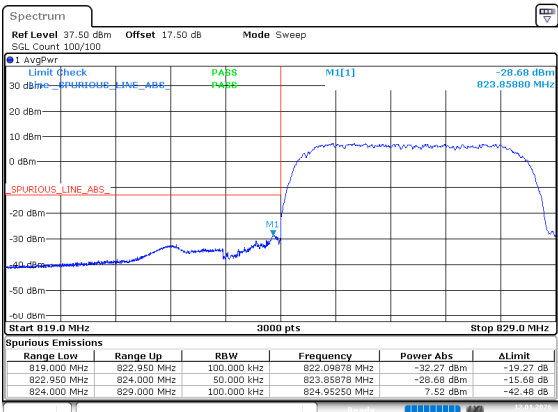


ProjectNo.:2602P27730E-RF Tester:Feimin Fu
Date: 12.JAN.2026 23:50:07

HSDPA_High_Subtest1

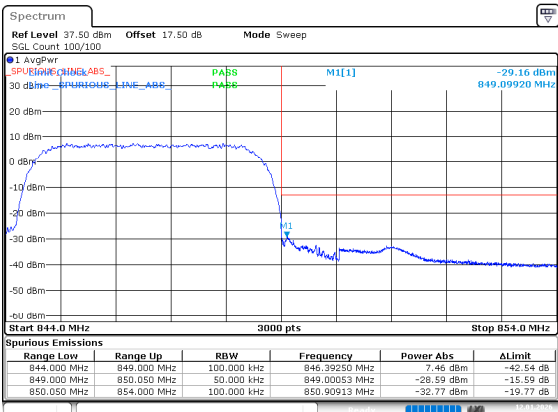


ProjectNo.:2602P27730E-RF Tester:Feimin Fu
Date: 12.JAN.2026 23:51:07

HSUPA_Low_Subtest1

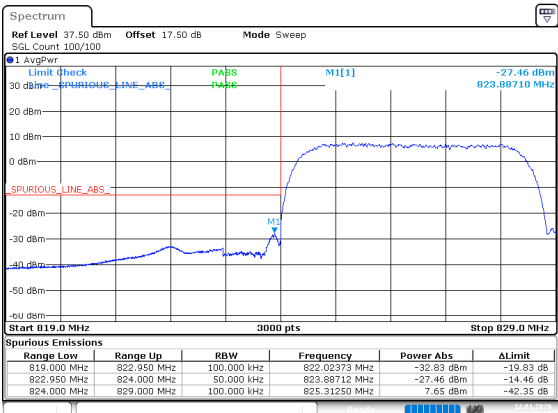

ProjectNo.:2602P27730E-RF Tester:Feimin Fu
Date: 12.JAN.2026 23:51:52

HSUPA_High_Subtest1

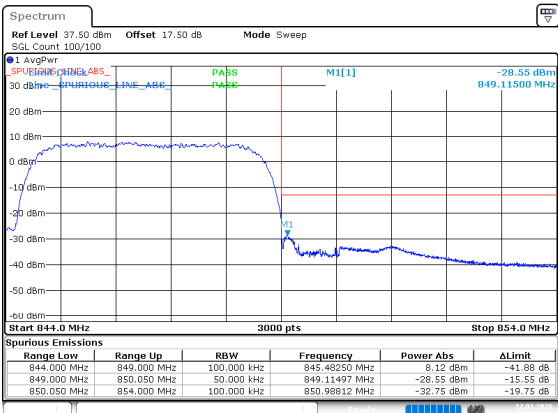



ProjectNo.:2602P27730E-RF Tester:Feimin Fu
Date: 12.JAN.2026 23:52:52

FCC Part 24E & IC RSS-133

WCDMA Band 2, Normal



R99_Low

R99_High

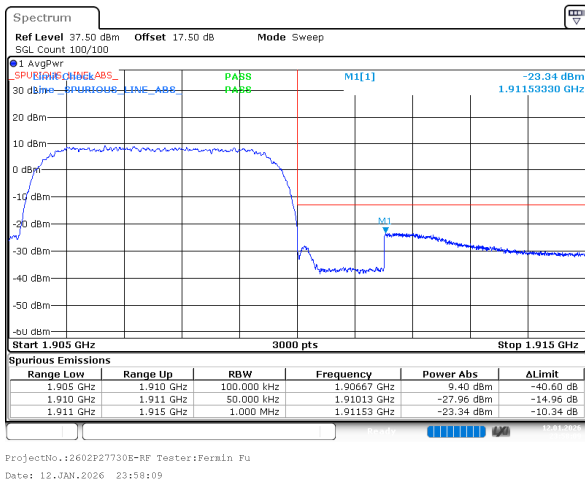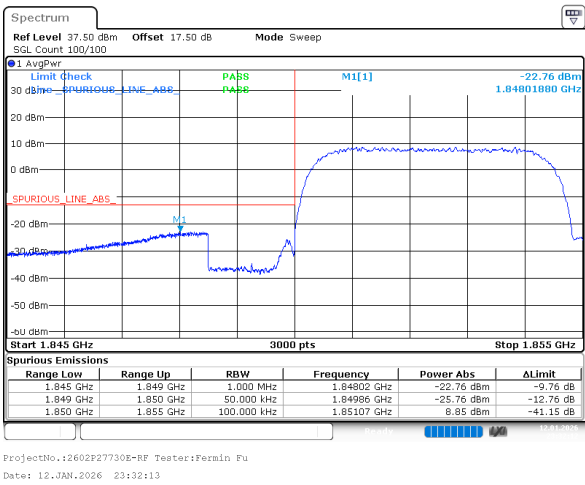



HSDPA_Low_Subtest1

HSDPA_High_Subtest1

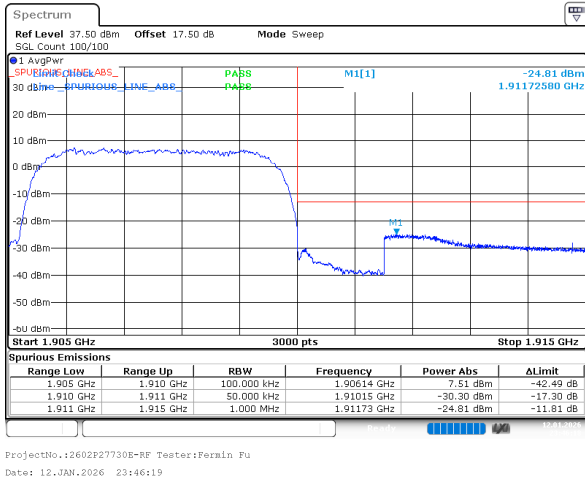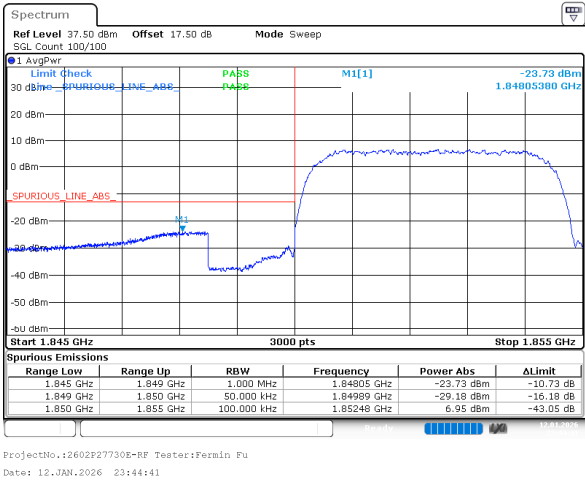

HSUPA_Low_Subtest1

HSUPA_High_Subtest1

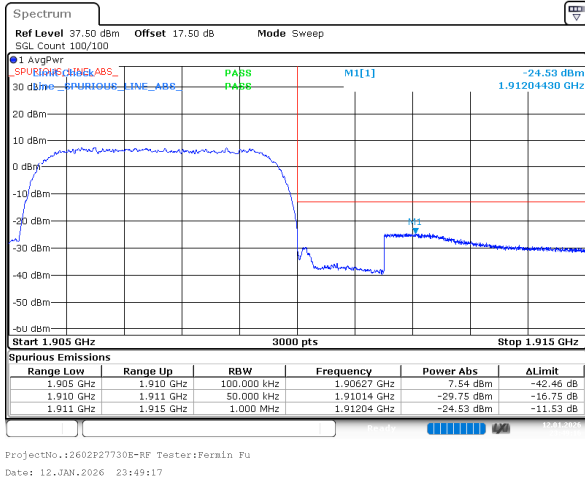
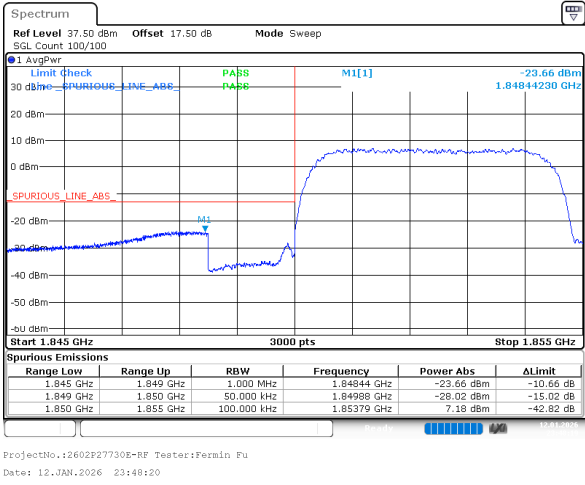


FCC Part 27 & IC RSS-139

WCDMA Band 4, Normal



R99_Low

R99_High

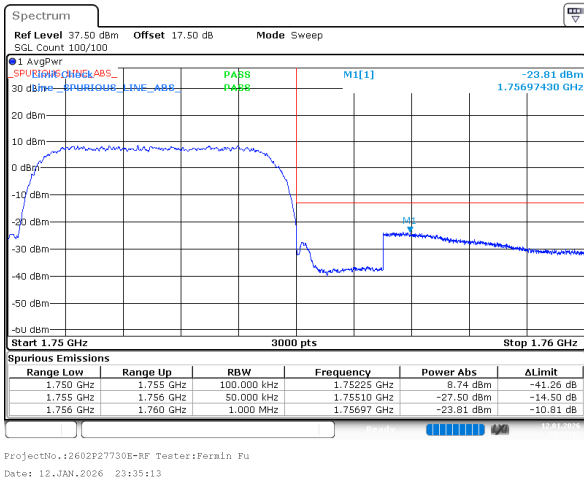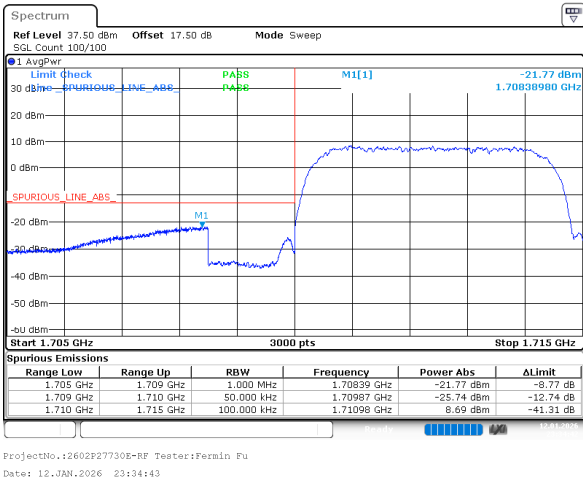



HSDPA_Low_Subtest1

HSDPA_High_Subtest1

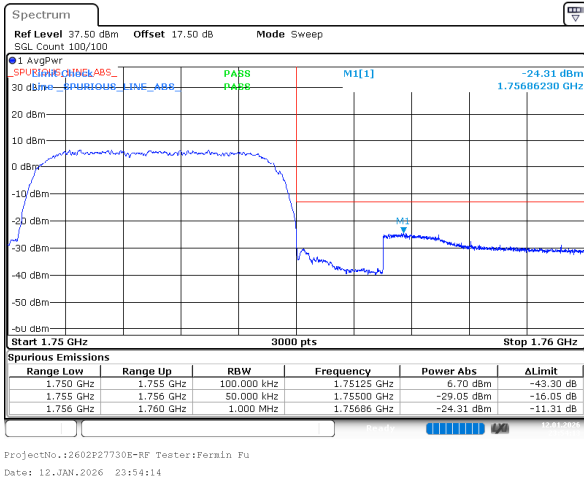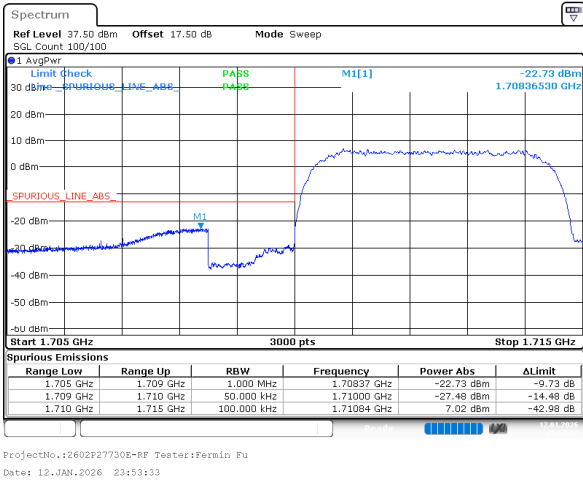

HSUPA_Low_Subtest1

HSUPA_High_Subtest1

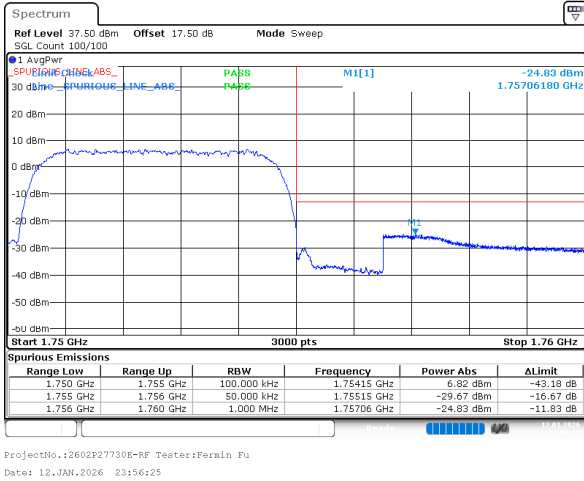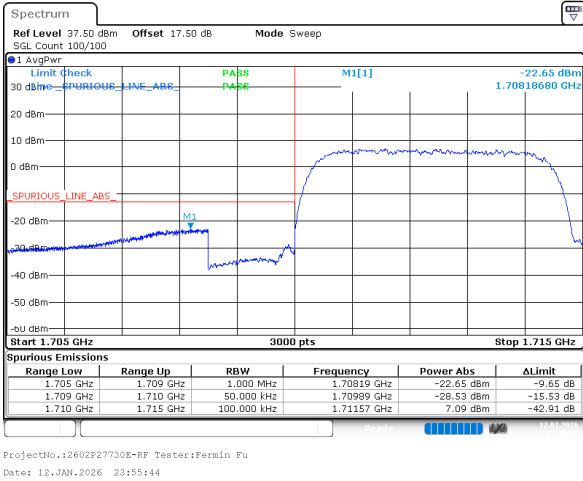


Spurious Emissions at Antenna Terminal


FCC Part 22H & IC RSS-132
WCDMA Band 5, Normal
Worst case

R99_Low

Below 1G

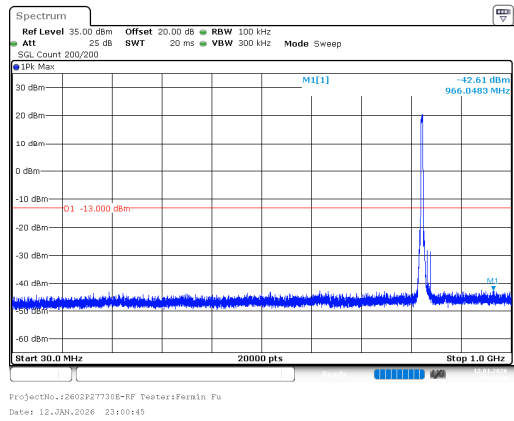


Above 1G

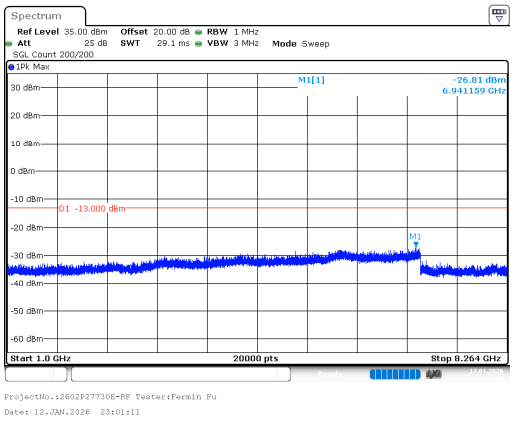


R99_Middle

Below 1G

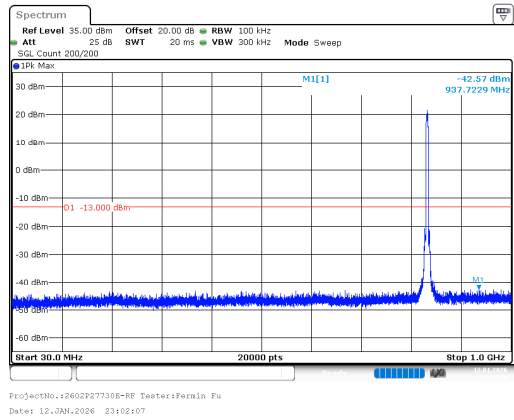


Above 1G

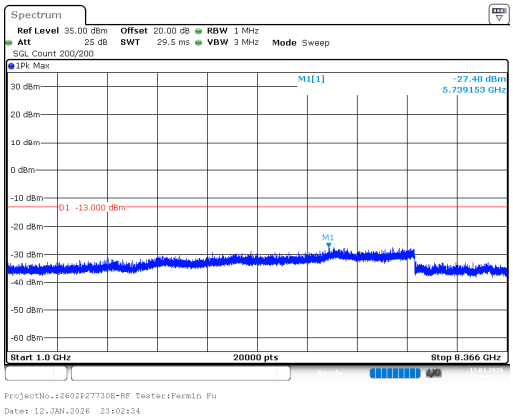


R99_High

Below 1G

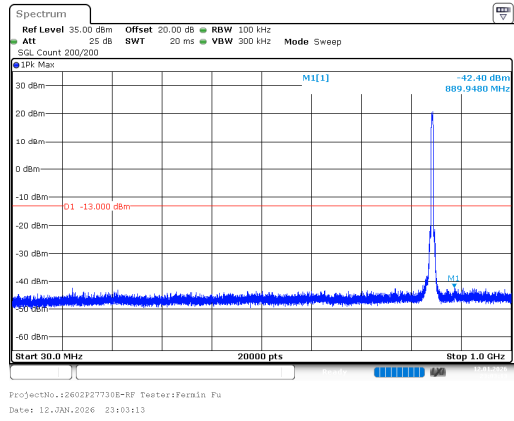

Above 1G

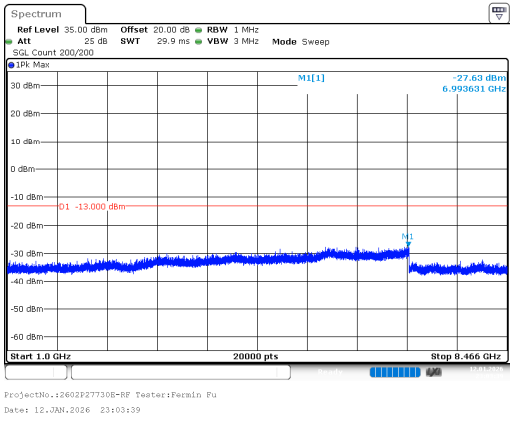


FCC Part 24E & IC RSS-133


WCDMA Band 2, Normal

Worst case


R99_Low

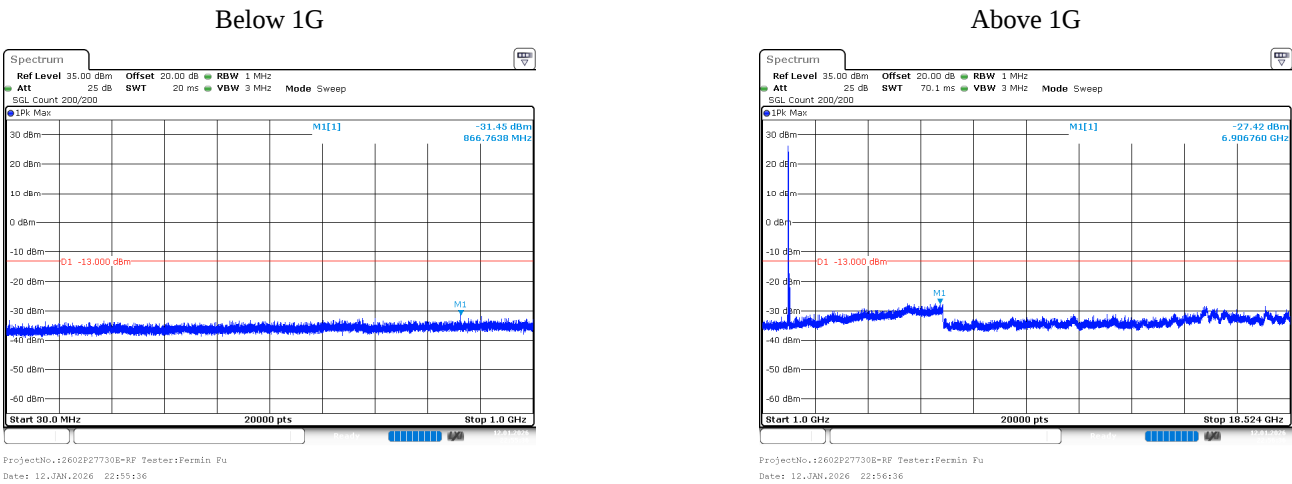

R99_Middle

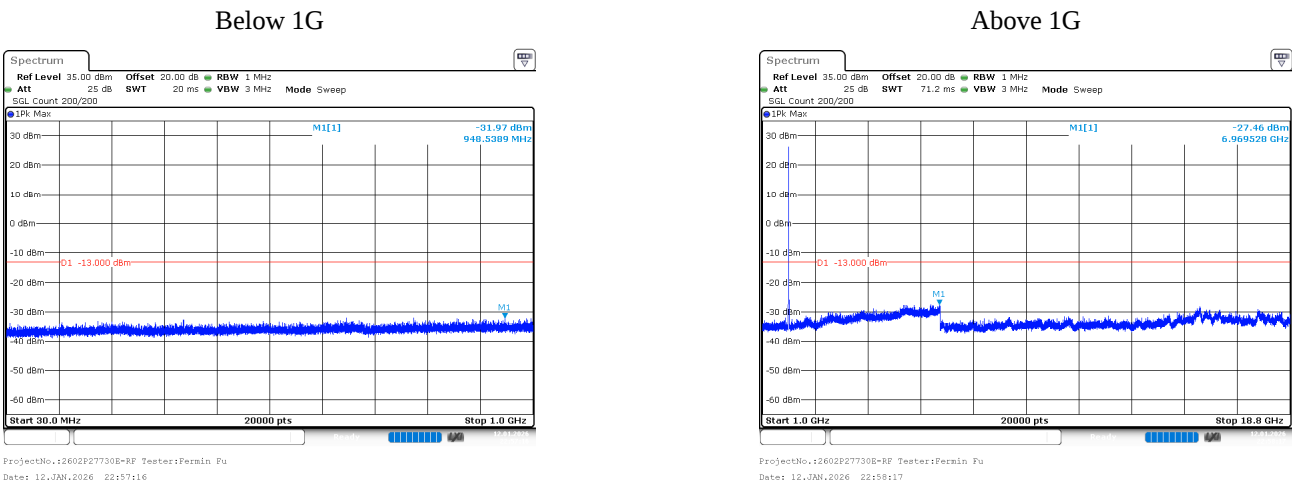

R99_High

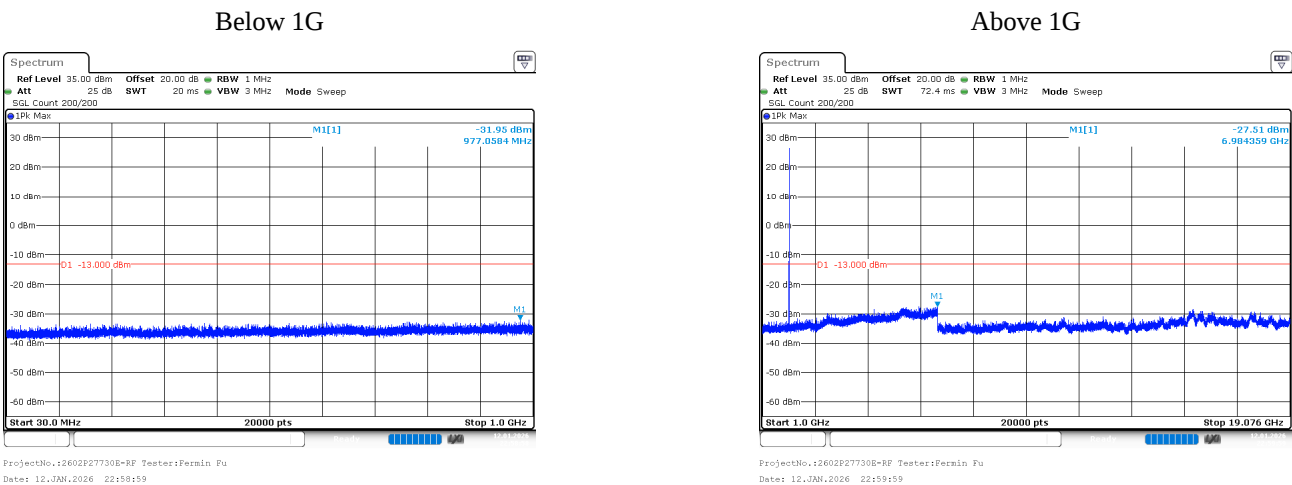


FCC Part 27 & IC RSS-139

WCDMA Band 4, Normal


Worst case

R99_Low

Below 1G

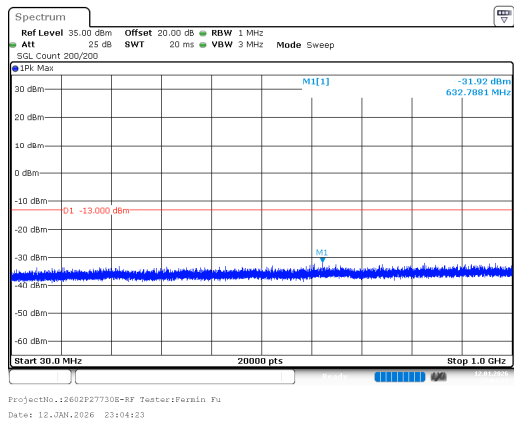


Above 1G

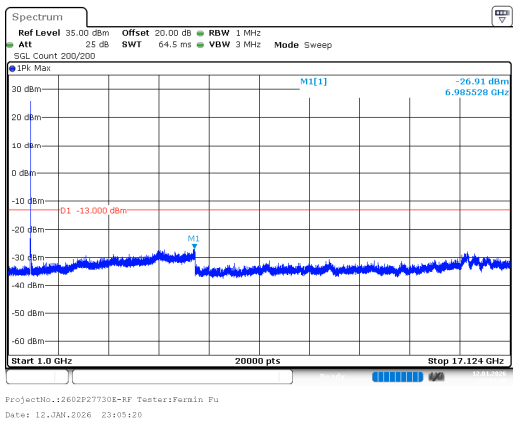


R99_Middle

Below 1G

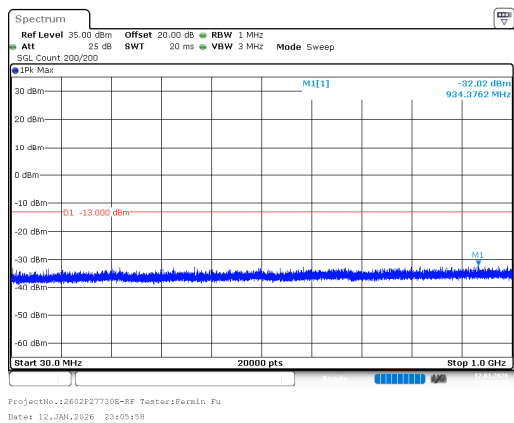


Above 1G

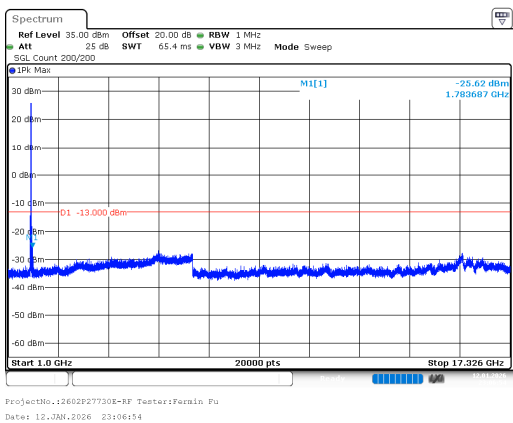


R99_High

Below 1G

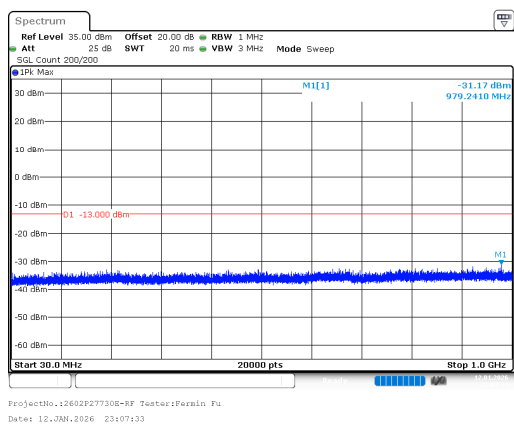

Above 1G

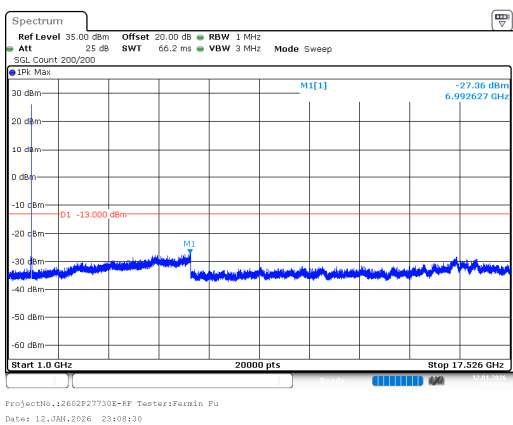

***** END *****