


Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2019/06/05	Phase :	N
Temperature :	25°C	Humidity :	65 %

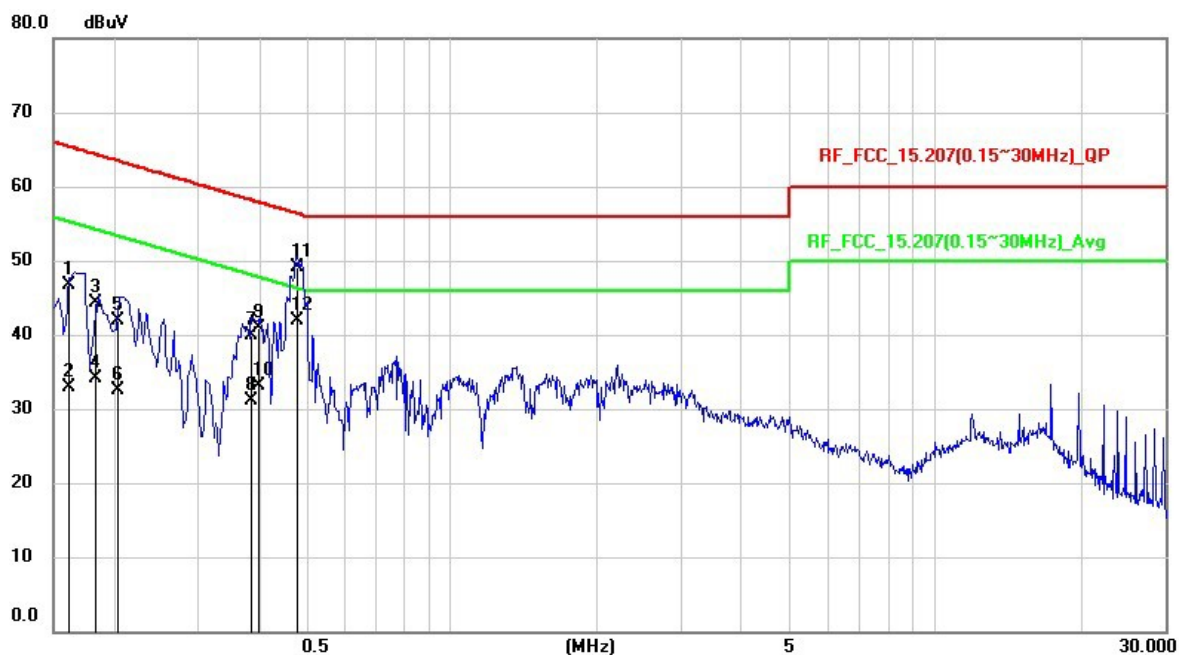

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1615	36.97	9.83	46.8	65.39	-18.59	QP
2	0.1615	23.1	9.83	32.93	55.39	-22.46	AVG
3	0.1829	34.5	9.82	44.32	64.35	-20.03	QP
4	0.1829	24.21	9.82	34.03	54.35	-20.32	AVG
5	0.2029	32.12	9.82	41.94	63.49	-21.55	QP
6	0.2029	22.6	9.82	32.42	53.49	-21.07	AVG
7	0.385	30.15	9.84	39.99	58.17	-18.18	QP
8	0.385	21.32	9.84	31.16	48.17	-17.01	AVG
9	0.3996	31.16	9.84	41	57.86	-16.86	QP
10	0.3996	23.31	9.84	33.15	47.86	-14.71	AVG
11	0.4796	39.32	9.84	49.16	56.35	-7.19	QP
12	0.4796	32.1	9.84	41.94	46.35	-4.41	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

--- END ---