

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

WIFI2.4G- Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.36.51

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

RÉmission Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

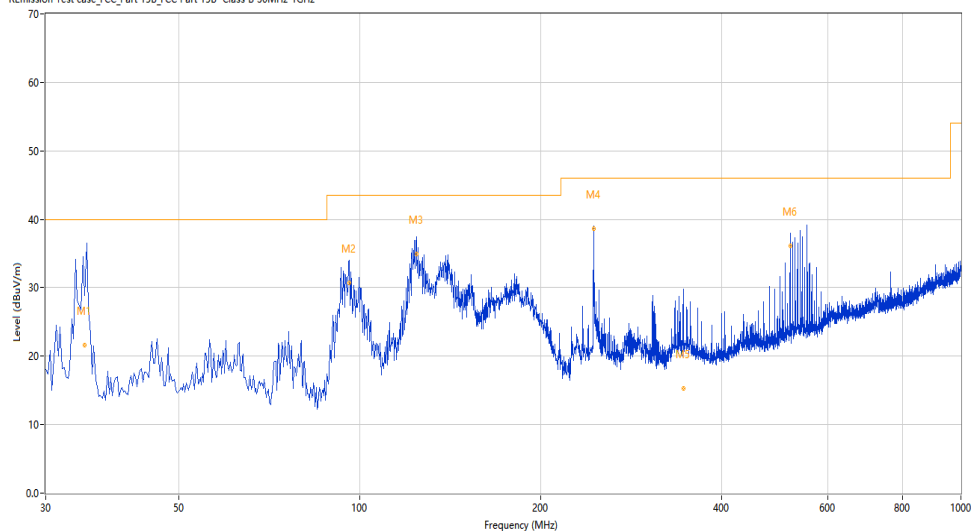

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.868	39.44	-26.64	40.0	0.56	Peak	8.00	106	Horizontal	Pass
1*	34.868	21.59	-26.64	40.0	18.41	QP	8.00	106	Horizontal	Pass
2	96.007	35.21	-25.93	43.5	8.29	Peak	360.00	296	Horizontal	Pass
2*	96.007	30.74	-25.93	43.5	12.76	QP	360.00	296	Horizontal	Pass
3	124.155	38.45	-27.51	43.5	5.05	Peak	305.00	195	Horizontal	Pass
3*	124.155	34.88	-27.51	43.5	8.62	QP	305.00	195	Horizontal	Pass
4	245.000	41.17	-22.92	46.0	4.83	Peak	339.30	185	Horizontal	Pass
4*	245.000	38.64	-22.92	46.0	7.36	QP	339.30	185	Horizontal	Pass
5	345.600	21.48	-19.84	46.0	24.52	Peak	95.40	121	Horizontal	Pass
5*	345.600	15.28	-19.84	46.0	30.72	QP	95.40	121	Horizontal	Pass
6	519.999	38.57	-16.20	46.0	7.43	Peak	315.00	100	Horizontal	Pass
6*	519.999	36.13	-16.20	46.0	9.87	QP	315.00	100	Horizontal	Pass

WIFI2.4G-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.27.24

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

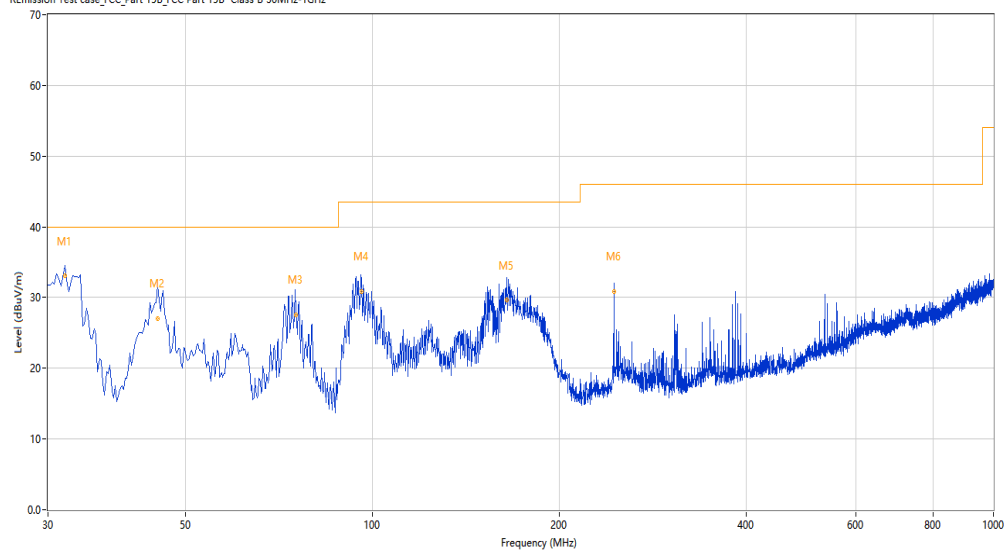

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.954	36.04	-27.55	40.0	3.96	Peak	0.00	110	Vertical	Pass
1*	31.954	33.15	-27.55	40.0	6.85	QP	0.00	110	Vertical	Pass
2	45.109	32.17	-23.88	40.0	7.83	Peak	240.50	102	Vertical	Pass
2*	45.109	26.97	-23.88	40.0	13.03	QP	240.50	102	Vertical	Pass
3	75.305	32.26	-30.01	40.0	7.74	Peak	305.20	114	Vertical	Pass
3*	75.305	27.58	-30.01	40.0	12.42	QP	305.20	114	Vertical	Pass
4	95.942	34.47	-25.98	43.5	9.03	Peak	107.60	112	Vertical	Pass
4*	95.942	30.87	-25.98	43.5	12.63	QP	107.60	112	Vertical	Pass
5	164.533	32.70	-27.72	43.5	10.80	Peak	153.60	100	Vertical	Pass
5*	164.533	29.65	-27.72	43.5	13.85	QP	153.60	100	Vertical	Pass
6	244.999	36.54	-22.92	46.0	9.46	Peak	59.20	130	Vertical	Pass
6*	244.999	30.82	-22.92	46.0	15.18	QP	59.20	130	Vertical	Pass

1-18G

WIFI2.4G-B- Low channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.39.06

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

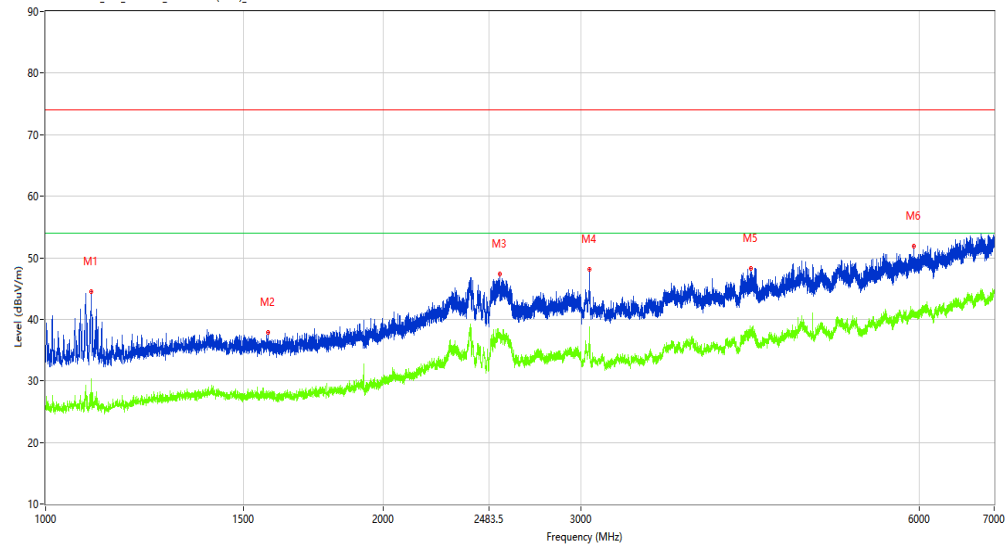

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1097.750	44.54	-15.03	74.0	29.46	Peak	193.40	150	Horizontal	Pass
1**	1097.750	29.15	-15.03	54.0	24.85	AV	193.40	150	Horizontal	Pass
2	1578.000	37.87	-13.71	74.0	36.13	Peak	175.40	150	Horizontal	Pass
2**	1578.000	27.41	-13.71	54.0	26.59	AV	175.40	150	Horizontal	Pass
3	2539.000	47.36	-7.04	74.0	26.64	Peak	252.20	150	Horizontal	Pass
3**	2539.000	37.78	-7.04	54.0	16.22	AV	252.20	150	Horizontal	Pass
4	3051.500	48.06	-6.04	74.0	25.94	Peak	0.10	150	Horizontal	Pass
4**	3051.500	38.04	-6.04	54.0	15.96	AV	0.10	150	Horizontal	Pass
5	4252.000	48.28	-2.10	74.0	25.72	Peak	0.00	150	Horizontal	Pass
5**	4252.000	37.80	-2.10	54.0	16.20	AV	0.00	150	Horizontal	Pass
6	5938.000	51.81	1.57	74.0	22.19	Peak	149.40	150	Horizontal	Pass
6**	5938.000	40.82	1.57	54.0	13.18	AV	149.40	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.52.27

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

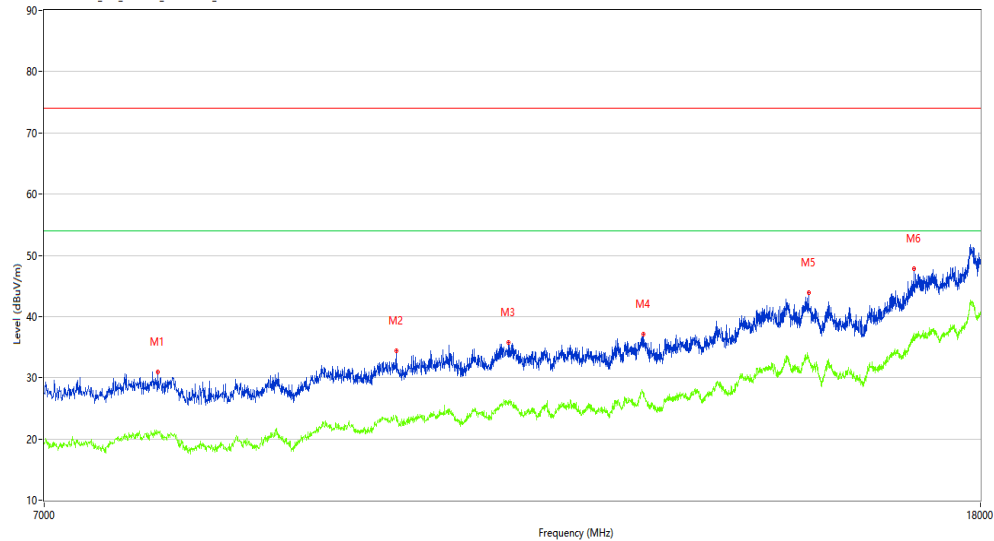

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7849.750	30.89	0.95	74.0	43.11	Peak	327.30	100	Horizontal	Pass
1**	7849.750	21.12	0.95	54.0	32.88	AV	327.30	100	Horizontal	Pass
2	9983.750	34.45	3.21	74.0	39.55	Peak	86.20	100	Horizontal	Pass
2**	9983.750	23.52	3.21	54.0	30.48	AV	86.20	100	Horizontal	Pass
3	11185.500	35.78	3.85	74.0	38.22	Peak	360.00	100	Horizontal	Pass
3**	11185.500	25.94	3.85	54.0	28.06	AV	360.00	100	Horizontal	Pass
4	12810.750	37.05	5.63	74.0	36.95	Peak	46.20	100	Horizontal	Pass
4**	12810.750	27.45	5.63	54.0	26.55	AV	46.20	100	Horizontal	Pass
5	15137.250	43.84	9.34	74.0	30.16	Peak	161.30	100	Horizontal	Pass
5**	15137.250	33.39	9.34	54.0	20.61	AV	161.30	100	Horizontal	Pass
6	16834.000	47.85	13.93	74.0	26.15	Peak	46.20	100	Horizontal	Pass
6**	16834.000	37.21	13.93	54.0	16.79	AV	46.20	100	Horizontal	Pass

WIFI2.4G-B-Low channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-28_17.37.42

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

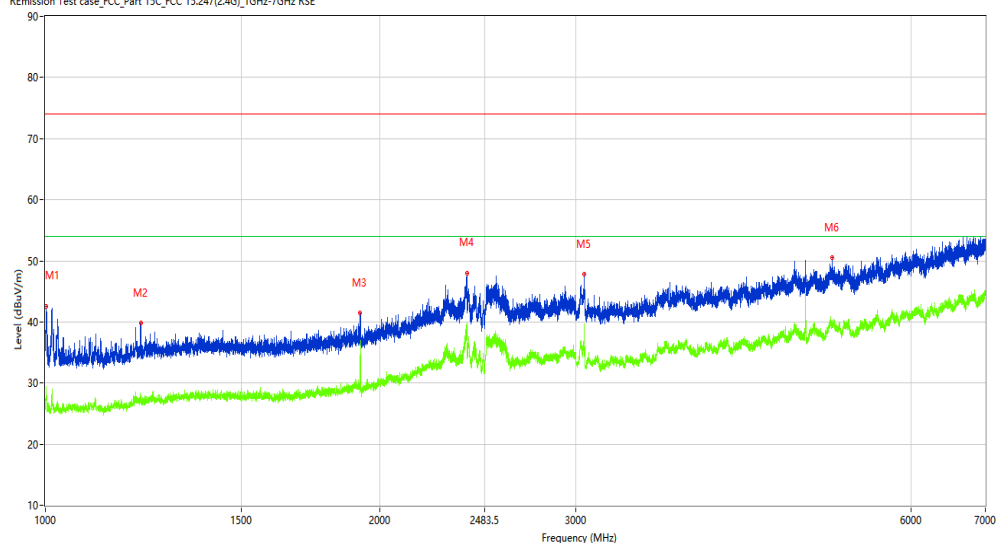

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1002.250	42.61	-14.79	74.0	31.39	Peak	194.00	100	Vertical	Pass
1**	1002.250	28.59	-14.79	54.0	25.41	AV	194.00	100	Vertical	Pass
2	1218.250	39.81	-14.25	74.0	34.19	Peak	127.00	100	Vertical	Pass
2**	1218.250	27.65	-14.25	54.0	26.35	AV	127.00	100	Vertical	Pass
3	1919.500	41.44	-12.26	74.0	32.56	Peak	188.10	100	Vertical	Pass
3**	1919.500	33.29	-12.26	54.0	20.71	AV	188.10	100	Vertical	Pass
4	2392.500	48.02	-4.72	74.0	25.98	Peak	256.30	100	Vertical	Pass
4**	2392.500	39.54	-4.72	54.0	14.46	AV	256.30	100	Vertical	Pass
5	3050.000	47.83	-4.72	74.0	26.17	Peak	166.90	100	Vertical	Pass
5**	3050.000	39.69	-4.72	54.0	14.31	AV	166.90	100	Vertical	Pass
6	5101.500	50.54	0.72	74.0	23.46	Peak	156.10	100	Vertical	Pass
6**	5101.500	40.04	0.72	54.0	13.96	AV	156.10	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.17.05

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7679.250	30.77	0.76	74.0	43.23	Peak	31.80	100	Vertical	Pass
1**	7679.250	20.20	0.76	54.0	33.80	AV	31.80	100	Vertical	Pass
2	9178.000	31.63	0.86	74.0	42.37	Peak	186.20	100	Vertical	Pass
2**	9178.000	21.59	0.86	54.0	32.41	AV	186.20	100	Vertical	Pass
3	10599.750	35.08	3.74	74.0	38.92	Peak	105.40	100	Vertical	Pass
3**	10599.750	23.84	3.74	54.0	30.16	AV	105.40	100	Vertical	Pass
4	12830.000	37.30	5.15	74.0	36.70	Peak	186.20	100	Vertical	Pass
4**	12830.000	26.81	5.15	54.0	27.19	AV	186.20	100	Vertical	Pass
5	15074.000	44.02	10.41	74.0	29.98	Peak	105.40	100	Vertical	Pass
5**	15074.000	33.02	10.41	54.0	20.98	AV	105.40	100	Vertical	Pass
6	17835.000	51.35	18.63	74.0	22.65	Peak	148.90	100	Vertical	Pass
6**	17835.000	42.11	18.63	54.0	11.89	AV	148.90	100	Vertical	Pass

WIFI2.4G-B-Middle channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.42.22

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

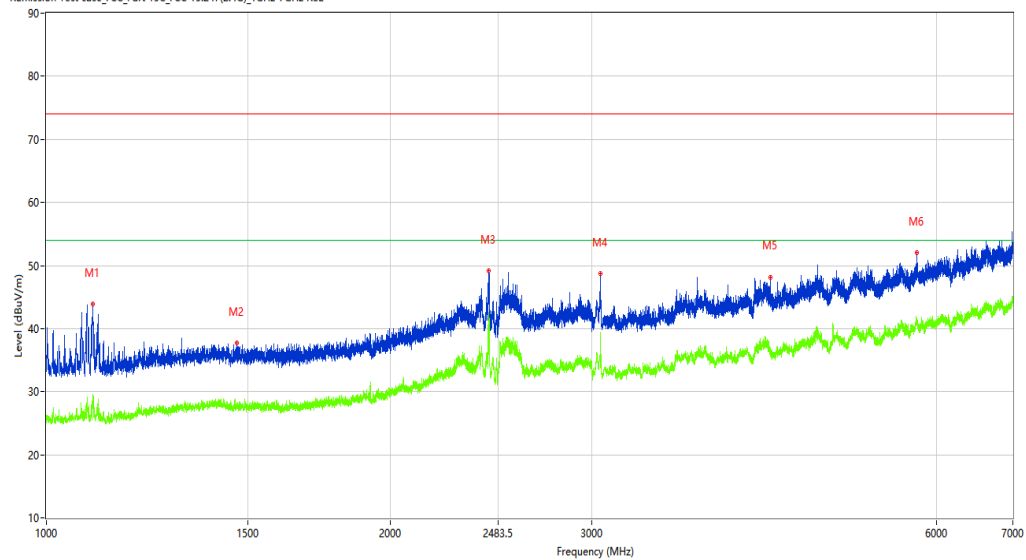

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1098.250	43.89	-15.03	74.0	30.11	Peak	196.10	150	Horizontal	Pass
1**	1098.250	29.11	-15.03	54.0	24.89	AV	196.10	150	Horizontal	Pass
2	1466.500	37.75	-13.66	74.0	36.25	Peak	209.20	150	Horizontal	Pass
2**	1466.500	27.82	-13.66	54.0	26.18	AV	209.20	150	Horizontal	Pass
3	2438.250	49.18	-5.88	74.0	24.82	Peak	185.80	150	Horizontal	Pass
3**	2438.250	41.07	-5.88	54.0	12.93	AV	185.80	150	Horizontal	Pass
4	3050.000	48.75	-4.72	74.0	25.25	Peak	150.40	150	Horizontal	Pass
4**	3050.000	38.83	-4.72	54.0	15.17	AV	150.40	150	Horizontal	Pass
5	4295.000	48.18	-2.33	74.0	25.82	Peak	303.60	150	Horizontal	Pass
5**	4295.000	36.58	-2.33	54.0	17.42	AV	303.60	150	Horizontal	Pass
6	5768.000	51.97	1.62	74.0	22.03	Peak	293.20	150	Horizontal	Pass
6**	5768.000	41.15	1.62	54.0	12.85	AV	293.20	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_17.01.56

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

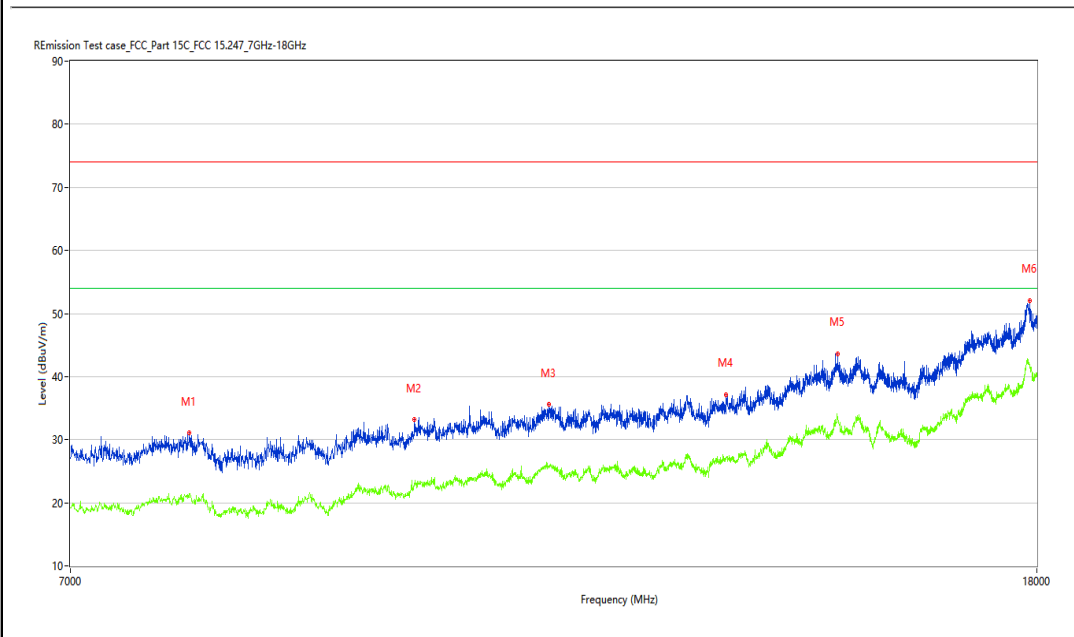

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7863.500	31.08	1.12	74.0	42.92	Peak	265.30	100	Horizontal	Pass
1**	7863.500	21.48	1.12	54.0	32.52	AV	265.30	100	Horizontal	Pass
2	9799.500	33.16	3.29	74.0	40.84	Peak	303.30	100	Horizontal	Pass
2**	9799.500	22.68	3.29	54.0	31.32	AV	303.30	100	Horizontal	Pass
3	11174.500	35.54	3.93	74.0	38.46	Peak	48.40	100	Horizontal	Pass
3**	11174.500	25.52	3.93	54.0	28.48	AV	48.40	100	Horizontal	Pass
4	13283.750	37.18	5.75	74.0	36.82	Peak	265.30	100	Horizontal	Pass
4**	13283.750	27.22	5.75	54.0	26.78	AV	265.30	100	Horizontal	Pass
5	14815.500	43.65	11.92	74.0	30.35	Peak	179.30	100	Horizontal	Pass
5**	14815.500	33.58	11.92	54.0	20.42	AV	179.30	100	Horizontal	Pass
6	17873.500	52.10	18.42	74.0	21.90	Peak	179.30	100	Horizontal	Pass
6**	17873.500	41.91	18.42	54.0	12.09	AV	179.30	100	Horizontal	Pass

WIFI2.4G-B-Middle channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-28_17.41.05

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

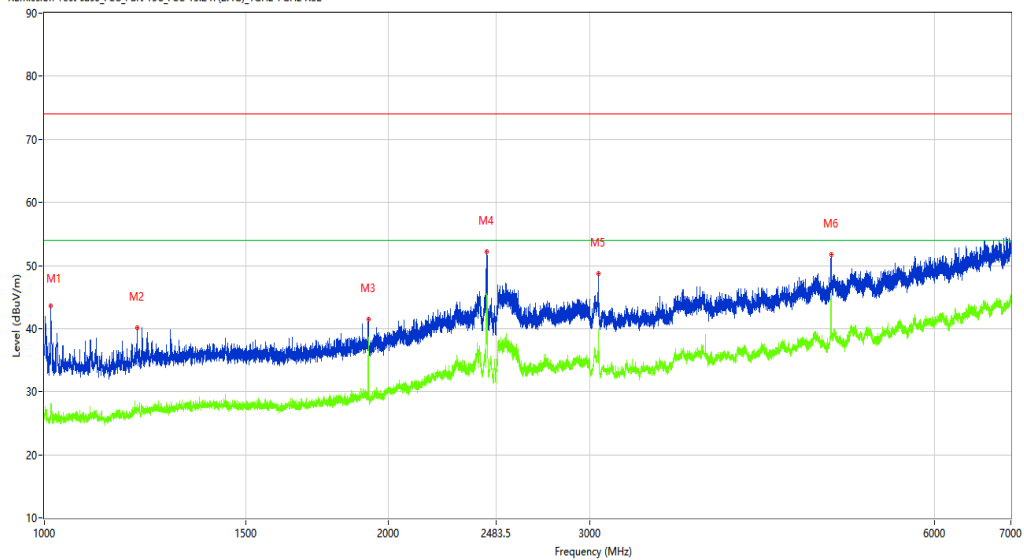

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1013.500	43.56	-14.91	74.0	30.44	Peak	191.40	100	Vertical	Pass
1**	1013.500	28.01	-14.91	54.0	25.99	AV	191.40	100	Vertical	Pass
2	1206.250	40.16	-14.49	74.0	33.84	Peak	129.60	100	Vertical	Pass
2**	1206.250	27.11	-14.49	54.0	26.89	AV	129.60	100	Vertical	Pass
3	1919.750	41.45	-12.26	74.0	32.55	Peak	203.50	100	Vertical	Pass
3**	1919.750	36.56	-12.26	54.0	17.44	AV	203.50	100	Vertical	Pass
4	2438.000	52.17	-5.88	74.0	21.83	Peak	72.80	100	Vertical	Pass
4**	2438.000	44.83	-5.88	54.0	9.17	AV	72.80	100	Vertical	Pass
5	3050.000	48.70	-4.72	74.0	25.30	Peak	20.10	100	Vertical	Pass
5**	3050.000	39.89	-4.72	54.0	14.11	AV	20.10	100	Vertical	Pass
6	4874.000	51.68	-0.63	74.0	22.32	Peak	70.80	100	Vertical	Pass
6**	4874.000	45.18	-0.63	54.0	8.82	AV	70.80	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.26.44

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

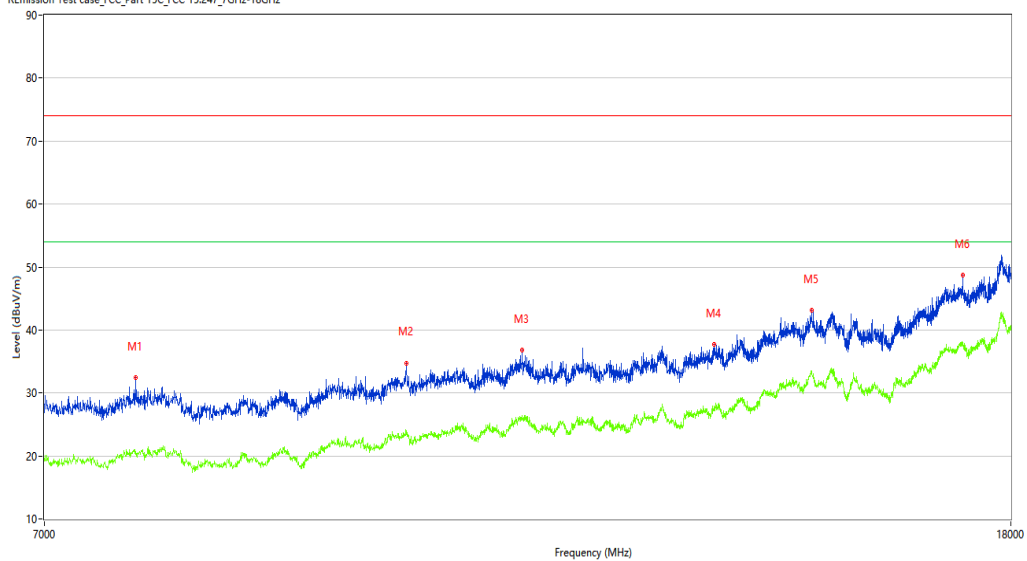

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7654.500	32.41	0.47	74.0	41.59	Peak	0.30	100	Vertical	Pass
1**	7654.500	20.39	0.47	54.0	33.61	AV	0.30	100	Vertical	Pass
2	9972.750	34.74	3.45	74.0	39.26	Peak	3.20	100	Vertical	Pass
2**	9972.750	24.04	3.45	54.0	29.96	AV	3.20	100	Vertical	Pass
3	11166.250	36.84	3.91	74.0	37.16	Peak	327.20	100	Vertical	Pass
3**	11166.250	25.86	3.91	54.0	28.14	AV	327.20	100	Vertical	Pass
4	13473.500	37.65	6.59	74.0	36.35	Peak	0.00	100	Vertical	Pass
4**	13473.500	27.40	6.59	54.0	26.60	AV	0.00	100	Vertical	Pass
5	14815.500	43.10	11.92	74.0	30.90	Peak	121.40	100	Vertical	Pass
5**	14815.500	33.57	11.92	54.0	20.43	AV	121.40	100	Vertical	Pass
6	17177.750	48.71	15.09	74.0	25.29	Peak	0.00	100	Vertical	Pass
6**	17177.750	37.62	15.09	54.0	16.38	AV	0.00	100	Vertical	Pass

WIFI2.4G-B-High channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.45.30

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

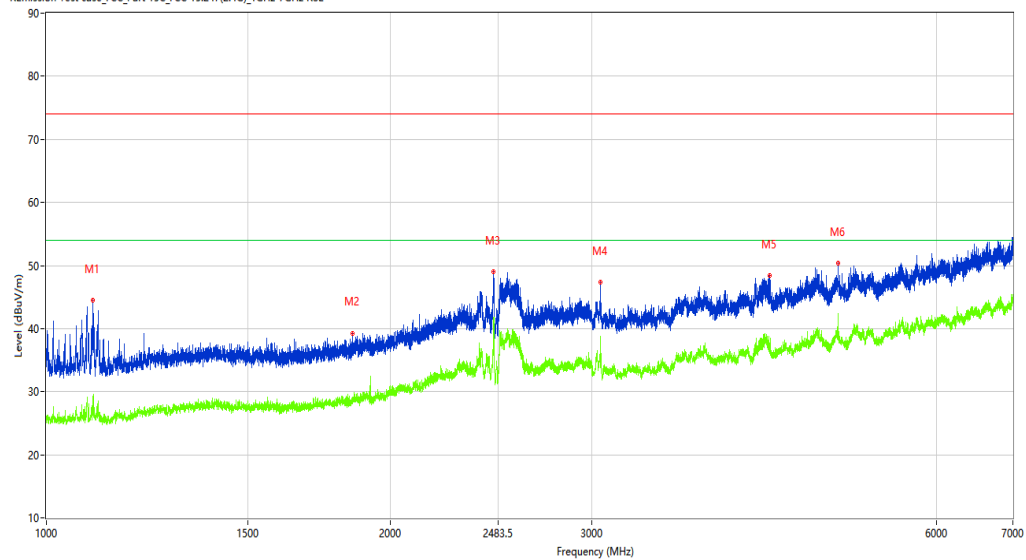

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1097.750	44.46	-15.03	74.0	29.54	Peak	192.90	150	Horizontal	Pass
1**	1097.750	27.73	-15.03	54.0	26.27	AV	192.90	150	Horizontal	Pass
2	1853.000	39.28	-12.63	74.0	34.72	Peak	192.90	150	Horizontal	Pass
2**	1853.000	28.07	-12.63	54.0	25.93	AV	192.90	150	Horizontal	Pass
3	2460.000	49.05	-6.62	74.0	24.95	Peak	187.00	150	Horizontal	Pass
3**	2460.000	41.26	-6.62	54.0	12.74	AV	187.00	150	Horizontal	Pass
4	3050.000	47.35	-4.72	74.0	26.65	Peak	77.70	150	Horizontal	Pass
4**	3050.000	38.85	-4.72	54.0	15.15	AV	77.70	150	Horizontal	Pass
5	4290.000	48.37	-2.38	74.0	25.63	Peak	311.20	150	Horizontal	Pass
5**	4290.000	37.74	-2.38	54.0	16.26	AV	311.20	150	Horizontal	Pass
6	4924.000	50.36	-0.07	74.0	23.64	Peak	77.70	150	Horizontal	Pass
6**	4924.000	42.36	-0.07	54.0	11.64	AV	77.70	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_17.11.53

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

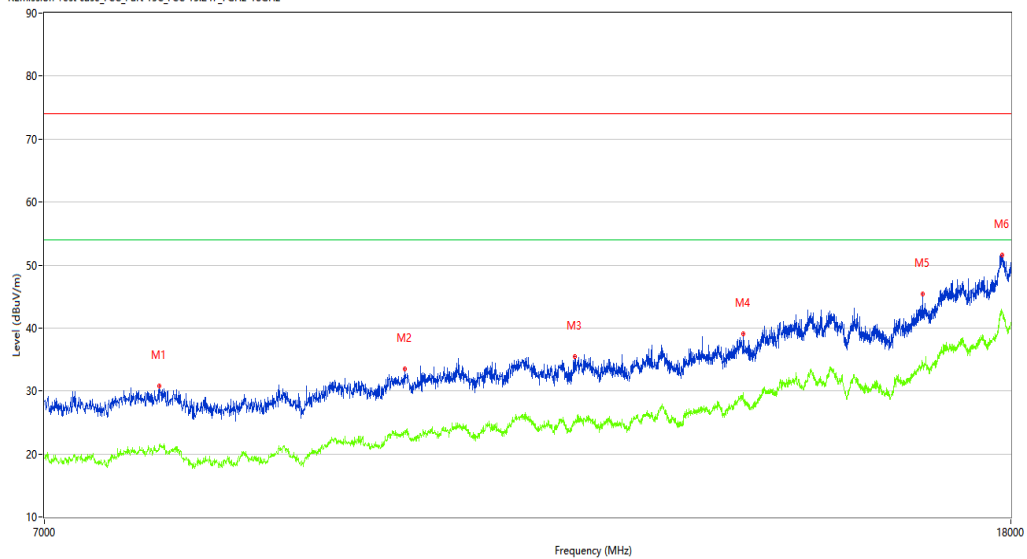

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7833.250	30.74	0.91	74.0	43.26	Peak	123.30	100	Horizontal	Pass
1**	7833.250	21.48	0.91	54.0	32.52	AV	123.30	100	Horizontal	Pass
2	9959.000	33.47	3.36	74.0	40.53	Peak	123.30	100	Horizontal	Pass
2**	9959.000	23.67	3.36	54.0	30.33	AV	123.30	100	Horizontal	Pass
3	11754.750	35.48	4.41	74.0	38.52	Peak	85.30	100	Horizontal	Pass
3**	11754.750	24.64	4.41	54.0	29.36	AV	85.30	100	Horizontal	Pass
4	13855.750	39.07	7.26	74.0	34.93	Peak	161.60	100	Horizontal	Pass
4**	13855.750	28.88	7.26	54.0	25.12	AV	161.60	100	Horizontal	Pass
5	16509.500	45.44	11.40	74.0	28.56	Peak	360.00	100	Horizontal	Pass
5**	16509.500	34.57	11.40	54.0	19.43	AV	360.00	100	Horizontal	Pass
6	17843.249	51.51	18.49	74.0	22.49	Peak	85.30	100	Horizontal	Pass
6**	17843.249	42.63	18.49	54.0	11.37	AV	85.30	100	Horizontal	Pass

WIFI2.4G-B-High channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-28_17.44.12

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

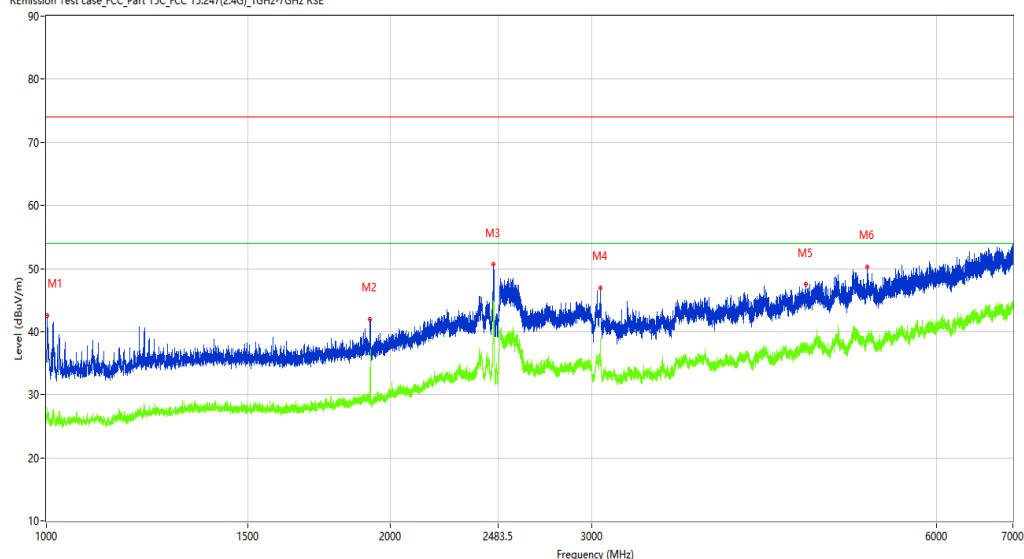

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1001.750	42.61	-14.81	74.0	31.39	Peak	187.80	100	Vertical	Pass
1**	1001.750	27.95	-14.81	54.0	26.05	AV	187.80	100	Vertical	Pass
2	1919.500	42.01	-12.26	74.0	31.99	Peak	205.30	100	Vertical	Pass
2**	1919.500	33.39	-12.26	54.0	20.61	AV	205.30	100	Vertical	Pass
3	2459.250	50.71	-6.62	74.0	23.29	Peak	69.90	100	Vertical	Pass
3**	2459.250	45.01	-6.62	54.0	8.99	AV	69.90	100	Vertical	Pass
4	3050.000	46.98	-4.72	74.0	27.02	Peak	360.00	100	Vertical	Pass
4**	3050.000	38.54	-4.72	54.0	15.46	AV	360.00	100	Vertical	Pass
5	4615.000	47.54	-1.27	74.0	26.46	Peak	290.70	100	Vertical	Pass
5**	4615.000	38.40	-1.27	54.0	15.60	AV	290.70	100	Vertical	Pass
6	5222.500	50.29	-0.03	74.0	23.71	Peak	286.00	100	Vertical	Pass
6**	5222.500	38.90	-0.03	54.0	15.10	AV	286.00	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.37.48

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7591.250	31.09	-0.02	74.0	42.91	Peak	293.20	100	Vertical	Pass
1**	7591.250	20.38	-0.02	54.0	33.62	AV	293.20	100	Vertical	Pass
2	9835.250	34.31	2.93	74.0	39.69	Peak	216.40	100	Vertical	Pass
2**	9835.250	23.10	2.93	54.0	30.90	AV	216.40	100	Vertical	Pass
3	11160.750	36.60	3.92	74.0	37.40	Peak	136.60	100	Vertical	Pass
3**	11160.750	26.02	3.92	54.0	27.98	AV	136.60	100	Vertical	Pass
4	13146.250	37.22	6.02	74.0	36.78	Peak	256.70	100	Vertical	Pass
4**	13146.250	27.17	6.02	54.0	26.83	AV	256.70	100	Vertical	Pass
5	15085.000	44.10	10.55	74.0	29.90	Peak	334.70	100	Vertical	Pass
5**	15085.000	33.63	10.55	54.0	20.37	AV	334.70	100	Vertical	Pass
6	17846.000	51.68	18.76	74.0	22.32	Peak	256.70	100	Vertical	Pass
6**	17846.000	42.32	18.76	54.0	11.68	AV	256.70	100	Vertical	Pass

WIFI2.4G-G-Low channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11:35:18

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

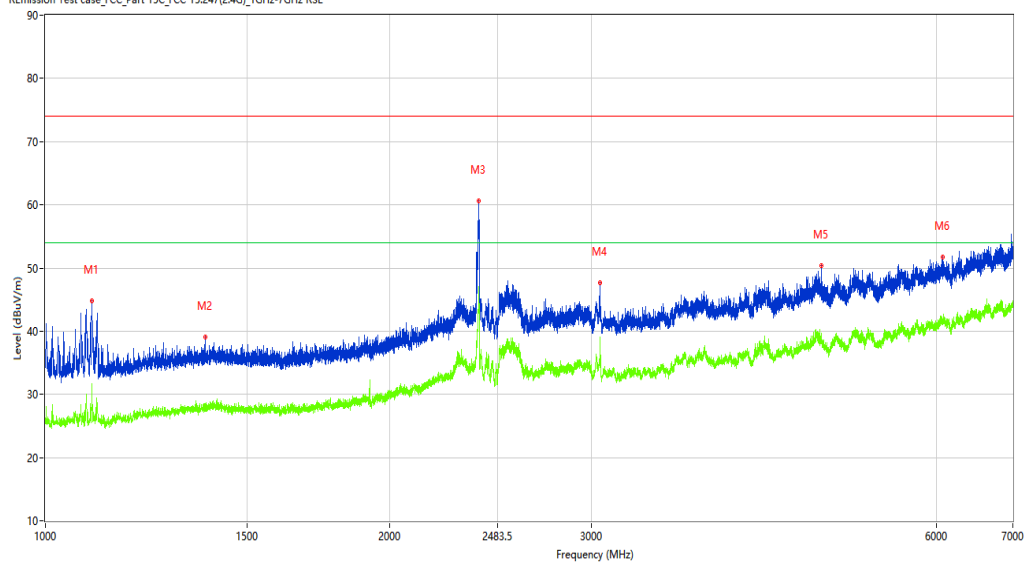

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1098.000	44.82	-15.03	74.0	29.18	Peak	192.90	150	Horizontal	Pass
1**	1098.000	29.60	-15.03	54.0	24.40	AV	192.90	150	Horizontal	Pass
2	1378.500	39.08	-13.45	74.0	34.92	Peak	45.40	150	Horizontal	Pass
2**	1378.500	27.50	-13.45	54.0	26.50	AV	45.40	150	Horizontal	Pass
3	2391.000	60.64	-6.29	74.0	13.36	Peak	317.40	150	Horizontal	Pass
3**	2391.000	47.10	-6.29	54.0	6.90	AV	317.40	150	Horizontal	Pass
4	3050.000	47.59	-4.72	74.0	26.41	Peak	227.50	150	Horizontal	Pass
4**	3050.000	39.12	-4.72	54.0	14.88	AV	227.50	150	Horizontal	Pass
5	4764.500	50.32	-0.78	74.0	23.68	Peak	234.10	150	Horizontal	Pass
5**	4764.500	39.05	-0.78	54.0	14.95	AV	234.10	150	Horizontal	Pass
6	6080.000	51.66	2.30	74.0	22.34	Peak	83.40	150	Horizontal	Pass
6**	6080.000	41.30	2.30	54.0	12.70	AV	83.40	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.55.37

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

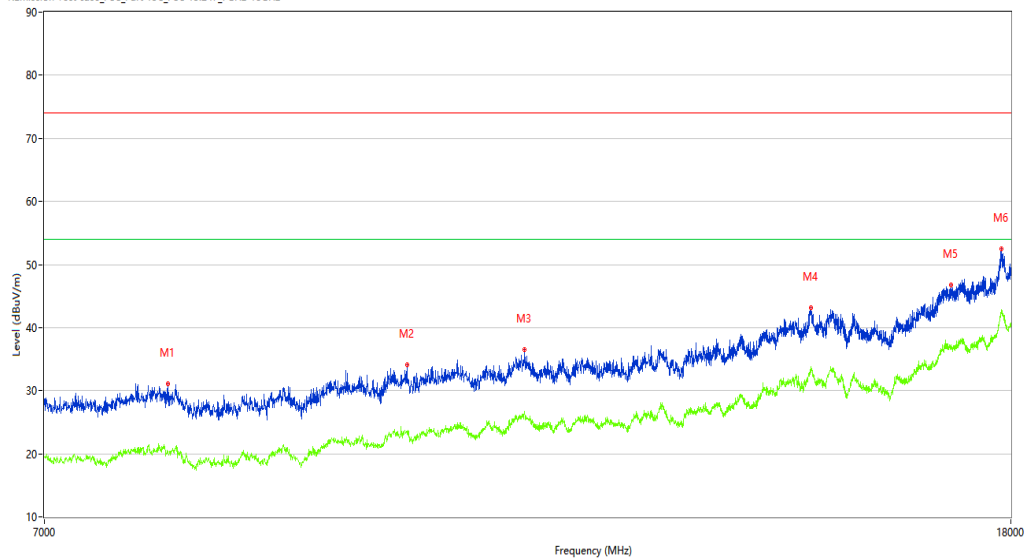

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7899.250	31.08	0.26	74.0	42.92	Peak	360.00	100	Horizontal	Pass
1**	7899.250	20.45	0.26	54.0	33.55	AV	360.00	100	Horizontal	Pass
2	9975.500	34.07	3.35	74.0	39.93	Peak	73.70	100	Horizontal	Pass
2**	9975.500	23.52	3.35	54.0	30.48	AV	73.70	100	Horizontal	Pass
3	11191.000	36.46	3.98	74.0	37.54	Peak	115.20	100	Horizontal	Pass
3**	11191.000	26.66	3.98	54.0	27.34	AV	115.20	100	Horizontal	Pass
4	14807.250	43.18	11.78	74.0	30.82	Peak	154.00	100	Horizontal	Pass
4**	14807.250	33.54	11.78	54.0	20.46	AV	154.00	100	Horizontal	Pass
5	16971.500	46.71	14.75	74.0	27.29	Peak	115.20	100	Horizontal	Pass
5**	16971.500	37.33	14.75	54.0	16.67	AV	115.20	100	Horizontal	Pass
6	17829.501	52.49	18.41	74.0	21.51	Peak	360.00	100	Horizontal	Pass
6**	17829.501	42.54	18.41	54.0	11.46	AV	360.00	100	Horizontal	Pass

WIFI2.4G-G-Low channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_10.15.38

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

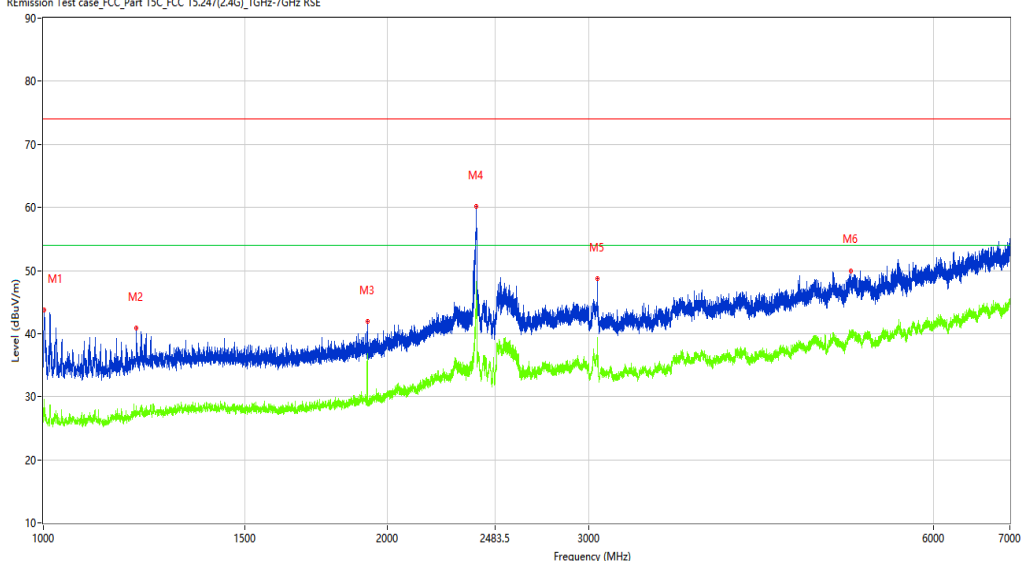

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1002.000	43.78	-14.80	74.0	30.22	Peak	340.70	150	Vertical	Pass
1**	1002.000	29.44	-14.80	54.0	24.56	AV	340.70	150	Vertical	Pass
2	1205.500	40.87	-14.49	74.0	33.13	Peak	134.30	150	Vertical	Pass
2**	1205.500	27.68	-14.49	54.0	26.32	AV	134.30	150	Vertical	Pass
3	1920.000	41.88	-12.27	74.0	32.12	Peak	75.30	150	Vertical	Pass
3**	1920.000	36.75	-12.27	54.0	17.25	AV	75.30	150	Vertical	Pass
4	2391.750	60.21	-5.11	74.0	13.79	Peak	75.30	150	Vertical	Pass
4**	2391.750	48.34	-5.11	54.0	5.66	AV	75.30	150	Vertical	Pass
5	3050.000	48.66	-4.72	74.0	25.34	Peak	32.00	150	Vertical	Pass
5**	3050.000	39.44	-4.72	54.0	14.56	AV	32.00	150	Vertical	Pass
6	5084.500	49.99	0.94	74.0	24.01	Peak	0.00	150	Vertical	Pass
6**	5084.500	40.16	0.94	54.0	13.84	AV	0.00	150	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.21.02

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7827.750	31.75	0.96	74.0	42.25	Peak	289.00	100	Vertical	Pass
1**	7827.750	20.74	0.96	54.0	33.26	AV	289.00	100	Vertical	Pass
2	9997.500	33.71	3.09	74.0	40.29	Peak	121.60	100	Vertical	Pass
2**	9997.500	23.39	3.09	54.0	30.61	AV	121.60	100	Vertical	Pass
3	11130.500	35.69	4.05	74.0	38.31	Peak	79.80	100	Vertical	Pass
3**	11130.500	26.31	4.05	54.0	27.69	AV	79.80	100	Vertical	Pass
4	12819.000	37.04	5.63	74.0	36.96	Peak	79.80	100	Vertical	Pass
4**	12819.000	27.66	5.63	54.0	26.34	AV	79.80	100	Vertical	Pass
5	15120.750	43.51	9.73	74.0	30.49	Peak	161.30	100	Vertical	Pass
5**	15120.750	33.61	9.73	54.0	20.39	AV	161.30	100	Vertical	Pass
6	17824.000	51.75	18.38	74.0	22.25	Peak	41.40	100	Vertical	Pass
6**	17824.000	42.19	18.38	54.0	11.81	AV	41.40	100	Vertical	Pass

WIFI2.4G-G-Middle channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.27.42

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

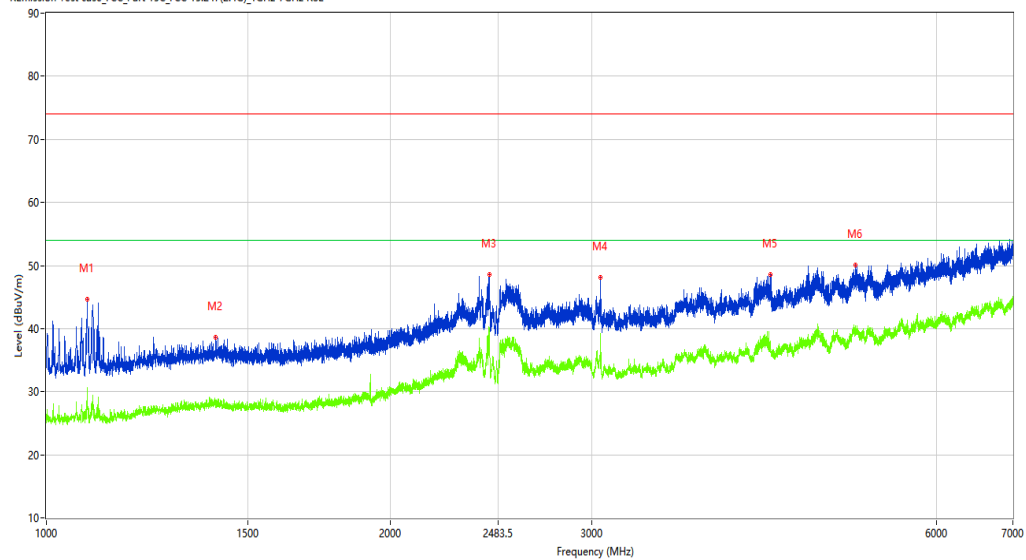

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1085.500	44.64	-14.99	74.0	29.36	Peak	192.60	150	Horizontal	Pass
1**	1085.500	28.67	-14.99	54.0	25.33	AV	192.60	150	Horizontal	Pass
2	1406.250	38.63	-13.27	74.0	35.37	Peak	178.50	150	Horizontal	Pass
2**	1406.250	28.71	-13.27	54.0	25.29	AV	178.50	150	Horizontal	Pass
3	2439.000	48.52	-5.88	74.0	25.48	Peak	184.70	150	Horizontal	Pass
3**	2439.000	39.12	-5.88	54.0	14.88	AV	184.70	150	Horizontal	Pass
4	3050.000	48.12	-4.72	74.0	25.88	Peak	304.80	150	Horizontal	Pass
4**	3050.000	39.27	-4.72	54.0	14.73	AV	304.80	150	Horizontal	Pass
5	4295.000	48.54	-2.33	74.0	25.46	Peak	316.90	150	Horizontal	Pass
5**	4295.000	36.24	-2.33	54.0	17.76	AV	316.90	150	Horizontal	Pass
6	5095.000	50.07	0.78	74.0	23.93	Peak	316.90	150	Horizontal	Pass
6**	5095.000	38.96	0.78	54.0	15.04	AV	316.90	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_17.03.58

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

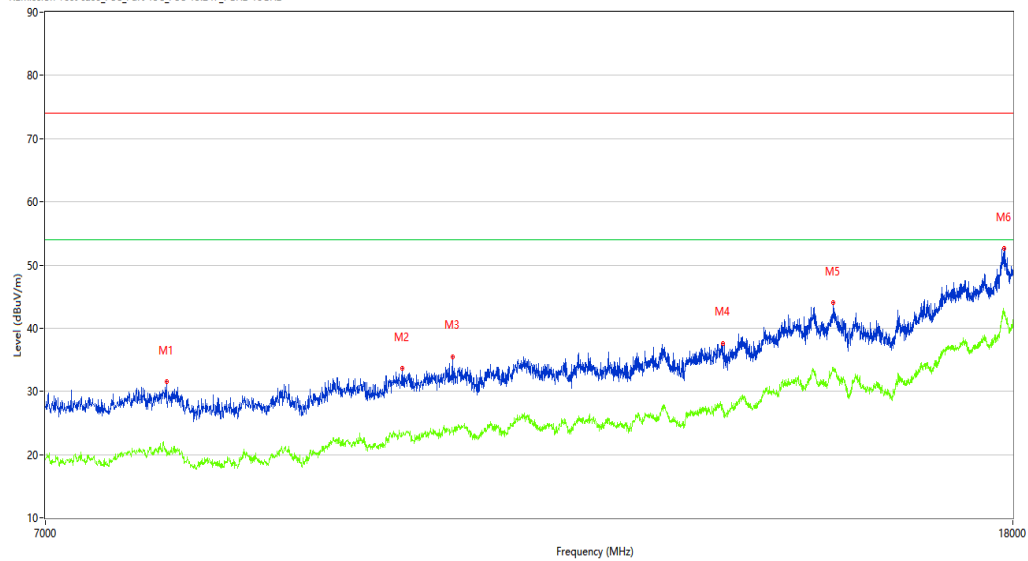

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7877.250	31.54	0.62	74.0	42.46	Peak	356.70	100	Horizontal	Pass
1**	7877.250	20.66	0.62	54.0	33.34	AV	356.70	100	Horizontal	Pass
2	9915.000	33.68	2.86	74.0	40.32	Peak	144.60	100	Horizontal	Pass
2**	9915.000	23.14	2.86	54.0	30.86	AV	144.60	100	Horizontal	Pass
3	10415.500	35.52	3.59	74.0	38.48	Peak	0.00	100	Horizontal	Pass
3**	10415.500	23.64	3.59	54.0	30.36	AV	0.00	100	Horizontal	Pass
4	13558.750	37.63	6.80	74.0	36.37	Peak	69.70	100	Horizontal	Pass
4**	13558.750	27.11	6.80	54.0	26.89	AV	69.70	100	Horizontal	Pass
5	15109.750	44.08	10.02	74.0	29.92	Peak	0.00	100	Horizontal	Pass
5**	15109.750	33.37	10.02	54.0	20.63	AV	0.00	100	Horizontal	Pass
6	17843.249	52.62	18.49	74.0	21.38	Peak	144.60	100	Horizontal	Pass
6**	17843.249	42.68	18.49	54.0	11.32	AV	144.60	100	Horizontal	Pass

WIFI2.4G-G-Middle channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-28_17.49.55

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

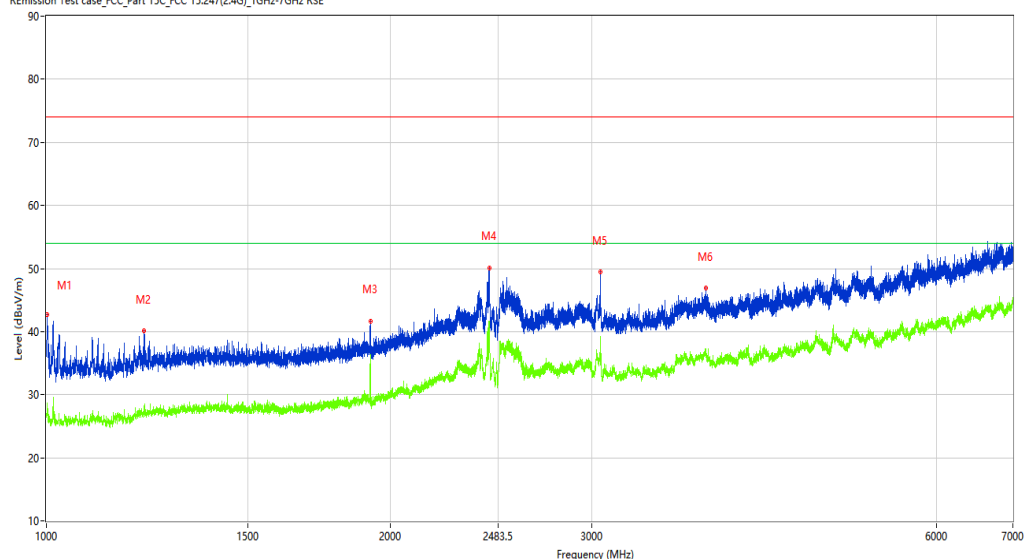

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1001.500	42.73	-14.81	74.0	31.27	Peak	185.80	100	Vertical	Pass
1**	1001.500	27.18	-14.81	54.0	26.82	AV	185.80	100	Vertical	Pass
2	1218.000	40.09	-14.26	74.0	33.91	Peak	143.00	100	Vertical	Pass
2**	1218.000	27.60	-14.26	54.0	26.40	AV	143.00	100	Vertical	Pass
3	1919.750	41.69	-12.26	74.0	32.31	Peak	252.80	100	Vertical	Pass
3**	1919.750	36.42	-12.26	54.0	17.58	AV	252.80	100	Vertical	Pass
4	2438.500	50.13	-5.88	74.0	23.87	Peak	109.90	100	Vertical	Pass
4**	2438.500	41.71	-5.88	54.0	12.29	AV	109.90	100	Vertical	Pass
5	3050.000	49.44	-4.72	74.0	24.56	Peak	244.00	100	Vertical	Pass
5**	3050.000	39.21	-4.72	54.0	14.79	AV	244.00	100	Vertical	Pass
6	3775.500	46.93	-2.56	74.0	27.07	Peak	11.20	100	Vertical	Pass
6**	3775.500	37.26	-2.56	54.0	16.74	AV	11.20	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.29.09

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%


Test Engineer: SDC

Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

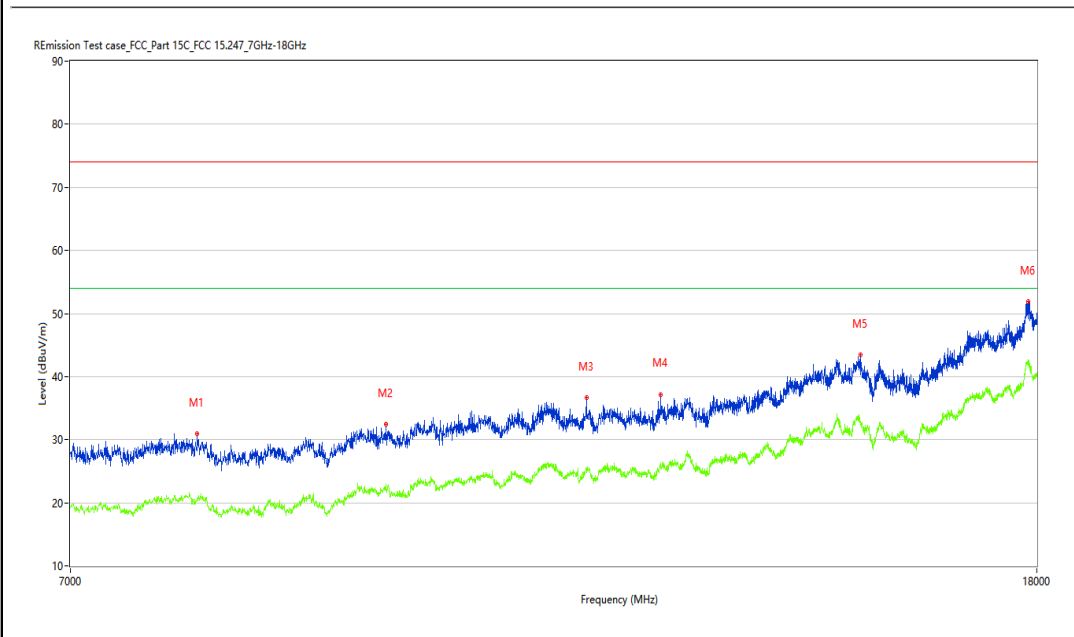

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7924.000	30.98	0.40	74.0	43.02	Peak	360.00	100	Vertical	Pass
1**	7924.000	20.71	0.40	54.0	33.29	AV	360.00	100	Vertical	Pass
2	9527.250	32.46	2.57	74.0	41.54	Peak	359.80	100	Vertical	Pass
2**	9527.250	23.01	2.57	54.0	30.99	AV	359.80	100	Vertical	Pass
3	11589.750	36.70	5.02	74.0	37.30	Peak	325.20	100	Vertical	Pass
3**	11589.750	24.83	5.02	54.0	29.17	AV	325.20	100	Vertical	Pass
4	12464.250	37.08	5.03	74.0	36.92	Peak	287.70	100	Vertical	Pass
4**	12464.250	26.01	5.03	54.0	27.99	AV	287.70	100	Vertical	Pass
5	15148.250	43.44	8.93	74.0	30.56	Peak	125.10	100	Vertical	Pass
5**	15148.250	32.91	8.93	54.0	21.09	AV	125.10	100	Vertical	Pass
6	17846.000	51.89	18.76	74.0	22.11	Peak	359.80	100	Vertical	Pass
6**	17846.000	42.23	18.76	54.0	11.77	AV	359.80	100	Vertical	Pass

WIFI2.4G-G-High channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.23.27

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

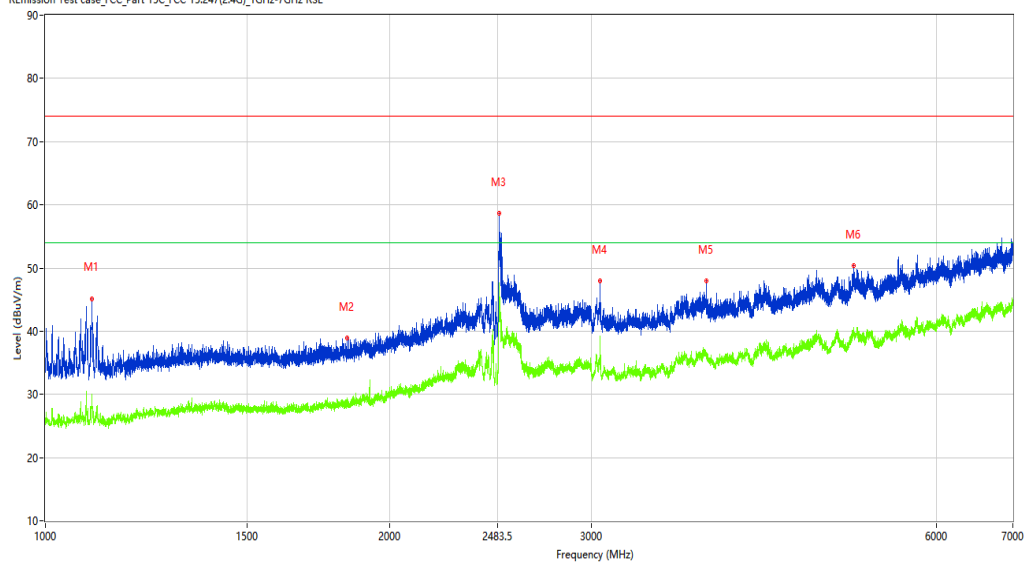

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1097.750	45.17	-15.03	74.0	28.83	Peak	193.10	150	Horizontal	Pass
1**	1097.750	30.02	-15.03	54.0	23.98	AV	193.10	150	Horizontal	Pass
2	1835.750	38.88	-13.03	74.0	35.12	Peak	264.50	150	Horizontal	Pass
2**	1835.750	28.42	-13.03	54.0	25.58	AV	264.50	150	Horizontal	Pass
3	2490.250	58.70	-7.22	74.0	15.30	Peak	244.00	150	Horizontal	Pass
3**	2490.250	45.01	-7.22	54.0	8.99	AV	244.00	150	Horizontal	Pass
4	3050.000	47.99	-4.72	74.0	26.01	Peak	360.00	150	Horizontal	Pass
4**	3050.000	39.30	-4.72	54.0	14.70	AV	360.00	150	Horizontal	Pass
5	3778.500	47.93	-2.73	74.0	26.07	Peak	297.10	150	Horizontal	Pass
5**	3778.500	36.39	-2.73	54.0	17.61	AV	297.10	150	Horizontal	Pass
6	5080.500	50.32	0.88	74.0	23.68	Peak	80.70	150	Horizontal	Pass
6**	5080.500	39.89	0.88	54.0	14.11	AV	80.70	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_17.13.44

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX

Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7709.500	30.98	0.82	74.0	43.02	Peak	3.00	100	Horizontal	Pass
1**	7709.500	20.54	0.82	54.0	33.46	AV	3.00	100	Horizontal	Pass
2	9807.750	32.44	2.94	74.0	41.56	Peak	291.70	100	Horizontal	Pass
2**	9807.750	22.88	2.94	54.0	31.12	AV	291.70	100	Horizontal	Pass
3	11155.250	36.37	3.98	74.0	37.63	Peak	121.00	100	Horizontal	Pass
3**	11155.250	26.04	3.98	54.0	27.96	AV	121.00	100	Horizontal	Pass
4	12799.750	39.00	5.87	74.0	35.00	Peak	121.00	100	Horizontal	Pass
4**	12799.750	27.95	5.87	54.0	26.05	AV	121.00	100	Horizontal	Pass
5	15043.750	43.22	10.29	74.0	30.78	Peak	333.00	100	Horizontal	Pass
5**	15043.750	32.79	10.29	54.0	21.21	AV	333.00	100	Horizontal	Pass
6	17867.999	52.34	18.44	74.0	21.66	Peak	3.00	100	Horizontal	Pass
6**	17867.999	42.12	18.44	54.0	11.88	AV	3.00	100	Horizontal	Pass

WIFI2.4G-G-High channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-28_17.47.06

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

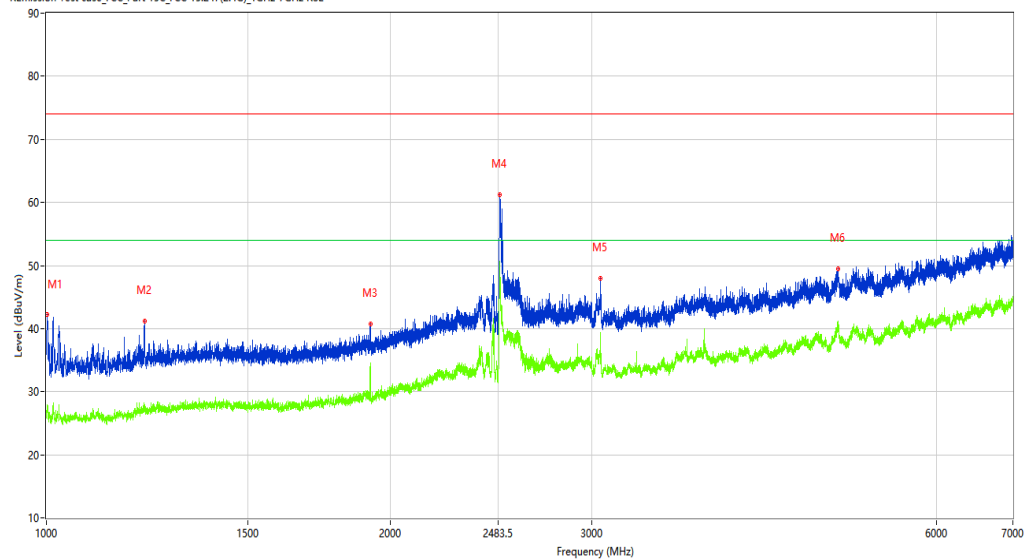

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1002.250	42.19	-14.79	74.0	31.81	Peak	193.60	100	Vertical	Pass
1**	1002.250	27.45	-14.79	54.0	26.55	AV	193.60	100	Vertical	Pass
2	1218.500	41.13	-14.23	74.0	32.87	Peak	174.30	100	Vertical	Pass
2**	1218.500	27.39	-14.23	54.0	26.61	AV	174.30	100	Vertical	Pass
3	1920.250	40.77	-12.27	74.0	33.23	Peak	198.10	100	Vertical	Pass
3**	1920.250	34.63	-12.27	54.0	19.37	AV	198.10	100	Vertical	Pass
4	2491.250	61.26	-7.25	74.0	12.74	Peak	245.70	100	Vertical	Pass
4**	2491.250	49.52	-7.25	54.0	4.48	AV	245.70	100	Vertical	Pass
5	3050.000	47.93	-4.72	74.0	26.07	Peak	235.60	100	Vertical	Pass
5**	3050.000	39.31	-4.72	54.0	14.69	AV	235.60	100	Vertical	Pass
6	4925.000	49.40	-0.07	74.0	24.60	Peak	95.00	100	Vertical	Pass
6**	4925.000	41.00	-0.07	54.0	13.00	AV	95.00	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.42.18

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

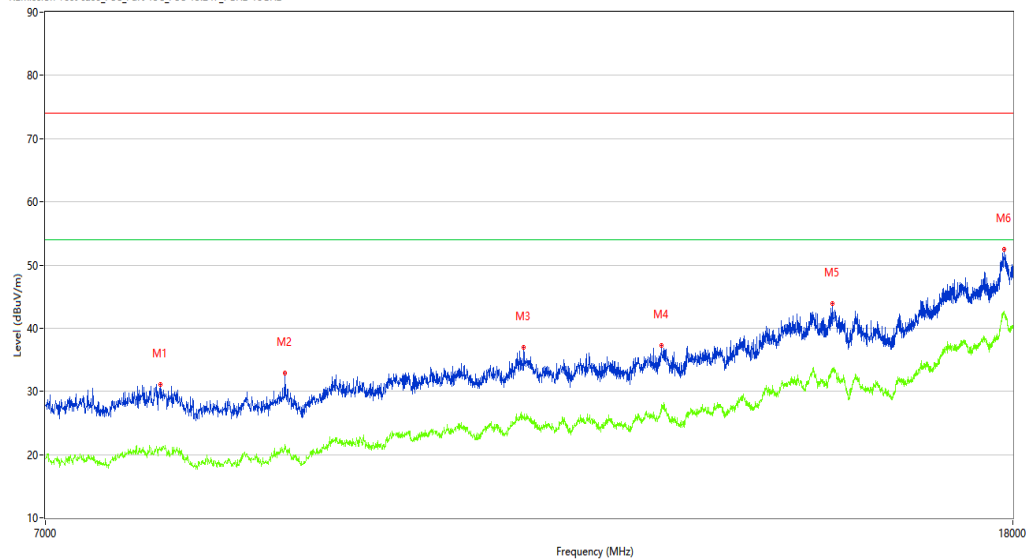

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7833.250	31.09	0.91	74.0	42.91	Peak	65.20	100	Vertical	Pass
1**	7833.250	20.77	0.91	54.0	33.23	AV	65.20	100	Vertical	Pass
2	8845.250	32.85	0.41	74.0	41.15	Peak	196.70	100	Vertical	Pass
2**	8845.250	21.67	0.41	54.0	32.33	AV	196.70	100	Vertical	Pass
3	11166.250	36.97	3.91	74.0	37.03	Peak	239.20	100	Vertical	Pass
3**	11166.250	25.71	3.91	54.0	28.29	AV	239.20	100	Vertical	Pass
4	12772.250	37.29	5.61	74.0	36.71	Peak	357.30	100	Vertical	Pass
4**	12772.250	26.75	5.61	54.0	27.25	AV	357.30	100	Vertical	Pass
5	15096.001	43.85	10.41	74.0	30.15	Peak	154.90	100	Vertical	Pass
5**	15096.001	33.71	10.41	54.0	20.29	AV	154.90	100	Vertical	Pass
6	17843.249	52.48	18.49	74.0	21.52	Peak	280.20	100	Vertical	Pass
6**	17843.249	42.17	18.49	54.0	11.83	AV	280.20	100	Vertical	Pass

WIFI2.4G-N-Low channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.10.59

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

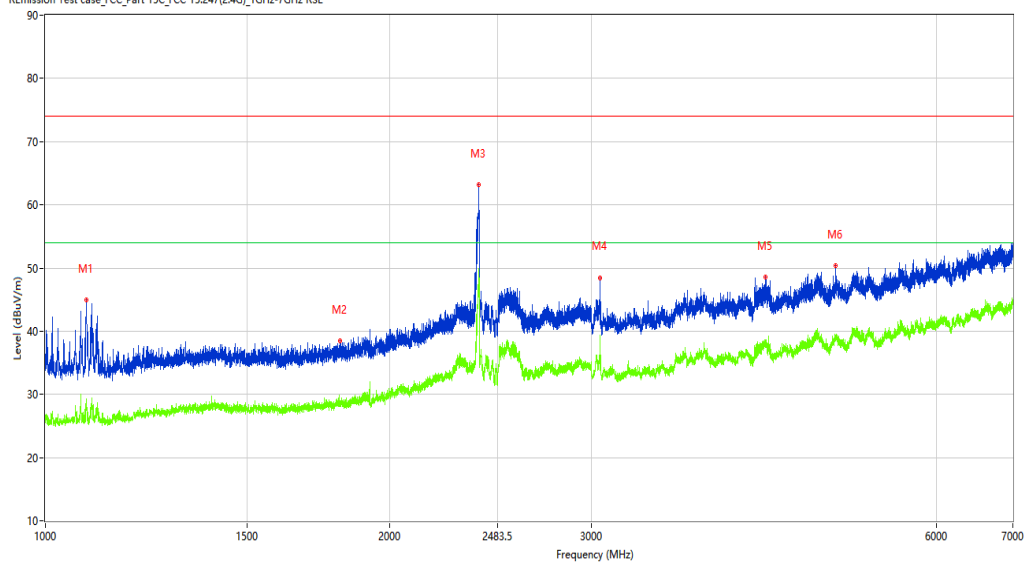

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1086.000	44.89	-14.99	74.0	29.11	Peak	195.10	150	Horizontal	Pass
1**	1086.000	29.35	-14.99	54.0	24.65	AV	195.10	150	Horizontal	Pass
2	1808.000	38.47	-12.90	74.0	35.53	Peak	343.40	150	Horizontal	Pass
2**	1808.000	29.03	-12.90	54.0	24.97	AV	343.40	150	Horizontal	Pass
3	2390.750	63.12	-6.37	74.0	10.88	Peak	319.70	150	Horizontal	Pass
3**	2390.750	47.96	-6.37	54.0	6.04	AV	319.70	150	Horizontal	Pass
4	3050.500	48.47	-5.39	74.0	25.53	Peak	313.70	150	Horizontal	Pass
4**	3050.500	39.32	-5.39	54.0	14.68	AV	313.70	150	Horizontal	Pass
5	4257.000	48.57	-2.12	74.0	25.43	Peak	313.70	150	Horizontal	Pass
5**	4257.000	38.08	-2.12	54.0	15.92	AV	313.70	150	Horizontal	Pass
6	4904.500	50.34	-0.01	74.0	23.66	Peak	230.70	150	Horizontal	Pass
6**	4904.500	38.92	-0.01	54.0	15.08	AV	230.70	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.57.26

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

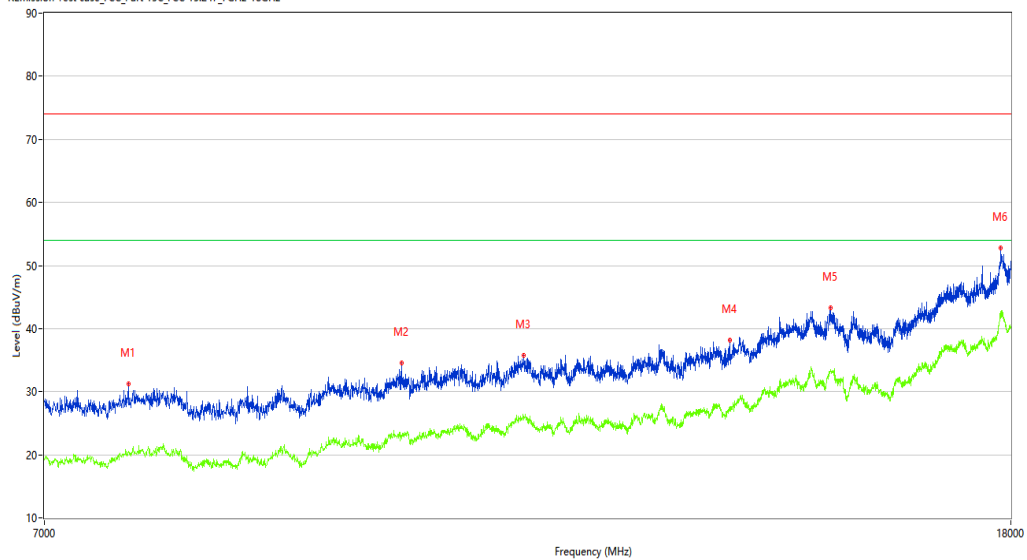

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7599.500	31.19	0.02	74.0	42.81	Peak	341.10	100	Horizontal	Pass
1**	7599.500	20.47	0.02	54.0	33.53	AV	341.10	100	Horizontal	Pass
2	9923.250	34.52	2.90	74.0	39.48	Peak	223.30	100	Horizontal	Pass
2**	9923.250	22.46	2.90	54.0	31.54	AV	223.30	100	Horizontal	Pass
3	11182.750	35.73	3.81	74.0	38.27	Peak	360.00	100	Horizontal	Pass
3**	11182.750	25.82	3.81	54.0	28.18	AV	360.00	100	Horizontal	Pass
4	13674.250	38.11	7.12	74.0	35.89	Peak	0.00	100	Horizontal	Pass
4**	13674.250	27.40	7.12	54.0	26.60	AV	0.00	100	Horizontal	Pass
5	15090.500	43.33	10.42	74.0	30.67	Peak	360.00	100	Horizontal	Pass
5**	15090.500	33.15	10.42	54.0	20.85	AV	360.00	100	Horizontal	Pass
6	17826.750	52.72	18.38	74.0	21.28	Peak	223.30	100	Horizontal	Pass
6**	17826.750	42.53	18.38	54.0	11.47	AV	223.30	100	Horizontal	Pass

WIFI2.4G-N-Low channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_10.19.44

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

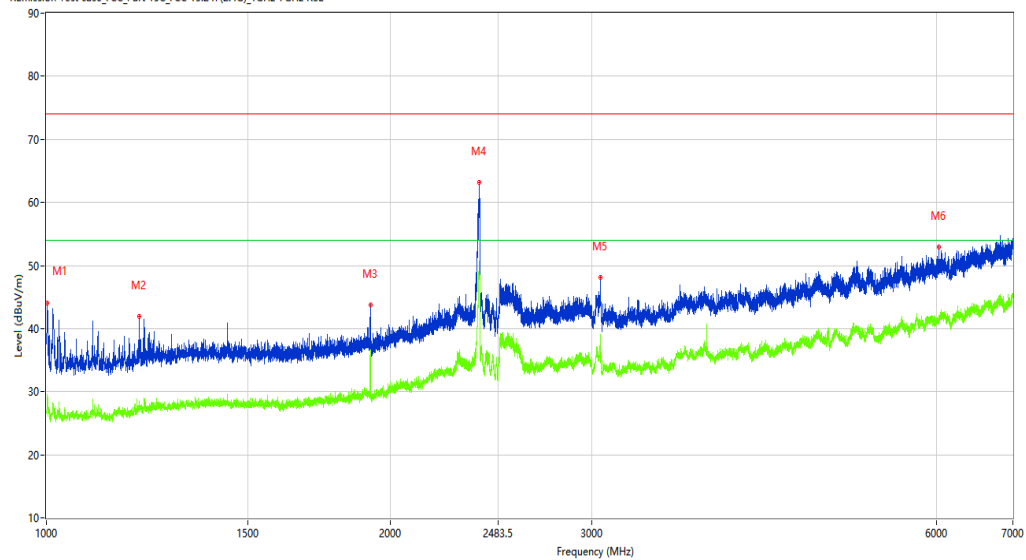

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1002.250	44.04	-14.79	74.0	29.96	Peak	195.50	150	Vertical	Pass
1**	1002.250	29.62	-14.79	54.0	24.38	AV	195.50	150	Vertical	Pass
2	1205.750	41.97	-14.49	74.0	32.03	Peak	137.00	150	Vertical	Pass
2**	1205.750	28.02	-14.49	54.0	25.98	AV	137.00	150	Vertical	Pass
3	1919.750	43.75	-12.26	74.0	30.25	Peak	202.50	150	Vertical	Pass
3**	1919.750	36.71	-12.26	54.0	17.29	AV	202.50	150	Vertical	Pass
4	2390.750	63.21	-6.37	74.0	10.79	Peak	266.90	150	Vertical	Pass
4**	2390.750	48.62	-6.37	54.0	5.38	AV	266.90	150	Vertical	Pass
5	3050.500	48.12	-5.39	74.0	25.88	Peak	160.20	150	Vertical	Pass
5**	3050.500	38.46	-5.39	54.0	15.54	AV	160.20	150	Vertical	Pass
6	6036.000	52.92	1.70	74.0	21.08	Peak	0.00	150	Vertical	Pass
6**	6036.000	41.54	1.70	54.0	12.46	AV	0.00	150	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.22.58

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

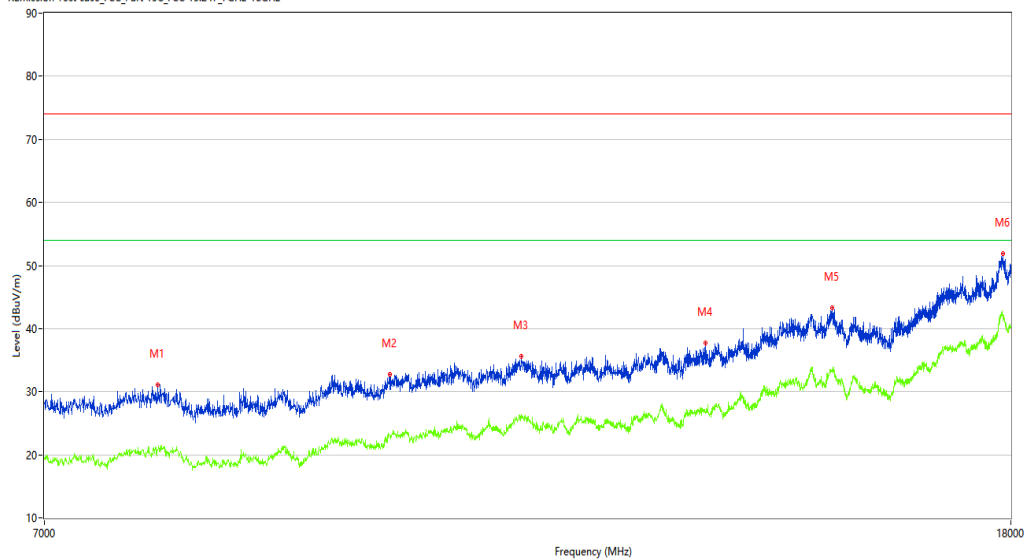

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7822.250	31.03	0.81	74.0	42.97	Peak	67.90	100	Vertical	Pass
1**	7822.250	20.69	0.81	54.0	33.31	AV	67.90	100	Vertical	Pass
2	9807.750	32.76	2.94	74.0	41.24	Peak	0.00	100	Vertical	Pass
2**	9807.750	22.81	2.94	54.0	31.19	AV	0.00	100	Vertical	Pass
3	11155.250	35.54	3.98	74.0	38.46	Peak	360.00	100	Vertical	Pass
3**	11155.250	25.77	3.98	54.0	28.23	AV	360.00	100	Vertical	Pass
4	13360.750	37.72	6.18	74.0	36.28	Peak	233.00	100	Vertical	Pass
4**	13360.750	26.71	6.18	54.0	27.29	AV	233.00	100	Vertical	Pass
5	15118.000	43.29	9.83	74.0	30.71	Peak	67.90	100	Vertical	Pass
5**	15118.000	33.87	9.83	54.0	20.13	AV	67.90	100	Vertical	Pass
6	17867.999	51.88	18.44	74.0	22.12	Peak	24.10	100	Vertical	Pass
6**	17867.999	41.91	18.44	54.0	12.09	AV	24.10	100	Vertical	Pass

WIFI2.4G-N-Middle channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.14.42

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

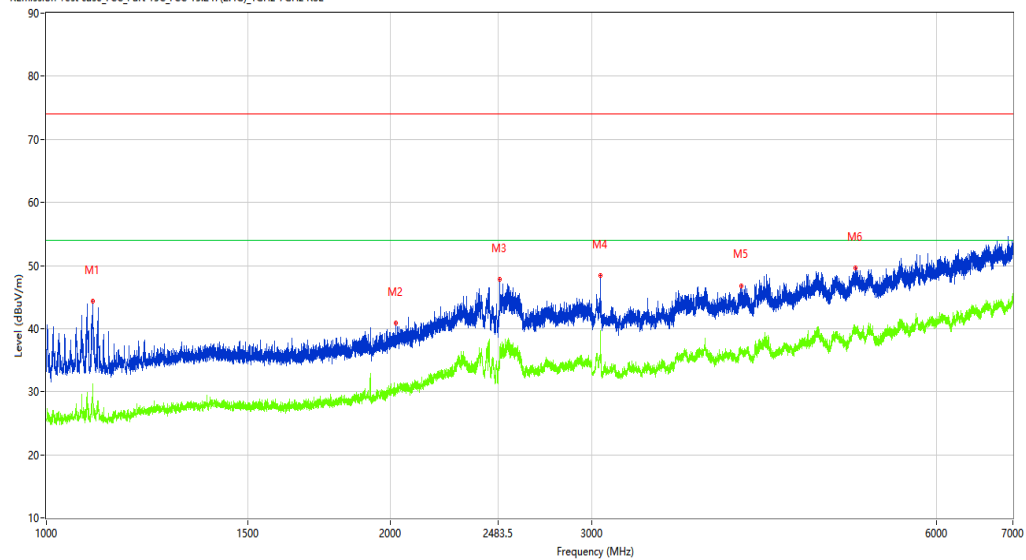

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1097.750	44.33	-15.03	74.0	29.67	Peak	194.40	150	Horizontal	Pass
1**	1097.750	28.51	-15.03	54.0	25.49	AV	194.40	150	Horizontal	Pass
2	2021.250	40.83	-11.12	74.0	33.17	Peak	346.40	150	Horizontal	Pass
2**	2021.250	30.03	-11.12	54.0	23.97	AV	346.40	150	Horizontal	Pass
3	2492.750	47.82	-7.30	74.0	26.18	Peak	257.20	150	Horizontal	Pass
3**	2492.750	36.49	-7.30	54.0	17.51	AV	257.20	150	Horizontal	Pass
4	3050.000	48.42	-4.72	74.0	25.58	Peak	80.20	150	Horizontal	Pass
4**	3050.000	39.74	-4.72	54.0	14.26	AV	80.20	150	Horizontal	Pass
5	4051.000	46.83	-1.74	74.0	27.17	Peak	228.90	150	Horizontal	Pass
5**	4051.000	36.16	-1.74	54.0	17.84	AV	228.90	150	Horizontal	Pass
6	5099.500	49.66	0.81	74.0	24.34	Peak	21.10	150	Horizontal	Pass
6**	5099.500	39.68	0.81	54.0	14.32	AV	21.10	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_17.05.30

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

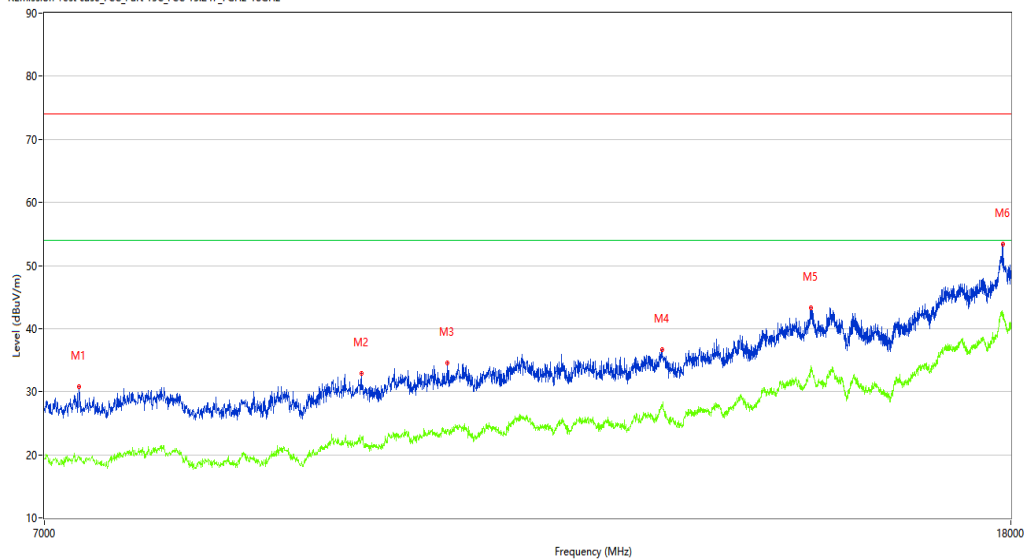

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7242.000	30.72	-0.25	74.0	43.28	Peak	128.90	100	Horizontal	Pass
1**	7242.000	19.58	-0.25	54.0	34.42	AV	128.90	100	Horizontal	Pass
2	9541.000	32.91	2.48	74.0	41.09	Peak	360.00	100	Horizontal	Pass
2**	9541.000	22.50	2.48	54.0	31.50	AV	360.00	100	Horizontal	Pass
3	10374.250	34.53	3.60	74.0	39.47	Peak	215.60	100	Horizontal	Pass
3**	10374.250	23.80	3.60	54.0	30.20	AV	215.60	100	Horizontal	Pass
4	12802.500	36.69	5.84	74.0	37.31	Peak	334.00	100	Horizontal	Pass
4**	12802.500	27.56	5.84	54.0	26.44	AV	334.00	100	Horizontal	Pass
5	14801.750	43.26	11.54	74.0	30.74	Peak	334.00	100	Horizontal	Pass
5**	14801.750	33.05	11.54	54.0	20.95	AV	334.00	100	Horizontal	Pass
6	17859.750	53.40	18.55	74.0	20.60	Peak	47.10	100	Horizontal	Pass
6**	17859.750	42.12	18.55	54.0	11.88	AV	47.10	100	Horizontal	Pass

WIFI2.4G-N-Middle channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_10.24.25

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

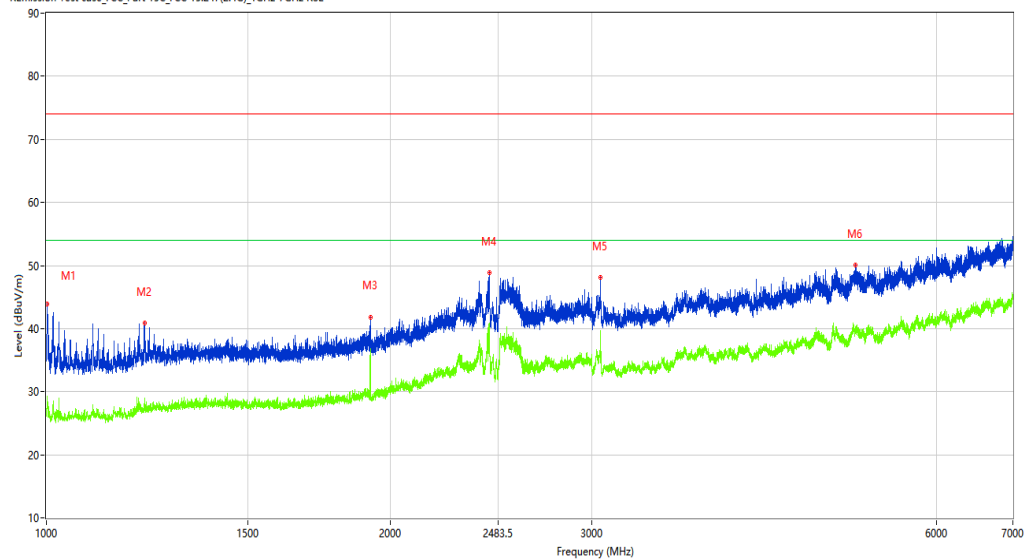

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1001.750	43.88	-14.81	74.0	30.12	Peak	337.20	150	Vertical	Pass
1**	1001.750	28.65	-14.81	54.0	25.35	AV	337.20	150	Vertical	Pass
2	1218.500	40.93	-14.23	74.0	33.07	Peak	137.30	150	Vertical	Pass
2**	1218.500	28.97	-14.23	54.0	25.03	AV	137.30	150	Vertical	Pass
3	1920.000	41.84	-12.27	74.0	32.16	Peak	206.50	150	Vertical	Pass
3**	1920.000	36.84	-12.27	54.0	17.16	AV	206.50	150	Vertical	Pass
4	2439.000	48.87	-5.88	74.0	25.13	Peak	81.20	150	Vertical	Pass
4**	2439.000	40.62	-5.88	54.0	13.38	AV	81.20	150	Vertical	Pass
5	3050.000	48.10	-4.72	74.0	25.90	Peak	0.00	150	Vertical	Pass
5**	3050.000	39.62	-4.72	54.0	14.38	AV	0.00	150	Vertical	Pass
6	5095.000	50.00	0.78	74.0	24.00	Peak	230.90	150	Vertical	Pass
6**	5095.000	39.50	0.78	54.0	14.50	AV	230.90	150	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.31.02

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

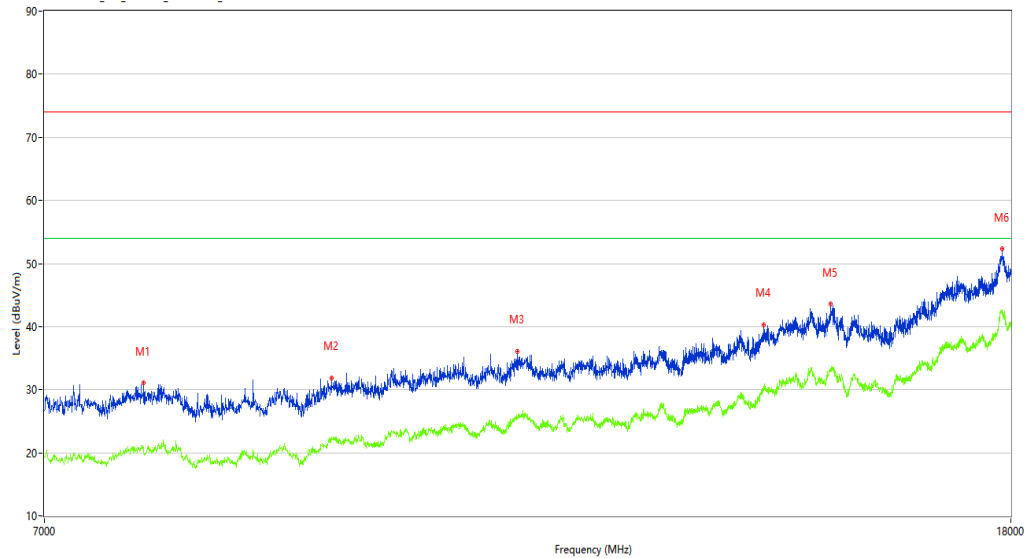

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7715.000	31.09	0.34	74.0	42.91	Peak	323.70	100	Vertical	Pass
1**	7715.000	20.03	0.34	54.0	33.97	AV	323.70	100	Vertical	Pass
2	9268.750	31.91	1.65	74.0	42.09	Peak	280.50	100	Vertical	Pass
2**	9268.750	22.49	1.65	54.0	31.51	AV	280.50	100	Vertical	Pass
3	11116.750	36.12	3.98	74.0	37.88	Peak	323.70	100	Vertical	Pass
3**	11116.750	25.55	3.98	54.0	28.45	AV	323.70	100	Vertical	Pass
4	14139.000	40.34	8.54	74.0	33.66	Peak	83.00	100	Vertical	Pass
4**	14139.000	30.63	8.54	54.0	23.37	AV	83.00	100	Vertical	Pass
5	15096.001	43.55	10.41	74.0	30.45	Peak	0.50	100	Vertical	Pass
5**	15096.001	33.29	10.41	54.0	20.71	AV	0.50	100	Vertical	Pass
6	17848.750	52.29	18.72	74.0	21.71	Peak	0.00	100	Vertical	Pass
6**	17848.750	42.73	18.72	54.0	11.27	AV	0.00	100	Vertical	Pass

WIFI2.4G-N-High channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.19.00

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

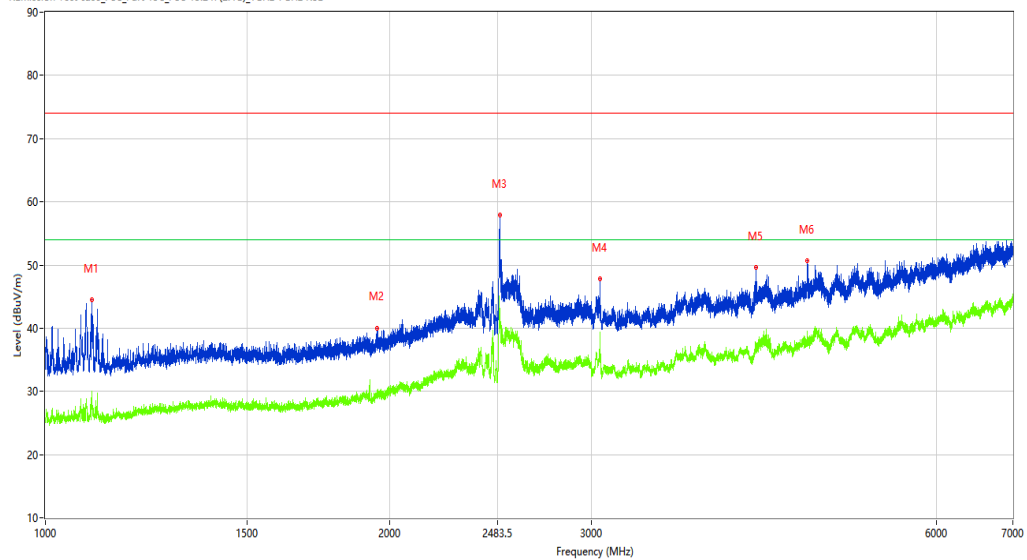

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1097.250	44.49	-15.03	74.0	29.51	Peak	192.60	150	Horizontal	Pass
1**	1097.250	28.50	-15.03	54.0	25.50	AV	192.60	150	Horizontal	Pass
2	1949.750	40.03	-11.76	74.0	33.97	Peak	55.10	150	Horizontal	Pass
2**	1949.750	28.82	-11.76	54.0	25.18	AV	55.10	150	Horizontal	Pass
3	2493.750	57.96	-7.30	74.0	16.04	Peak	248.70	150	Horizontal	Pass
3**	2493.750	42.64	-7.30	54.0	11.36	AV	248.70	150	Horizontal	Pass
4	3050.500	47.84	-5.39	74.0	26.16	Peak	87.30	150	Horizontal	Pass
4**	3050.500	39.11	-5.39	54.0	14.89	AV	87.30	150	Horizontal	Pass
5	4178.500	49.61	-2.54	74.0	24.39	Peak	313.50	150	Horizontal	Pass
5**	4178.500	36.72	-2.54	54.0	17.28	AV	313.50	150	Horizontal	Pass
6	4630.000	50.69	-1.41	74.0	23.31	Peak	236.60	150	Horizontal	Pass
6**	4630.000	39.57	-1.41	54.0	14.43	AV	236.60	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_17.16.06

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

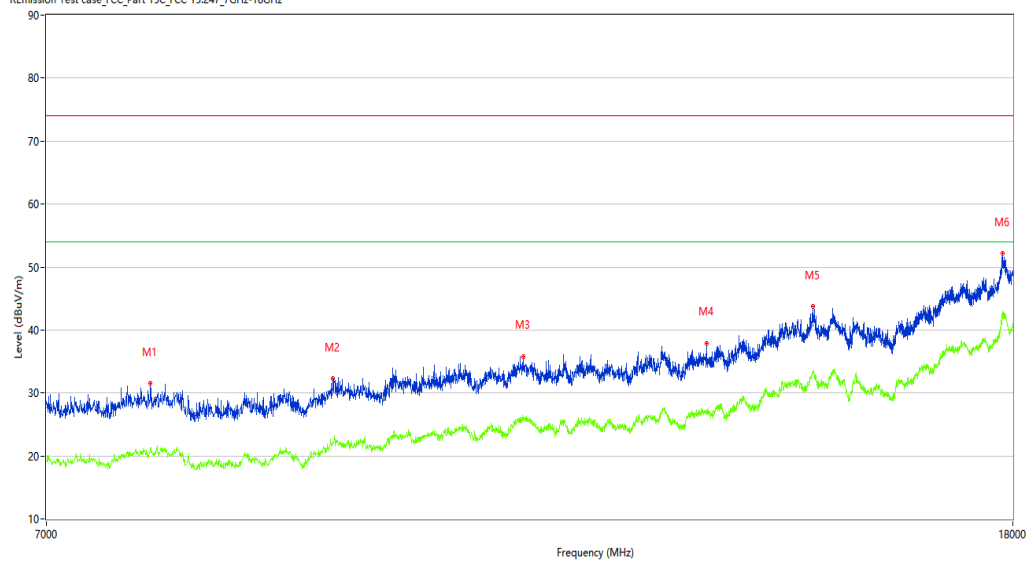

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7748.000	31.53	0.52	74.0	42.47	Peak	31.60	100	Horizontal	Pass
1**	7748.000	21.32	0.52	54.0	32.68	AV	31.60	100	Horizontal	Pass
2	9263.250	32.26	1.44	74.0	41.74	Peak	68.90	100	Horizontal	Pass
2**	9263.250	22.19	1.44	54.0	31.81	AV	68.90	100	Horizontal	Pass
3	11155.250	35.82	3.98	74.0	38.18	Peak	272.10	100	Horizontal	Pass
3**	11155.250	25.70	3.98	54.0	28.30	AV	272.10	100	Horizontal	Pass
4	13347.000	37.93	6.13	74.0	36.07	Peak	192.80	100	Horizontal	Pass
4**	13347.000	27.21	6.13	54.0	26.79	AV	192.80	100	Horizontal	Pass
5	14801.750	43.77	11.54	74.0	30.23	Peak	235.50	100	Horizontal	Pass
5**	14801.750	33.34	11.54	54.0	20.66	AV	235.50	100	Horizontal	Pass
6	17815.751	52.22	18.25	74.0	21.78	Peak	360.00	100	Horizontal	Pass
6**	17815.751	41.84	18.25	54.0	12.16	AV	360.00	100	Horizontal	Pass

WIFI2.4G-N-High channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_10.28.23

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

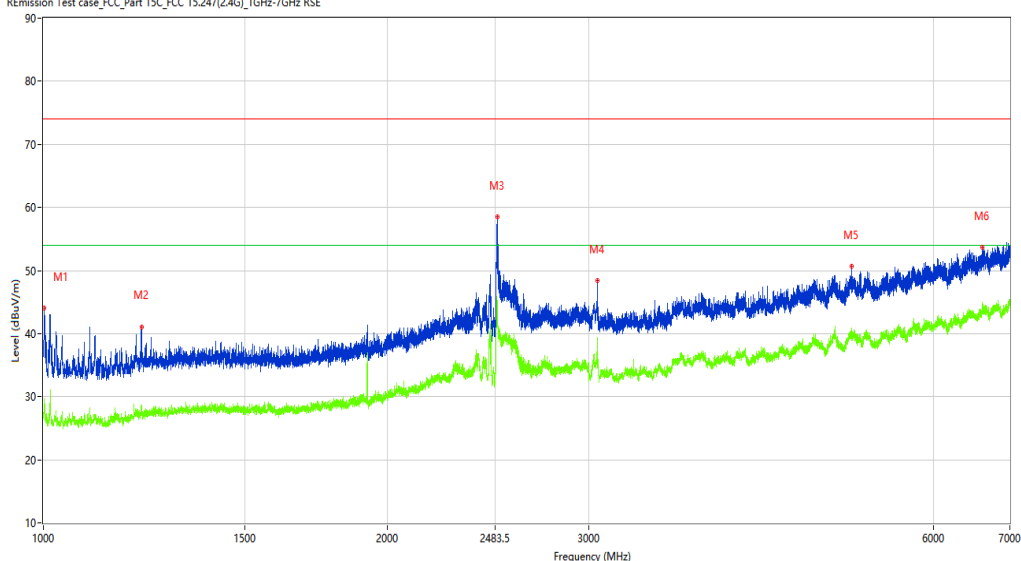

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1002.000	44.00	-14.80	74.0	30.00	Peak	181.50	150	Vertical	Pass
1**	1002.000	29.74	-14.80	54.0	24.26	AV	181.50	150	Vertical	Pass
2	1218.250	41.09	-14.25	74.0	32.91	Peak	122.20	150	Vertical	Pass
2**	1218.250	28.54	-14.25	54.0	25.46	AV	122.20	150	Vertical	Pass
3	2494.000	58.52	-7.30	74.0	15.48	Peak	45.90	150	Vertical	Pass
3**	2494.000	42.76	-7.30	54.0	11.24	AV	45.90	150	Vertical	Pass
4	3050.000	48.41	-4.72	74.0	25.59	Peak	46.60	150	Vertical	Pass
4**	3050.000	39.31	-4.72	54.0	14.69	AV	46.60	150	Vertical	Pass
5	5089.500	50.63	0.83	74.0	23.37	Peak	158.50	150	Vertical	Pass
5**	5089.500	39.76	0.83	54.0	14.24	AV	158.50	150	Vertical	Pass
6	6622.000	53.66	3.66	74.0	20.34	Peak	302.10	150	Vertical	Pass
6**	6622.000	43.14	3.66	54.0	10.86	AV	302.10	150	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.45.06

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

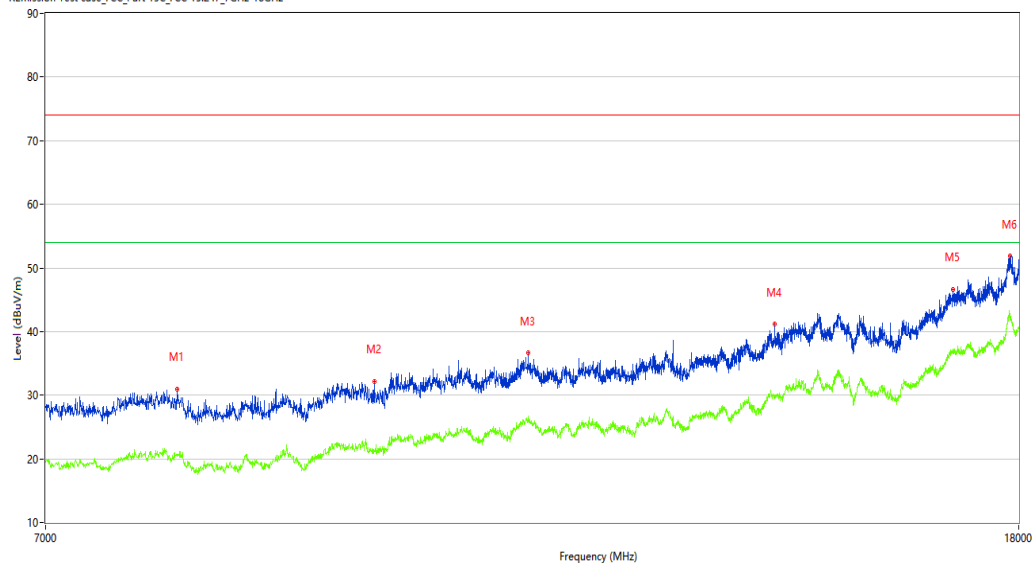

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7954.250	31.01	0.81	74.0	42.99	Peak	128.90	100	Vertical	Pass
1**	7954.250	20.45	0.81	54.0	33.55	AV	128.90	100	Vertical	Pass
2	9629.000	32.20	2.11	74.0	41.80	Peak	128.90	100	Vertical	Pass
2**	9629.000	21.22	2.11	54.0	32.78	AV	128.90	100	Vertical	Pass
3	11182.750	36.62	3.81	74.0	37.38	Peak	248.70	100	Vertical	Pass
3**	11182.750	26.70	3.81	54.0	27.30	AV	248.70	100	Vertical	Pass
4	14202.250	41.18	8.11	74.0	32.82	Peak	209.20	100	Vertical	Pass
4**	14202.250	29.81	8.11	54.0	24.19	AV	209.20	100	Vertical	Pass
5	16883.500	46.68	14.14	74.0	27.32	Peak	0.00	100	Vertical	Pass
5**	16883.500	36.98	14.14	54.0	17.02	AV	0.00	100	Vertical	Pass
6	17848.750	51.93	18.72	74.0	22.07	Peak	128.90	100	Vertical	Pass
6**	17848.750	42.86	18.72	54.0	11.14	AV	128.90	100	Vertical	Pass

WIFI2.4G-N40-Low channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_10:57:52

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

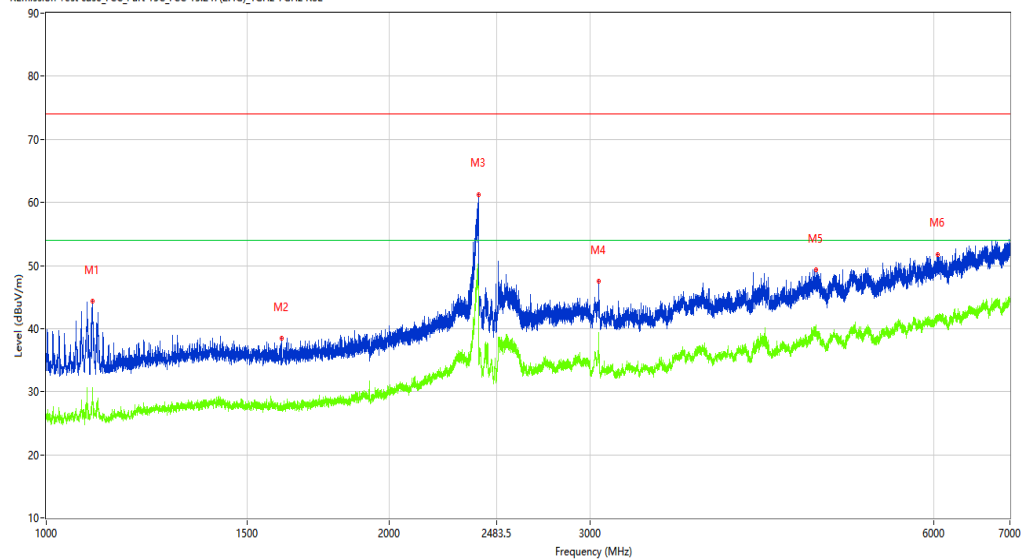

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1097.500	44.36	-15.03	74.0	29.64	Peak	193.90	150	Horizontal	Pass
1**	1097.500	29.58	-15.03	54.0	24.42	AV	193.90	150	Horizontal	Pass
2	1608.250	38.46	-13.92	74.0	35.54	Peak	255.00	150	Horizontal	Pass
2**	1608.250	27.70	-13.92	54.0	26.30	AV	255.00	150	Horizontal	Pass
3	2392.500	61.28	-4.72	74.0	12.72	Peak	319.40	150	Horizontal	Pass
3**	2392.500	45.49	-4.72	54.0	8.51	AV	319.40	150	Horizontal	Pass
4	3050.000	47.50	-4.72	74.0	26.50	Peak	317.90	150	Horizontal	Pass
4**	3050.000	39.43	-4.72	54.0	14.57	AV	317.90	150	Horizontal	Pass
5	4735.000	49.36	-0.32	74.0	24.64	Peak	311.70	150	Horizontal	Pass
5**	4735.000	40.56	-0.32	54.0	13.44	AV	311.70	150	Horizontal	Pass
6	6050.500	51.79	1.93	74.0	22.21	Peak	360.00	150	Horizontal	Pass
6**	6050.500	41.62	1.93	54.0	12.38	AV	360.00	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.59.40

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

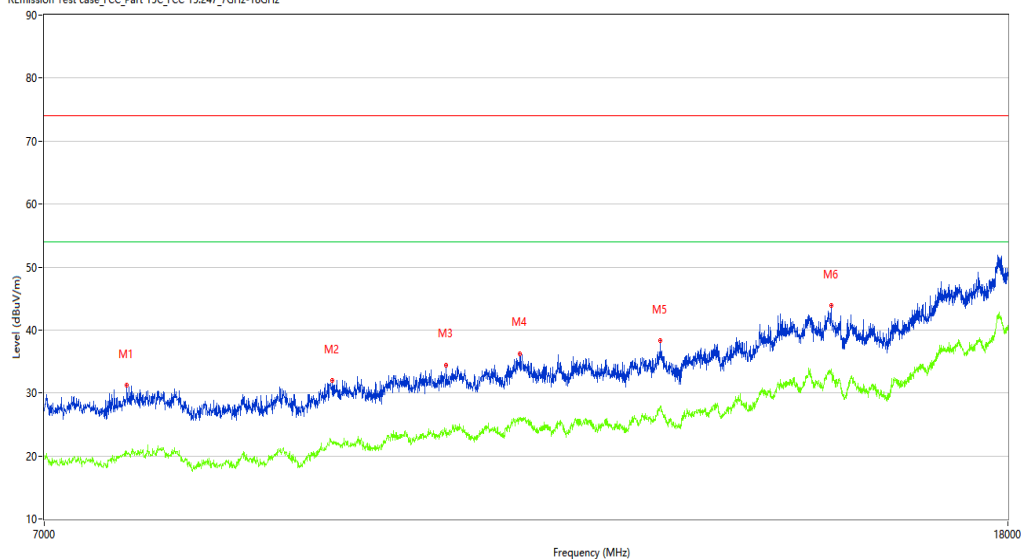

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7591.250	31.22	-0.02	74.0	42.78	Peak	187.30	100	Horizontal	Pass
1**	7591.250	20.43	-0.02	54.0	33.57	AV	187.30	100	Horizontal	Pass
2	9282.500	32.00	1.38	74.0	42.00	Peak	356.70	100	Horizontal	Pass
2**	9282.500	22.01	1.38	54.0	31.99	AV	356.70	100	Horizontal	Pass
3	10377.000	34.47	3.64	74.0	39.53	Peak	231.80	100	Horizontal	Pass
3**	10377.000	23.66	3.64	54.0	30.34	AV	231.80	100	Horizontal	Pass
4	11155.250	36.26	3.98	74.0	37.74	Peak	360.00	100	Horizontal	Pass
4**	11155.250	26.04	3.98	54.0	27.96	AV	360.00	100	Horizontal	Pass
5	12802.500	38.34	5.84	74.0	35.66	Peak	360.00	100	Horizontal	Pass
5**	12802.500	27.92	5.84	54.0	26.08	AV	360.00	100	Horizontal	Pass
6	15134.500	43.94	9.30	74.0	30.06	Peak	0.00	100	Horizontal	Pass
6**	15134.500	33.46	9.30	54.0	20.54	AV	0.00	100	Horizontal	Pass

WIFI2.4G-N40-Low channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_10.42.20

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

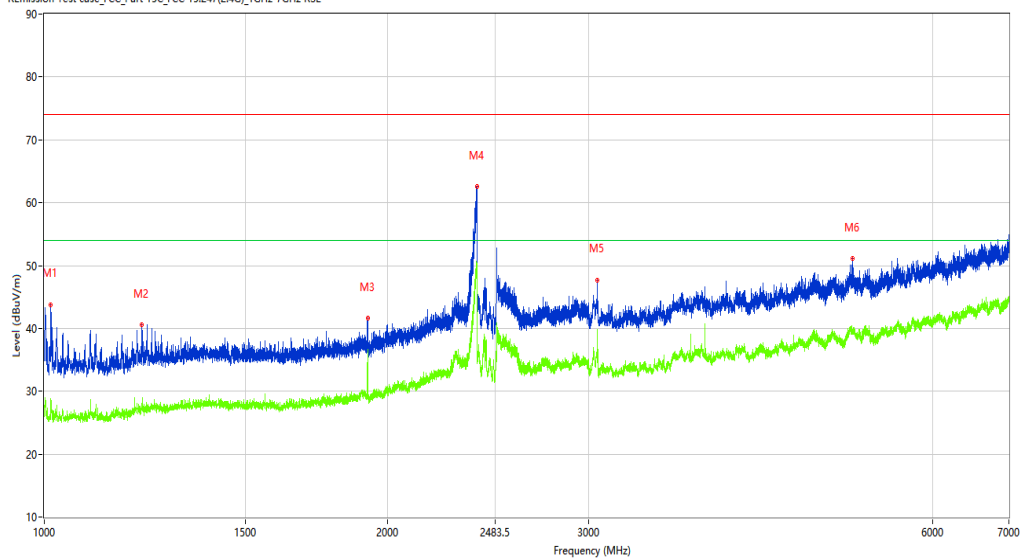

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1013.500	43.80	-14.91	74.0	30.20	Peak	188.90	150	Vertical	Pass
1**	1013.500	28.77	-14.91	54.0	25.23	AV	188.90	150	Vertical	Pass
2	1218.000	40.54	-14.26	74.0	33.46	Peak	183.00	150	Vertical	Pass
2**	1218.000	27.77	-14.26	54.0	26.23	AV	183.00	150	Vertical	Pass
3	1920.250	41.59	-12.27	74.0	32.41	Peak	208.50	150	Vertical	Pass
3**	1920.250	36.68	-12.27	54.0	17.32	AV	208.50	150	Vertical	Pass
4	2392.500	62.57	-4.72	74.0	11.43	Peak	266.80	150	Vertical	Pass
4**	2392.500	50.32	-4.72	54.0	3.68	AV	266.80	150	Vertical	Pass
5	3050.000	47.73	-4.72	74.0	26.27	Peak	288.20	150	Vertical	Pass
5**	3050.000	39.83	-4.72	54.0	14.17	AV	288.20	150	Vertical	Pass
6	5110.500	51.14	0.43	74.0	22.86	Peak	17.90	150	Vertical	Pass
6**	5110.500	39.86	0.43	54.0	14.14	AV	17.90	150	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.24.43

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

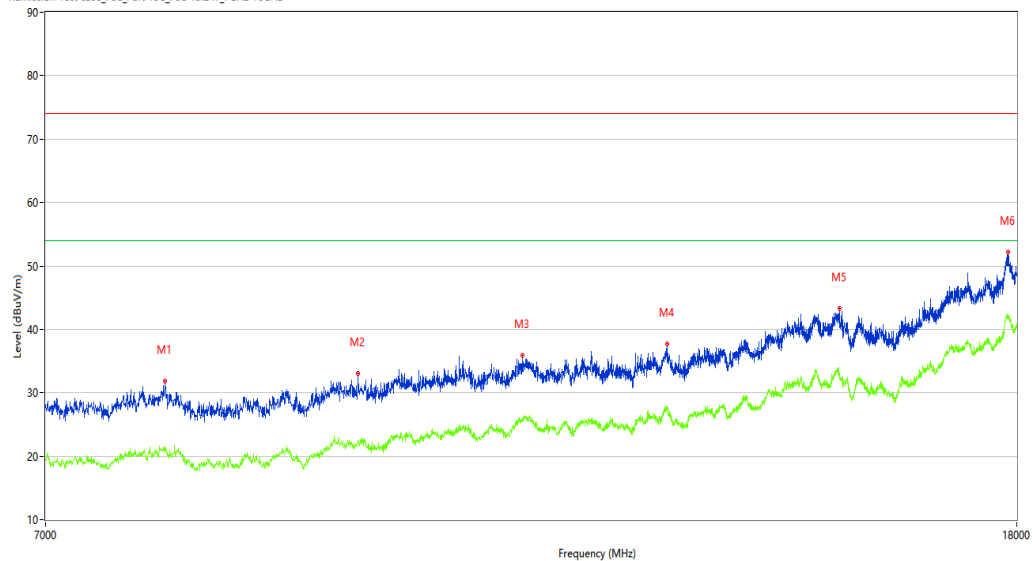

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7863.500	31.86	1.12	74.0	42.14	Peak	297.90	100	Vertical	Pass
1**	7863.500	20.73	1.12	54.0	33.27	AV	297.90	100	Vertical	Pass
2	9486.000	33.06	2.18	74.0	40.94	Peak	297.90	100	Vertical	Pass
2**	9486.000	22.28	2.18	54.0	31.72	AV	297.90	100	Vertical	Pass
3	11133.250	35.89	4.03	74.0	38.11	Peak	343.10	100	Vertical	Pass
3**	11133.250	25.85	4.03	54.0	28.15	AV	343.10	100	Vertical	Pass
4	12807.999	37.74	5.69	74.0	36.26	Peak	2.90	100	Vertical	Pass
4**	12807.999	27.55	5.69	54.0	26.45	AV	2.90	100	Vertical	Pass
5	15148.250	43.23	8.93	74.0	30.77	Peak	214.40	100	Vertical	Pass
5**	15148.250	33.10	8.93	54.0	20.90	AV	214.40	100	Vertical	Pass
6	17854.251	52.11	18.55	74.0	21.89	Peak	91.40	100	Vertical	Pass
6**	17854.251	42.25	18.55	54.0	11.75	AV	91.40	100	Vertical	Pass

WIFI2.4G-N40-Middle channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.02.03

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

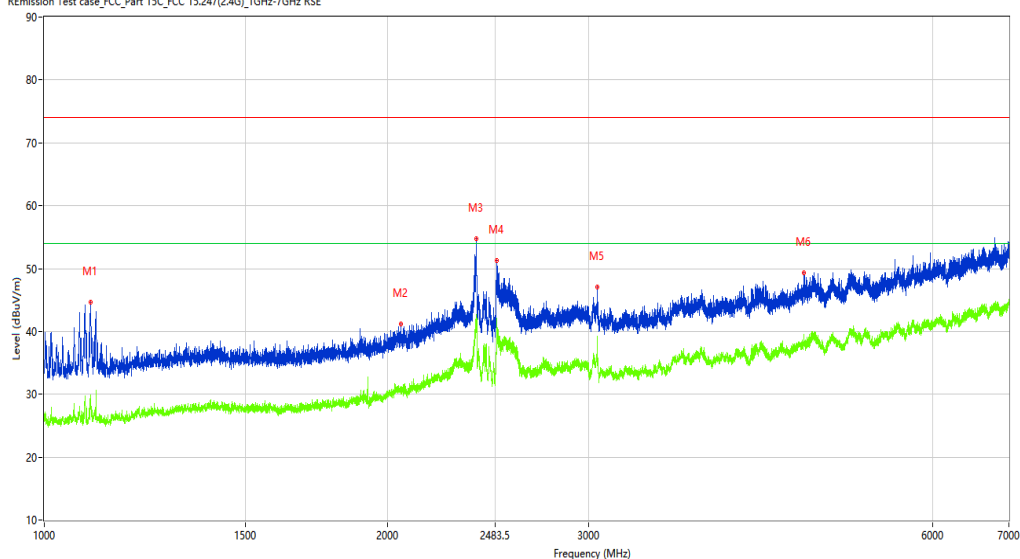

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1098.000	44.67	-15.03	74.0	29.33	Peak	197.10	150	Horizontal	Pass
1**	1098.000	29.96	-15.03	54.0	24.04	AV	197.10	150	Horizontal	Pass
2	2053.500	41.19	-10.53	74.0	32.81	Peak	268.20	150	Horizontal	Pass
2**	2053.500	30.93	-10.53	54.0	23.07	AV	268.20	150	Horizontal	Pass
3	2390.250	54.74	-6.54	74.0	19.26	Peak	340.90	150	Horizontal	Pass
3**	2390.250	42.64	-6.54	54.0	11.36	AV	340.90	150	Horizontal	Pass
4	2491.250	51.28	-7.25	74.0	22.72	Peak	321.90	150	Horizontal	Pass
4**	2491.250	38.99	-7.25	54.0	15.01	AV	321.90	150	Horizontal	Pass
5	3050.000	47.04	-4.72	74.0	26.96	Peak	0.10	150	Horizontal	Pass
5**	3050.000	39.18	-4.72	54.0	14.82	AV	0.10	150	Horizontal	Pass
6	4632.500	49.34	-1.42	74.0	24.66	Peak	272.40	150	Horizontal	Pass
6**	4632.500	37.79	-1.42	54.0	16.21	AV	272.40	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_17.07.27

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

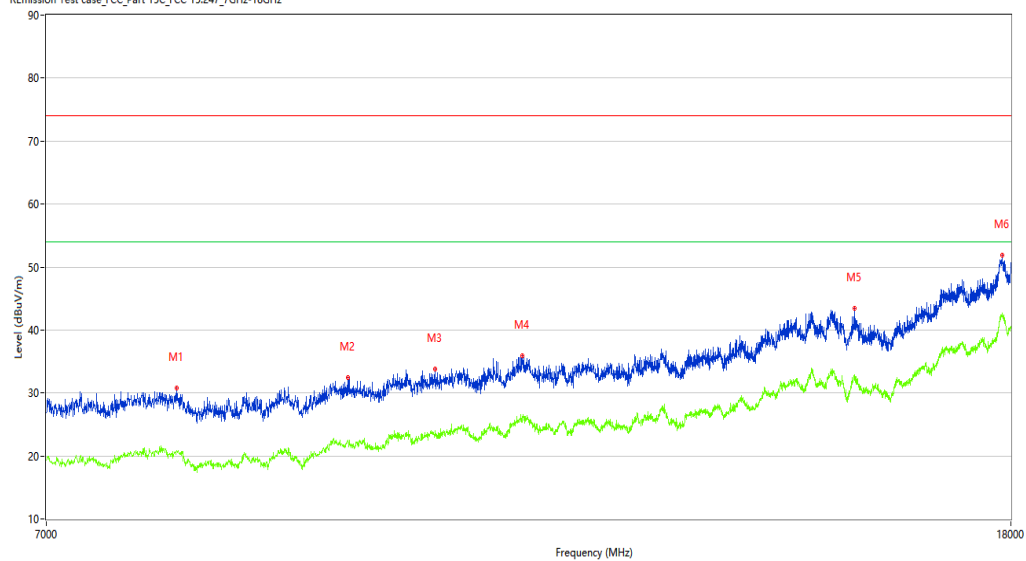

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7954.250	30.81	0.81	74.0	43.19	Peak	314.10	100	Horizontal	Pass
1**	7954.250	20.84	0.81	54.0	33.16	AV	314.10	100	Horizontal	Pass
2	9406.250	32.38	1.76	74.0	41.62	Peak	35.60	100	Horizontal	Pass
2**	9406.250	22.52	1.76	54.0	31.48	AV	35.60	100	Horizontal	Pass
3	10239.500	33.73	3.00	74.0	40.27	Peak	72.40	100	Horizontal	Pass
3**	10239.500	24.01	3.00	54.0	29.99	AV	72.40	100	Horizontal	Pass
4	11152.500	35.95	3.87	74.0	38.05	Peak	35.60	100	Horizontal	Pass
4**	11152.500	25.40	3.87	54.0	28.60	AV	35.60	100	Horizontal	Pass
5	15439.750	43.47	9.25	74.0	30.53	Peak	35.60	100	Horizontal	Pass
5**	15439.750	32.86	9.25	54.0	21.14	AV	35.60	100	Horizontal	Pass
6	17854.251	51.81	18.55	74.0	22.19	Peak	72.40	100	Horizontal	Pass
6**	17854.251	42.30	18.55	54.0	11.70	AV	72.40	100	Horizontal	Pass

WIFI2.4G-N40-Middle channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_10.38.01

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

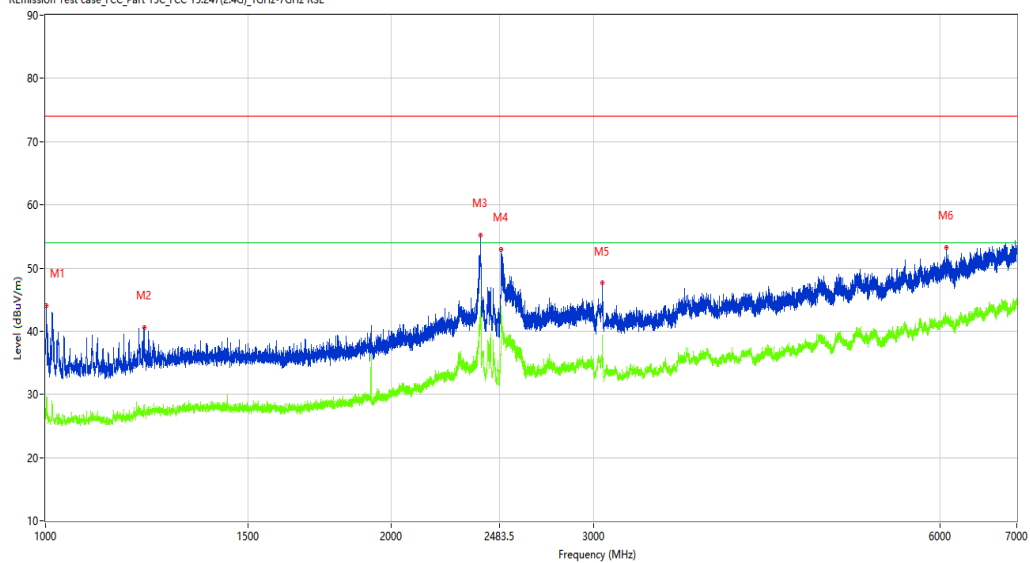

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1001.750	44.09	-14.81	74.0	29.91	Peak	192.20	150	Vertical	Pass
1**	1001.750	29.58	-14.81	54.0	24.42	AV	192.20	150	Vertical	Pass
2	1218.250	40.65	-14.25	74.0	33.35	Peak	117.10	150	Vertical	Pass
2**	1218.250	27.54	-14.25	54.0	26.46	AV	117.10	150	Vertical	Pass
3	2390.750	55.25	-6.37	74.0	18.75	Peak	266.80	150	Vertical	Pass
3**	2390.750	42.68	-6.37	54.0	11.32	AV	266.80	150	Vertical	Pass
4	2490.750	52.97	-7.24	74.0	21.03	Peak	70.60	150	Vertical	Pass
4**	2490.750	40.80	-7.24	54.0	13.20	AV	70.60	150	Vertical	Pass
5	3050.000	47.59	-4.72	74.0	26.41	Peak	310.50	150	Vertical	Pass
5**	3050.000	39.30	-4.72	54.0	14.70	AV	310.50	150	Vertical	Pass
6	6078.000	53.31	2.27	74.0	20.69	Peak	139.20	150	Vertical	Pass
6**	6078.000	41.91	2.27	54.0	12.09	AV	139.20	150	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.33.31

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

R emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

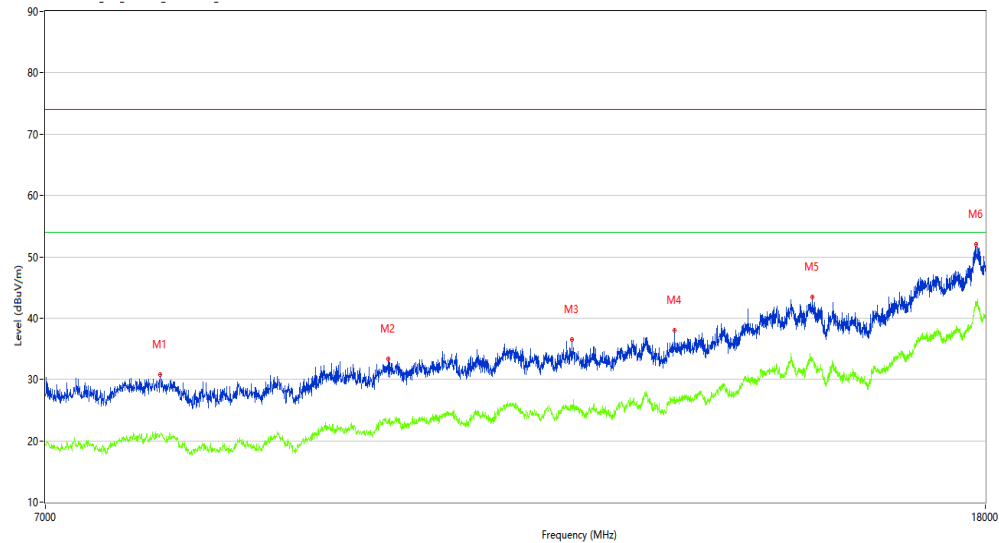

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7855.250	30.77	1.03	74.0	43.23	Peak	329.00	100	Vertical	Pass
1**	7855.250	20.98	1.03	54.0	33.02	AV	329.00	100	Vertical	Pass
2	9879.250	33.37	2.76	74.0	40.63	Peak	250.70	100	Vertical	Pass
2**	9879.250	22.97	2.76	54.0	31.03	AV	250.70	100	Vertical	Pass
3	11881.250	36.56	3.90	74.0	37.44	Peak	47.40	100	Vertical	Pass
3**	11881.250	25.38	3.90	54.0	28.62	AV	47.40	100	Vertical	Pass
4	13173.750	38.00	5.68	74.0	36.00	Peak	0.00	100	Vertical	Pass
4**	13173.750	26.10	5.68	54.0	27.90	AV	0.00	100	Vertical	Pass
5	15131.750	43.37	9.34	74.0	30.63	Peak	360.00	100	Vertical	Pass
5**	15131.750	33.07	9.34	54.0	20.93	AV	360.00	100	Vertical	Pass
6	17835.000	51.96	18.63	74.0	22.04	Peak	133.10	100	Vertical	Pass
6**	17835.000	42.26	18.63	54.0	11.74	AV	133.10	100	Vertical	Pass

WIFI2.4G-N40-High channel-Horizontal-TX

Test result

Project Number: Test

Test Time: 2026-01-29_11.05.45

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

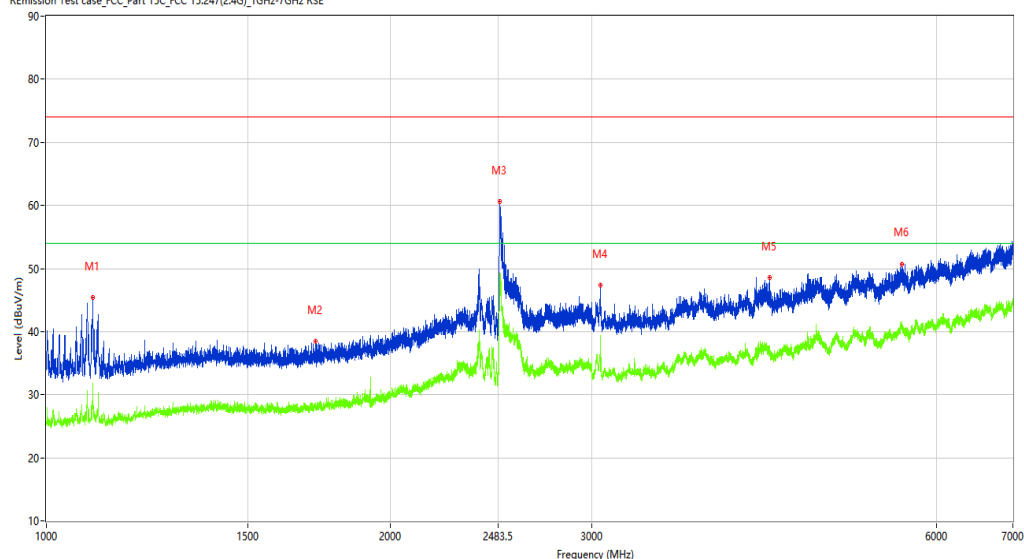

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1098.000	45.38	-15.03	74.0	28.62	Peak	192.90	150	Horizontal	Pass
1**	1098.000	29.56	-15.03	54.0	24.44	AV	192.90	150	Horizontal	Pass
2	1718.750	38.48	-13.08	74.0	35.52	Peak	261.50	150	Horizontal	Pass
2**	1718.750	27.95	-13.08	54.0	26.05	AV	261.50	150	Horizontal	Pass
3	2492.000	60.57	-7.28	74.0	13.43	Peak	254.60	150	Horizontal	Pass
3**	2492.000	48.58	-7.28	54.0	5.42	AV	254.60	150	Horizontal	Pass
4	3050.500	47.36	-5.39	74.0	26.64	Peak	224.50	150	Horizontal	Pass
4**	3050.500	39.10	-5.39	54.0	14.90	AV	224.50	150	Horizontal	Pass
5	4288.000	48.59	-2.41	74.0	25.41	Peak	360.00	150	Horizontal	Pass
5**	4288.000	37.69	-2.41	54.0	16.31	AV	360.00	150	Horizontal	Pass
6	5598.500	50.74	1.17	74.0	23.26	Peak	315.40	150	Horizontal	Pass
6**	5598.500	41.12	1.17	54.0	12.88	AV	315.40	150	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_17.09.32

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

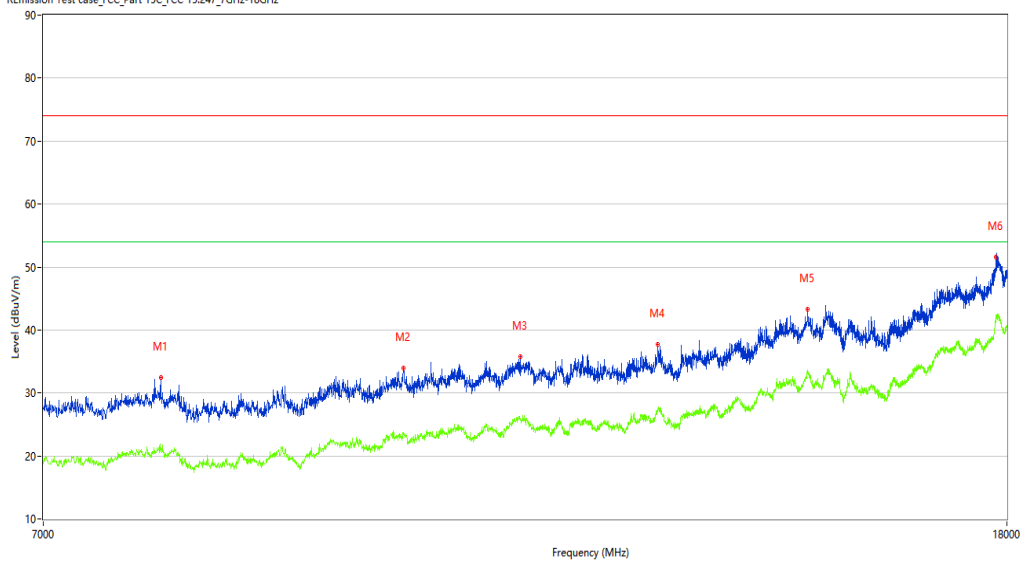

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7855.250	32.47	1.03	74.0	41.53	Peak	86.20	100	Horizontal	Pass
1**	7855.250	20.96	1.03	54.0	33.04	AV	86.20	100	Horizontal	Pass
2	9964.500	33.95	3.37	74.0	40.05	Peak	125.90	100	Horizontal	Pass
2**	9964.500	23.37	3.37	54.0	30.63	AV	125.90	100	Horizontal	Pass
3	11169.000	35.79	3.87	74.0	38.21	Peak	213.40	100	Horizontal	Pass
3**	11169.000	25.80	3.87	54.0	28.20	AV	213.40	100	Horizontal	Pass
4	12783.250	37.70	5.82	74.0	36.30	Peak	256.40	100	Horizontal	Pass
4**	12783.250	27.02	5.82	54.0	26.98	AV	256.40	100	Horizontal	Pass
5	14810.000	43.31	11.98	74.0	30.69	Peak	256.40	100	Horizontal	Pass
5**	14810.000	33.29	11.98	54.0	20.71	AV	256.40	100	Horizontal	Pass
6	17810.250	51.63	18.09	74.0	22.37	Peak	299.40	100	Horizontal	Pass
6**	17810.250	42.12	18.09	54.0	11.88	AV	299.40	100	Horizontal	Pass

WIFI2.4G-N40-High channel-Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_10.33.00

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) 1GHz-7GHz RSE

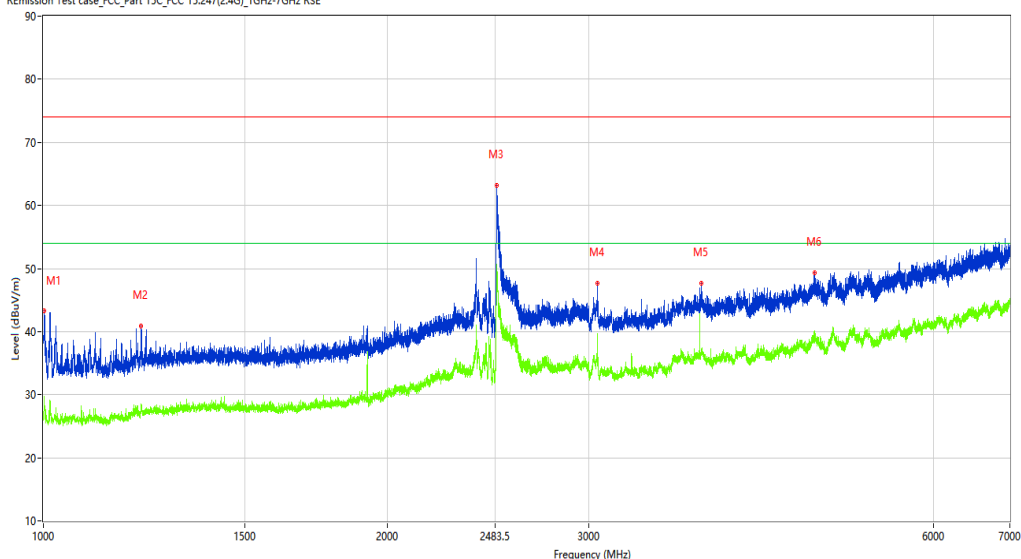

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1001.250	43.31	-14.82	74.0	30.69	Peak	185.00	150	Vertical	Pass
1**	1001.250	27.62	-14.82	54.0	26.38	AV	185.00	150	Vertical	Pass
2	1218.000	40.86	-14.26	74.0	33.14	Peak	127.70	150	Vertical	Pass
2**	1218.000	28.01	-14.26	54.0	25.99	AV	127.70	150	Vertical	Pass
3	2490.000	63.17	-7.21	74.0	10.83	Peak	114.40	150	Vertical	Pass
3**	2490.000	47.87	-7.21	54.0	6.13	AV	114.40	150	Vertical	Pass
4	3050.000	47.71	-4.72	74.0	26.29	Peak	227.70	150	Vertical	Pass
4**	3050.000	39.70	-4.72	54.0	14.30	AV	227.70	150	Vertical	Pass
5	3758.500	47.62	-2.38	74.0	26.38	Peak	0.00	150	Vertical	Pass
5**	3758.500	36.84	-2.38	54.0	17.16	AV	0.00	150	Vertical	Pass
6	4728.500	49.27	-0.51	74.0	24.73	Peak	317.20	150	Vertical	Pass
6**	4728.500	39.08	-0.51	54.0	14.92	AV	317.20	150	Vertical	Pass

Test result

Project Number: Test

Test Time: 2026-01-28_16.35.34

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

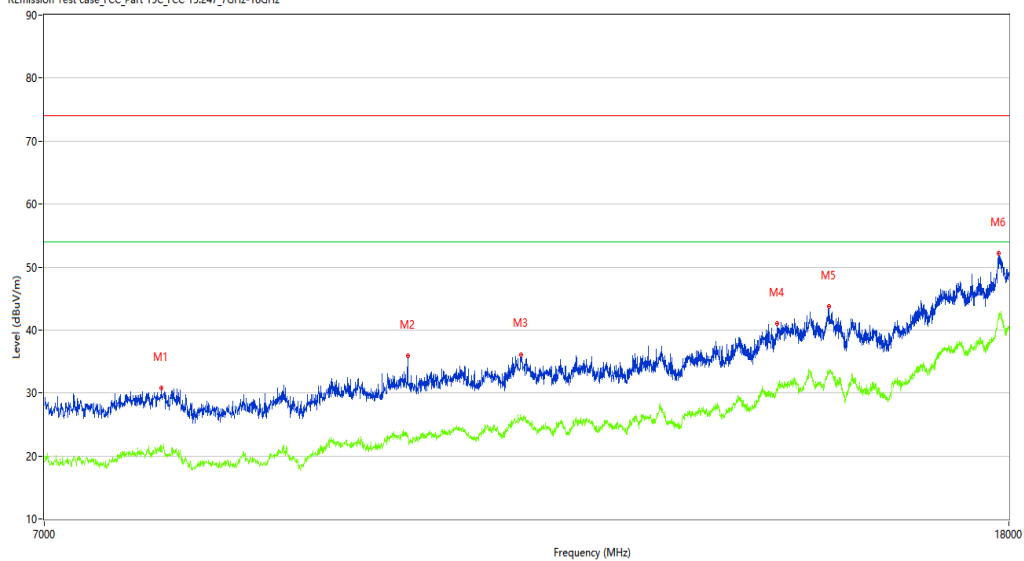

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7852.500	30.74	1.01	74.0	43.26	Peak	241.70	100	Vertical	Pass
1**	7852.500	20.89	1.01	54.0	33.11	AV	241.70	100	Vertical	Pass
2	9991.999	35.90	3.30	74.0	38.10	Peak	5.00	100	Vertical	Pass
2**	9991.999	22.98	3.30	54.0	31.02	AV	5.00	100	Vertical	Pass
3	11160.750	36.14	3.92	74.0	37.86	Peak	241.70	100	Vertical	Pass
3**	11160.750	25.78	3.92	54.0	28.22	AV	241.70	100	Vertical	Pass
4	14350.750	40.99	9.27	74.0	33.01	Peak	125.80	100	Vertical	Pass
4**	14350.750	30.77	9.27	54.0	23.23	AV	125.80	100	Vertical	Pass
5	15093.250	43.74	10.35	74.0	30.26	Peak	282.70	100	Vertical	Pass
5**	15093.250	33.77	10.35	54.0	20.23	AV	282.70	100	Vertical	Pass
6	17815.751	52.21	18.25	74.0	21.79	Peak	327.70	100	Vertical	Pass
6**	17815.751	41.66	18.25	54.0	12.34	AV	327.70	100	Vertical	Pass

WIFI2.4G-Bandedge -B-Low channel- Horizontal –TX

Test result

Project Number: Test

Test Time: 2026-01-29_13.42.13

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(Z.4G)_bandedge 2400

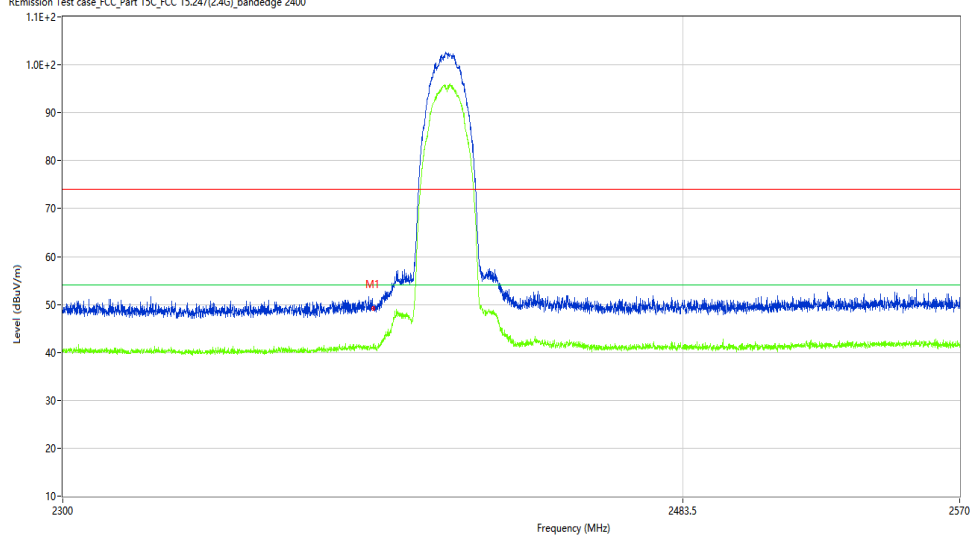

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.20	-10.58	74.0	24.80	Peak	297.02	100	H	Pass
1**	2390.000	41.24	-10.58	54.0	12.76	AV	297.02	100	H	Pass

WIFI2.4G-Bandedge -B-Low channel- Vertical -TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.20.09

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

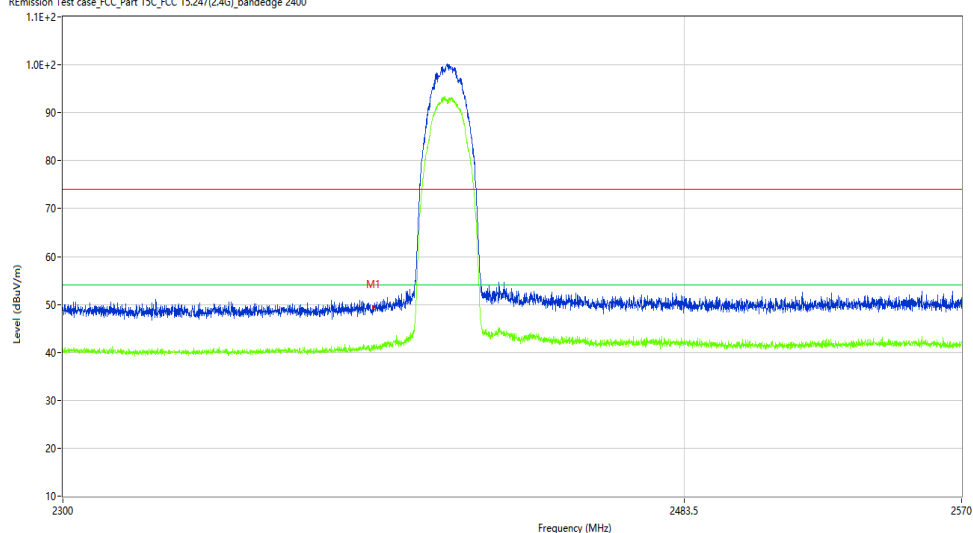

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.27	-10.58	74.0	24.73	Peak	206.00	100	V	Pass
1**	2390.000	41.54	-10.58	54.0	12.46	AV	206.00	100	V	Pass

WIFI2.4G-Bandedge -B-High channel- Horizontal -TX

Test result

Project Number: Test

Test Time: 2026-01-29_13.44.07

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(Z.4G)_bandedge 2400

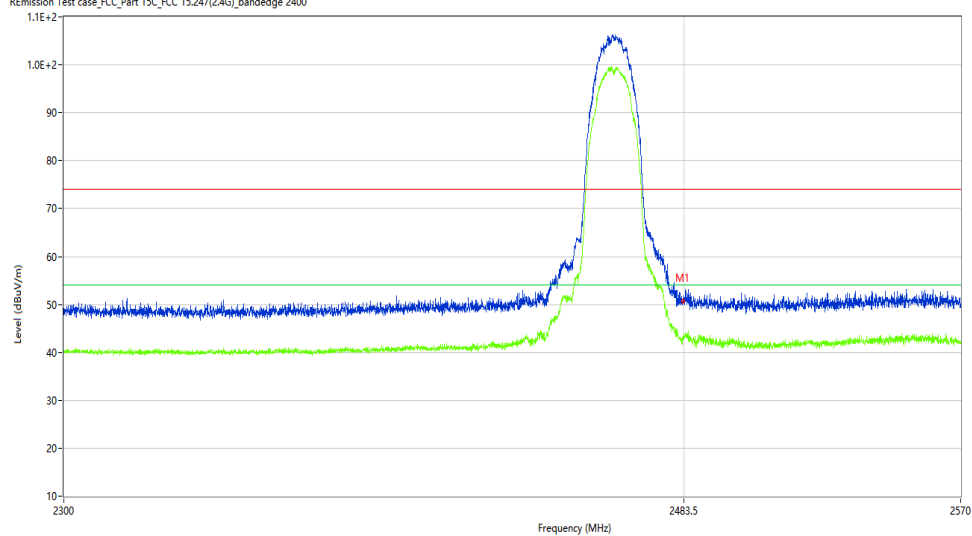

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.63	-10.56	74.0	23.37	Peak	239.24	100	H	Pass
1**	2483.500	43.57	-10.56	54.0	10.43	AV	239.24	100	H	Pass

WIFI2.4G-Bandedge -B-High channel- Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.18.03

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(Z.4G)_bandedge 2400

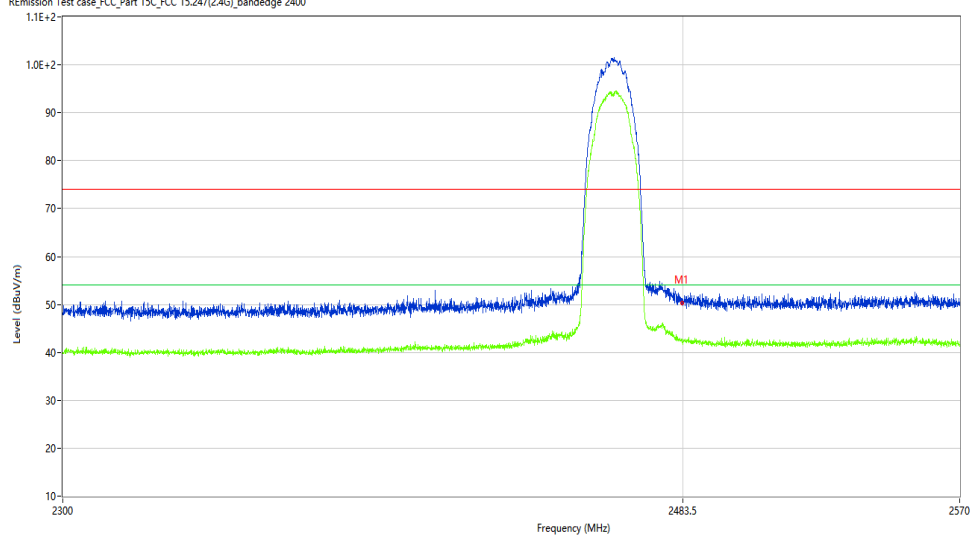

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.42	-10.56	74.0	23.58	Peak	87.10	100	V	Pass
1**	2483.500	41.88	-10.56	54.0	12.12	AV	87.10	100	V	Pass

WIFI2.4G-Bandedge -G-Low channel- Horizontal –TX

Test result

Project Number: Test

Test Time: 2026-01-29_13.53.24

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(Z.4G)_bandedge 2400

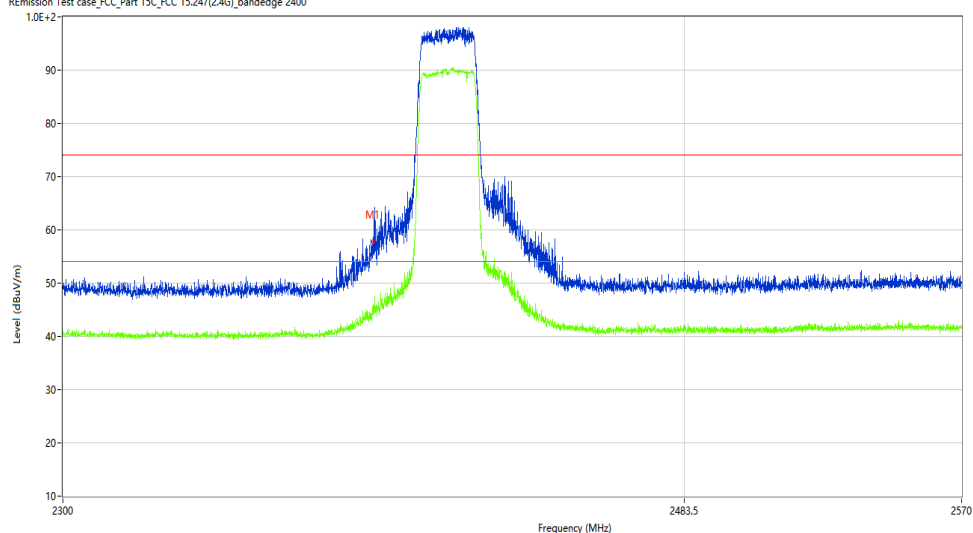

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.47	-10.58	74.0	16.53	Peak	5.10	100	H	Pass
1**	2390.000	44.50	-10.58	54.0	9.50	AV	5.10	100	H	Pass

WIFI2.4G-Bandedge -G-Low channel- Vertical -TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.11.18

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

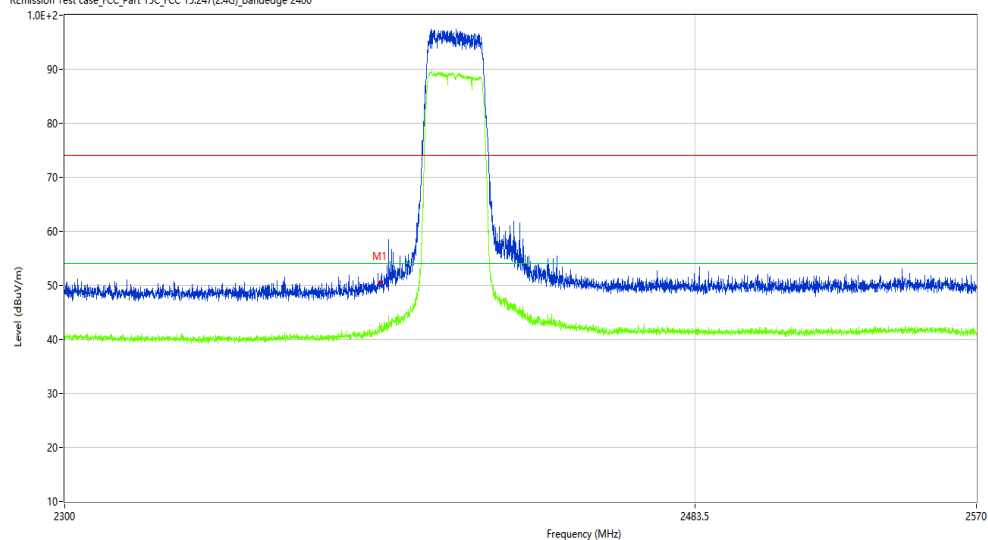

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.45	-10.58	74.0	23.55	Peak	324.10	100	V	Pass
1**	2390.000	41.92	-10.58	54.0	12.08	AV	324.10	100	V	Pass

WIFI2.4G-Bandedge -G-High channel- Horizontal -TX

Test result

Project Number: Test

Test Time: 2026-01-29_13.50.35

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

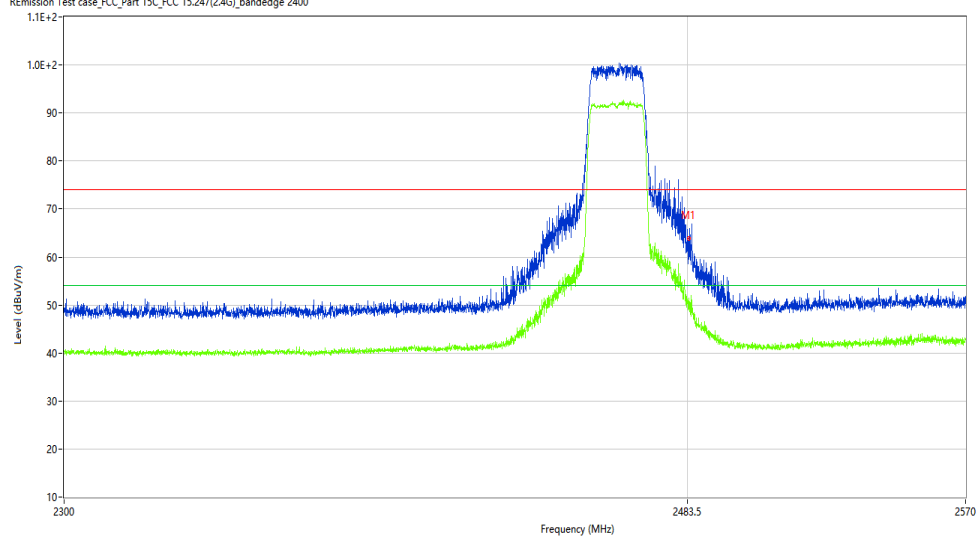

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	63.58	-10.56	74.0	10.42	Peak	237.70	100	H	Pass
1**	2483.500	50.86	-10.56	54.0	3.14	AV	237.70	100	H	Pass

WIFI2.4G-Bandedge -G-High channel- Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.14.13

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

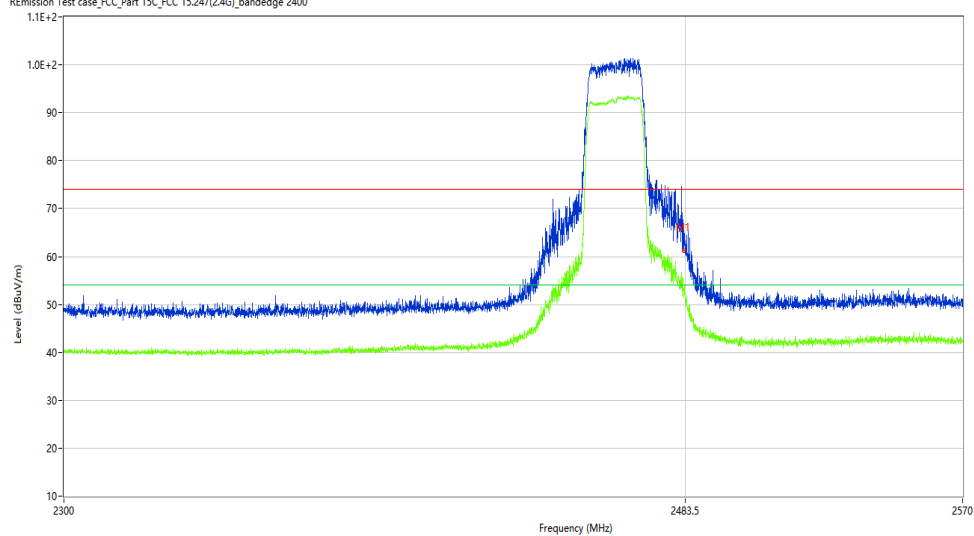

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	61.16	-10.56	74.0	12.84	Peak	72.60	100	V	Pass
1**	2483.500	51.13	-10.56	54.0	2.87	AV	72.60	100	V	Pass

WIFI2.4G-Bandedge -N-Low channel- Horizontal –TX

Test result

Project Number: Test

Test Time: 2026-01-29_13.57.51

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(Z.4G)_bandedge 2400

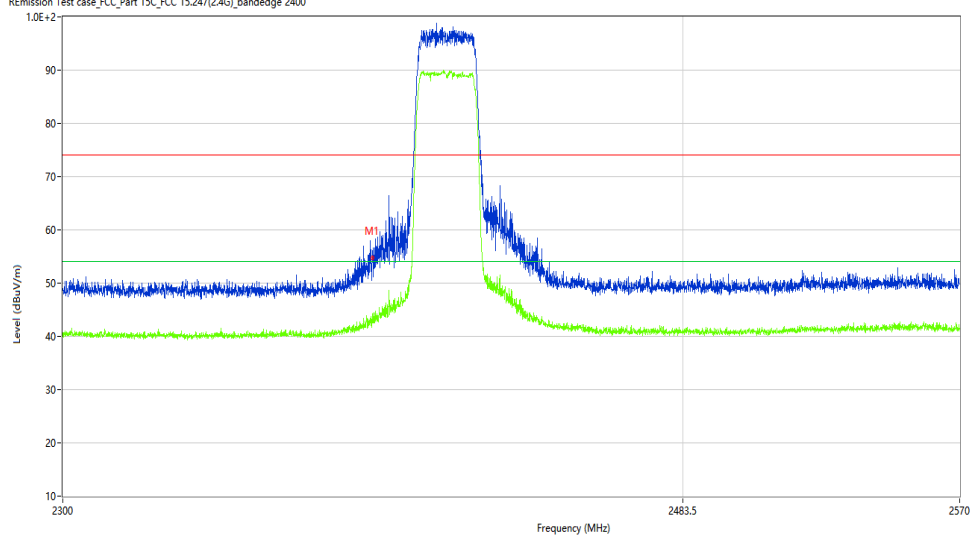

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.83	-10.58	74.0	19.17	Peak	298.48	100	H	Pass
1**	2390.000	43.93	-10.58	54.0	10.07	AV	298.48	100	H	Pass

WIFI2.4G-Bandedge -N-Low channel- Vertical -TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.08.34

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(Z.4G)_bandedge 2400

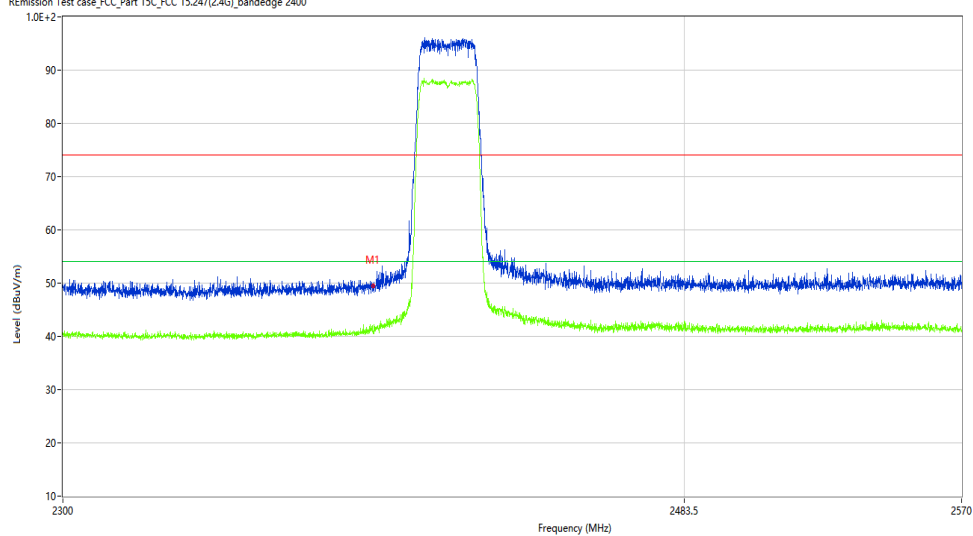

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.49	-10.58	74.0	24.51	Peak	56.46	100	V	Pass
1**	2390.000	40.88	-10.58	54.0	13.12	AV	56.46	100	V	Pass

WIFI2.4G-Bandedge -N-High channel- Horizontal -TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.00.00

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(Z.4G)_bandedge 2400

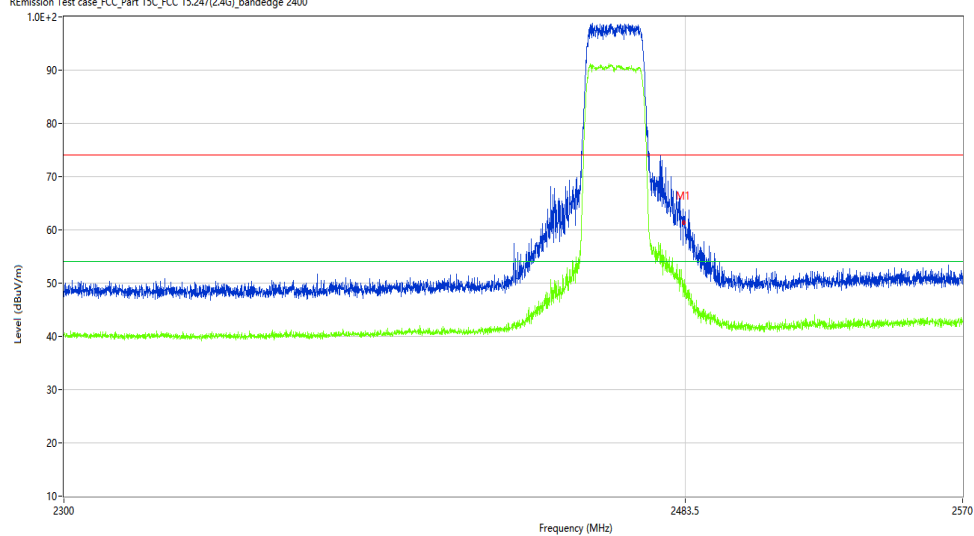

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	61.60	-10.56	74.0	12.40	Peak	322.00	100	H	Pass
1**	2483.500	48.80	-10.56	54.0	5.20	AV	322.00	100	H	Pass

WIFI2.4G-Bandedge -N-High channel- Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.05.57

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

RfEmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

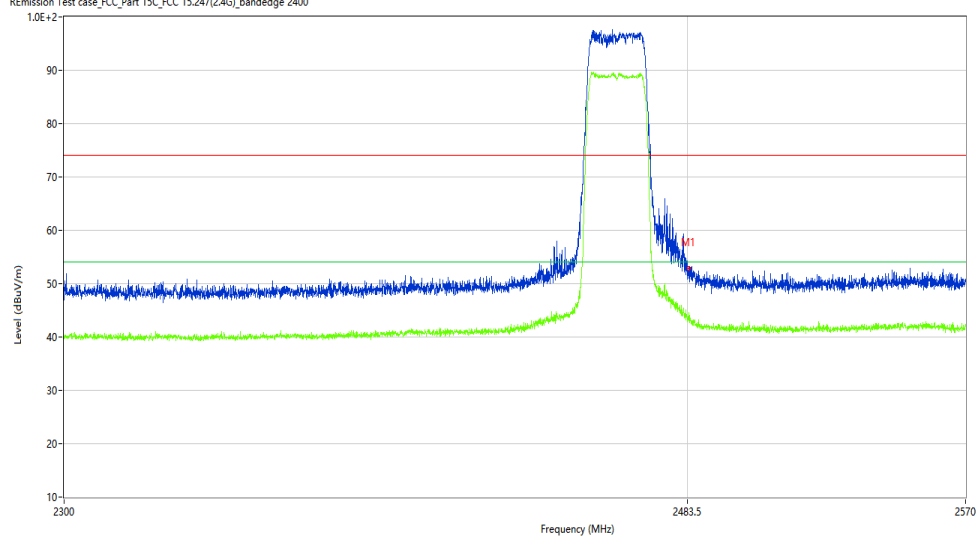

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.18	-10.56	74.0	20.82	Peak	335.90	100	V	Pass
1**	2483.500	43.01	-10.56	54.0	10.99	AV	335.90	100	V	Pass

WIFI2.4G-Bandedge –N40-Low channel- Horizontal –TX

Test result

Project Number: Test

Test Time: 2026-01-29_13.17.05

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

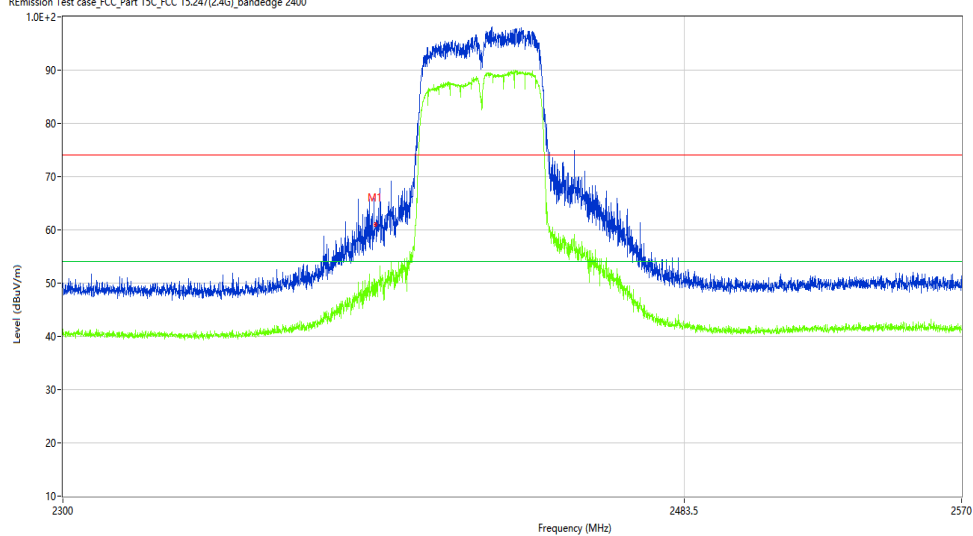

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	61.38	-10.58	74.0	12.62	Peak	92.72	100	H	Pass
1**	2390.000	48.92	-10.58	54.0	5.08	AV	92.72	100	H	Pass

WIFI2.4G-Bandedge –N40-Low channel- Vertical –TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.23.06

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 22.3

Load: Full load

Hum.: 42%

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

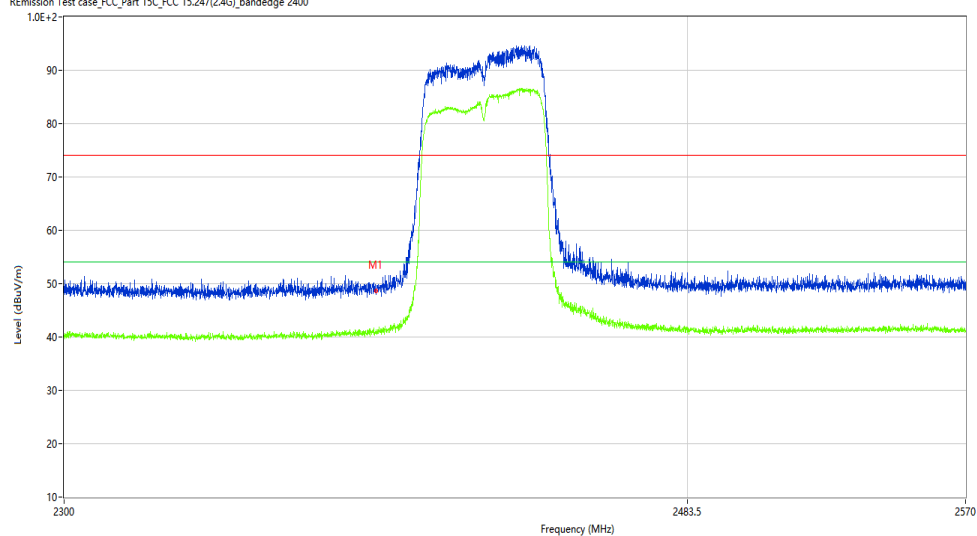

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.73	-10.58	74.0	25.27	Peak	83.97	100	V	Pass
1**	2390.000	40.84	-10.58	54.0	13.16	AV	83.97	100	V	Pass

WIFI2.4G-Bandedge –N40-High channel- Horizontal -TX

Test result

Project Number: Test

Test Time: 2026-01-29_13.24.20

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

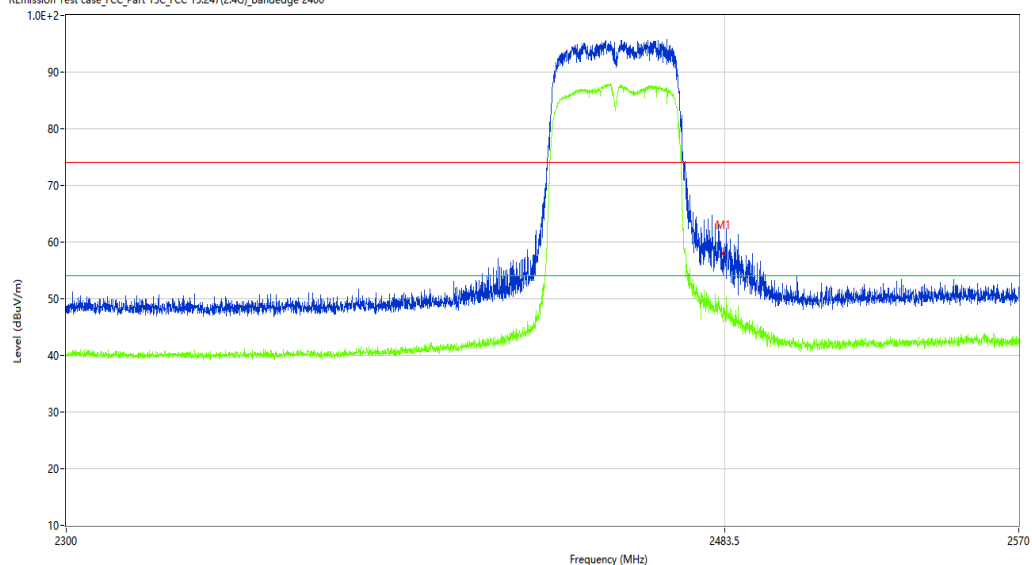

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.15	-10.56	74.0	15.85	Peak	220.90	100	H	Pass
1**	2483.500	47.32	-10.56	54.0	6.68	AV	220.90	100	H	Pass

WiFi2.4G-Bandedge –N40-High channel- Vertical-TX

Test result

Project Number: Test

Test Time: 2026-01-29_14.25.08

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.3

Hum.: 42%

Test Engineer: SDC


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110056-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(Z.4G)_bandedge 2400

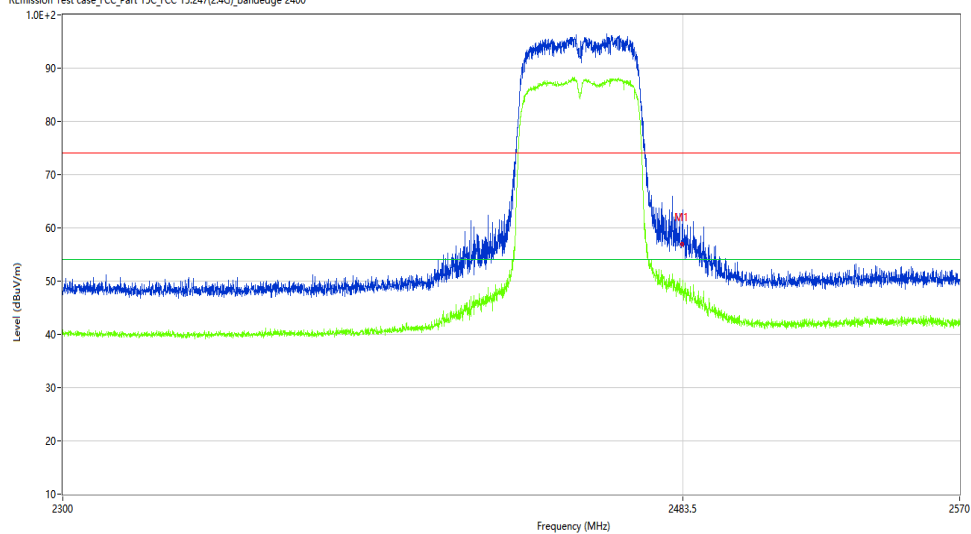

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.01	-10.56	74.0	16.99	Peak	31.90	100	V	Pass
1**	2483.500	47.75	-10.56	54.0	6.25	AV	31.90	100	V	Pass