



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V04
Report Template Revision Date: 2018-07-06

Test Report

Report No.: CQASZ20210801466E-01
Applicant: Shenzhen Maipinda Technology Co.,Ltd.
Address of Applicant: 7th Floor, Building B, Xinyuan,Yushan Industrial Park, Shiyan Str., Baoan Dist., Shenzhen, Guangdong CHINA 518000
Equipment Under Test (EUT):
EUT Name: Wireless Microphone
Model No.: M21, M22, M23, M24, M26
Test Model No.: M21
Brand Name: N/A
FCC ID: 2A243-MAIPINDA
Standards: 47 CFR Part 15, Subpart C
Date of Receipt: 2021-08-30
Date of Test: 2021-08-30 to 2021-09-09
Date of Issue: 2021-09-10
Test Result: PASS*

*In the configuration tested, the EUT complied with the standards specified above

Tested By: Lewis Zhou
(Lewis Zhou)

Reviewed By: Rock Huang
(Rock Huang)

Approved By: Jack ai
(Jack ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210801466E-01	Rev.01	Initial report	2021-09-10

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2013)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2013)	PASS

3 Contents

	Page
1 VERSION.....	2
2 TEST SUMMARY.....	3
3 CONTENTS.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 TEST ENVIRONMENT AND MODE.....	7
4.4 DESCRIPTION OF SUPPORT UNITS.....	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	8
4.6 TEST LOCATION.....	9
4.7 TEST FACILITY.....	9
4.8 DEVIATION FROM STANDARDS.....	9
4.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
4.11 EQUIPMENT LIST.....	10
5 TEST RESULTS AND MEASUREMENT DATA.....	11
5.1 ANTENNA REQUIREMENT.....	11
5.2 CONDUCTED EMISSIONS.....	12
5.3 RADIATED EMISSION.....	15
5.4 20dB BANDWIDTH.....	23
6 PHOTOGRAPHS.....	26
6.1 RADIATED EMISSION TEST SETUP.....	26
6.2 CONDUCTED EMISSION TEST SETUP.....	27
6.3 EUT CONSTRUCTIONAL DETAILS.....	28

4 General Information

4.1 Client Information

Applicant:	Shenzhen Maipinda Technology Co.,Ltd.
Address of Applicant:	7th Floor, Building B, Xinyuan, Yushan Industrial Park, Shiyan Str., Baoan Dist., Shenzhen, Guangdong CHINA 518000
Manufacturer:	Shenzhen Maipinda Technology Co.,Ltd.
Address of Manufacturer:	7th Floor, Building B, Xinyuan, Yushan Industrial Park, Shiyan Str., Baoan Dist., Shenzhen, Guangdong CHINA 518000
Factory:	Shenzhen Maipinda Technology Co.,Ltd.
Address of Factory:	7th Floor, Building B, Xinyuan, Yushan Industrial Park, Shiyan Str., Baoan Dist., Shenzhen, Guangdong CHINA 518000

4.2 General Description of EUT

Product Name:	Wireless Microphone
Model No.:	M21, M22, M23, M24, M26
Test Model No.:	M21
Trade Mark:	N/A
Hardware Version:	ac697n_adapter-v1.0.0
Software Version:	K8-V5
Frequency Range:	2402MHz ~ 2480MHz
Modulation Type:	GFSK
Number of Channels:	79
Sample Type:	☐ Mobile ☒ Portable ☐ Fix Location
Test Software of EUT:	FCC_assist_1.0.2.2
Antenna Type:	Chip antenna
Antenna Gain:	3.5dbi
Power Supply:	lithium battery:DC3.6V, 70mAh, Charge by DC5.0V

Note:

Model No.: M21, M22, M23, M24, M26

Only the model M21 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, Only the product color is different, so the model name will be different.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH0)	2402MHz
The Middle channel(CH39)	2441MHz
The Highest channel(CH78)	2480MHz

4.3 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.6 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009mbar
Temperature:	25.5 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009mbar
Test mode:	
Transmitting mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Adapter	HUAWEI	LPL-C010050200Z	DOC	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	5.12dB	(1)
Radiated Emission	Above 1GHz	4.60dB	(1)
Conducted Disturbance	0.15~30MHz	3.34dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.7 Test Facility

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/10/25	2021/10/24
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/25	2021/10/24
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2020/10/25	2021/10/24
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2020/10/21	2021/10/20
Bilog Antenna	R&S	HL562	CQA-011	2020/9/26	2021/9/25
Horn Antenna	R&S	HF906	CQA-012	2020/9/26	2021/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2020/9/25	2021/9/24
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2020/9/26	2021/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2020/9/26	2021/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2020/9/26	2021/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/9/26	2021/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/9/26	2021/9/25
EMI Test Receiver	R&S	ESR7	CQA-005	2020/10/25	2021/10/24
LISN	R&S	ENV216	CQA-003	2020/10/23	2021/10/22
Coaxial cable	CQA	N/A	CQA-C009	2020/9/26	2021/9/25
DC power	KEYSIGHT	E3631A	CQA-028	2020/9/26	2021/9/25

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

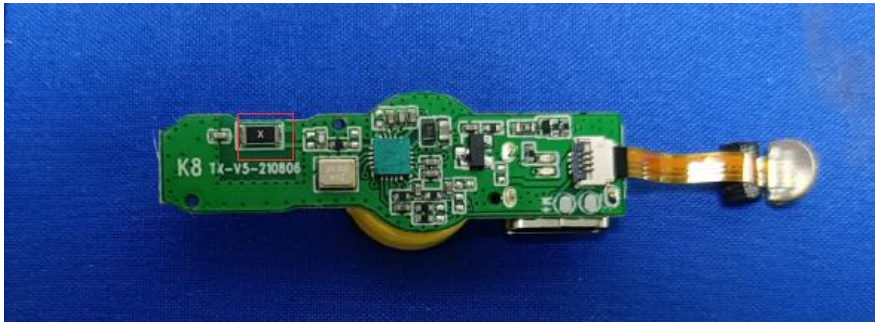Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Chip antenna. The best case gain of the antenna is 3.5dBi.	


5.2 Conducted Emissions

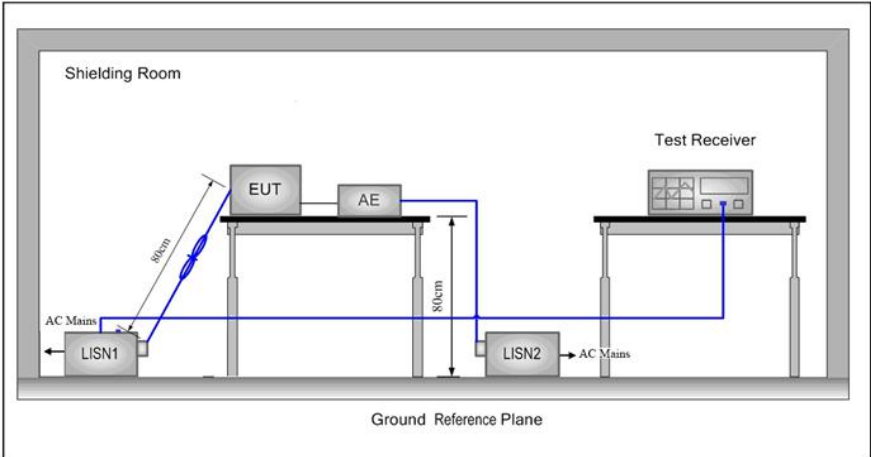Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			

Test Mode:	Transmitting with GFSK modulation. Charge +Transmitting mode.
Final Test Mode:	below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

Live line:

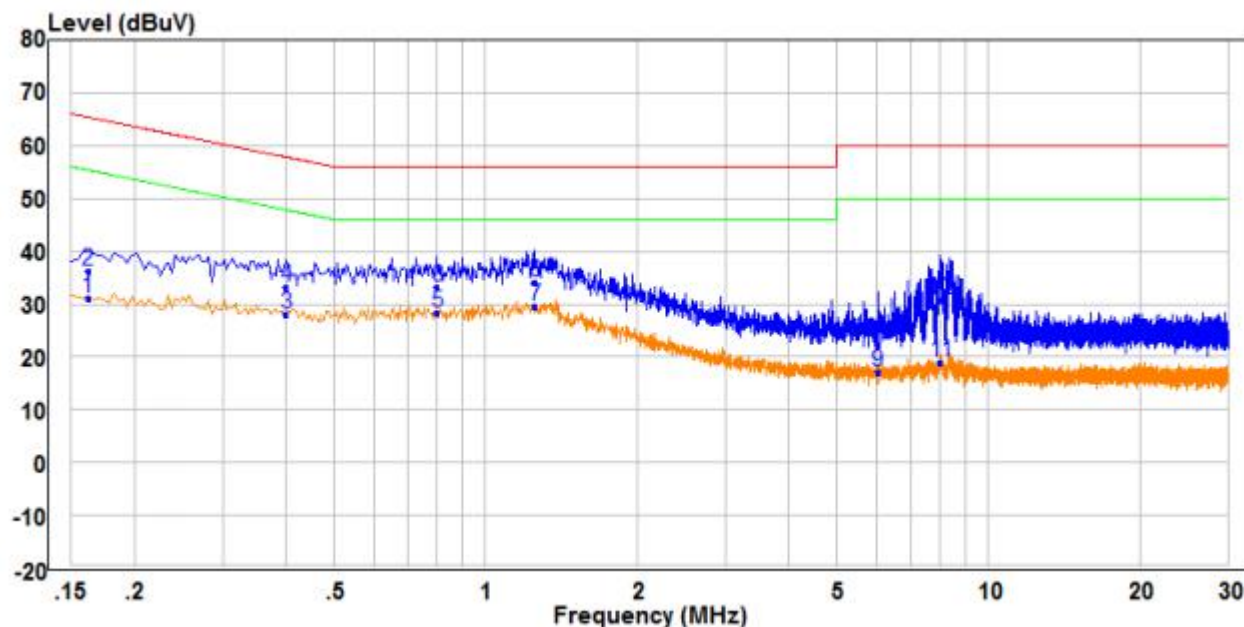


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.162	21.53	9.49	31.02	55.36	-24.34	Average	Line
2	0.162	26.77	9.49	36.26	65.36	-29.10	QP	Line
3	0.402	18.63	9.51	28.14	47.81	-19.67	Average	Line
4	0.402	23.77	9.51	33.28	57.81	-24.53	QP	Line
5	0.802	18.58	9.75	28.33	46.00	-17.67	Average	Line
6	0.802	23.47	9.75	33.22	56.00	-22.78	QP	Line
7 PP	1.254	19.89	9.52	29.41	46.00	-16.59	Average	Line
8 QP	1.254	24.71	9.52	34.23	56.00	-21.77	QP	Line
9	6.034	7.49	9.72	17.21	50.00	-32.79	Average	Line
10	6.034	12.66	9.72	22.38	60.00	-37.62	QP	Line
11	8.021	9.24	9.73	18.97	50.00	-31.03	Average	Line
12	8.021	21.16	9.73	30.89	60.00	-29.11	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

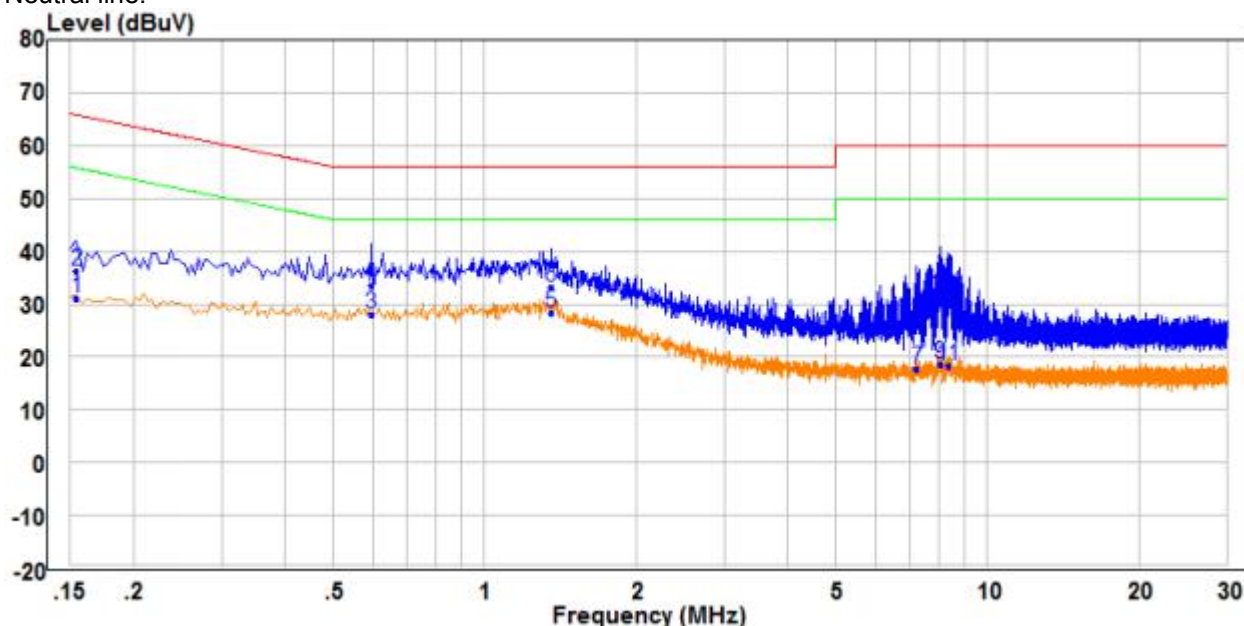

	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.154	21.64	9.48	31.12	55.78	-24.66	Average	Neutral
2	0.154	26.77	9.48	36.25	65.78	-29.53	QP	Neutral
3	0.594	18.40	9.70	28.10	46.00	-17.90	Average	Neutral
4 QP	0.594	23.79	9.70	33.49	56.00	-22.51	QP	Neutral
5 PP	1.358	18.52	9.72	28.24	46.00	-17.76	Average	Neutral
6	1.358	23.39	9.72	33.11	56.00	-22.89	QP	Neutral
7	7.230	7.83	9.79	17.62	50.00	-32.38	Average	Neutral
8	7.230	17.11	9.79	26.90	60.00	-33.10	QP	Neutral
9	8.037	8.74	9.83	18.57	50.00	-31.43	Average	Neutral
10	8.037	21.41	9.83	31.24	60.00	-28.76	QP	Neutral
11	8.353	8.60	9.86	18.46	50.00	-31.54	Average	Neutral
12	8.353	20.89	9.86	30.75	60.00	-29.25	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. 2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	
		114.0		Peak Value	

Test Setup:

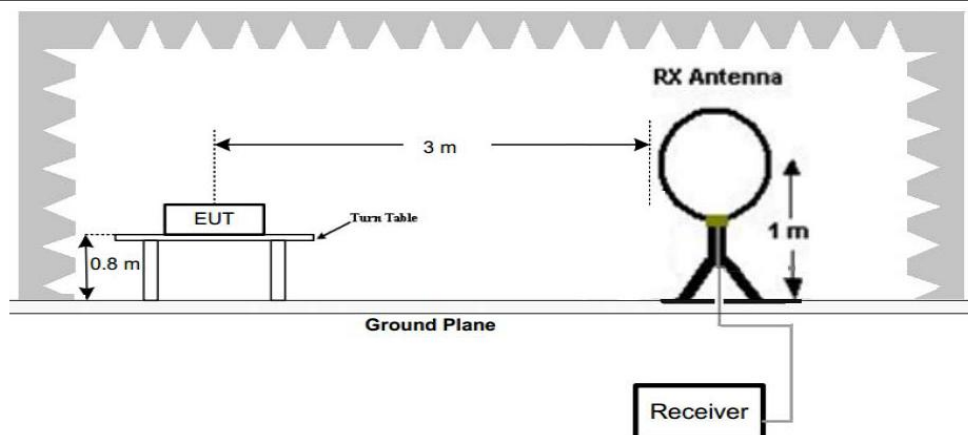


Figure 1. Below 30MHz

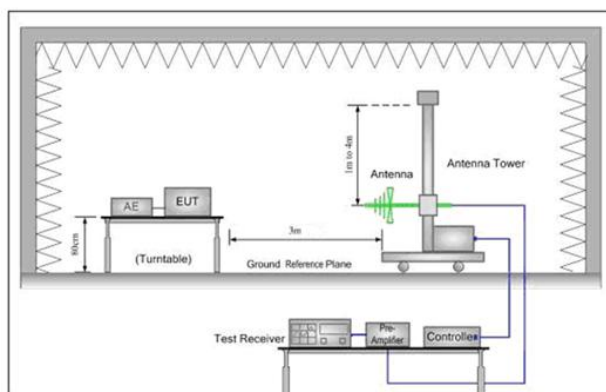


Figure 2. 30MHz to 1GHz

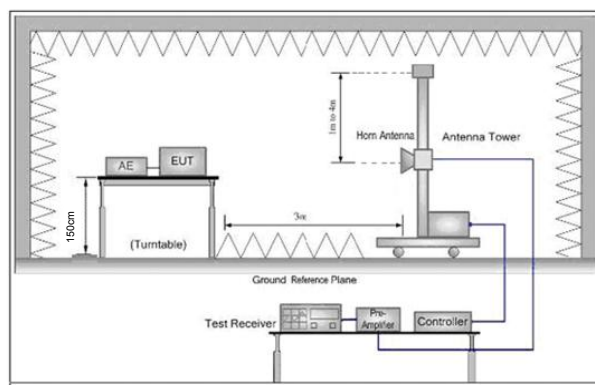


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table

	was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel,the middle channel,the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case. For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data

30MHz~1GHz		
Test mode:	normal mode	Vertical

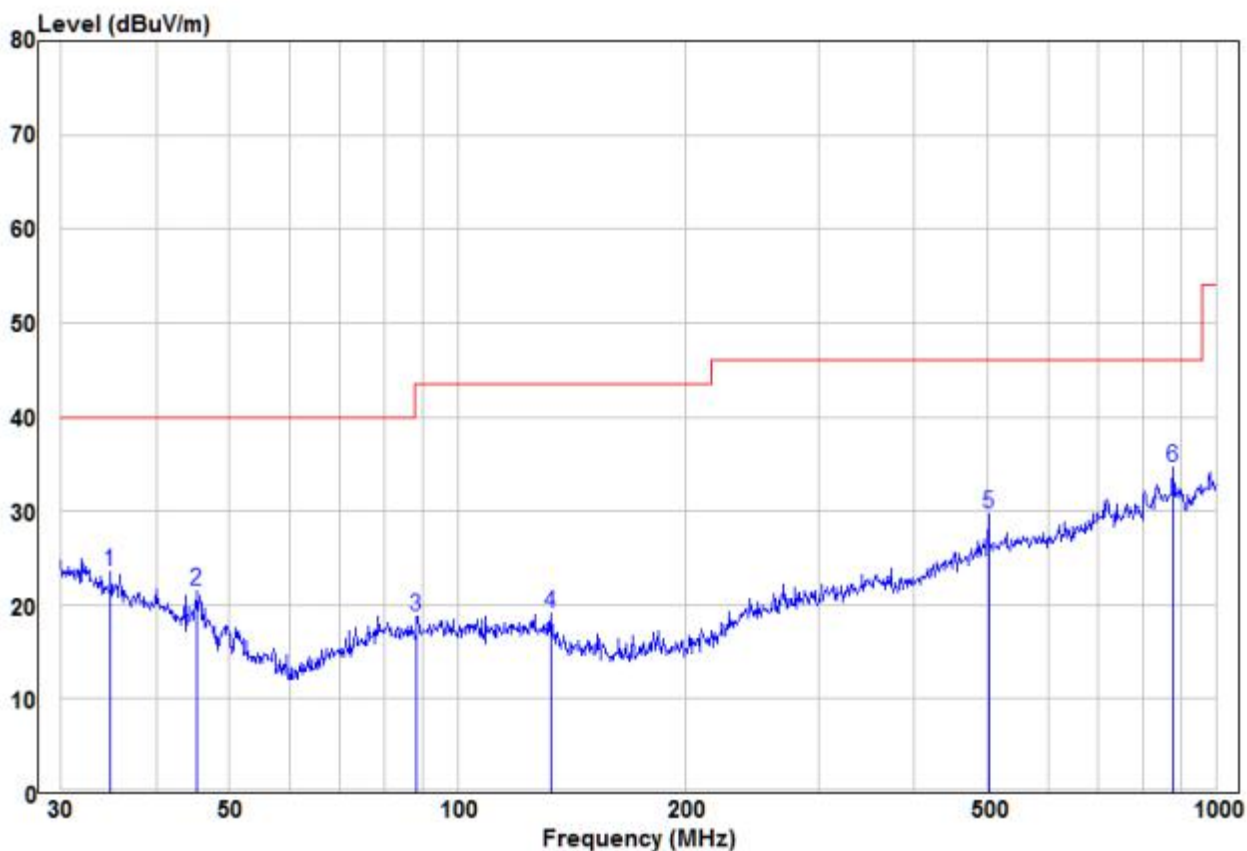

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	34.88	8.89	14.64	23.53	40.00	-16.47	Peak	VERTICAL
2	45.38	11.19	10.27	21.46	40.00	-18.54	Peak	VERTICAL
3	88.34	8.72	9.98	18.70	43.50	-24.80	Peak	VERTICAL
4	132.69	9.33	9.71	19.04	43.50	-24.46	Peak	VERTICAL
5	501.18	11.46	18.29	29.75	46.00	-16.25	Peak	VERTICAL
6 pp	878.32	10.79	23.93	34.72	46.00	-11.28	Peak	VERTICAL

Test mode:	normal mode	Horizontal
------------	-------------	------------

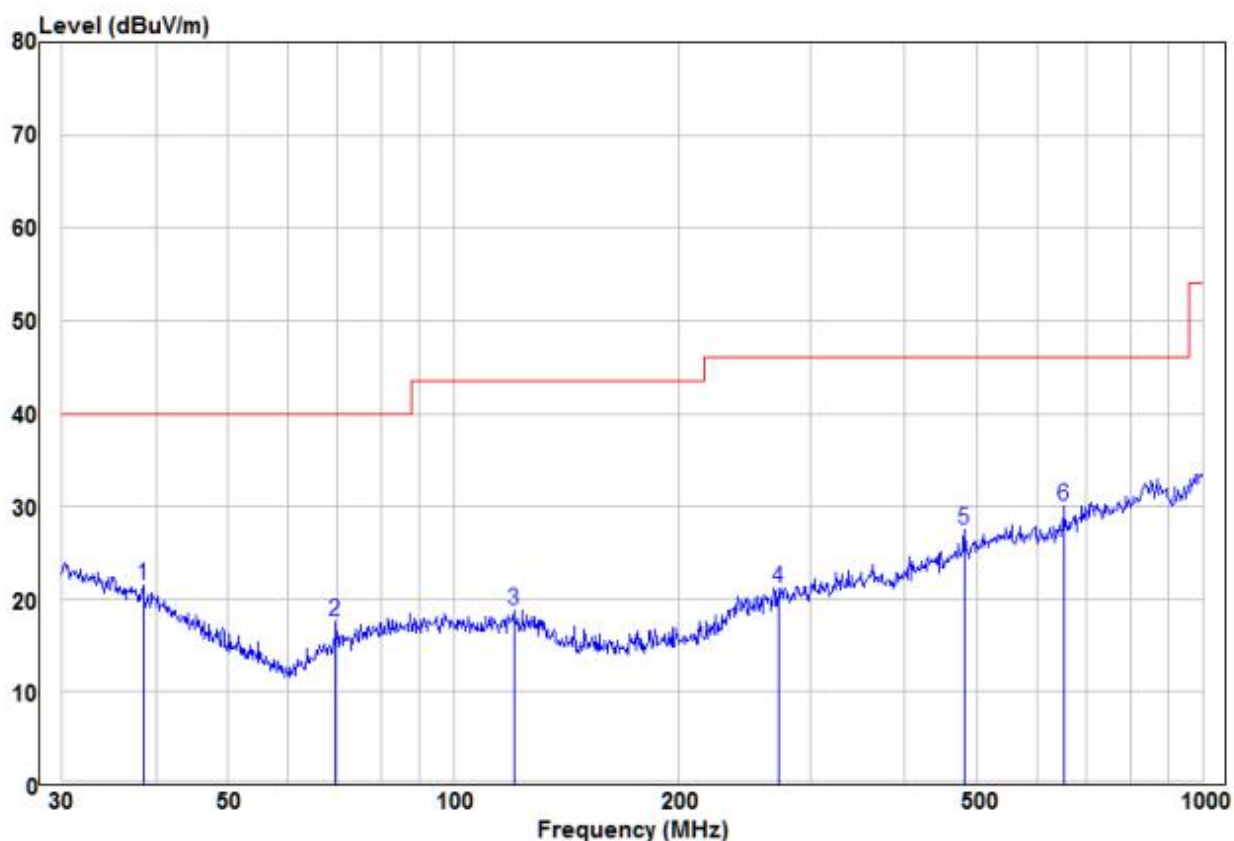

	Freq	Read Level	Factor	Level	Limit	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	38.48	8.12	13.35	21.47	40.00	-18.53	Peak	HORIZONTAL
2	69.60	9.58	8.03	17.61	40.00	-22.39	Peak	HORIZONTAL
3	120.28	8.14	10.69	18.83	43.50	-24.67	Peak	HORIZONTAL
4	271.32	8.39	12.78	21.17	46.00	-24.83	Peak	HORIZONTAL
5	480.53	9.73	17.68	27.41	46.00	-18.59	Peak	HORIZONTAL
6 pp	651.94	10.30	19.71	30.01	46.00	-15.99	Peak	HORIZONTAL

Above 1GHz							
Test mode:		Transmitting		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	60.69	-9.2	51.49	74	-22.51	Peak	H
2390	52.33	-9.2	43.13	54	-10.87	AVG	H
2400	61.89	-9.39	52.50	74	-21.50	Peak	H
2400	60.94	-9.39	51.55	54	-2.45	AVG	H
2402	99.65	-9.33	90.32	114	-23.68	peak	H
2402	97.23	-9.33	87.90	94	-6.10	AVG	H
4804	56.54	-4.28	52.26	74	-21.74	peak	H
4804	43.10	-4.28	38.82	54	-15.18	AVG	H
7206	53.53	1.13	54.66	74	-19.34	peak	H
7206	37.98	1.13	39.11	54	-14.89	AVG	H
2390	60.44	-9.2	51.24	74	-22.76	peak	V
2390	44.53	-9.2	35.33	54	-18.67	AVG	V
2400	44.55	-9.39	35.16	74	-38.84	peak	V
2400	45.01	-9.39	35.62	54	-18.38	AVG	V
2402	95.94	-9.33	86.61	114	-27.39	peak	V
2402	92.69	-9.34	83.35	94	-10.65	AVG	V
4804	55.61	-4.28	51.33	74	-22.67	peak	V
4804	41.19	-4.28	36.91	54	-17.09	AVG	V
7206	52.91	1.13	54.04	74	-19.96	peak	V
7206	37.12	1.13	38.25	54	-15.75	AVG	V


Test mode:		Transmitting		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2441	97.72	-9.37	88.35	114	-25.65	peak	H
2441	98.37	-9.37	89.00	94	-5.00	AVG	H
4882	56.71	-4.14	52.57	74	-21.43	peak	H
4882	40.98	-4.14	36.84	54	-17.16	AVG	H
7323	52.82	0.56	53.38	74	-20.62	peak	H
7323	37.21	0.56	37.77	54	-16.23	AVG	H
2441	94.51	-9.36	85.15	114	-28.85	peak	V
2441	93.40	-9.36	84.04	94	-9.96	AVG	V
4882	56.42	-4.14	52.28	74	-21.72	peak	V
4882	40.77	-4.14	36.63	54	-17.37	AVG	V
7323	51.06	0.56	51.62	74	-22.38	peak	V
7323	36.84	0.56	37.40	54	-16.60	AVG	V

Test mode:		Transmitting		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2480	98.33	-9.23	89.10	114	-24.90	peak	H
2480	95.72	-9.23	86.49	94	-7.51	AVG	H
2483.5	62.15	-9.29	52.86	74	-21.14	Peak	H
2483.5	44.20	-9.29	34.91	54	-19.09	AVG	H
4960	56.86	-4.03	52.83	74	-21.17	peak	H
4960	43.59	-4.03	39.56	54	-14.44	AVG	H
7440	53.20	1.68	54.88	74	-19.12	peak	H
7440	36.04	1.68	37.72	54	-16.28	AVG	H
2480	96.92	-9.23	87.69	114	-26.31	peak	V
2480	93.03	-9.23	83.80	94	-10.20	AVG	V
2483.5	61.54	-9.29	52.25	74	-21.75	peak	V
2483.5	43.64	-9.29	34.35	54	-19.65	AVG	V
4960	57.58	-4.03	53.55	74	-20.45	peak	V
4960	40.79	-4.03	36.76	54	-17.24	AVG	V
7440	52.25	1.68	53.93	74	-20.07	peak	V
7440	38.20	1.68	39.88	54	-14.12	AVG	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 10GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

5.4 20dB Bandwidth

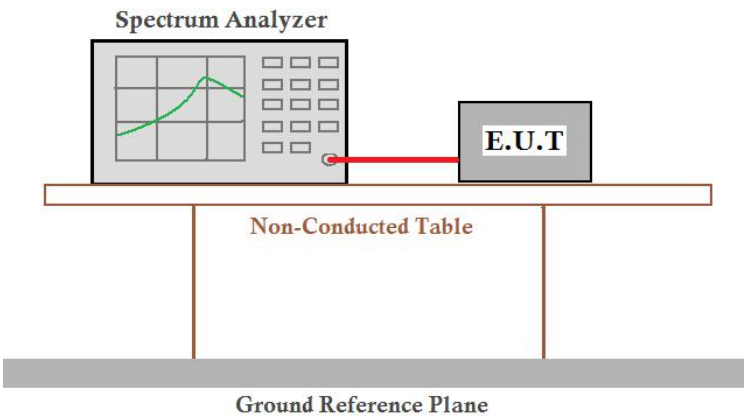
Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2013
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Mode:	Transmitting with GFSK modulation.
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	1.1172	Pass
Middle	1.1056	Pass
Highest	1.1056	Pass


Test plot as follows:

Test channel: Lowest

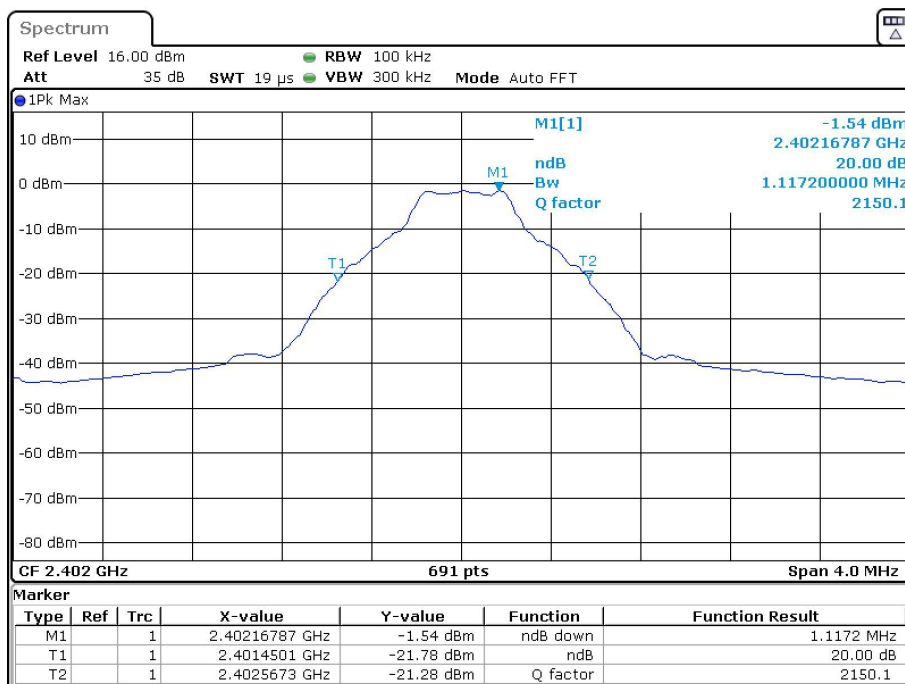


Date: 6.SEP.2021 07:48:41

Test channel: Middle

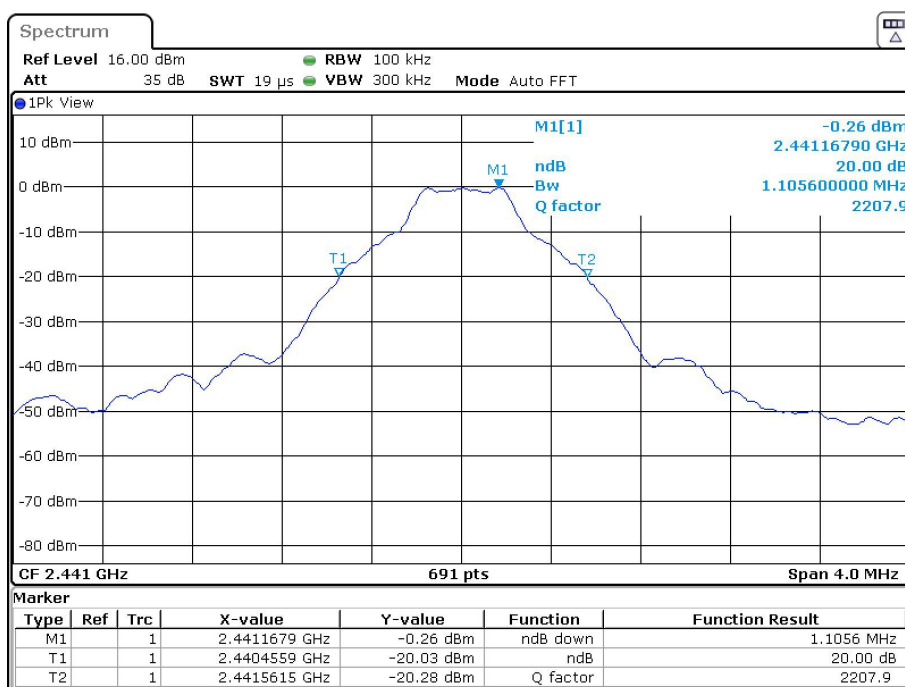

Date: 6.SEP.2021 07:50:14

Test channel: Highest

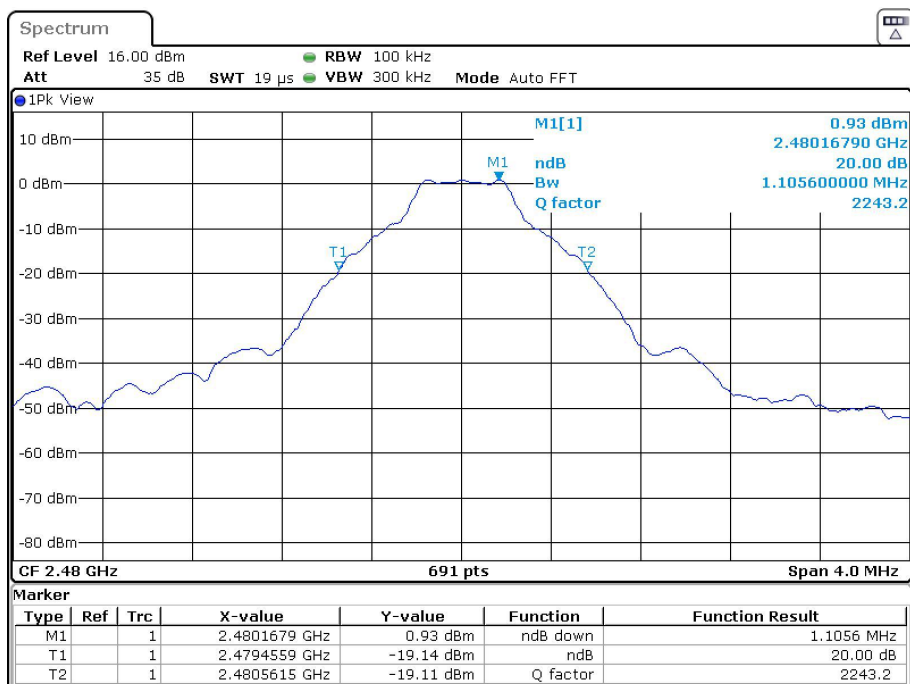

Date: 6.SEP.2021 07:50:59

6 Photographs

6.1 Radiated Emission Test Setup


9kHz~30MHz




30MHz~1GHz:



Above 1GHz:


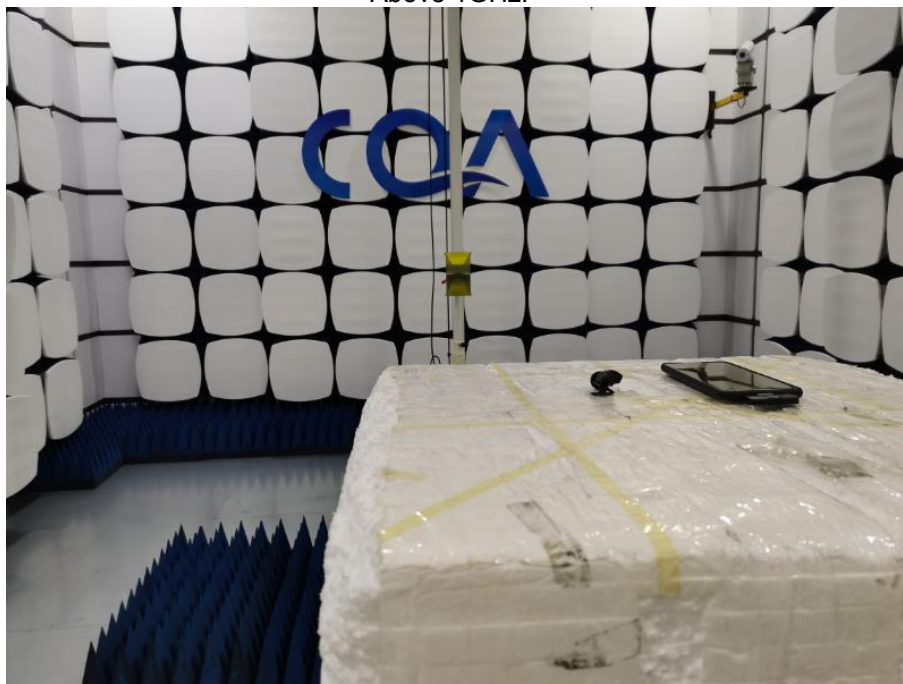



6.2 Conducted Emission Test Setup

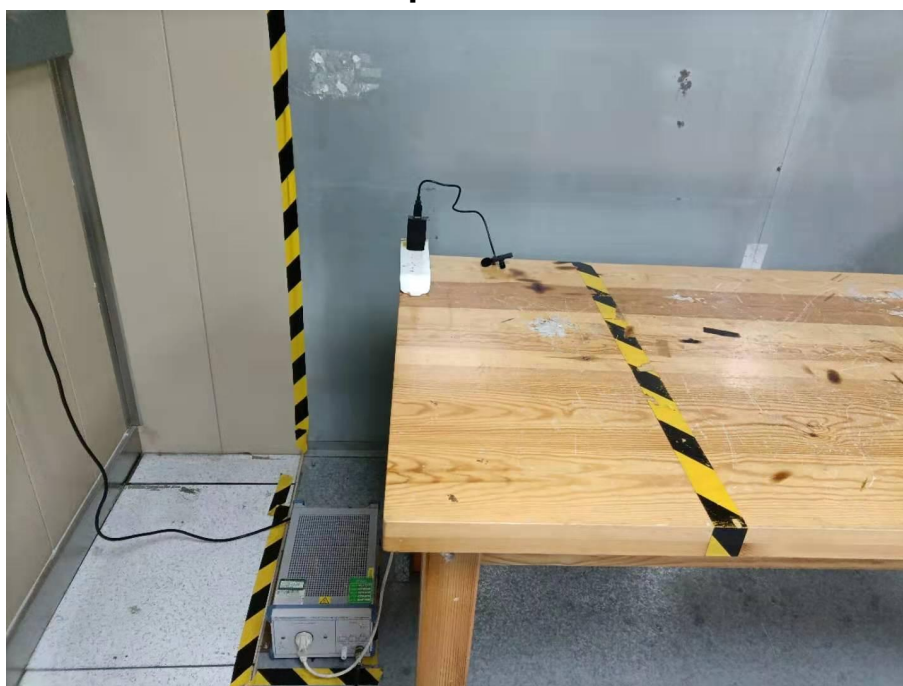

6.3 EUT Constructional Details


Test Model No.: M21

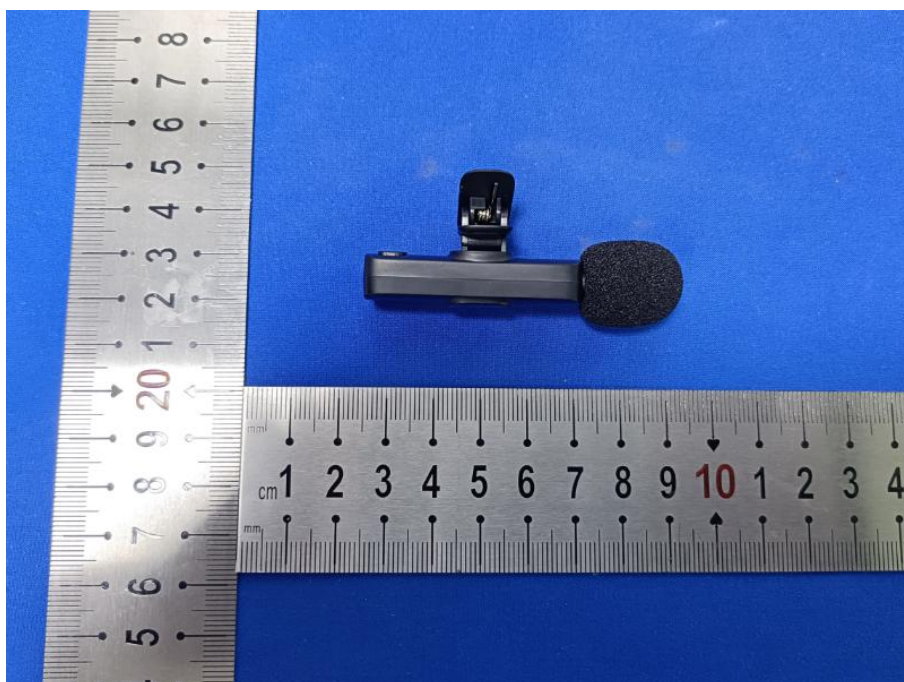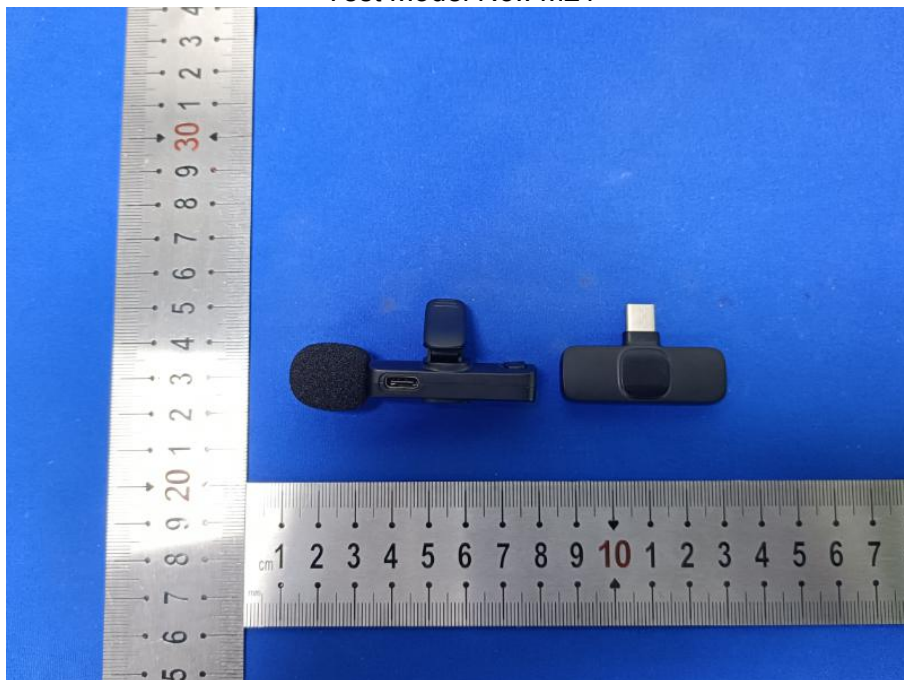

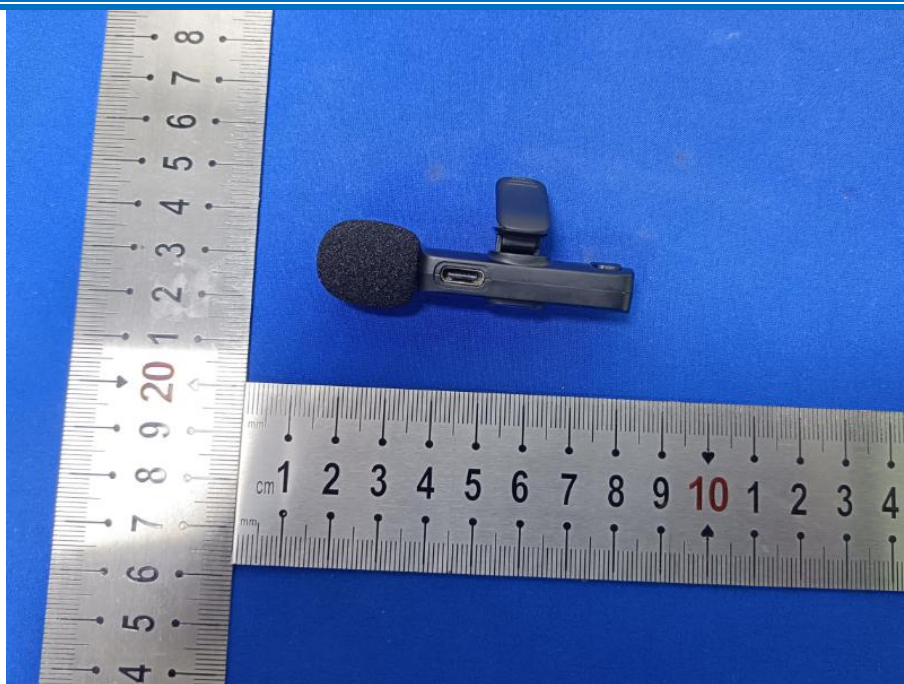





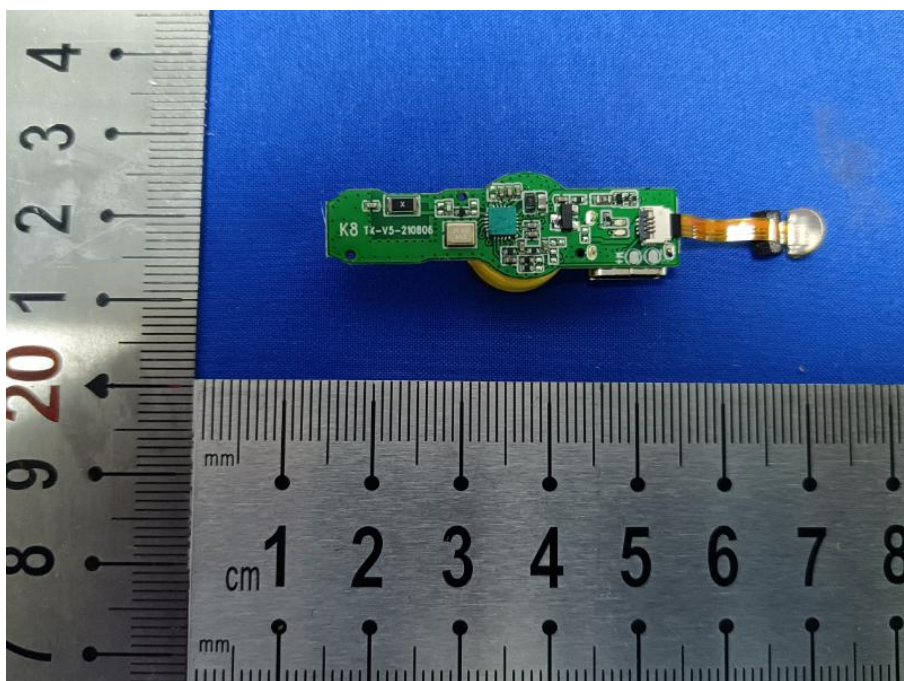

The End