


Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-2M at 2402 MHz		

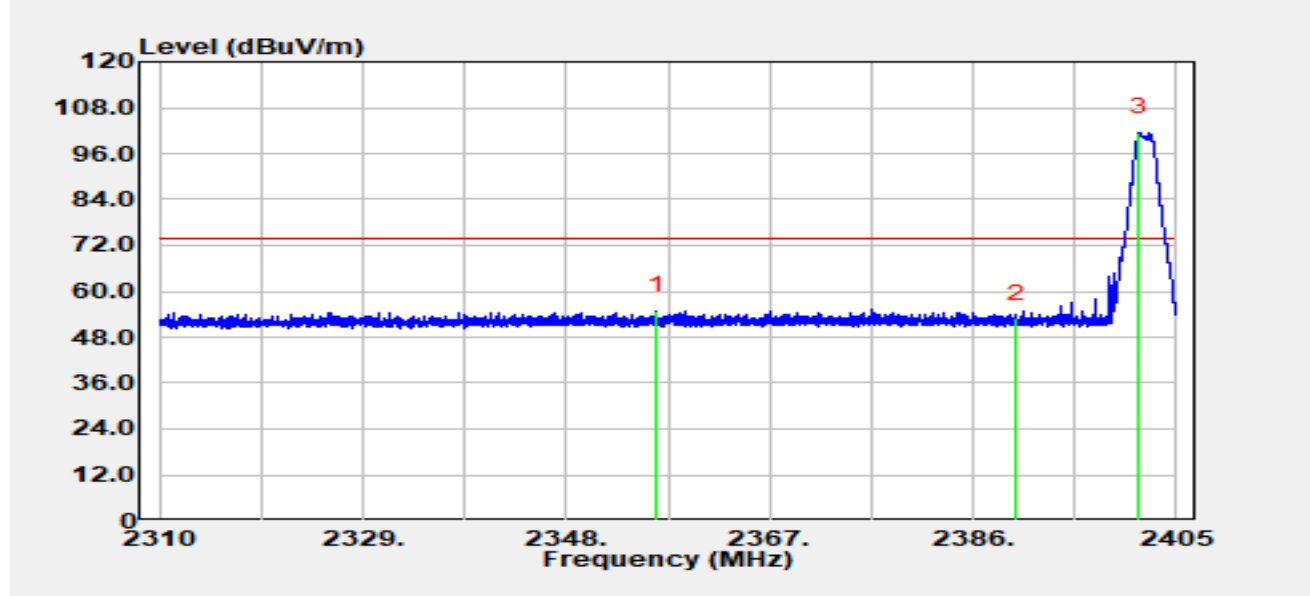


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2356.46	25.42	29.55	54.97	-19.03	74.00	Peak
2		2390.00	23.36	29.53	52.89	-21.11	74.00	Peak
3		2401.54	71.91	29.55	101.46	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-2M at 2402 MHz		

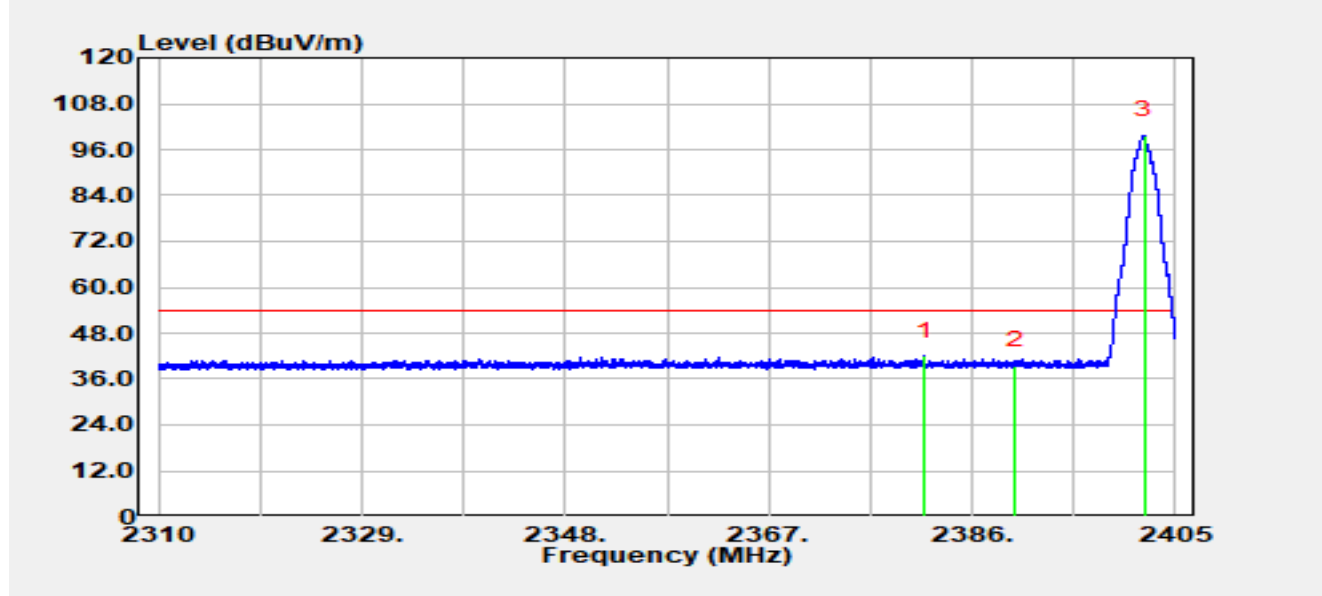


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2381.59	12.39	29.52	41.91	-12.09	54.00	Average
2		2390.00	10.07	29.53	39.60	-14.40	54.00	Average
3		2402.07	70.12	29.55	99.67	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-2M at 2480 MHz		

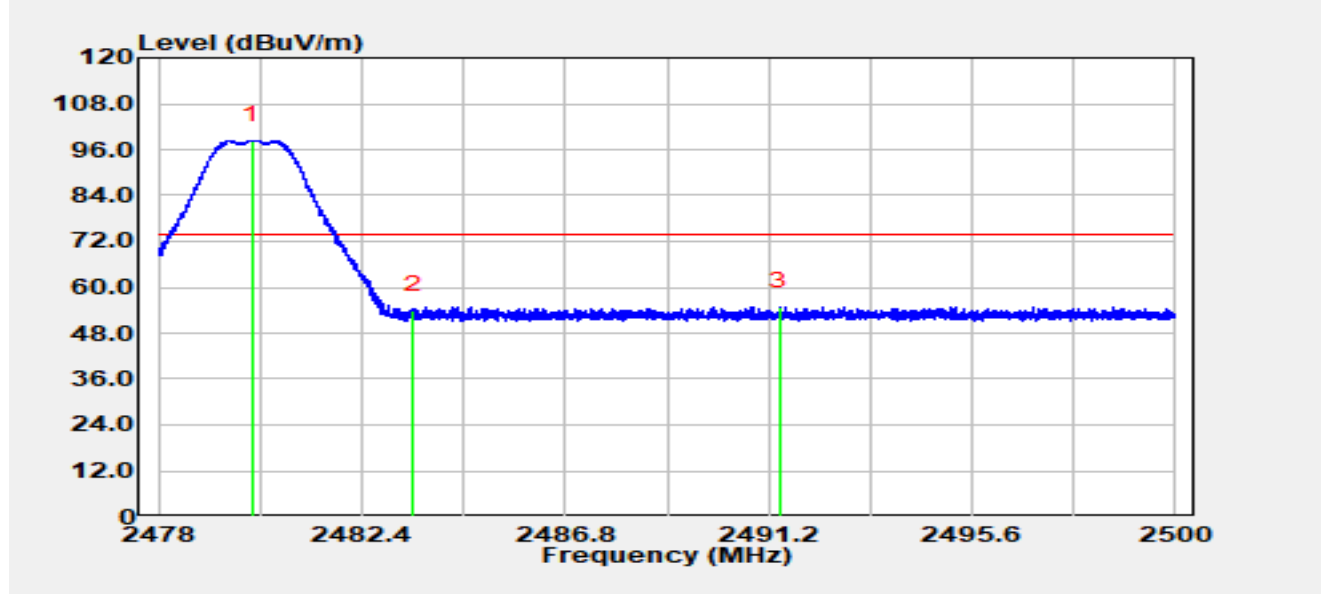


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.03	68.85	29.58	98.43	N/A	N/A	Peak
2		2483.50	24.36	29.59	53.95	-20.05	74.00	Peak
3	*	2491.44	25.31	29.62	54.93	-19.07	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-2M at 2480 MHz		

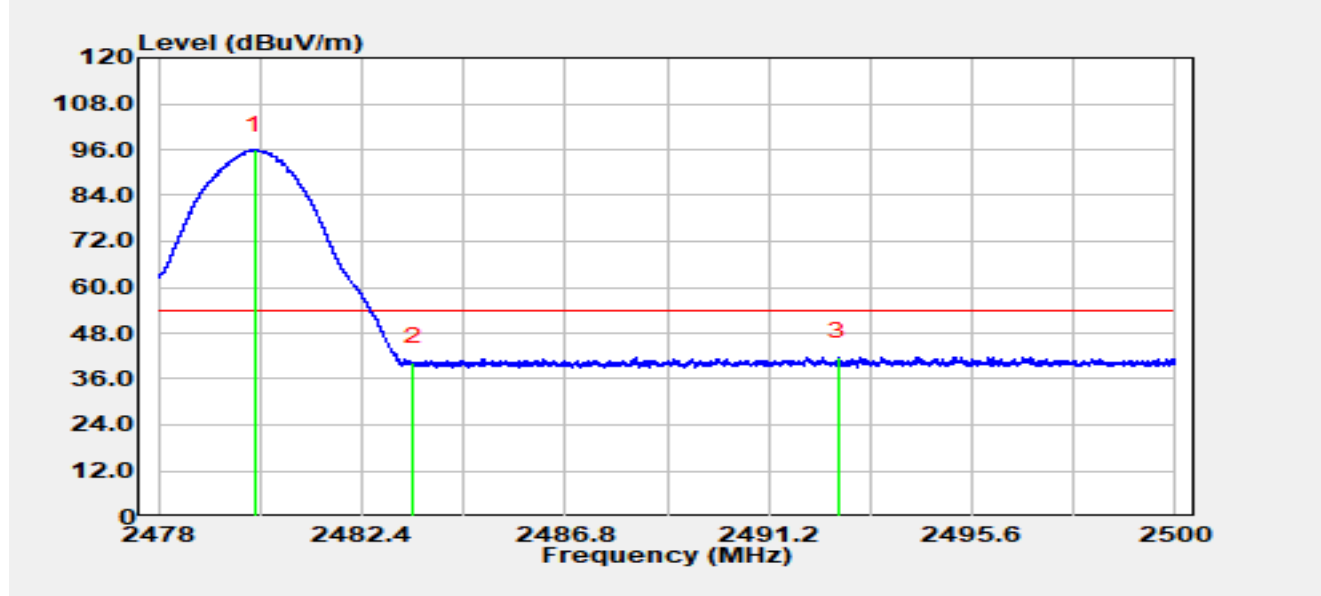


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.08	66.36	29.58	95.95	N/A	N/A	Average
2		2483.50	10.75	29.59	40.34	-13.66	54.00	Average
3	*	2492.71	12.18	29.62	41.81	-12.19	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-2M at 2480 MHz		

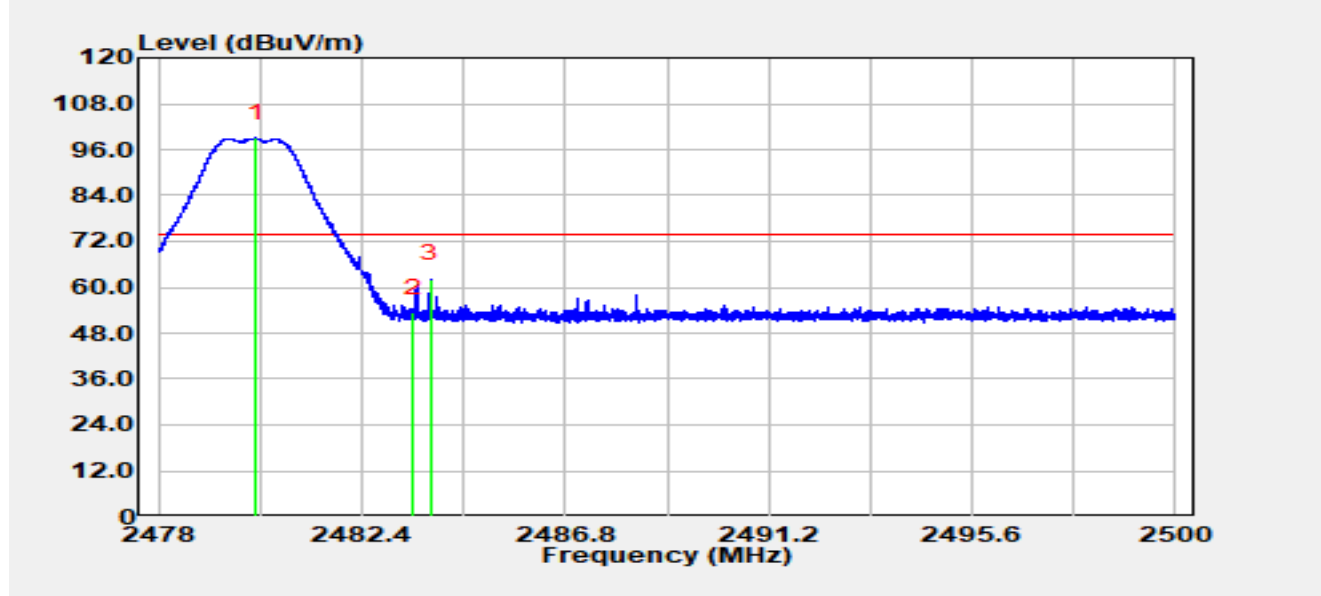


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.10	69.38	29.58	98.96	N/A	N/A	Peak
2		2483.50	23.70	29.59	53.29	-20.71	74.00	Peak
3	*	2483.89	32.56	29.60	62.15	-11.85	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-2M at 2480 MHz		

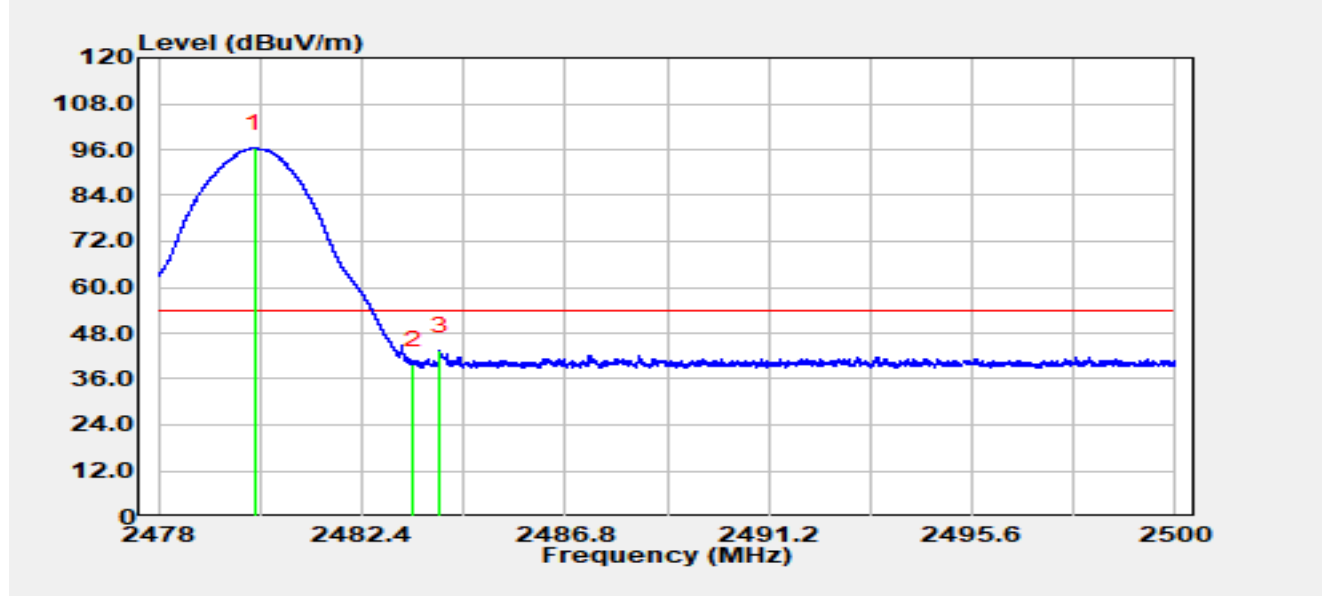


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.08	66.87	29.58	96.45	N/A	N/A	Average
2		2483.50	10.21	29.59	39.80	-14.20	54.00	Average
3	*	2484.08	13.87	29.60	43.46	-10.54	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-S2 at 2402 MHz		

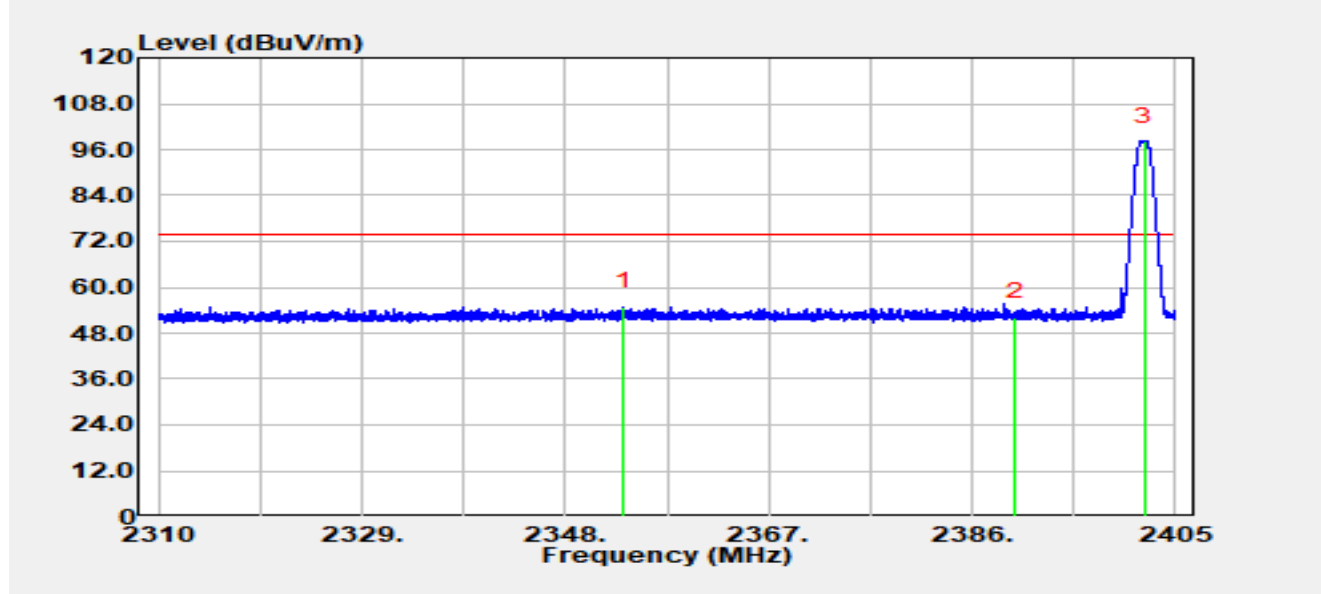


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2353.45	25.30	29.55	54.85	-19.15	74.00	Peak
2		2390.00	22.77	29.53	52.30	-21.70	74.00	Peak
3		2402.06	68.67	29.55	98.21	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-S2 at 2402 MHz		

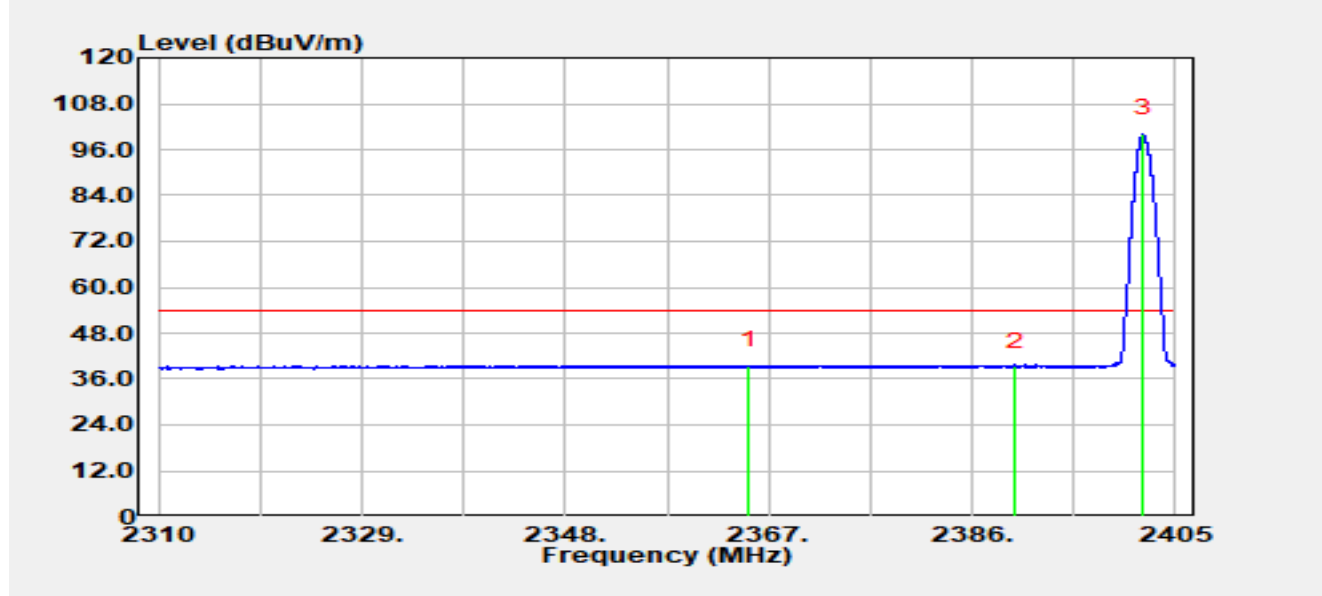


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2365.09	10.05	29.55	39.60	-14.40	54.00	Average
2		2390.00	9.78	29.53	39.31	-14.69	54.00	Average
3		2402.02	70.63	29.55	100.18	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-S2 at 2402 MHz		

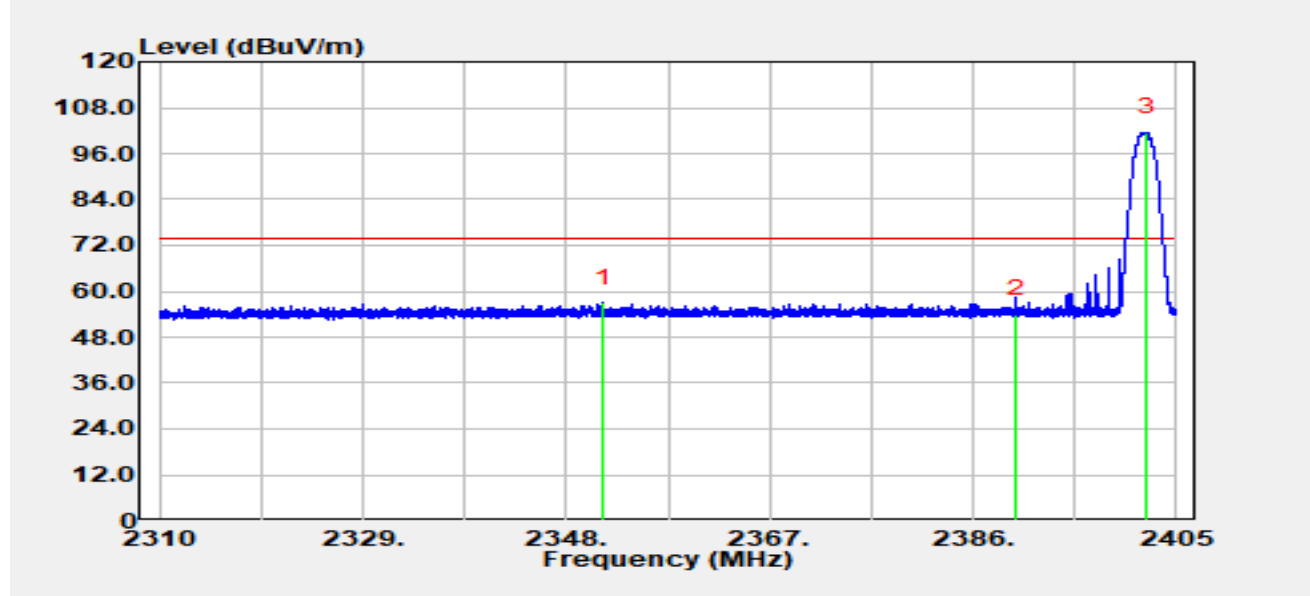


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.43	27.47	29.55	57.02	-16.98	74.00	Peak
2		2390.00	24.57	29.53	54.09	-19.91	74.00	Peak
3		2402.26	72.00	29.55	101.55	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-S2 at 2402 MHz		

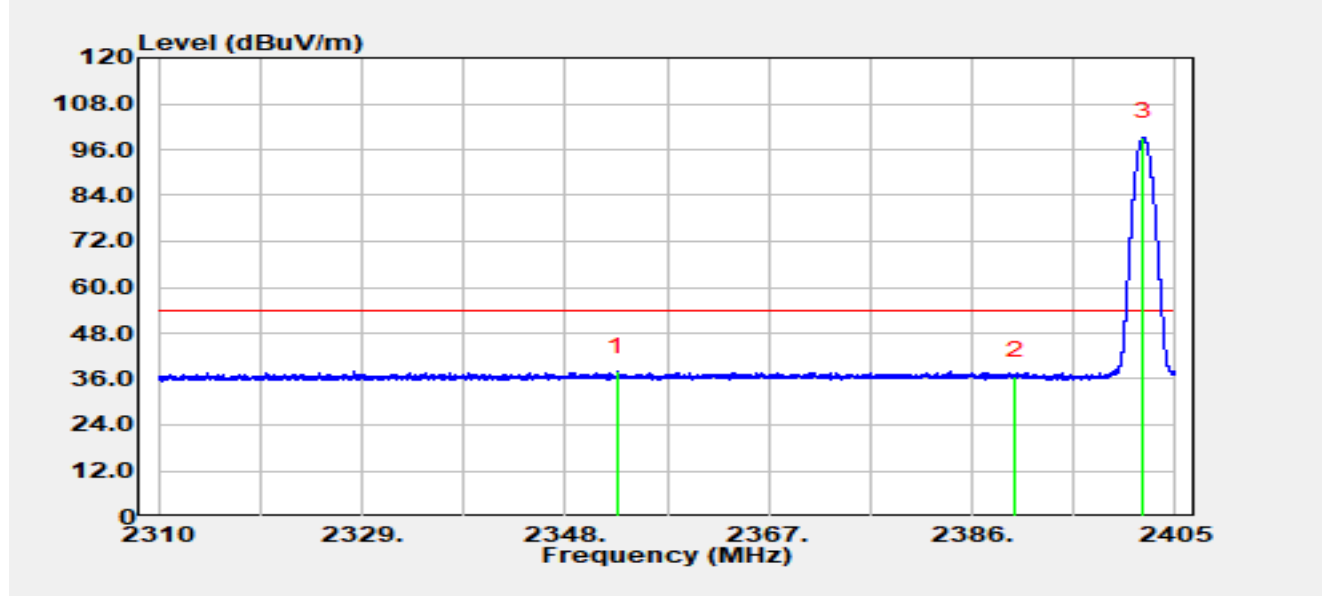


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.89	8.27	29.55	37.82	-16.18	54.00	Average
2		2390.00	7.30	29.53	36.83	-17.17	54.00	Average
3		2402.04	69.82	29.55	99.37	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-S2 at 2480 MHz		

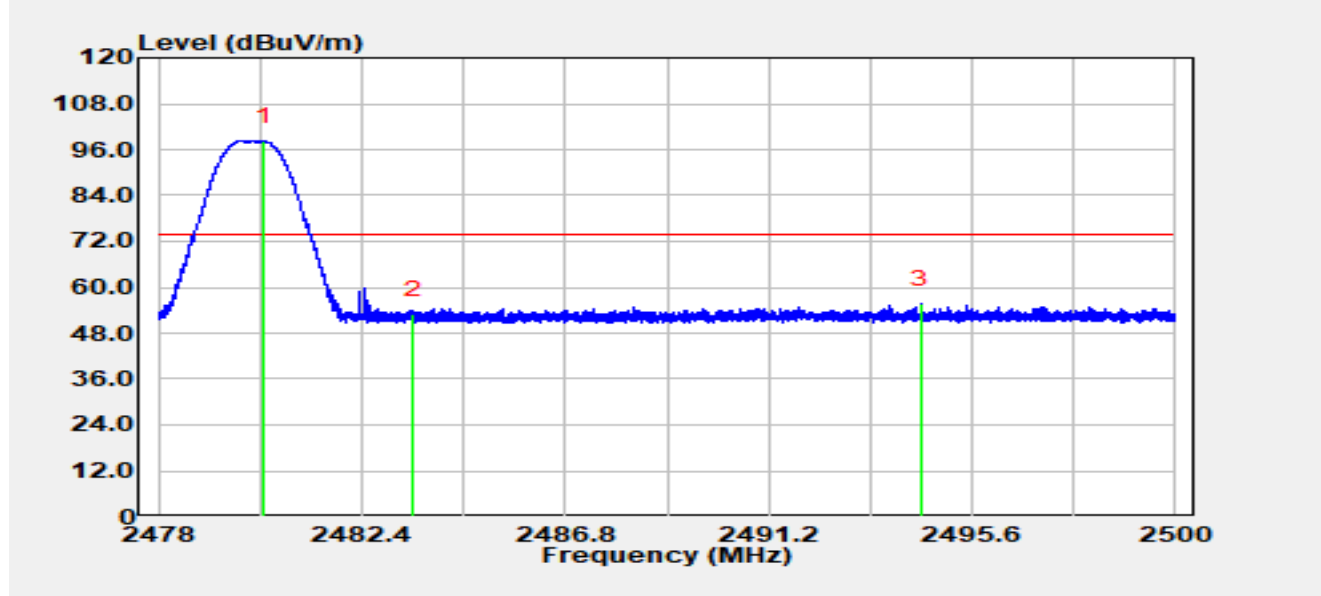


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.30	68.59	29.58	98.17	N/A	N/A	Peak
2		2483.50	23.35	29.59	52.94	-21.06	74.00	Peak
3	*	2494.50	26.05	29.62	55.67	-18.33	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-S2 at 2480 MHz		

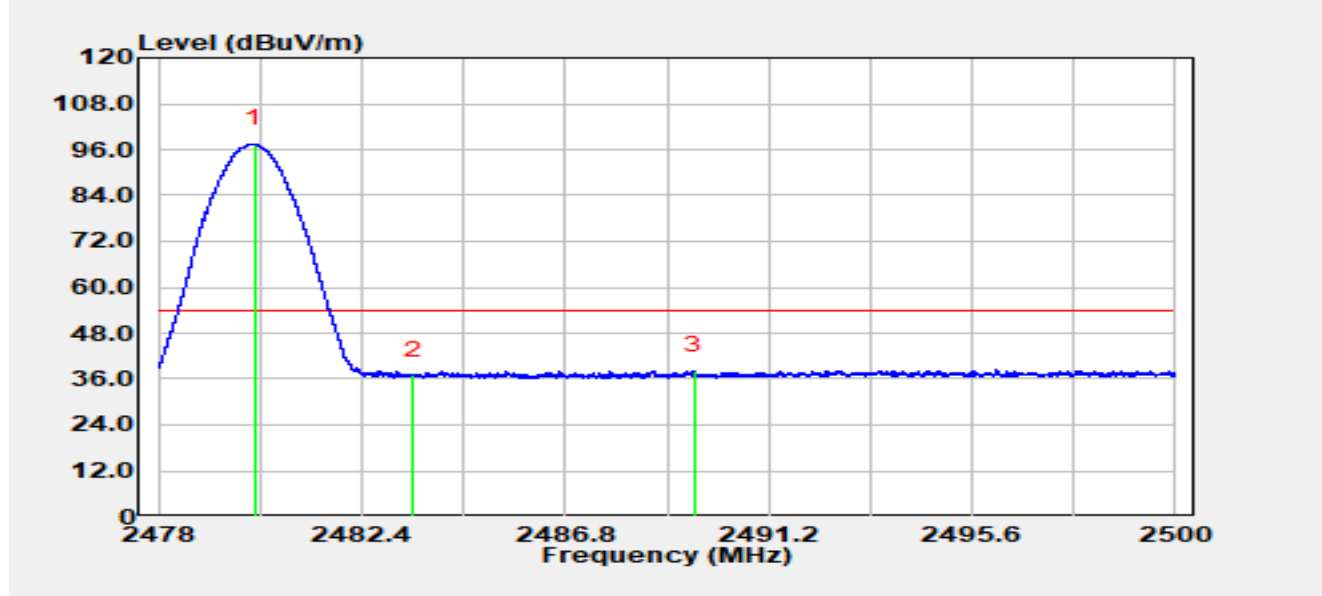


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.07	67.99	29.58	97.57	N/A	N/A	Average
2		2483.50	7.33	29.59	36.93	-17.07	54.00	Average
3	*	2489.58	8.60	29.61	38.22	-15.78	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-S2 at 2480 MHz		

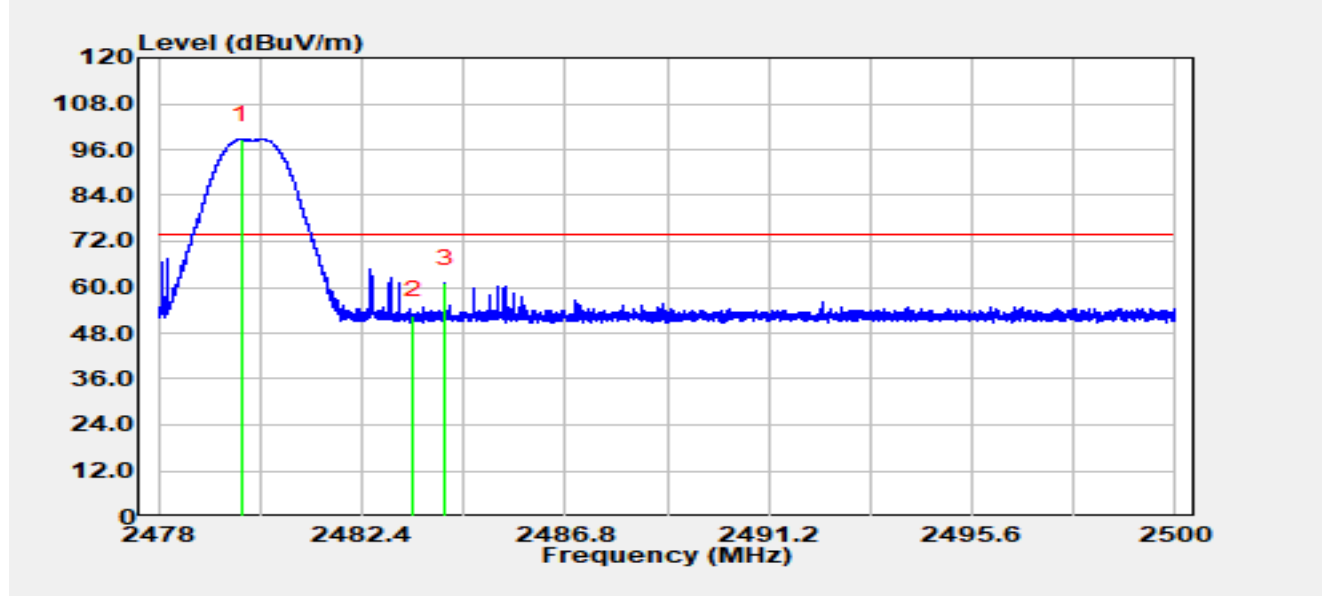


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.79	69.12	29.58	98.70	N/A	N/A	Peak
2		2483.50	23.09	29.59	52.69	-21.31	74.00	Peak
3	*	2484.20	31.52	29.60	61.12	-12.88	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-S2 at 2480 MHz		

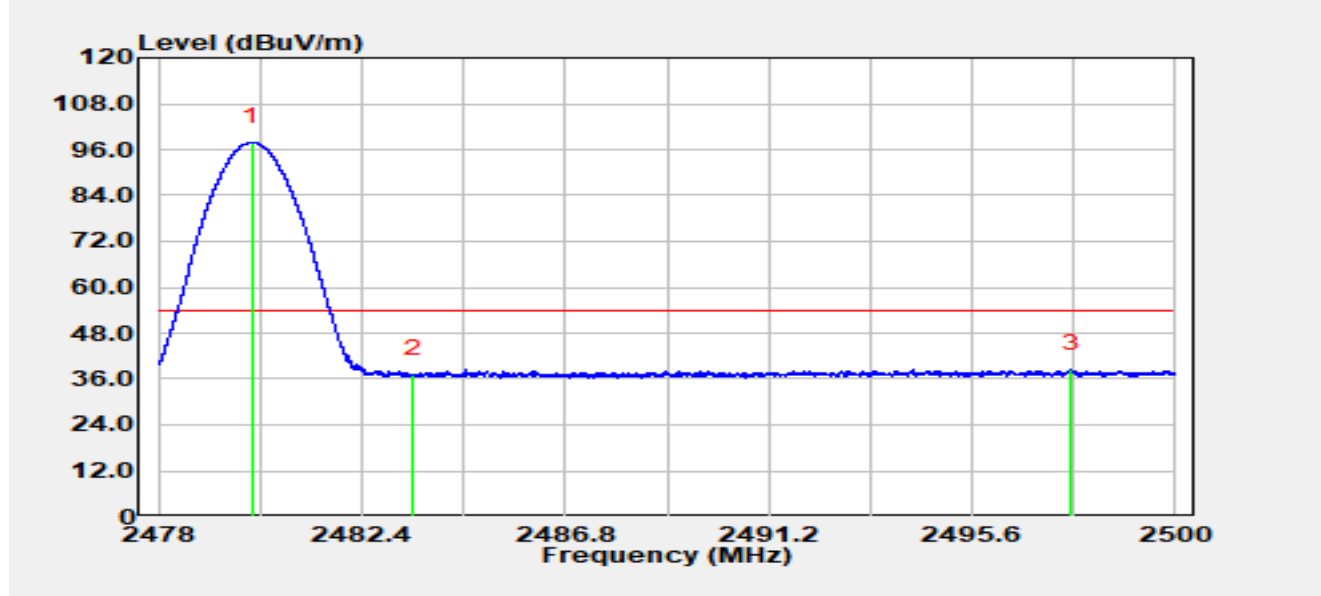


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.02	68.41	29.58	97.99	N/A	N/A	Average
2		2483.50	7.56	29.59	37.15	-16.85	54.00	Average
3	*	2497.75	8.87	29.62	38.49	-15.51	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-S8 at 2402 MHz		

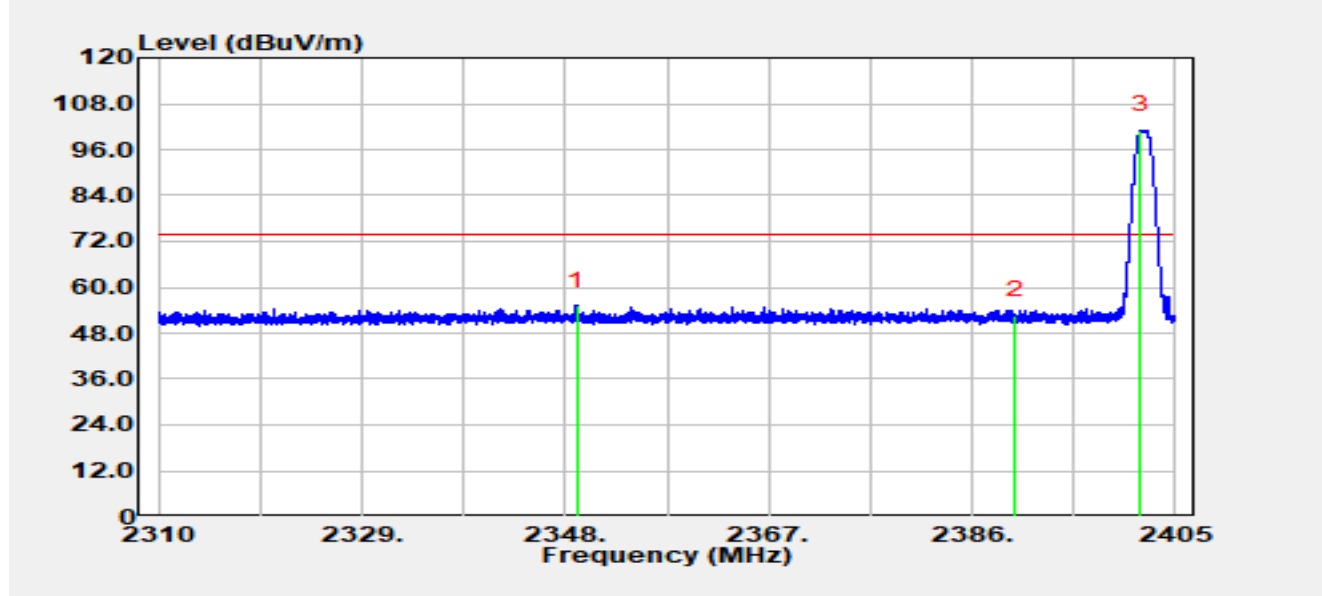


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2349.05	25.56	29.55	55.11	-18.89	74.00	Peak
2		2390.00	23.01	29.53	52.54	-21.46	74.00	Peak
3		2401.79	71.45	29.55	101.00	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-S8 at 2402 MHz		

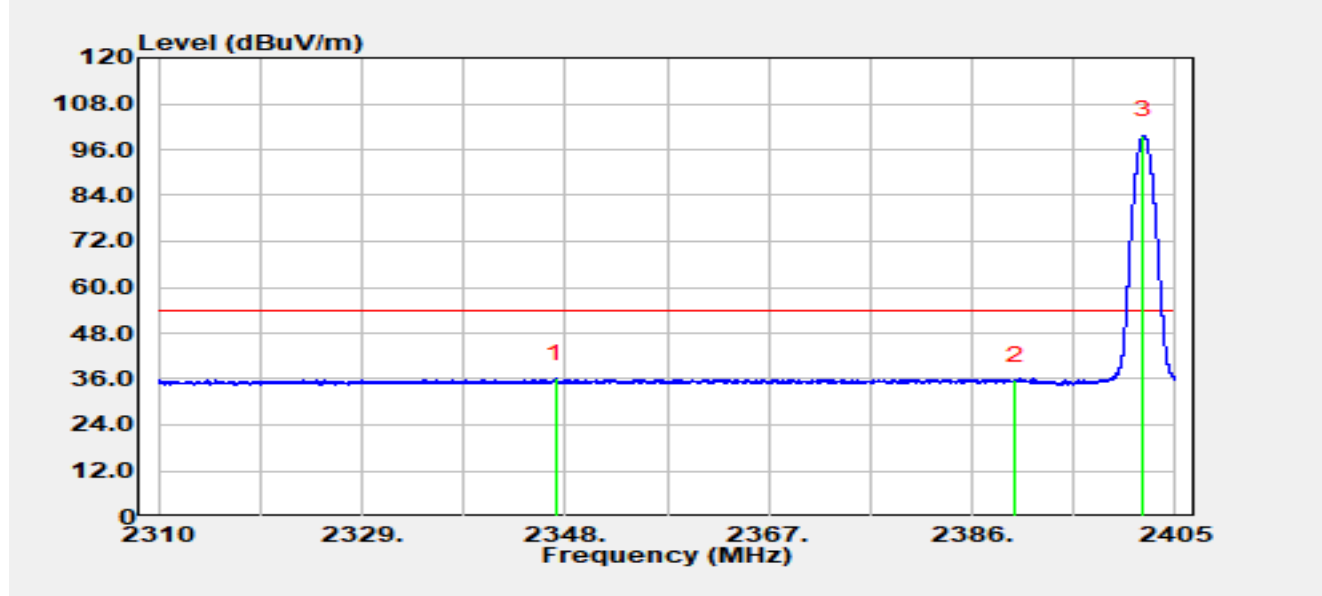


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2347.05	6.60	29.55	36.15	-17.85	54.00	Average
2		2390.00	6.11	29.53	35.64	-18.36	54.00	Average
3		2401.94	70.17	29.55	99.72	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-S8 at 2402 MHz		

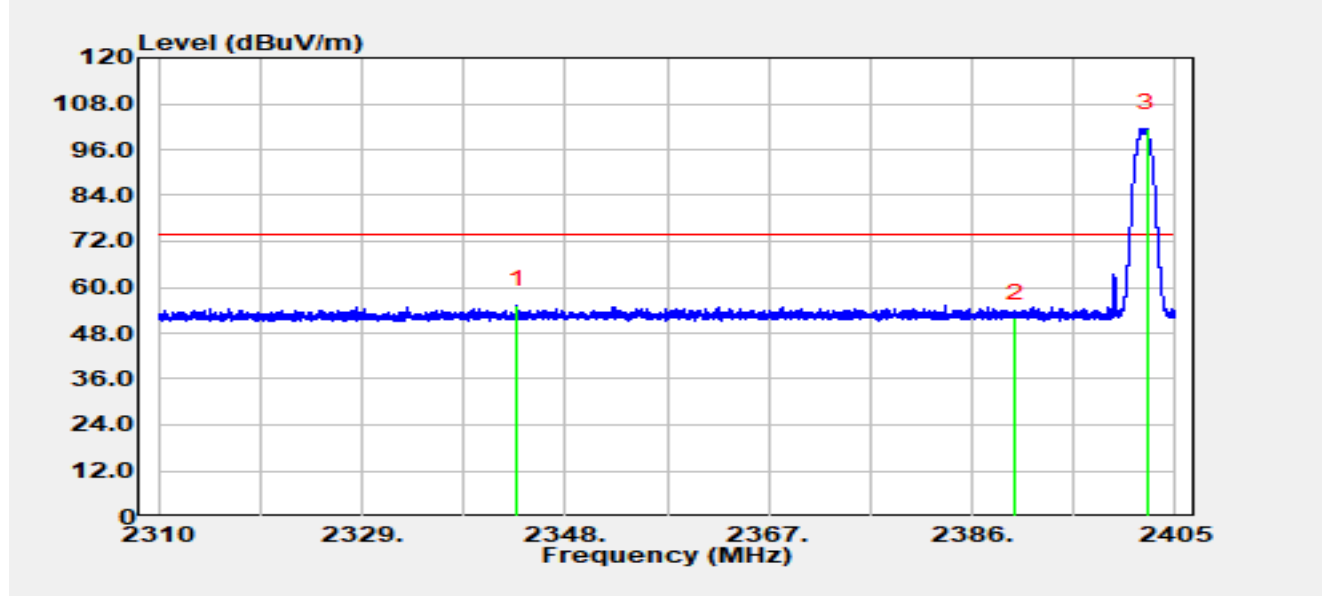


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2343.52	25.92	29.54	55.46	-18.54	74.00	Peak
2		2390.00	22.41	29.53	51.94	-22.06	74.00	Peak
3		2402.33	71.90	29.55	101.45	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-S8 at 2402 MHz		

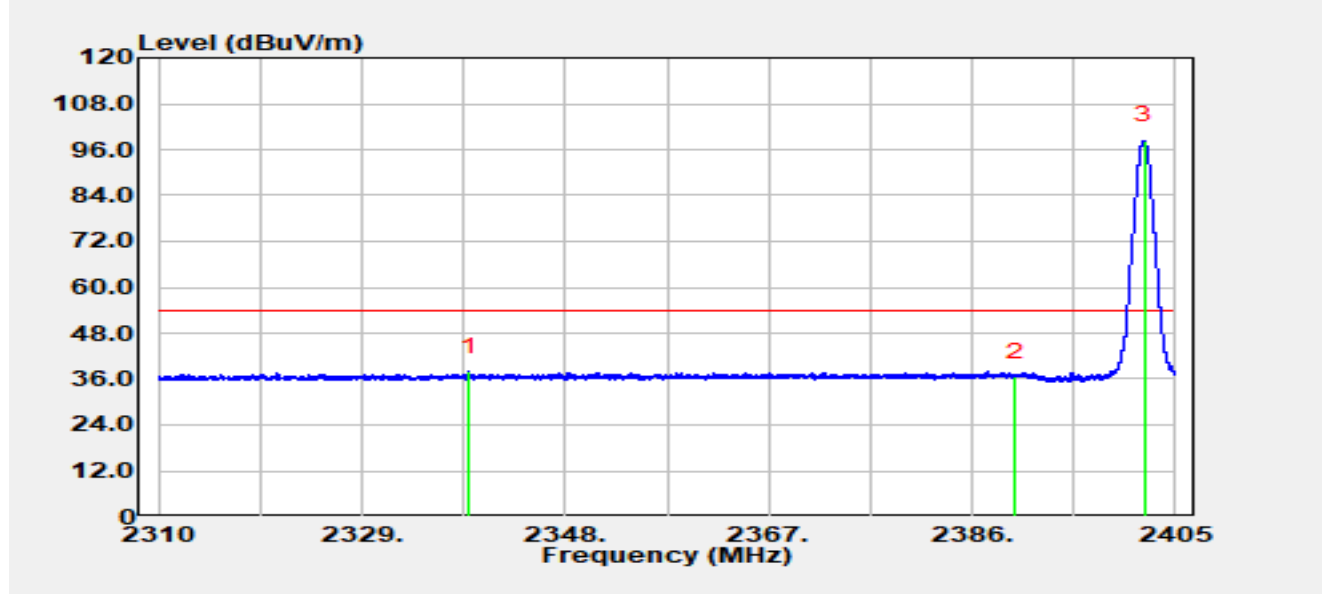


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2339.00	8.36	29.53	37.90	-16.10	54.00	Average
2		2390.00	7.13	29.53	36.66	-17.34	54.00	Average
3		2402.11	68.77	29.55	98.32	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-S8 at 2480 MHz		

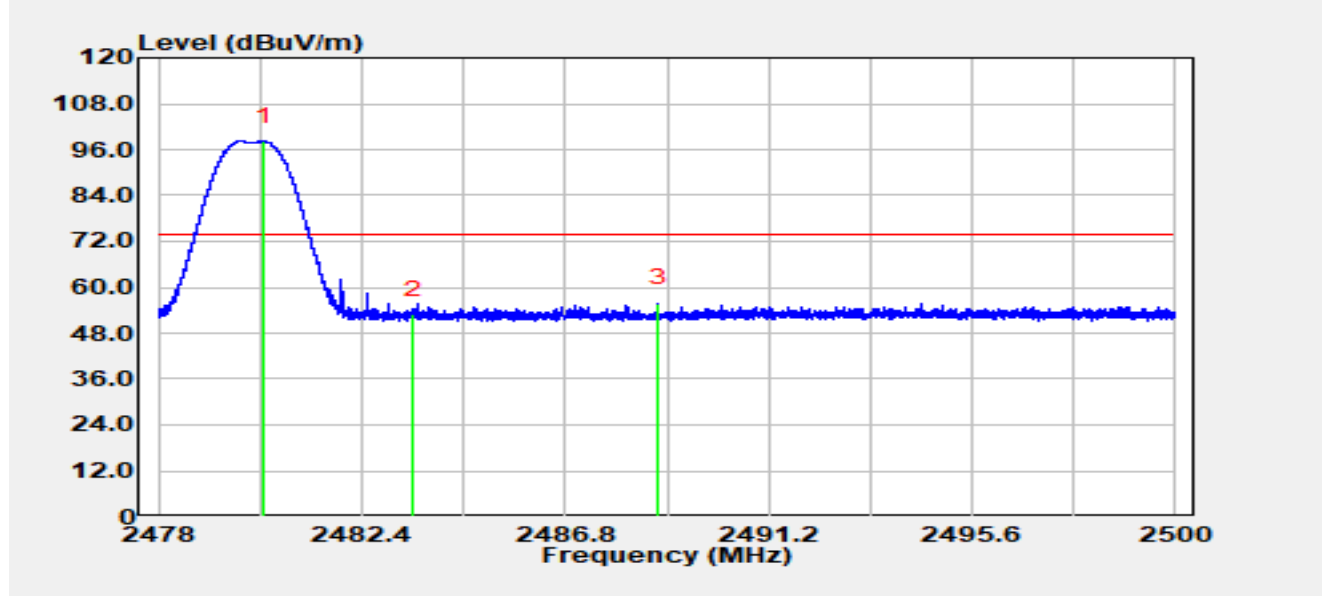


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.29	68.62	29.58	98.21	N/A	N/A	Peak
2		2483.50	23.25	29.59	52.85	-21.15	74.00	Peak
3	*	2488.80	26.20	29.61	55.81	-18.19	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by BLE-S8 at 2480 MHz		

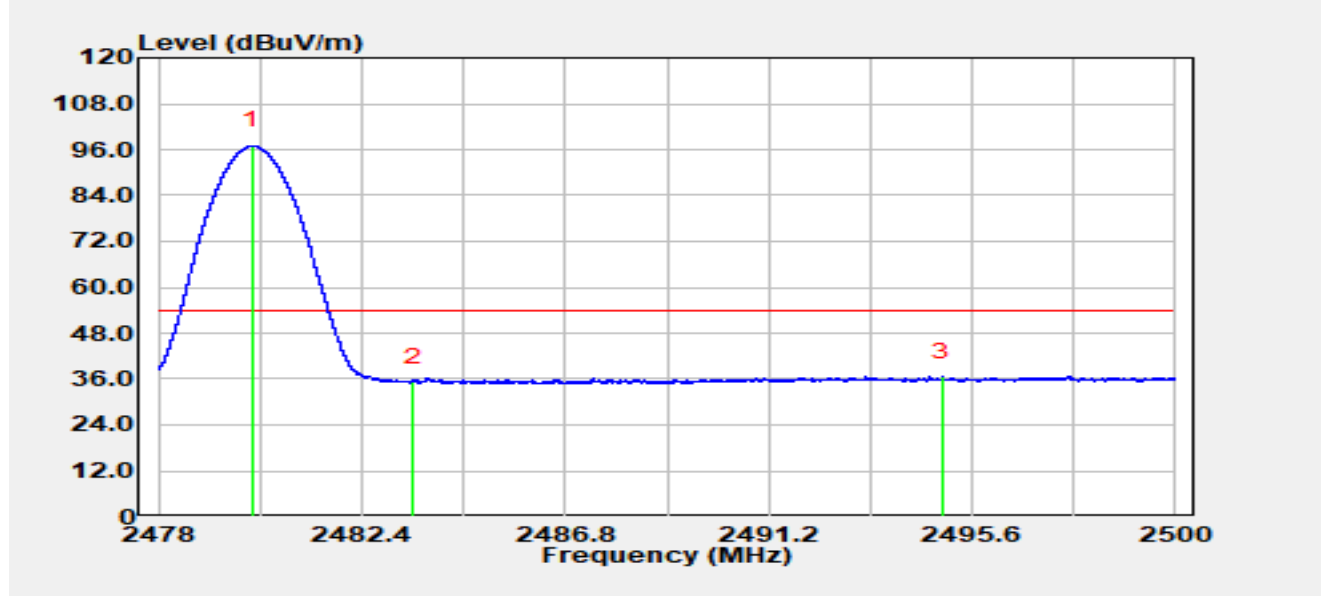


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.04	67.34	29.58	96.92	N/A	N/A	Average
2		2483.50	5.63	29.59	35.22	-18.78	54.00	Average
3	*	2494.96	6.94	29.62	36.56	-17.44	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-S8 at 2480 MHz		

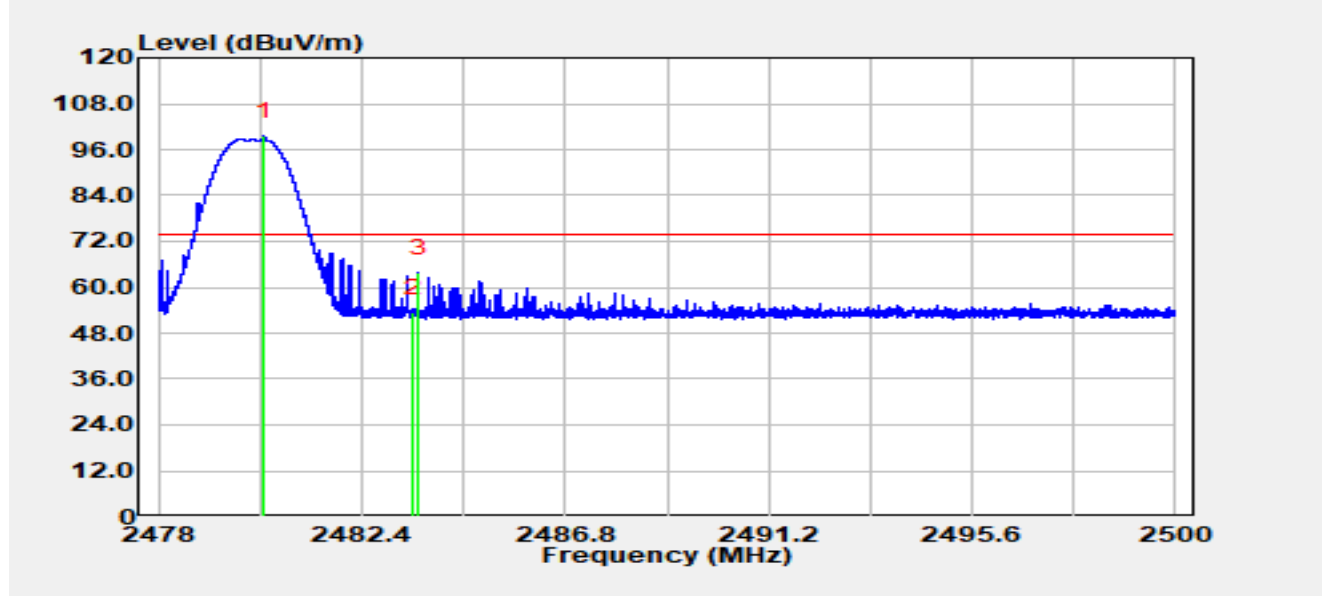


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.29	69.87	29.58	99.46	N/A	N/A	Peak
2		2483.50	23.80	29.59	53.40	-20.60	74.00	Peak
3	*	2483.63	34.07	29.59	63.66	-10.34	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-08
Temperature	20.5 °C	Humidity	38.3%
Limit	FCC_2.4G_RE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by BLE-S8 at 2480 MHz		

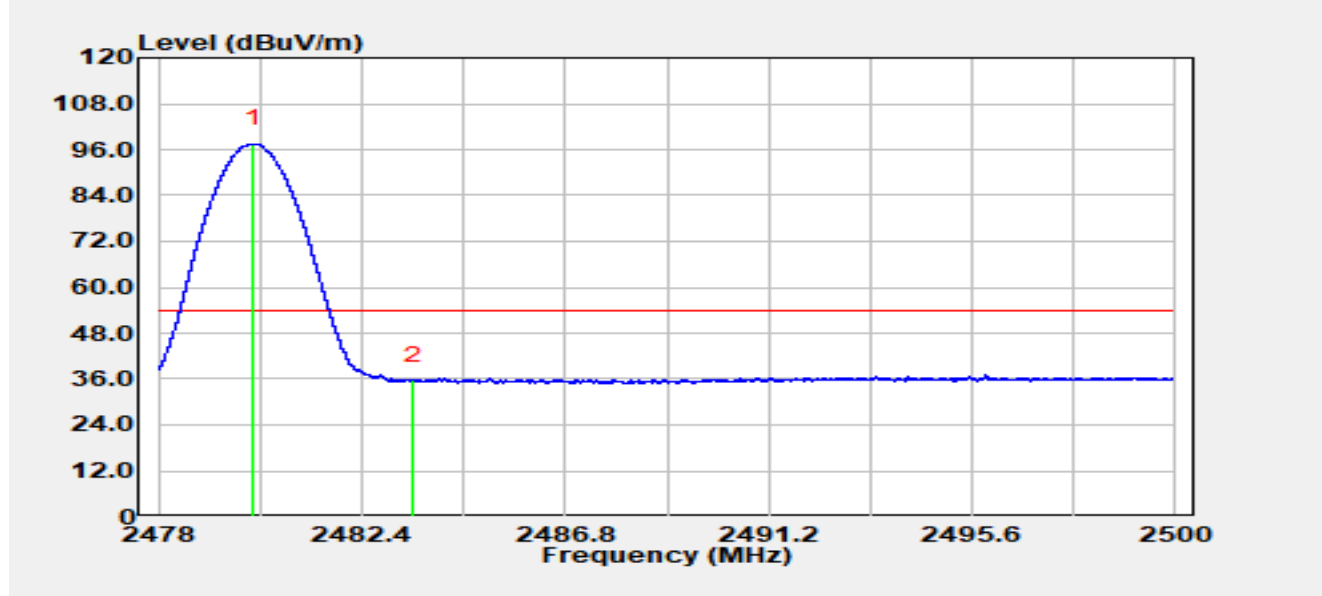


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.04	67.92	29.58	97.51	N/A	N/A	Average
2	*	2483.50	6.11	29.59	35.70	-18.30	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2026-01-15
Temperature	19.2 °C	Humidity	37.7%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by BLE 1M at 2440 MHz		

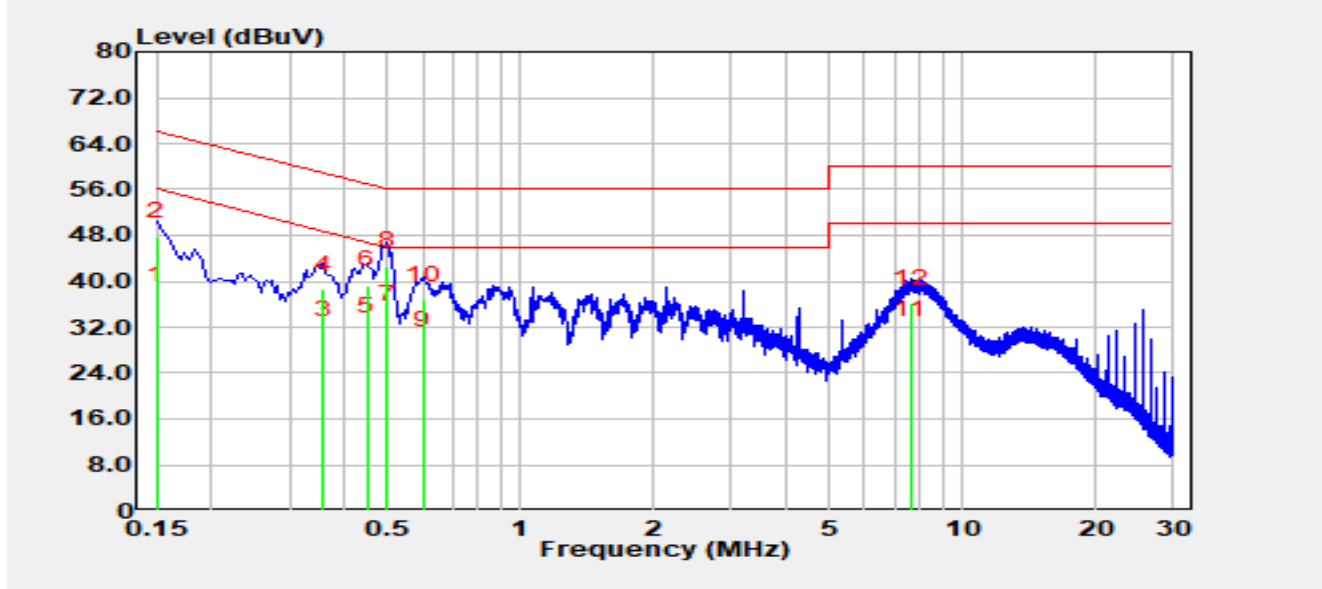


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	26.90	9.92	36.82	-19.18	56.00	Average
2		0.15	37.80	9.92	47.72	-18.28	66.00	QP
3		0.36	20.60	10.03	30.63	-18.15	48.77	Average
4		0.36	28.50	10.03	38.53	-20.25	58.77	QP
5		0.45	21.10	10.08	31.18	-15.70	46.88	Average
6		0.45	29.30	10.08	39.38	-17.50	56.88	QP
7	*	0.50	23.30	10.11	33.41	-12.61	46.02	Average
8		0.50	32.50	10.11	42.61	-13.41	56.02	QP
9		0.60	18.60	10.16	28.76	-17.24	46.00	Average
10		0.60	26.60	10.16	36.76	-19.24	56.00	QP
11		7.62	19.10	11.42	30.52	-19.48	50.00	Average
12		7.62	24.70	11.42	36.12	-23.88	60.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2026-01-15
Temperature	19.2 °C	Humidity	37.7%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by BLE 1M at 2440 MHz		

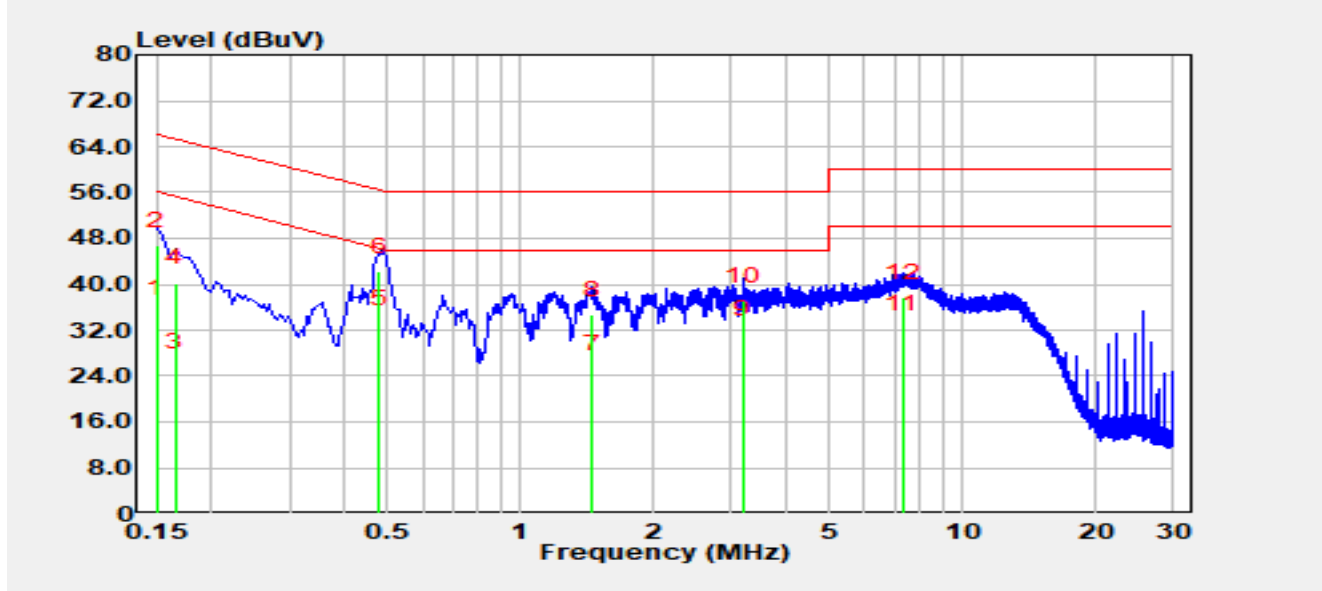

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	25.00	9.97	34.97	-21.03	56.00	Average
2		0.15	36.80	9.97	46.77	-19.23	66.00	QP
3		0.17	15.50	9.96	25.46	-29.70	55.16	Average
4		0.17	30.30	9.96	40.26	-24.90	65.16	QP
5	*	0.48	22.90	10.12	33.02	-13.35	46.37	Average
6		0.48	32.10	10.12	42.22	-14.15	56.37	QP
7		1.45	14.60	10.57	25.17	-20.83	46.00	Average
8		1.45	24.10	10.57	34.67	-21.33	56.00	QP
9		3.19	19.80	11.41	31.21	-14.79	46.00	Average
10		3.19	25.70	11.41	37.11	-18.89	56.00	QP
11		7.33	20.60	11.40	32.00	-18.00	50.00	Average
12		7.33	26.20	11.40	37.60	-22.40	60.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to “R25S1021124-UT” file.

Appendix C - EUT Photograph

Refer to "R25S1021124-UE" file.

_____ The End _____