

Test Result

Project Number: BL-SZ2210335

Test Time: 2022-03-25_01.43.55

Temp.(°C): 23.8

Humidity (%RH): 46

Test Site: 3M-2

Test Standard: FCC PART 15C

Test Engineer: Lin Shuilong

EUT Name: 手机-S02


Model Number: N.A

Serial Number: CTGED01

Work Mode: BLE CH0

Remark: 裸机

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

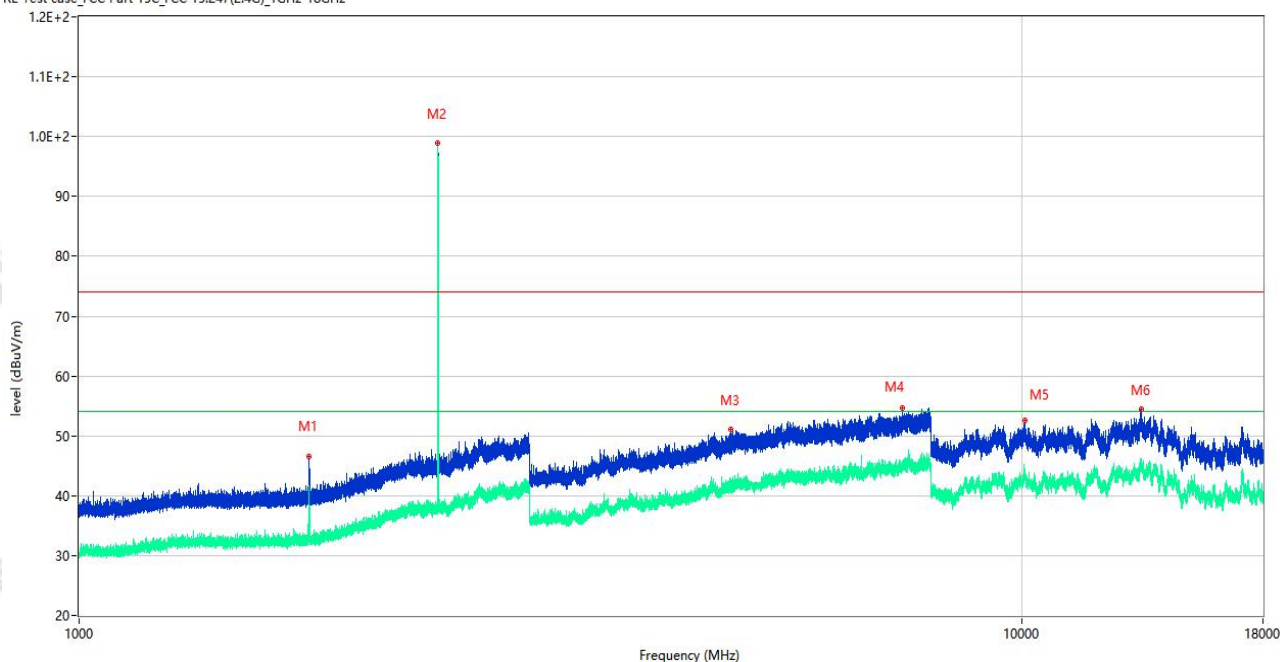

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1752.700	46.51	-16.83	74.0	-27.49	Peak	113.00	150	Horizontal	Pass
1**	1752.700	40.45	-16.83	54.0	-13.55	AV	113.00	150	Horizontal	Pass
2	2401.700	98.87	-12.96	74.0	24.87	Peak	325.00	150	Horizontal	N/A
2**	2401.700	97.97	-12.96	54.0	43.97	AV	325.00	150	Horizontal	N/A
3	4908.750	51.00	-2.10	74.0	-23.00	Peak	155.00	150	Horizontal	Pass
3**	4908.750	41.05	-2.10	54.0	-12.95	AV	155.00	150	Horizontal	Pass
4	7464.250	54.68	0.70	74.0	-19.32	Peak	142.00	150	Horizontal	Pass
4**	7464.250	44.66	0.70	54.0	-9.34	AV	142.00	150	Horizontal	Pass
5	10063.000	52.50	-0.79	74.0	-21.50	Peak	286.00	150	Horizontal	Pass
5**	10063.000	43.48	-0.79	54.0	-10.52	AV	286.00	150	Horizontal	Pass
6	13394.000	54.48	1.46	74.0	-19.52	Peak	227.00	150	Horizontal	Pass
6**	13394.000	44.38	1.46	54.0	-9.62	AV	227.00	150	Horizontal	Pass

审核员(Reviewer): 夏龙

日期 (Date): 2022.3.25

Test Result

Project Number: BL-SZ2210335

Test Time: 2022-03-25_01.34.34

Temp.(°C): 23.8

Humidity (%RH): 46

Test Site: 3M-2

Test Standard: FCC PART 15C

Test Engineer: Lin Shuilong

EUT Name: 手机-S02


Model Number: N.A

Serial Number: CTGED01

Work Mode: BLE CH0

Remark: 裸机

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

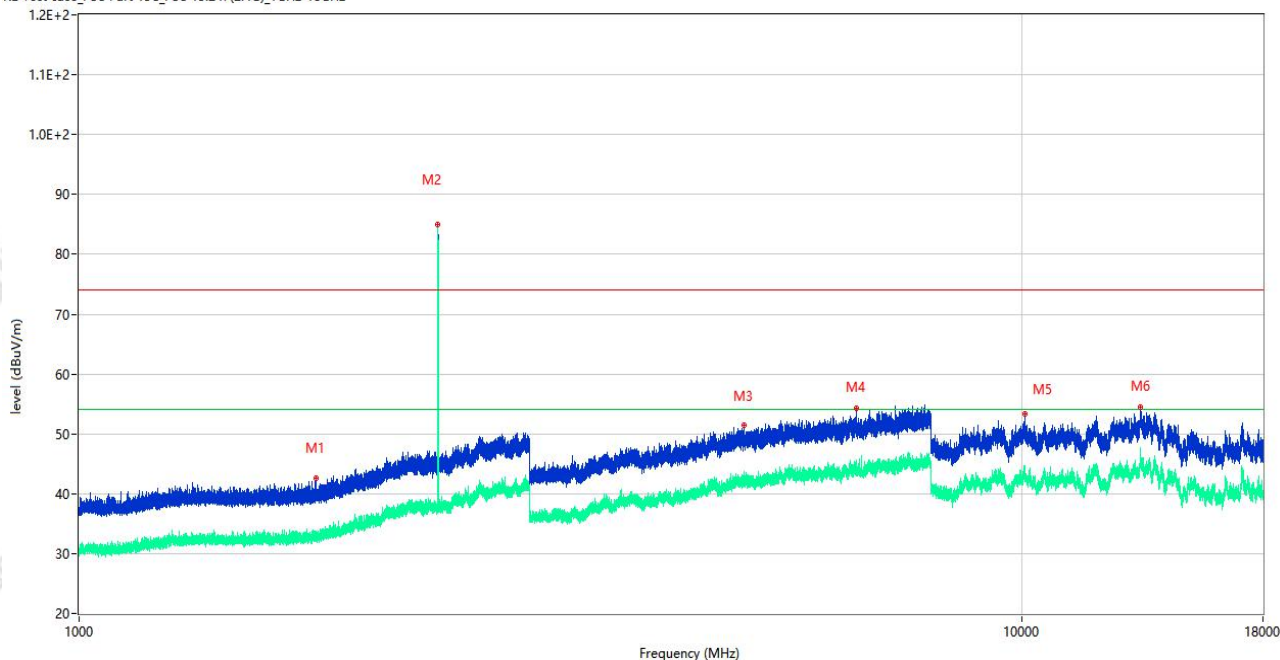

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1783.100	42.55	-16.60	74.0	-31.45	Peak	138.00	150	Vertical	Pass
1**	1783.100	33.62	-16.60	54.0	-20.38	AV	138.00	150	Vertical	Pass
2	2401.800	84.96	-12.97	74.0	10.96	Peak	261.00	150	Vertical	N/A
2**	2401.800	83.69	-12.97	54.0	29.69	AV	261.00	150	Vertical	N/A
3	5072.000	51.47	-0.65	74.0	-22.53	Peak	138.00	150	Vertical	Pass
3**	5072.000	41.68	-0.65	54.0	-12.32	AV	138.00	150	Vertical	Pass
4	6664.500	54.34	-0.56	74.0	-19.66	Peak	138.00	150	Vertical	Pass
4**	6664.500	44.40	-0.56	54.0	-9.60	AV	138.00	150	Vertical	Pass
5	10056.500	53.25	-0.61	74.0	-20.75	Peak	152.00	150	Vertical	Pass
5**	10056.500	44.20	-0.61	54.0	-9.80	AV	152.00	150	Vertical	Pass
6	13346.500	54.45	1.60	74.0	-19.55	Peak	94.00	150	Vertical	Pass
6**	13346.500	45.06	1.60	54.0	-8.94	AV	94.00	150	Vertical	Pass

审核员(Reviewer): 夏龙

日期 (Date): 2022.3.25