FCC Test Report

Report No.:AGC01684200404FE04

FCC ID	:	2AV8HMTV101
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Modeshift Validator
BRAND NAME	:	Modeshift
MODEL NAME	:	MTV101
APPLICANT	:	Telelink City Services .
DATE OF ISSUE	:	Jun. 03, 2020
STANDARD(S) **TEST PROCEDURE(S)**	:	FCC Part 15.247 KDB 558074 D01 15.247 Meas Guidance v05r01
REPORT VERSION	:	V1.0

Attestation of ***G***lobal ***C***ompliance (Shenzhen) Co., Ltd

CAUTION:
This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 03, 2020	Valid	Initial Release

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY 5
2. GENERAL INFORMATION 6
2.1. PRODUCT DESCRIPTION 6
2.2. TABLE OF CARRIER FREQUENCYS 6
2.3. IEEE 802.11N MODULATION SCHEME 7
2.4. RELATED SUBMITTAL(S) / GRANT (S) 7
2.5. TEST METHODOLOGY 8
2.6. SPECIAL ACCESSORIES 8
2.7. EQUIPMENT MODIFICATIONS 8
3. MEASUREMENT UNCERTAINTY 9
4. DESCRIPTION OF TEST MODES 10
5 SYSTEM TEST CONFIGURATION 11
5.1. CONFIGURATION OF EUT SYSTEM 11
5.2. EQUIPMENT USED IN EUT SYSTEM 11
5.3. SUMMARY OF TEST RESULTS 11
6. TEST FACILITY 12
6. OUTPUT POWER 13
6.1. MEASUREMENT PROCEDURE 13
6.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 13
6.3. LIMITS AND MEASUREMENT RESULT 14
7. 6DB BANDWIDTH 16
7.1. MEASUREMENT PROCEDURE 16
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 16
7.3. LIMITS AND MEASUREMENT RESULTS 17
9. CONDUCTED SPURIOUS EMISSION 21
9.1. MEASUREMENT PROCEDURE 21
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 21
9.3. MEASUREMENT EQUIPMENT USED 21
9.4. LIMITS AND MEASUREMENT RESULT 22
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY 32
10.1 MEASUREMENT PROCEDURE 32
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 32
10.3 MEASUREMENT EQUIPMENT USED 32
10.4 LIMITS AND MEASUREMENT RESULT 33
11. RADIATED EMISSION 37

11.1. MEASUREMENT PROCEDURE 37
11.2. TEST SETUP 38
11.3. LIMITS AND MEASUREMENT RESULT 39
11.4. TEST RESULT 40
12. BAND EDGE EMISSION 43
12.1. MEASUREMENT PROCEDURE 43
12.2. TEST SET-UP 43
12.3. TEST RESULT 44
13. FCC LINE CONDUCTED EMISSION TEST 60
13.1. LIMITS OF LINE CONDUCTED EMISSION TEST 60
13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 60
13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 61
13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 62
13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 63
APPENDIX A: PHOTOGRAPHS OF TEST SETUP 65

1. VERIFICATION OF CONFORMITY

Applicant	Telelink City Services .
Address	6 Panorama Sofia str., Richhill business center, block B, floor 2, 1766 Sofia, BULGARIA
Manufacturer	Telelink City Services .
Address	6 Panorama Sofia str., Richhill business center, block B, floor 2, 1766 Sofia, BULGARIA
Factory	Telelink City Services .
Address	6 Panorama Sofia str., Richhill business center, block B, floor 2, 1766 Sofia, BULGARIA
Product Designation	Modeshift Validator
Brand Name	Modeshift
Test Model	MTV101
Date of test	Apr. 22, 2020 to Jun. 03, 2020
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BGN/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

The test results of this report relate only to the tested sample identified in this report.

Prepared By	Donjon Huang (Project Engineer)	Jun. 01, 2020
Reviewed By	Max Zhang (Reviewer)	Jun. 03, 2020
Approved By	Forrest Lei (Authorized Officer)	Jun. 03, 2020

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as “Modeshift Validator”. It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz～2.462GHz
Output Power	IEEE 802.11b: 13.14dBm, IEEE 802.11g: 10.47dBm; IEEE 802.11n(20): 10.41dBm, IEEE 802.11n(40): 10.52dBm
Modulation	DSSS(DBPSK/DQPSK/CCK);OFDM(BPSK/QPSK/16-QAM/64-QAM)
Number of channels	11 Channels (IEEE802.11b/g/n20)& 7 Channels (IEEE802.11n40)
Hardware Version	TPS530-MAIN-V1.6
Software Version	TPS530_ALL_V1.0.0
Antenna Designation	PIFA Antenna(Comply with requirements of the FCC part 15.203)
Antenna Gain	0dBi
Power Supply	DC 9-36V
Test Voltage	DC 12V

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11

For 802.11n 40MHZ bandwidth system use Channel 3 to Channel 9.

2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps) 800nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AV8HMTV101** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013).
Radiated testing was performed at an antenna to EUT distance 3 meters.
Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.247 rules KDB 558074 D01 15.247 Meas Guidance v05r01.

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. MEASUREMENT UNCERTAINTY

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal operating
Note: Transmit by 802.11b with Date rate (1/2/5.5/11) Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54) Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65) Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)	

Note:

1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5 SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:

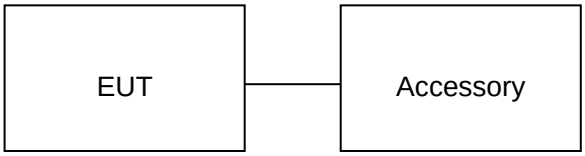

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Modeshift Validator	MTV101	FCC ID: 2AV8HMTV101	EUT
2	Adapter	HB24F-1202000SPA	DC 12V 2A	AE
3	USB Cable	N/A	N/A	AE

Note: All the accessories have been used during the test in conduction emission test.

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

ALL TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 12, 2019	Jun. 11, 2020
LISN	R&S	ESH2-Z5	100086	Aug.26, 2019	Aug.25, 2020
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 18, 2019	Dec. 17, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Feb. 27, 2020	Feb. 26, 2021
preamplifier	ChengYi	EMC184045SE	980508	Sep.23, 2019	Sep.22, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 17, 2019	May. 16, 2021
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 12, 2019	Jun. 11, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Jan. 09, 2019	Jan. 08, 2021
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep.09, 2019	Sep.08, 2020
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	Sep.09, 2019	Sep.08, 2020
LOOP ANTENNA	A.H	SAS-562B	/	Feb. 27, 2020	Feb. 26, 2021
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	/	Feb. 27, 2020	Feb. 26, 2021
Horn Ant (18G-40GHz)	ETS	QWH_SL_18_40_K_SG	/	Feb. 27, 2020	Feb. 26, 2021

6. OUTPUT POWER

6.1. MEASUREMENT PROCEDURE

For max average conducted output power test:

1. Connect EUT RF output port to power probe through an RF attenuator.
2. Connect the power probe to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.

Note：The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

6.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

AVERAGE POWER SETUP

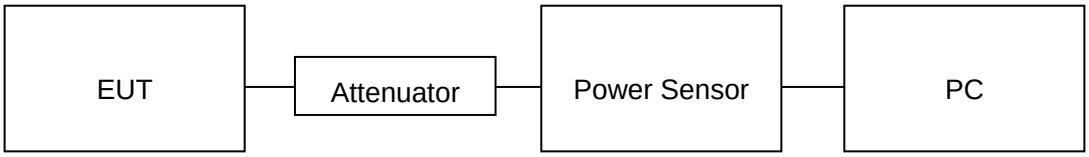

6.3. LIMITS AND MEASUREMENT RESULT

TEST ITEM	OUTPUT POWER
TEST MODE	802.11b with data rate 1

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	12.07	30	Pass
2.437	12.81	30	Pass
2.462	**13.14**	30	Pass

TEST ITEM	OUTPUT POWER
TEST MODE	802.11g with data rate 6

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	9.31	30	Pass
2.437	10.18	30	Pass
2.462	**10.47**	30	Pass

TEST ITEM	OUTPUT POWER
TEST MODE	802.11n 20 with data rate 6.5

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	9.17	30	Pass
2.437	10.00	30	Pass
2.462	**10.41**	30	Pass

TEST ITEM	OUTPUT POWER
TEST MODE	802.11n 40 with data rate 13.5

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.422	9.58	30	Pass
2.437	10.26	30	Pass
2.452	**10.52**	30	Pass

7. 6dB BANDWIDTH

7.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW⩾3×RBW.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

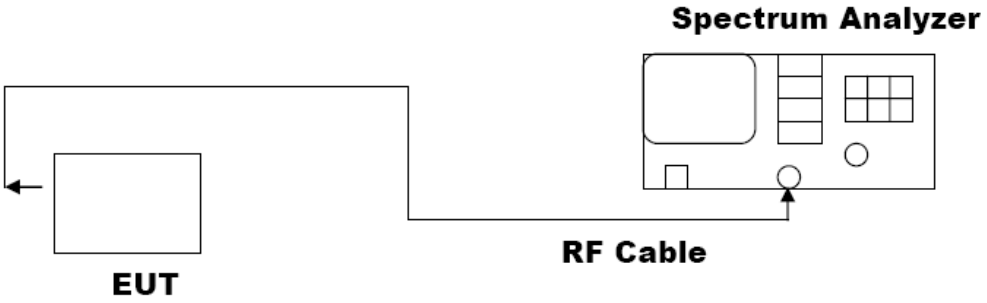

7.3. LIMITS AND MEASUREMENT RESULTS

Mode	Channel	6dB Bandwidth [MHz]	Verdict
11b	LCH	8.094	PASS
	MCH	8.053	PASS
	HCH	8.025	PASS
11g	LCH	15.68	PASS
	MCH	15.05	PASS
	HCH	15.68	PASS
11nHT20	LCH	16.27	PASS
	MCH	15.07	PASS
	HCH	15.88	PASS
11nHT40	LCH	35.70	PASS
	MCH	33.83	PASS
	HCH	35.70	PASS

Test Graph

11b-LCH	11b-MCH
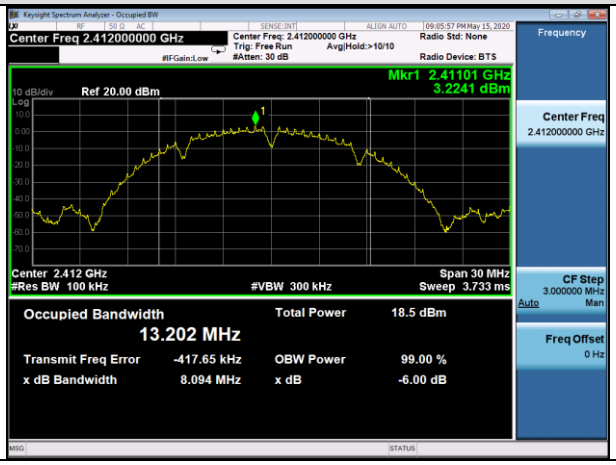	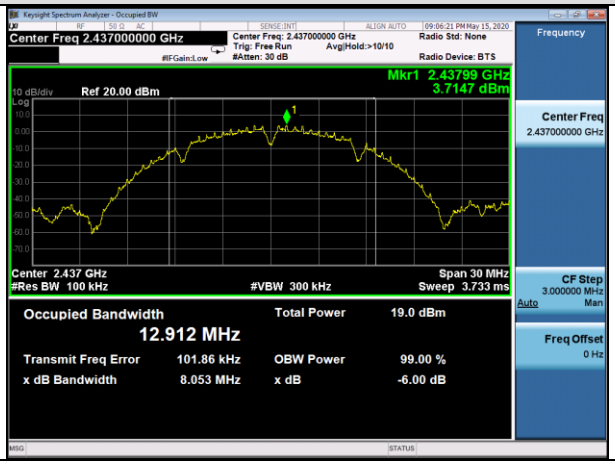

11b-HCH	11g-LCH
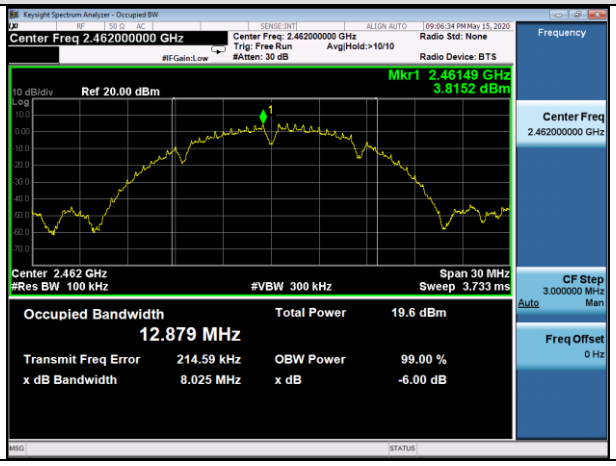	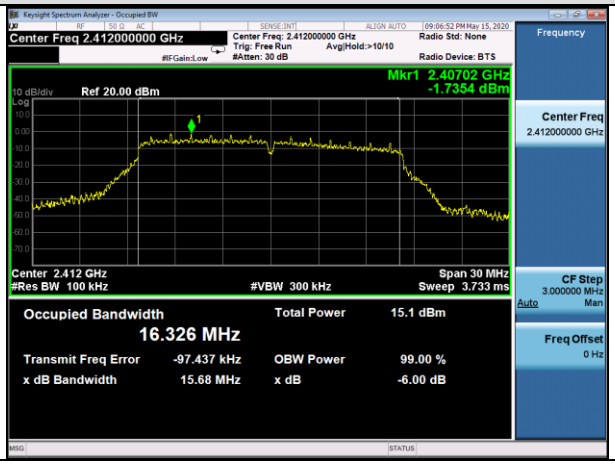

11g-MCH	11g-HCH
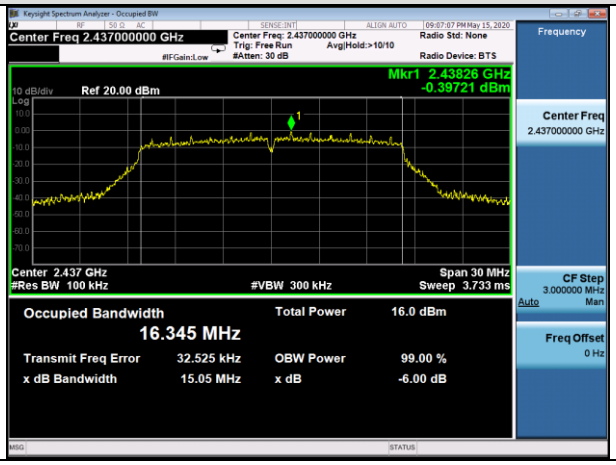	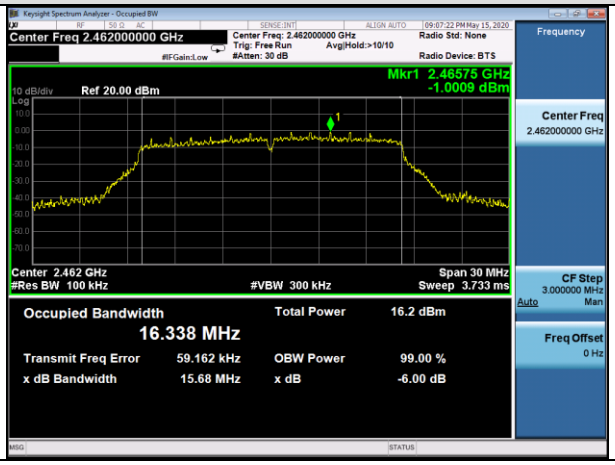

11nHT20-LCH	11nHT20-MCH
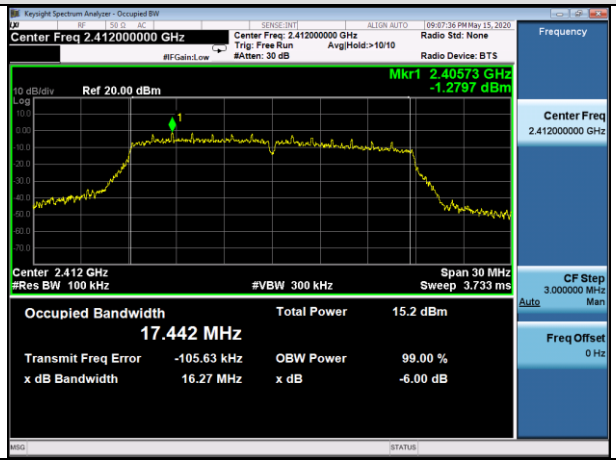	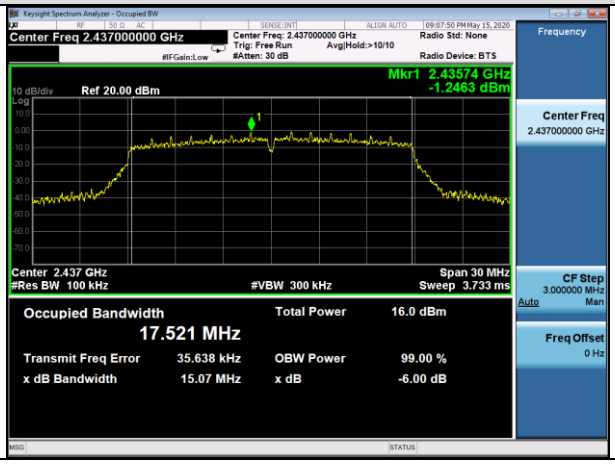

11nHT20-HCH	11nHT40-LCH
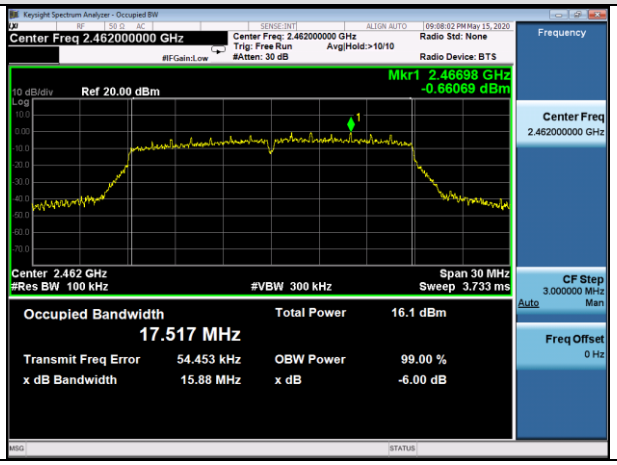	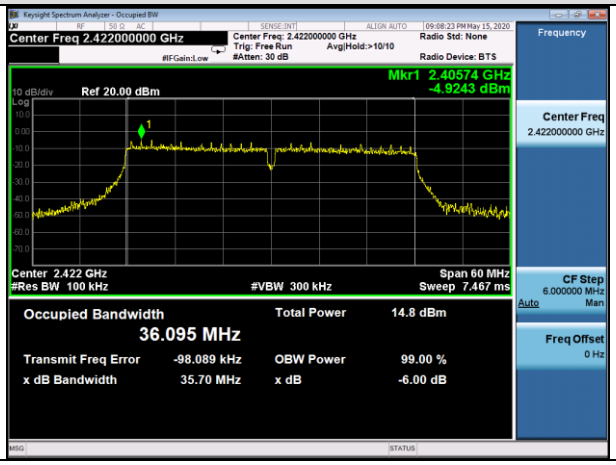

11nHT40-MCH	11nHT40-HCH
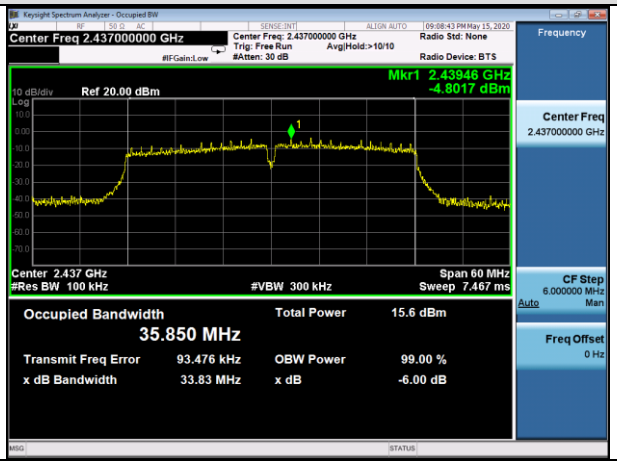	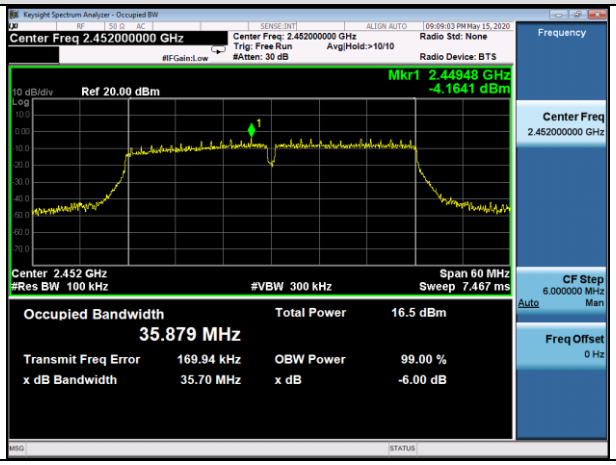

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW＞RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW＞RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	**Measurement Result**	
	Test Data	**Criteria**
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 30 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	Refer Test Graph	PASS

Test Graph

11B-LCH	11B-LCH
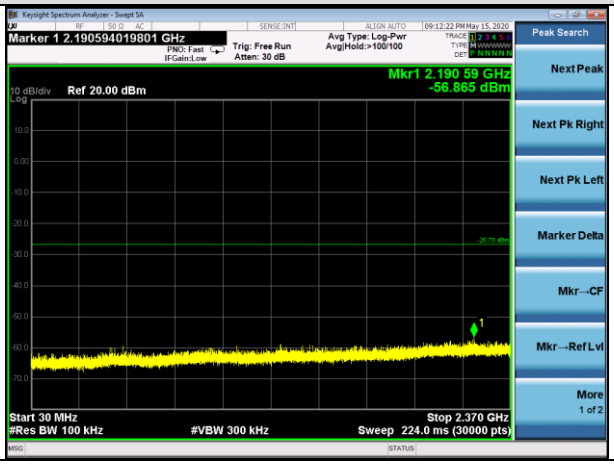	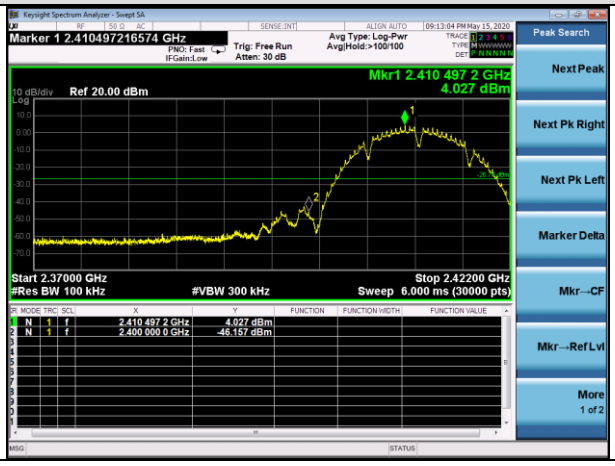

11B-LCH	11B-MCH
	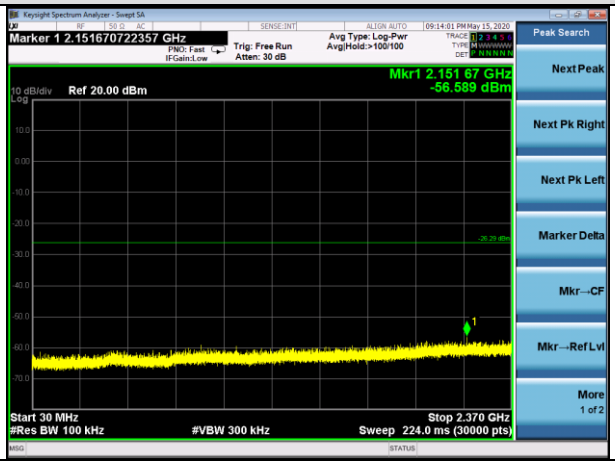

11B-MCH	11B-MCH
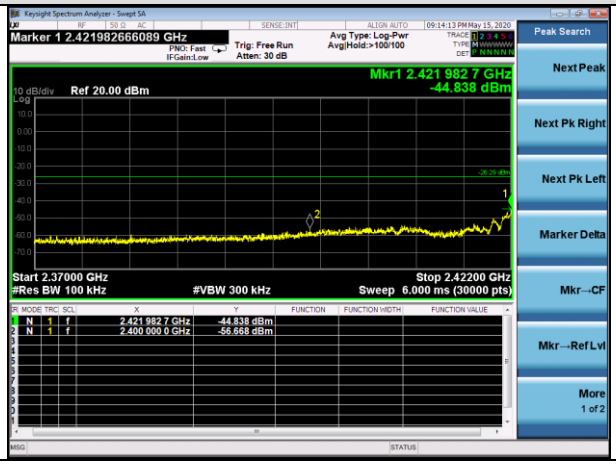	

11B-HCH	11B-HCH
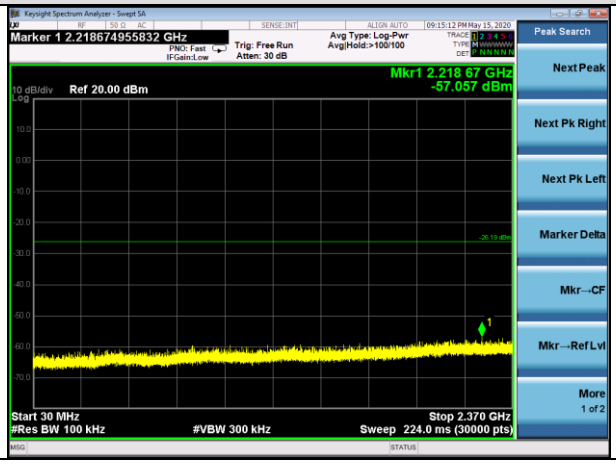	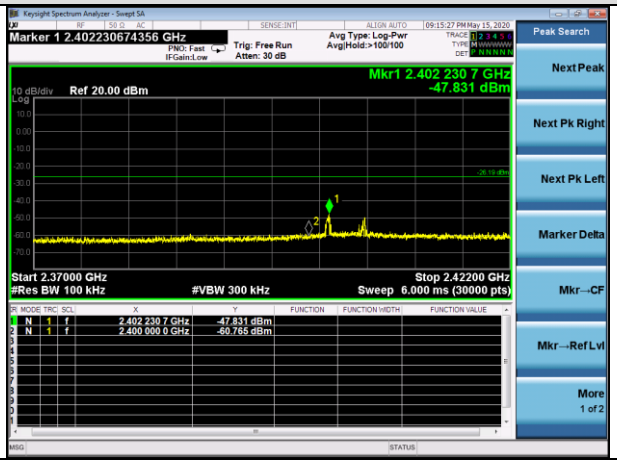

11B-HCH	11G-LCH
	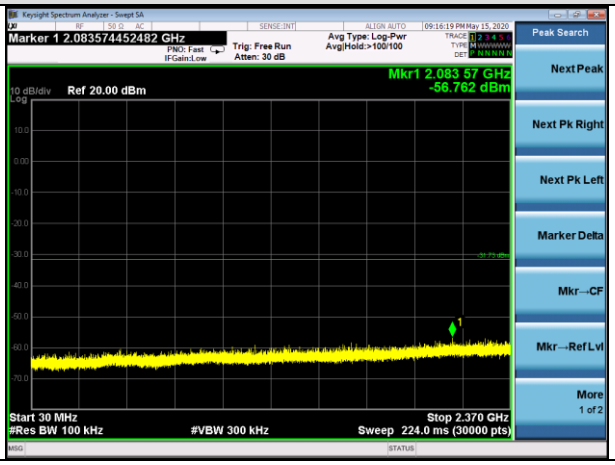

11G-LCH	11G-LCH
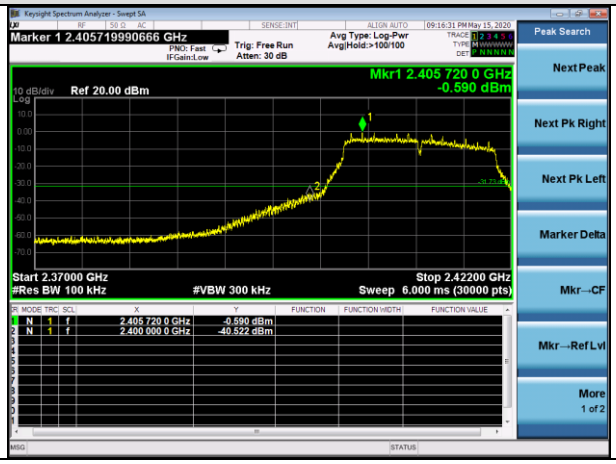	

11G-MCH	11G-MCH
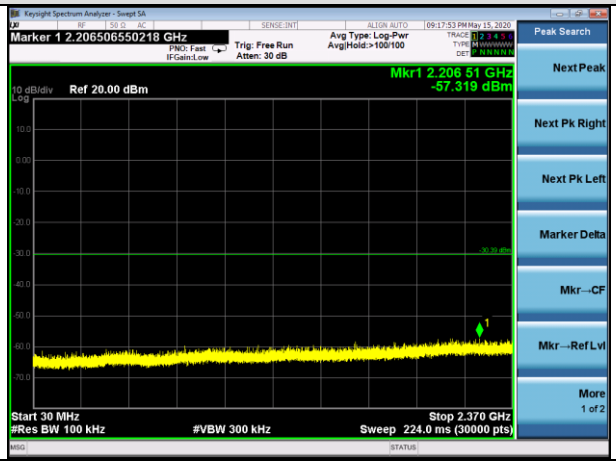	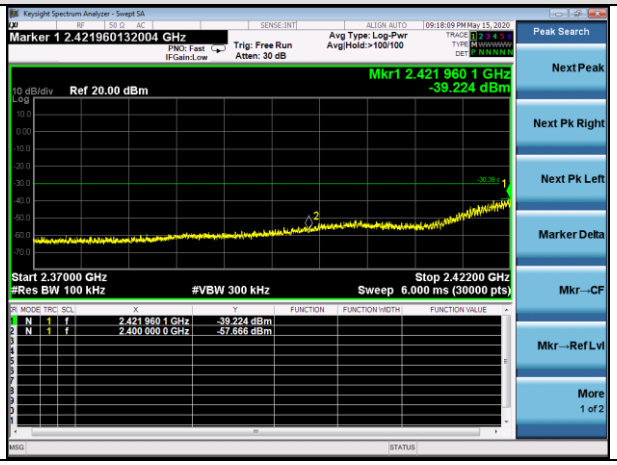

11G-MCH	11G-HCH
	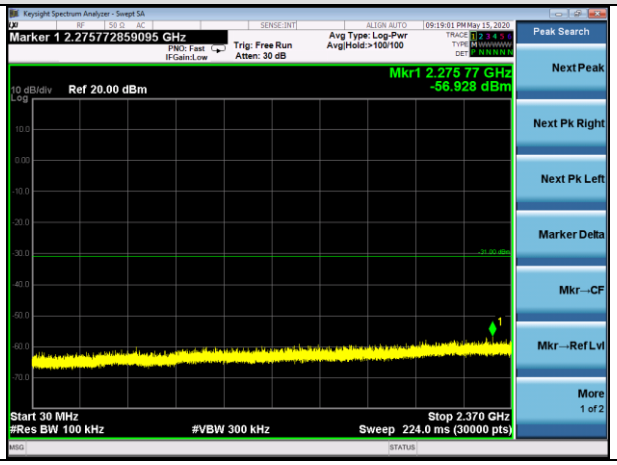

11G-HCH	11G-HCH
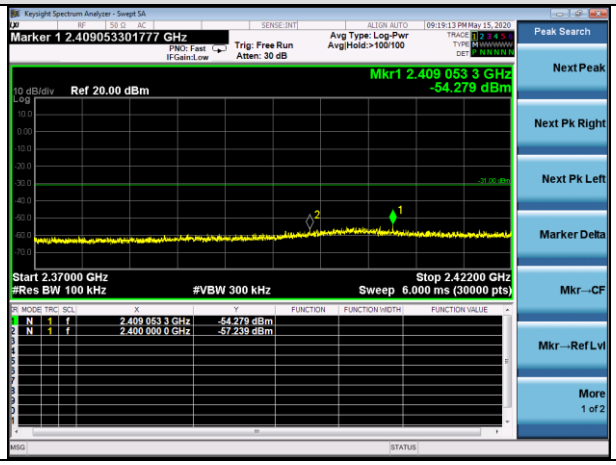	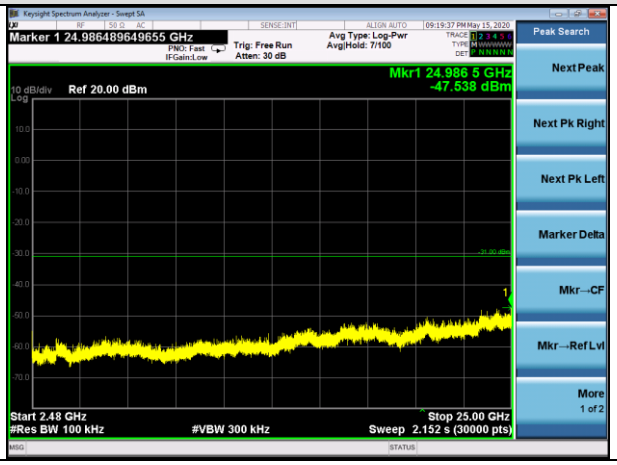

11nHT20-LCH	11nHT20-LCH
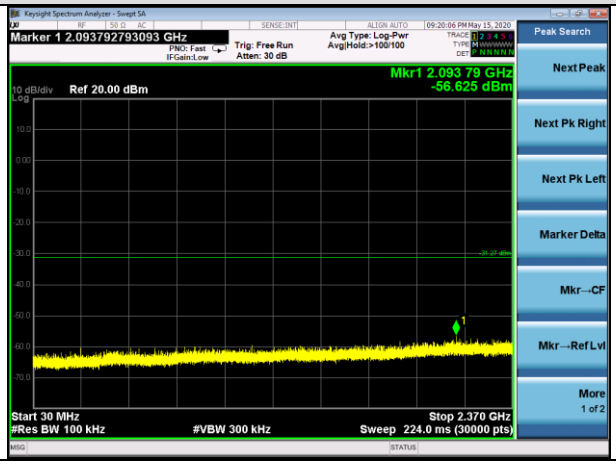	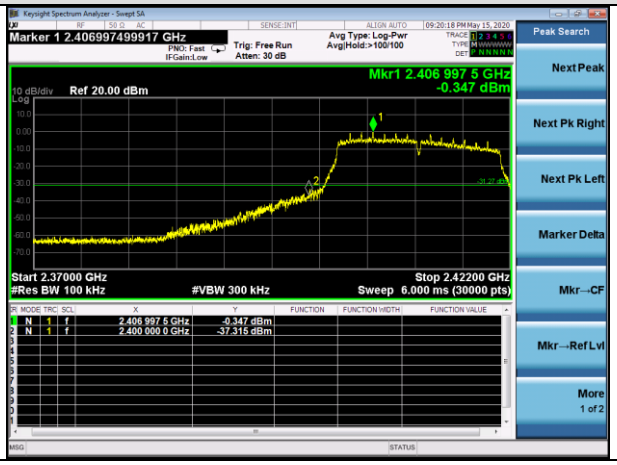

11nHT20-LCH	11nHT20-MCH
	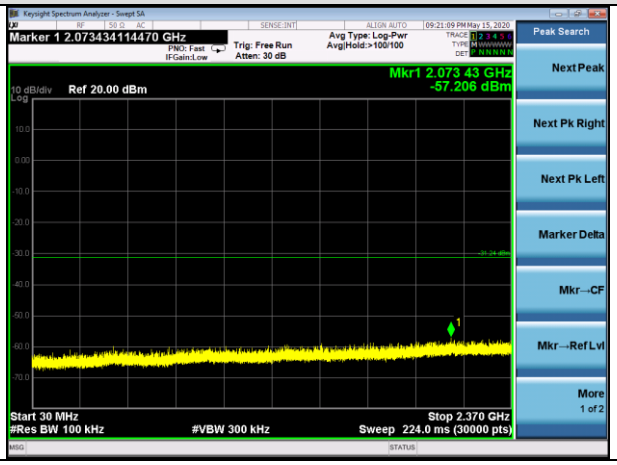

11nHT20-MCH	11nHT20-MCH
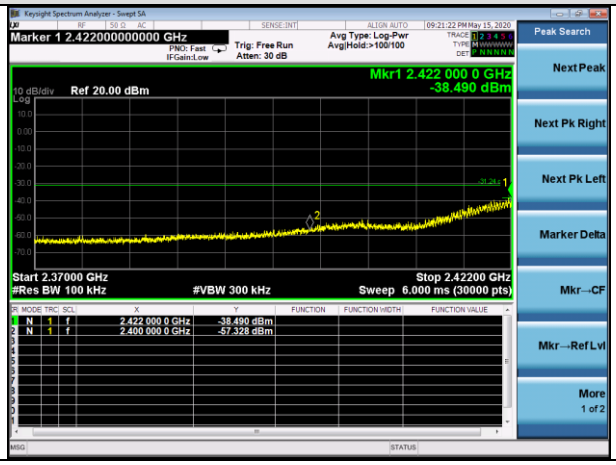	

11nHT20-HCH	11nHT20-HCH
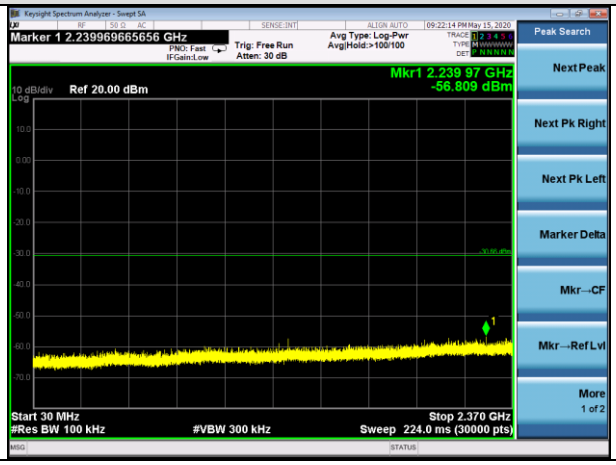	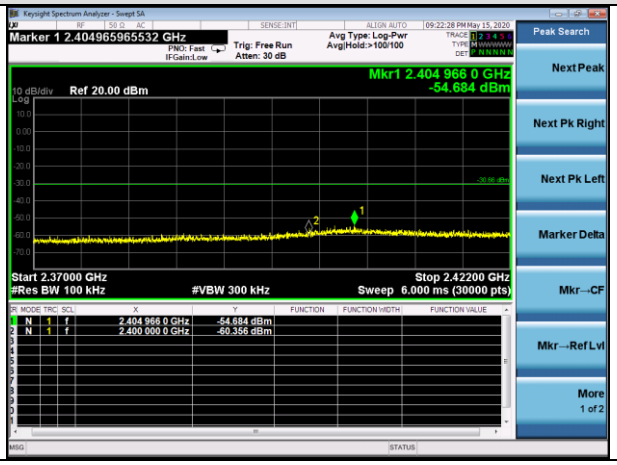

11nHT20-HCH	11nHTN40-LCH
	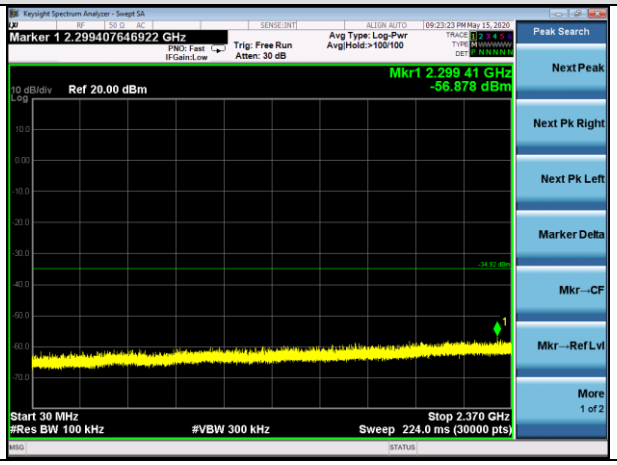

11nHT40-LCH	11nHTN40-LCH
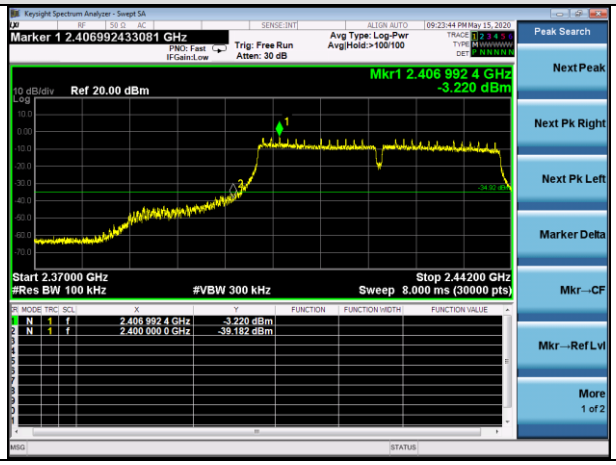	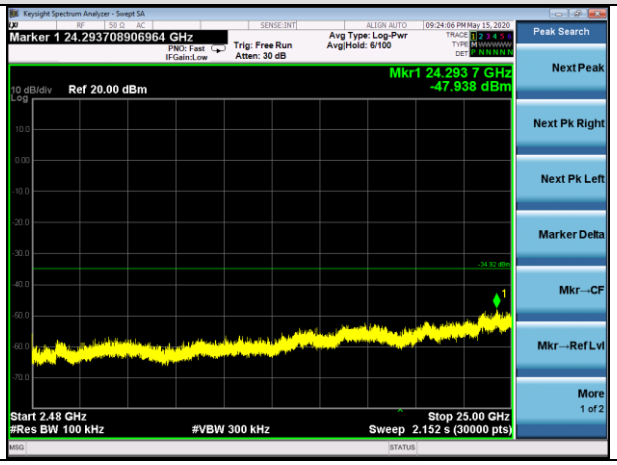

11nHT40-MCH	11nHT40-MCH
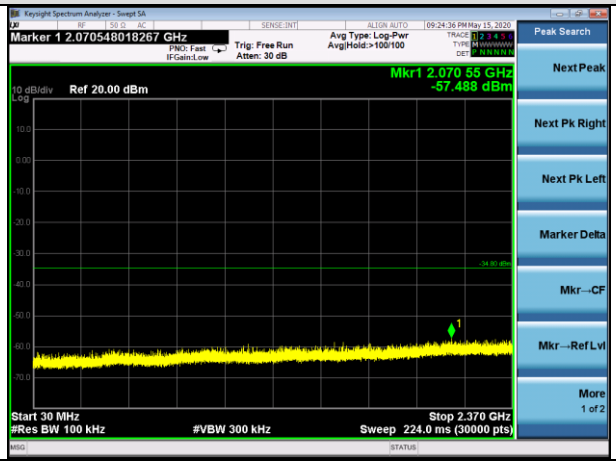	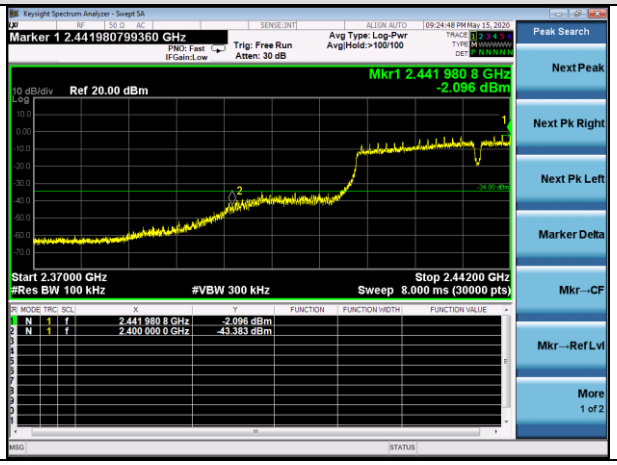

11nHT40-MCH	11nHT40-HCH
	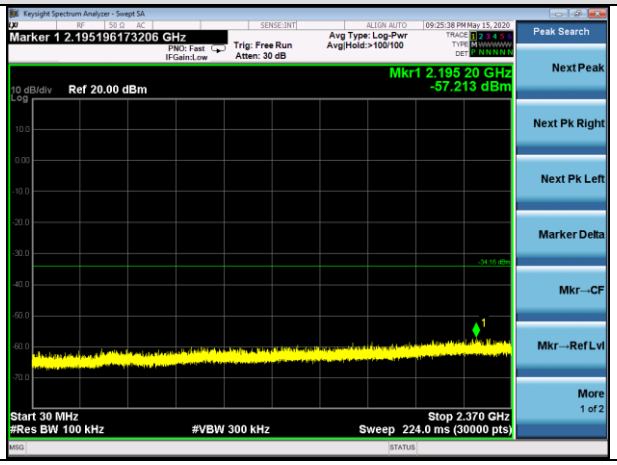

11nHT40-HCH	11nHT40-HCH
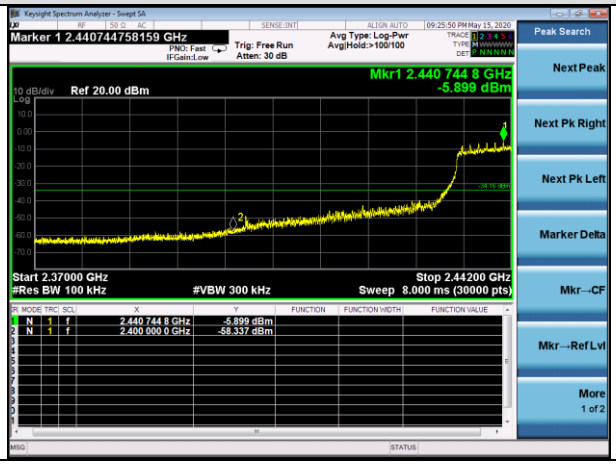	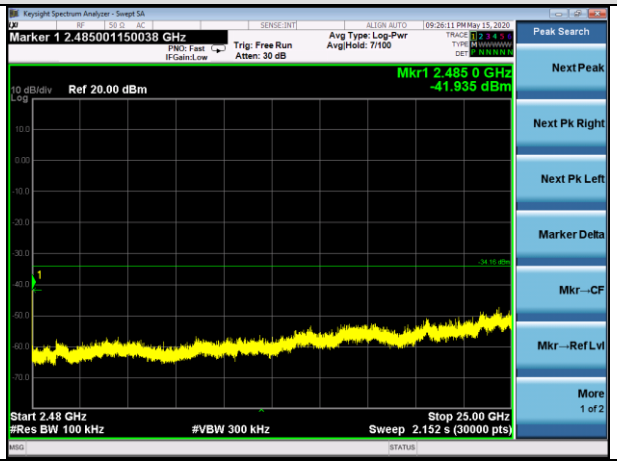

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

(1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
(2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
(3). Set SPA Trace 1 Max hold, then View.

Note: The method of AVGPSD-1 in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

Mode	Channel	PSD [dBm/20kHz]	Limit[dBm/3kHz]	Verdict
11b	LCH	-1.908	8	PASS
	MCH	-0.427	8	PASS
	HCH	-0.694	8	PASS
11g	LCH	-6.560	8	PASS
	MCH	-6.061	8	PASS
	HCH	-5.720	8	PASS
11nHT20	LCH	-7.500	8	PASS
	MCH	-5.494	8	PASS
	HCH	-5.905	8	PASS
11nHT40	LCH	-9.480	8	PASS
	MCH	-8.212	8	PASS
	HCH	-9.158	8	PASS

Test Graph

11b-LCH	11b-MCH

11b-HCH	11g-LCH

11g-MCH	11g-HCH
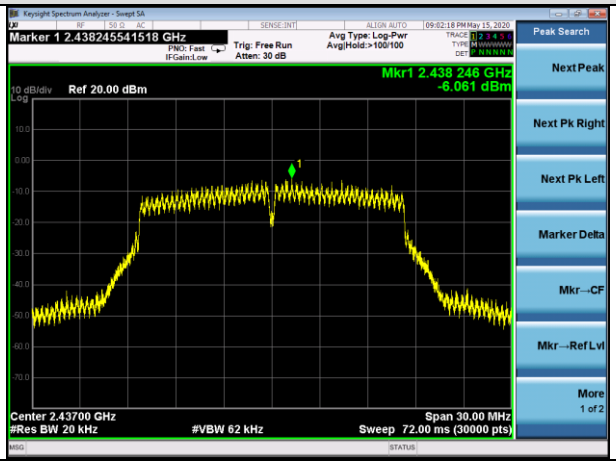	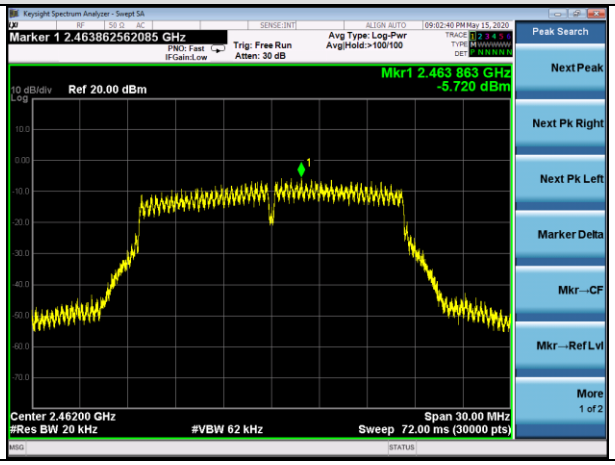

11nHT20-LCH	11nHT20-MCH
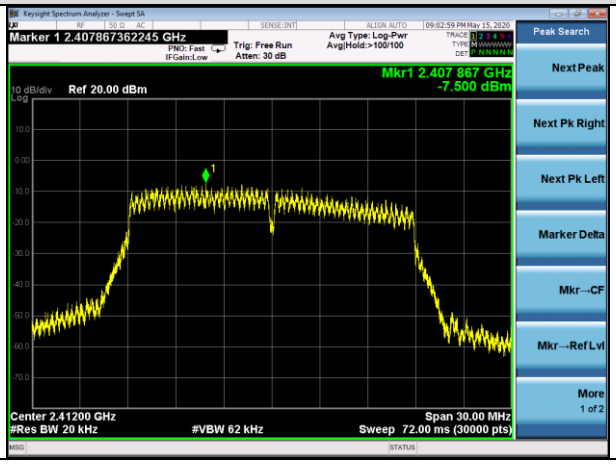	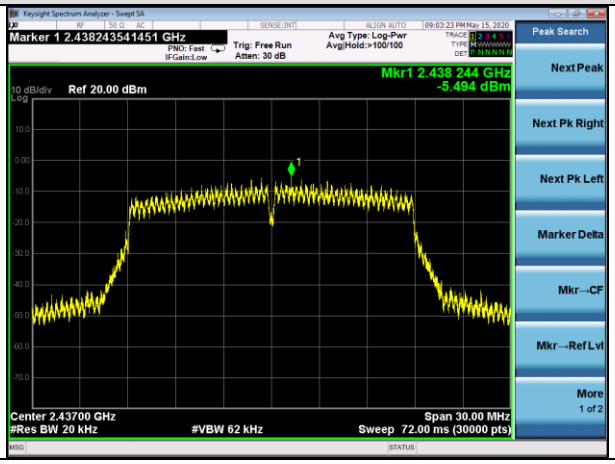

11nHT20-HCH	11nHT40-LCH
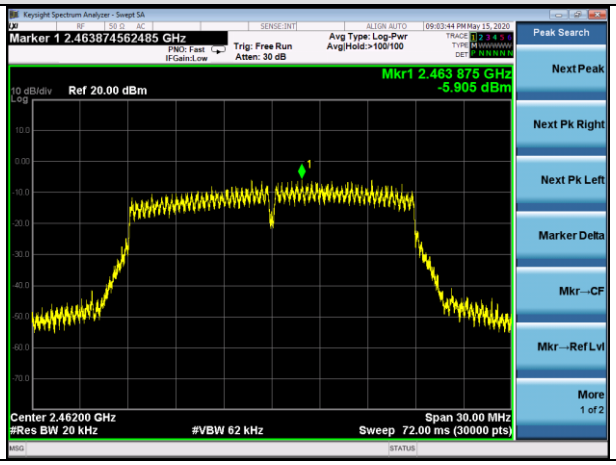	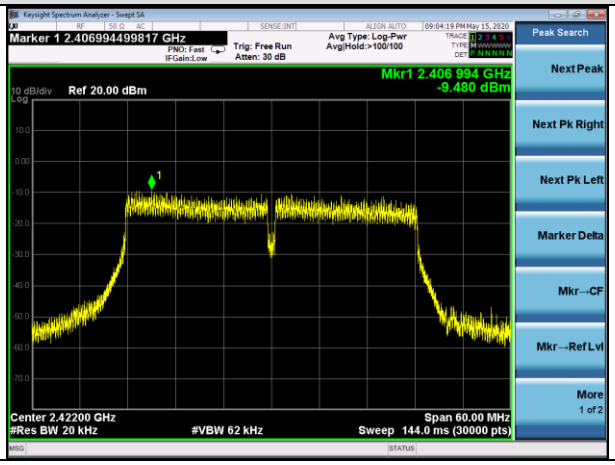

11nHT40-MCH	11nHT40-HCH
	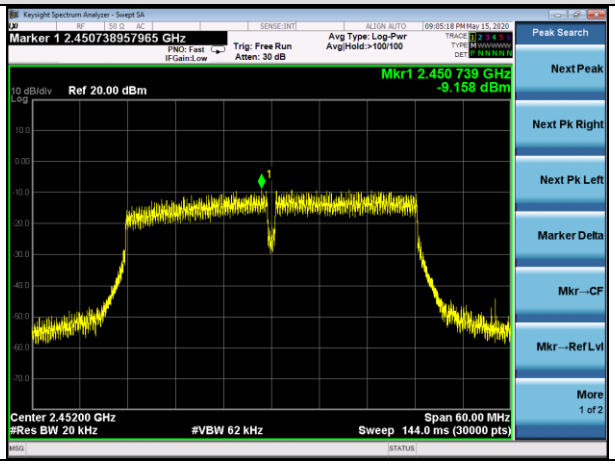

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

11.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

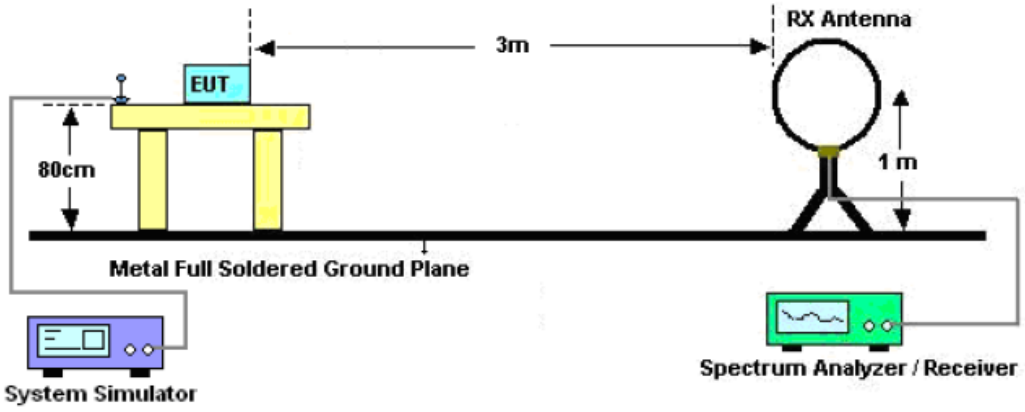

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

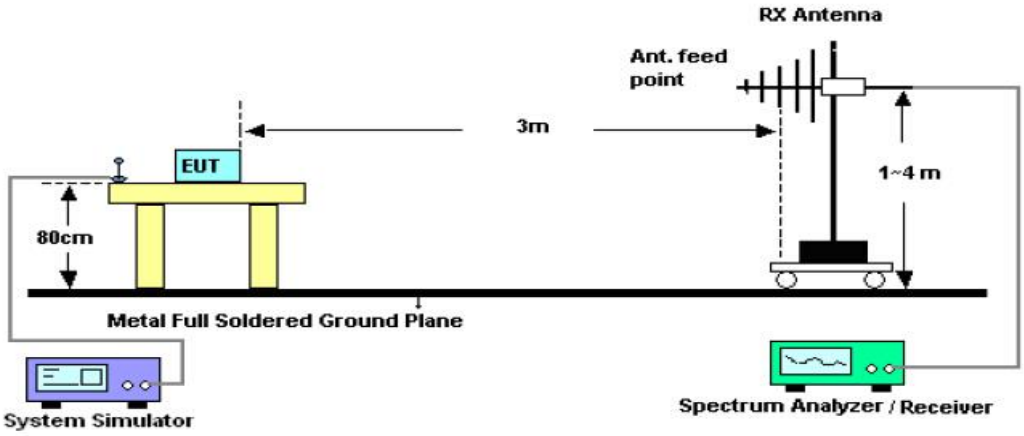

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

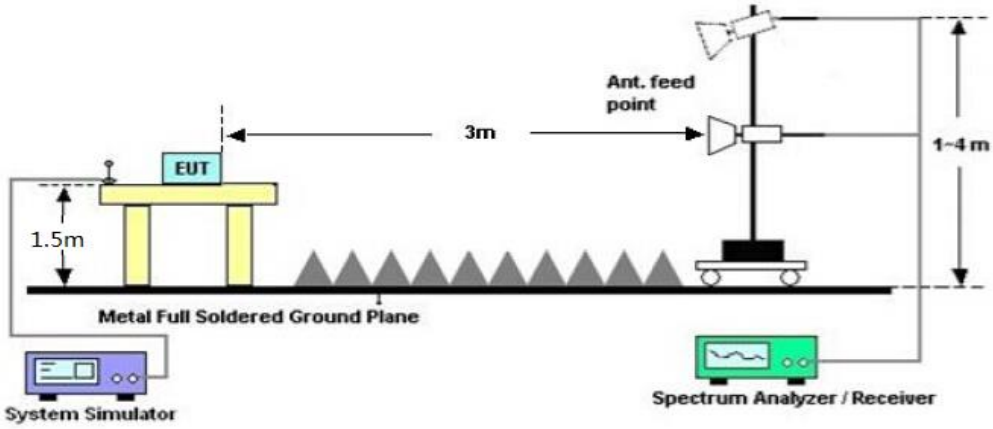

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ) -HORIZONTAL

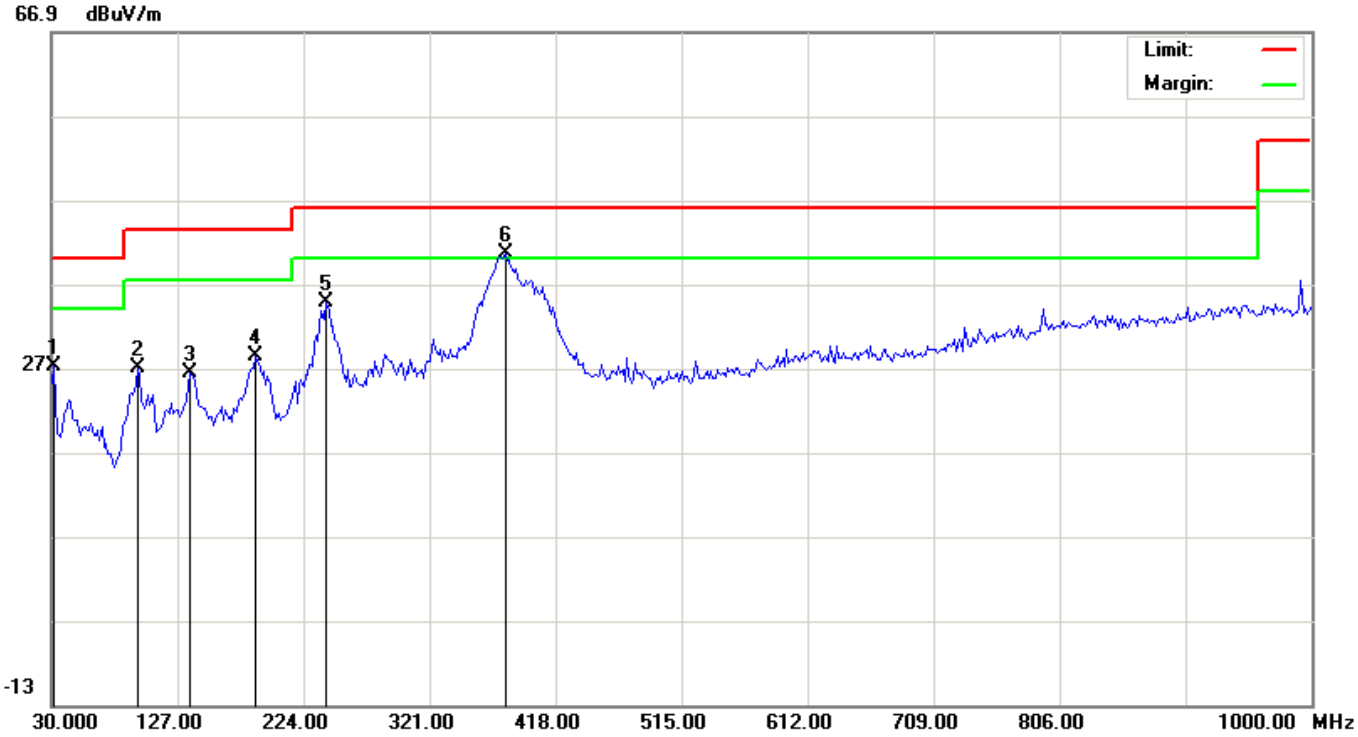

No.	Mk.	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		31.6167	9.05	18.22	27.27	40.00	-12.73	peak			
2		96.2833	11.28	15.63	26.91	43.50	-16.59	peak			
3		136.7000	7.32	19.02	26.34	43.50	-17.16	peak			
4		186.8167	11.56	16.77	28.33	43.50	-15.17	peak			
5		241.7833	16.27	18.63	34.90	46.00	-11.10	peak			
6	*	379.2000	18.26	22.25	40.51	46.00	-5.49	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ) -VERTICAL

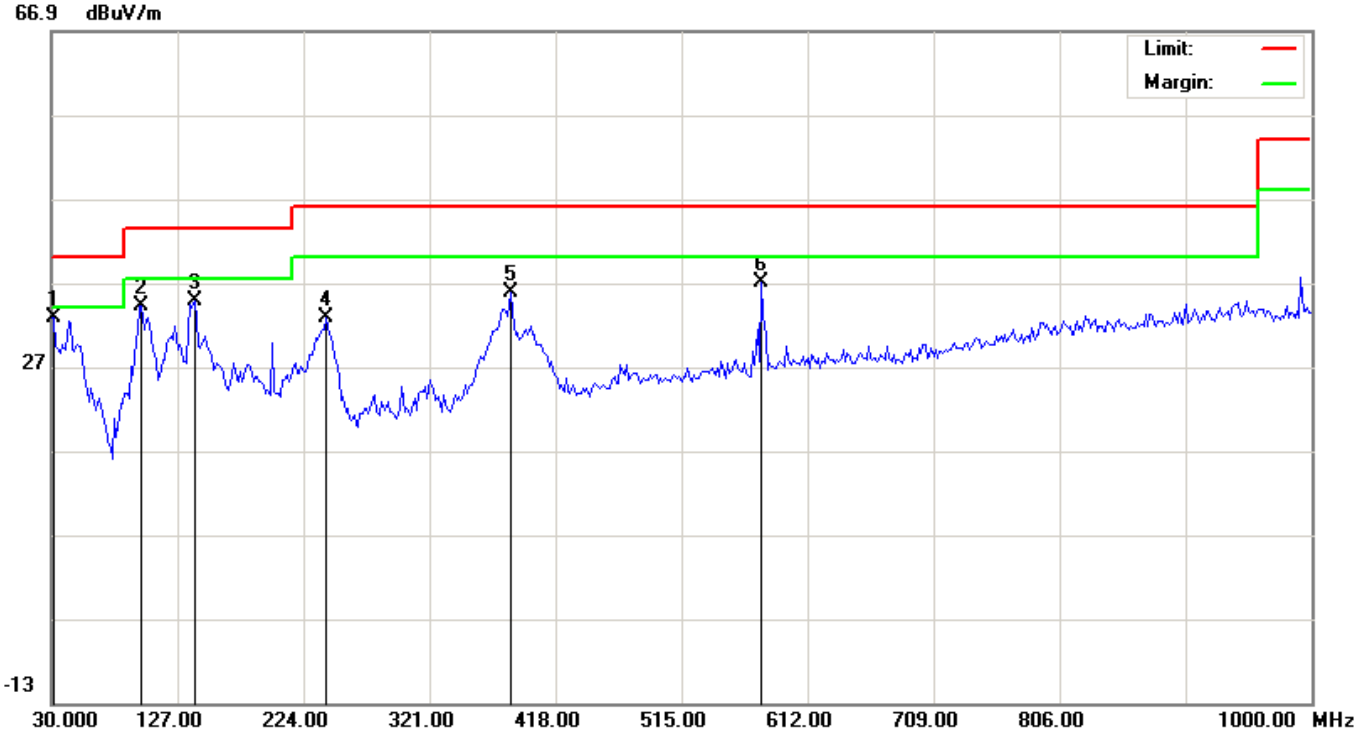

No.	Mk.	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	31.6167	14.66	18.22	32.88	40.00	-7.12	peak			
2		99.5167	18.24	15.96	34.20	43.50	-9.30	peak			
3		139.9333	15.51	19.23	34.74	43.50	-8.76	peak			
4		241.7833	14.21	18.63	32.84	46.00	-13.16	peak			
5		384.0500	13.29	22.42	35.71	46.00	-10.29	peak			
6		576.4333	10.53	26.49	37.02	46.00	-8.98	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Result -Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.