


GODOX设计文件图注

项目名称	UL150IIBI 双色温静音LED摄影灯		
项目类型	☐ 彩盒 ☐ 彩卡 ☐ 白盒 ☐ 贴纸 ☒ 说明书 ☐ 内托 ☐ 胶盒 ☐ 吸塑 ☐ 其他:		
产品料号	705-U152BY-00	版本	A
展开尺寸(mm)		成品尺寸(mm)	100*140mm
尺寸公差	± 2mm		
材质	105G 铜版纸		
工艺说明	骑马钉		
备注/色值	单色，黑色印刷		
设计师	柳杨	校对	吴水宁



Godox

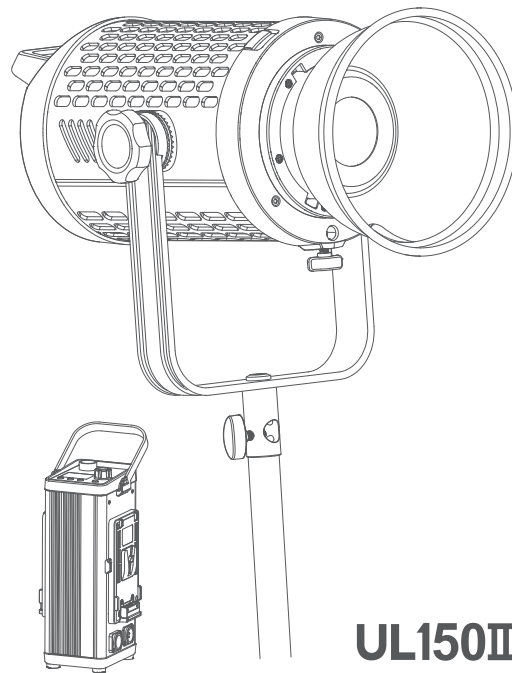

Wechat
Official Account
神牛微信公众号

深圳市神牛摄影器材有限公司

地址: 深圳市宝安区福海街道塘尾社区耀|||工业区厂房2栋 电话: 0755-29609320(8062)

传真: 0755-25723423 邮箱: godox@godox.com

GODOX Photo Equipment Co., Ltd.

Add.: Building 2, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao' an District, Shenzhen
518103, China Tel.: +86-755-29609320(8062) Fax: +86-755-25723423 E-mail: godox@godox.com

www.godox.com

Made in China | 705-U152BY-00



UL150II Bi

双色温静音LED摄影灯
Bi-color Silent LED Light

说明手册
Instruction Manual

重要的安全说明及注意事项

首先作为最基本原则：本产品为专业灯光布景设备，应由专业灯光师使用或在专业人士指导下使用。使用时必须始终遵循基本的安全预防措施，具体安全预防措施如下：

1. 使用前必须阅读并理解产品说明书。
2. 专业灯具，禁止儿童使用。当儿童靠近时，家长或监护人必须密切监督，以免儿童因碰撞灯具或私用灯具造成人身伤害。
3. 本灯具并非普通照明灯具，不可用于普通照明，任何有过眼部损伤或眼部敏感的人群均应避免使用本灯具。
4. 灯具点亮时，必须小心使用，禁止接触高温部件，如LED灯珠，以免造成灼伤。
5. 灯具点亮时，任何情况下均禁止直视灯珠。应该在专业灯光师指导下使用强光，任何情况下避免长时间处于强光环境，如引起眼睛不适，请及时关闭灯具，暂停使用，请及时就医。
6. 倘灯珠损坏或因热变形，应停止使用，并及时联系制造商、服务提供商或合格的维修人员更换灯珠，以免发生意外。
7. 本产品仅适用于-20°C-40°C工作环境温度及正常湿度环境下使用。
8. 请勿使用损坏的设备或设备配件，待专业维修人员检查维修，确认设备正常方可使用。
9. 在使用过程中，如果本产品由于跌落、受到挤压或遭受强烈冲击而造成外壳破裂的，请勿继续使用，以免因接触到内部电子元件而受到电击伤害。
10. 如需要延长线，请使用额定电流≥该设备额定电流的延长线。如延长线额定电流小于该设备，可能导致过热。
11. 部分产品电源线较长，请合理放置电源线，使其处于安全位置。避免电源线接触过热物体表面、避免放置不当导致拉扯损坏或绊倒现场人员。请使用本厂原装电源线，如使用非本厂电源线导致产品损坏，概不在本厂维修范围内。
12. 在清洁和维修之前，请务必从电源插座上拔下该设备插头。不使用时，禁止拉扯电源线以将设备插头从电源插座中拔出。正常断电，应是用手抓住该设备插头两端，将插头从电源插座中拔出。此设备需连接到接地插座中。

13. 本设备没有防水性能，请让设备保持干燥，请勿将本设备浸入水中或其他液体中。设备需安装在干燥且通风处，避免在雨天、潮湿、多尘或过热环境下使用。请勿将任何物体置于灯具上或使液体流入灯具内部，以免发生意外。
14. 请勿私自拆卸产品，如产品出现故障，须由本公司或授权的维修人员进行检查维修。
15. 存放本设备之前，请确保设备已完全冷却。存放时，将电源线从设备上拔出。设备应放置于设备便携包内或通风干燥处。
16. 请勿将设备放置在酒精、汽油等易燃易爆挥发的溶剂附近。
17. 本厂不推荐的产品附件，请勿使用，以免导致火灾、触电或人身伤害。
18. 清洁本设备时，请勿用湿布擦拭，请用干布，软布擦拭设备污垢。
19. 设备使用前，请注意将保护罩取下。
20. 本产品已通过ROHS, CE, 和FCC认证，请参考相关国家标准使用和操作。安全说明依据本厂严格测试制定，设备设计和规格如有变更，恕不另行通知。
21. 知。客户可以上神牛官网查看最新的电子版说明，了解产品最新资讯。部分产品内置锂电池。此类产品请使用专用的充电器进行充电，并且按正
22. 确的操作说明，在规定的电压、温度范围内使用。部分产品使用电池供电。此类产品请勿使用说明书中未指定的任何电池、
23. 电源或附件。请将电池和其他附件置于儿童及婴幼儿无法触及之处。如果儿童或婴幼儿吞下电池或附件，请立即就医。如果电池漏液、变色、变形、冒烟或发出异味，请立即将其取出。在取出过程中请小心，以免烫伤。如果继续使用，可能会引起火灾、触电或皮肤烫伤。请勿使用任何变形或改造过的电池。请勿拆卸或改造本产品或电池。请勿加热电池或焊接电池。请勿让电池与火或水接触。请勿让电池受到强烈的外力撞击。请勿将电池的正负端错误插入，或将新旧电池或不同类型的电池混合使用。一年保修期，消耗品电池、适配器、电源线等配件不在此保修范围内。
24. 经发现，擅自检修设备，将取消一年保修期，维修需要收取相关费用。
25. 对于不规范操作引起的机器故障不在保修范围内。
- 26.

保存这些说明

前言

感谢您购买神牛产品!

静音LED摄影灯UL150II Bi无风扇, 零噪音, 非常适用于直播拍摄、视频录制、采访布光等多种拍摄场合。灯体与控制器分离, 操作方便。光源稳定, 显色性好, 宽广色温, 功能强大。支持蓝牙APP无线分组调光, 无极调节亮度。

主要特点:


- 无风扇, 零噪音, 全功率输出稳定。
- 功率强劲, 光源稳定, 支持无极调节亮度 (0%-100%)。
- 宽广色温, 支持精准调节色温, 调节范围为2800K-6500K。
- V口电池供电或AC电源供电, 室内室外两用。
- 灯体与控制器分离, 操控更便捷, 散热性更佳。
- 支持2.4G遥控器/蓝牙APP/DMX512控制台控制。
- U型支架设计, 可吊装, 调节各种角度更方便。
- 拥有21种模拟场景光效, 自由营造光氛围。
- 标准保荣卡口, 兼容各类光效附件。

警告


- ⚠ 请勿让儿童接触本产品。
- ⚠ 使用前请将灯头保护罩取下。
- ⚠ 请保持干燥, 请勿用湿手接触产品, 亦不可将产品浸入水中或暴露于雨中。
- ⚠ 请勿私自拆卸产品, 如产品出现故障须由本公司或授权的维修人员进行检查维修。
- ⚠ 本产品不能防水, 在雨天及潮湿环境下请注意防水。
- ⚠ 请勿将光源对准人的眼睛, 以免造成伤害。
- ⚠ 请勿放置在超过40摄氏度的高温环境中。
- ⚠ 请使用本厂原装电源线, 由于使用非本厂电源线导致产品损坏, 概不在本厂维修范围内。
- ⚠ 请勿在化学品、可燃性气体或其他特殊物质附近使用LED灯。
- ⚠ 本灯具光源仅可由制造商、其服务提供商或相关合格人员更换。
- ⚠ 倘灯泡损坏或热变形, 应及时更换。
- ⚠ 本灯具仅供专业使用。


部件名称

灯体

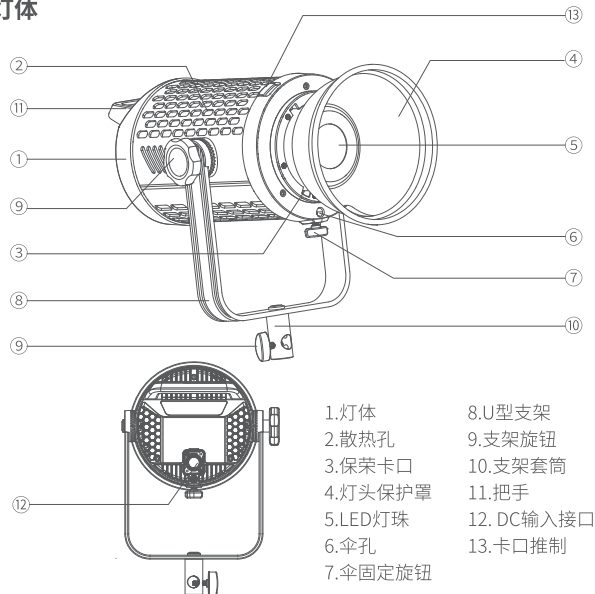


控制器

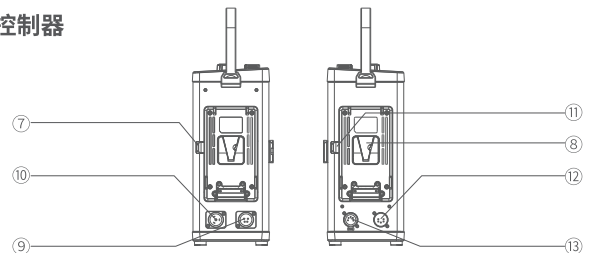

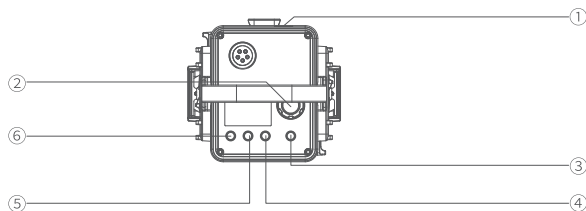

- | | | |
|-----------------|------------|-----------------|
| 1. USB Type-A接口 | 5. /FX按键 | 9.AC INPUT接口 |
| 2.SET调节旋钮 | 6.DMX设置键 | 10.DC 48V接口 |
| 3.开关按键 | 7.黑色拆卸电池按钮 | 11.黄色拆卸电池按钮 |
| 4.MENU菜单按键 | 8.V口电池座 | 12.DMX IN卡侬头接口 |
| | | 13.DMX OUT卡侬头接口 |


标配物品

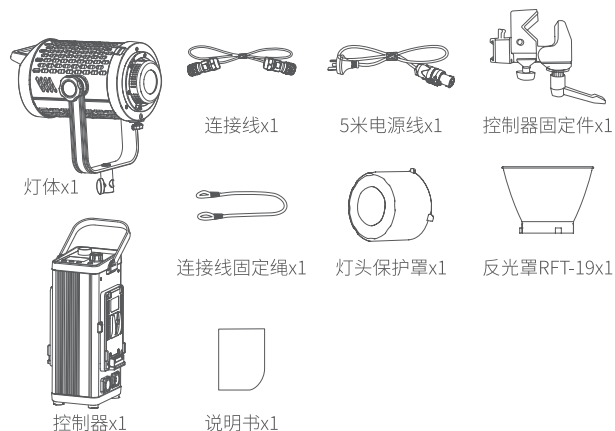

5

可选配物品


可搭配本公司摄影附件使用, 以获得最佳的拍摄效果和使用体验:
LED灯菲涅尔镜头, 聚光筒, RC-A6遥控器, 保险钢丝绳。

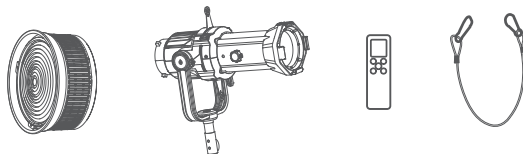

安装及拆卸指引

1. 连接控制器和灯体

按住连接线弹簧锁扣按钮, 将连接线一端插入灯体DC INPUT接口中。接着将另一端插入控制器DC OUTPUT接口, 即可完成控制器与灯体的连接。

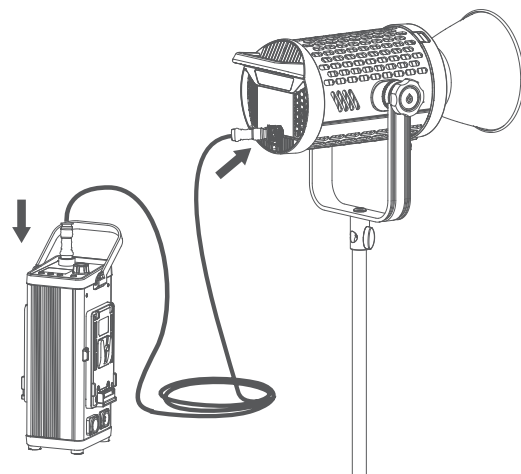


6

2. 安装到三脚架上

调整灯体到合适角度, 旋转套筒旋鈕安装灯体在三脚架上, 最后旋转套筒旋鈕固定灯体。可以通过拧松支架旋鈕, 调整灯体拍摄角度, 调整完毕拧紧支架旋鈕即可。


注: 三脚架不包含在标配物品内, 需另购。



3. 将控制器安装到灯架上

先将控制器固定件把手拧松, 然后插入灯架, 旋转把手拧紧控制器固定件。最后将控制器V口对准控制器固定件卡槽, 插入即可。

提示: 拆卸时, 只需按住卡槽推制, 即可取下控制器。




4. 安装及拆卸灯头保护罩

安装: 推动卡口推制至末端, 将灯头保护罩对准保荣卡口套上, 最后顺时针旋转套紧即可。

拆卸: 推动卡口推制至末端, 接着逆时针旋转取出即可。


注: 使用时, 务必将灯头保护罩取出, 否则影响灯头散热, 易损坏。不使用时, 套上灯头保护罩, 以达保护灯头效果。



5. 安装及拆卸反光罩


安装: 推动卡口推制至末端, 将反光罩对准保荣卡口套上, 最后顺时针旋转套紧即可。

拆卸: 推动卡口推制至末端, 接着逆时针旋转取出即可。




连接DMX控制台

控制器DMX控制台连接操作示意图如下:

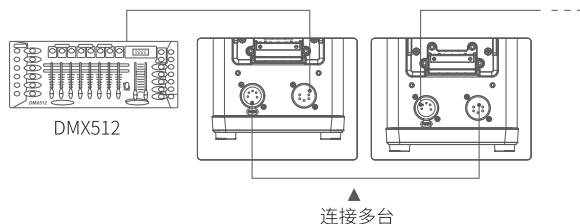


供电方式

1. AC供电

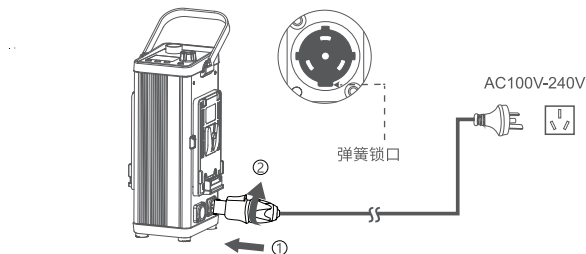


注: 连接线和电源线, 在安装或拆卸时, 均需要按住锁扣按钮, 方可安装或拆卸。

2. V口电池供电

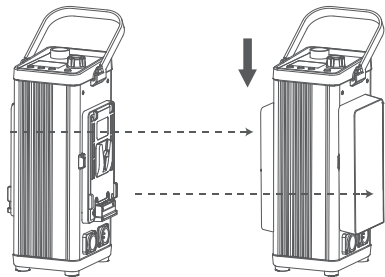

注意:支持使用14.8V或26V的V口电池。只有带黄色拆卸电池按钮一边支持单边供电。双电池供电时,其中一个电池低电量,另外一个电池即使满电,设备依然无法正常工作。电池低电量时,对应的电池图标呈现闪烁状态。建议使用双电池供电时,应先检查两个电池是否都有足够的电量。

显示屏

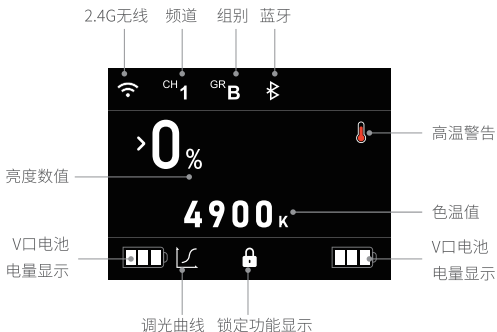

控制器操作说明


1. 开关机

接通电源,长按1秒控制器开关按键,实现开机或关机。




2. 亮度调节

在主界面,短按SET调节旋钮,使箭头正对着亮度值时,旋转SET调节旋钮能够调节亮度大小,调节范围为0%-100%。顺时针旋转增加亮度值,逆时针旋转减少亮度值。常规旋转,增加或减少1个单元值;快速旋转,增加或减少10个单元值。



3. 色温调节

在主界面,短按SET调节旋钮,使箭头正对着色温值时,旋转SET调节旋钮能够调节色温大小,调节范围为2800-6500K。常规旋转,增加或减少100K单位值,快速旋转,增加或减少500个单位值。



4. 菜单设置

短按<MENU>菜单按键,进入菜单界面,界面依序排列着无线、蓝牙、DMX、调光曲线、屏幕亮度、语言、恢复出厂设置、版本与升级。

在菜单界面中,通过旋转SET调节旋钮进行选择,接着短按SET调节旋钮,可进入对应的设置界面。

4.1 无线

在无线界面,依序排列着无线开关、频道、组别、识别号。

通过短按SET调节旋钮进行选择,选择完毕旋转SET调节旋钮进行设置,即可完成无线开关、频道、组别、识别号等一系列设置。



4.2 蓝牙

在蓝牙设置界面,依序排列着蓝牙开关、重置及蓝牙MAC码。

通过短按SET调节旋钮进行选择,选择完毕旋转SET调节旋钮进行设置,即可完成蓝牙开关、蓝牙重置设置。



扫描此二维码即可下载“Godox-Light”手机APP(安卓和苹果系统都可以使用)。



注:首个移动设备(手机或平板电脑)可直接使用APP操控灯体。更换其他移动设备时,灯体进行蓝牙重置(Reset)后,方可正常使用APP。

4.3 DMX模式

在DMX设置界面,界面上依序排列着模式与地址通道。通过短按SET调节旋钮进行选择,选择完毕后旋转SET调节旋钮进行设置,即可完成模式与地址通道设置。



DMX实用表

地址码	运行模式	ULTIMATE 8bit		备注
n(模式)		0-51(CCT)	52-255(FX)	
n+1		DMX*(100/255) 取整数 0-100%亮度调节	DMX*(100/255) 取整数 0-100%亮度调节	
n+2		CCT=28+DMX*(总色温数/255) 色温2800K-6500K	DMX*(光效总数/255)	1. 例如: 光效总数8, DMX=160, 光效号=160*8/255=5
n+3			0-85: 光效档位 I 86-171: 光效档位 II 172-255: 光效档位 III	

地址码	运行模式	CCT 8bit	
n		DMX*(100/255) 取整数 0-100%亮度调节	
n+1		CCT=28+DMX*(总色温数/255) 色温2800K-6500K	

地址码	运行模式	FX 8bit	
n		DMX*(100/255) 取整数 0-100%亮度调节	
n+1		DMX*(光效总数/255)	
n+2		0-85: 光效档位 I ,86-171: 光效档位 II ,172-255: 光效档位 III	

4.4 调光曲线

在调光曲线设置界面,旋转SET调节旋钮可依次选择线性/S型/指数/对数等调光曲线。




4.5 屏幕亮度

在屏幕亮度设置界面，旋转SET调节旋钮可依次选择1、2、3档屏幕亮度值。



4.6 语言

在语言设置界面，旋转SET调节旋钮选择English或简体中文。



4.7 恢复出厂设置

在恢复出厂设置界面，旋转SET调节旋钮选择“是”或“否”，短按SET调节旋钮确认选择。选择“是”后，灯体启动重置程序，显示屏显示重置进度条。重置完毕跳回主界面。

注：恢复出厂设置后，亮度值为100%。



4.8 版本与升级

在版本与升级界面，显示的版本号是该整体机的固件版本号。



5. 光效设置

短按<⏻/FX>按键进入FX情景光效界面。旋转SET调节旋钮依次选择闪光灯、雷闪电、坏灯泡、电视机、蜡烛、火、烟花等21种情景光效。



闪光灯光效模式



雷闪电光效模式



坏灯泡光效模式



电视机光效模式



蜡烛光效模式



火光效模式




烟花光效模式

注:当旋转到闪光灯、雷闪电、坏灯泡、电视机等情景光效模式时,短按SET调节旋钮可进行速率(I、II、III)变换和亮度调节(0%-100%)。

小提示:长按3秒<锁符号/FX >按键可实现锁定/解锁功能。


6. 连接线没有连接好

当连接线没有连接好灯头或者控制器,显示屏出现连接线与设备分离图示,此时建议检查一下两处地方:控制器连接处是否连接和灯头连接处是否连接。



7.AC供电切换V口电池供电

当AC供电切换V口电池时,建议先拔掉电源线,再插入V口电池开机使用。

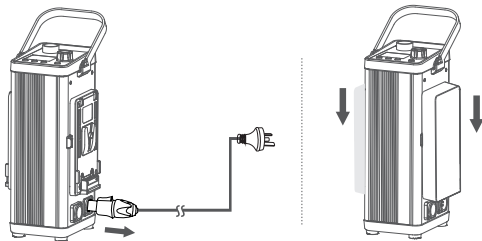

提示:未拔电源线插入V口电池,且灯体设置亮度值高于电池能开的最大亮度值,试图用拔掉电源线的方式切换成V口电池供电,灯体及控制器会自动关闭,重新开机后即可正常使用。

不同状态下UL150IIBi最大亮度值

CCT模式: 灯最大亮度值(%)

供电方式	线性	S型	指数	对数
14.8V(单个)	50%	50%	50%	50%
14.8V(双个)	100%	100%	100%	100%
26V(单个)	100%	100%	100%	100%
14.8V+26V	100%	100%	100%	100%
26V(双个)	100%	100%	100%	100%
AC电源/48V直流电源	100%	100%	100%	100%

FX模式: 灯的最大亮度值(%)

供电方式	线性
14.8V(单个)	50%
14.8V(双个)	100%
26V(单个)	100%
14.8V+26V	100%
26V(双个)	100%
AC电源/48V直流电源	100%

注:使用 FX 情景光效时,调光曲线不起作用,默认为线性。上述数据基于 26V 270Wh 10.5Ah 电池和 14.8V150Wh 10.2Ah 电池。

软件升级

- 1.在官网<http://www.godox.com.cn/Downloads.html>下载新固件到U盘上。
- 2.在关机的状态下,将已经存有新固件的U盘插入USB升级接口。
- 3.升级完后自动跳回主界面。

注: 1.必须在官网上下载新固件,存放在U盘根目录里,而且仅有一个BIN文件。

2.USB口仅用于升级固件功能。

维护保养

一年保修期,消耗品电池,适配器,电源线等配件不在此保修范围内。经发现,擅自检修此LED灯,将取消LED灯一年保修期,维修需要收取相关费用。对于不规范操作引起的机器故障不在保修范围内。

所有维修概由本厂指定的可供原配件的维修部负责。
如果本品出现故障或者被水淋湿，在专业人员维修后方可继续使用。
摄影灯在工作时，如发现异常，应立即关掉电源，查明原因。

规格参数

型号	UL150IIBi
功率	最大155W
AC供电输入	100-240V ~50/60Hz
DC供电输入	DC 48V
灯头输入	39V = 3.9A
V口电池(另购) 规格参数	14.8V, 150Wh/26V, 270Wh
频道	32个 (1~32)
组别	16组 (0~9、A~F)
识别号 (ID号)	1~99、OFF
色温数值	2800K-6500K
CRI	≥96
TLCI	≥97
工作环境温度	-20~40°C
FX情景光效	7类21种
控制方式	支持DMX512控制、2.4G无线遥控、蓝牙控制、控制盒控制
调光模式	4种：线性/S型/指数/对数
静音模式	具备
蓝牙传输距离	≈30m
2.4G无线控制距离	≈60m
灯体尺寸	316.9*217.8*170mm
控制器尺寸	270.4*123.6*132mm
灯体重量	≈3.13kg
控制器重量	≈2.79kg

设计和规格如有变更，恕不另行通知。

照度数据

色温	测试条件	照度单位	1m	2m	3m
2800K	裸灯	lux	3480	920	470
		fc	324	85.7	43.5
	带标罩	lux	40900	8350	3750
		fc	3800	776	348
3200K	裸灯	lux	3870	1040	530
		fc	359	968	49.3
	带标罩	lux	46100	9490	4260
		fc	4290	882	396
4300K	裸灯	lux	4360	1200	608
		fc	405	111	56.5
	带标罩	lux	53000	10900	4190
		fc	4920	1010	457
5600K	裸灯	lux	4500	1230	623
		fc	418	114	57.9
	带标罩	lux	54700	11200	5040
		fc	5080	1040	468
6500K	裸灯	lux	4380	1210	613
		fc	407	112	56.9
	带标罩	lux	53900	11000	5000
		fc	5000	1030	464

注：上述测试皆在灯体100%亮度下进行。

本设备包含型号核准代码为:CMITID: 2020DP13510, 为该产品的无线电发射模块。

Safety Instructions and Attentions

First of all, as the most basic principle: This product is a professional lighting set equipment and should be used by professional lighting engineers or under the guidance of professionals. Basic safety attentions must always be followed during use, as follows:

1. Before use, please read and understand these instructions and attentions.
2. Professional lighting is prohibited for children. When children are near, parents or accompanying persons must supervise closely to prevent children from personal injury due to collision with lamps or private use of lamps.
3. This lighting product is not ordinary lighting product and cannot be used for general lighting. Anyone who has suffered eye damage or has sensitive eyes should avoid using this product.
4. When the lamp is on, it must be used with care. Do not touch high-temperature parts, such as LED lamp beads, to avoid burns.
5. When the lamp is on, it is forbidden to look directly at the lamp beads under any circumstances. Strong light should be used under the guidance of professional lighting engineers. Avoid prolonged exposure to strong light under any circumstances. If eye discomfort, please turn off the lamp in time, suspend use, and see a doctor immediately.
6. If the lamp bead is damaged or deformed by heat, stop using this equipment, and contact the manufacturer, service agent or qualified maintenance personnel to replace the lamp bead in time to avoid accidents.
7. This product is only suitable for use in -20°C to 40°C operating environment and normal humidity environment.
8. Do not use damaged equipment or accessories, and wait for professional maintenance personnel to check and repair to confirm being normal before use.
9. During using, if the casing of this product is broken due to being dropped, squeezed or subjected to strong impact, please do not use it, so as to avoid electric shock injury due to contact with internal electronic components.
10. If an extension cord is required, please use an extension cord with a current rating greater than or equal to that of the equipment. If an extension cord is rated less than the equipment, overheating may result.
11. Some products have long power cords, please place the power cords properly and keep them in a safe place. Avoid contacting the power cord with overheating surfaces, avoid improper placement that could cause pulling damage, or trip on-site personnel. Please use the certified power cord from the original manufacturer. If the product is damaged by using a non-certified power cord, it will not be repaired by our factory.
12. Be sure to unplug equipment from the power outlet before cleaning and repairing. When not in use, do not pull the power cord to unplug the equipment. For normal power-off, please hold both ends of the plug of the equipment with your hands and pull the plug out of power outlet. This equipment needs to be connected to a grounded outlet.

13. This equipment is not waterproof, please keep it dry and do not immerse it in water or other liquids. The equipment should be installed in a dry and ventilated place, and avoid using it in rainy, humid, dusty or overheated environments. Do not place any objects on the lamp or let liquid flow into the lamp to avoid accidents.
14. Do not disassemble the product without permission. If the product fails, it must be checked and repaired by authorized maintenance personnel.
15. Before storing, make sure that the equipment has cooled down completely. For storage, unplug the power cord from the equipment. The equipment should be placed in the carrying case or in a ventilated dry place.
16. Do not place equipment near flammable and volatile solvents such as alcohol and gasoline.
17. Do not use accessories that are not recommended by our factory to avoid fire, electric shock or personal injury.
18. When cleaning, do not wipe it with a damp cloth, please use a dry cloth or a soft cloth to wipe the dirt of the equipment.
19. Please take off the protective cover before using.
20. This product complies with ROHS, CE, and FCC certification, please refer to the relevant national standards for use and operation.
21. The safety instructions are formulated according to the strict testing of the factory, and the design and specifications of the equipment are subject to change without prior notice. For latest product information, please check the GODOX website and view latest electronic instruction.
22. Some products have built-in lithium batteries. Please use specified chargers, and use them within a proper range of the specified voltage and temperature according to the correct operating instructions.
23. Some products are battery powered. Do not use any batteries, power sources or accessories not specified in the instructions for such products. Keep batteries and other accessories out of the reach of children and infants. In the instance that a child or infant swallows a battery or accessory, immediate emergency medical attention is required. If the battery leaks, becomes discolored, deformed, emits smoke, or emits an abnormal odor, remove it immediately. Be careful during removal to avoid burns. Continued use could result in fire, electric shock, or burns. Do not use any deformed or modified batteries. Do not disassemble or modify this product or battery. Do not heat or solder the battery. Keep the battery away from fire or water. Do not incorrectly insert the positive and negative ends of batteries, or mix old and new batteries or batteries of different types together.
24. One-year warranty period, accessories such as consumable batteries, adapters, power cords, etc. are not covered by this warranty.
25. If it is found that the equipment is repaired without authorization, the one-year warranty period will be cancelled and relevant fees will be charged for maintenance.
26. Machine failures caused by non-standard operation are not covered by the warranty.

keep these instructions!

Foreword

Thank you for purchasing!

Silent LED Video Light UL150IIBi is fanless design and noise-free. The separate light body and controller are conveniently operational. Stable light source creates high CRI and wide CCT range brings great performance. It supports Bluetooth APP wireless group control and stepless brightness adjustment. This product is suitable for various shooting scenes such as live streaming, video recording, interview and etc.

Main Features

Fanless and noise-free, stable full power output.

Strong power and stable light source, support stepless brightness adjustment.

Wide CCT range can be precisely adjusted from 2800K to 6500K.

V-mount battery supply or AC power supply, available both indoors and outdoors.

Separated design of light body and controller achieves convenient operation and better cooling effect.

Support 2.4G remote control/Bluetooth APP control/DMX512 control.

U-bracket to support various angle usage.

21 simulated light effects bring rich lighting creations.


Standard Bowens mount is compatible with most optical accessories.

Warning

- ⚠ Keep out of reach of children.
- ⚠ Please take off the lamp cover before using.
- ⚠ Always keep this product dry. Do not use in rain or in damp conditions.
- ⚠ Do not disassemble. Should repairs become necessary, this product must be sent to an authorized maintenance center.
- ⚠ As this product do not have waterproof function, please take measures of waterproof in rainy or damp environment.
- ⚠ Do not fire directly against human eyes as it may cause visual impairment.
- ⚠ Do not leave or store the product if the ambient temperature reads over 40°C.
- ⚠ Please use the original power cable, damages caused by using other cables will invalid the warranty.
- ⚠ Do not use the product in the presence of flammable gases, chemicals and other similar materials.
- ⚠ The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- ⚠ The lamp shall be changed if it has become damaged or thermally deformed
- ⚠ The luminaire is intended for professional use only.

Name of Parts

Light Body

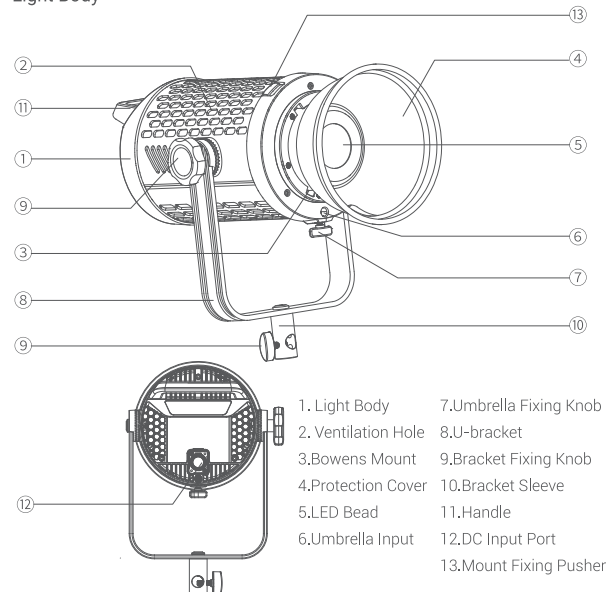

Controller

