



Power Switch

After connecting the power, turn the controller switch button to **< I >** to turn on the power, and turn it to **< O >** to turn off the power;




AD00-01




AD00-02

Controlling by the Controller AD00-01


Luminousness (0%-100%)

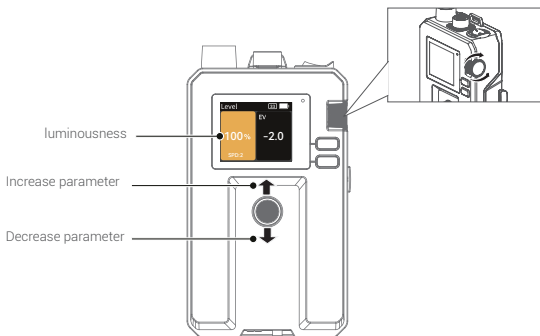

Speed (1-4)

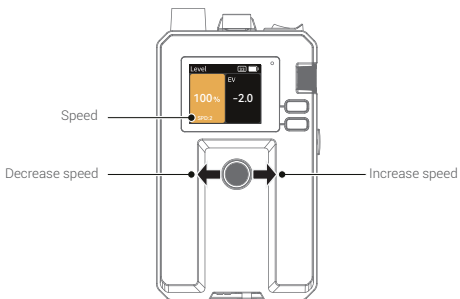


Light Reduction (-0.1 ~ -2.0)

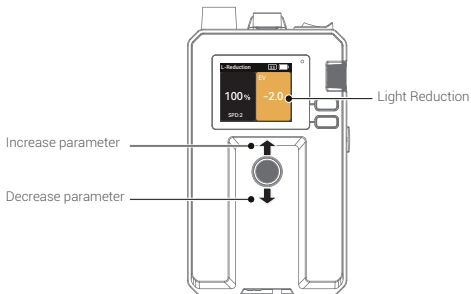


Controlling by the Controller AD00-02


Luminousness (0%-100%)

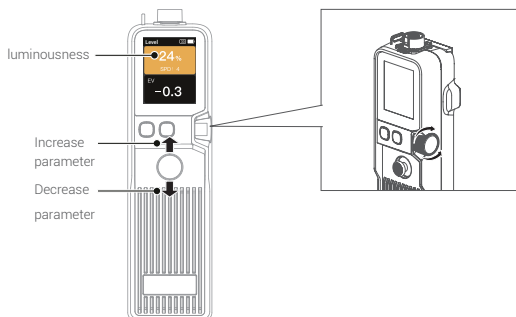

Speed (1-4)




Light Reduction (-0.1 ~ -2.0)




Antenna Installation (AD00-01)

Align the antenna with the interface and rotate clockwise to lock it.



Wireless DMX Connection (AD00-01)

LumenRadio CRMX TX



DMX512 Controller



CRMX



CRMX




CRMX



Menu


Press the MENU button to enter menu interface, rotate and press the SET button to enter and adjust the following setting options, press the MENU button can return to the menu interface.

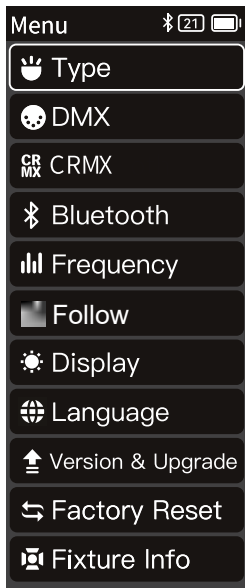

Note: The menu interface takes AD00-01 as an example, AD00-02 doesn't have CRMX function.


Type

Press the SET button to enter type interface, rotate and press the SET button to choose among AD33, AD32 or AD21.



DMX


Press the SET button to enter DMX settings, rotate and press the SET button to adjust the parameters.



Level 1 Option	Level 2 Option	Description
Address	001-512	Initial address
DMX Mode	01: Level 8 Bit	Level mode in 8bit
	02: Light Reduction 8 Bit	Light Reduction mode in 8bit
	03: Ultimate 8 Bit	Ultimate mode in 8bit
RDM State	On	Turn on RDM, the controller can set the device address and DMX mode
	Off	Turn off RDM
Extend DMX CH	On	Turn on extend DMX channels
	Off	Turn off extend DMX channels

CRMX

Press the SET button to enter CRMX settings, rotate and press the SET button to adjust the parameters.




Level 1 Option	Level 2 Option	Description
CRMX	On	Turn on CRMX
	Off	Turn off CRMX
Mode	TX	Transmitter mode
	RX	Receiver mode
Reset	Reset	Press the SET button to reset after selecting it
Output Power	5dBm	Output power 5dBm, only available for adjustment in TX mode
	11dBm	Output power 11 dBm, only available for adjustment in TX mode
	16dBm	Output power 16dBm, only available for adjustment in TX mode
	20dBm	Output power 20dBm, only available for adjustment in TX mode
Connect	Press the SET button to connect after selecting it	

Note: The CRMX function is only available for controller AD00-01.

Bluetooth

Press the SET button to enter Bluetooth settings, rotate and press the SET button to turn on/off, or reset. The MAC code is on the corner for quick check.



"GODOX Light" app Downloading

Scan the QR code to download the "Godox Light" smartphone app (can be used in Android and iOS).


Note:

1. The app can be used directly on the firstly installed device (smartphone or iPad). When change to other mobile device (smartphone or iPad), the light shall be reset before the normal connection of the app.
2. The app should be version 3.0 or above.




"GODOX Light" app Firmware Upgrade

Open Godox Light, enter a certain scene and click "+" to add a fixture, then click  to display more settings, choose firmware upgrade.




Frequency

Press the SET button to enter frequency settings, rotate and press the SET button to adjust to default or other mode (1st-5th gear).



Follow


Press the SET button to enter follow settings, rotate and press the SET button to adjust to lead mode.



Note: The DMX mode of the device under control is 03: Ultimate 8 Bit by default in lead mode.

Display

Press the SET button to enter display settings, rotate and press the SET button to adjust the display brightness from 10% to 100%.



Language

Press the SET button to enter language settings, rotate and press the SET button to select between simplified Chinese and English.



Version & Upgrade

Press the SET button to enter version & upgrade interface to check the firmware version and upgrade instruction.



Firmware Upgrade via U Disk


1. Download the new firmware to the U disk from official website (<https://www.godox.com/firmware-continuous-light>).
2. Turn off the device. Insert the U disk with new firmware into the USB-A port.
3. Turn on the device, and it will automatically enter the upgrading interface.
4. It will return to main interface after completion.

Notes:

1. New firmware must be downloaded from the official website, and keep only one BIN file in the root directory of the USB disk.
2. The USB-A port can only support output voltage and current of 5V $\leq$ 1.5A. Do not connect to over-rated USB device.
3. The USB-A port is only available for controller AD00-01. For controller AD00-02, please upgrade in the "Godox Light" app.

Factory Reset

Press the SET button to enter factory reset interface to choose apply or cancel.



Fixture Info

Press the SET button to enter fixture info interface to check the product basic information.

Technical Data of the Controller

Model	AD00-01	AD00-02
USB-C Port	Input: 12V-20V $\approx$ 6.5A	Input: 5V $\approx$ 2A
AC Output Port	Output: 0V-28V $\sim$	Output: 0V-28V $\sim$
USB-A Port	Firmware Upgrade/5V $\approx$ 1.5A Power Supply	No USB-A Port
Controlling Methods	Wireless or wired DMX/RDM, CRMX, Bluetooth, controller control	Wired DMX/RDM, Bluetooth, controller control
Bluetooth Controlling Distance	30m	30m
Working Environment Temperature	-20°C ~ 40°C	-20°C ~ 40°C
Dimension $\approx$	3.27"*1.81"*5.91"	1.97"*1.42"*7.28"
Net Weight $\approx$	259g	160g

Technical Data of the Adjustable Diffusion

Model	AD21-01	AD32-01	AD33-01
AC Input	0V-28V $\sim$, 1.8W	0V-28V $\sim$, 3W	0V-28V $\sim$, 4.5W
Dimension $\approx$	17.76"*23.7"	25.04"*36.42"	41.46"*39.61"
Net Weight $\approx$	0.25kg	0.5kg	0.8kg

Specifications and data may subject to changes without notice.

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.

IC Warning

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement

Tout changement ou modification non expressément approuvé par la partie responsable de la réglementation de l'OCDE peut faire perdre à l'utilisateur le droit d'utiliser l'appareil.

Remarque: cet appareil a été testé pour répondre aux limites des appareils numériques de classe B conformément à la partie 15 des règles de la Federal Communications Commission des États - Unis. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans les installations résidentielles. L'appareil génère de l'énergie RF utilisée et rayonne, ce qui peut causer des interférences nocives pour les communications radio s'il n'est pas installé et utilisé conformément aux instructions. Cependant, aucune Garantie contre les interférences dans une installation spécifique. Si l'appareil cause des interférences nuisibles à la réception de la radio ou de la télévision, qui peuvent être déterminées en éteignant et en allumant l'appareil, l'utilisateur est encouragé à tenter de corriger les interférences par une ou plusieurs des mesures suivantes:

- redirection ou repositionnement de l'antenne de réception.
- augmenter l'espacement entre l'appareil et le récepteur.
- Connecter l'appareil à une prise sur un circuit différent de celui auquel le récepteur est connecté.
- consultez votre revendeur ou un technicien radio / tv expérimenté pour obtenir de l'aide.

Avertissement RF pour les appareils portables:

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux radiofréquences. Équipement Peut être utilisé sans restriction dans des conditions d'exposition portables.

Warning

AD00-01: Operating frequency:2402MHz - 2480MHz (BT)/2402MHz - 2480MHz (CRMX)

Maximum EIRP Power:5dBm(BT)/5dBm(CRMX)

AD00-02: Operating frequency:2402MHz - 2480MHz (BT)

Maximum EIRP Power: 5dBm(BT)

Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states.For more information of DoC, Please click this web link:<https://www.godox.com/eu-declaration-of-conformity/>

The device complies with RF specifications when the device used at 0mm from your body.

产品保修

尊敬的用户, 本保修卡是申请保修服务的重要凭证, 请您配合销售商填写并妥善保管, 谢谢!

产品信息	型号	产品条码
用户信息	姓名	联系电话
	通信地址	
销售商信息	名称	
	联系电话	
	通信地址	
	销售日期	
备注		

注: 此表应由销售商盖章确认。

产品信息

本文件适用于相关《产品保修信息》(见后面说明)所列产品,其他非属此范围的产品或部件(如促销品、赠品及其他出厂后附加的部件等)不在此保修承诺内。

保修期

产品及部件的相应保修期按相关的《产品保修信息》执行。保修期自产品首次购买日起算, 购买日以购买产品时保修卡登记日期为准。

如何获得保修服务

您可直接与产品销售商或授权服务机构联系, 也可拨打神牛产品售后服务电话, 与我们联系, 由我们的服务人员为您安排服务。申请保修时, 您应提供有效的保修卡作为保修凭证, 方可获得保修。如您不能提供有效的保修卡, 则在我们确认产品或部件属于保修范围的情况下, 也可以为您提供保修, 但这不作为我们的义务。

不适用保修情况

如产品存在下列情况，本文件项下的保证和服务将不适用：①产品或部件超过相应保修期；②错误或不适当使用、维护或保管导致的故障或损坏，如：不当搬运；非按产品合理预期用途使用；不当插拔外接设备；跌落或外力挤压；接触或暴露于不适当温度、溶剂、酸碱、水浸或潮湿环境；③由非神牛授权机构或人员安装、修理、更改、添加或拆卸造成的故障或损坏；④产品或部件原有识别信息被修改变更或删除；⑤无有效保修卡；⑥使用非合法授权、非标准或非公开发行的软件造成的故障或损坏；⑦因不可抗力或意外事件造成的故障或损坏；⑧其他非因产品本身质量问题导致的故障或损坏。遇上述情况，您应向相关责任方寻求解决，神牛对此不承担任何责任。因非在保修期或保修范围内的部件、附件或软件导致产品不能正常使用的，不是保修范围内的故障。产品使用过程中正常的脱色，磨损和消耗，不是保修范围内的故障。

产品保修和服务支持信息

产品的保修期和服务类型按以下《产品保修信息》执行：

产品类别	选件名称	保修期（月）	保修服务类型
部件	电路板	12	客户送修
其他	如外壳、保护罩、锁紧装置、包装等。	无	无保修

神牛产品售后服务电话 0755-29609320-8062

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	
	Date of Sale	
Note		

Note: This form shall be sealed by the seller.

Applicable Products

Applicable ProductsThe document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items,giveaways and additional accessories attached,etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories isimplemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day(purchase date) when the product is bought for the first time,And the purchase date is considered as the date registered onthe warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases:

① The product or accessory has expired its warranty period; ② Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc; ③ Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment; ④ The original identifying information of product or accessory is modified, alternated, or removed; ⑤ No valid warranty card; ⑥ Breakage or damage caused by using illegally authorized, nonstandard or non-public released software; ⑦ Breakage or damage caused by force majeure or accident; ⑧ Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Parts	Circuit board	12	Customer sends the product to designated site
	Lamp body, lamp cover, locking device, package, etc.	No	Without warranty

Godox After-sale Service Call 0755-29609320-8062