

LOfree

布丁双模无线鼠标-说明书-中英日文通用版
20251029-S

PUDDING
布丁双模无线鼠标
PUDDING Dual Mode Wireless Mouse

OE929

封面

LOfree

深圳市洛客文化有限公司
Shenzhen Lofree Culture Co., Ltd.
深圳市宝安区西乡街道宝源路165号718时代创意园4楼201
201号, 718时代创意园, 1000 Bao Yuan Road, Shenzhen

Service Hotline/服务热线: 4006002083
www.lofree.com.cn www.lofree.co
@lofree.co

底面

成品尺寸: 75 x 100(h) mm【翻页方式】


材质: 80 g 书写纸

内页1

产品规格

电池规格: 聚合物电池 3.7V 500mAh
输入: 5V ~ 500mA
DPI: 600/800/1200/1600/3600
尺寸: 95.1x67.8x40.2mm
重量: 50g
按键数: 5个按键+1个滚动开关
连接方式: 蓝牙+2.4G
鼠标名称: PUDDING@Lofree
2.4GHz发射功率: <10mW(e.i.r.p.)
适用设备: Macbook/Mac一体机/Windows电脑
系统适用性备注:
蓝牙连接下, 仅支持Windows8及以上的系统, Windows7及以下系统请使用2.4G USB连接使用。

产品图解

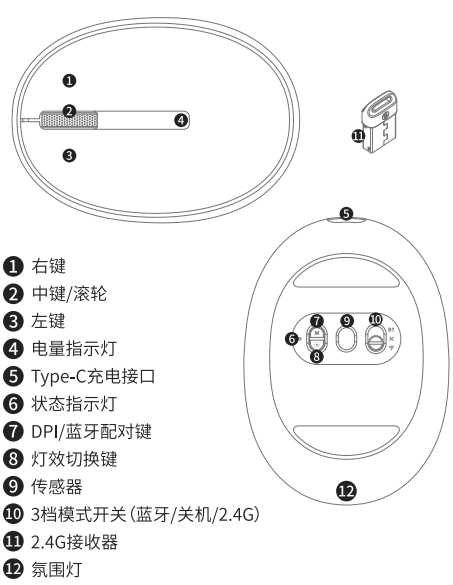

- 1 右键
- 2 中键/滚轮
- 3 左键
- 4 电量指示灯
- 5 type-C充电接口
- 6 状态指示灯
- 7 DPI/蓝牙配对键
- 8 灯效切换键
- 9 传感器
- 10 切换式开关 (蓝牙/关机/2.4G)
- 11 2.4G接收器
- 12 氛围灯

详细操作

蓝牙连接模式

- 将鼠标底部开关档位拨到“BT”位置。
- 长按模式切换键“M”3秒直至状态指示灯蓝灯快闪。
- 打开设备端蓝牙功能, 在蓝牙设备列表内查找“PUDDING@Lofree”并点击连接。
- 状态指示灯常亮3秒后熄灭表示蓝牙模式连接成功。
- 蓝牙回连时指示灯慢闪, 回连成功后指示灯常亮3秒后熄灭。

2.4G连接模式

- 将鼠标底部开关档位拨到“2.4G”位置。
- 将2.4G接收器插入电脑USB接口即可连接。
- 状态指示灯常亮3秒后熄灭表示2.4G模式连接成功。
- 注意: 接收器出厂时已和鼠标配对, 可以直接使用, 如需重新配对, 在2.4G模式下长按“M”键3秒, 直至指示灯快闪, 配对成功后指示灯常亮3秒后熄灭。

DPI调节

- 单击“M”键切换DPI, 共5档调节, 依次为600/800/1200/1600/3600, 初始状态默认为1200。
- 单击“**”键切换氛围灯模式, 依次为常亮模式/呼吸模式/关闭。
- 注意: 关闭模式下, 二/三级休眠后唤醒, 氛围灯亮起3秒后熄灭。

休眠和唤醒方式

- A. 本产品在无操作状态下, 5秒钟进入一级休眠, 1分钟进入二级休眠, 此时移动鼠标或按键即可唤醒。
- B. 本产品在无操作状态下, 10分钟进入三级休眠, 此时需要按键才可唤醒。
- 电量指示及充电: A. 鼠标低电量时指示灯红色慢闪提示; 鼠标极低电量时, 红灯快闪提示直至关机。 B. 可用本产品附带Type-C数据线连接电源进行充电。充电时电量指示灯白色呼吸, 充满后灯常亮。

产品中有有害物质申明

部件组成	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBBs)	多溴二苯醚 (PBDEs)
塑料	0	0	0	0	0	0
金属	0	0	0	0	0	0
电路板	0	0	0	0	0	0
线材	0	0	0	0	0	0
按键	0	0	0	0	0	0
传感器	0	0	0	0	0	0
电池	0	0	0	0	0	0
接收器	0	0	0	0	0	0

依据欧盟指令2011/65/EU及其修订指令进行判定。
0: 表示该有害物质在该部件所有均质材料中的含量均在GB/T26572规定的限量要求以下。
X: 表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T26572规定的限量要求。


内页2

EN

Product

Battery Capacity: 3.7V 500mAh
Input voltage: 5V ~ 500mA
DPI Specification: 600/800/1200/1600/3600
Dimensions: 95.1 x 67.8 x 40.2 mm
Weight: 50g
Buttons: 5 buttons + 1 toggle switch
Connection modes: Bluetooth + 2.4G
Bluetooth name: PUDDING@Lofree
2.4GHz transmission power: <10mW (e.i.r.p.)
Supported devices: Macbook / Mac / Windows PC
System compatibility:
Bluetooth supports Windows 8 and above;
Windows 7 and below: please use 2.4G USB

Product Illustration

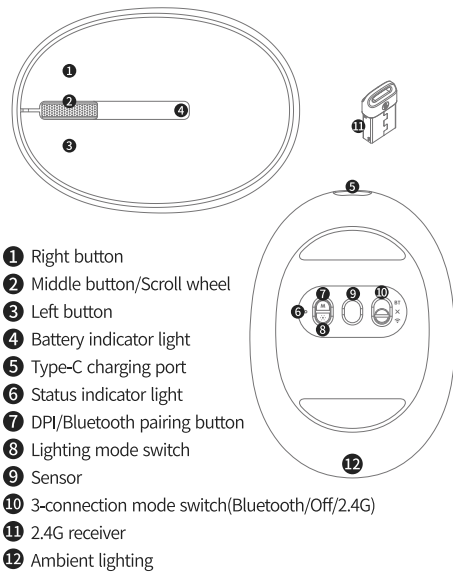

- 1 right button
- 2 Middle button/Scroll wheel
- 3 Left button
- 4 battery indicator light
- 5 type-c charging port
- 6 status indicator light
- 7 DPI/Bluetooth pairing button
- 8 Lighting mode switch
- 9 sensor
- 10 connection mode switch (Bluetooth/OFF/2.4G)
- 11 2.4G receiver
- 12 Ambient lighting

Detailed operations

Bluetooth Connection Mode

- Slide the bottom switch to BT.
- Press and hold the M button for 3 seconds until the status light flashes blue quickly.
- Find "PUDDING@Lofree" in the Bluetooth device list and connect.
- The status indicator light will stay on for 3 seconds and then go off, indicating that Bluetooth mode is successfully connected.
- When reconnecting, the indicator flashes slowly; once connected, it stays on for 3 seconds, then turns off.

2.4G Connection Mode

- Slide the bottom switch to 2.4G.
- Insert the 2.4G receiver into a computer USB port.
- Status light on for 3 seconds then off indicates successful 2.4G connection.
- Note: The receiver is pre-paired at the factory; it can be used directly. To re-pair: in 2.4G mode, press and hold the M button for 3 seconds until the light flashes quickly. Once paired, the light stays on for 3 seconds, then turns off.

DPI Adjustment

- This product features 5 DPI levels: 600/800/1200/1600/3600. Click the M button to switch DPI.
- Lighting Control: Single click ** button to cycle: Always On → Breathing → Off.
- Note: In Off mode, when waking from sleep, the light turns on for 3 seconds then goes off.

Sleep & Wake Mode

- A. After 5 seconds of inactivity, it will enter Sleep Mode I. After 1 minutes of inactivity, it will enter Sleep Mode II. To wake the mouse from Sleep Mode, simply move it or pressing a button.
- B. After 10 minutes of inactivity, it will enter Sleep Mode III, press a button to wake up.
- Battery & Charging: A. When the mouse battery is low, the indicator light flashes red slowly when the mouse battery is extremely low, the red light flashes quickly until it shuts down. B. Use the included Type-C cable to connect this product to a power source for charging. The power indicator light will glow white while charging, and will stay solid white when fully charged.

Declaration of Hazardous Substances in the Product

Component Name	Hazardous Substances					
	Cadmium (Cd)	Lead (Pb)	Mercury (Hg)	Chromium VI (Cr(VI))	Polybrominated Biphenyls (PBBs)	Polybrominated Diphenyl Ethers (PBDEs)
Plastic	0	0	0	0	0	0
Metal	0	0	0	0	0	0
Electronic components	0	0	0	0	0	0
Cable	0	0	0	0	0	0
Buttons	0	0	0	0	0	0
Sensor	0	0	0	0	0	0
Receiver	0	0	0	0	0	0

This product has been assessed according to the EU Directive 2011/65/EU and its amendments. 0 indicates that the content of the hazardous substance in all homogeneous materials of this component is below the limit requirements specified in GB/T 26572. X indicates that the content of the hazardous substance in at least one homogeneous material of this component exceeds the limit requirements specified in GB/T 26572.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and it not installed and used in accordance with the instructions, may cause harmful interference to radio communications; however, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

K. Caution:

This device complies with Innovation, Science and Economic Development Canada (conformément des normes RSS). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device.

French: Cet appareil est conforme aux normes RSS émanant de l'Innovation, des sciences et développement économique Canada. L'opération est soumise aux deux conditions suivantes: (1) L'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage compromet le fonctionnement. Le matériel a été évalué pour répondre aux exigences générales d'exposition aux radiofréquences. Le dispositif peut être utilisé dans des conditions d'exposition portables limitées.


内页3

JP

技術仕様

バッテリー仕様: リチウム電池 3.7V 500mAh
入力電圧: 5V ~ 500mA
DPI: 600/800/1200/1600/3600
製品サイズ: 95.1x67.8x40.2mm
重量: 50g
ボタン: クリックボタン x5, ホイールボタン x1
接続モード: Bluetooth/無線2.4G
Bluetooth名: PUDDING@Lofree
2.4GHz送信出力: 10mW (等方等価放射電力) 未満
適用デバイス: Macbook/Mac一体机/Windows/パソコン
OS対応備考: Bluetooth接続はWindows 8以降に対応し、Windows 7以前では2.4G USB接続をご利用ください。

製品図解

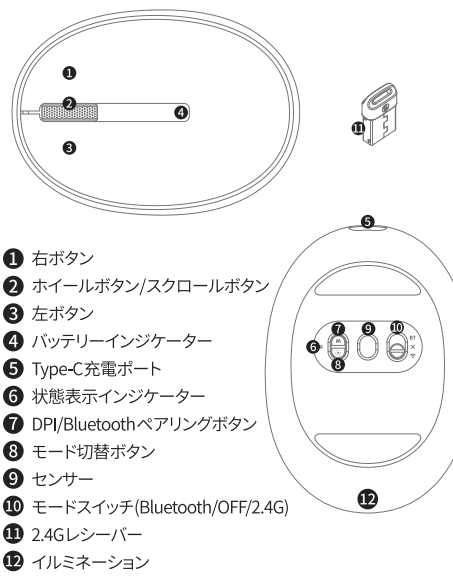

- 1 右ボタン
- 2 ホイールボタン(スクロールボタン)
- 3 左ボタン
- 4 バッテリーインジケータ
- 5 type-C充電ポート
- 6 状態表示インジケータ
- 7 DPI/Bluetoothペアリングボタン
- 8 モード切替ボタン
- 9 センサー
- 10 モードスイッチ (Bluetooth/OFF/2.4G)
- 11 2.4Gレシーバー
- 12 イルミネーション

操作方法

Bluetooth接続モード

- マウス裏面のモードスイッチを「BT」にスライドします。
- インジケータが青色で素早く点滅するまで「M」ボタンを3秒間長押しします。
- 接続するデバイスのBluetooth機能を手動でONにし、Bluetoothデバイス一覧から「PUDDING@Lofree」を選択して接続してください。
- 接続に成功するとインジケータが3秒間点灯した後、消灯します。
- Bluetooth再接続時、インジケータがゆっくり点滅し、接続後3秒間点灯し続けます。

2.4G接続モード

- マウス裏面のモードスイッチを「2.4G」にスライドします。
- レシーバーをパソコンのUSBポートに挿入すると、自動的に接続されます。
- 接続に成功するとインジケータが3秒間点灯した後、消灯します。
- 注意: レシーバーは出荷時にすでにマウスとペアリングされていますので、そのままご使用いただけます。再ペアリングが必要な場合は、2.4Gモードで「M」ボタンを3秒間長押しし、インジケータが素早く点滅した後、自動的に電源が切れます。

DPI設定

- 「M」ボタンを押して、600/800/1200/1600/3600の5段階で切り替えられます。(出荷時設定: 1200)
- イルミネーションライト設定: ** ボタンを押して、イルミネーションモードが切り替わり、順に常時点灯モード/呼吸モード/オフになります。
- 注意: オフモード時、第2段階/第3段階スリープから復帰すると、イルミネーションライトが3秒間点灯した後に消灯します。

スリープとウェイクモード

- A. 無操作状態が続くと、5秒で第1段階スリープ、1分で第2段階スリープに入ります。このときボタン操作を行うと復帰します。
- B. 無操作状態が続くと、10分で第3段階スリープに入ります。このときボタン操作を行うと復帰します。
- バッテリー表示と充電: A. バッテリー残量が少なくなると、状態表示インジケータが青色でゆっくり点滅し、残量が極端に少ない場合は赤色で素早く点滅した後、自動的に電源が切れます。 B. 付属のType-Cケーブルで電源に接続して充電できます。充電中は状態表示インジケータが白色で呼吸点灯し、満充電になると白色で常灯になります。

製品に含まれる有害物質の名称と含有量

部品構成	鉛 (Pb)	水銀 (Hg)	カドミウム (Cd)	六価クロム (Cr(VI))	多環芳香族炭化水素 (PAHs)	多環芳香族炭化水素 (PAHs)
プラスチック	○	○	○	○	○	○
金属	○	○	○	○	○	○
プリント基板	○	○	○	○	○	○
電子材料	○	○	○	○	○	○
リード線	○	○	○	○	○	○
ケーブル	○	○	○	○	○	○
部品筐	○	○	○	○	○	○
ケース	○	○	○	○	○	○
燃料ガス	○	○	○	○	○	○

本表は、EU指令2011/65/EUに基づいて作成されています。この当該製品のすべての均質材料中の有害物質の含有量がGB/T26572で規定された制限要件未満である。X: 少なくとも当該製品のあらゆる均質材料中の当該有害物質の含有量がGB/T26572で規定された制限要件を超えている。