



Spurious Emission



Spurious Emission BLE 125k 2402MHz



Spurious Emission BLE 125k 2440MHz



Spurious Emission BLE 125k 2480MHz






Spurious Emission BLE 500k 2402MHz



Spurious Emission BLE 500k 2440MHz



Spurious Emission BLE 500k 2480MHz

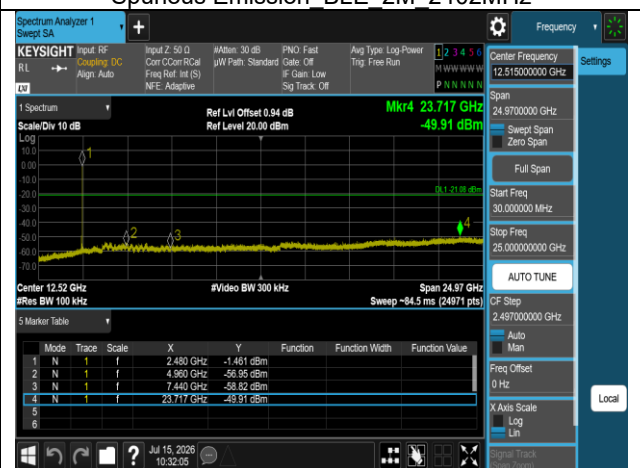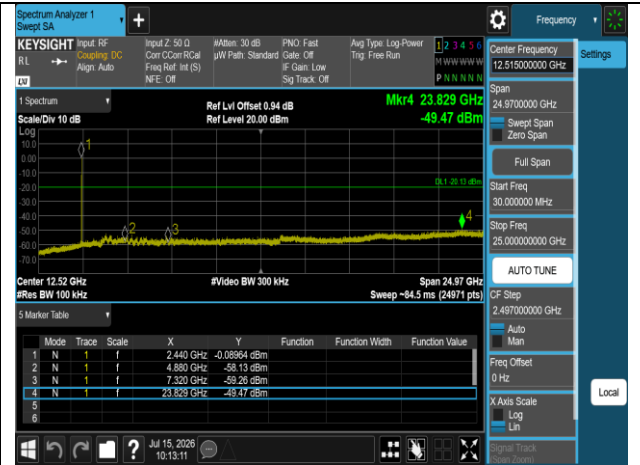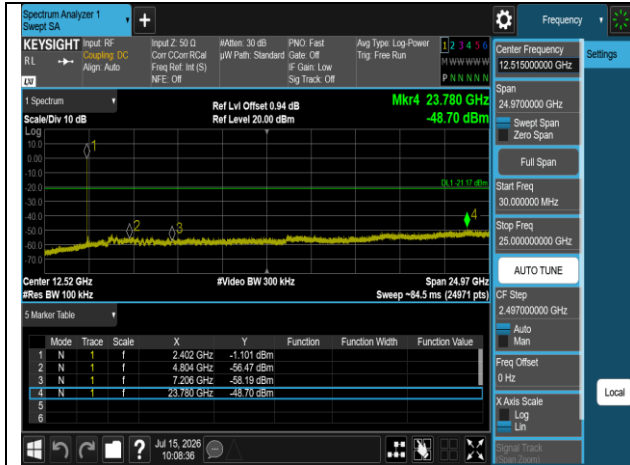

4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

IC according to RSS-Gen, Section 8.9 and 8.10

RSS-Gen Table 3 and Table 5 – General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz ^(Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with Section 6.6.

RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)

Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement Distance (m)
9-490 kHz ^{Note}	6.37/F (F in kHz)	300
490-1,705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

Note: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

4.6.2 Test Procedure

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10-2020 (FCC), ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024 (IC), and the EUT set in a continuous mode.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.

3. Span shall wide enough to full capture the emission measured. The SA from 9KHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz).

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

5. The SA setting following :

(1) Below 30MHz :

(1.1) 9KHz-490KHz : RBW=200Hz / VBW=1kHz / Sweep=AUTO

(1.2) 490KHz-30MHz : RBW=10kHz / VBW=30kHz / Sweep=AUTO

(2) 30MHz to 1GHz : RBW = 100kHz, VBW $\geq 3 \times$ RBW, Sweep = Auto,

Detector = Peak, Trace = Max hold.

(3) Above 1GHz :

(3.1) For Peak measurement : RBW = 1MHz, VBW $\geq 3 \times$ RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(3.2) For Average measurement : RBW = 1MHz, VBW

·If Duty Cycle $\geq 98\%$, VBW=10Hz.

·If Duty Cycle $< 98\%$, VBW=1/T.


6. Data result :

Actual FS=Spectrum Reading Level + Factor


Margin=Actual FS- Limit

4.6.3 Test Setup


9kHz ~ 30MHz

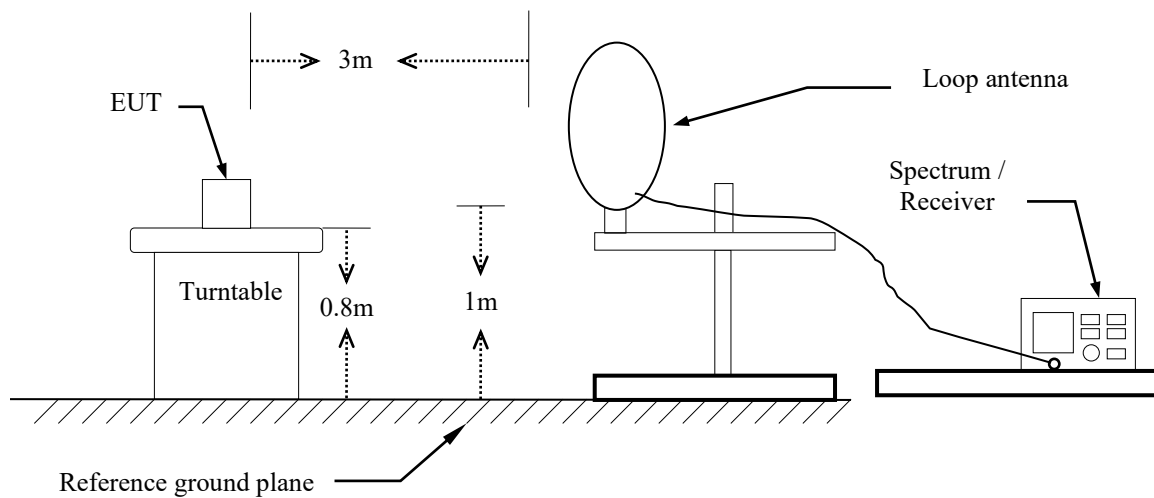

30MHz ~ 1GHz

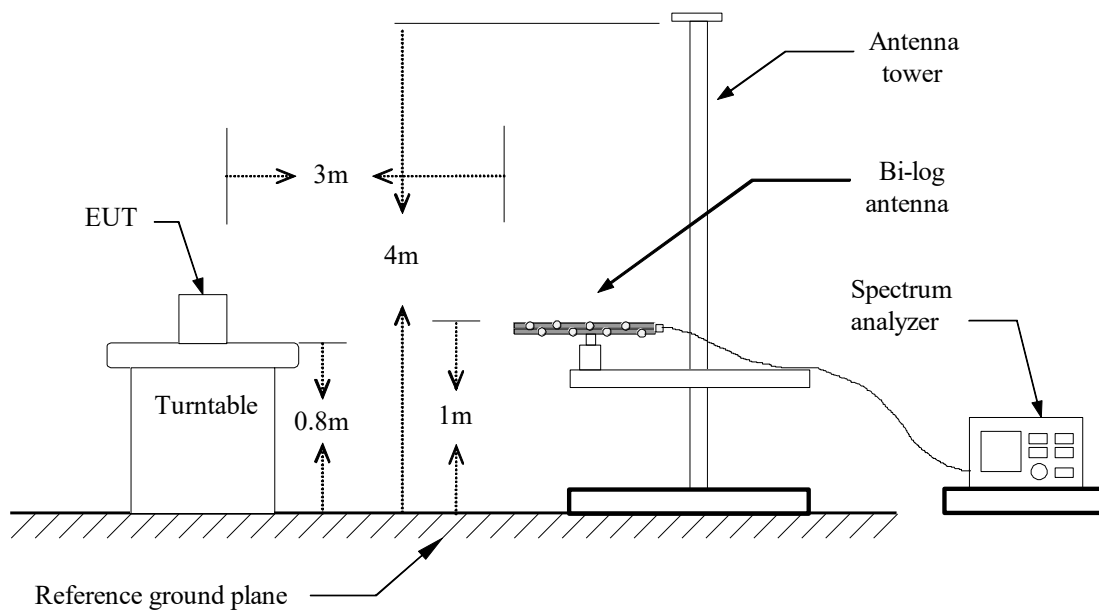

Above 1 GHz

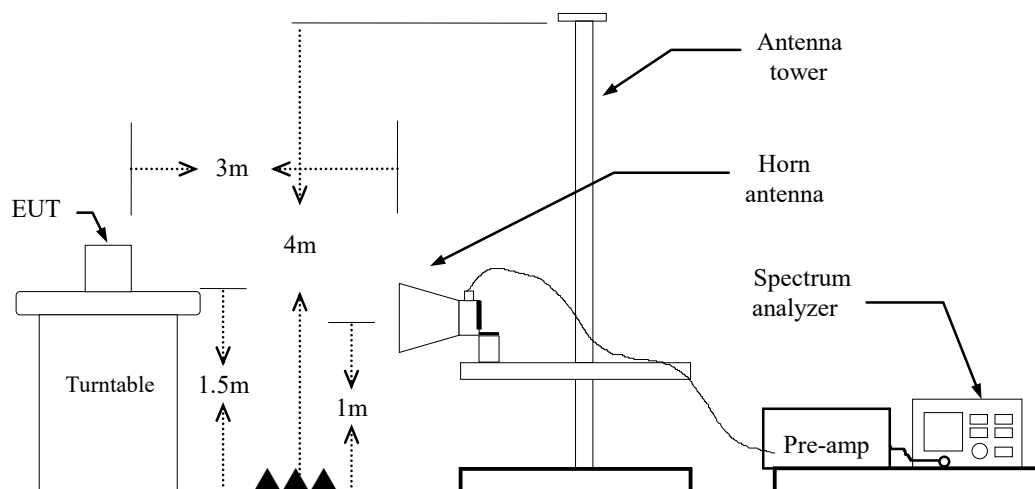


4.6.4 Test Result

Band Edge Test Data

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

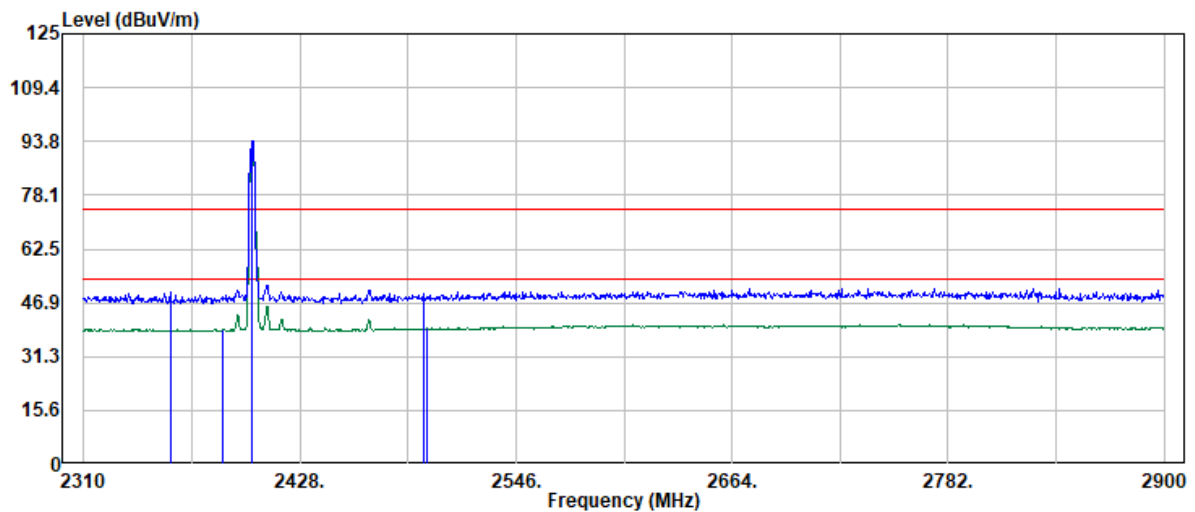


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2357.46	43.76	6.13	49.89	74.00	-24.11	Peak
2385.94	33.15	6.20	39.35	54.00	-14.65	Average
2402.00	87.89	6.11	94.00	--	--	Peak
2402.00	87.05	6.11	93.16	--	--	Average
2495.34	42.74	6.56	49.30	74.00	-24.70	Peak
2497.34	32.84	6.57	39.41	54.00	-14.59	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 53 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

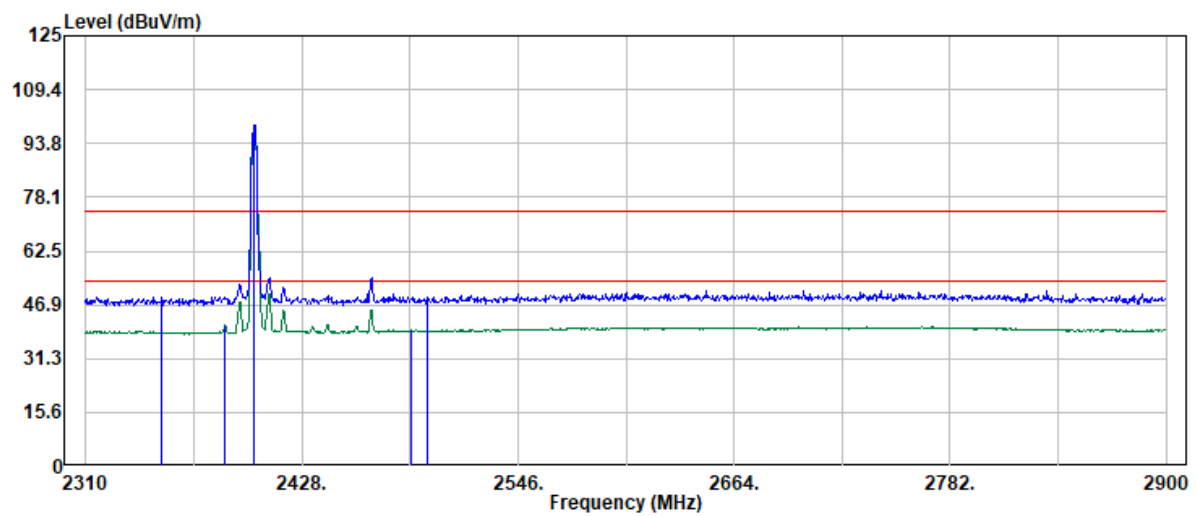


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2351.47	43.05	6.20	49.25	74.00	-24.75	Peak
2385.94	34.91	6.20	41.11	54.00	-12.89	Average
2402.00	92.91	6.11	99.02	--	--	Peak
2402.00	92.47	6.11	98.58	--	--	Average
2487.35	32.91	6.52	39.43	54.00	-14.57	Average
2496.34	42.58	6.57	49.15	74.00	-24.85	Peak

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 54 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

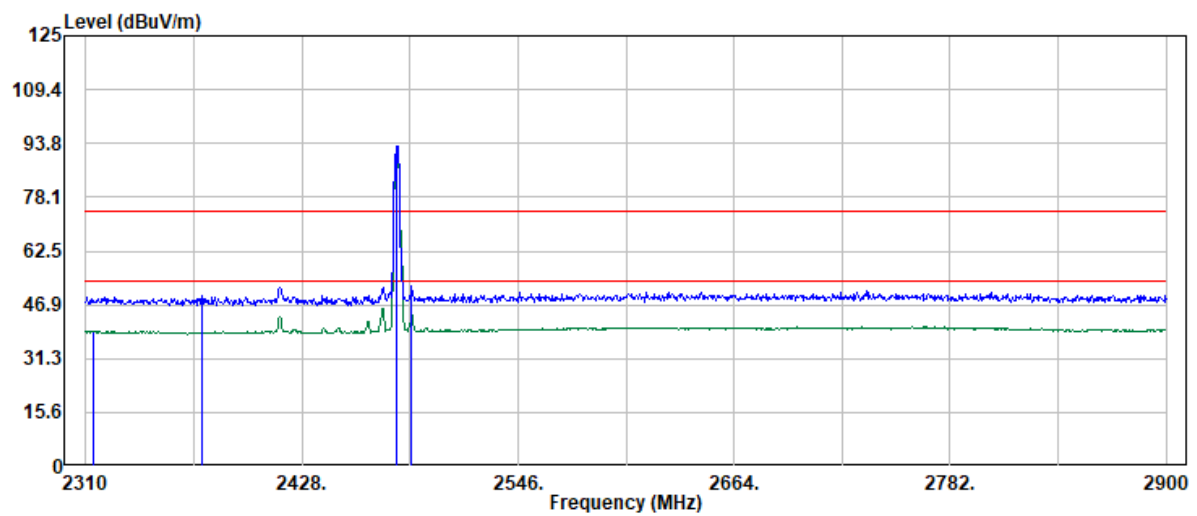


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2314.00	32.98	6.22	39.20	54.00	-14.80	Average
2373.45	43.27	6.20	49.47	74.00	-24.53	Peak
2480.00	86.65	6.44	93.09	--	--	Peak
2480.00	86.37	6.44	92.81	--	--	Average
2487.85	45.70	6.53	52.23	74.00	-21.77	Peak
2487.85	37.37	6.53	43.90	54.00	-10.10	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 55 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

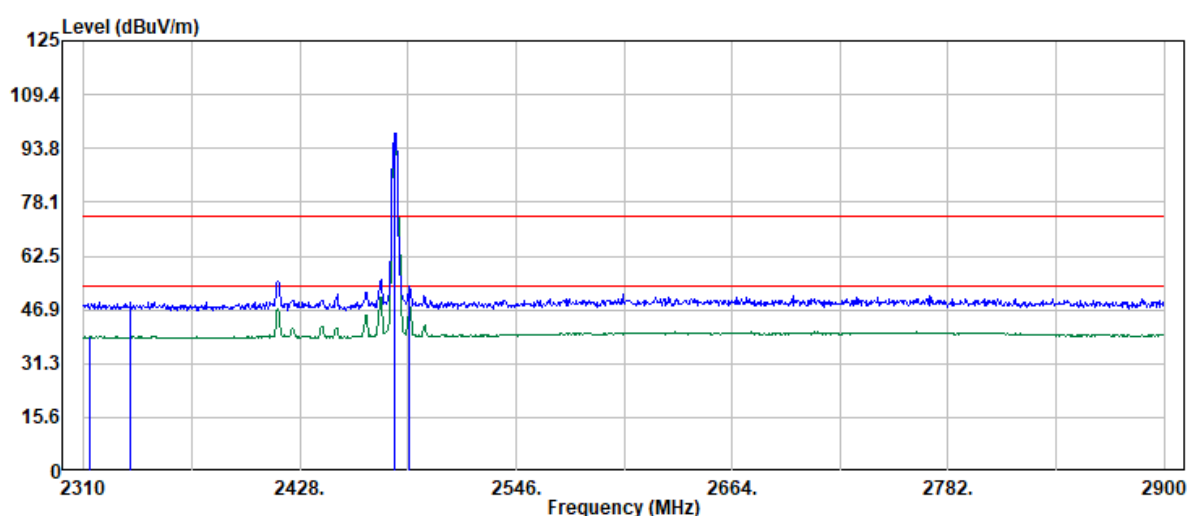


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2313.50	32.84	6.23	39.07	54.00	-14.93	Average
2335.48	42.92	6.24	49.16	74.00	-24.84	Peak
2480.00	91.64	6.44	98.08	--	--	Peak
2480.00	91.25	6.44	97.69	--	--	Average
2487.85	47.21	6.53	53.74	74.00	-20.26	Peak
2487.85	41.27	6.53	47.80	54.00	-6.20	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 56 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

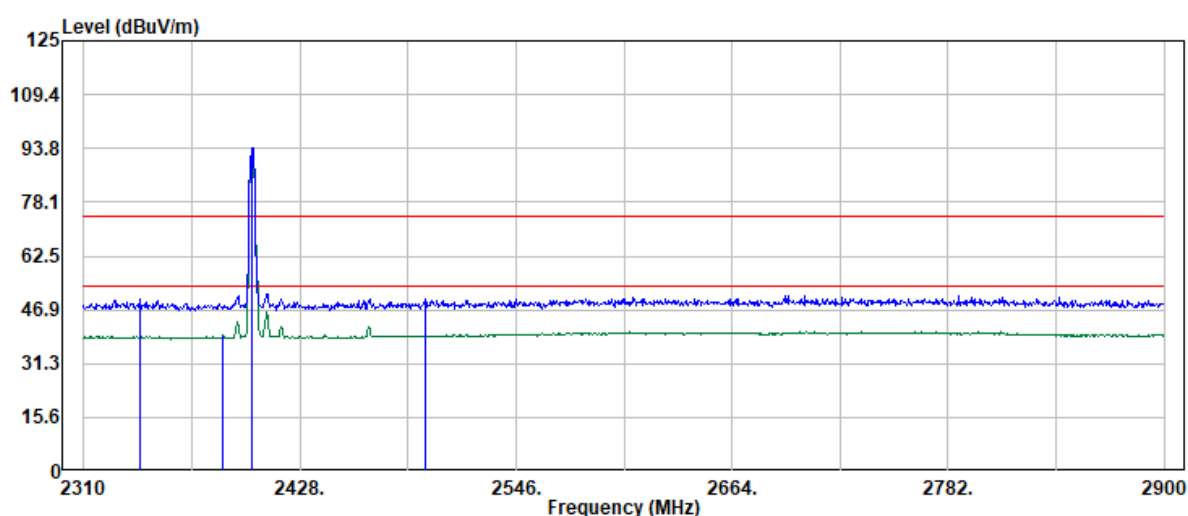


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2340.47	43.60	6.29	49.89	74.00	-24.11	Peak
2385.94	33.25	6.20	39.45	54.00	-14.55	Average
2402.00	87.80	6.11	93.91	--	--	Peak
2402.00	87.51	6.11	93.62	--	--	Average
2496.34	33.01	6.57	39.58	54.00	-14.42	Average
2496.84	43.23	6.57	49.80	74.00	-24.20	Peak

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 57 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

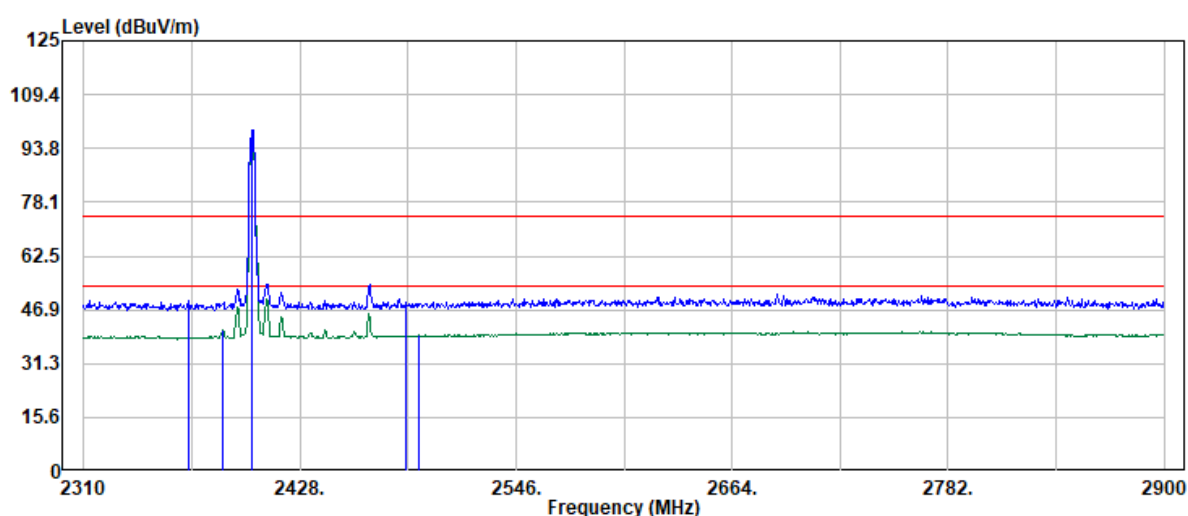


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2366.95	43.50	6.17	49.67	74.00	-24.33	Peak
2385.94	34.83	6.20	41.03	54.00	-12.97	Average
2402.00	92.93	6.11	99.04	--	--	Peak
2402.00	92.42	6.11	98.53	--	--	Average
2486.35	42.45	6.51	48.96	74.00	-25.04	Peak
2493.35	32.85	6.56	39.41	54.00	-14.59	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 58 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

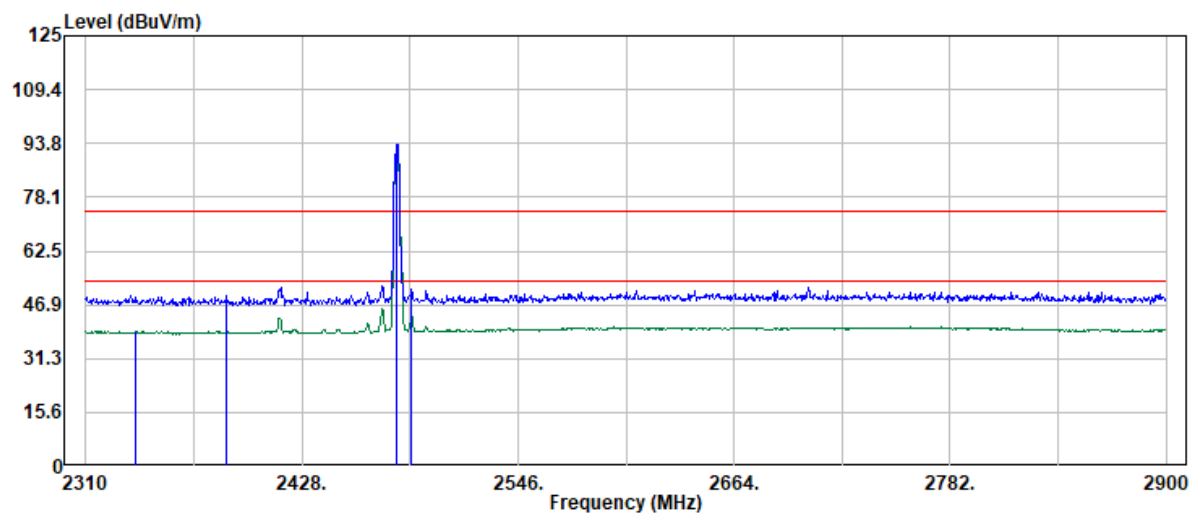


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2337.48	32.79	6.26	39.05	54.00	-14.95	Average
2386.94	43.44	6.19	49.63	74.00	-24.37	Peak
2480.00	86.82	6.44	93.26	--	--	Peak
2480.00	86.52	6.44	92.96	--	--	Average
2487.85	44.96	6.53	51.49	74.00	-22.51	Peak
2487.85	37.30	6.53	43.83	54.00	-10.17	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 59 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

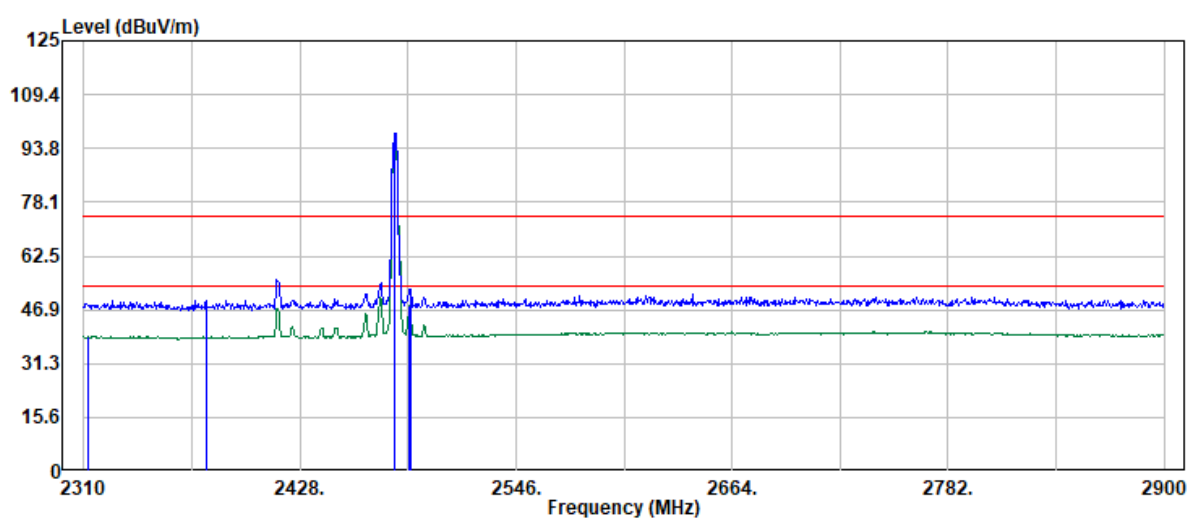


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2312.50	33.03	6.24	39.27	54.00	-14.73	Average
2376.94	43.36	6.20	49.56	74.00	-24.44	Peak
2480.00	91.62	6.44	98.06	--	--	Peak
2480.00	91.38	6.44	97.82	--	--	Average
2487.85	41.52	6.53	48.05	54.00	-5.95	Average
2488.35	46.42	6.53	52.95	74.00	-21.05	Peak

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 60 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

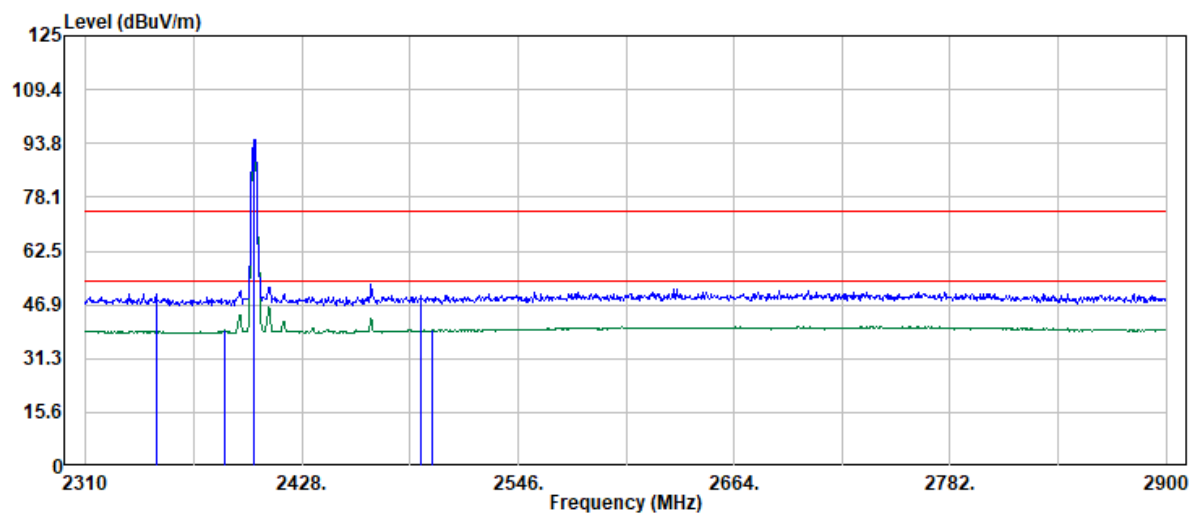


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2348.47	43.94	6.22	50.16	74.00	-23.84	Peak
2385.94	33.57	6.20	39.77	54.00	-14.23	Average
2402.00	88.92	6.11	95.03	--	--	Peak
2402.00	88.18	6.11	94.29	--	--	Average
2493.35	42.81	6.56	49.37	74.00	-24.63	Peak
2498.84	33.03	6.57	39.60	54.00	-14.40	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 61 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

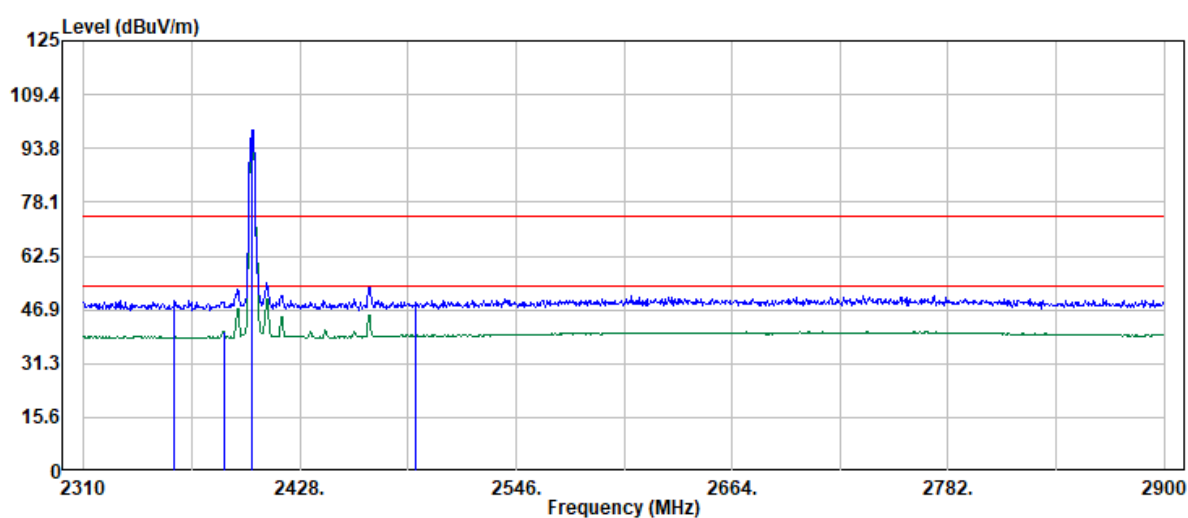


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2359.46	43.61	6.11	49.72	74.00	-24.28	Peak
2386.44	34.56	6.19	40.75	54.00	-13.25	Average
2402.00	92.96	6.11	99.07	--	--	Peak
2402.00	92.30	6.11	98.41	--	--	Average
2490.85	33.10	6.56	39.66	54.00	-14.34	Average
2491.35	42.64	6.56	49.20	74.00	-24.80	Peak

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 62 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

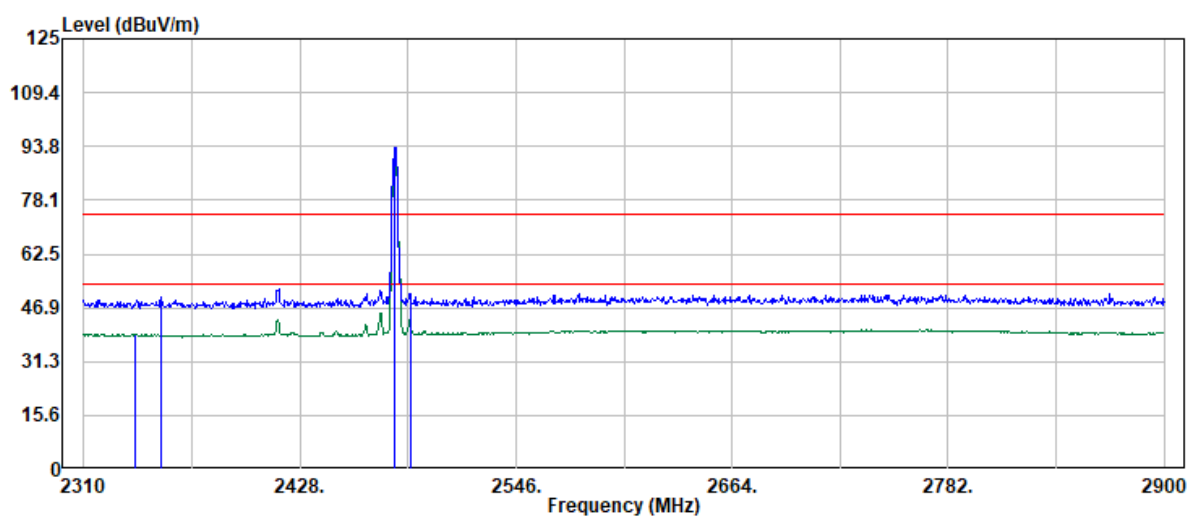


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2338.48	32.94	6.27	39.21	54.00	-14.79	Average
2351.96	43.67	6.19	49.86	74.00	-24.14	Peak
2480.00	86.89	6.44	93.33	--	--	Peak
2480.00	86.03	6.44	92.47	--	--	Average
2488.35	44.36	6.53	50.89	74.00	-23.11	Peak
2488.35	36.92	6.53	43.45	54.00	-10.55	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 63 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

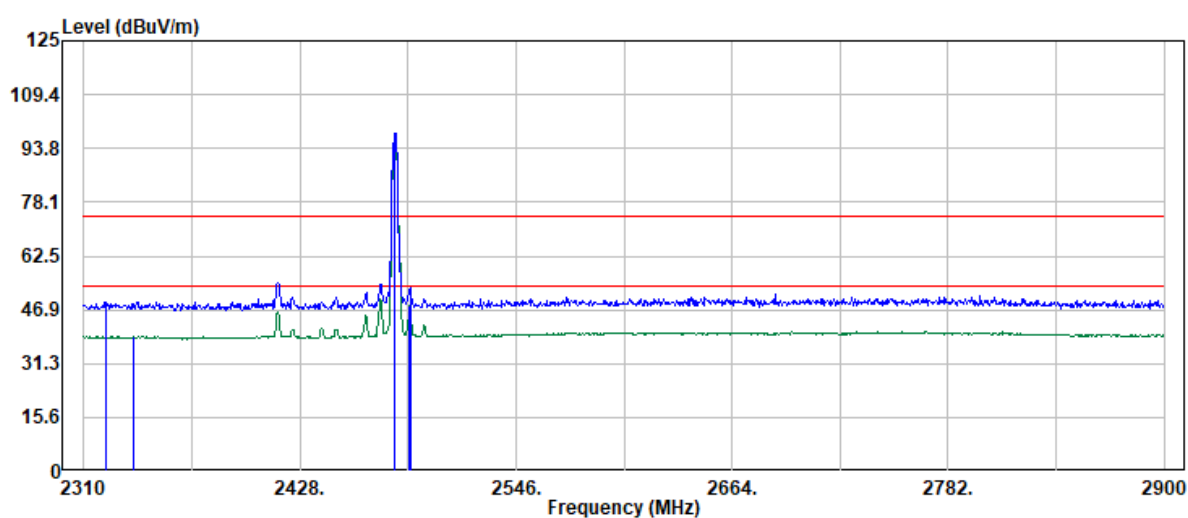


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2322.49	43.03	6.17	49.20	74.00	-24.80	Peak
2337.48	33.02	6.26	39.28	54.00	-14.72	Average
2480.00	91.71	6.44	98.15	--	--	Peak
2480.00	91.25	6.44	97.69	--	--	Average
2487.85	41.47	6.53	48.00	54.00	-6.00	Average
2488.35	46.76	6.53	53.29	74.00	-20.71	Peak

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 64 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

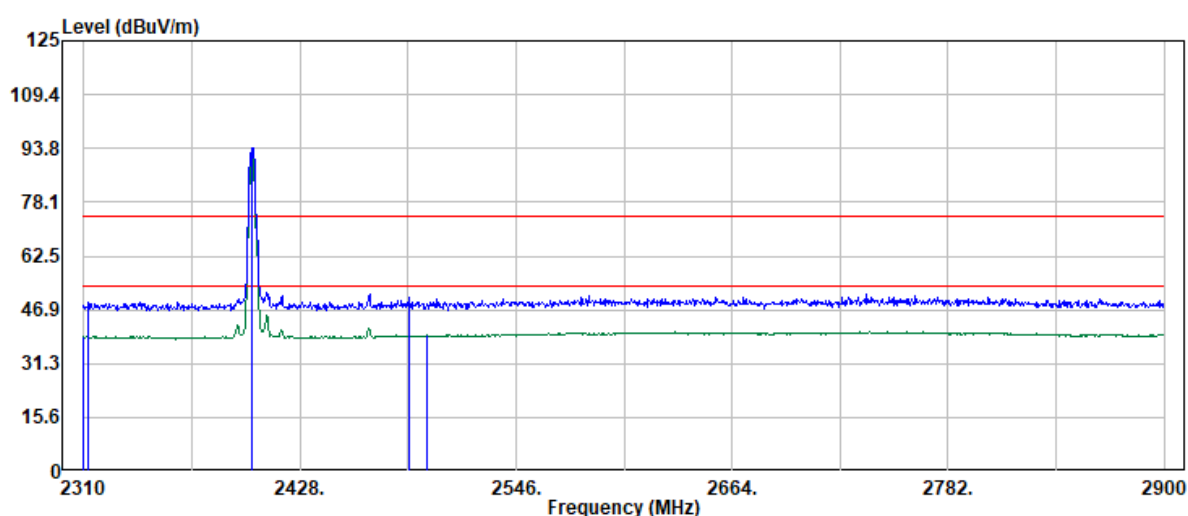


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.00	32.88	6.25	39.13	54.00	-14.87	Average
2312.50	42.90	6.24	49.14	74.00	-24.86	Peak
2402.00	87.79	6.11	93.90	--	--	Peak
2402.00	86.13	6.11	92.24	--	--	Average
2487.35	43.79	6.52	50.31	74.00	-23.69	Peak
2497.84	32.86	6.57	39.43	54.00	-14.57	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 65 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

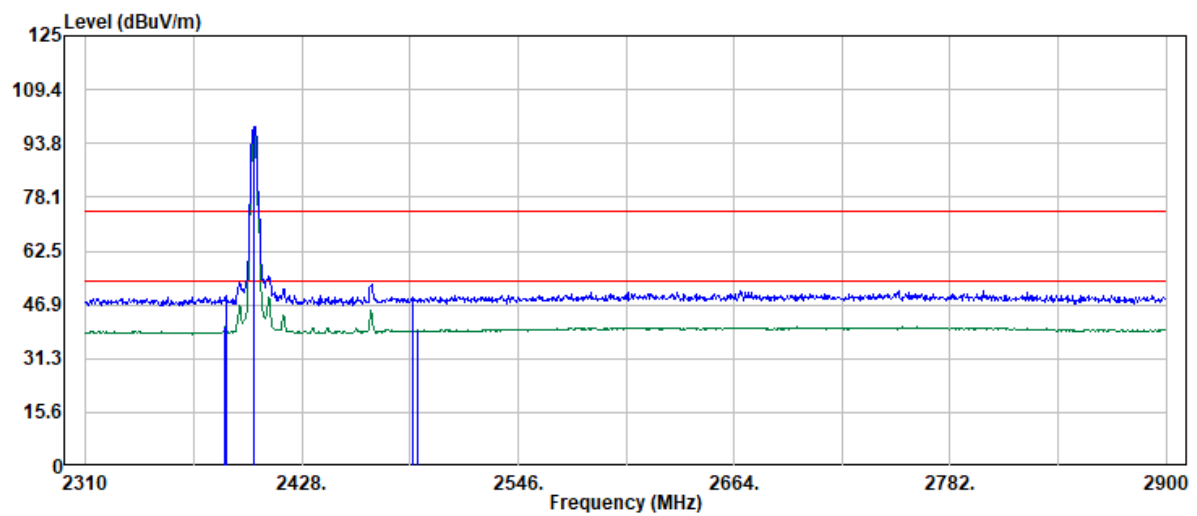


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2385.94	34.15	6.20	40.35	54.00	-13.65	Average
2386.44	43.16	6.19	49.35	74.00	-24.65	Peak
2402.00	92.67	6.11	98.78	--	--	Peak
2402.00	90.99	6.11	97.10	--	--	Average
2488.85	42.50	6.55	49.05	74.00	-24.95	Peak
2490.85	32.98	6.56	39.54	54.00	-14.46	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 66 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

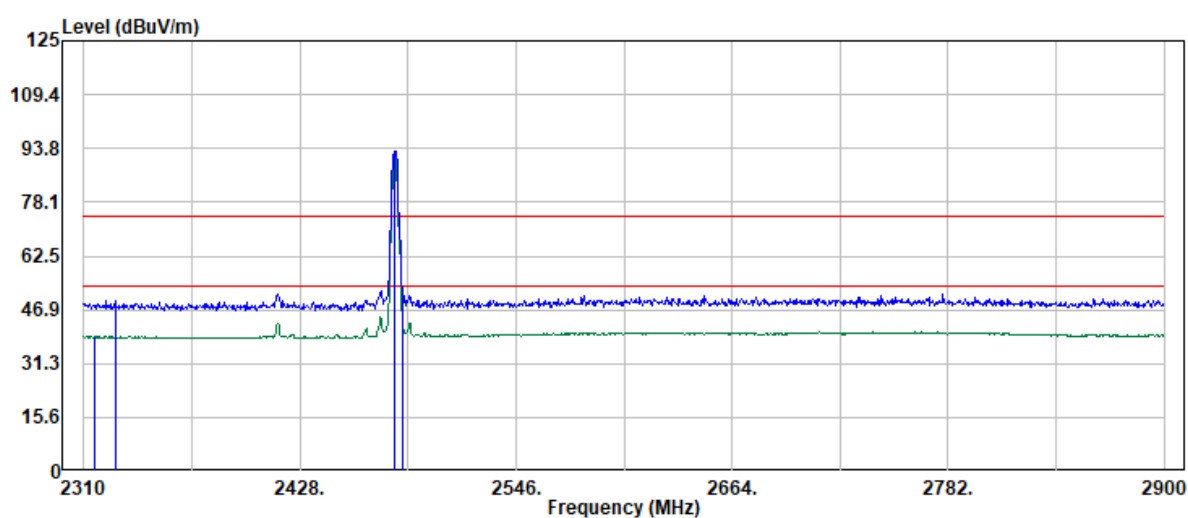


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2315.50	33.09	6.21	39.30	54.00	-14.70	Average
2326.99	43.30	6.18	49.48	74.00	-24.52	Peak
2480.00	86.66	6.44	93.10	--	--	Peak
2480.00	85.23	6.44	91.67	--	--	Average
2483.85	46.20	6.49	52.69	74.00	-21.31	Peak
2483.85	36.80	6.49	43.29	54.00	-10.71	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 67 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

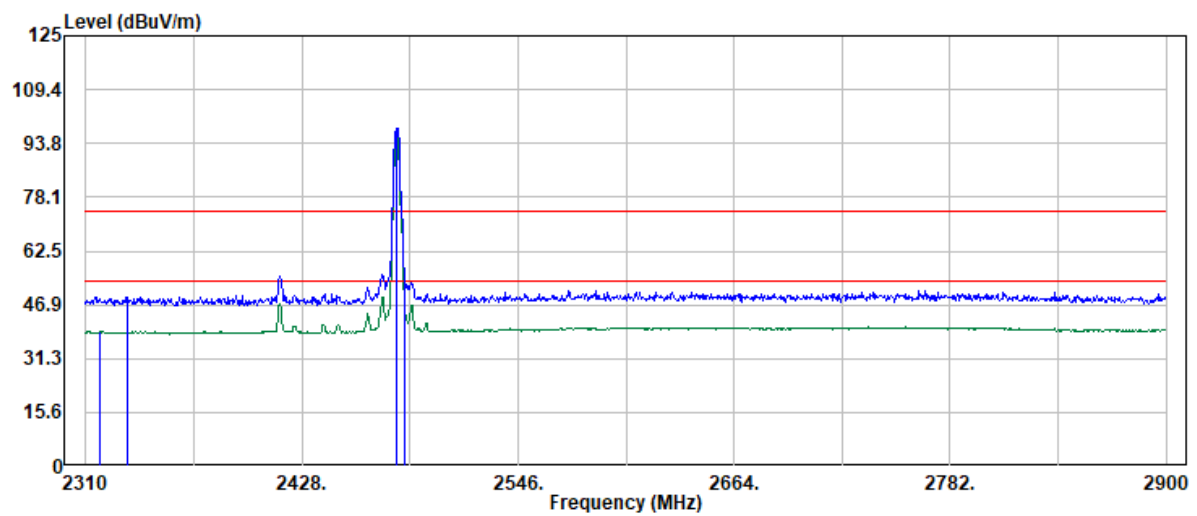

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2317.99	32.89	6.18	39.07	54.00	-14.93	Average
2332.48	42.98	6.20	49.18	74.00	-24.82	Peak
2480.00	91.63	6.44	98.07	--	--	Peak
2480.00	90.11	6.44	96.55	--	--	Average
2483.85	49.82	6.49	56.31	74.00	-17.69	Peak
2483.85	41.16	6.49	47.65	54.00	-6.35	Average


Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 68 / 93
Rev.: 02

TX Test Data

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting :

Test Date : 2026-09-08
Temp./Humi. : 25.6/52
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

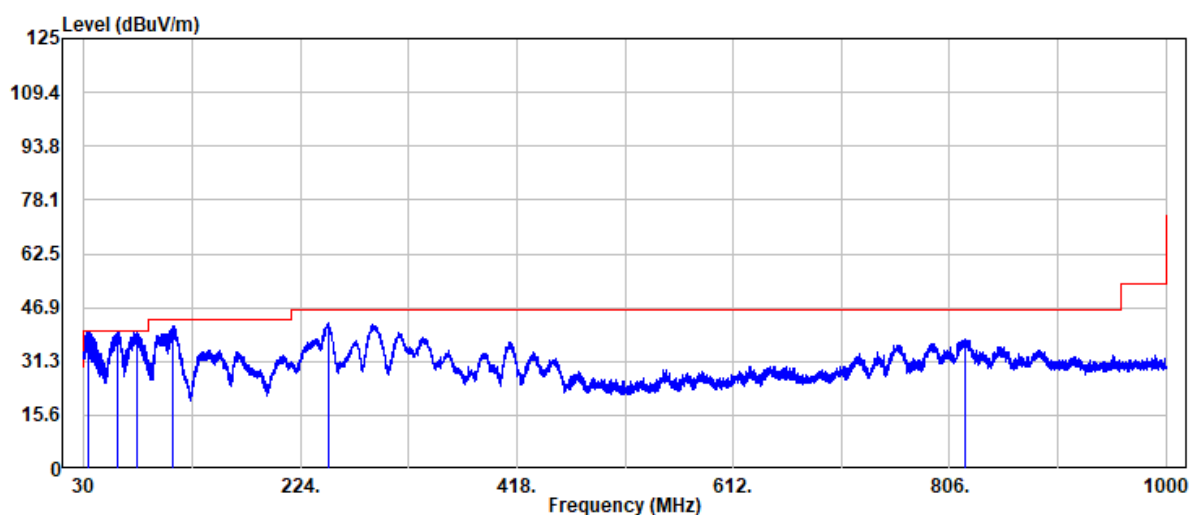


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
34.30	44.35	-5.73	38.62	40.00	-1.38	QP
60.10	54.36	-16.10	38.26	40.00	-1.74	QP
77.40	54.25	-15.98	38.27	40.00	-1.73	QP
109.20	52.37	-10.95	41.42	43.50	-2.08	Peak
248.80	53.71	-11.31	42.40	46.00	-3.60	Peak
820.50	36.88	1.01	37.89	46.00	-8.11	Peak

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 69 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting :

Test Date : 2026-09-08
Temp./Humi. : 25.6/52
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

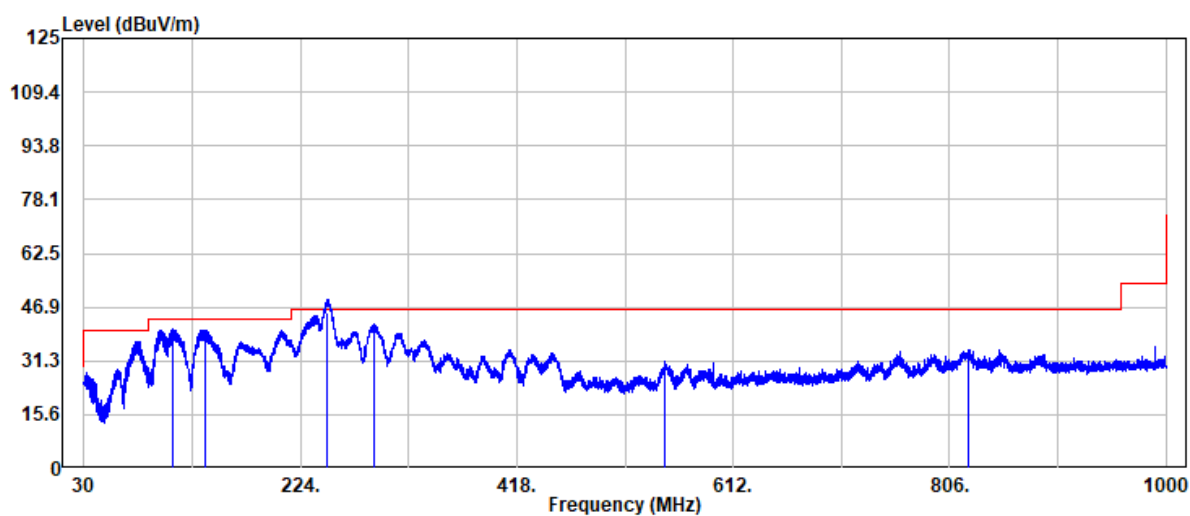


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
109.70	51.43	-10.95	40.48	43.50	-3.02	Peak
139.20	50.65	-10.39	40.26	43.50	-3.24	Peak
248.20	56.79	-11.30	45.49	46.00	-0.51	QP
289.40	51.52	-9.41	42.11	46.00	-3.89	Peak
551.30	34.77	-3.60	31.17	46.00	-14.83	Peak
823.40	33.68	0.96	34.64	46.00	-11.36	Peak

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 70 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

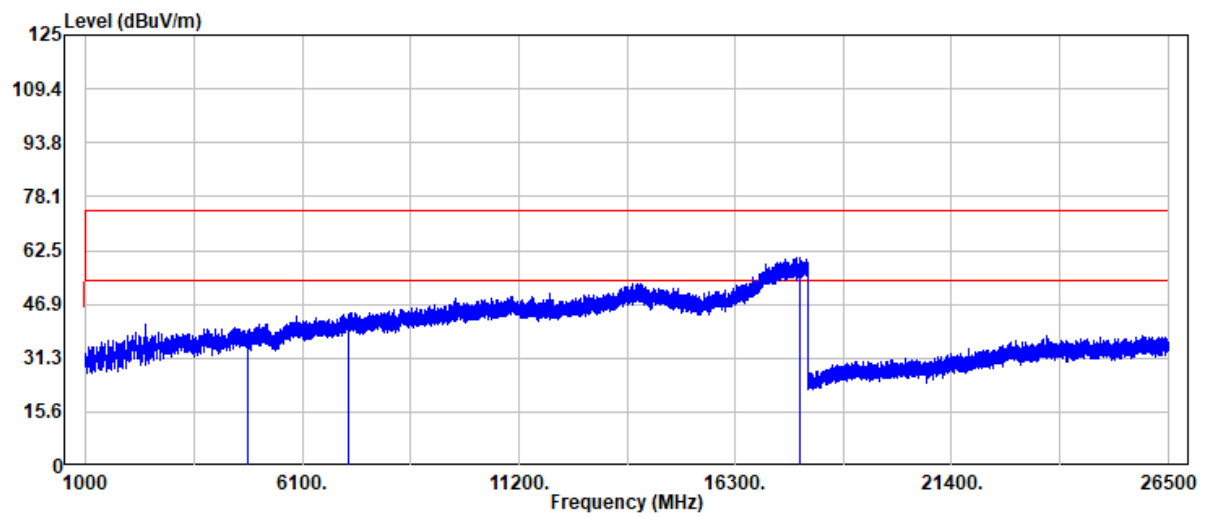


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	36.19	2.34	38.53	74.00	-35.47	Peak
4804.00	26.62	2.34	28.96	54.00	-25.04	Average
7206.00	34.52	9.08	43.60	74.00	-30.40	Peak
7206.00	25.14	9.08	34.22	54.00	-19.78	Average
17838.00	34.83	25.35	60.18	74.00	-13.82	Peak
17838.00	24.03	25.35	49.38	54.00	-4.62	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 71 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

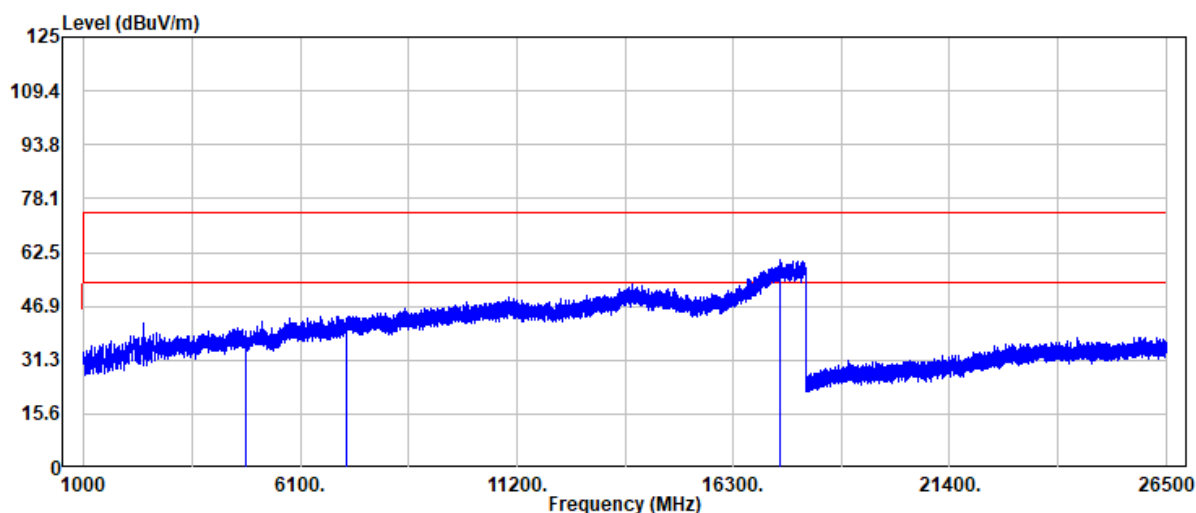


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	37.24	2.34	39.58	74.00	-34.42	Peak
4804.00	26.59	2.34	28.93	54.00	-25.07	Average
7206.00	34.95	9.08	44.03	74.00	-29.97	Peak
7206.00	25.43	9.08	34.51	54.00	-19.49	Average
17399.00	35.23	25.20	60.43	74.00	-13.57	Peak
17399.00	24.05	25.20	49.25	54.00	-4.75	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 72 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2440 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

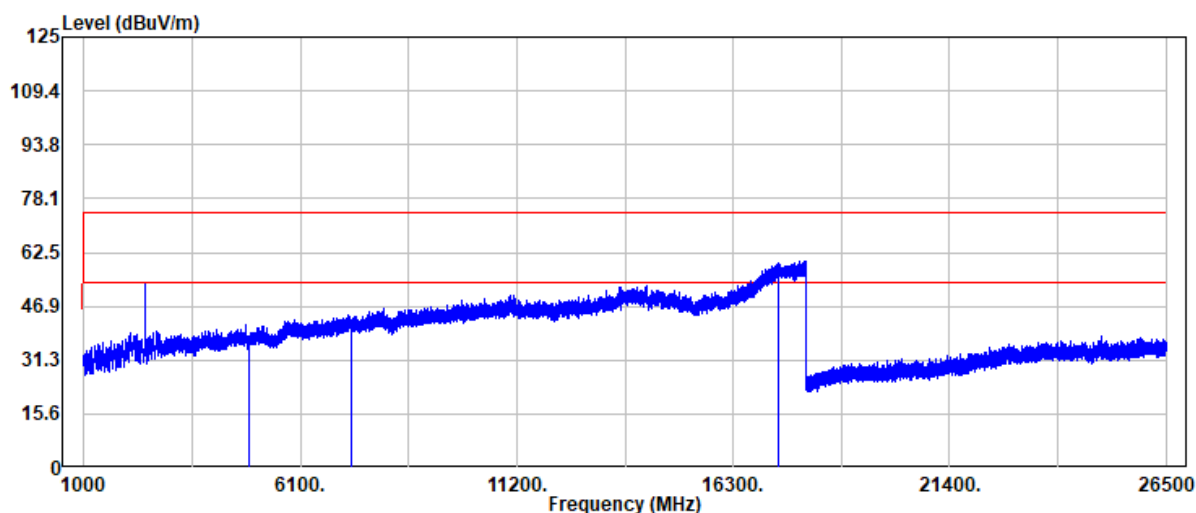


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4880.00	35.64	2.55	38.19	74.00	-35.81	Peak
4880.00	26.34	2.55	28.89	54.00	-25.11	Average
7320.00	34.22	9.14	43.36	74.00	-30.64	Peak
7320.00	25.33	9.14	34.47	54.00	-19.53	Average
17362.00	34.12	25.20	59.32	74.00	-14.68	Peak
17362.00	24.11	25.20	49.31	54.00	-4.69	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 73 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2440 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

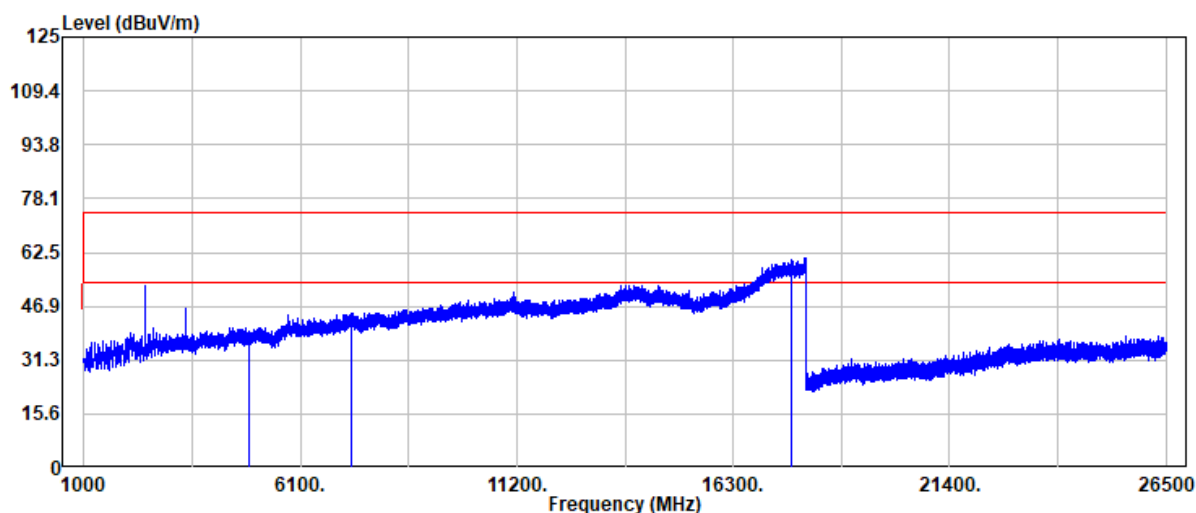


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4880.00	36.00	2.55	38.55	74.00	-35.45	Peak
4880.00	26.38	2.55	28.93	54.00	-25.07	Average
7320.00	35.64	9.14	44.78	74.00	-29.22	Peak
7320.00	25.49	9.14	34.63	54.00	-19.37	Average
17685.00	34.68	25.76	60.44	74.00	-13.56	Peak
17685.00	24.16	25.76	49.92	54.00	-4.08	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 74 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

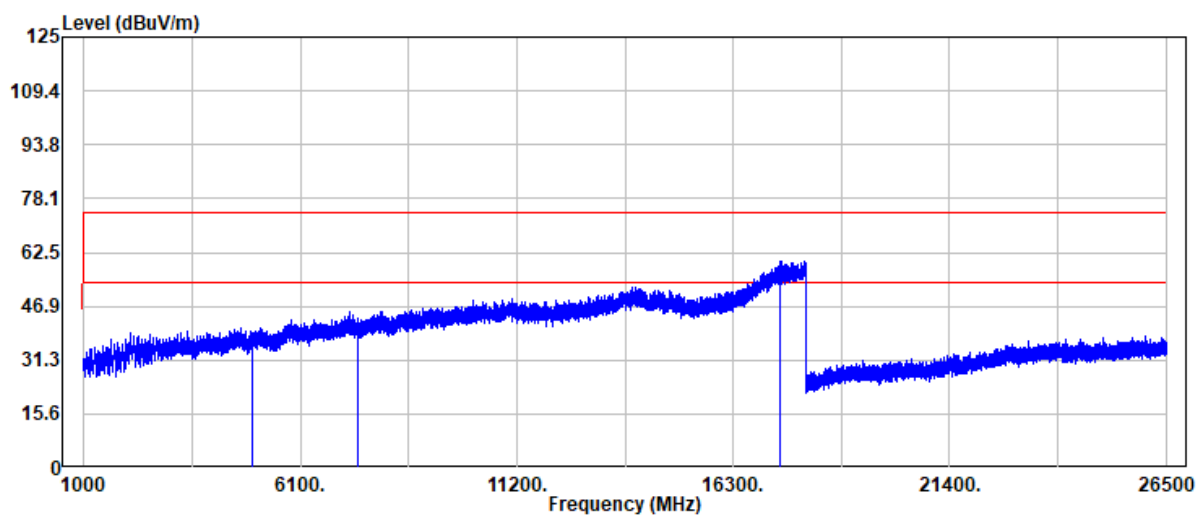


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	35.96	3.40	39.36	74.00	-34.64	Peak
4960.00	26.65	3.40	30.05	54.00	-23.95	Average
7440.00	33.01	9.07	42.08	74.00	-31.92	Peak
7440.00	25.18	9.07	34.25	54.00	-19.75	Average
17423.00	34.56	25.24	59.80	74.00	-14.20	Peak
17423.00	24.01	25.24	49.25	54.00	-4.75	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 75 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_125K
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

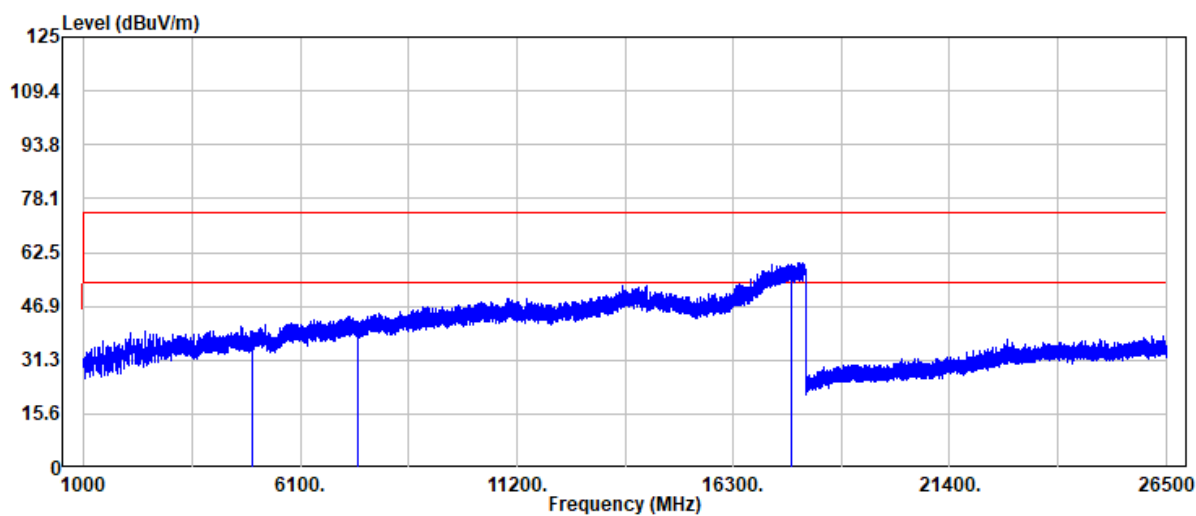


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	FS	@3m	-----	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	34.59	3.40	37.99	74.00	-36.01	Peak
4960.00	26.75	3.40	30.15	54.00	-23.85	Average
7440.00	33.42	9.07	42.49	74.00	-31.51	Peak
7440.00	25.66	9.07	34.73	54.00	-19.27	Average
17660.00	33.79	25.40	59.19	74.00	-14.81	Peak
17660.00	24.01	25.40	49.41	54.00	-4.59	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 76 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

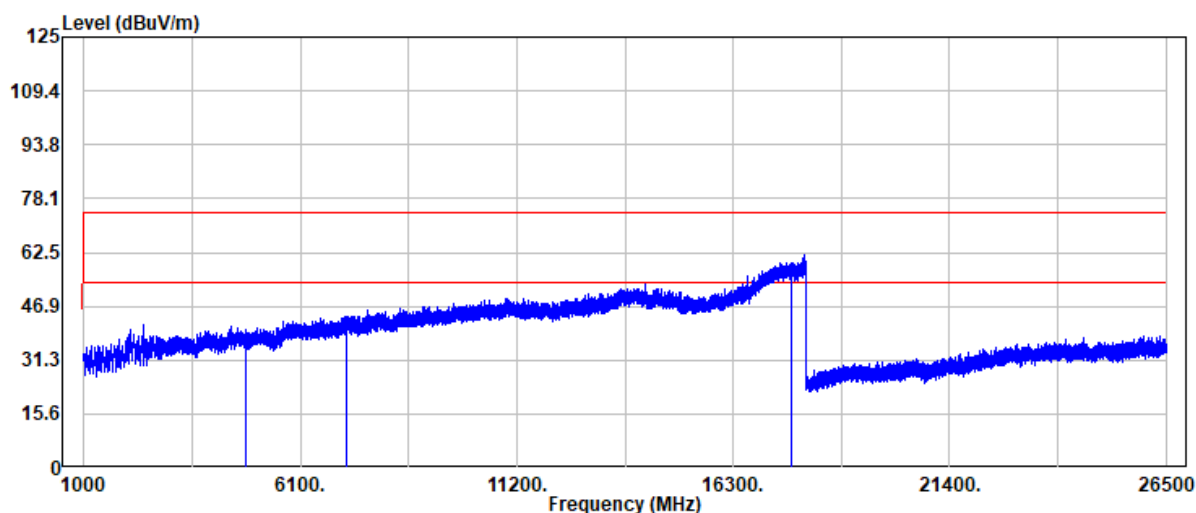


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	35.91	2.34	38.25	74.00	-35.75	Peak
4804.00	26.32	2.34	28.66	54.00	-25.34	Average
7206.00	34.64	9.08	43.72	74.00	-30.28	Peak
7206.00	25.41	9.08	34.49	54.00	-19.51	Average
17691.00	33.62	25.84	59.46	74.00	-14.54	Peak
17691.00	24.11	25.84	49.95	54.00	-4.05	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 77 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

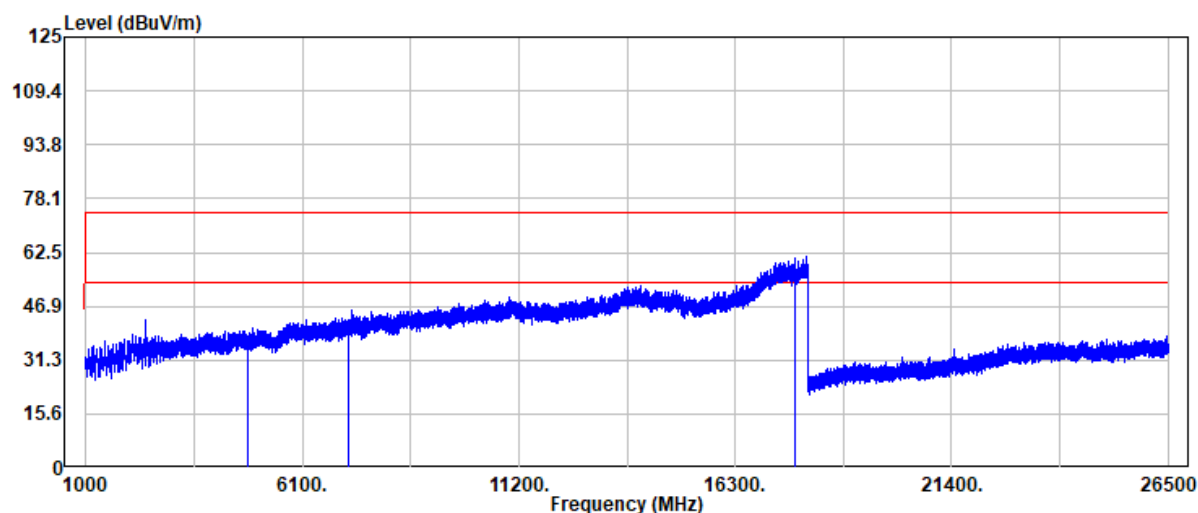


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	FS	@3m	-----	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	36.09	2.34	38.43	74.00	-35.57	Peak
4804.00	26.49	2.34	28.83	54.00	-25.17	Average
7206.00	33.88	9.08	42.96	74.00	-31.04	Peak
7206.00	25.25	9.08	34.33	54.00	-19.67	Average
17698.00	34.73	25.95	60.68	74.00	-13.32	Peak
17698.00	24.05	25.95	50.00	54.00	-4.00	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 78 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2440 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

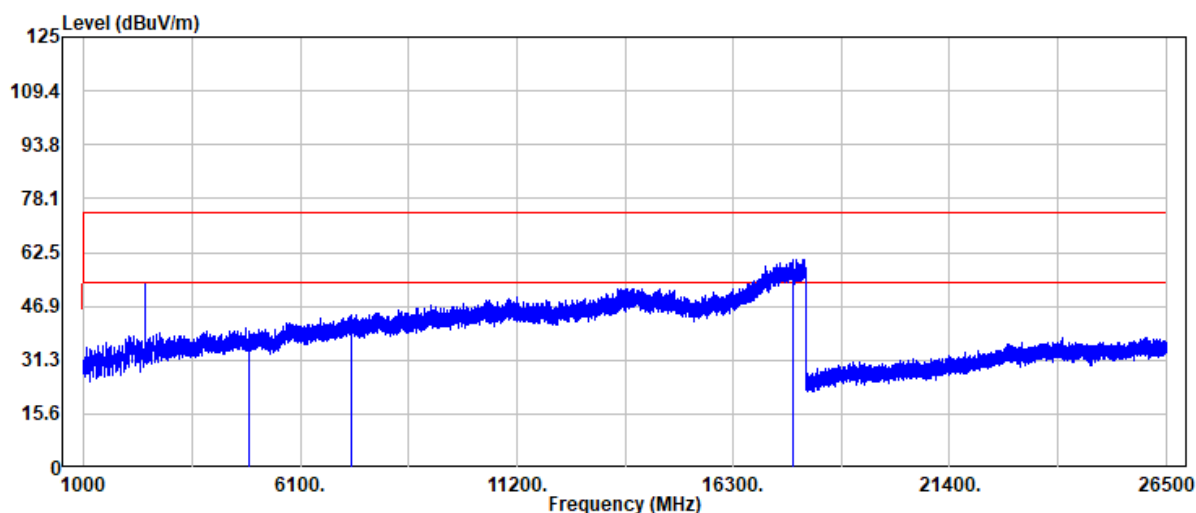


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4880.00	37.18	2.55	39.73	74.00	-34.27	Peak
4880.00	26.28	2.55	28.83	54.00	-25.17	Average
7320.00	34.42	9.14	43.56	74.00	-30.44	Peak
7320.00	25.45	9.14	34.59	54.00	-19.41	Average
17696.00	34.65	25.92	60.57	74.00	-13.43	Peak
17696.00	24.06	25.92	49.98	54.00	-4.02	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 79 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2440 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

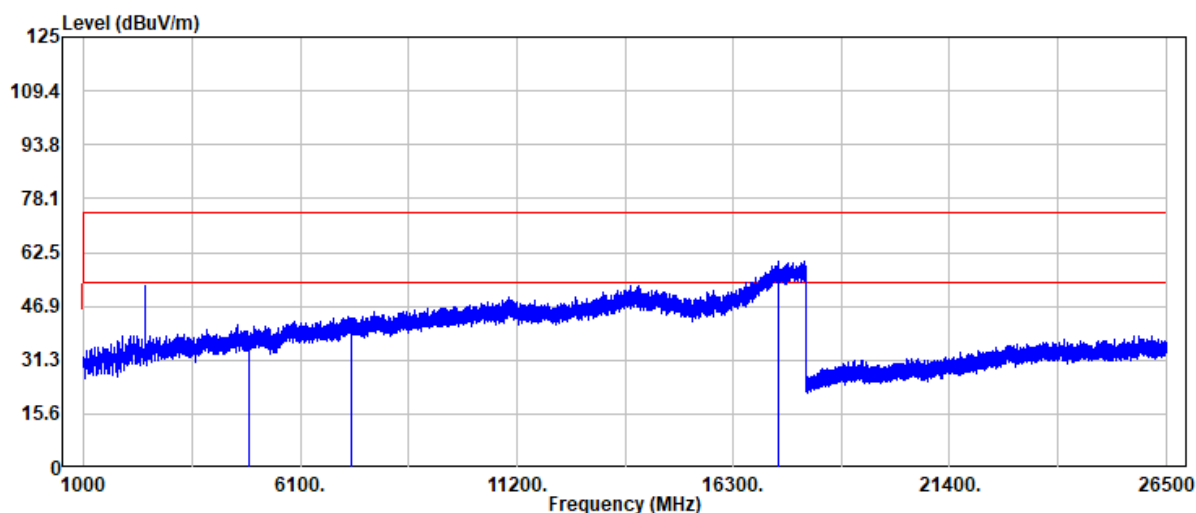


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4880.00	35.55	2.55	38.10	74.00	-35.90	Peak
4880.00	26.66	2.55	29.21	54.00	-24.79	Average
7320.00	34.38	9.14	43.52	74.00	-30.48	Peak
7320.00	25.52	9.14	34.66	54.00	-19.34	Average
17369.00	34.68	25.20	59.88	74.00	-14.12	Peak
17369.00	24.17	25.20	49.37	54.00	-4.63	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 80 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

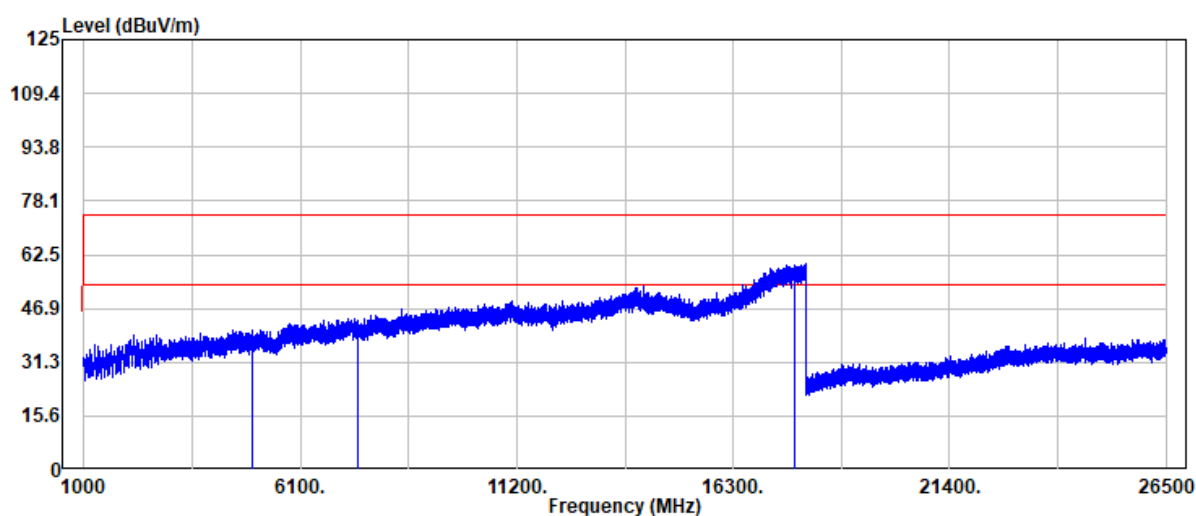


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	FS	@3m	-----	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	37.19	3.40	40.59	74.00	-33.41	Peak
4960.00	26.34	3.40	29.74	54.00	-24.26	Average
7440.00	34.30	9.07	43.37	74.00	-30.63	Peak
7440.00	25.41	9.07	34.48	54.00	-19.52	Average
17764.00	34.67	24.87	59.54	74.00	-14.46	Peak
17764.00	24.04	24.87	48.91	54.00	-5.09	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 81 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_500K
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

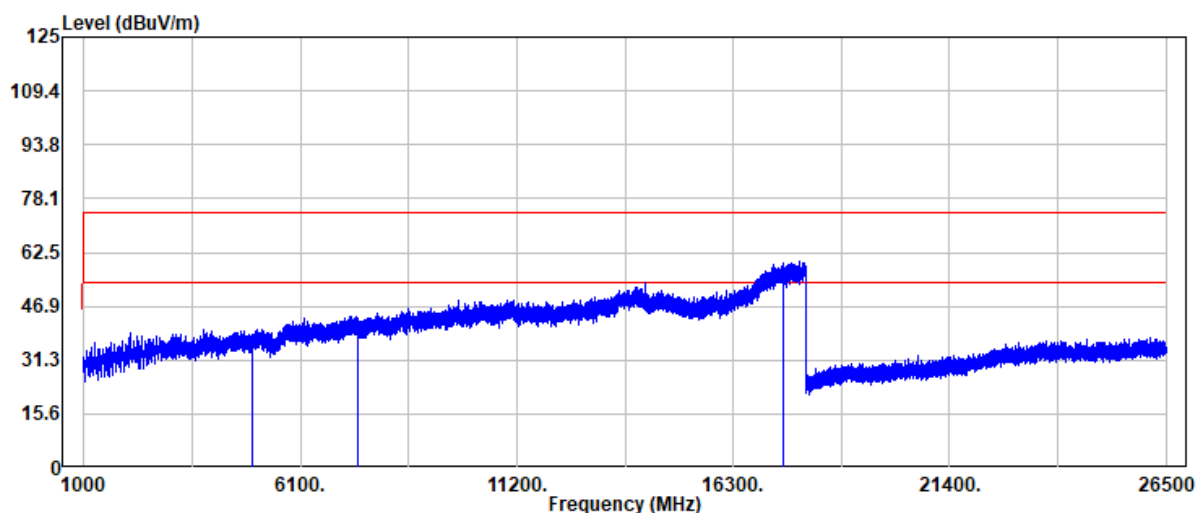


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	35.32	3.40	38.72	74.00	-35.28	Peak
4960.00	26.31	3.40	29.71	54.00	-24.29	Average
7440.00	33.68	9.07	42.75	74.00	-31.25	Peak
7440.00	25.51	9.07	34.58	54.00	-19.42	Average
17478.00	34.42	25.20	59.62	74.00	-14.38	Peak
17478.00	24.41	25.20	49.61	54.00	-4.39	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 82 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

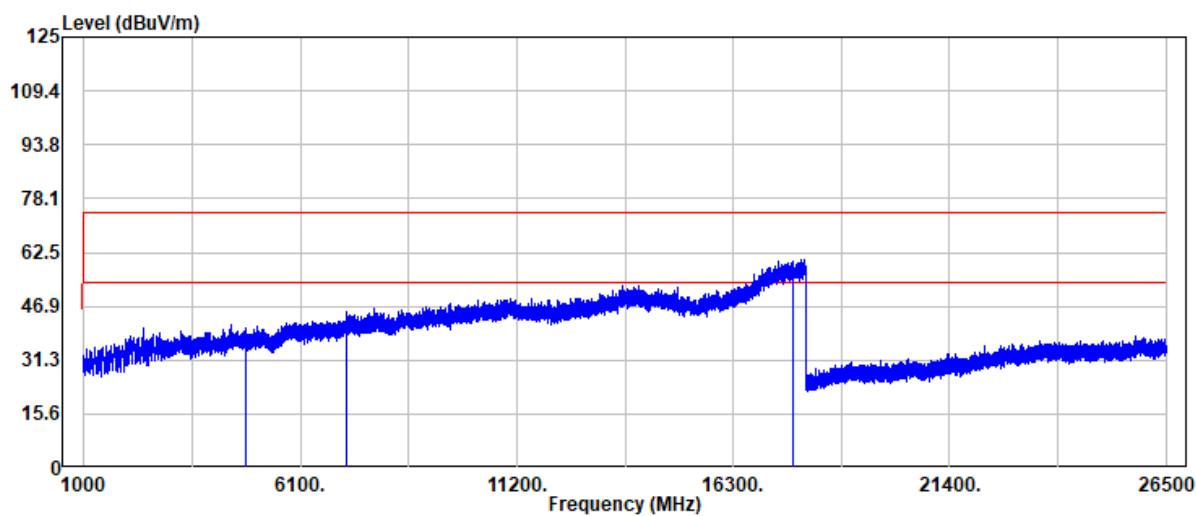


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	35.85	2.34	38.19	74.00	-35.81	Peak
4804.00	26.58	2.34	28.92	54.00	-25.08	Average
7206.00	34.55	9.08	43.63	74.00	-30.37	Peak
7206.00	25.14	9.08	34.22	54.00	-19.78	Average
17721.00	34.63	25.39	60.02	74.00	-13.98	Peak
17721.00	24.11	25.39	49.50	54.00	-4.50	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 83 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

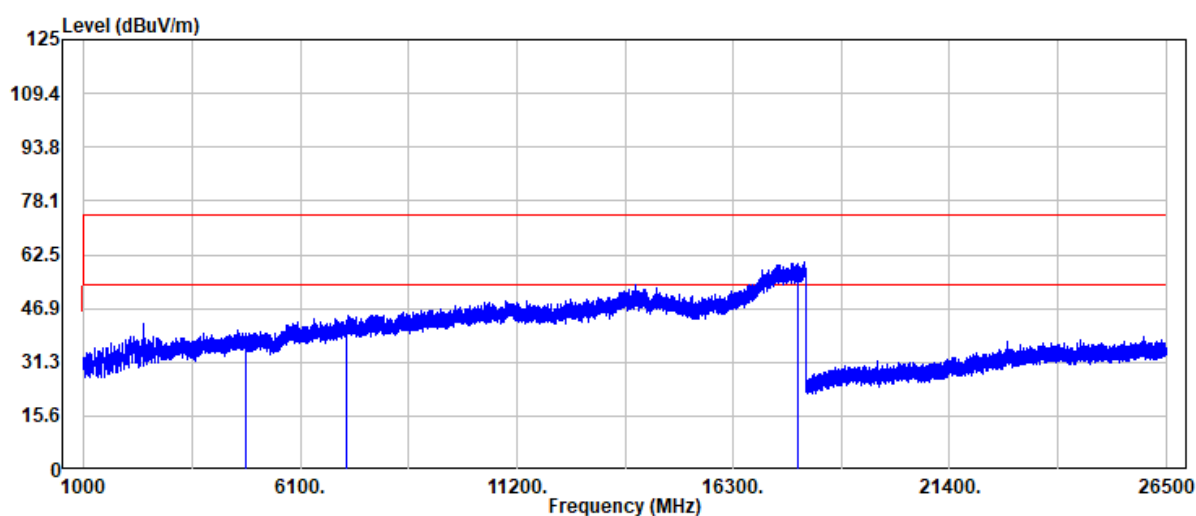


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	FS	@3m	-----	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	36.45	2.34	38.79	74.00	-35.21	Peak
4804.00	26.72	2.34	29.06	54.00	-24.94	Average
7206.00	34.15	9.08	43.23	74.00	-30.77	Peak
7206.00	25.19	9.08	34.27	54.00	-19.73	Average
17808.00	34.58	25.52	60.10	74.00	-13.90	Peak
17808.00	24.19	25.52	49.71	54.00	-4.29	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 84 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2440 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

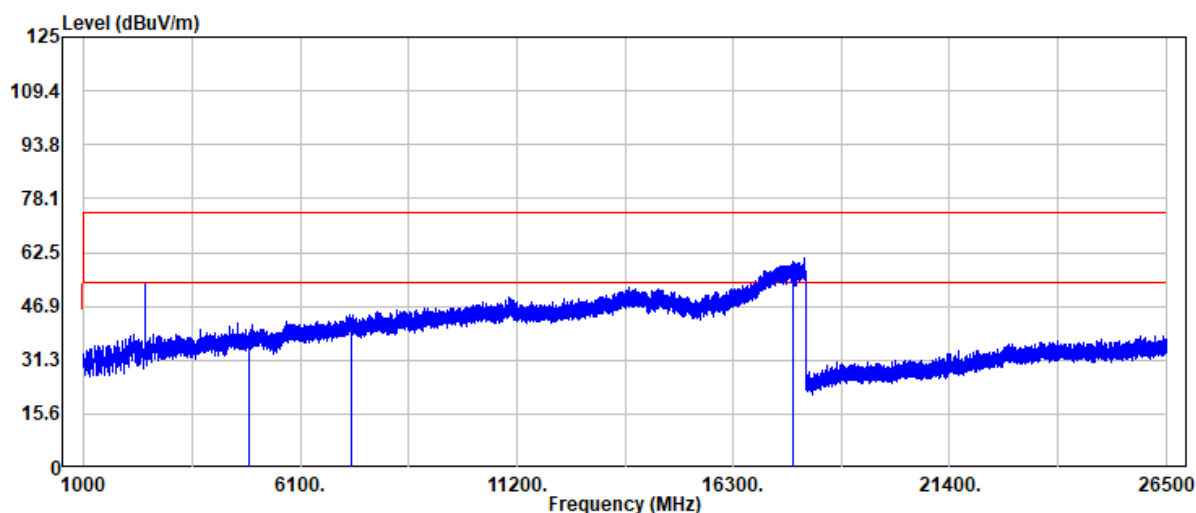


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4880.00	36.62	2.55	39.17	74.00	-34.83	Peak
4880.00	26.58	2.55	29.13	54.00	-24.87	Average
7320.00	34.09	9.14	43.23	74.00	-30.77	Peak
7320.00	25.57	9.14	34.71	54.00	-19.29	Average
17703.00	33.86	25.89	59.75	74.00	-14.25	Peak
17703.00	24.17	25.89	50.06	54.00	-3.94	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 85 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2440 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

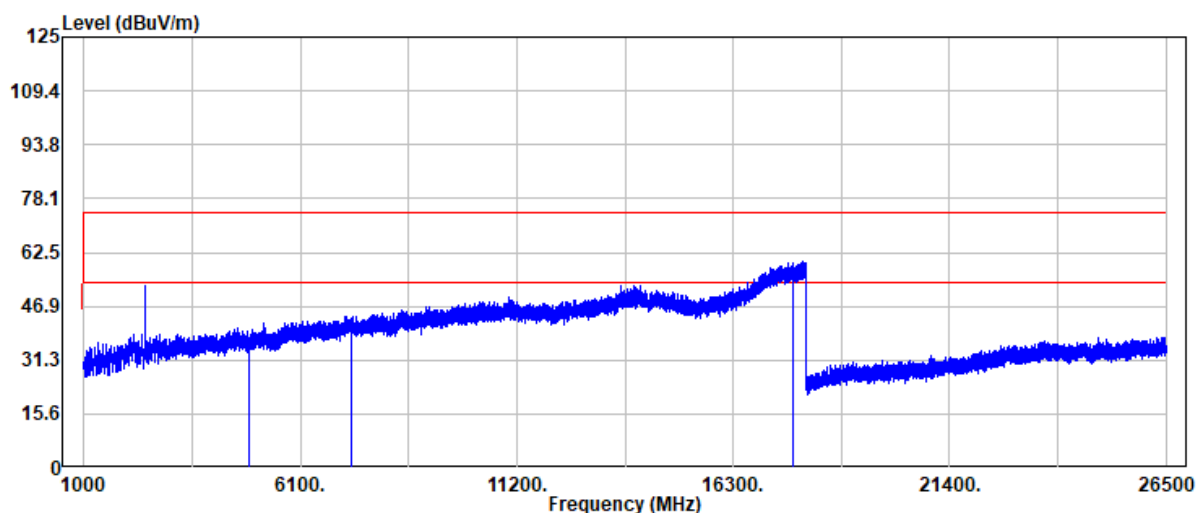


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4880.00	34.93	2.55	37.48	74.00	-36.52	Peak
4880.00	26.51	2.55	29.06	54.00	-24.94	Average
7320.00	34.64	9.14	43.78	74.00	-30.22	Peak
7320.00	25.04	9.14	34.18	54.00	-19.82	Average
17695.00	33.73	25.91	59.64	74.00	-14.36	Peak
17695.00	24.04	25.91	49.95	54.00	-4.05	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 86 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

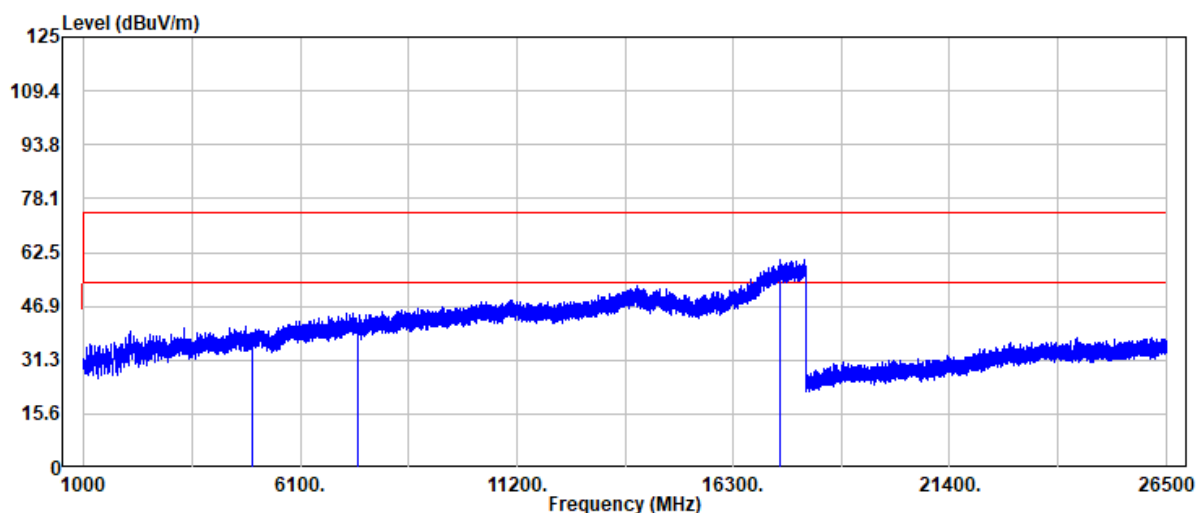


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	35.70	3.40	39.10	74.00	-34.90	Peak
4960.00	26.37	3.40	29.77	54.00	-24.23	Average
7440.00	33.21	9.07	42.28	74.00	-31.72	Peak
7440.00	25.17	9.07	34.24	54.00	-19.76	Average
17393.00	34.99	25.21	60.20	74.00	-13.80	Peak
17393.00	24.00	25.21	49.21	54.00	-4.79	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 87 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_1M
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

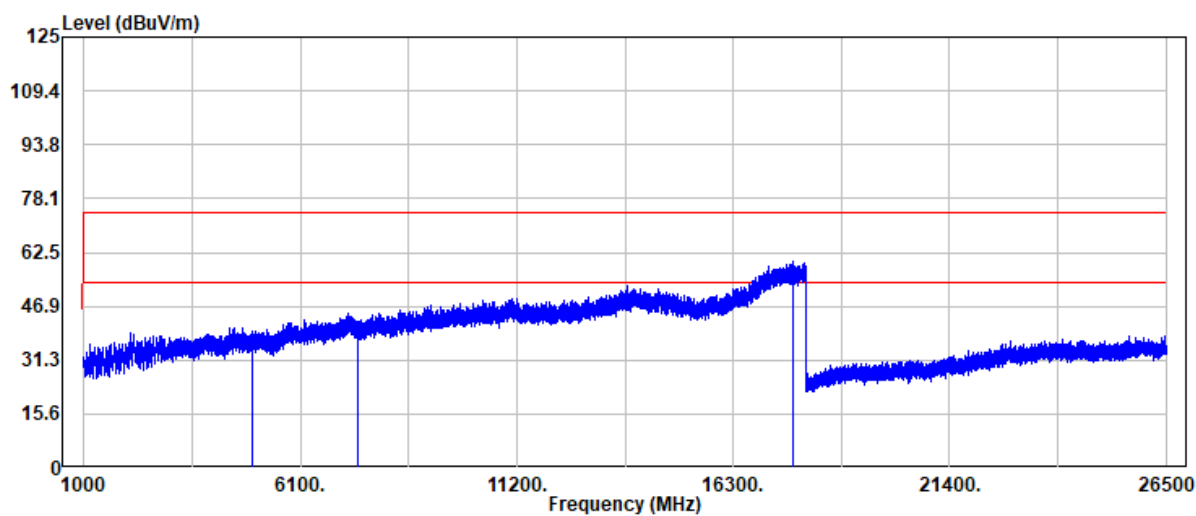


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	36.34	3.40	39.74	74.00	-34.26	Peak
4960.00	26.81	3.40	30.21	54.00	-23.79	Average
7440.00	33.53	9.07	42.60	74.00	-31.40	Peak
7440.00	25.15	9.07	34.22	54.00	-19.78	Average
17709.00	34.41	25.73	60.14	74.00	-13.86	Peak
17709.00	24.27	25.73	50.00	54.00	-4.00	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 88 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

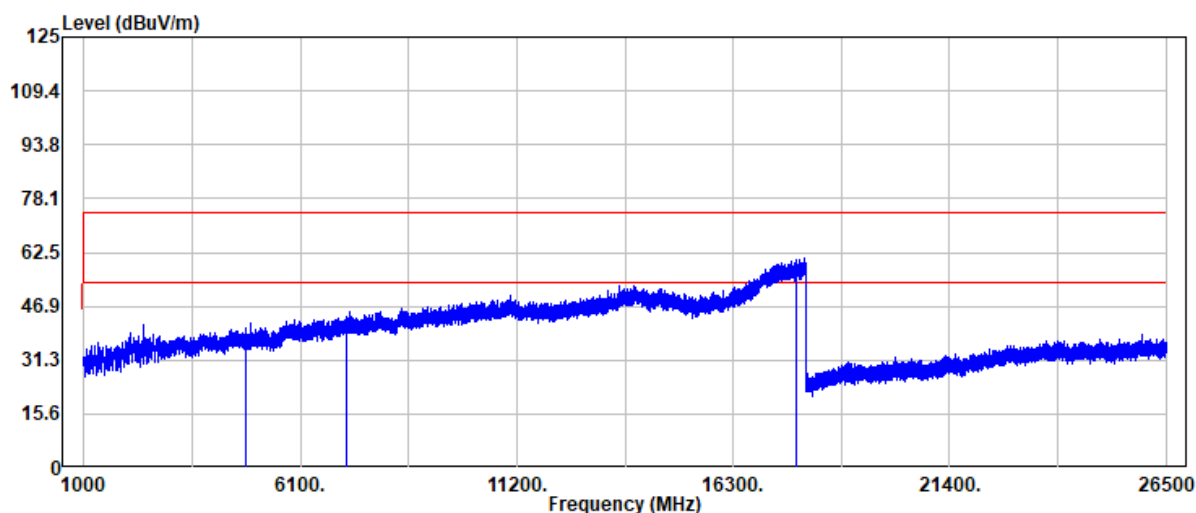


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	35.88	2.34	38.22	74.00	-35.78	Peak
4804.00	26.19	2.34	28.53	54.00	-25.47	Average
7206.00	34.13	9.08	43.21	74.00	-30.79	Peak
7206.00	25.47	9.08	34.55	54.00	-19.45	Average
17797.00	34.98	25.50	60.48	74.00	-13.52	Peak
17797.00	24.07	25.50	49.57	54.00	-4.43	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 89 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

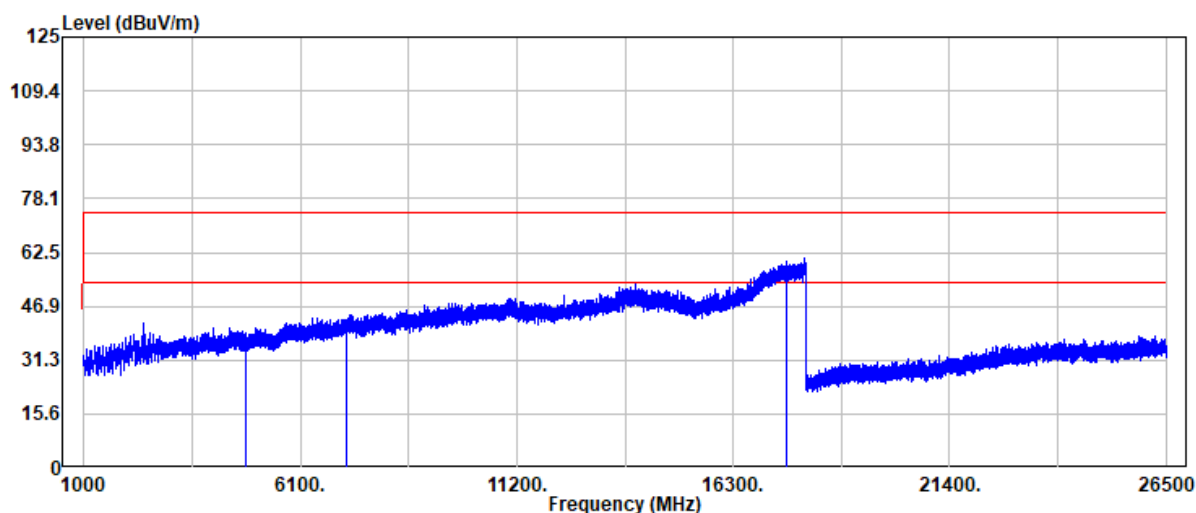


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	36.75	2.34	39.09	74.00	-34.91	Peak
4804.00	26.79	2.34	29.13	54.00	-24.87	Average
7206.00	34.37	9.08	43.45	74.00	-30.55	Peak
7206.00	25.27	9.08	34.35	54.00	-19.65	Average
17546.00	34.66	25.17	59.83	74.00	-14.17	Peak
17546.00	24.06	25.17	49.23	54.00	-4.77	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 90 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2440 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

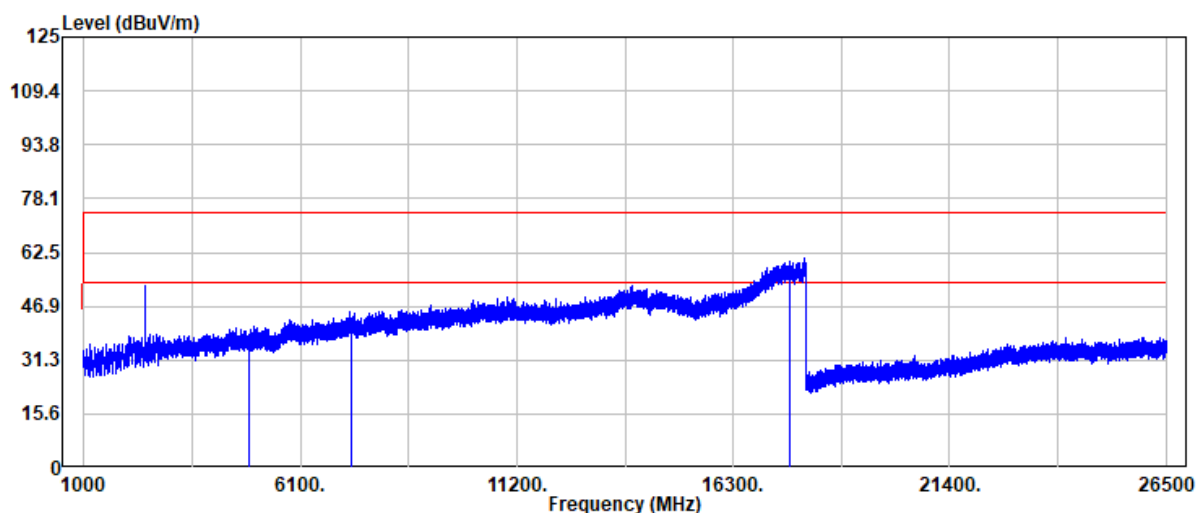


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4880.00	35.97	2.55	38.52	74.00	-35.48	Peak
4880.00	26.65	2.55	29.20	54.00	-24.80	Average
7320.00	34.03	9.14	43.17	74.00	-30.83	Peak
7320.00	25.57	9.14	34.71	54.00	-19.29	Average
17624.00	34.59	25.36	59.95	74.00	-14.05	Peak
17624.00	24.12	25.36	49.48	54.00	-4.52	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 91 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2440 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

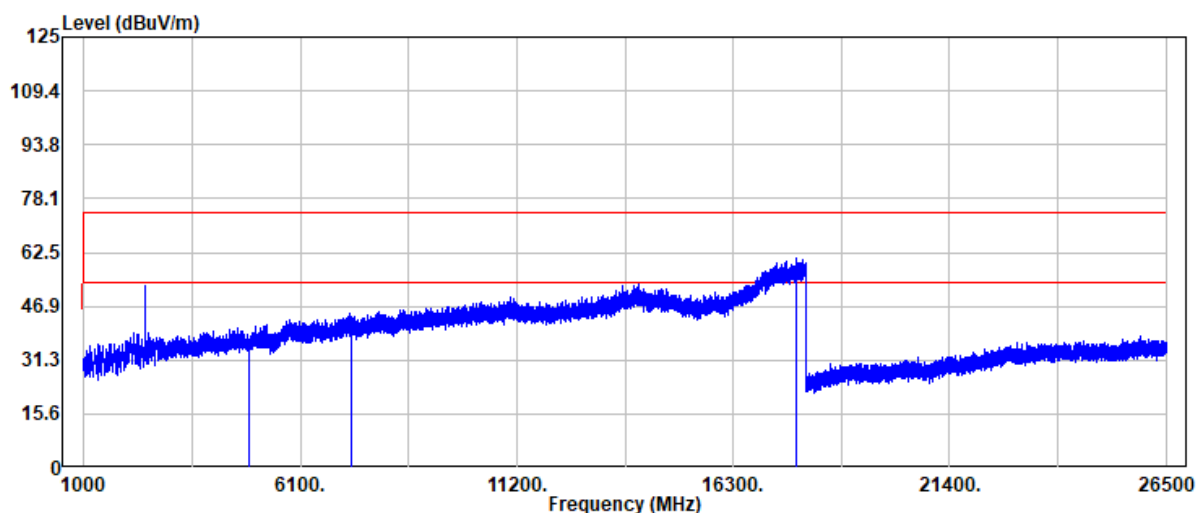


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4880.00	34.71	2.55	37.26	74.00	-36.74	Peak
4880.00	26.19	2.55	28.74	54.00	-25.26	Average
7320.00	34.14	9.14	43.28	74.00	-30.72	Peak
7320.00	25.00	9.14	34.14	54.00	-19.86	Average
17802.00	35.39	25.55	60.94	74.00	-13.06	Peak
17802.00	24.00	25.55	49.55	54.00	-4.45	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 92 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

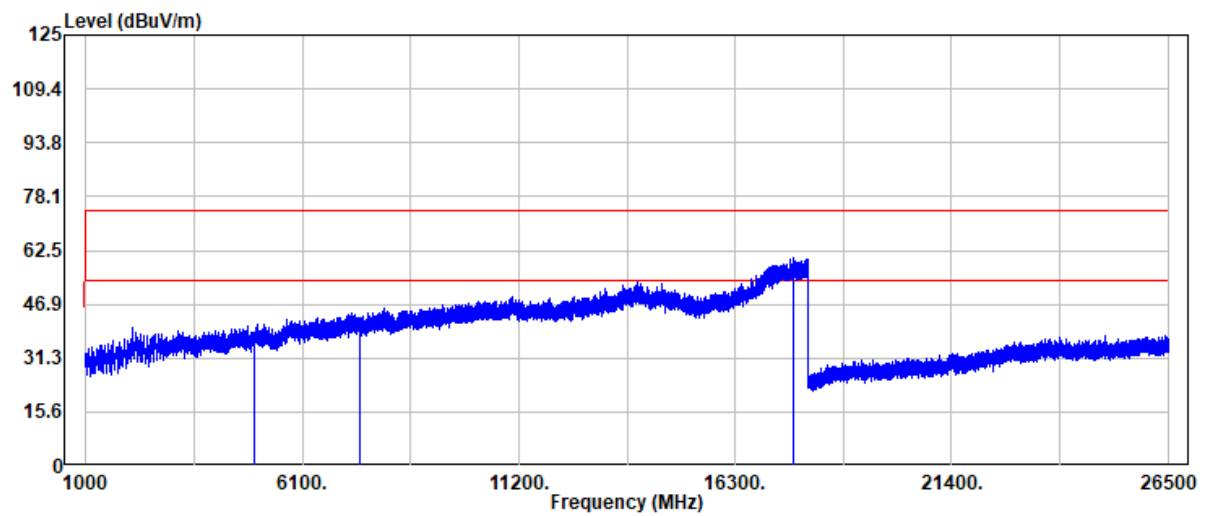


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	35.22	3.40	38.62	74.00	-35.38	Peak
4960.00	26.69	3.40	30.09	54.00	-23.91	Average
7440.00	33.88	9.07	42.95	74.00	-31.05	Peak
7440.00	25.22	9.07	34.29	54.00	-19.71	Average
17687.00	34.53	25.79	60.32	74.00	-13.68	Peak
17687.00	24.11	25.79	49.90	54.00	-4.10	Average

Project No: TM-2606000409P
Report No.: TMWK2606002985KR

Page: 93 / 93
Rev.: 02

Project No : TM-2606000409P
Operation Band : BLE_2M
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : Default

Test Date : 2026-07-16
Temp./Humi. : 25.3/53
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

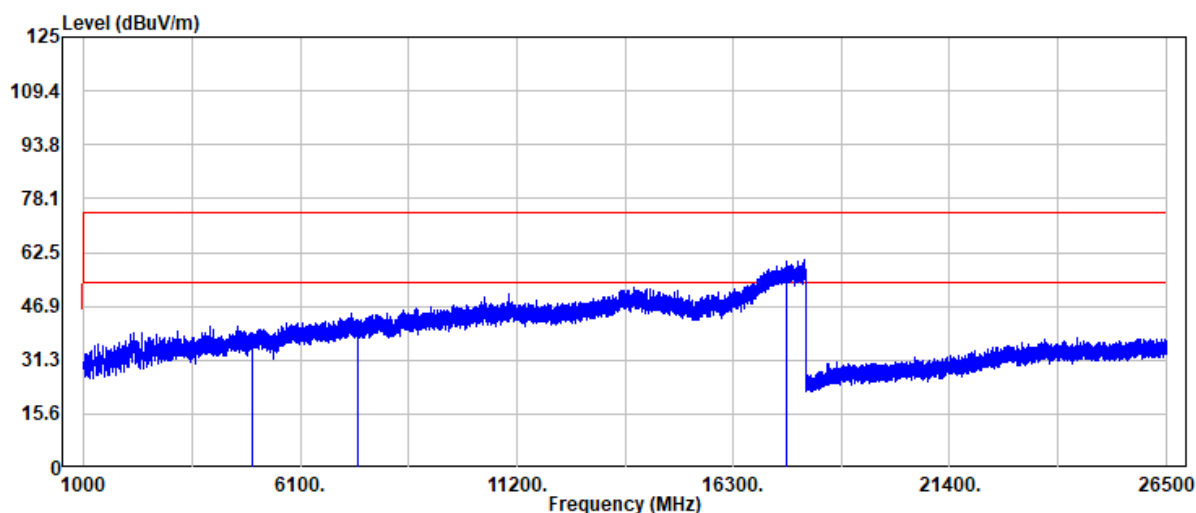

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	35.74	3.40	39.14	74.00	-34.86	Peak
4960.00	26.74	3.40	30.14	54.00	-23.86	Average
7440.00	34.01	9.07	43.08	74.00	-30.92	Peak
7440.00	25.49	9.07	34.56	54.00	-19.44	Average
17557.00	34.53	25.21	59.74	74.00	-14.26	Peak
17557.00	24.01	25.21	49.22	54.00	-4.78	Average

- End of Test Report -