FCC Radio Test Report

FCC ID: 2AXCA-K330W

This report concerns: Original Grant

Project No.	:	2108C043
Equipment	:	K330w Wireless Mechanical Keyboard
Brand Name	:	DURGOD
Test Model	:	K330w
Series Model	:	N/A
Applicant	:	Zhuhai Hoksi Technology CO.,LTD
Address	:	Room803, No.3 BLDG, No.6, Pingbei 1 Rd., Nanping Technology & Industry Park, Xiangzhou St., ZhuHai, China
Manufacturer	:	Zhuhai Hoksi Technology CO.,LTD
Address	:	Room803, No.3 BLDG, No.6, Pingbei 1 Rd., Nanping Technology & Industry Park, Xiangzhou St., ZhuHai, China
Factory	:	Zhuhai Hengcang Electronic Technology Co.,Ltd
Address	:	3rd floor, A building, No. 7 of 3rd pingxi Road, Nanping Technical industry park, Zhuhai, China
Date of Receipt	:	Aug. 06, 2021
Date of Test	:	Aug. 09, 2021 ~ Aug. 31, 2021
Issued Date	:	Sep. 27, 2021
Report Version	:	R00
Test Sample	:	Engineering Sample No.: DG202108092
Standard(s)	:	FCC CFR Title 47, Part 15, Subpart C FCC KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Vincent. Tan

Prepared by : Vincent Tan

Ethan Ma

Approved by : Ethan Ma

TESTING CERT #5123.02

Add: No. 3 Jinshagang 1st Rd. Shixia, Dalang Town, Dongguan City, Guangdong, People's Republic of China

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.
Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents Page

REPORT ISSUED HISTORY 6

1 . SUMMARY OF TEST RESULTS 7

1.1 TEST FACILITY 8

1.2 MEASUREMENT UNCERTAINTY 8

1.3 TEST ENVIRONMENT CONDITIONS 8

2 . GENERAL INFORMATION 9

2.1 GENERAL DESCRIPTION OF EUT 9

2.2 DESCRIPTION OF TEST MODES 11

2.3 PARAMETERS OF TEST SOFTWARE 11

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 12

2.5 SUPPORT UNITS 12

3 . AC POWER LINE CONDUCTED EMISSIONS 13

3.1 LIMIT 13

3.2 TEST PROCEDURE 13

3.3 DEVIATION FROM TEST STANDARD 13

3.4 TEST SETUP 14

3.5 EUT OPERATING CONDITIONS 14

3.6 TEST RESULTS 14

4 . RADIATED EMISSIONS 15

4.1 LIMIT 15

4.2 TEST PROCEDURE 16

4.3 DEVIATION FROM TEST STANDARD 17

4.4 TEST SETUP 17

4.5 EUT OPERATING CONDITIONS 18

4.6 TEST RESULT - 9 KHZ TO 30 MHZ 18

4.7 TEST RESULT - 30 MHZ TO 1000 MHZ 18

4.8 TEST RESULT - ABOVE 1000 MHZ 18

5 . BANDWIDTH 19

5.1 LIMIT 19

5.2 TEST PROCEDURE 19

5.3 DEVIATION FROM STANDARD 19

5.4 TEST SETUP 19

Table of Contents Page

5.5 EUT OPERATION CONDITIONS 19
5.6 TEST RESULTS 19
6 . MAXIMUM OUTPUT POWER 20
6.1 LIMIT 20
6.2 TEST PROCEDURE 20
6.3 DEVIATION FROM STANDARD 20
6.4 TEST SETUP 20
6.5 EUT OPERATION CONDITIONS 20
6.6 TEST RESULTS 20
7 . CONDUCTED SPURIOUS EMISSION 21
7.1 LIMIT 21
7.2 TEST PROCEDURE 21
7.3 DEVIATION FROM STANDARD 21
7.4 TEST SETUP 21
7.5 EUT OPERATION CONDITIONS 21
7.6 TEST RESULTS 21
8 . POWER SPECTRAL DENSITY 22
8.1 LIMIT 22
8.2 TEST PROCEDURE 22
8.3 DEVIATION FROM STANDARD 22
8.4 TEST SETUP 22
8.5 EUT OPERATION CONDITIONS 22
8.6 TEST RESULTS 22
9 . MEASUREMENT INSTRUMENTS LIST 23
10 . EUT TEST PHOTO 25
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS 29
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ 32
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ 37
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ 40
APPENDIX E - BANDWIDTH 53
APPENDIX F - MAXIMUM OUTPUT POWER 55

Table of Contents Page

APPENDIX G - CONDUCTED SPURIOUS EMISSION **57**

APPENDIX H - POWER SPECTRAL DENSITY **59**

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Sep. 27, 2021

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	**Test Item**	**Test Result**	**Judgment**	**Remark**
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	------
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	------
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	------
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	------
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	------
15.247(e)	Power Spectral Density	APPENDIX H	PASS	------
15.203	Antenna Requirement	------	PASS	Note(2)

Note:

(1) “N/A” denotes test is not applicable to this device.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 3 Jinshagang 1st Rd. Shixia, Dalang Town, Dongguan City, Guangdong, People's Republic of China.
BTL's Test Firm Registration Number for FCC: 357015
BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))
The BTL measurement uncertainty as below table:

A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.68

B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	-	3.02
		30MHz ~ 200MHz	V	4.36
		30MHz ~ 200MHz	H	3.32
		200MHz ~ 1,000MHz	V	4.08
		200MHz ~ 1,000MHz	H	3.96
		1GHz ~ 6GHz	-	3.80
		6GHz ~ 18GHz	-	4.82
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	±3.8 %
Maximum Output Power	±0.95 dB
Conducted Spurious Emission	±2.71 dB
Power Spectral Density	±0.86 dB
Temperature	±0.08 °C
Humidity	±1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	AC 120V/60Hz	Laughing Zhang
Radiated Emissions-9 kHz to 30 MHz	25°C	60%	DC 5V	Hayden Chen
Radiated Emissions-30 MHz to 1000 MHz	26°C	52%	DC 5V	Hayden Chen
Radiated Emissions-Above 1000 MHz	26°C	52%	DC 5V	Berton Luo
Bandwidth	24°C	52%	DC 5V	Hayden Chen
Maximum Output Power	24°C	52%	DC 5V	Laughing Zhang
Conducted Spurious Emission	24°C	52%	DC 5V	Hayden Chen
Power Spectral Density	24°C	52%	DC 5V	Hayden Chen

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	K330w Wireless Mechanical Keyboard
Brand Name	DURGOD
Test Model	K330w
Series Model	N/A
Model Difference(s)	N/A
Power Source	1# Supplied from PC USB port. 2# Supplied from battery. Model: 5830132-3600mAh-1S1P
Power Rating	1# DC 5V 2# DC 3.8V, 3600mAh, 13.68Wh
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	2Mbps
Max. Output Power	2Mbps: -3.89 dBm (0.0004 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3. Table for Filed Antenna:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	PSA	RFPCA430816IMAB301	PCB	IPEX	3.12

Note: The antenna gain is provided by the manufacturer.

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_2Mbps Channel 00/38/78
Mode 2	TX Mode_2Mbps Channel 00

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 2	TX Mode_2Mbps Channel 00

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 2	TX Mode_2Mbps Channel 00

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_2Mbps Channel 00/38/78

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_2Mbps Channel 00/38/78

Note:

(1) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.

(2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the 2Mbps Channel 00 is found to be the worst case and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	IPOP 1.0		
Frequency (MHz)	2402	2440	2480
2Mbps	20	20	20

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

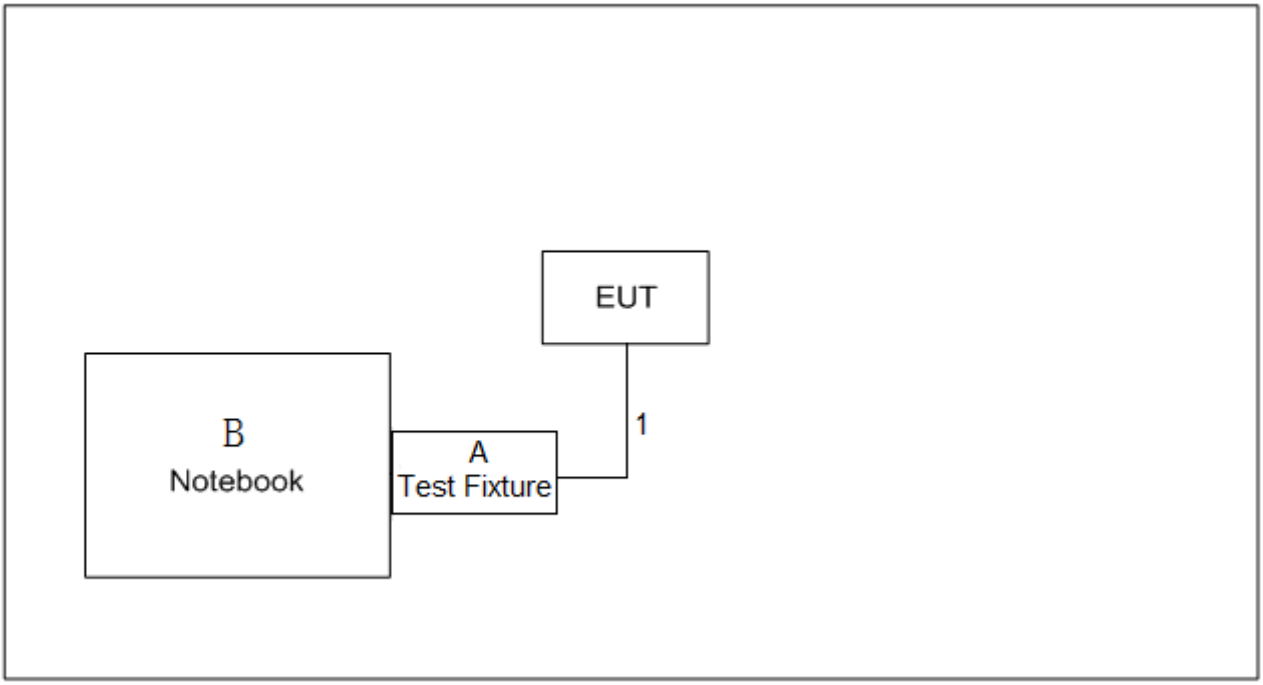

2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Test Fixture	N/A	N/A	N/A
B	Notebook	Lenovo	E40-70	MP075DW6

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Data Cable	NO	NO	0.2m

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

(1) The tighter limit applies at the band edges.
(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

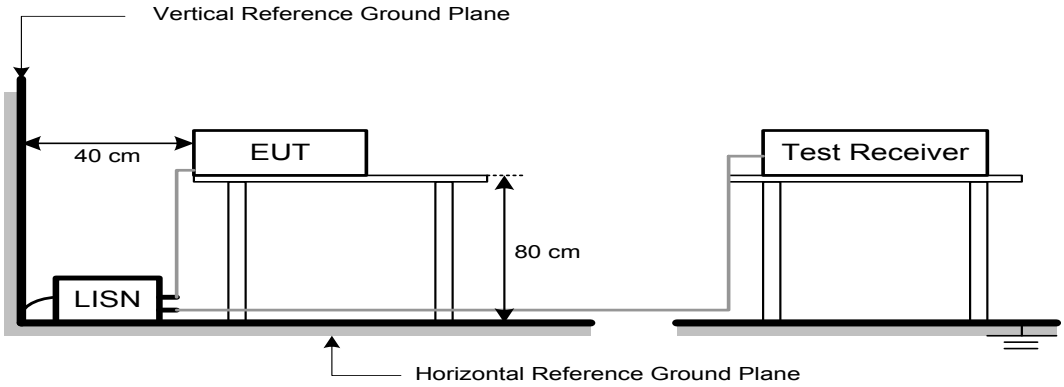

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

(1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.

(2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) , then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

(1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

9 kHz to 30 MHz

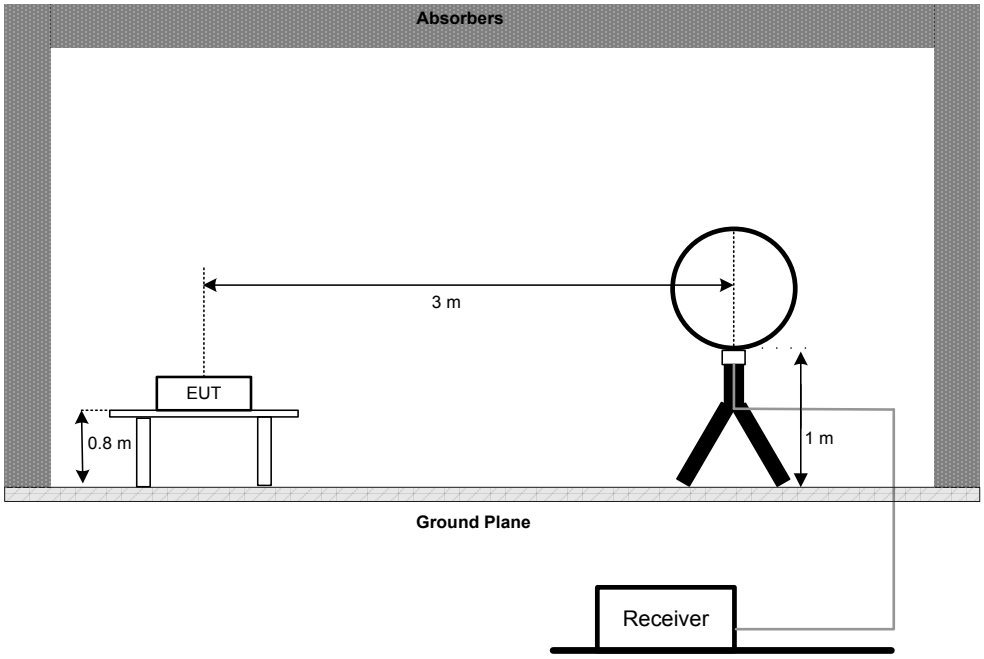

30 MHz to 1 GHz

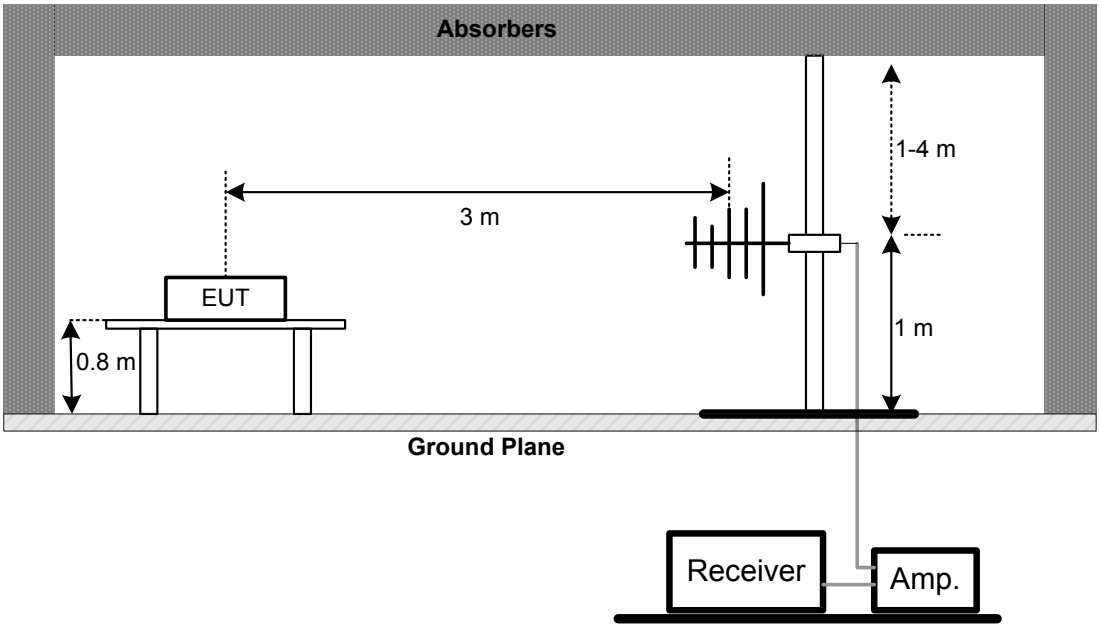

Above 1 GHz

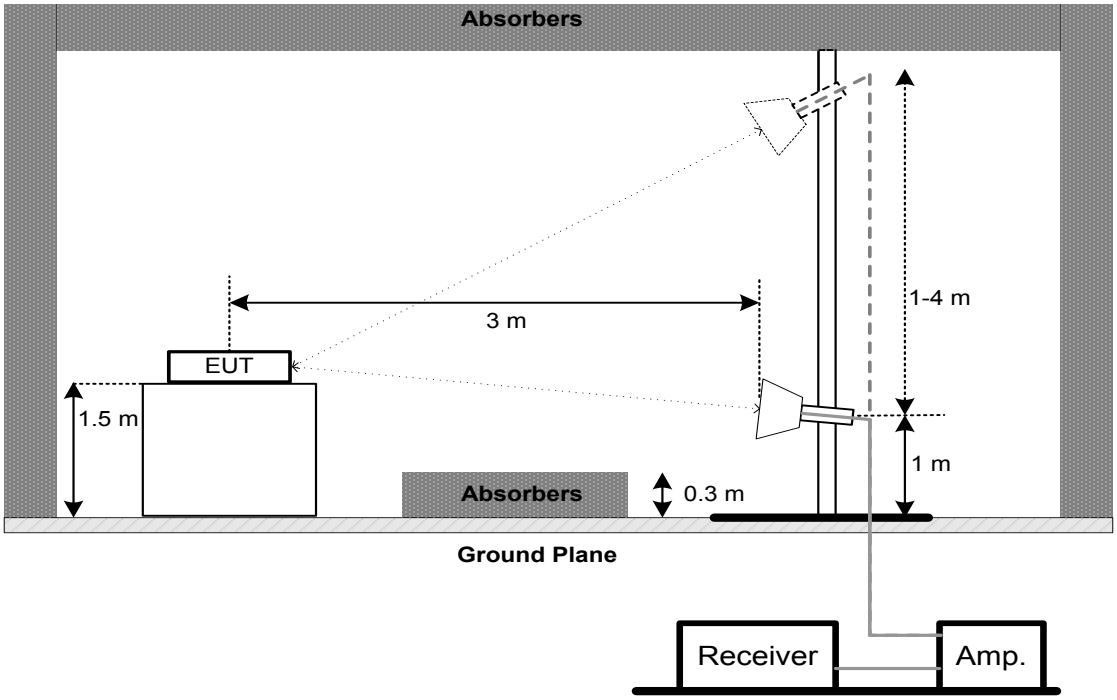

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

(1) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
(2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	>= 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

6.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	⩾ 3×RBW
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSION

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	2 MHz (1 Mbps) / 4 MHz (2 Mbps)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2022
2	LISN	EMCO	3816/2	52765	Feb. 27, 2022
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 27, 2022
4	50Ω Terminator	SHX	TF5-3	15041305	Feb. 27, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 09, 2022
7	643 Shield Room	ETS	6*4*3m	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Apr. 28, 2022
2	Cable	N/A	RG 213/U	N/A	May 27, 2022
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 27, 2022
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chambe Room	RM	9*6*6m	N/A	Jul. 24, 2022

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 15, 2022
2	Amplifier	HP	8447D	2944A08742	Feb. 28, 2022
3	Receiver	Agilent	N9038A	MY52130039	Mar. 19, 2022
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 20, 2022
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 24, 2022

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 10, 2022
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2022
3	Amplifier	Agilent	8449B	3008A02584	Jul. 10, 2022
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Feb. 28, 2022
5	Receiver	Agilent	N9038A	MY52130039	Mar. 19, 2022
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6 000	N/A	Oct. 16, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Filter	STI	STI15-9912	N/A	Jul. 10, 2022
11	966 Chambe Room	RM	9*6*6m	N/A	Jul. 24, 2022

Bandwidth & Maximum Output Power & Power Spectral Density & Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Jul. 10, 2022
2	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
3	RF Cable	Tongkaichuan	N/A	N/A	N/A
4	DC Block	Mini	N/A	N/A	N/A

Remark: “N/A” denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

10. EUT TEST PHOTO

AC Power Line Conducted Emissions Test Photos

Radiated Emissions Test Photos

9 kHz to 30 MHz

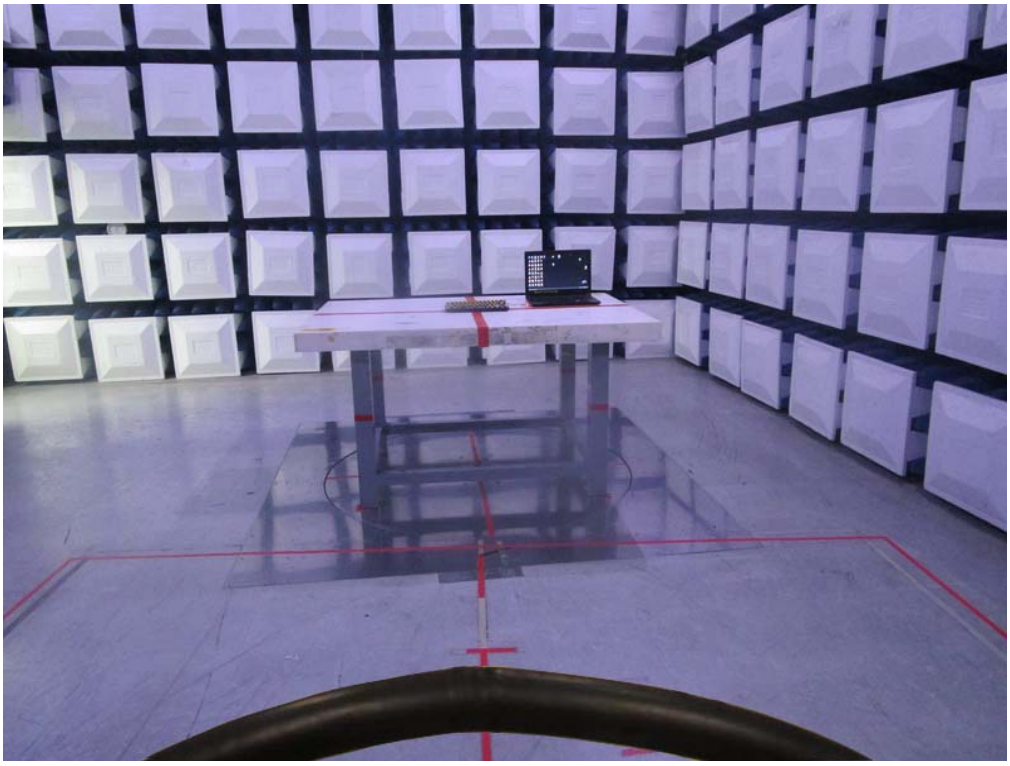

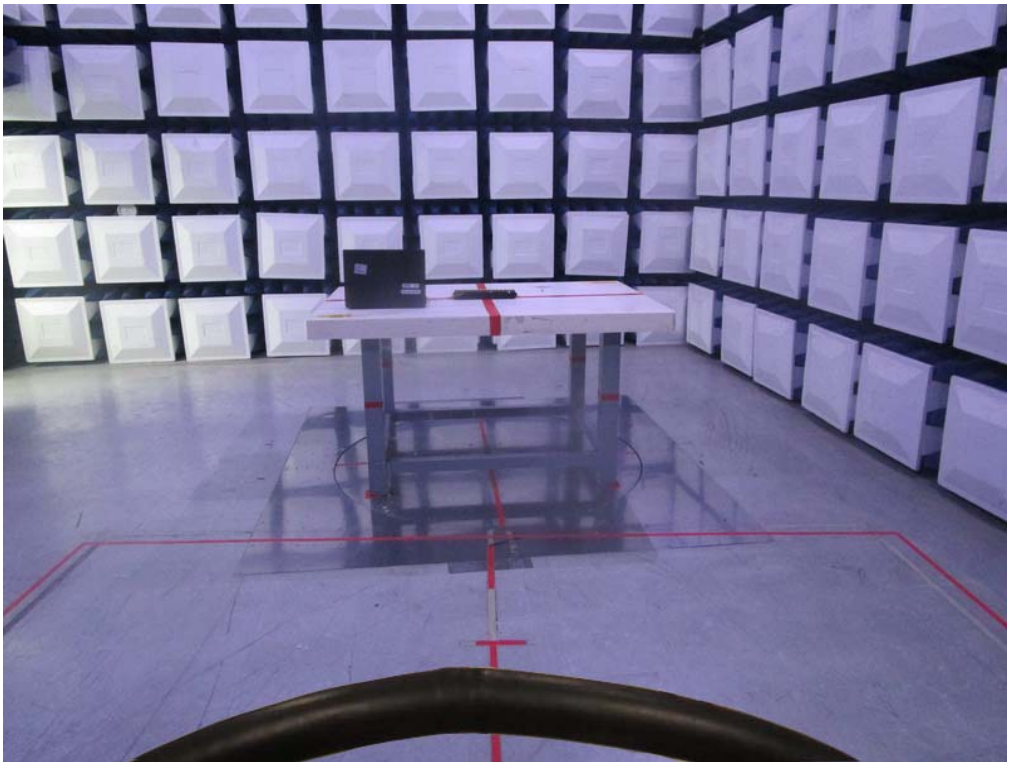

Radiated Emissions Test Photos

30 MHz to 1000 MHz

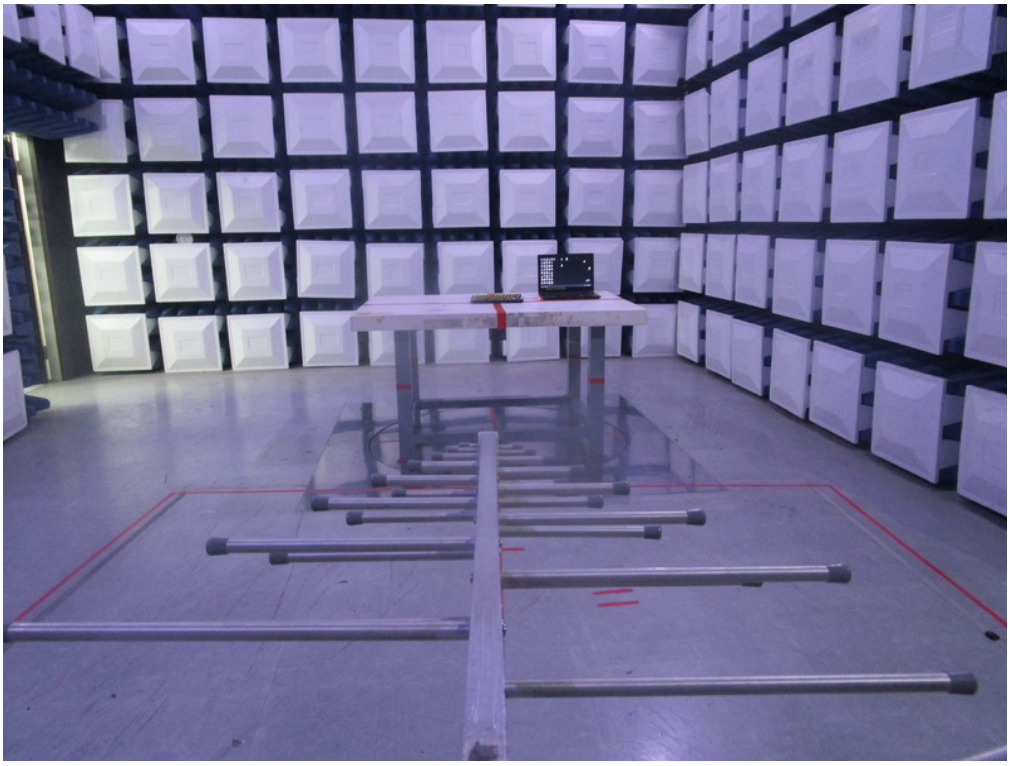

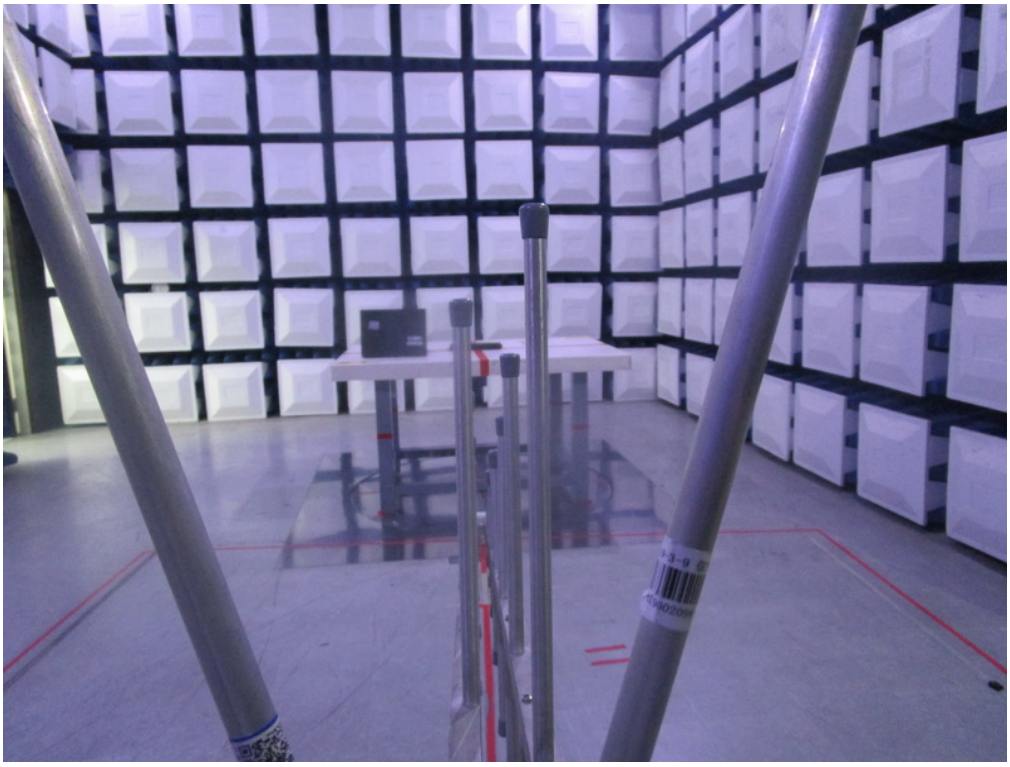

Radiated Emissions Test Photos

Above 1 GHz

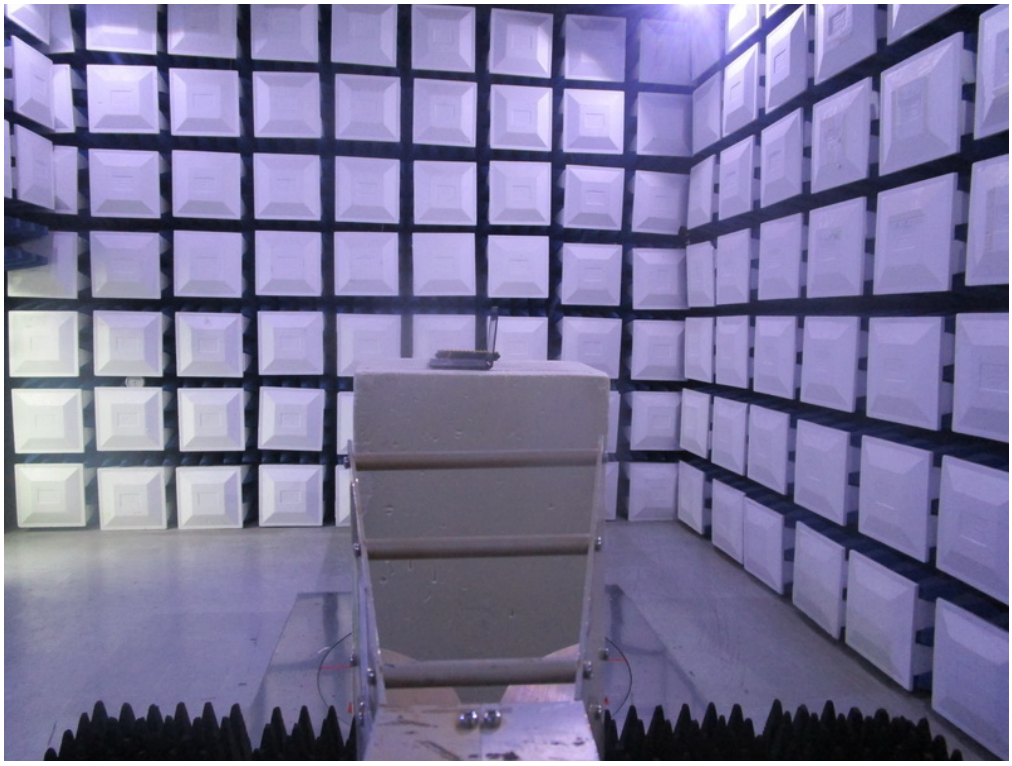

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode_2Mbps Channel00	Phase	Line

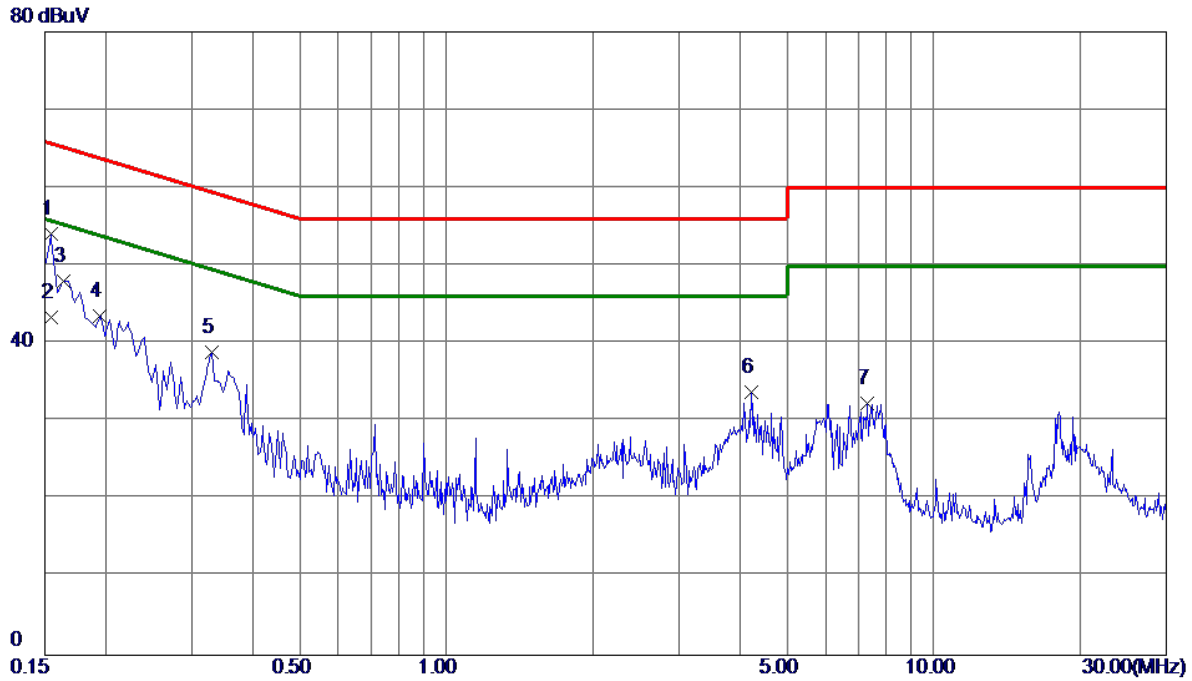

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1545	44.39	9.70	54.09	65.75	-11.66	Peak	
2	0.1545	33.60	9.70	43.30	55.75	-12.45	AVG	
3	0.1635	38.28	9.77	48.05	65.28	-17.23	Peak	
4	0.1949	33.64	9.89	43.53	63.83	-20.30	Peak	
5	0.3300	29.04	9.89	38.93	59.45	-20.52	Peak	
6	4.2360	23.49	10.22	33.71	56.00	-22.29	Peak	
7	7.3185	21.82	10.45	32.27	60.00	-27.73	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel00	Phase	Neutral

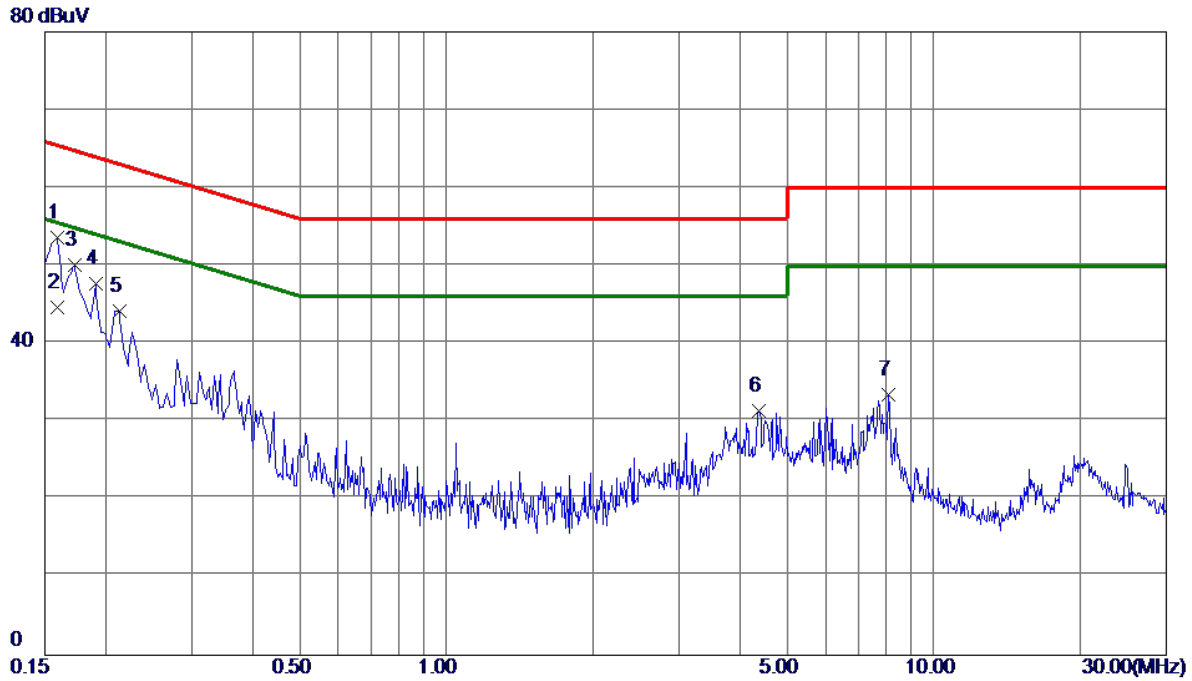

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1590	43.71	9.81	53.52	65.52	-12.00	Peak	
2 *	0.1590	34.80	9.81	44.61	55.52	-10.91	AVG	
3	0.1725	40.22	9.91	50.13	64.84	-14.71	Peak	
4	0.1905	37.64	9.97	47.61	64.01	-16.40	Peak	
5	0.2130	34.13	10.00	44.13	63.09	-18.96	Peak	
6	4.3710	20.83	10.57	31.40	56.00	-24.60	Peak	
7	8.0700	22.63	10.86	33.49	60.00	-26.51	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode_2Mbps Channel00	Polarization	Ant 0°

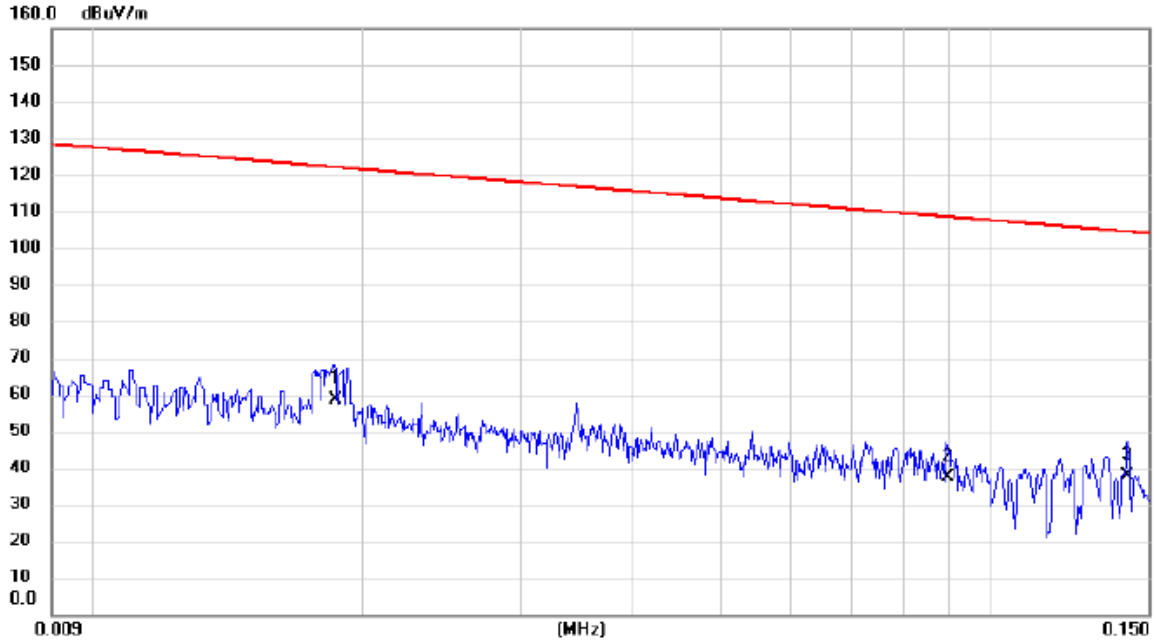

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	0.0187	43.62	14.82	58.44	122.17	-63.73	AVG			
2		0.0894	23.59	13.77	37.36	108.58	-71.22	AVG			
3		0.1422	23.84	13.78	37.62	104.55	-66.93	AVG			

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel00	Polarization	Ant 0°

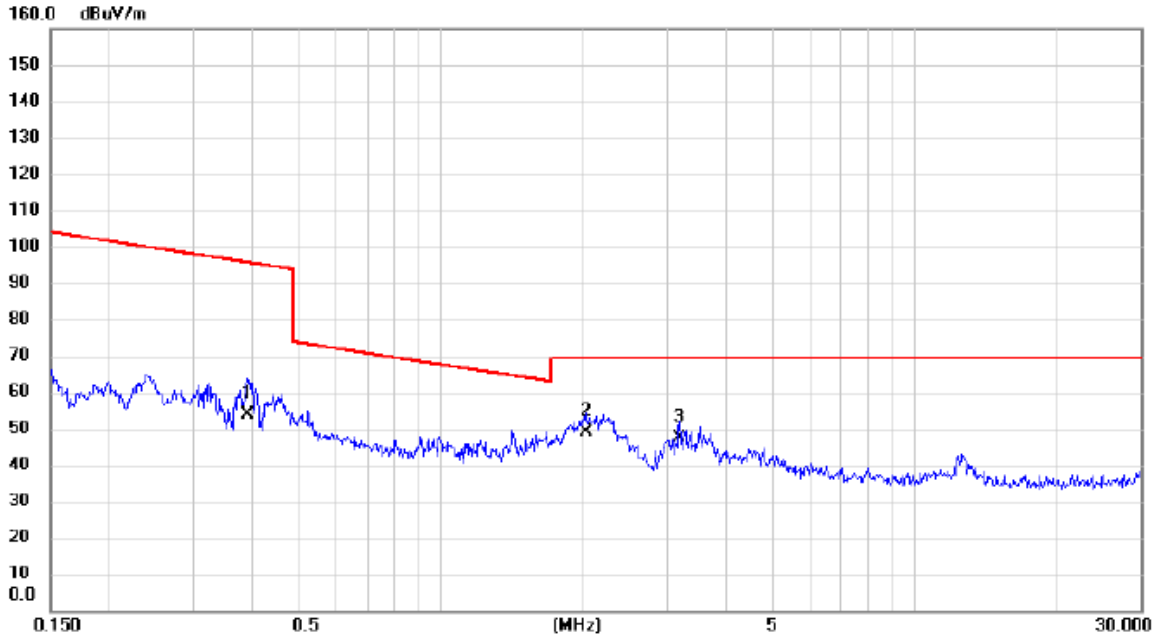

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		0.3914	40.35	13.64	53.99	95.75	-41.76	AVG			
2	*	2.0225	36.58	12.23	48.81	69.54	-20.73	QP			
3		3.1900	35.43	11.97	47.40	69.54	-22.14	QP			

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel00	Polarization	Ant 90°

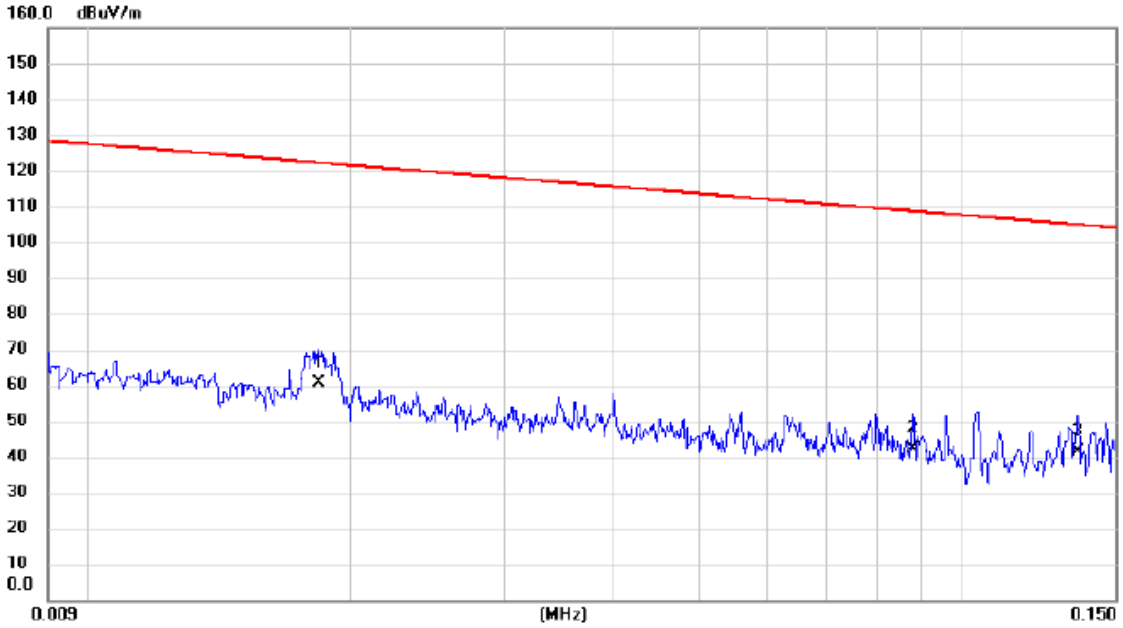

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	0.0184	45.64	14.91	60.55	122.31	-61.76	AVG			
2		0.0880	28.59	13.77	42.36	108.72	-66.36	AVG			
3		0.1358	27.48	13.77	41.25	104.95	-63.70	AVG			

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel00	Polarization	Ant 90°

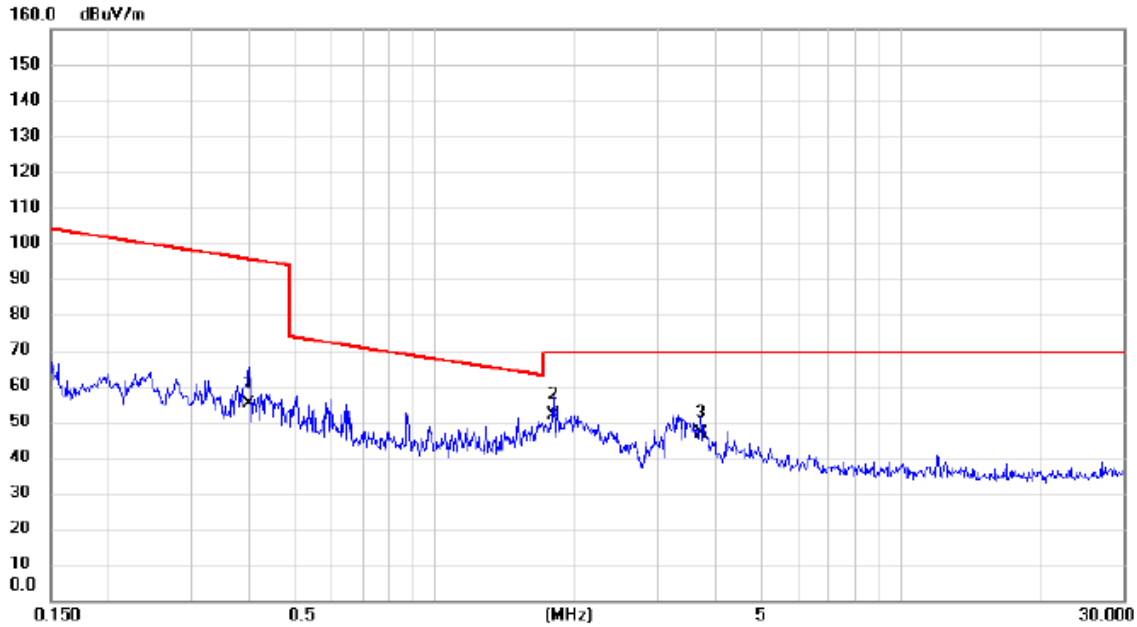

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		0.3997	41.35	13.63	54.98	95.57	-40.59	AVG			
2	*	1.8000	39.28	12.39	51.67	69.54	-17.87	QP			
3		3.7198	34.59	12.01	46.60	69.54	-22.94	QP			

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode_2Mbps Channel00	Polarization	Vertical

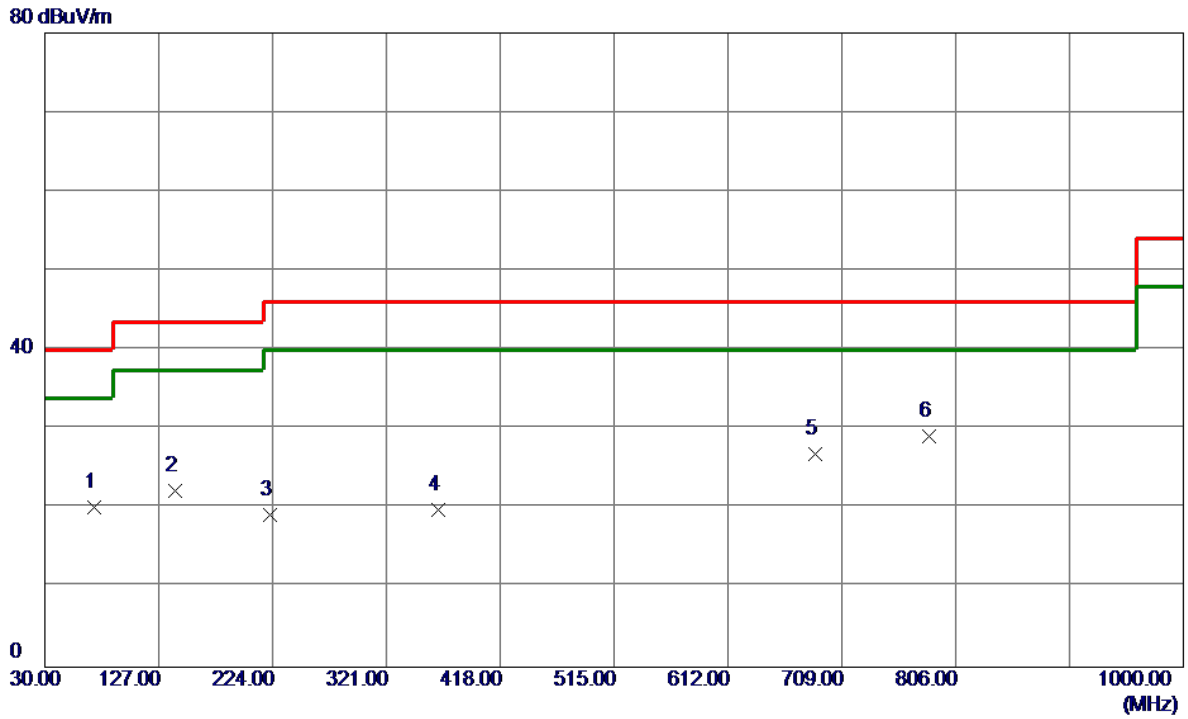

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	71.7100	36.73	-16.59	20.14	40.00	-19.86	Peak	
2	140.5800	35.17	-12.87	22.30	43.50	-21.20	Peak	
3	222.0600	33.86	-14.63	19.23	46.00	-26.77	Peak	
4	365.6200	29.45	-9.59	19.86	46.00	-26.14	Peak	
5	686.6900	30.14	-3.25	26.89	46.00	-19.11	Peak	
6 *	783.6900	30.21	-1.09	29.12	46.00	-16.88	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel00	Polarization	Horizontal

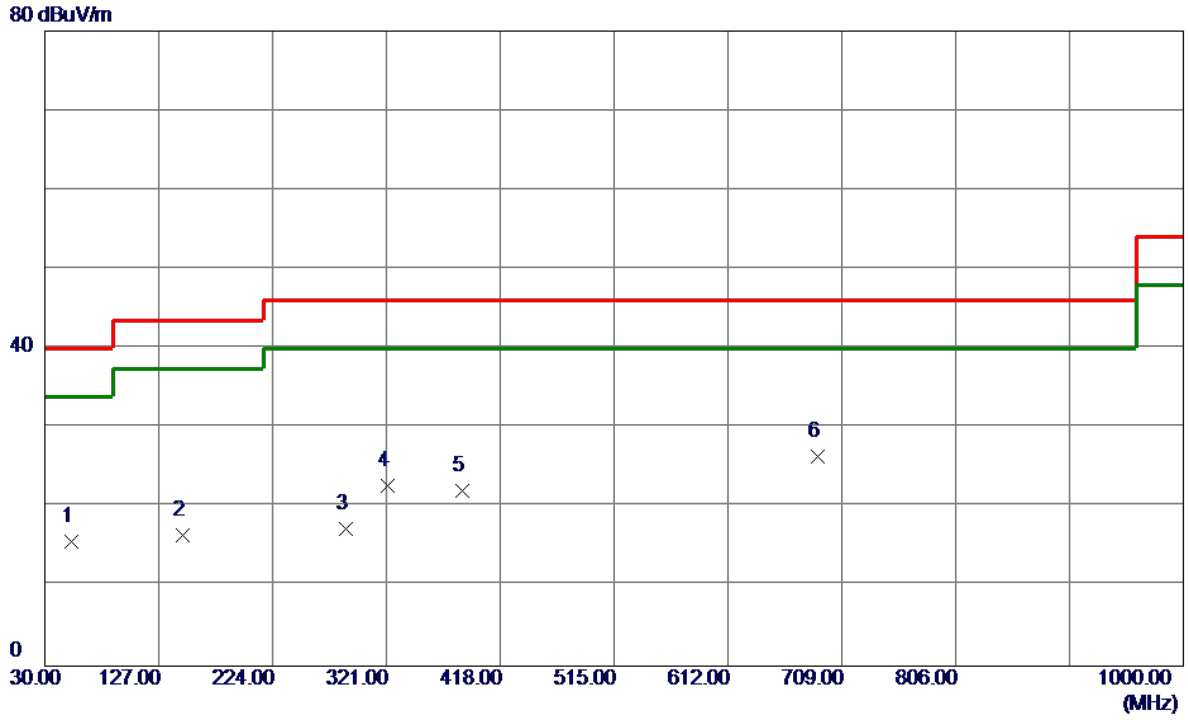

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	52.3100	29.59	-13.86	15.73	40.00	-24.27	Peak	
2	147.3700	29.23	-12.69	16.54	43.50	-26.96	Peak	
3	286.0799	28.57	-11.36	17.21	46.00	-28.79	Peak	
4	321.9700	33.27	-10.48	22.79	46.00	-23.21	Peak	
5	385.9900	31.19	-9.11	22.08	46.00	-23.92	Peak	
6 *	688.6300	29.67	-3.22	26.45	46.00	-19.55	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical

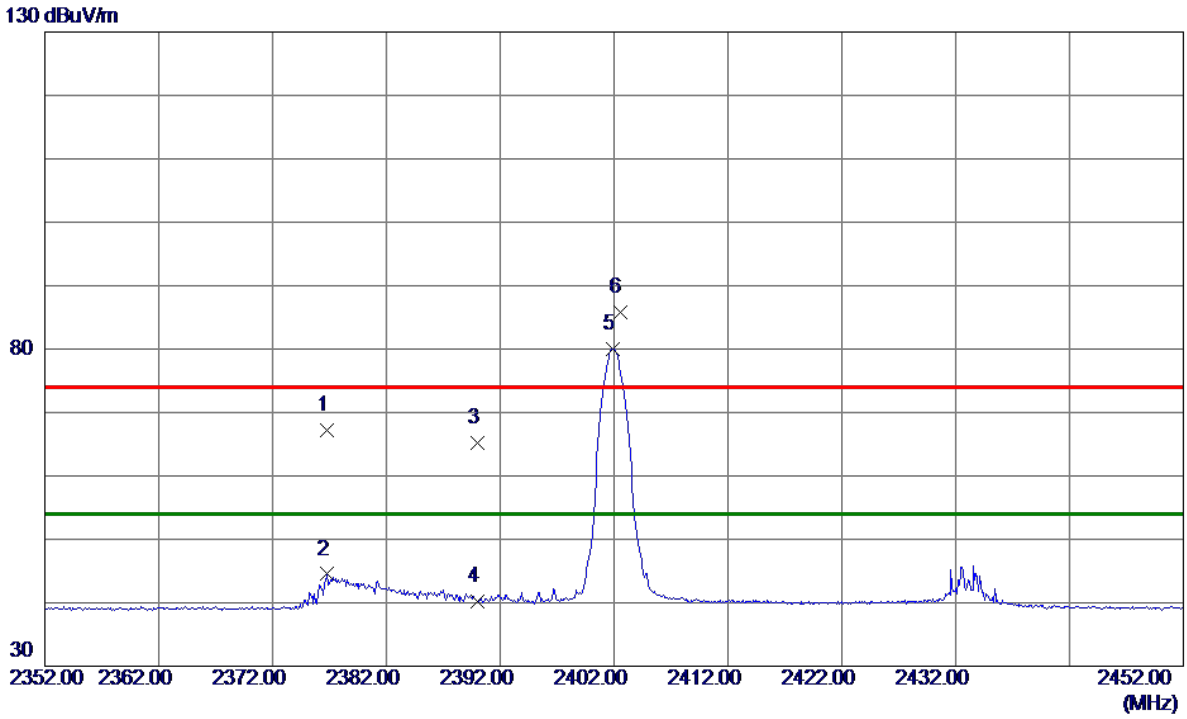

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2376.8000	58.99	8.29	67.28	74.00	-6.72	Peak	
2	2376.8000	36.21	8.29	44.50	54.00	-9.50	AVG	
3	2390.0000	56.81	8.31	65.12	74.00	-8.88	Peak	
4	2390.0000	31.96	8.31	40.27	54.00	-13.73	AVG	
5 *	2401.9000	71.75	8.32	80.07	54.00	26.07	AVG	No Limit
6	2402.5000	77.49	8.32	85.81	74.00	11.81	Peak	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4803.7930	39.95	5.13	45.08	74.00	-28.92	Peak	
2 *	4804.1930	28.88	5.13	34.01	54.00	-19.99	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Horizontal

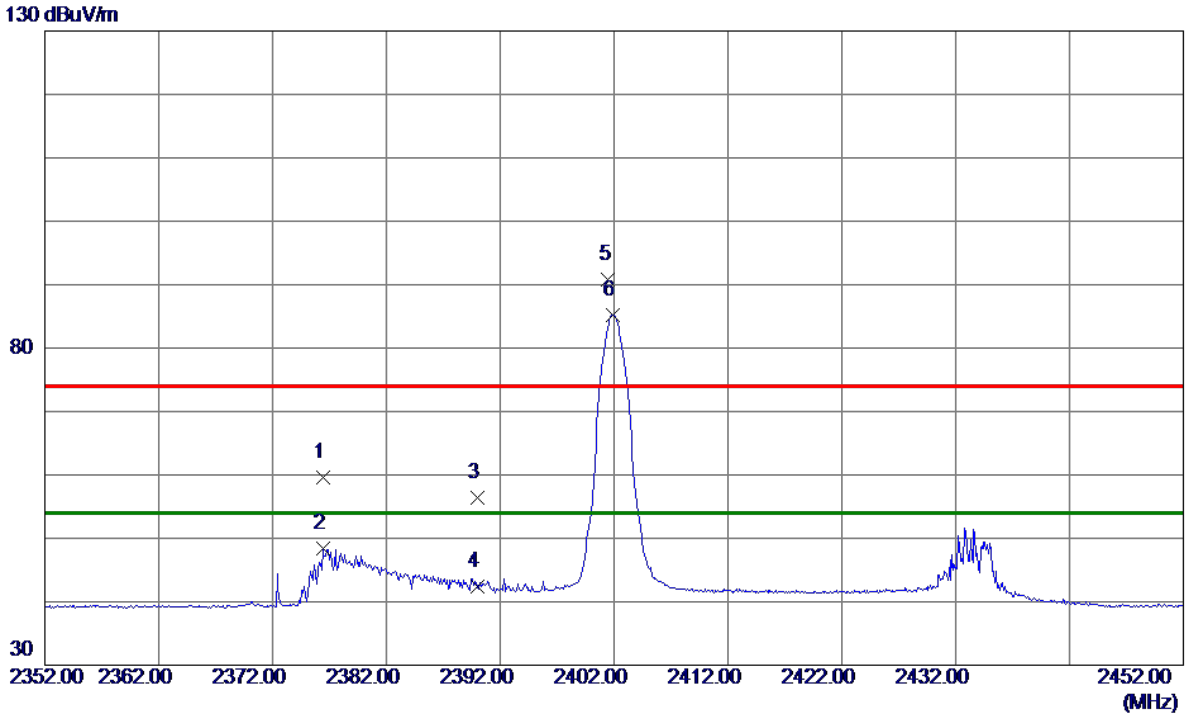

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2376.4000	51.36	8.29	59.65	74.00	-14.35	Peak	
2	2376.4000	40.17	8.29	48.46	54.00	-5.54	AVG	
3	2390.0000	48.13	8.31	56.44	74.00	-17.56	Peak	
4	2390.0000	34.05	8.31	42.36	54.00	-11.64	AVG	
5	2401.5000	82.52	8.32	90.84	74.00	16.84	Peak	No Limit
6 *	2401.9000	76.86	8.32	85.18	54.00	31.18	AVG	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Horizontal

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4804.1820	33.45	5.13	38.58	54.00	-15.42	AVG	
2	4804.3440	40.67	5.13	45.80	74.00	-28.20	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH38_2Mbps	Polarization	Vertical

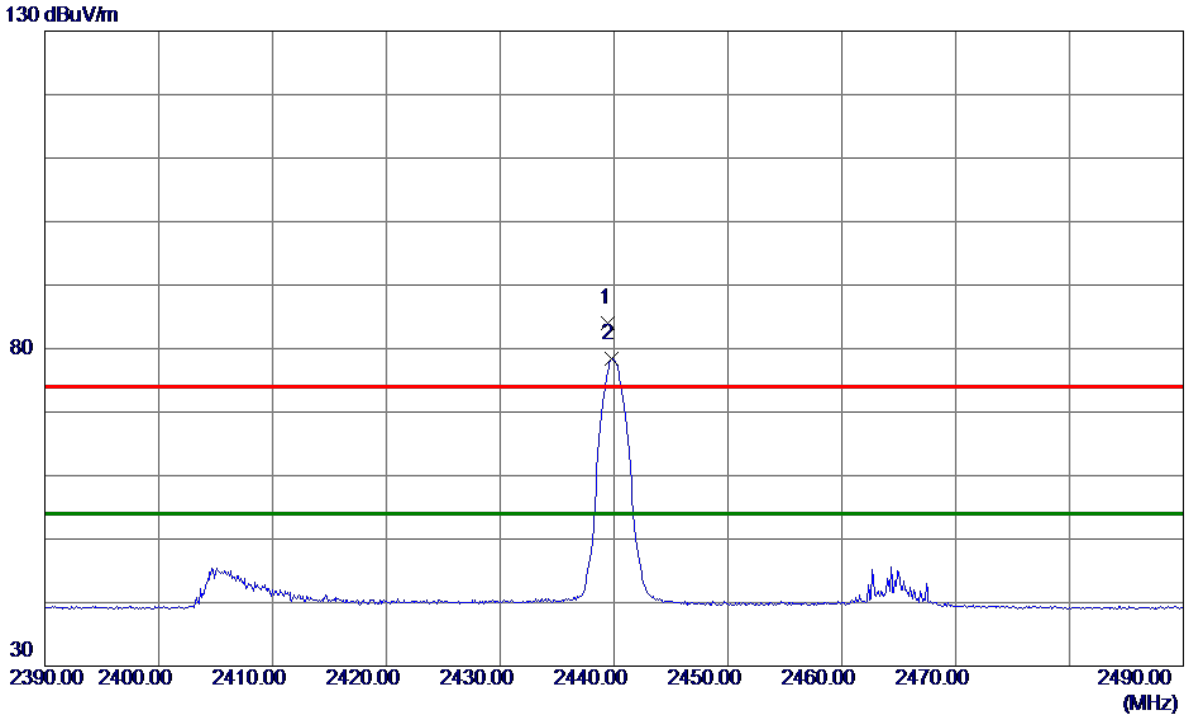

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2439.5000	75.70	8.37	84.07	74.00	10.07	Peak	No Limit
2 *	2439.8000	69.99	8.37	78.36	54.00	24.36	AVG	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH38_2Mbps	Polarization	Vertical

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4879.6770	27.58	5.51	33.09	54.00	-20.91	AVG	
2	4880.4490	38.60	5.51	44.11	74.00	-29.89	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH38_2Mbps	Polarization	Horizontal

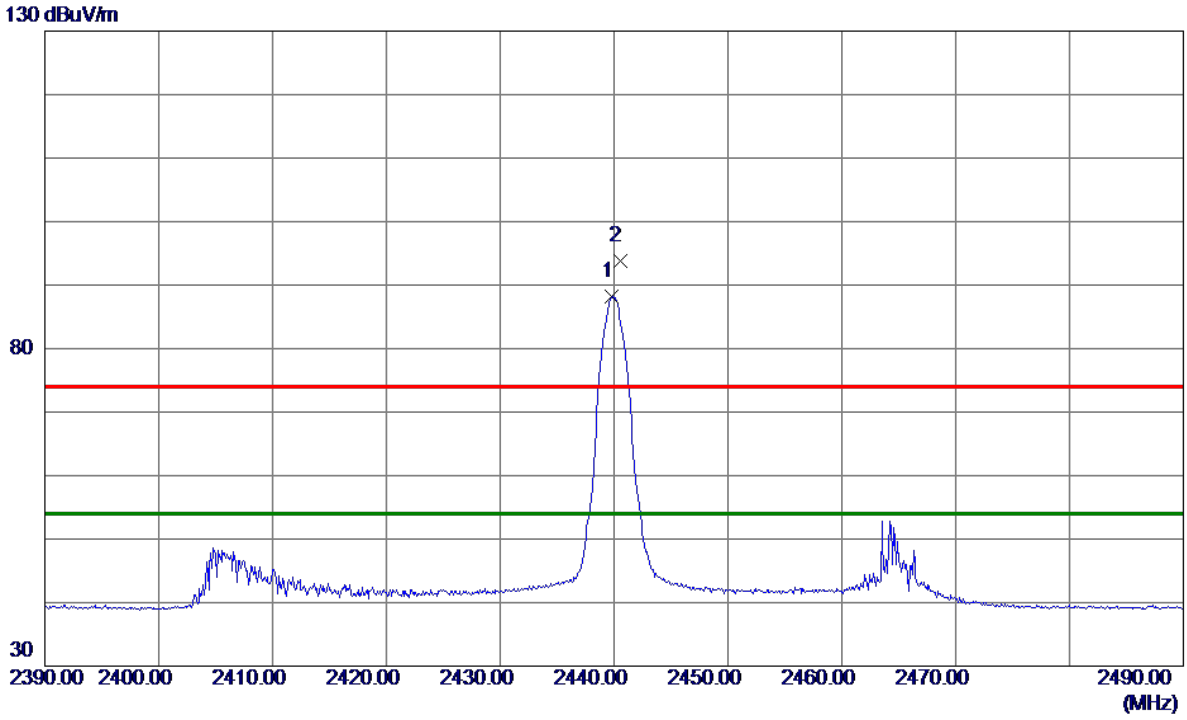

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2439.8000	79.74	8.37	88.11	54.00	34.11	AVG	No Limit
2	2440.5000	85.36	8.37	93.73	74.00	19.73	Peak	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH38_2Mbps	Polarization	Horizontal

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4879.6690	41.37	5.51	46.88	74.00	-27.12	Peak	
2 *	4879.9800	32.52	5.51	38.03	54.00	-15.97	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_2Mbps	Polarization	Vertical

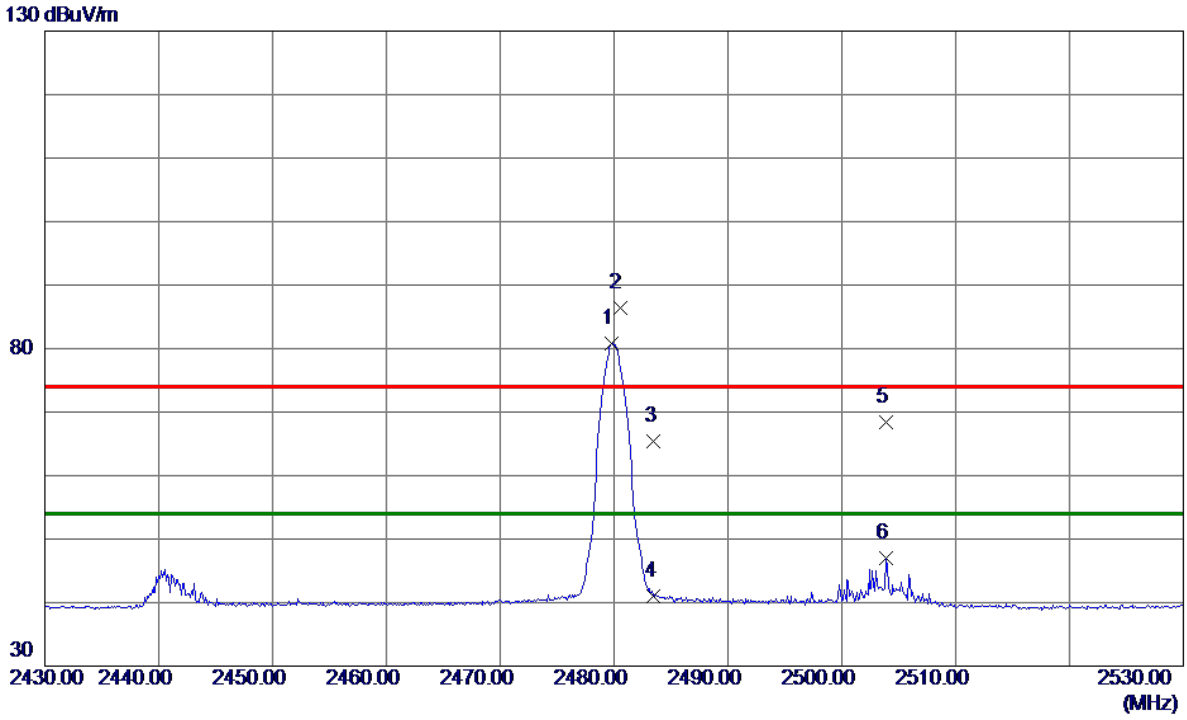

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2479.8000	72.36	8.42	80.78	54.00	26.78	AVG	No Limit
2	2480.5000	77.98	8.42	86.40	74.00	12.40	Peak	No Limit
3	2483.5000	56.95	8.42	65.37	74.00	-8.63	Peak	
4	2483.5000	32.61	8.42	41.03	54.00	-12.97	AVG	
5	2503.9000	59.92	8.46	68.38	74.00	-5.62	Peak	
6	2503.9000	38.49	8.46	46.95	54.00	-7.05	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_2Mbps	Polarization	Vertical

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4959.1130	30.48	5.91	36.39	54.00	-17.61	AVG	
2	4960.7559	40.13	5.92	46.05	74.00	-27.95	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_2Mbps	Polarization	Horizontal

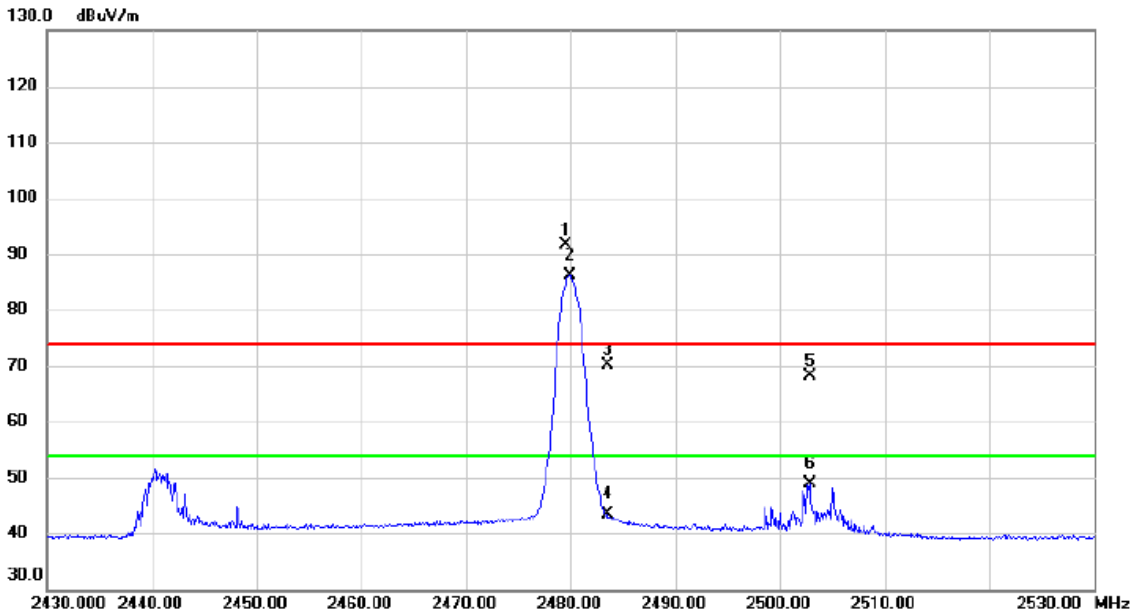

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.500	83.30	8.43	91.73	74.00	17.73	peak	No Limit
2	*	2479.900	77.61	8.43	86.04	54.00	32.04	AVG	No Limit
3		2483.500	61.76	8.43	70.19	74.00	-3.81	peak	
4		2483.500	34.92	8.43	43.35	54.00	-10.65	AVG	
5		2502.800	59.56	8.46	68.02	74.00	-5.98	peak	
6		2502.800	40.37	8.46	48.83	54.00	-5.17	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_2Mbps	Polarization	Horizontal

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4959.9240	41.23	5.92	47.15	74.00	-26.85	Peak	
2 *	4960.9049	32.48	5.92	38.40	54.00	-15.60	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	TX Mode _2Mbps

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	1.210	2.048	0.5	Pass
38	2440	1.212	2.048	0.5	Pass
78	2480	1.184	2.056	0.5	Pass

CH00

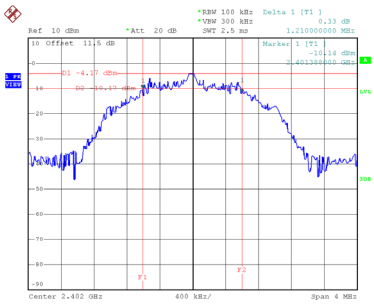

Date: 19.AUG.2021 13:52:27

CH38

6 dB Bandwidth

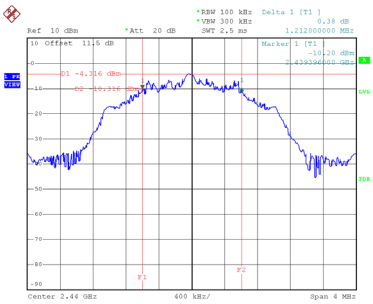

Date: 19.AUG.2021 13:59:46

CH78

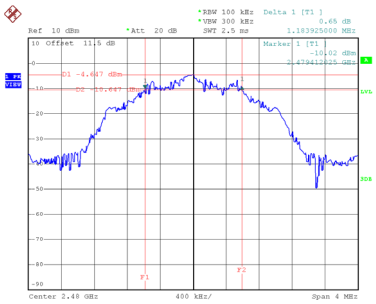

Date: 19.AUG.2021 14:02:29

99 % Occupied Bandwidth

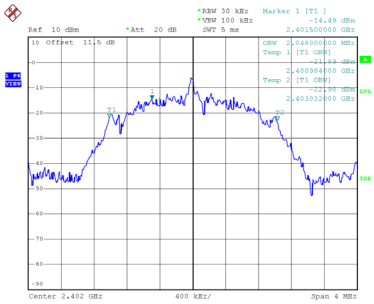

Date: 19.AUG.2021 13:51:23

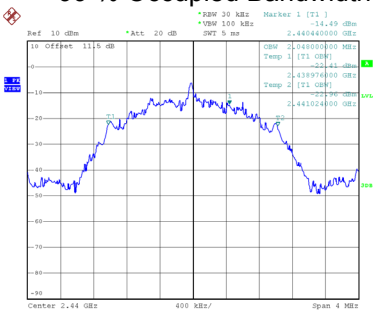

Date: 19.AUG.2021 13:59:54

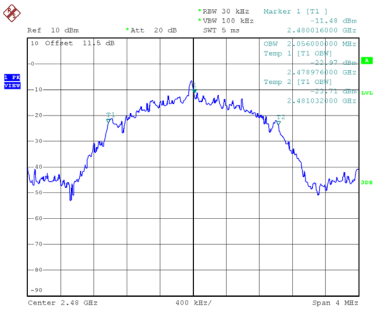

Date: 19.AUG.2021 14:02:37

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX Mode _2Mbps

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	-3.89	0.0004	30.00	1.0000	Pass
2440	-4.00	0.0004	30.00	1.0000	Pass
2480	-4.32	0.0004	30.00	1.0000	Pass

CH00

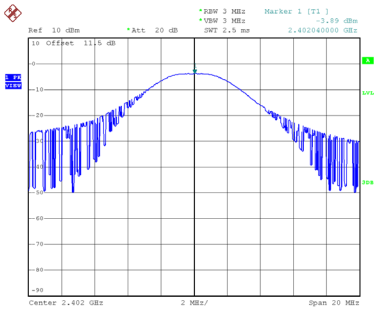

Date: 19.AUG.2021 13:53:23

CH38

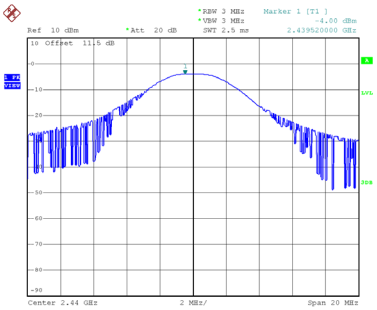

Date: 19.AUG.2021 14:00:52

CH78

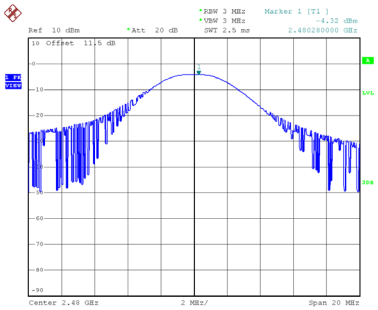

Date: 19.AUG.2021 14:03:51

APPENDIX G - CONDUCTED SPURIOUS EMISSION

Test Mode	TX Mode _2Mbps

Bandedge CH00 (Lower)

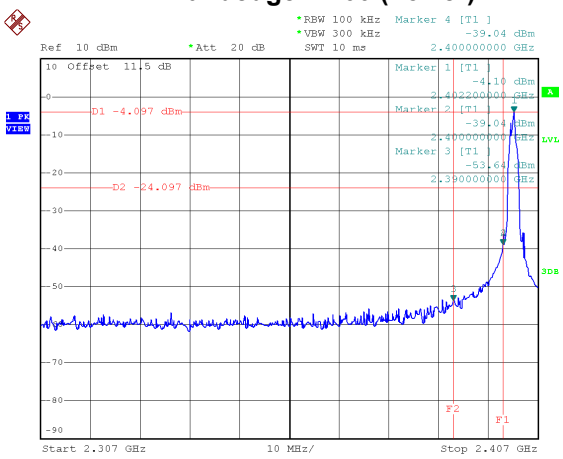

Date: 19.AUG.2021 13:52:36

Bandedge CH78 (Upper)

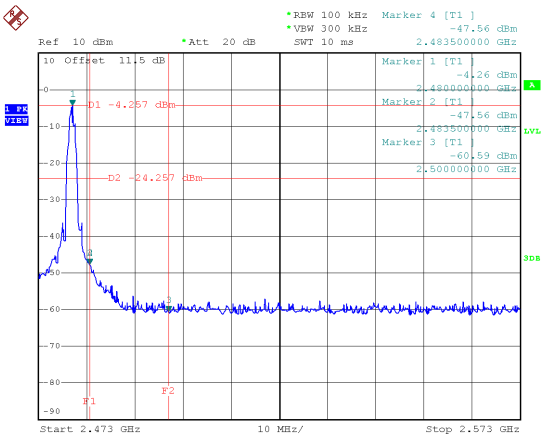

Date: 19.AUG.2021 14:03:03

CH00 – 10th Harmonic of the fundamental frequency

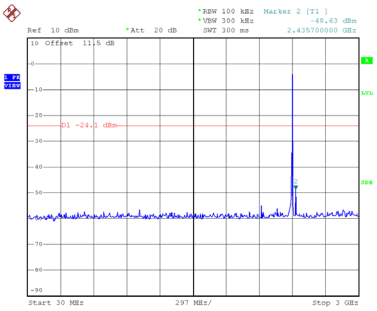

Date: 19.AUG.2021 13:52:51

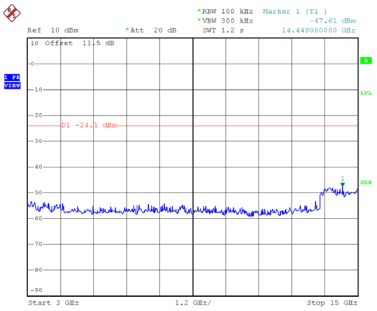

Date: 19.AUG.2021 13:53:00

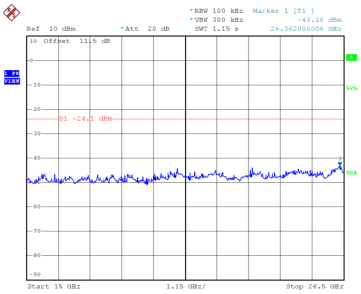

Date: 19.AUG.2021 13:53:09

CH38 – 10th Harmonic of the fundamental frequency

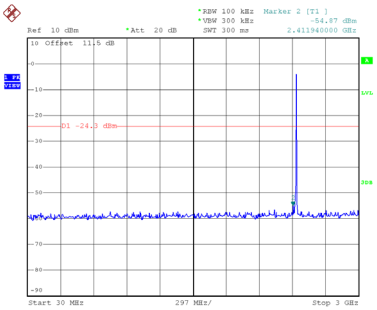

Date: 19.AUG.2021 14:00:18

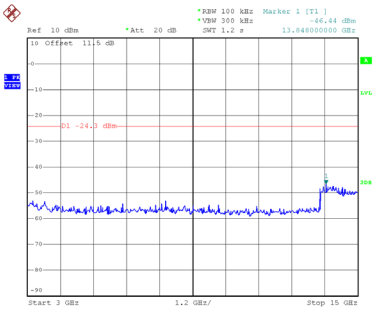

Date: 19.AUG.2021 14:00:27

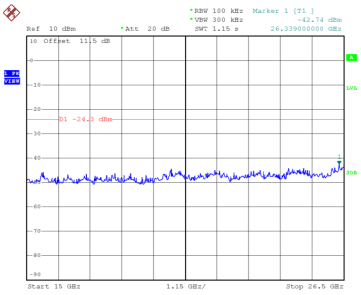

Date: 19.AUG.2021 14:00:37

CH78 – 10th Harmonic of the fundamental frequency

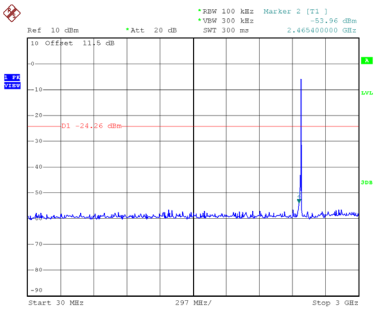

Date: 19.AUG.2021 14:03:17

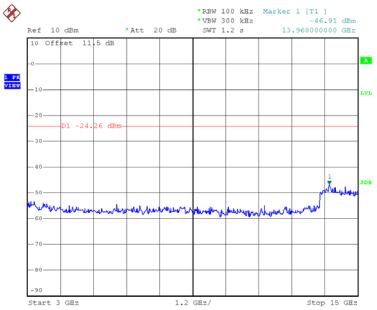

Date: 19.AUG.2021 14:03:27

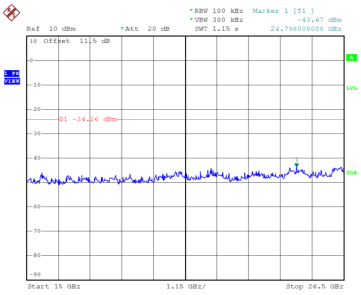

Date: 19.AUG.2021 14:03:36

APPENDIX H - POWER SPECTRAL DENSITY

Test Mode	TX Mode _2Mbps

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	-20.21	8.00	Pass
38	2440	-20.87	8.00	Pass
78	2480	-21.14	8.00	Pass

CH00

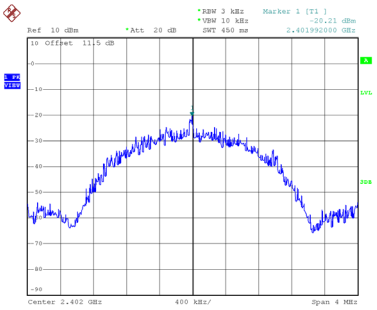

Date: 19.AUG.2021 13:53:16

CH38

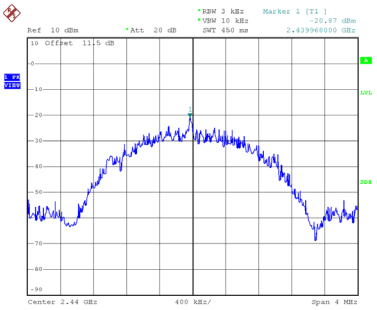

Date: 19.AUG.2021 14:00:44

CH78

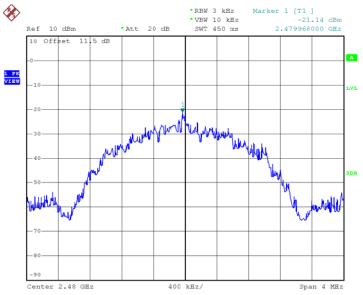

Date: 19.AUG.2021 14:03:43

End of Test Report