

TEST REPORT

FCC ID: 2AXYP-OPN-374N-L**Product: Open-Ear True Wireless Earbuds****Model No.: OPN-374N****Trade Mark: oraimo****Report No.: WSCT-ANAB-R&E251200094A-15B****Issued Date: 08 January 2026****Issued for:****ORAIMO TECHNOLOGY LIMITED****FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG****Issued By:****World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B,Baoli'an Industrial Park,No.58 and 60,Tangtou Avenue, Shiyan
Street,Bao'an District, Shenzhen City, Guangdong Province, China****TEL: +86-755-26996192****FAX: +86-755-86376605**

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1. Test Certification	3
2. GENERAL DESCRIPTION OF EUT	4
3. Test Result Summary	5
4. TEST METHODOLOGY	6
4.1. CONFIGURATION OF SYSTEM UNDER TEST	7
4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	8
5. MEASUREMENT INSTRUMENTS	9
6. Facilities and Accreditations	10
6.1. FACILITIES	10
6.2. ACCREDITATIONS	10
6.3. MEASUREMENT UNCERTAINTY	11
7. EMC EMISSION TEST	12
7.1. CONDUCTED EMISSION MEASUREMENT	12
7.2. TEST RESULTS	14
7.3. RADIATED EMISSION MEASUREMENT	16
8. Test Setup Photographs	23

Report No.: WSCT-ANAB-R&E251200094A-15B

Issued Date: 08 January 2026

1. Test Certification

Product: Open-Ear True Wireless Earbuds**Model No.:** OPN-374N**Trade Mark:** oraimo**Applicant:** ORAIMO TECHNOLOGY LIMITEDFLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN
MEI STREET FOTAN NT HONGKONG**Manufacturer:** ORAIMO TECHNOLOGY LIMITEDFLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN
MEI STREET FOTAN NT HONGKONG**Date of Test:** 05 December 2025 to 08 January 2026**Applicable Standards:** FCC CFR Title 47 Part 15 Subpart B

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Jiang Guanliang

(Jiang Guanliang)

Checked By:

Qin Shuiquan

(Qin Shuiquan)

Approved By:

Li Huaibi

(Li Huaibi)

Date:

08 January 2026

2. GENERAL DESCRIPTION OF EUT

Product Name:	Open-Ear True Wireless Earbuds
Model:	OPN-374N
Trade Mark:	oraimo
Operating Voltage:	Rechargeable Li-ion Polymer Battery: YD 551012 0.1665Wh 3.7V 45mAh Charging Box: 701435 3.7V 350mAh 1.295Wh
Remark:	N/A.

Note: 1. N/A stands for no applicable.

3. Test Result Summary

Requirement	CFR 47 Section	Result
CONDUCTED EMISSION	§15.107	PASS
RADIATED EMISSION	§15.109	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.


4. TEST METHODOLOGY

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging
Model 2	Bluetooth

4.1. CONFIGURATION OF SYSTEM UNDER TEST

Mode 1&2

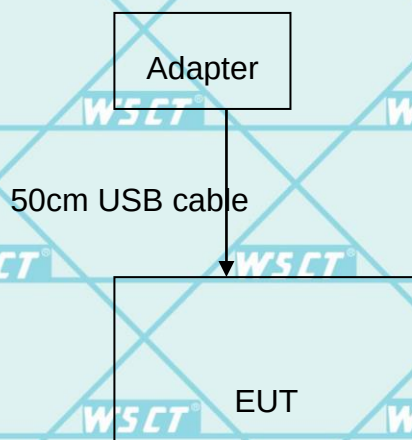

(EUT: Open-Ear True Wireless Earbuds)

4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	/	U180XSA	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
Test software	--	EZ-EMC	CON-03A	--	--
ESCI Test Receiver	R&S	ESCI	100005	11/05/2025	11/04/2026
LISN	AFJ	LS16	16010222119	11/05/2025	11/04/2026
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2025	11/04/2026
pre-amplifier	CDSI	PAP-1G18-38	--	11/05/2025	11/04/2026
System Controller	CT	SC100	-	11/05/2025	11/04/2026
Bi-log Antenna	Chase	CBL6111C	2576	11/05/2025	11/04/2026
Spectrum analyzer	R&S	FSU26	200409	11/05/2025	11/04/2026
Horn Antenna	SCHWARZBECK	9120D	1141	11/05/2025	11/04/2026
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	07/29/2025	07/28/2026
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2025	11/04/2026
9*6*6 Anechoic	--	--	--	11/05/2025	11/04/2026

6. Facilities and Accreditations

6.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyao Street, Bao'an District, Shenzhen City, Guangdong Province, China** of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA

ANAB - Certificate Number: AT-3951

China

CNAS (Registration Number: L3732)

Canada

ISED (CAB identifier: CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

6.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 3.3\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2.0\%$

7. EMC EMISSION TEST

7.1. CONDUCTED EMISSION MEASUREMENT

7.1.1. POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

Report No.: WSCT-ANAB-R&E251200094A-15B Issued Date: 08 January 2026

TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


TEST SETUP

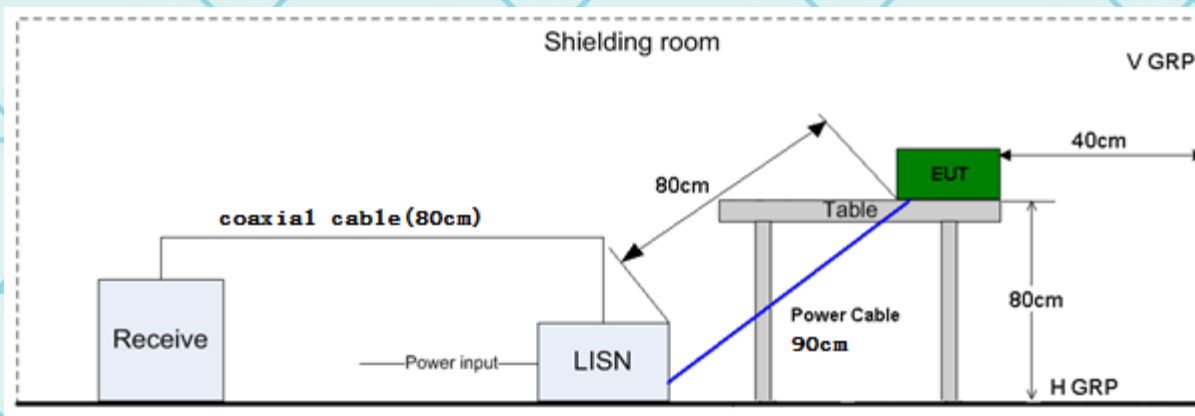

7.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2(the worst case)


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

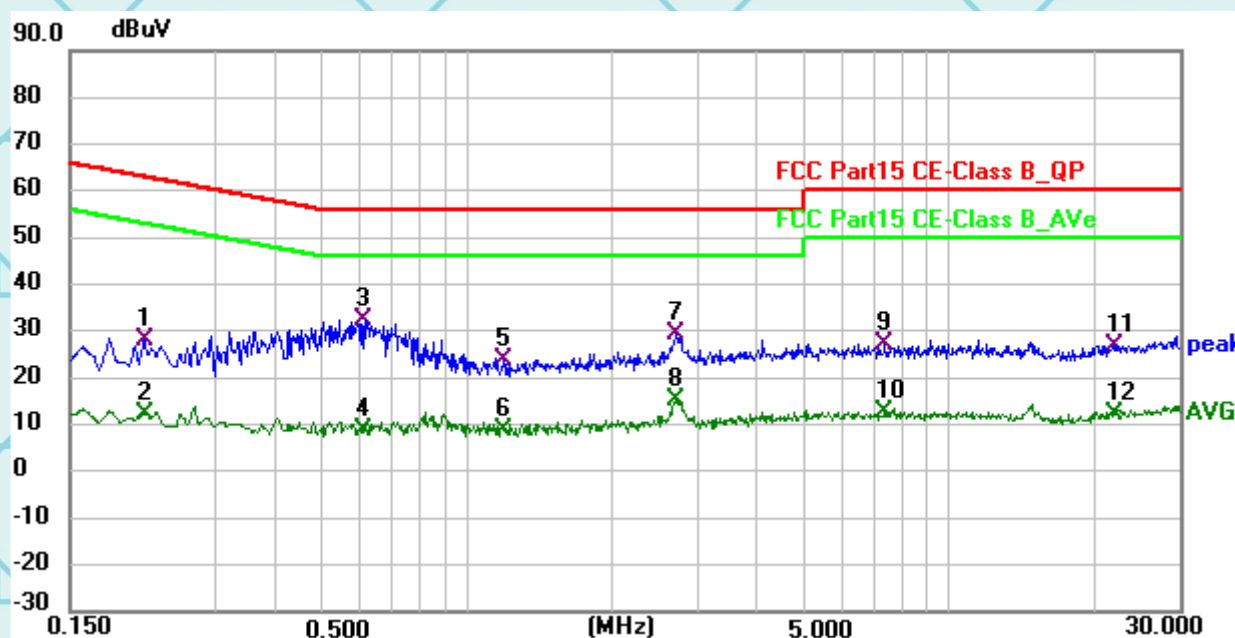

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2130	7.57	20.68	28.25	63.09	-34.84	QP
2	0.2130	-8.45	20.68	12.23	53.09	-40.86	AVG
3 *	0.6134	11.94	20.53	32.47	56.00	-23.53	QP
4	0.6134	-11.61	20.53	8.92	46.00	-37.08	AVG
5	1.1940	3.15	20.66	23.81	56.00	-32.19	QP
6	1.1940	-11.70	20.66	8.96	46.00	-37.04	AVG
7	2.7195	8.94	20.60	29.54	56.00	-26.46	QP
8	2.7195	-5.55	20.60	15.05	46.00	-30.95	AVG
9	7.3365	6.74	20.50	27.24	60.00	-32.76	QP
10	7.3365	-8.00	20.50	12.50	50.00	-37.50	AVG
11	22.1055	6.54	20.40	26.94	60.00	-33.06	QP
12	22.1055	-8.02	20.40	12.38	50.00	-37.62	AVG

Report No.: WSCT-ANAB-R&E251200094A-15B Issued Date: 08 January 2026

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

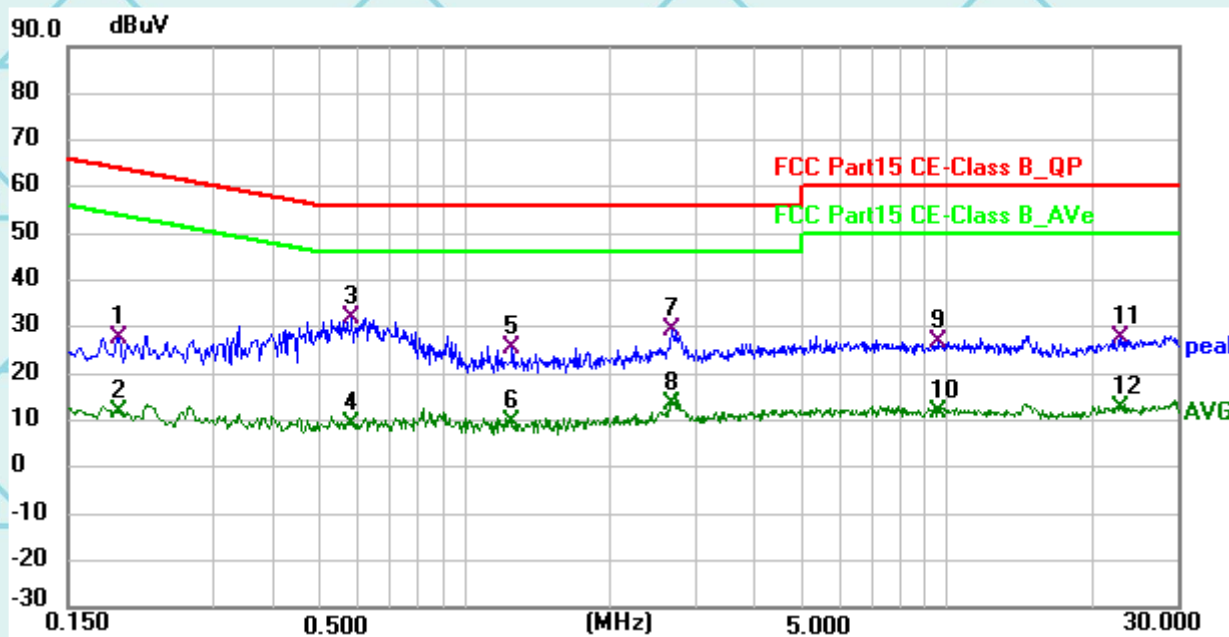

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1905	6.98	20.70	27.68	64.01	-36.33	QP
2	0.1905	-8.77	20.70	11.93	54.01	-42.08	AVG
3 *	0.5820	11.61	20.52	32.13	56.00	-23.87	QP
4	0.5820	-11.20	20.52	9.32	46.00	-36.68	AVG
5	1.2525	4.83	20.65	25.48	56.00	-30.52	QP
6	1.2525	-11.04	20.65	9.61	46.00	-36.39	AVG
7	2.6835	8.91	20.60	29.51	56.00	-26.49	QP
8	2.6835	-7.08	20.60	13.52	46.00	-32.48	AVG
9	9.5730	6.29	20.46	26.75	60.00	-33.25	QP
10	9.5730	-8.61	20.46	11.85	50.00	-38.15	AVG
11	22.8165	7.07	20.45	27.52	60.00	-32.48	QP
12	22.8165	-7.63	20.45	12.82	50.00	-37.18	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN Factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)

Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

7.3. RADIATED EMISSION MEASUREMENT

7.3.1. Radiated Emission Limits

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequencies (MHz)	Field Strength (micromvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

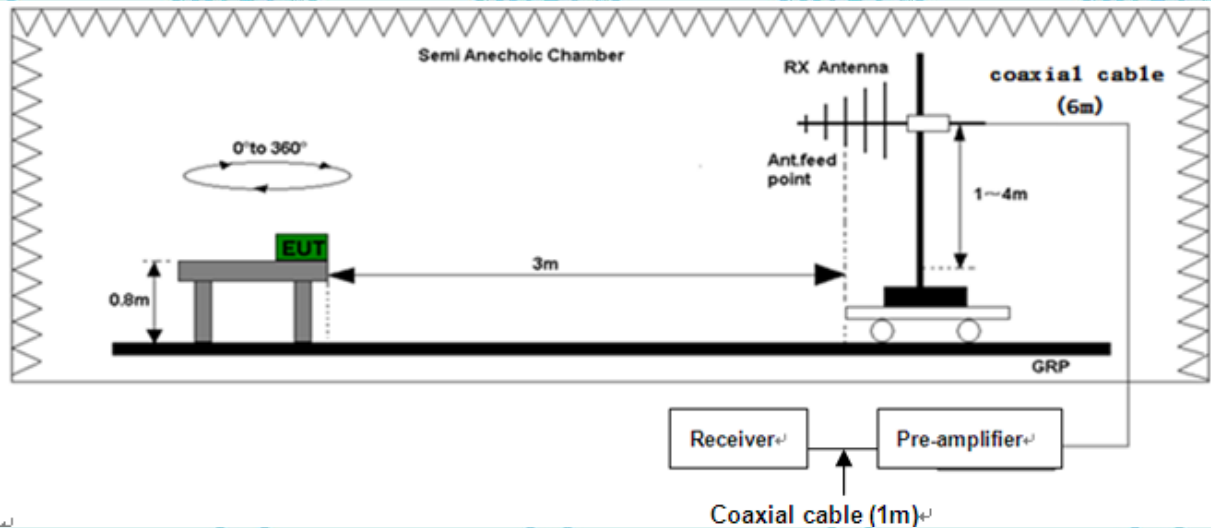

(B) Radiated Emission Test-Up Frequency Above 1GHz

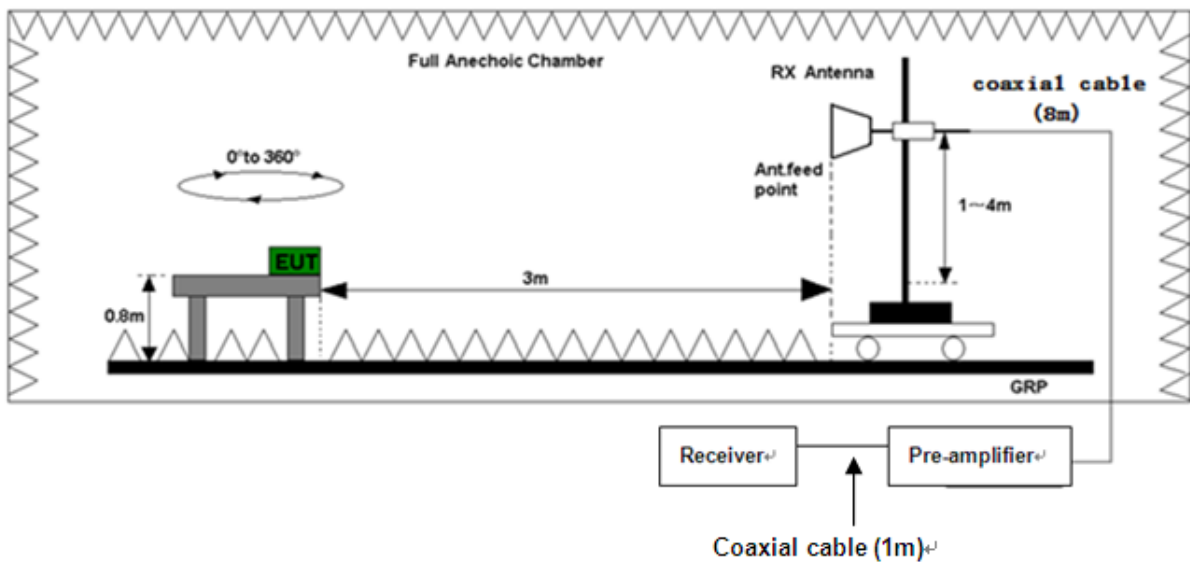

7.3.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2(the worst case)

Please refer to following diagram for individual

Below 1GHz

Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		47.4600	30.34	-7.67	22.67	40.00	-17.33	QP
2		144.4600	28.15	-7.02	21.13	43.50	-22.37	QP
3		480.0799	27.62	-1.36	26.26	46.00	-19.74	QP
4		610.0599	27.22	1.63	28.85	46.00	-17.15	QP
5		831.2199	26.36	5.45	31.81	46.00	-14.19	QP
6	*	959.2599	25.46	7.45	32.91	46.00	-13.09	QP

Vertical:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	30.9700	50.33	-20.52	29.81	40.00	-10.19	QP
2		97.9000	44.14	-20.21	23.93	43.50	-19.57	QP
3		464.5600	47.01	-18.44	28.57	46.00	-17.43	QP
4		544.1000	52.50	-18.03	34.47	46.00	-11.53	QP
5		726.4600	47.22	-17.05	30.17	46.00	-15.83	QP
6		871.9600	48.41	-16.17	32.24	46.00	-13.76	QP

Note1:

Freq.= Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard


Margin (dB) = Measurement (dBuV) – Limits (dBuV)

TEST RESULTS

Above 1GHz(1~6GHz) :(Mode 2—worst case)


Note: The spurious above 6G is noise only, do not show on the report.

Horizontal:

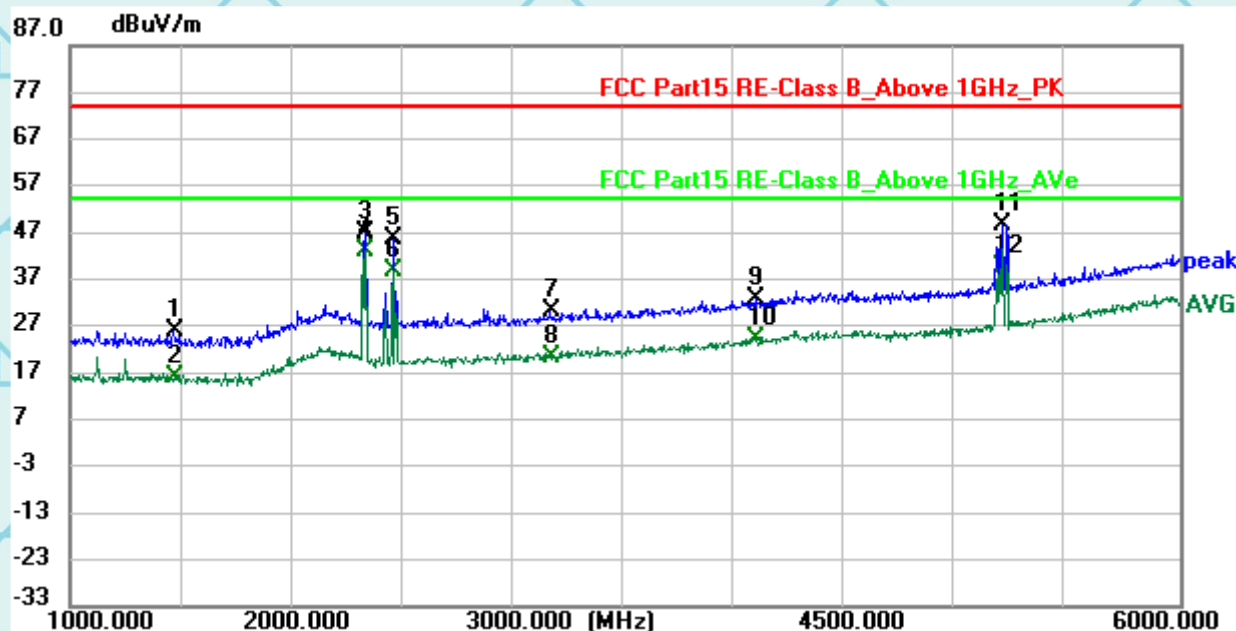

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1473.750	33.36	-7.41	25.95	74.00	-48.05	peak
2	1473.750	23.46	-7.41	16.05	54.00	-37.95	AVG
3	2338.750	50.40	-3.31	47.09	74.00	-26.91	peak
4 *	2338.750	46.34	-3.31	43.03	54.00	-10.97	AVG
5	2456.250	49.62	-3.82	45.80	74.00	-28.20	peak
6	2456.250	42.53	-3.82	38.71	54.00	-15.29	AVG
7	3171.875	32.05	-1.89	30.16	74.00	-43.84	peak
8	3171.875	22.44	-1.89	20.55	54.00	-33.45	AVG
9	4098.750	31.27	1.39	32.66	74.00	-41.34	peak
10	4098.750	22.82	1.39	24.21	54.00	-29.79	AVG
11	5206.250	42.73	5.93	48.66	74.00	-25.34	peak
12	5206.250	33.58	5.93	39.51	54.00	-14.49	AVG

Vertical:

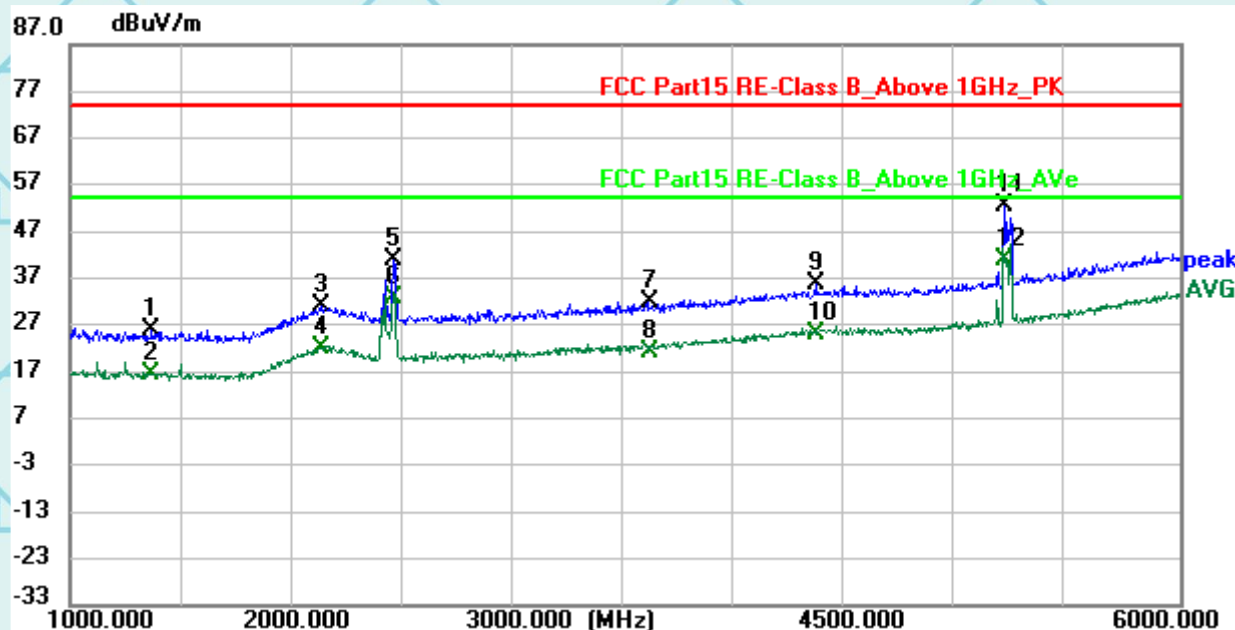

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1370.000	33.31	-7.55	25.76	74.00	-48.24	peak
2	1370.000	24.13	-7.55	16.58	54.00	-37.42	AVG
3	2134.375	32.30	-1.44	30.86	74.00	-43.14	peak
4	2134.375	23.39	-1.44	21.95	54.00	-32.05	AVG
5	2464.375	44.82	-3.78	41.04	74.00	-32.96	peak
6	2464.375	36.63	-3.78	32.85	54.00	-21.15	AVG
7	3608.125	32.64	-0.67	31.97	74.00	-42.03	peak
8	3608.125	21.99	-0.67	21.32	54.00	-32.68	AVG
9	4363.750	33.42	2.44	35.86	74.00	-38.14	peak
10	4363.750	22.62	2.44	25.06	54.00	-28.94	AVG
11	5213.750	46.41	5.94	52.35	74.00	-21.65	peak
12 *	5213.750	35.05	5.94	40.99	54.00	-13.01	AVG

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Freq. = Emission frequency in MHz

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

8. Test Setup Photographs

Please refer to Annex "Set Up Photos-15B" for test setup photos

*******END OF REPORT*******