


Orthogonal Axis	X
Test Mode	TX AX(HEW80)Mode 5210+5530 MHz--ANT.1+2/3+4

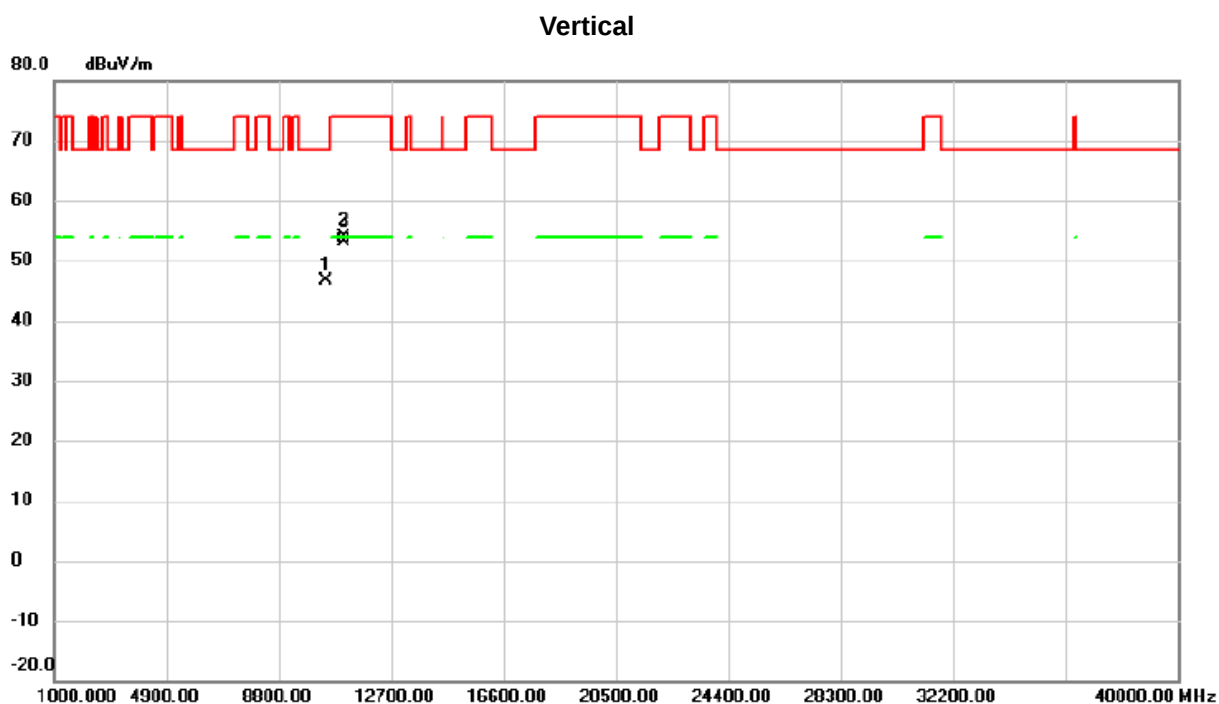


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10420.00	44.78	1.74	46.52	68.30	-21.78	peak	
2	*	11059.90	50.94	2.23	53.17	54.00	-0.83	AVG	
3		11060.05	51.66	2.23	53.89	74.00	-20.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80)Mode 5210+5530 MHz--ANT.1+2/3+4

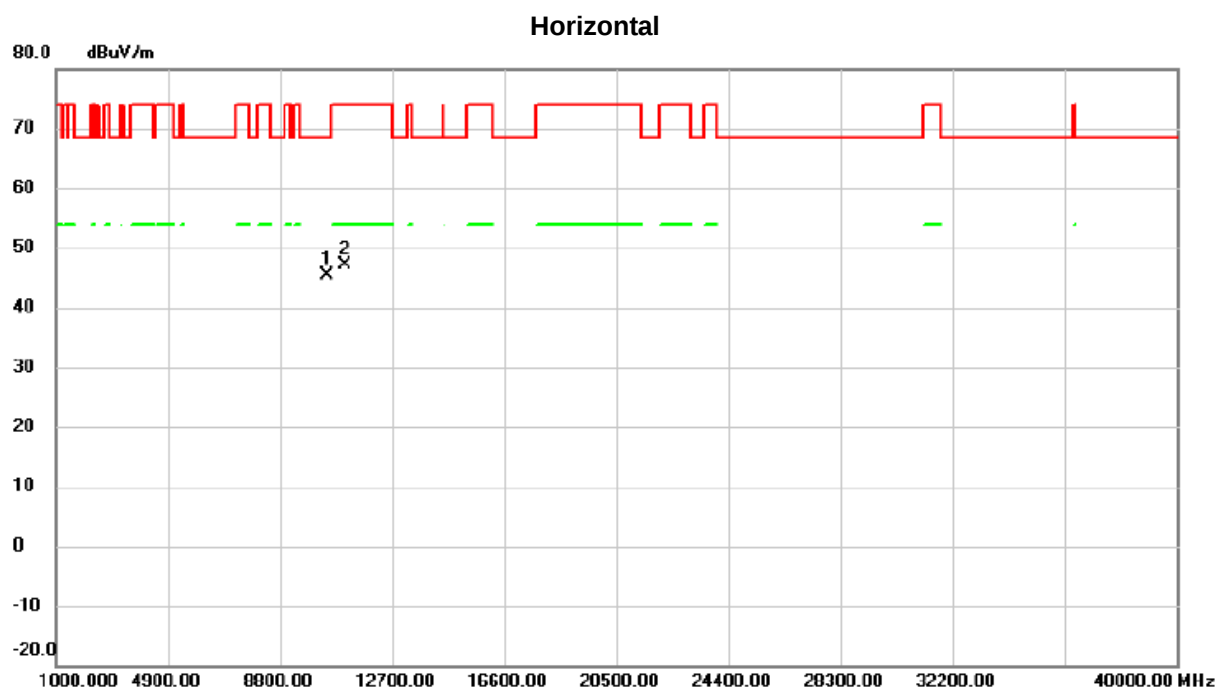

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	43.64	1.74	45.38	68.30	-22.92	peak	
2		11060.00	44.97	2.23	47.20	74.00	-26.80	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HEW80) Mode 5210 MHz--ANT.1+ANT.2

Vertical

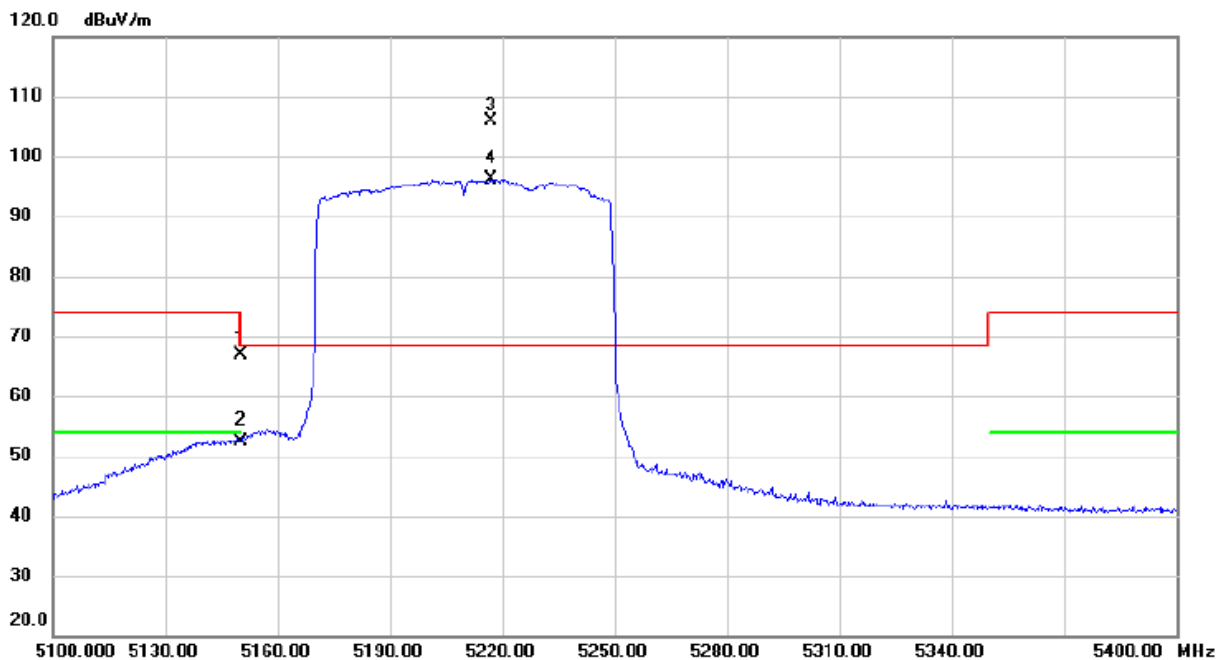


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	28.90	37.88	66.78	74.00	-7.22	peak	
2		5150.000	14.55	37.88	52.43	54.00	-1.57	AVG	
3	*	5217.150	68.27	37.66	105.93	68.30	37.63	peak	
4	X	5217.150	58.41	37.66	96.07	68.30	27.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HEW80) Mode 5210 MHz--ANT.1+ANT.2

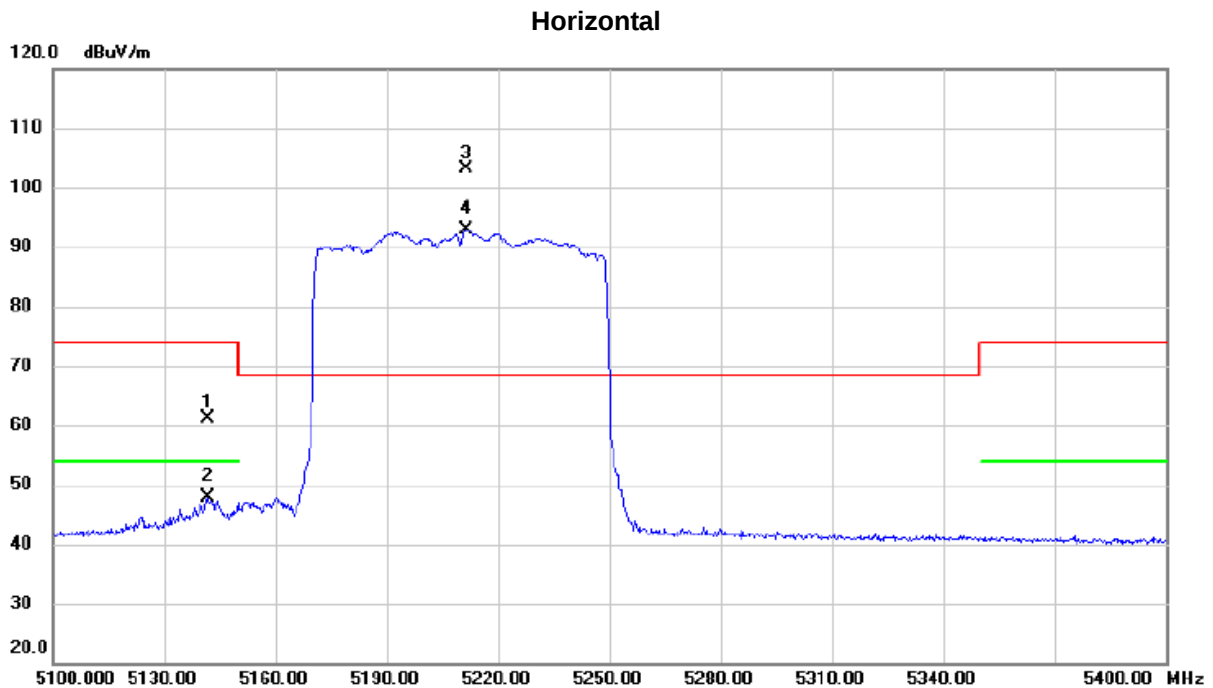


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5141.700	23.21	37.91	61.12	74.00	-12.88	peak	
2		5141.700	9.89	37.91	47.80	54.00	-6.20	AVG	
3	*	5211.450	65.42	37.66	103.08	68.30	34.78	peak	
4	X	5211.450	55.12	37.66	92.78	68.30	24.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5610 MHz--ANT.3+ANT.4

Vertical

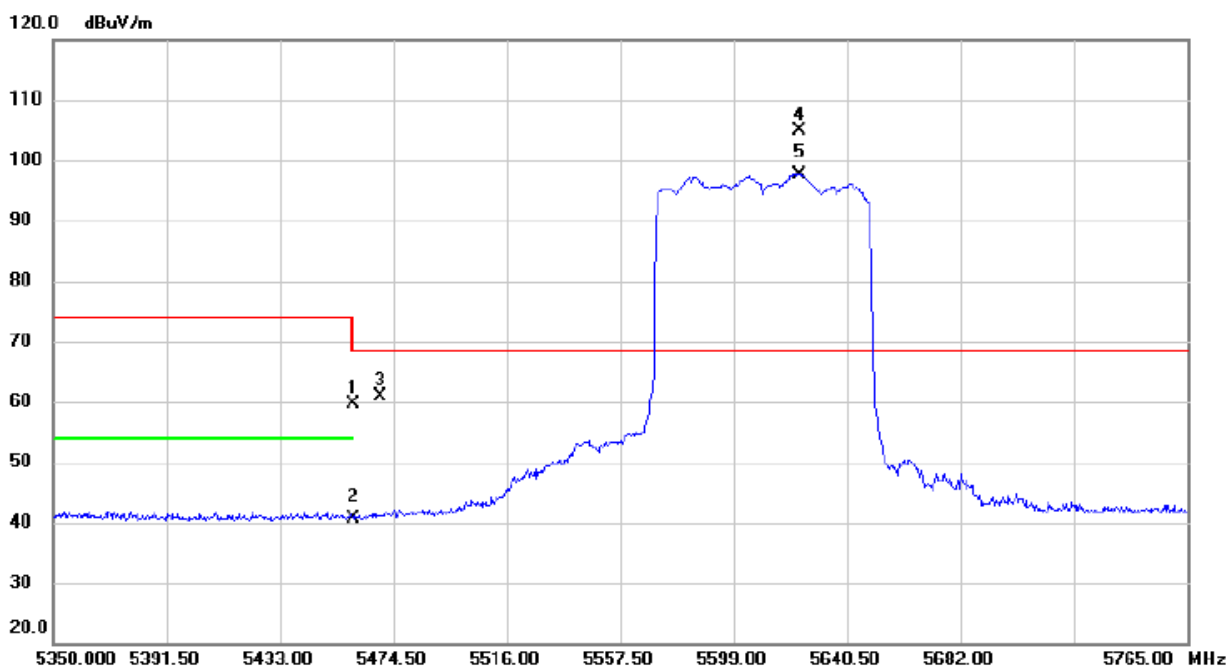


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	21.43	38.12	59.55	74.00	-14.45	peak	
2		5460.000	2.59	38.12	40.71	54.00	-13.29	AVG	
3		5470.000	22.65	38.15	60.80	68.30	-7.50	peak	
4	*	5623.070	66.43	38.36	104.79	68.30	36.49	peak	
5	X	5623.070	59.29	38.36	97.65	68.30	29.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5610 MHz--ANT.3+ANT.4

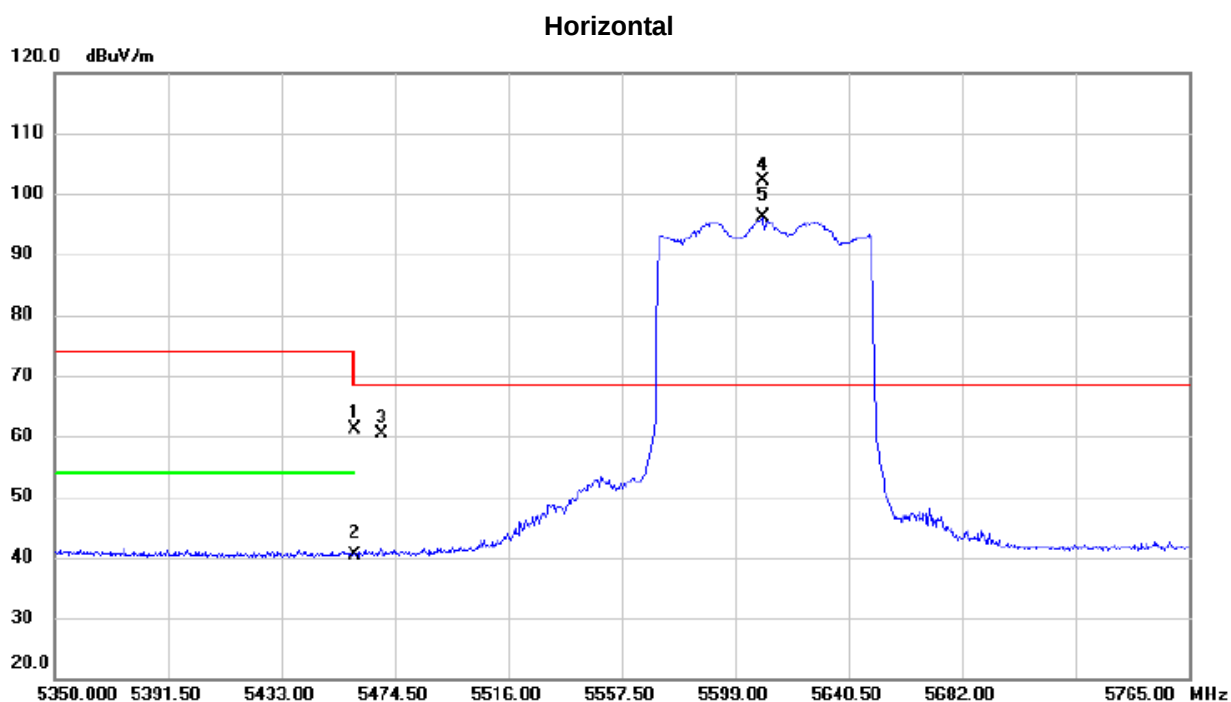


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5460.000	23.00	38.12	61.12	74.00	-12.88	peak	
2		5460.000	2.32	38.12	40.44	54.00	-13.56	AVG	
3		5470.000	22.28	38.15	60.43	68.30	-7.87	peak	
4	*	5608.960	63.73	38.34	102.07	68.30	33.77	peak	
5	X	5608.960	57.68	38.34	96.02	68.30	27.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5210+5610 MHz--ANT.1+2/3+4

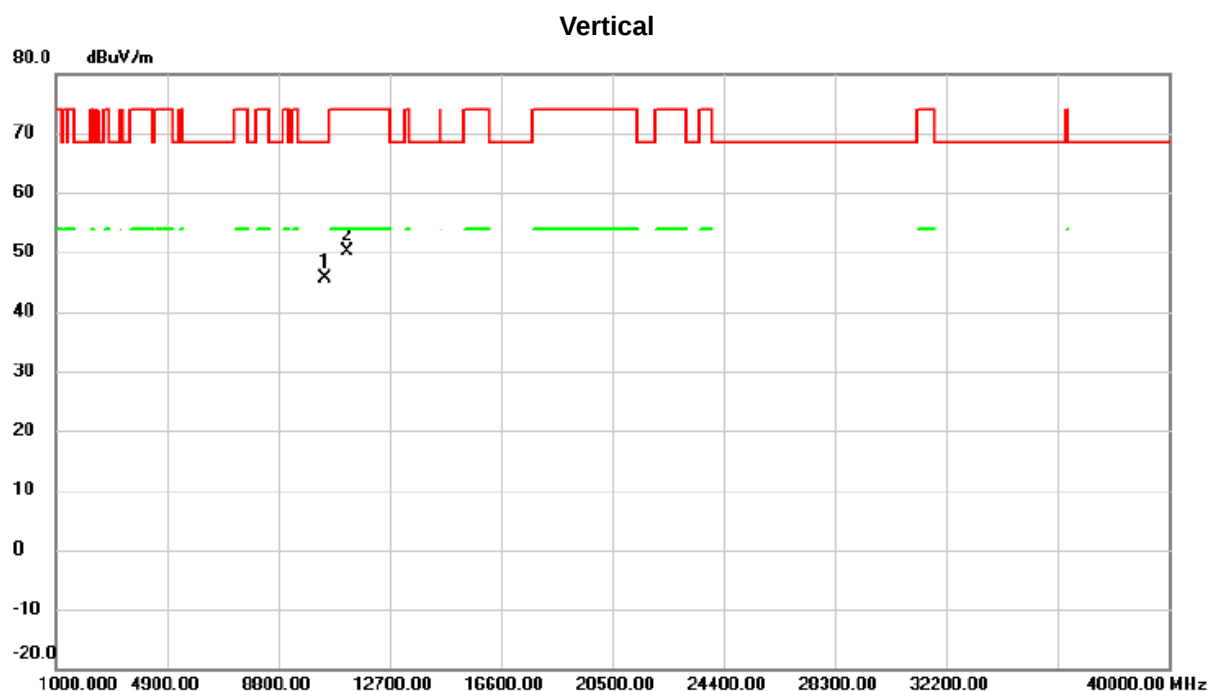


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	44.00	1.74	45.74	68.30	-22.56	peak	
2		11219.95	48.13	1.97	50.10	74.00	-23.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5210+5610 MHz--ANT.1+2/3+4

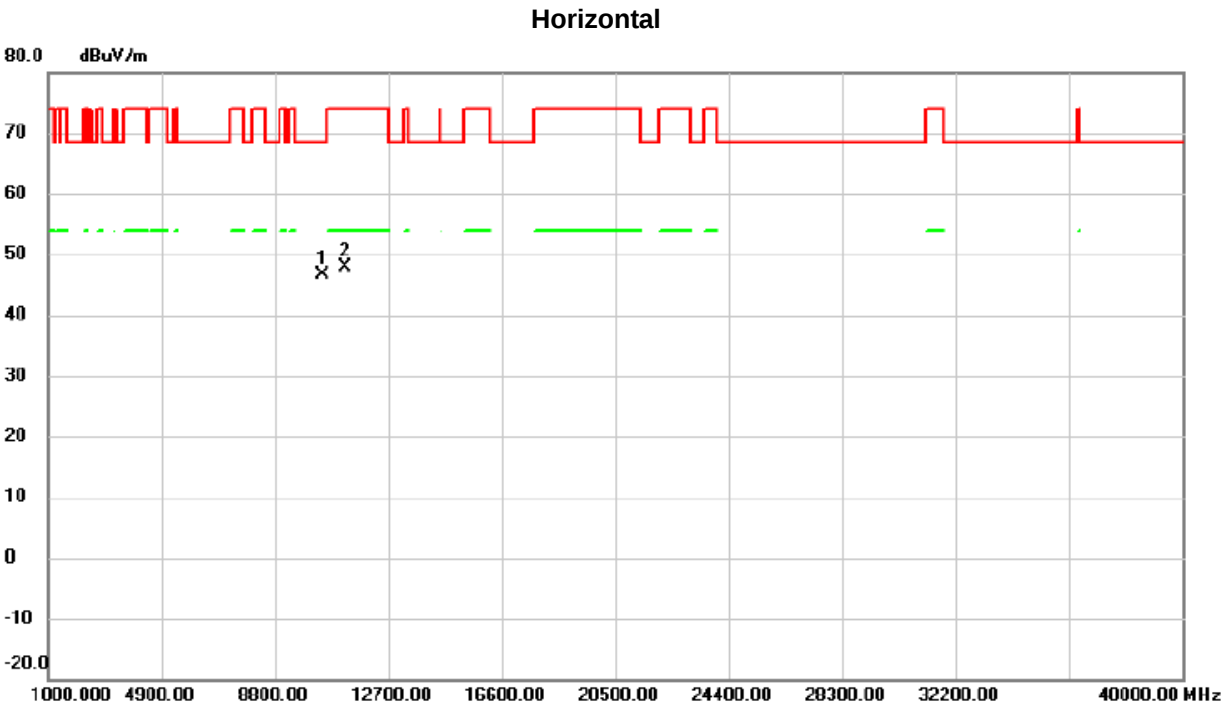


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	44.85	1.74	46.59	68.30	-21.71	peak	
2		11220.00	45.84	1.97	47.81	74.00	-26.19	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HEW80) Mode 5210 MHz ANT.1+2

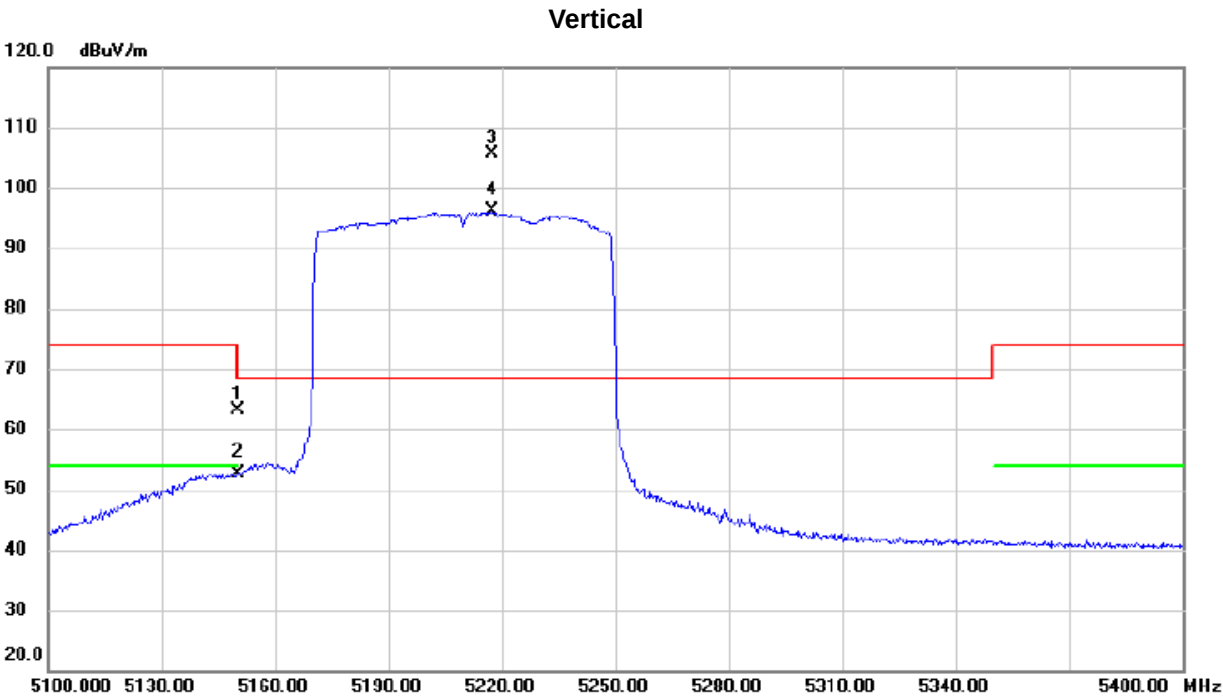


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	25.25	37.88	63.13	74.00	-10.87	peak	
2		5150.000	14.82	37.88	52.70	54.00	-1.30	AVG	
3	*	5217.450	67.92	37.66	105.58	68.30	37.28	peak	
4	X	5217.450	58.35	37.66	96.01	68.30	27.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HEW80) Mode 5210 MHz ANT.1+2

Horizontal

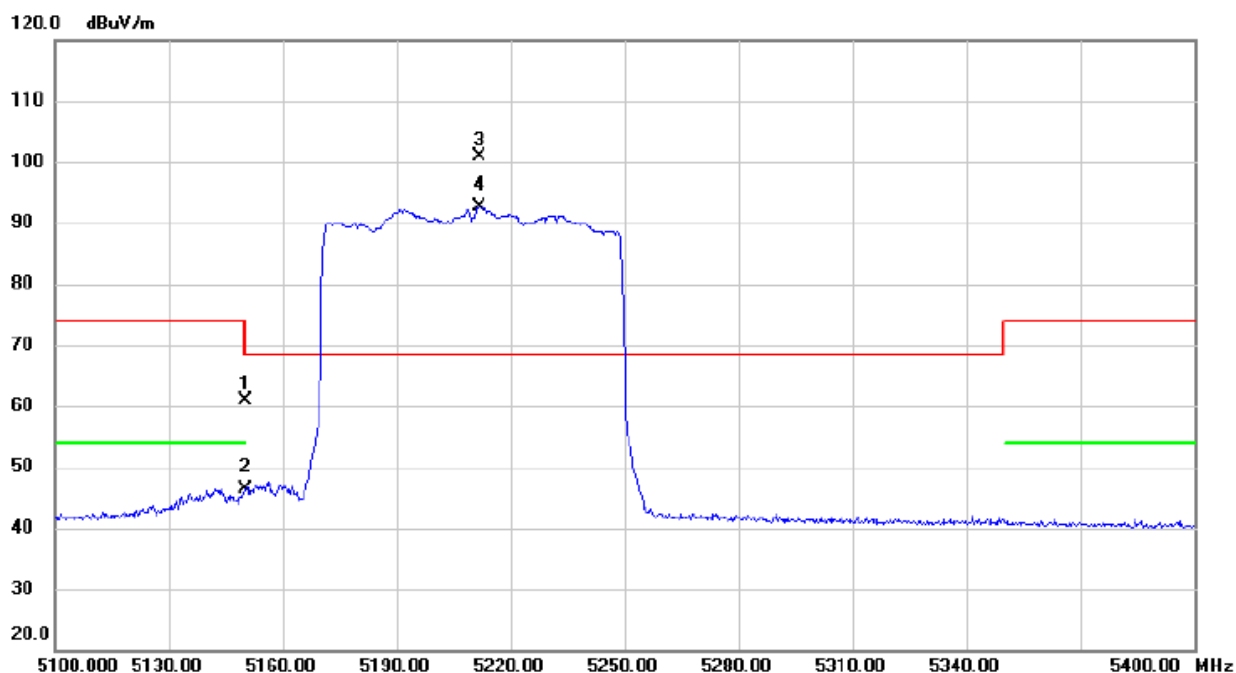

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	22.92	37.88	60.80	74.00	-13.20	peak	
2		5150.000	8.45	37.88	46.33	54.00	-7.67	AVG	
3	*	5211.750	63.14	37.66	100.80	68.30	32.50	peak	
4	X	5211.750	54.90	37.66	92.56	68.30	24.26	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HEW80) Mode 5775 MHz --ANT.3+4

Vertical

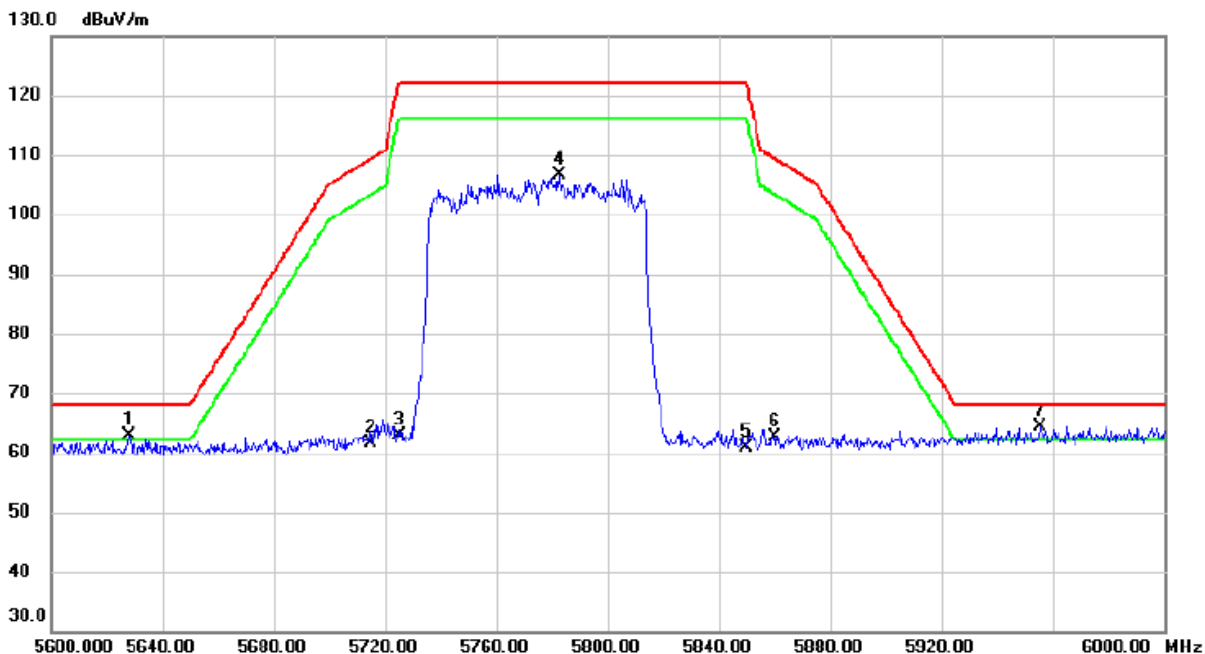

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	5628.200	24.52	38.36	62.88	68.20	-5.32	peak	
2		5715.000	23.28	38.46	61.74	109.40	-47.66	peak	
3		5725.000	24.30	38.50	62.80	122.20	-59.40	peak	
4		5782.600	67.97	38.72	106.69	122.20	-15.51	peak	
5		5850.000	21.97	38.91	60.88	122.20	-61.32	peak	
6		5860.000	23.70	38.95	62.65	109.40	-46.75	peak	
7	*	5955.400	25.32	39.16	64.48	68.20	-3.72	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HEW80) Mode 5775 MHz --ANT.3+4

Horizontal

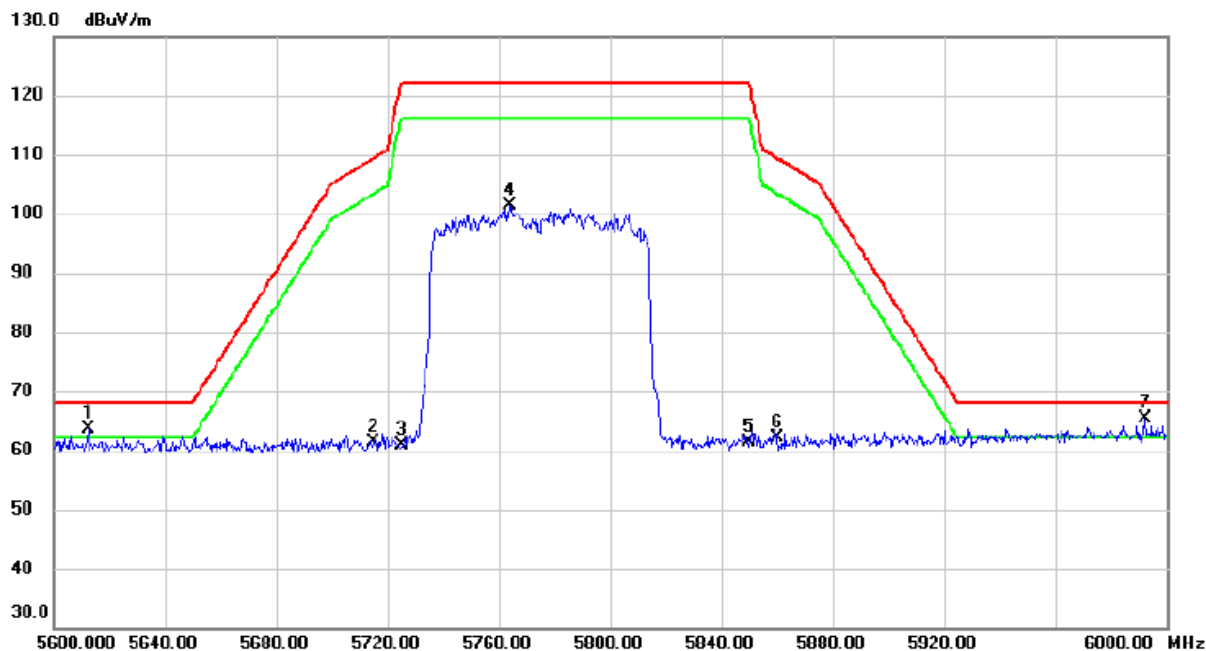


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	5612.600	25.29	38.35	63.64	68.20	-4.56	peak	
2		5715.000	23.03	38.46	61.49	109.40	-47.91	peak	
3		5725.000	22.48	38.50	60.98	122.20	-61.22	peak	
4		5764.200	62.75	38.64	101.39	122.20	-20.81	peak	
5		5850.000	22.59	38.91	61.50	122.20	-60.70	peak	
6		5860.000	23.11	38.95	62.06	109.40	-47.34	peak	
7	*	5992.200	26.08	39.23	65.31	68.20	-2.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5210+5775 MHz --ANT.1+2/3+4

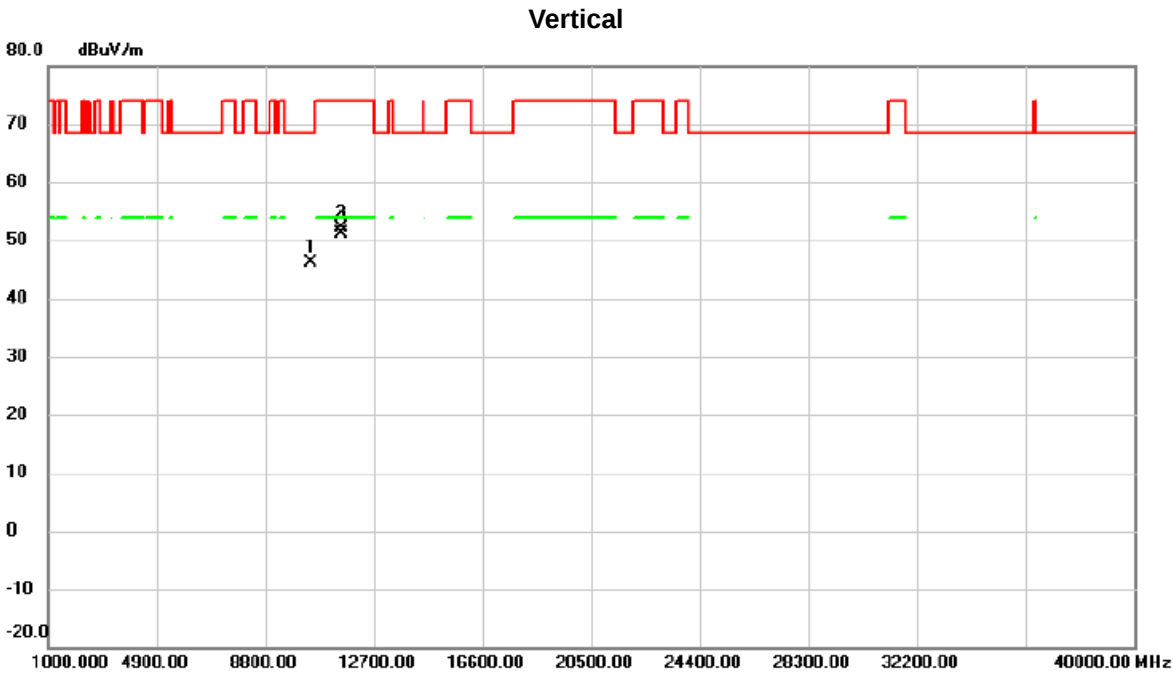


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	44.50	1.74	46.24	68.30	-22.06	peak	
2		11549.50	49.94	2.25	52.19	74.00	-21.81	peak	
3	*	11549.50	48.99	2.25	51.24	54.00	-2.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5210+5775 MHz --ANT.1+2/3+4

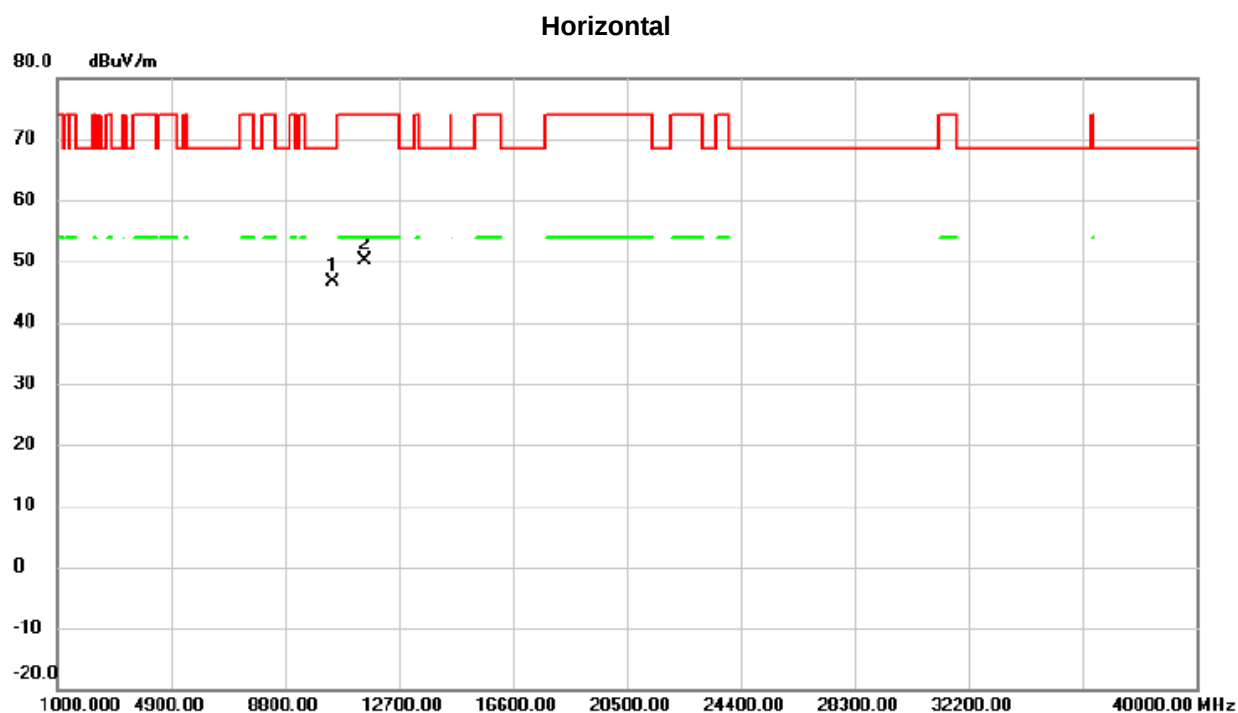


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	44.77	1.74	46.51	68.30	-21.79	peak	
2		11549.50	47.78	2.25	50.03	74.00	-23.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HEW80) Mode 5290 MHz--ANT.1+2

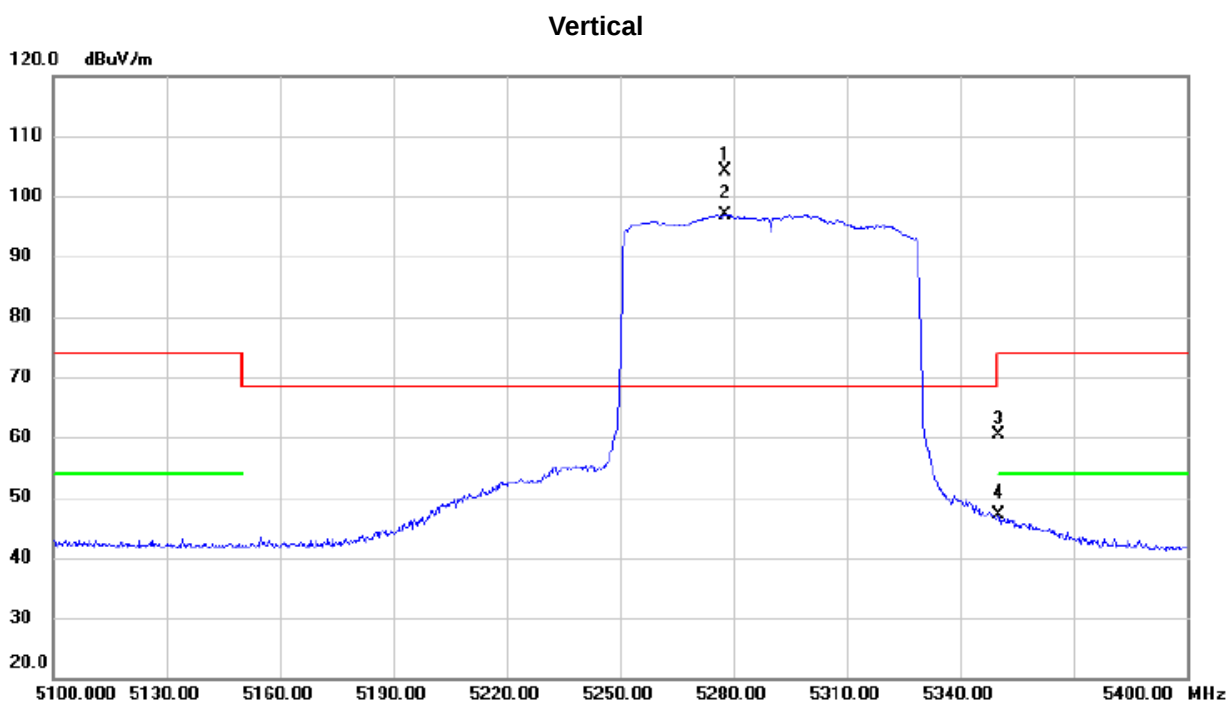


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5277.900	66.46	37.56	104.02	68.30	35.72	peak	
2	X	5277.900	59.35	37.56	96.91	68.30	28.61	AVG	
3		5350.000	22.66	37.73	60.39	74.00	-13.61	peak	
4		5350.000	9.47	37.73	47.20	54.00	-6.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HEW80) Mode 5290 MHz--ANT.1+2

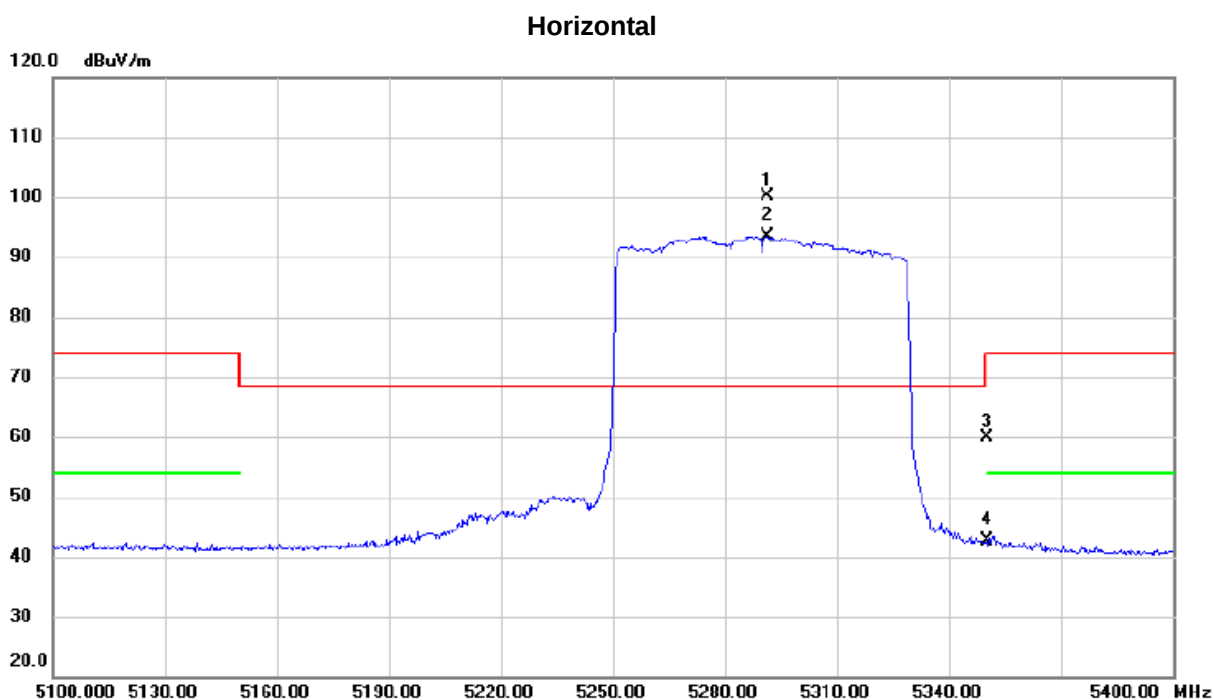


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5291.250	62.51	37.55	100.06	68.30	31.76	peak	
2	X	5291.250	55.88	37.55	93.43	68.30	25.13	AVG	
3		5350.000	22.17	37.73	59.90	74.00	-14.10	peak	
4		5350.000	4.80	37.73	42.53	54.00	-11.47	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5530 MHz--ANT.3+4

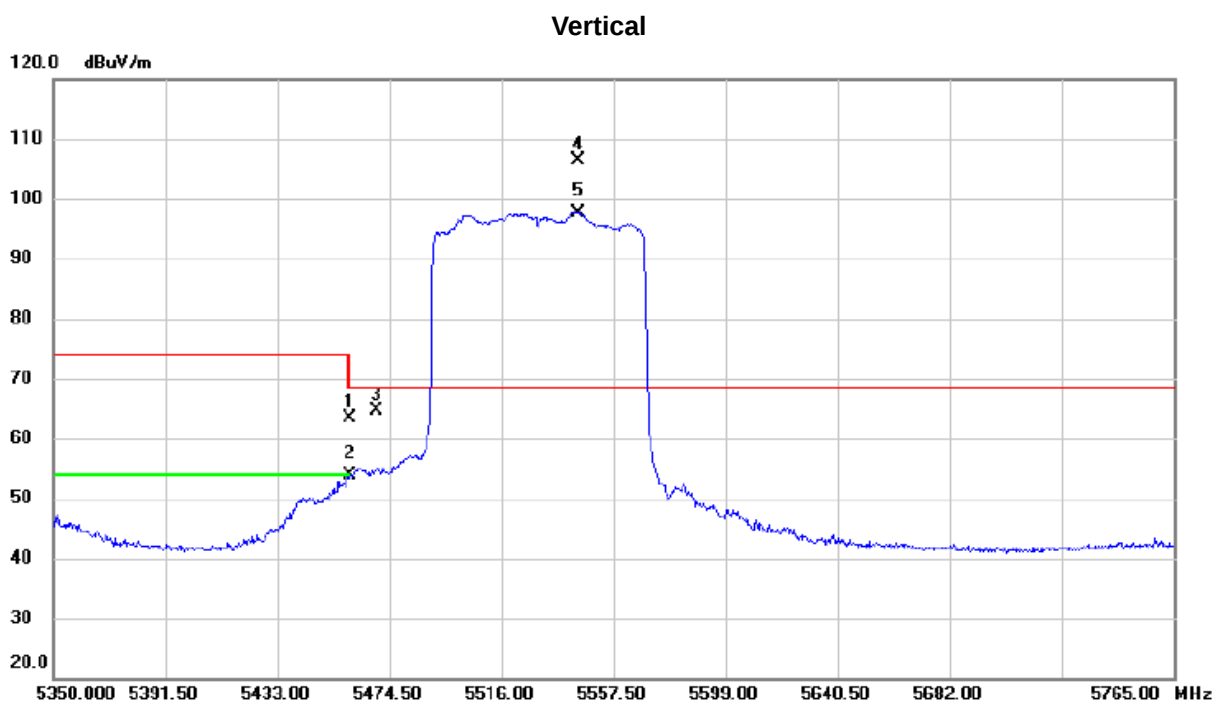


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5460.000	25.30	38.12	63.42	74.00	-10.58	peak	
2		5460.000	15.64	38.12	53.76	54.00	-0.24	AVG	
3		5470.000	26.55	38.15	64.70	68.30	-3.60	peak	
4	*	5544.427	68.09	38.28	106.37	68.30	38.07	peak	
5	X	5544.427	59.39	38.28	97.67	68.30	29.37	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5530 MHz--ANT.3+4

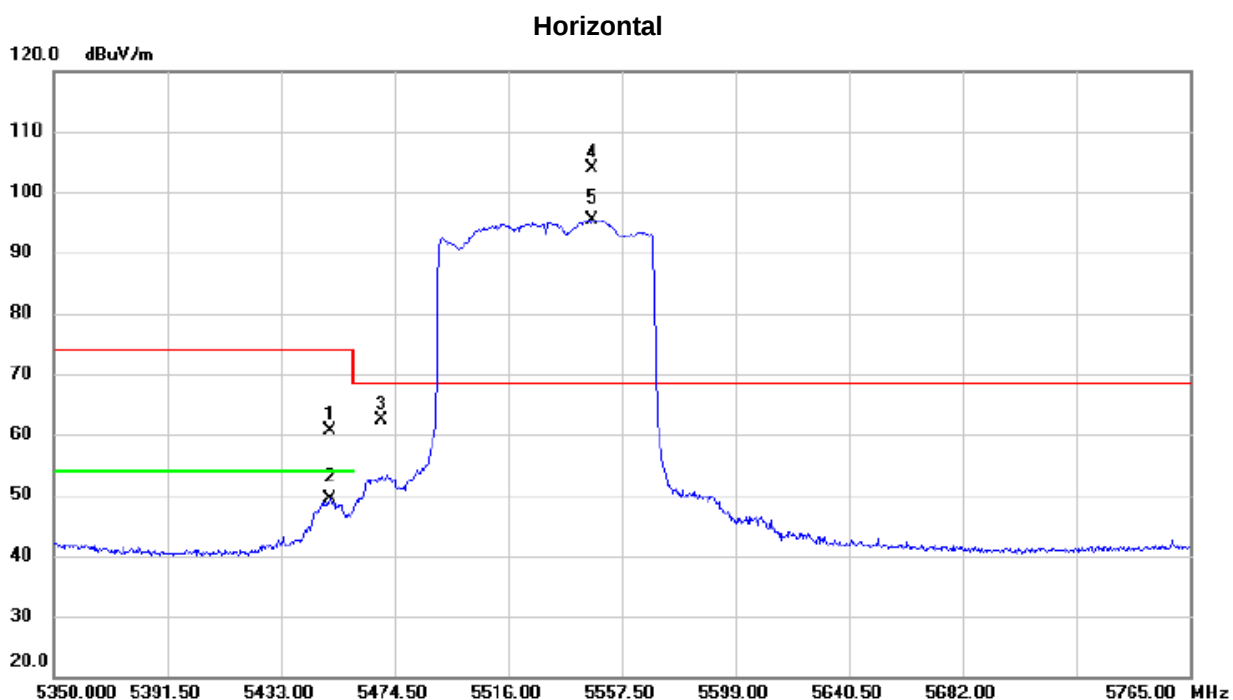


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5450.845	22.54	38.10	60.64	74.00	-13.36	peak	
2		5450.845	11.30	38.10	49.40	54.00	-4.60	AVG	
3		5470.000	24.35	38.15	62.50	68.30	-5.80	peak	
4	*	5546.710	65.65	38.28	103.93	68.30	35.63	peak	
5	X	5546.710	57.16	38.28	95.44	68.30	27.14	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5290+5530 MHz--ANT.1+2/3+4

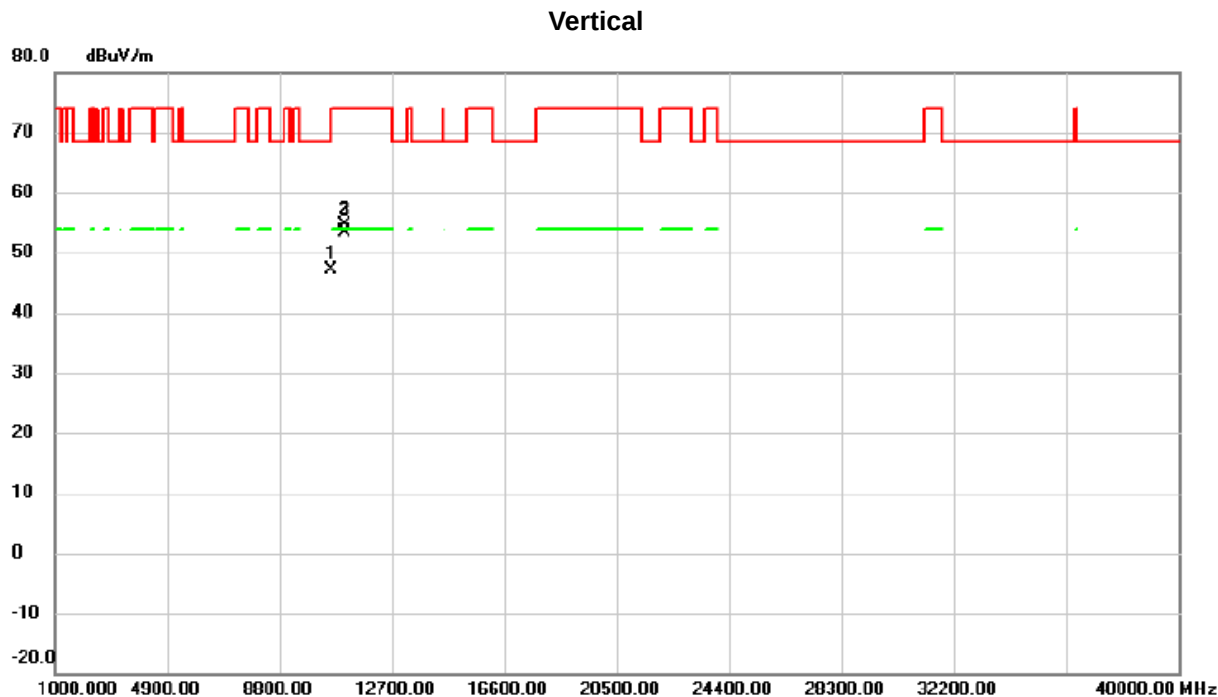


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10580.00	45.11	1.90	47.01	68.30	-21.29	peak	
2		11060.05	52.44	2.23	54.67	74.00	-19.33	peak	
3	*	11060.05	51.03	2.23	53.26	54.00	-0.74	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5290+5530 MHz--ANT.1+2/3+4

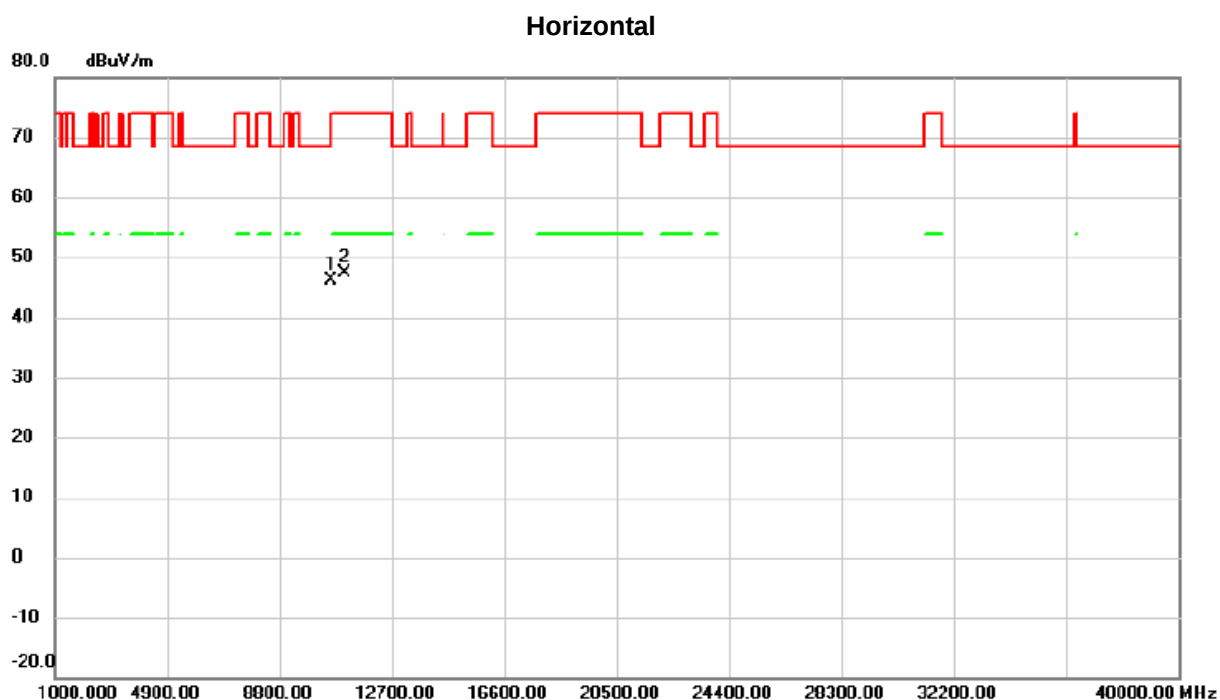


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	44.23	1.90	46.13	68.30	-22.17	peak	
2		11060.00	45.23	2.23	47.46	74.00	-26.54	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HEW80) Mode 5290 MHz--ANT.1+2

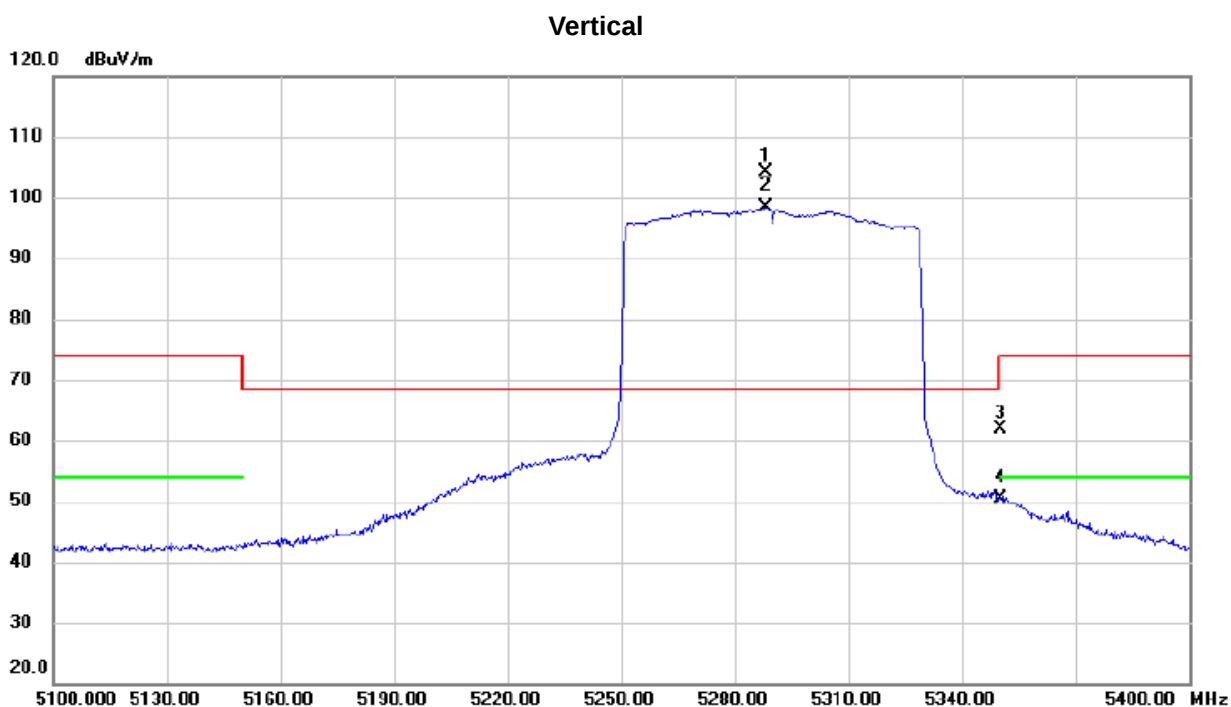


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5288.400	66.66	37.55	104.21	68.30	35.91	peak	
2	X	5288.400	60.85	37.55	98.40	68.30	30.10	AVG	
3		5350.000	24.21	37.73	61.94	74.00	-12.06	peak	
4		5350.000	12.74	37.73	50.47	54.00	-3.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HEW80) Mode 5290 MHz--ANT.1+2

Horizontal

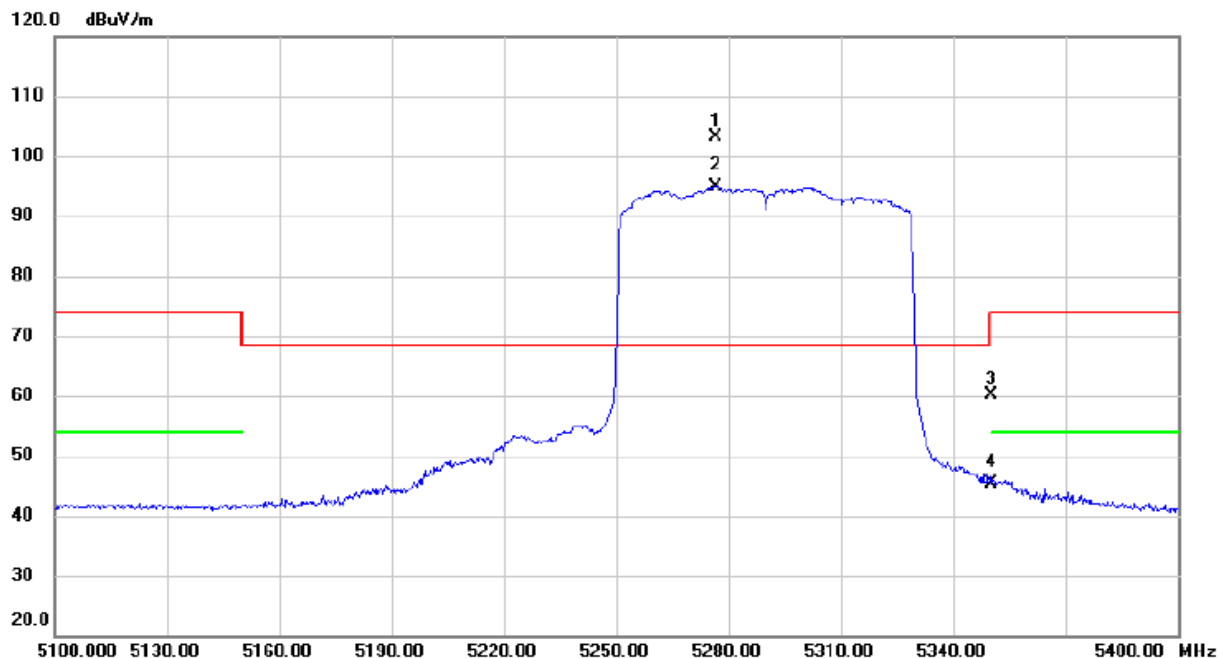


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5276.700	65.54	37.57	103.11	68.30	34.81	peak	
2	X	5276.700	57.29	37.57	94.86	68.30	26.56	AVG	
3		5350.000	22.29	37.73	60.02	74.00	-13.98	peak	
4		5350.000	7.57	37.73	45.30	54.00	-8.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5610 MHz--ANT.3+4

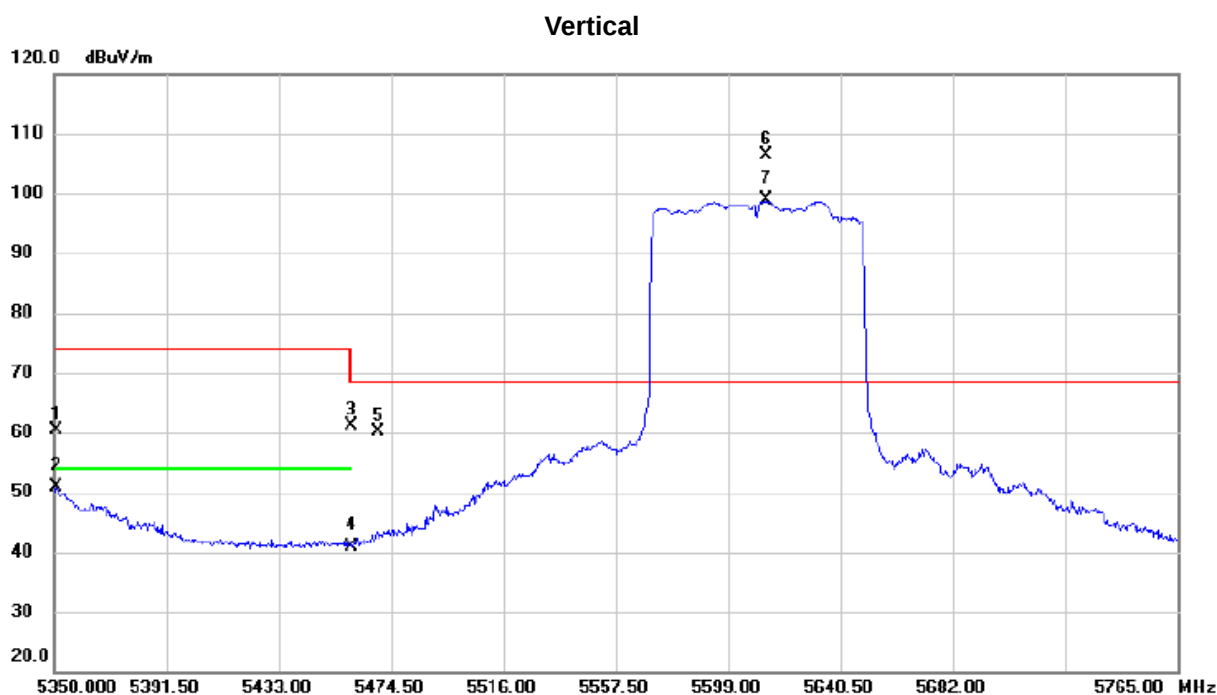

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5351.038	22.62	37.74	60.36	74.00	-13.64	peak	
2		5351.038	13.20	37.74	50.94	54.00	-3.06	AVG	
3		5460.000	22.97	38.12	61.09	74.00	-12.91	peak	
4		5460.000	2.87	38.12	40.99	54.00	-13.01	AVG	
5		5470.000	22.08	38.15	60.23	68.30	-8.07	peak	
6	*	5613.110	68.00	38.35	106.35	68.30	38.05	peak	
7	X	5613.110	60.41	38.35	98.76	68.30	30.46	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5610 MHz--ANT.3+4

Horizontal

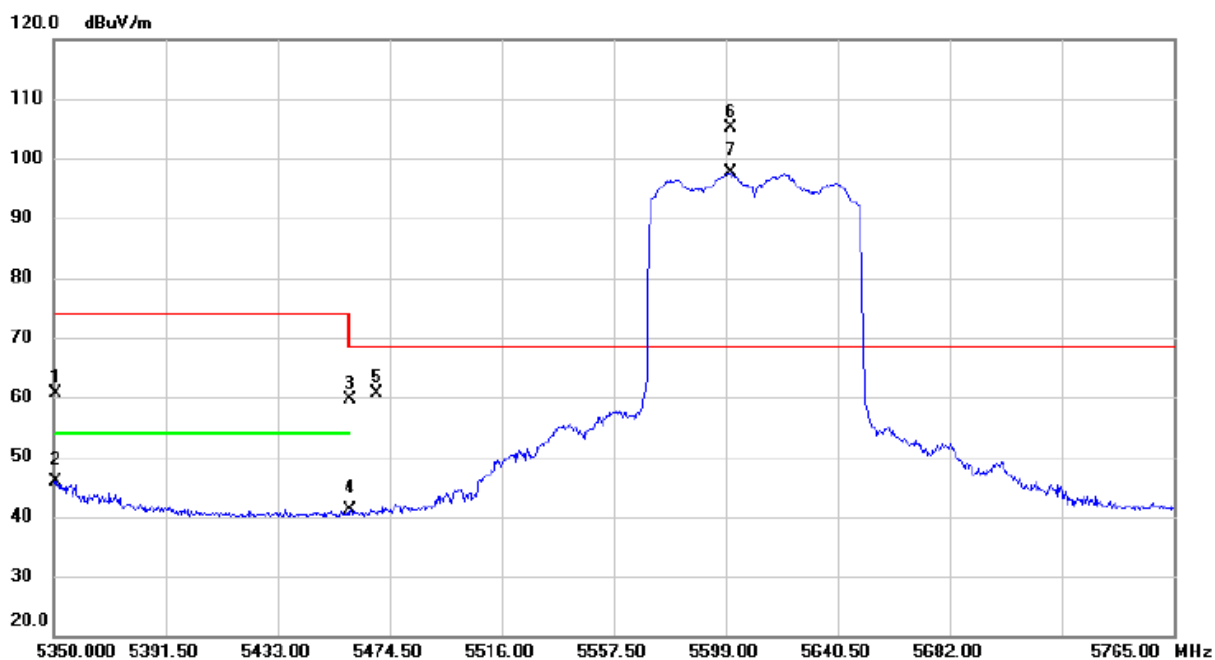


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5350.830	22.90	37.74	60.64	74.00	-13.36	peak	
2		5350.830	8.03	37.74	45.77	54.00	-8.23	AVG	
3		5460.000	21.43	38.12	59.55	74.00	-14.45	peak	
4		5460.000	2.89	38.12	41.01	54.00	-12.99	AVG	
5		5470.000	22.59	38.15	60.74	68.30	-7.56	peak	
6	*	5600.868	66.79	38.34	105.13	68.30	36.83	peak	
7	X	5600.868	59.19	38.34	97.53	68.30	29.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5290+5610 MHz--ANT.1+2/3+4

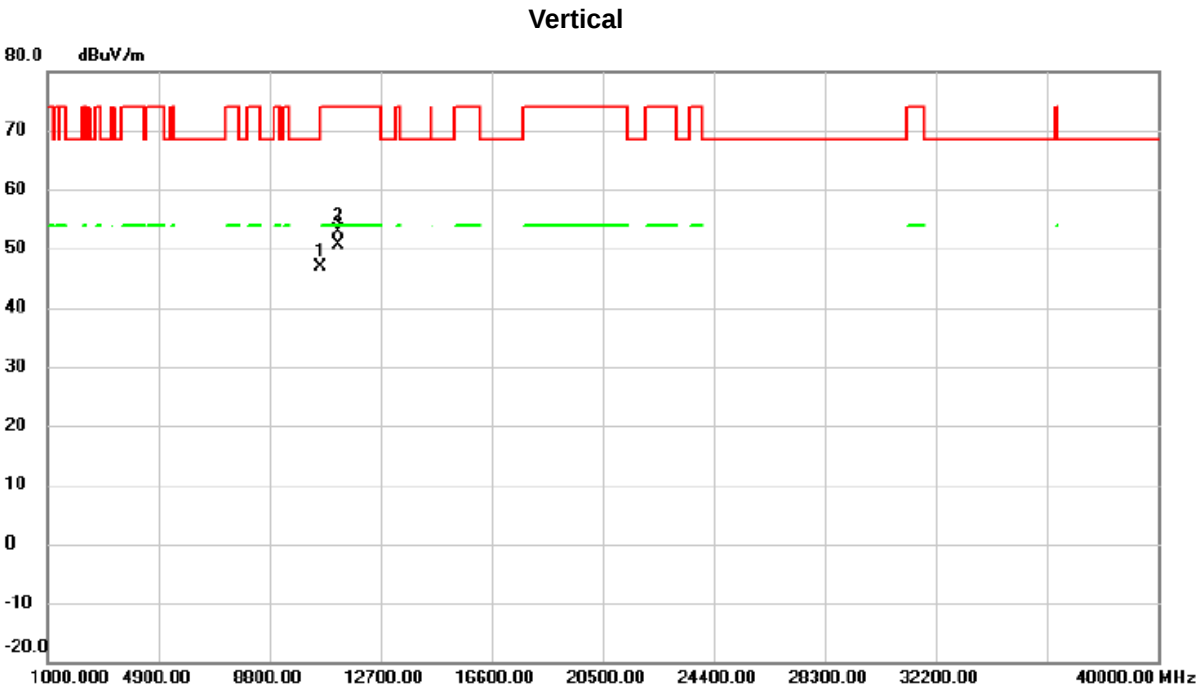


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10580.00	44.95	1.90	46.85	68.30	-21.45	peak	
2		11219.95	50.94	1.97	52.91	74.00	-21.09	peak	
3	*	11219.95	48.77	1.97	50.74	54.00	-3.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5290+5610 MHz--ANT.1+2/3+4

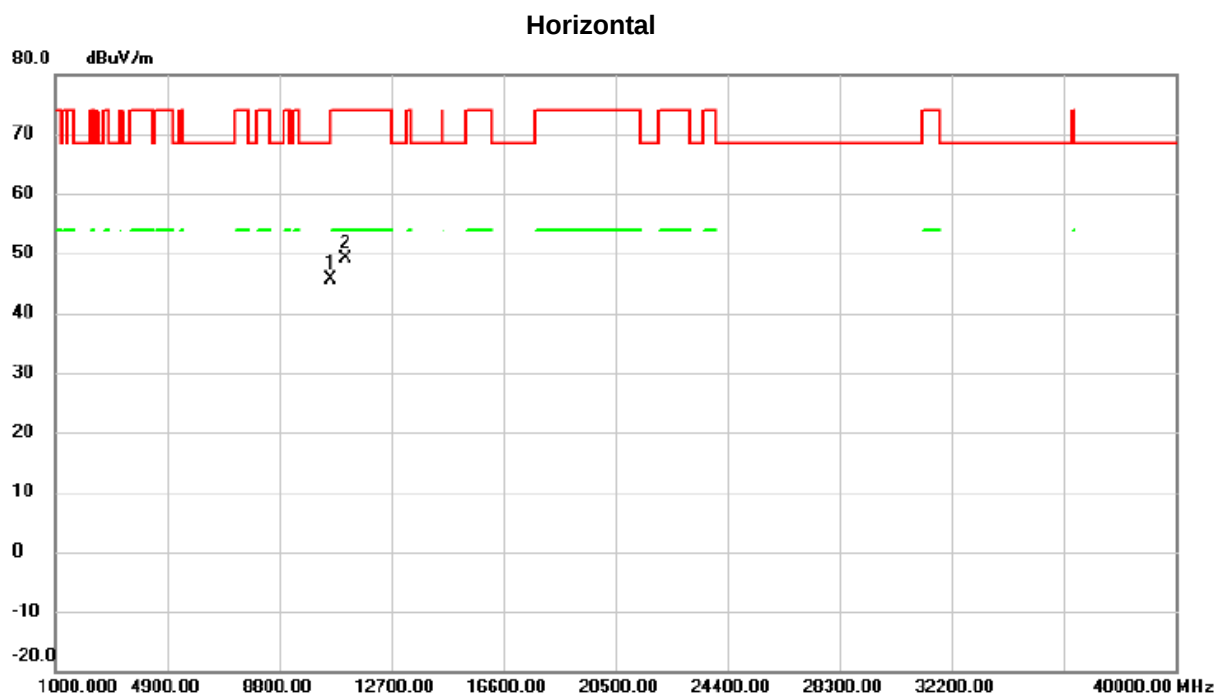


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	43.85	1.90	45.75	68.30	-22.55	peak	
2		11118.55	47.13	2.11	49.24	74.00	-24.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HEW80) Mode 5290 MHz--ANT.1+2

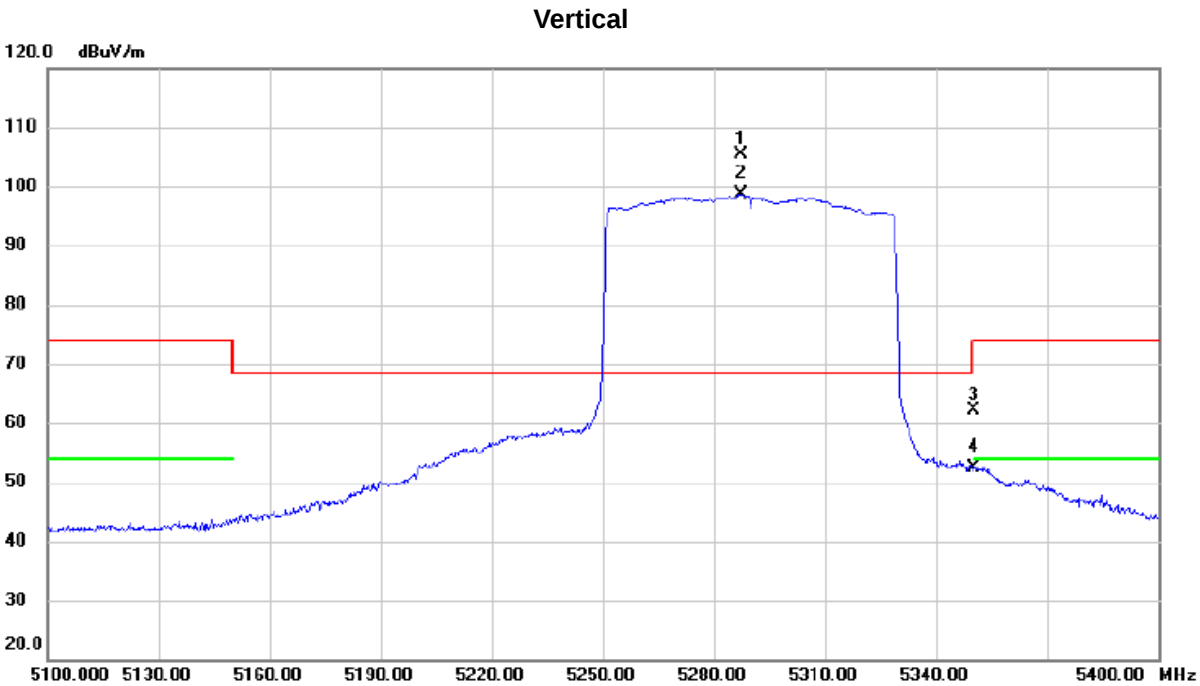

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5287.500	67.94	37.55	105.49	68.30	37.19	peak	
2	X	5287.500	61.15	37.55	98.70	68.30	30.40	AVG	
3		5350.000	24.32	37.73	62.05	74.00	-11.95	peak	
4		5350.000	14.69	37.73	52.42	54.00	-1.58	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HEW80) Mode 5290 MHz--ANT.1+2

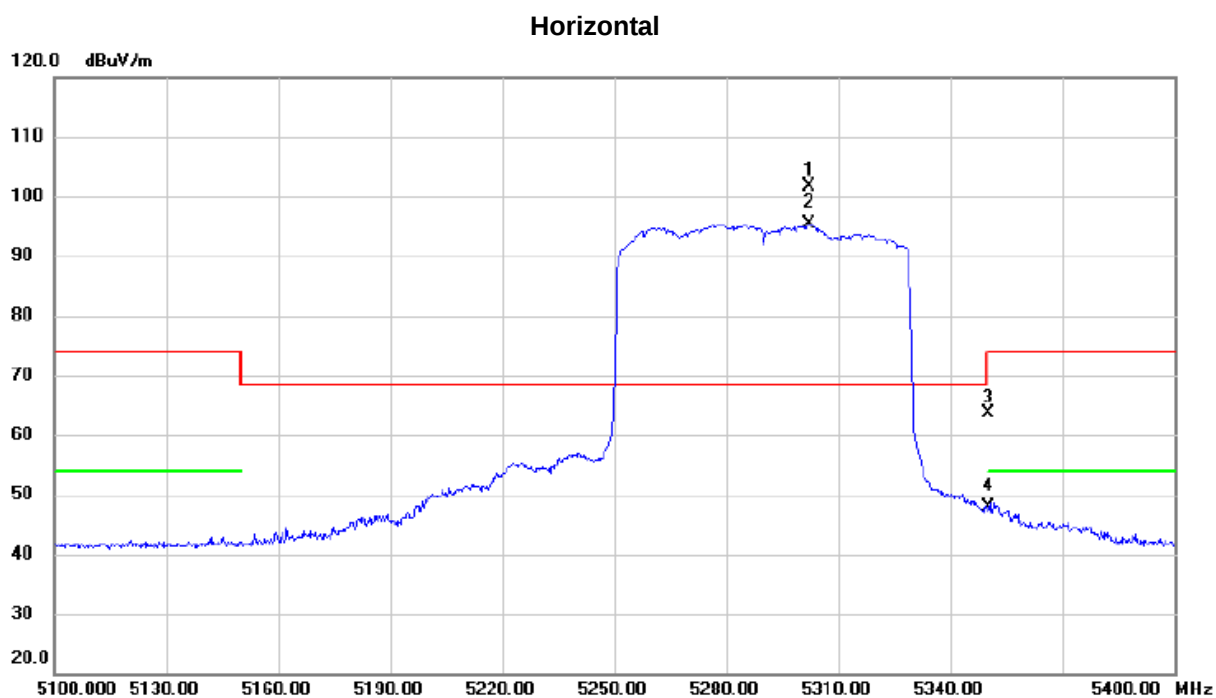


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5302.050	63.98	37.55	101.53	68.30	33.23	peak	
2	X	5302.050	57.75	37.55	95.30	68.30	27.00	AVG	
3		5350.000	26.01	37.73	63.74	74.00	-10.26	peak	
4		5350.000	10.03	37.73	47.76	54.00	-6.24	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HEW80) Mode 5775 MHz--ANT.3+4

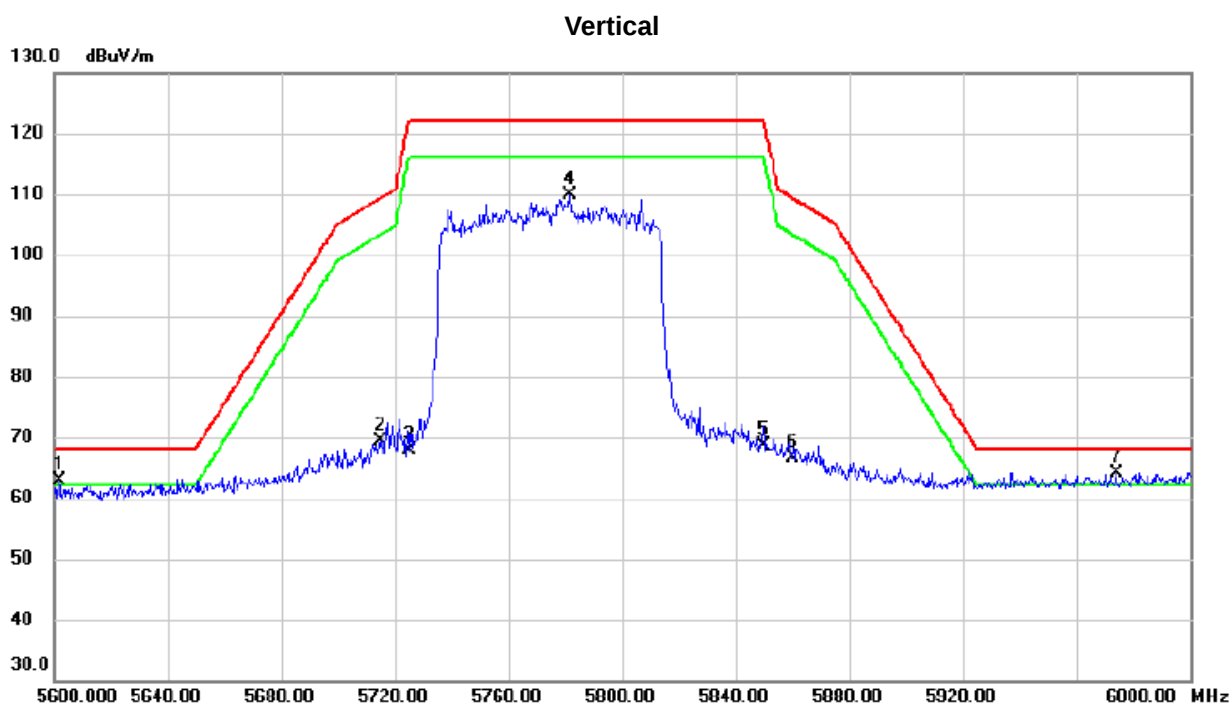


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	5601.800	24.54	38.34	62.88	68.20	-5.32	peak	
2		5715.000	31.01	38.46	69.47	109.40	-39.93	peak	
3		5725.000	29.43	38.50	67.93	122.20	-54.27	peak	
4		5781.400	71.24	38.71	109.95	122.20	-12.25	peak	
5		5850.000	29.74	38.91	68.65	122.20	-53.55	peak	
6		5860.000	27.61	38.95	66.56	109.40	-42.84	peak	
7	*	5974.200	25.05	39.20	64.25	68.20	-3.95	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HEW80) Mode 5775 MHz--ANT.3+4

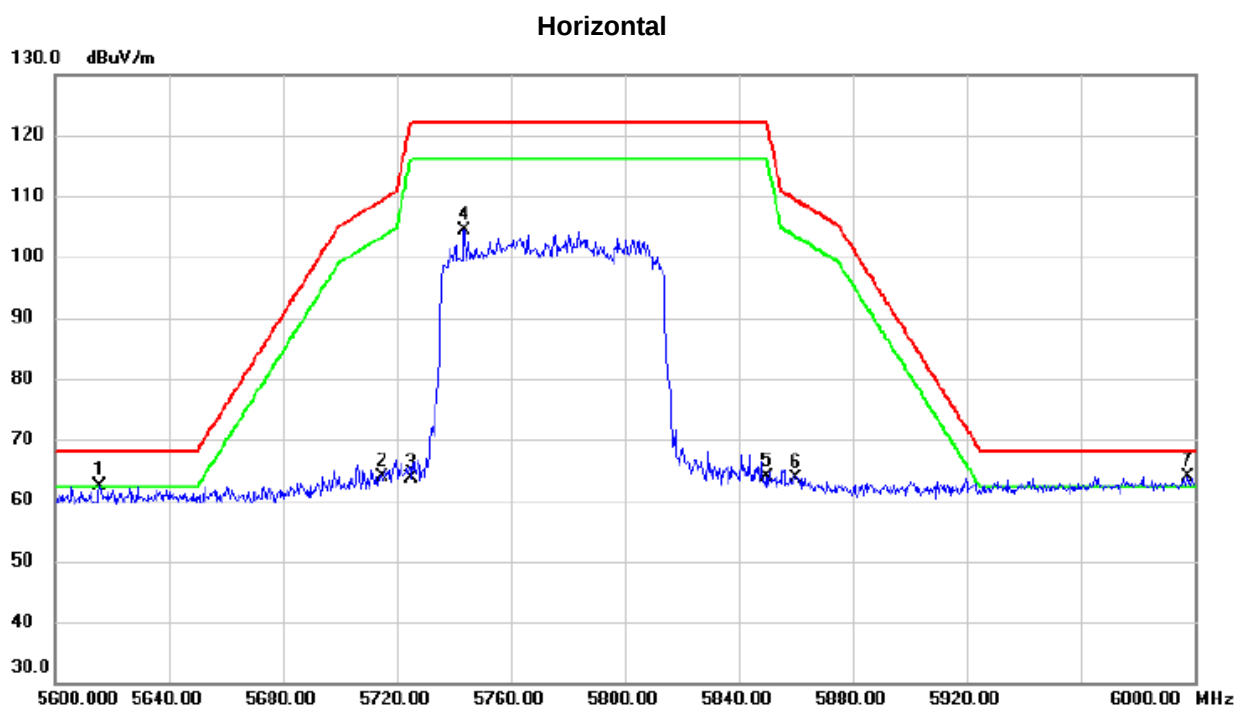


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	5615.800	23.98	38.35	62.33	68.20	-5.87	peak	
2		5715.000	25.42	38.46	63.88	109.40	-45.52	peak	
3		5725.000	25.12	38.50	63.62	122.20	-58.58	peak	
4		5743.600	65.90	38.57	104.47	122.20	-17.73	peak	
5		5850.000	24.98	38.91	63.89	122.20	-58.31	peak	
6		5860.000	24.57	38.95	63.52	109.40	-45.88	peak	
7	*	5997.600	24.69	39.25	63.94	68.20	-4.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5290+5775 MHz--ANT.1+2/3+4

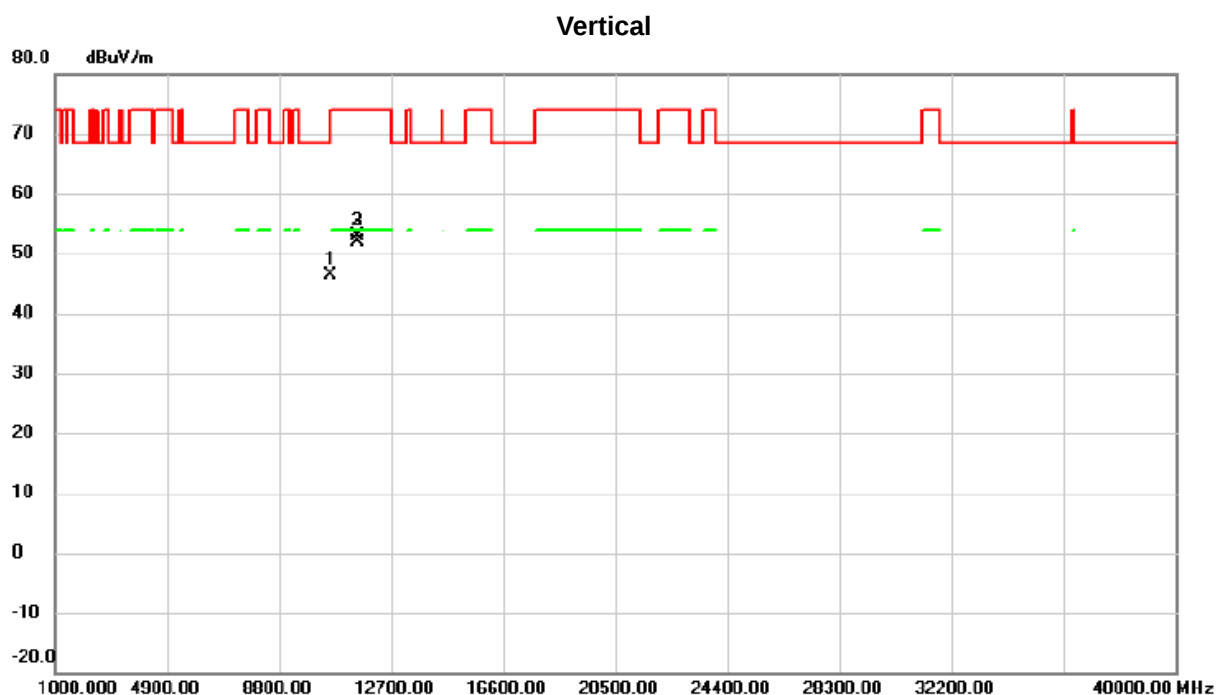


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10580.00	44.39	1.90	46.29	68.30	-22.01	peak	
2		11549.50	50.54	2.25	52.79	74.00	-21.21	peak	
3	*	11549.92	49.64	2.25	51.89	54.00	-2.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5290+5775 MHz--ANT.1+2/3+4

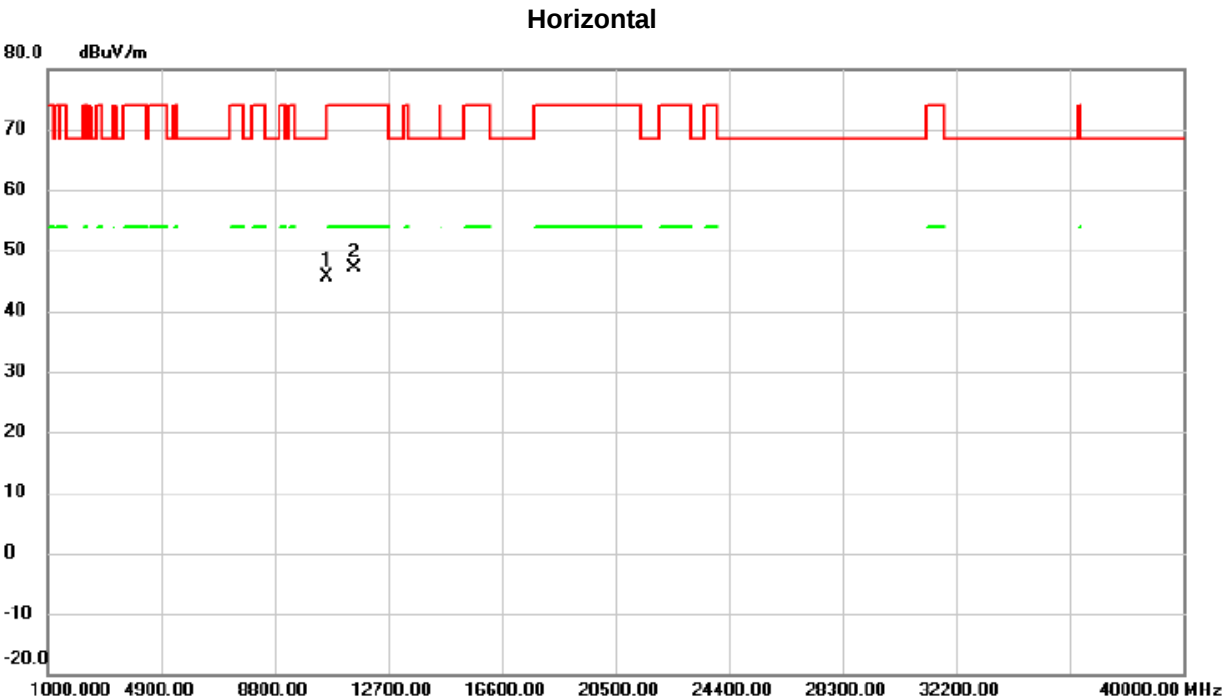

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	43.65	1.90	45.55	68.30	-22.75	peak	
2		11550.00	44.76	2.26	47.02	74.00	-26.98	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5530 MHz--ANT.1+2

Vertical

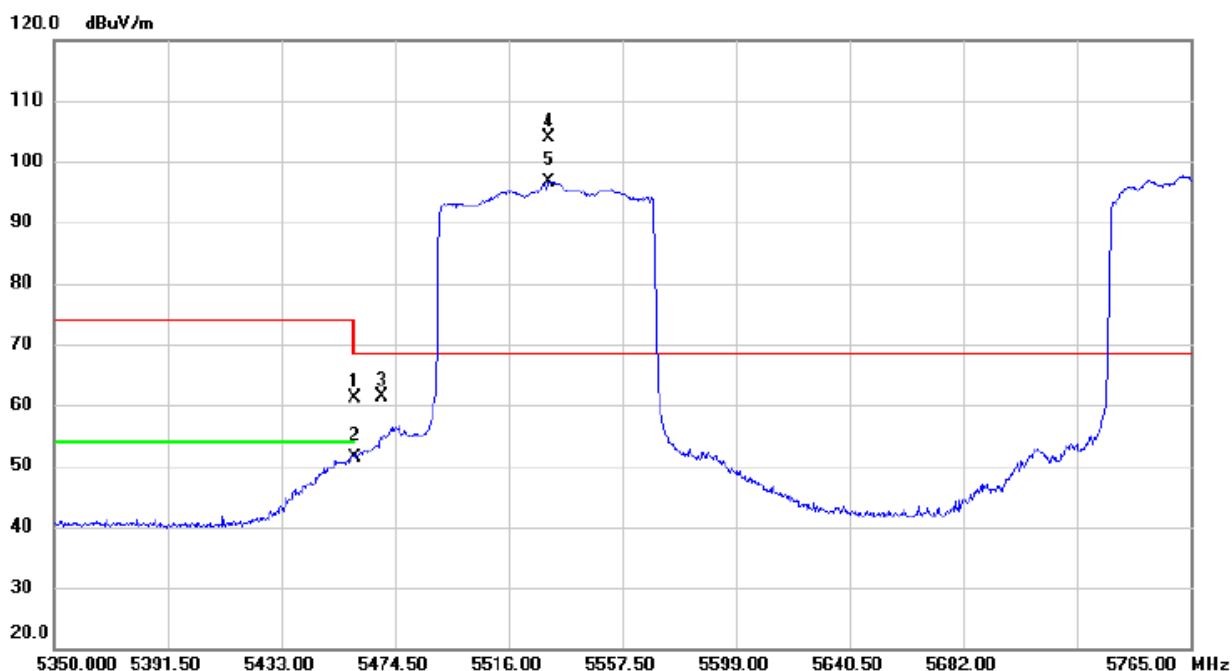


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	22.98	38.12	61.10	74.00	-12.90	peak	
2		5460.000	13.34	38.12	51.46	54.00	-2.54	AVG	
3		5470.000	23.26	38.15	61.41	68.30	-6.89	peak	
4	*	5530.940	65.57	38.27	103.84	68.30	35.54	peak	
5	X	5530.940	58.48	38.27	96.75	68.30	28.45	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5530 MHz--ANT.1+2

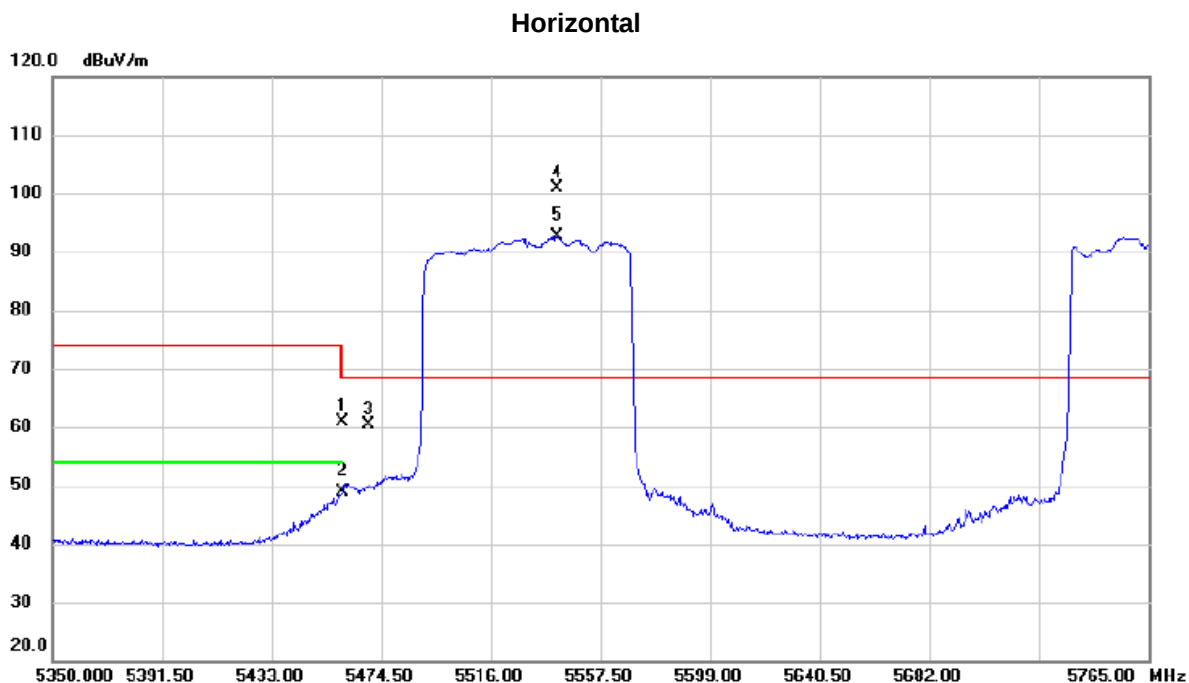


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	22.69	38.12	60.81	74.00	-13.19	peak	
2		5460.000	10.77	38.12	48.89	54.00	-5.11	AVG	
3		5470.000	22.34	38.15	60.49	68.30	-7.81	peak	
4	*	5541.108	62.59	38.28	100.87	68.30	32.57	peak	
5	X	5541.108	54.33	38.28	92.61	68.30	24.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HEW80) Mode 5775 MHz--ANT.3+4

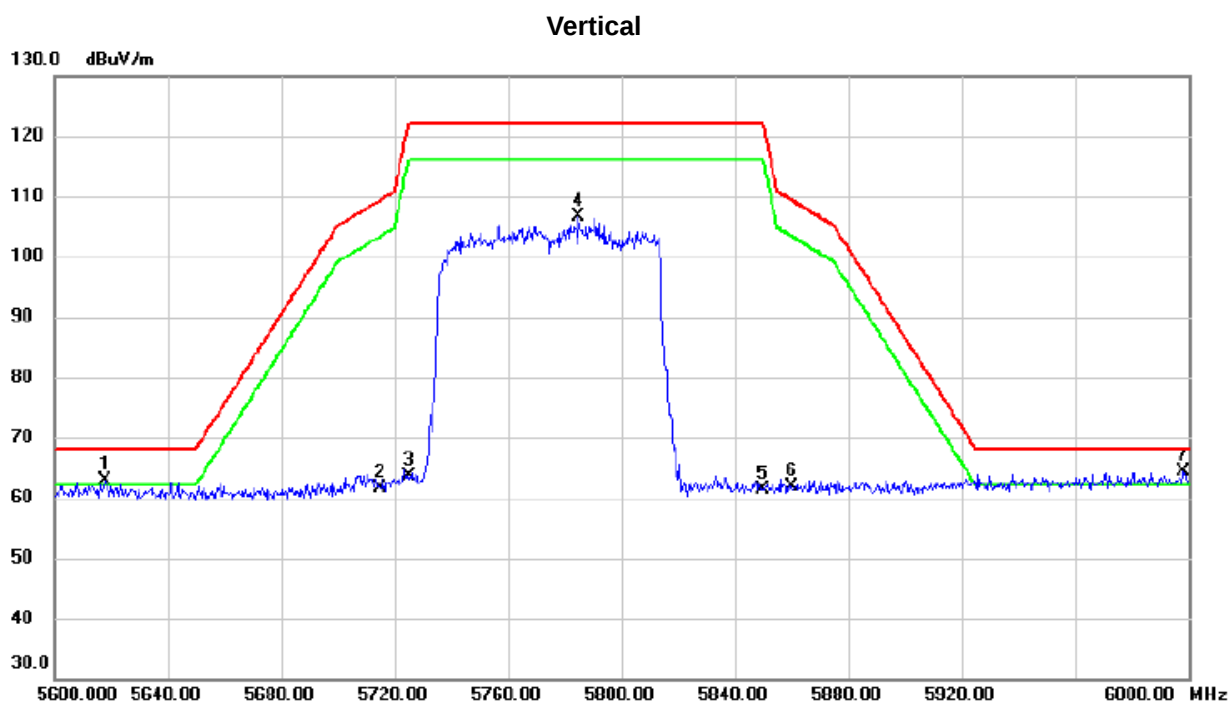


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	5618.000	24.52	38.35	62.87	68.20	-5.33	peak	
2		5715.000	23.11	38.46	61.57	109.40	-47.83	peak	
3		5725.000	25.22	38.50	63.72	122.20	-58.48	peak	
4		5785.000	67.90	38.73	106.63	122.20	-15.57	peak	
5		5850.000	22.47	38.91	61.38	122.20	-60.82	peak	
6		5860.000	22.93	38.95	61.88	109.40	-47.52	peak	
7	*	5998.400	25.16	39.25	64.41	68.20	-3.79	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HEW80) Mode 5775 MHz--ANT.3+4

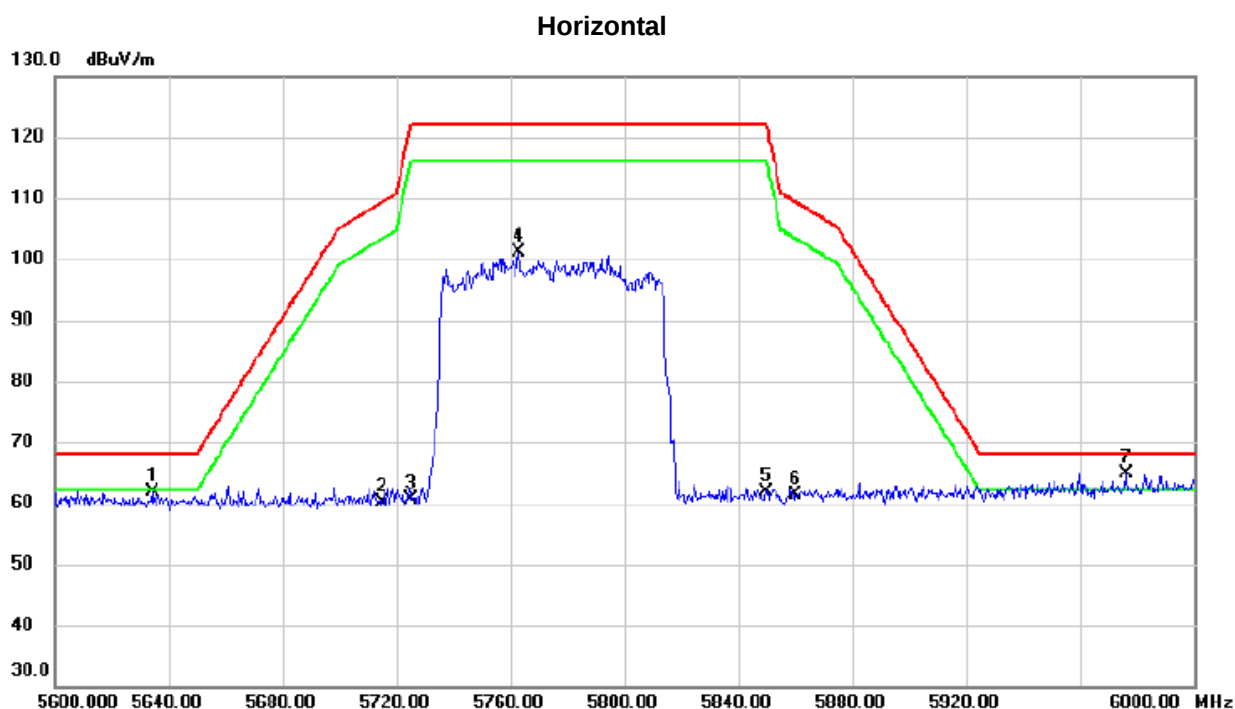


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5634.200	23.63	38.36	61.99	68.20	-6.21	peak	
2		5715.000	21.72	38.46	60.18	109.40	-49.22	peak	
3		5725.000	22.24	38.50	60.74	122.20	-61.46	peak	
4		5762.800	62.52	38.64	101.16	122.20	-21.04	peak	
5		5850.000	22.97	38.91	61.88	122.20	-60.32	peak	
6		5860.000	22.51	38.95	61.46	109.40	-47.94	peak	
7	*	5976.200	25.69	39.20	64.89	68.20	-3.31	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5530+5775 MHz--ANT.1+2/3+4

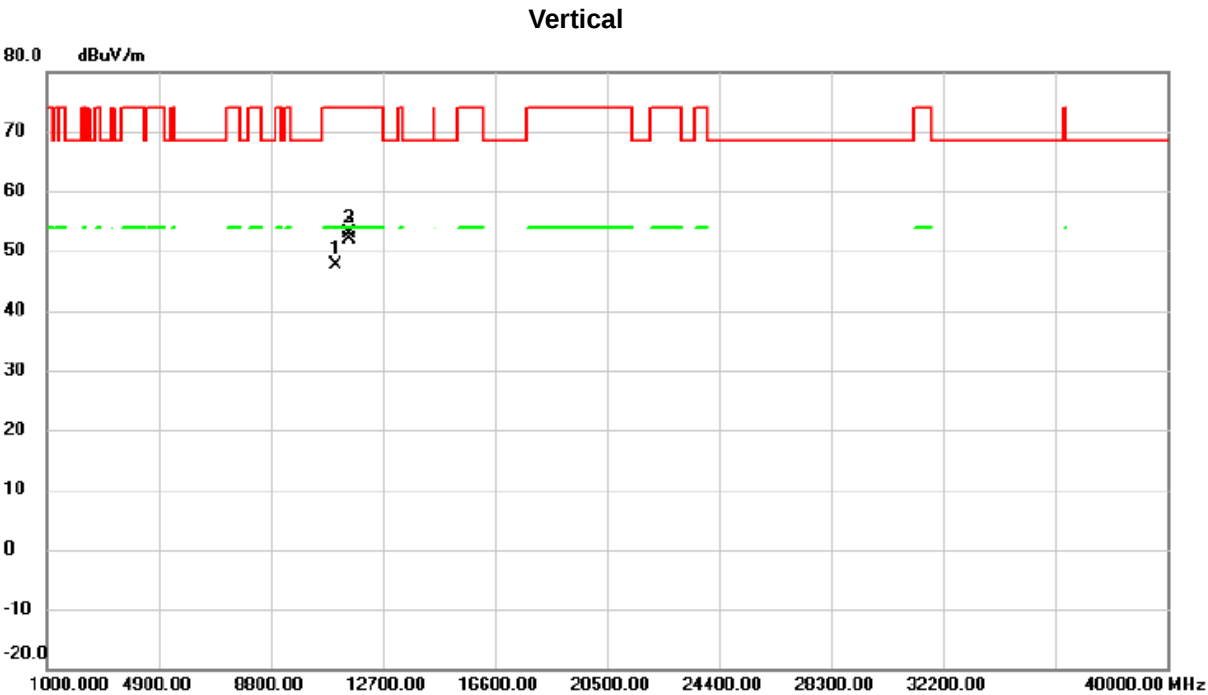


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	45.40	2.23	47.63	74.00	-26.37	peak	
2		11549.50	50.54	2.25	52.79	74.00	-21.21	peak	
3	*	11549.92	49.68	2.25	51.93	54.00	-2.07	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5530+5775 MHz--ANT.1+2/3+4

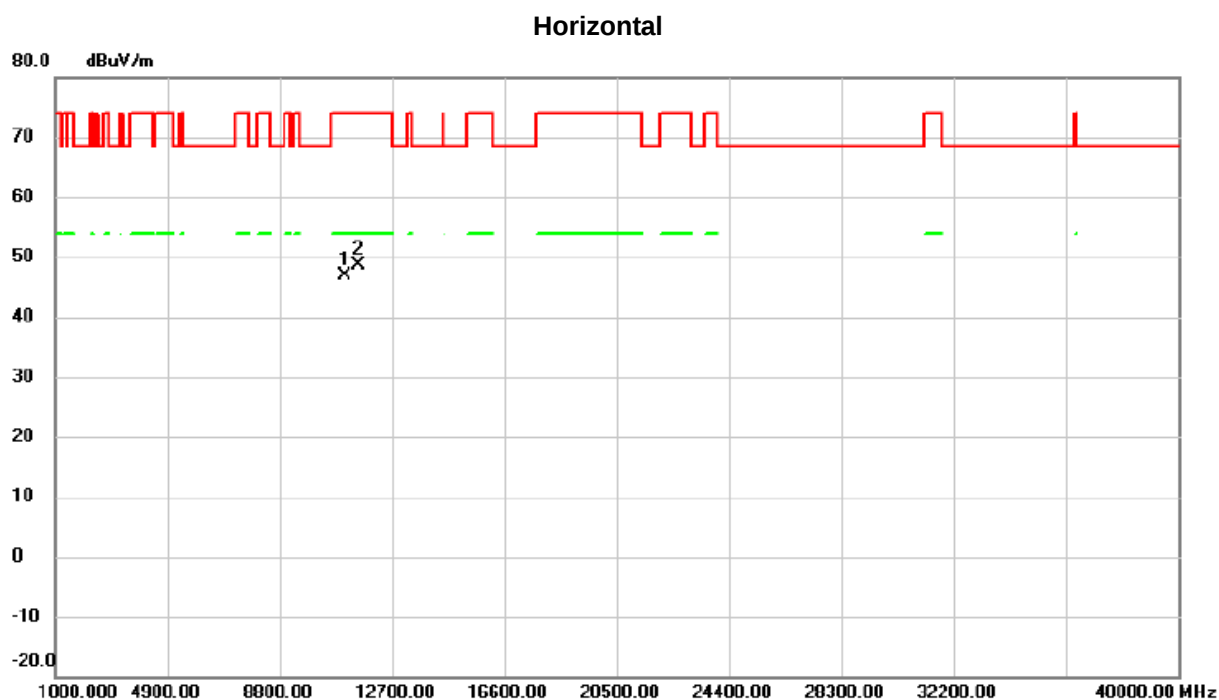

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	44.53	2.23	46.76	74.00	-27.24	peak	
2	*	11550.00	46.26	2.26	48.52	74.00	-25.48	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5610 MHz--ANT.1+2

Vertical

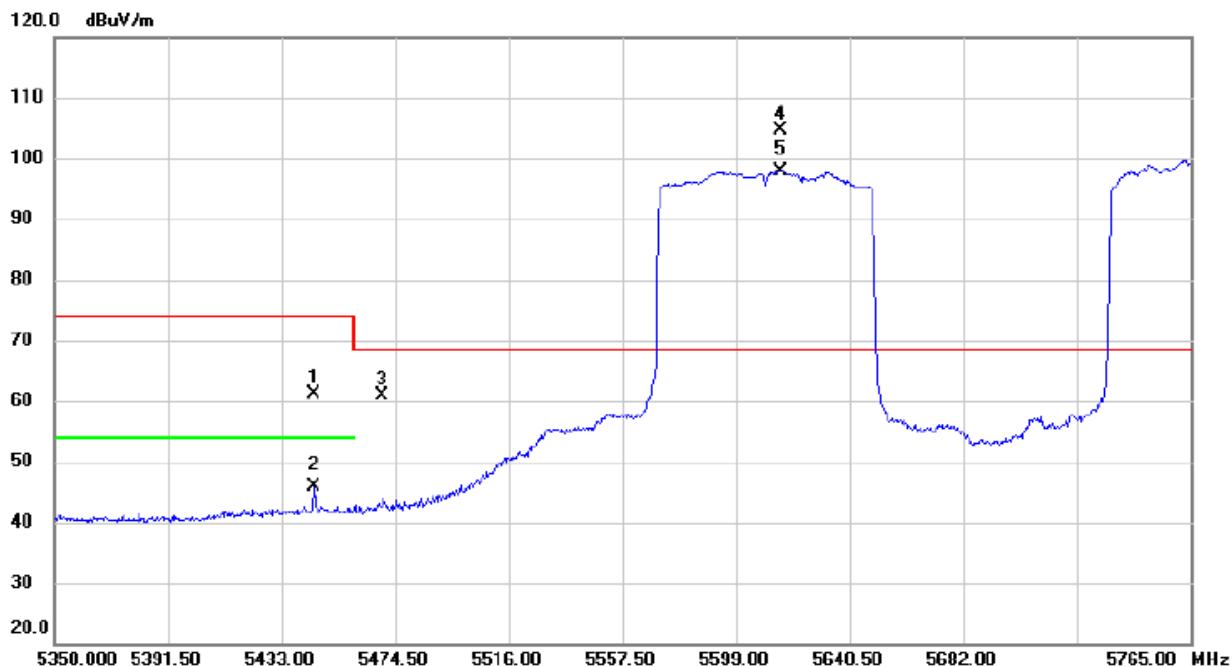


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5445.035	22.99	38.07	61.06	74.00	-12.94	peak	
2		5445.035	7.87	38.07	45.94	54.00	-8.06	AVG	
3		5470.000	22.72	38.15	60.87	68.30	-7.43	peak	
4	*	5615.185	66.34	38.35	104.69	68.30	36.39	peak	
5	X	5615.185	59.49	38.35	97.84	68.30	29.54	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HEW80) Mode 5610 MHz--ANT.1+2

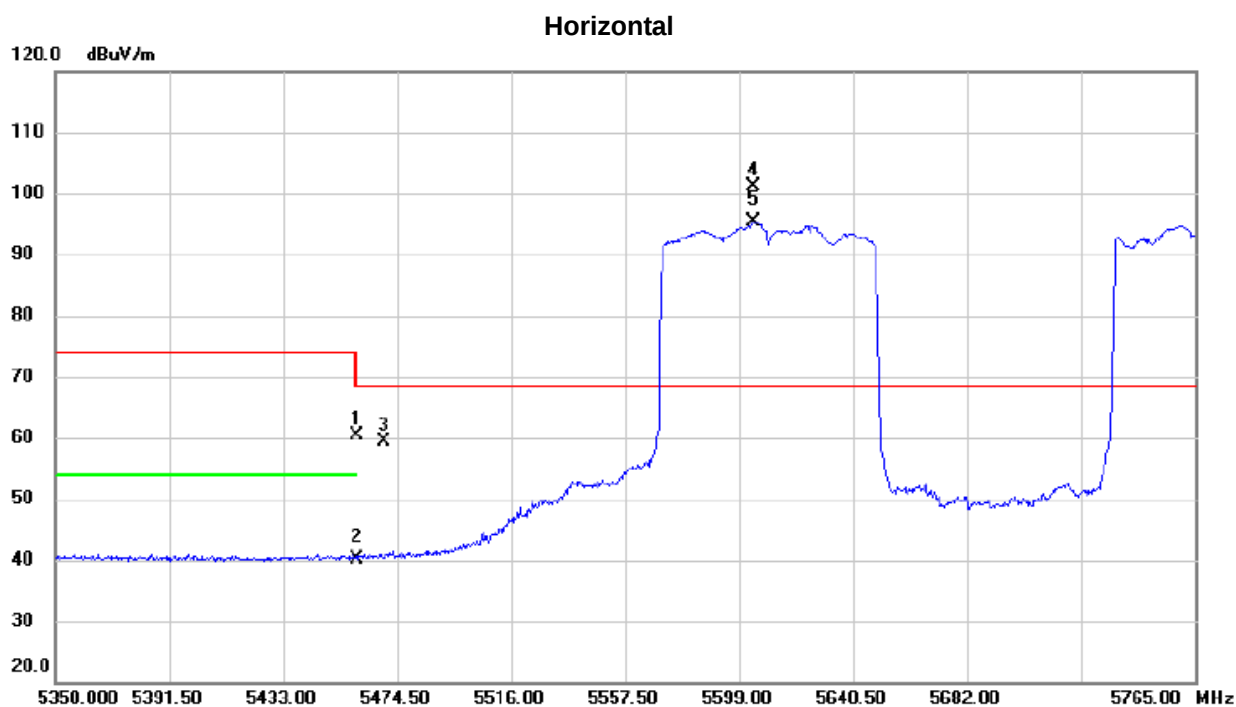


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5460.000	22.36	38.12	60.48	74.00	-13.52	peak	
2		5460.000	2.11	38.12	40.23	54.00	-13.77	AVG	
3		5470.000	21.33	38.15	59.48	68.30	-8.82	peak	
4	*	5604.188	62.85	38.34	101.19	68.30	32.89	peak	
5	X	5604.188	56.96	38.34	95.30	68.30	27.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HEW80) Mode 5775 MHz--ANT.3+4

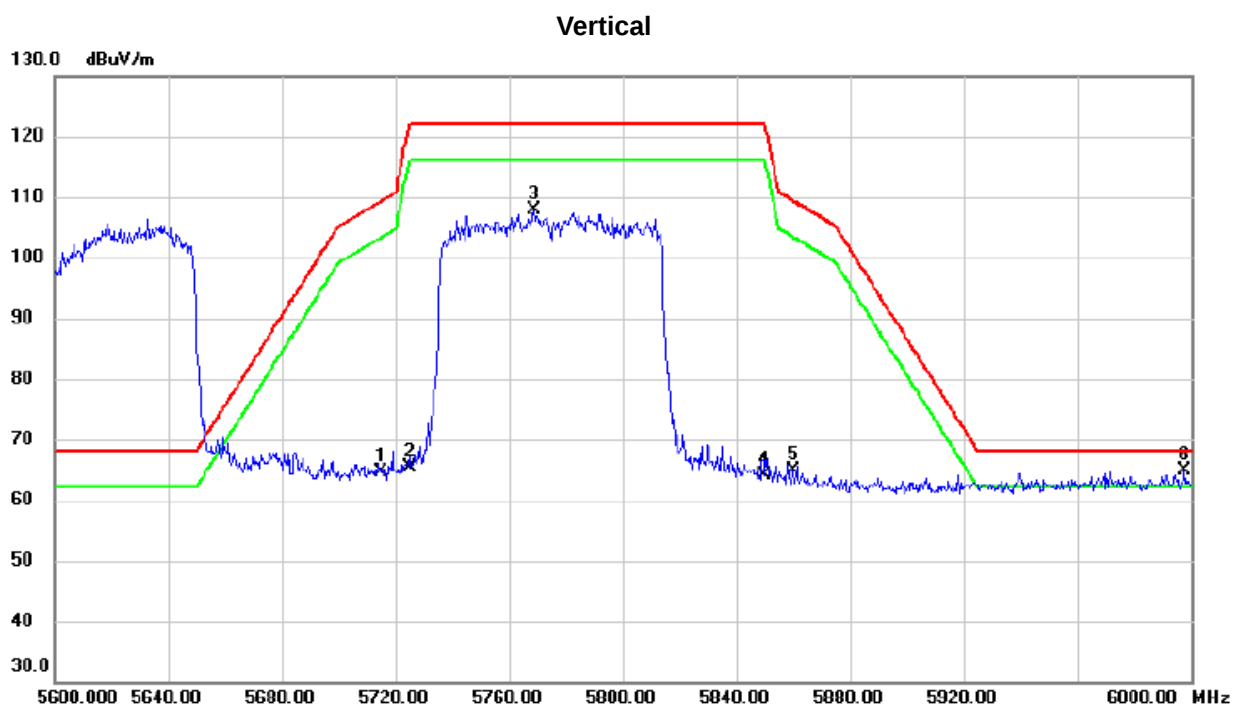


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	26.10	38.46	64.56	109.40	-44.84	peak	
2		5725.000	26.76	38.50	65.26	122.20	-56.94	peak	
3		5769.000	69.28	38.66	107.94	122.20	-14.26	peak	
4		5850.000	25.22	38.91	64.13	122.20	-58.07	peak	
5		5860.000	25.99	38.95	64.94	109.40	-44.46	peak	
6	*	5997.800	25.54	39.25	64.79	68.20	-3.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HEW80) Mode 5775 MHz--ANT.3+4

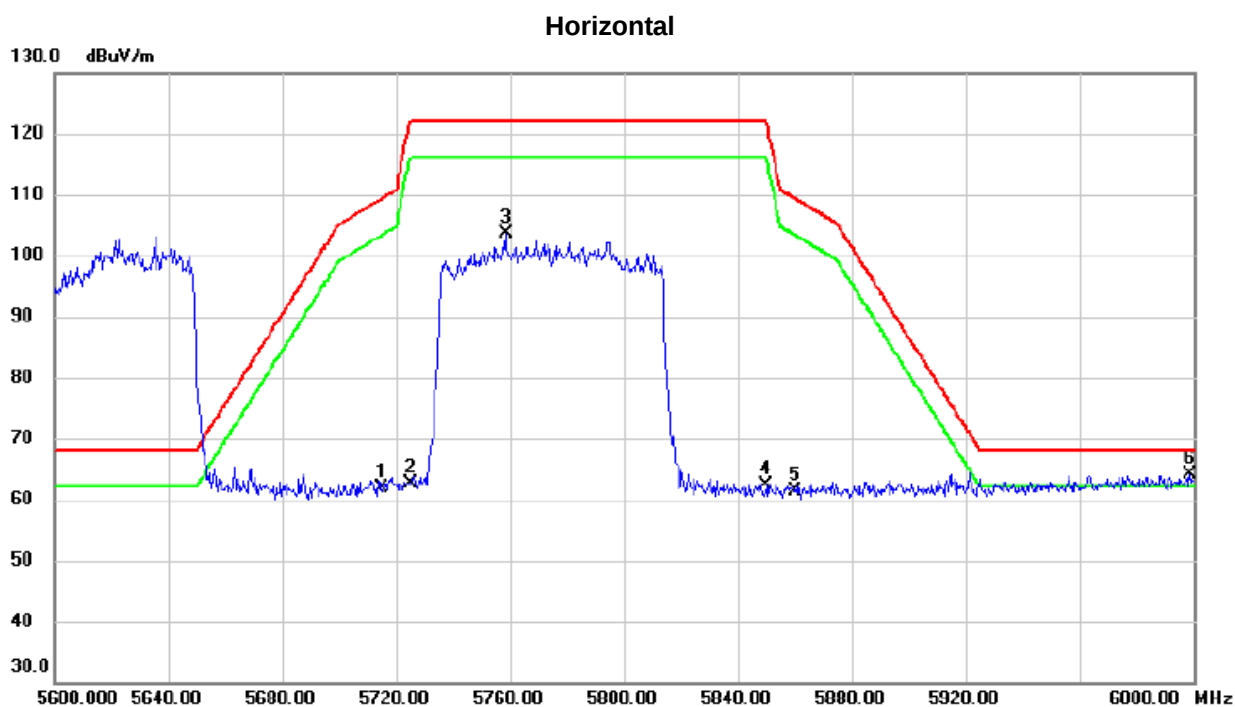


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	23.50	38.46	61.96	109.40	-47.44	peak	
2		5725.000	24.13	38.50	62.63	122.20	-59.57	peak	
3		5758.600	64.92	38.63	103.55	122.20	-18.65	peak	
4		5850.000	23.54	38.91	62.45	122.20	-59.75	peak	
5		5860.000	22.34	38.95	61.29	109.40	-48.11	peak	
6	*	5998.800	24.89	39.25	64.14	68.20	-4.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5610+5775 MHz--ANT.1+2/3+4

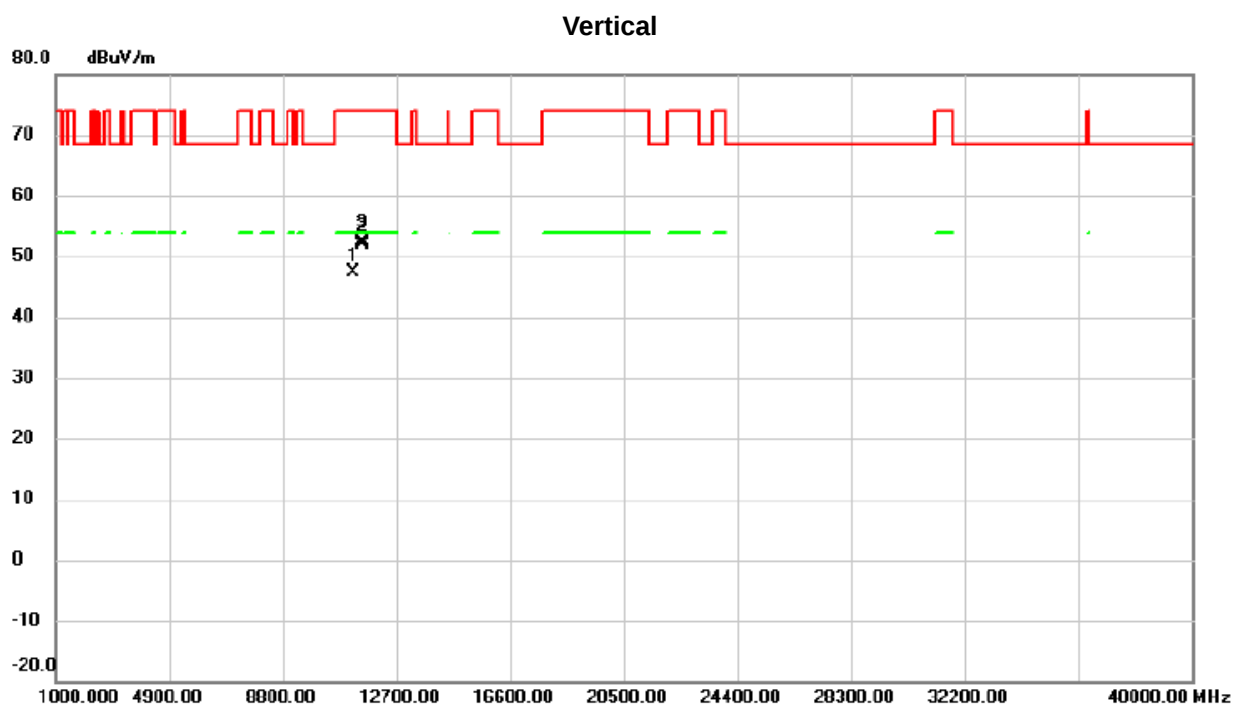


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	45.33	1.97	47.30	74.00	-26.70	peak	
2		11549.50	50.17	2.25	52.42	74.00	-21.58	peak	
3	*	11549.92	49.64	2.25	51.89	54.00	-2.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5610+5775 MHz--ANT.1+2/3+4

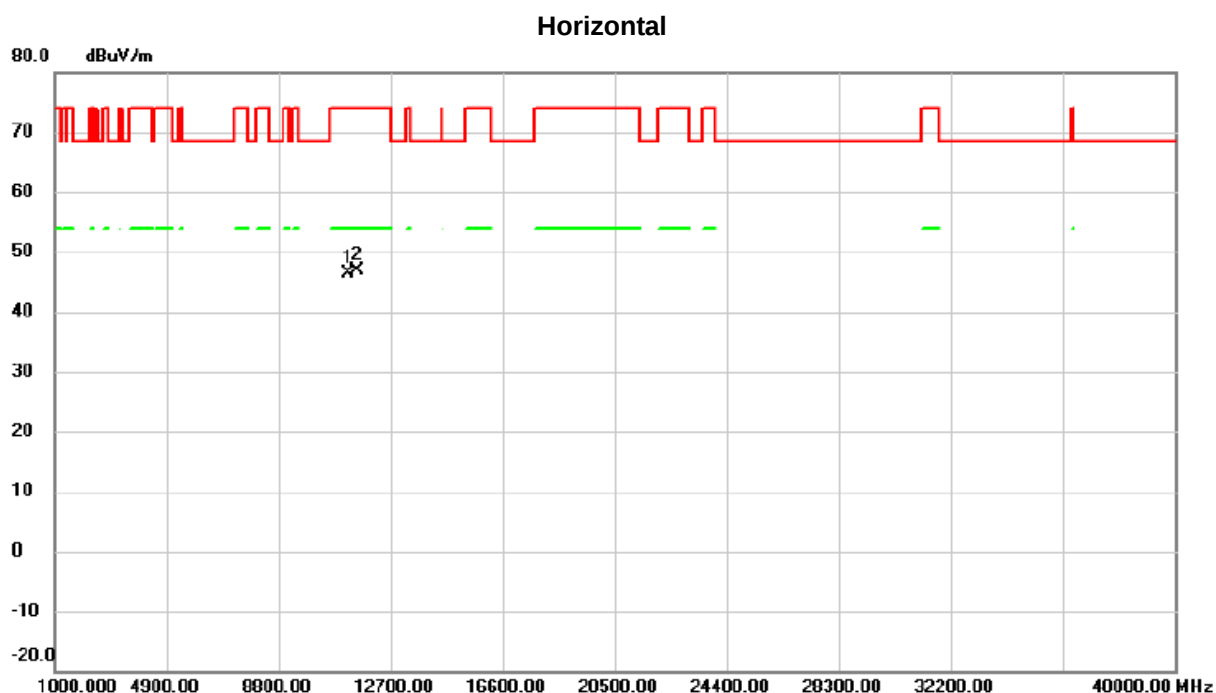


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	44.49	1.97	46.46	74.00	-27.54	peak	
2	*	11550.00	44.61	2.26	46.87	74.00	-27.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5210+5290 MHz--ANT.1+2/3+4

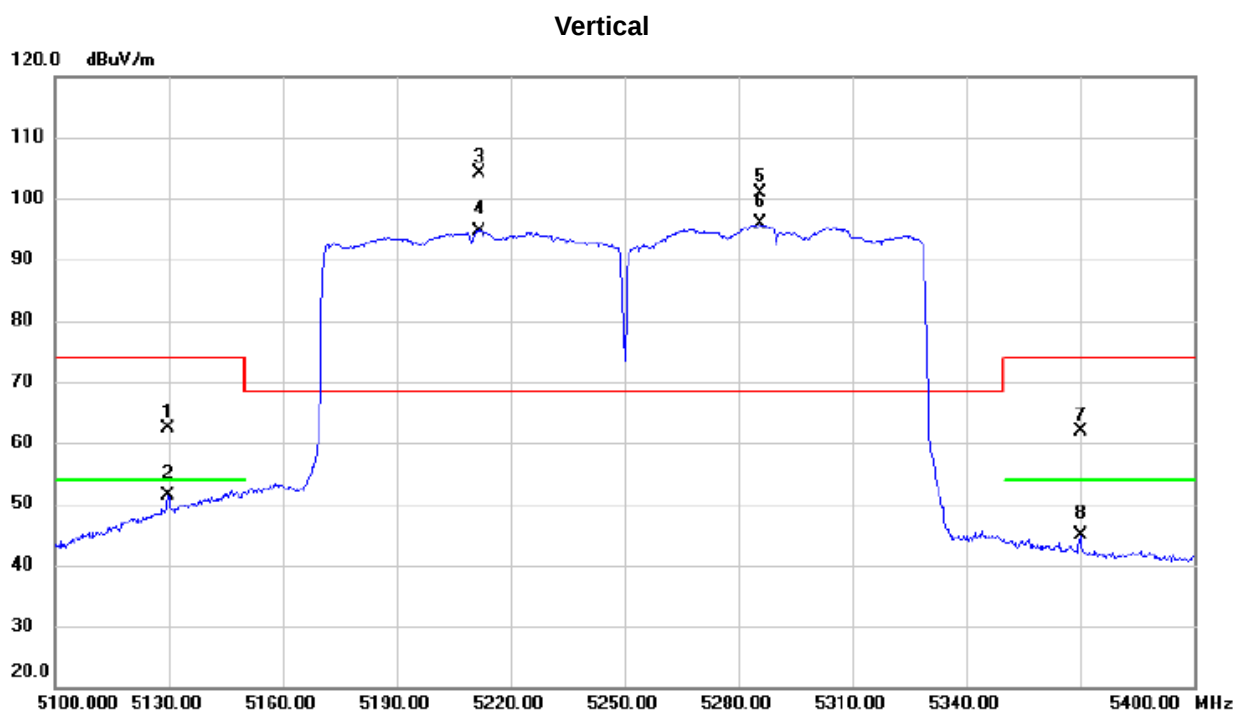


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5129.850	24.39	37.95	62.34	74.00	-11.66	peak	
2		5129.850	13.50	37.95	51.45	54.00	-2.55	AVG	
3	*	5211.750	66.41	37.66	104.07	68.30	35.77	peak	
4	X	5211.750	57.09	37.66	94.75	68.30	26.45	AVG	
5	X	5285.850	63.24	37.55	100.79	68.30	32.49	peak	
6	X	5285.850	58.23	37.55	95.78	68.30	27.48	AVG	
7		5370.150	24.13	37.82	61.95	74.00	-12.05	peak	
8		5370.150	6.97	37.82	44.79	54.00	-9.21	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5210+5290 MHz--ANT.1+2/3+4

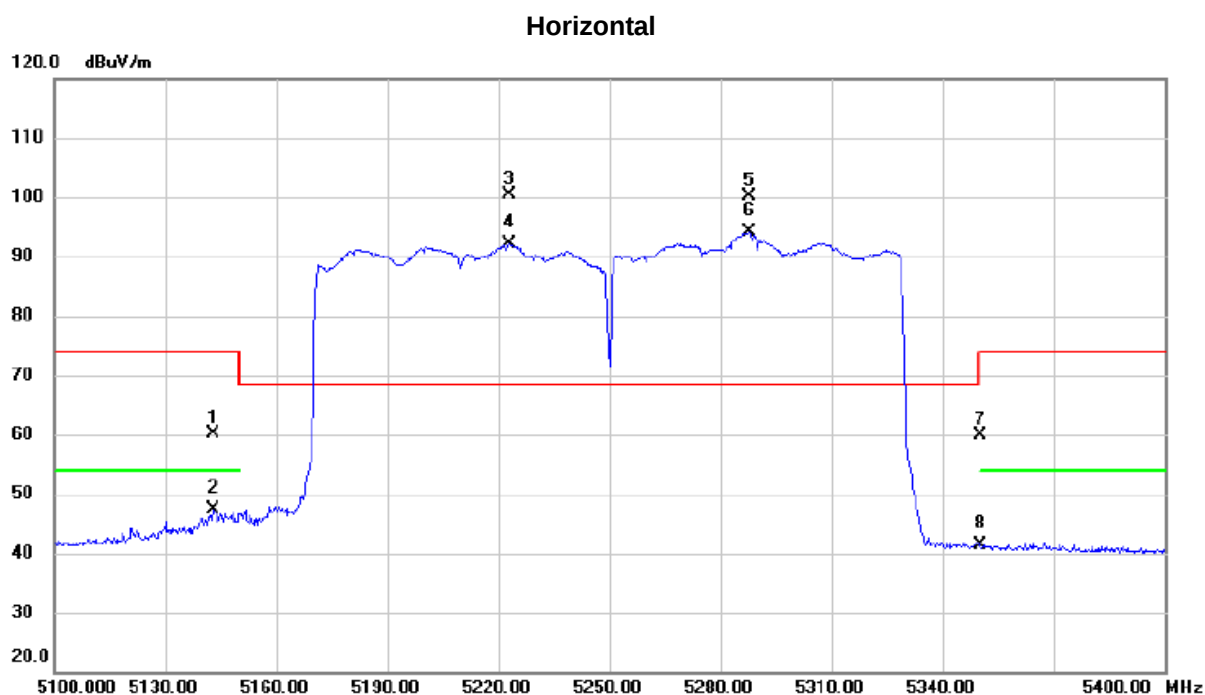


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5143.050	22.35	37.90	60.25	74.00	-13.75	peak	
2		5143.050	9.43	37.90	47.33	54.00	-6.67	AVG	
3	*	5222.850	62.68	37.65	100.33	68.30	32.03	peak	
4	X	5222.850	54.48	37.65	92.13	68.30	23.83	AVG	
5	X	5287.950	62.61	37.55	100.16	68.30	31.86	peak	
6	X	5287.950	56.47	37.55	94.02	68.30	25.72	AVG	
7		5350.000	22.12	37.73	59.85	74.00	-14.15	peak	
8		5350.000	3.76	37.73	41.49	54.00	-12.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5210+5290 MHz--ANT.1+2/3+4

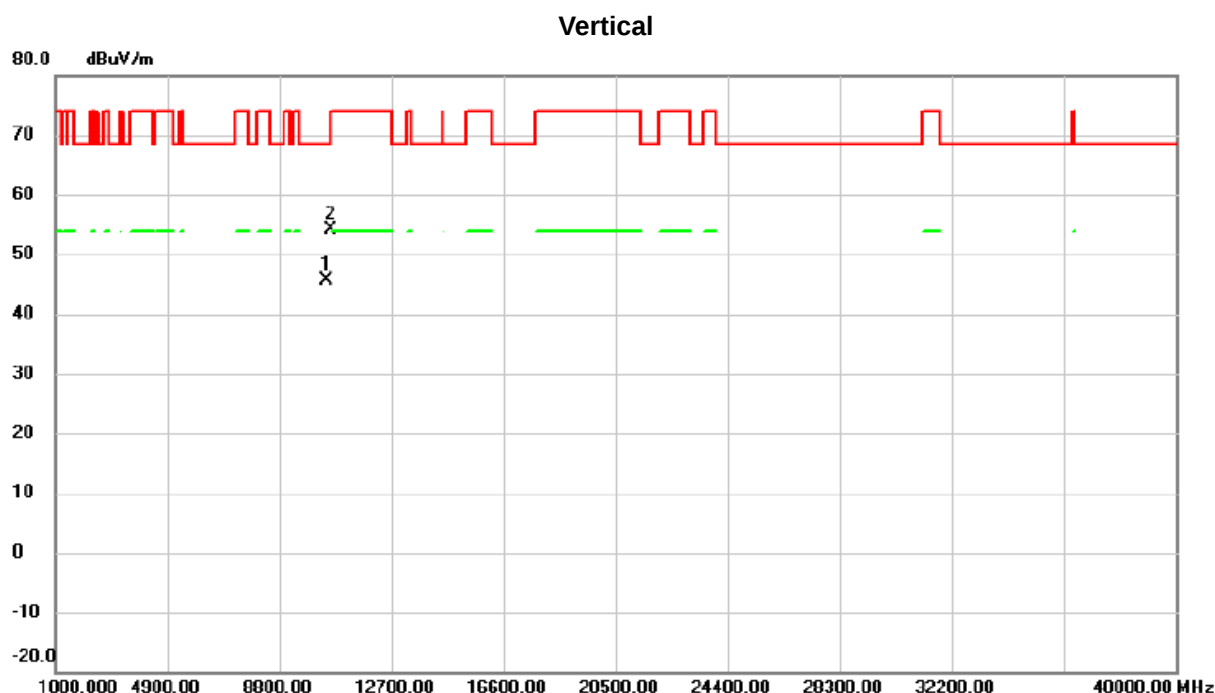


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10420.00	43.93	1.74	45.67	68.30	-22.63	peak	
2	*	10580.00	52.21	1.90	54.11	68.30	-14.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5210+5290 MHz--ANT.1+2/3+4

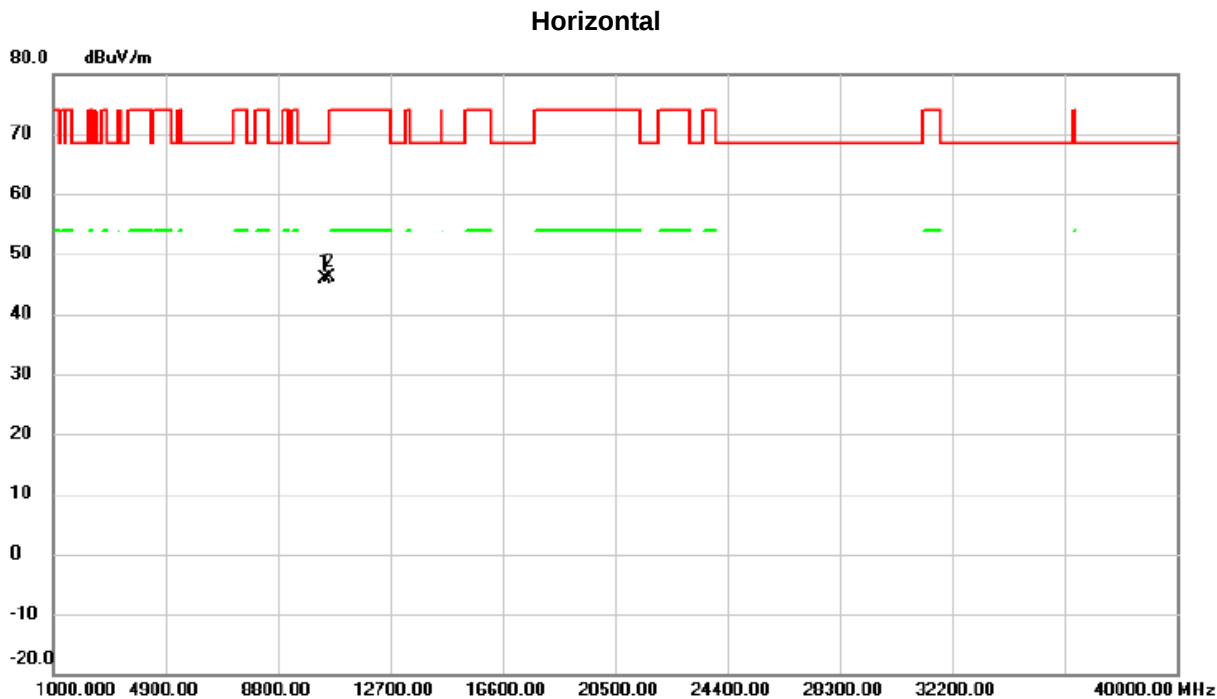

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10420.00	44.18	1.74	45.92	68.30	-22.38	peak	
2	*	10580.00	44.15	1.90	46.05	68.30	-22.25	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5530+5610 MHz--ANT.1+2/3+4

Vertical

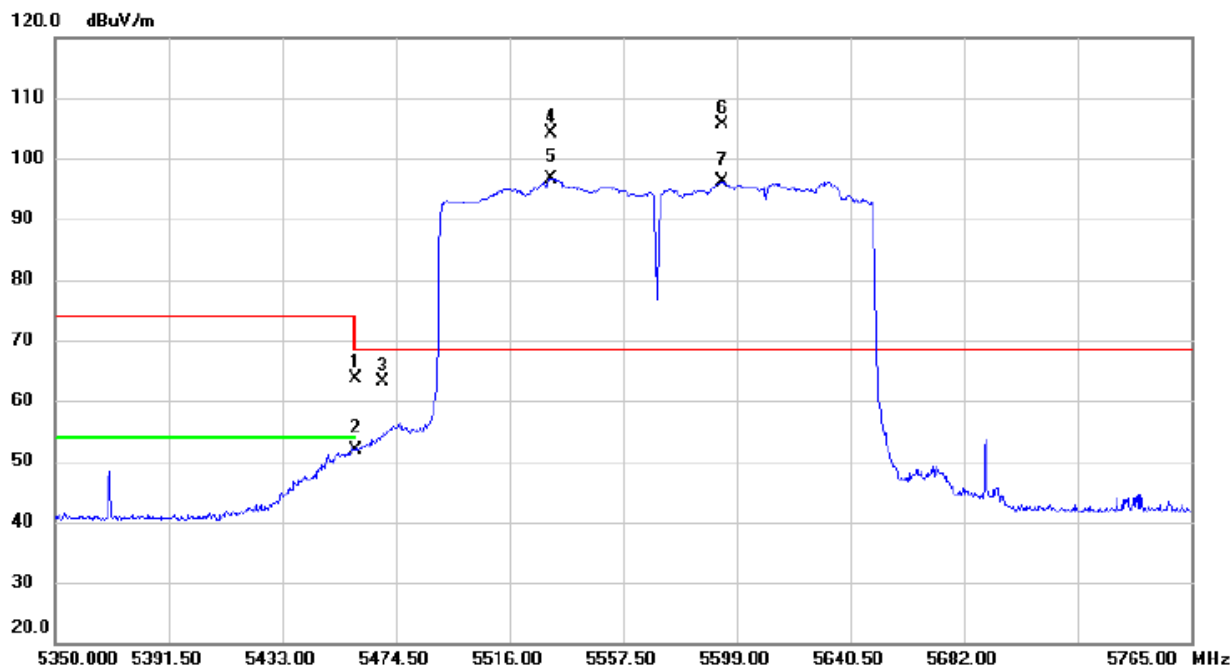


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	25.48	38.12	63.60	74.00	-10.40	peak	
2		5460.000	13.69	38.12	51.81	54.00	-2.19	AVG	
3		5470.000	24.98	38.15	63.13	68.30	-5.17	peak	
4	X	5531.148	65.90	38.27	104.17	68.30	35.87	peak	
5	X	5531.148	58.42	38.27	96.69	68.30	28.39	AVG	
6	*	5593.605	67.36	38.33	105.69	68.30	37.39	peak	
7	X	5593.605	57.78	38.33	96.11	68.30	27.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5530+5610 MHz--ANT.1+2/3+4

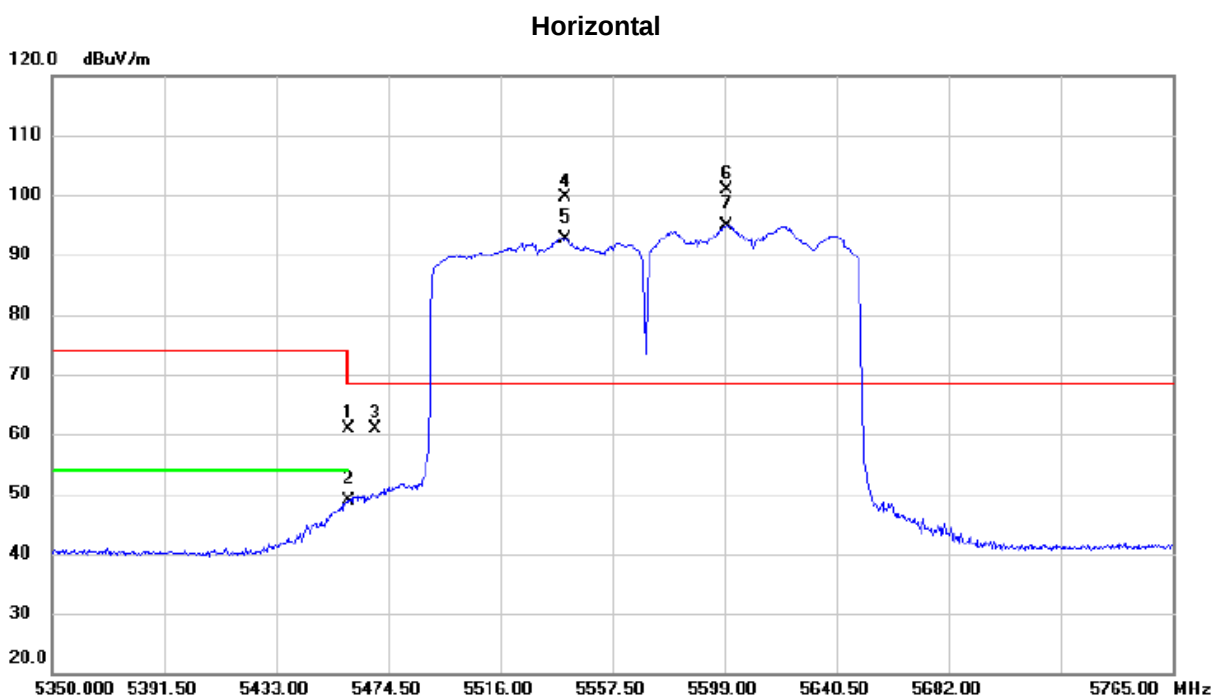


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	22.73	38.12	60.85	74.00	-13.15	peak	
2		5460.000	10.74	38.12	48.86	54.00	-5.14	AVG	
3		5470.000	22.75	38.15	60.90	68.30	-7.40	peak	
4	X	5540.070	61.30	38.28	99.58	68.30	31.28	peak	
5	X	5540.070	54.34	38.28	92.62	68.30	24.32	AVG	
6	*	5600.038	62.48	38.34	100.82	68.30	32.52	peak	
7	X	5600.038	56.48	38.34	94.82	68.30	26.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5530+5610 MHz--ANT.1+2/3+4

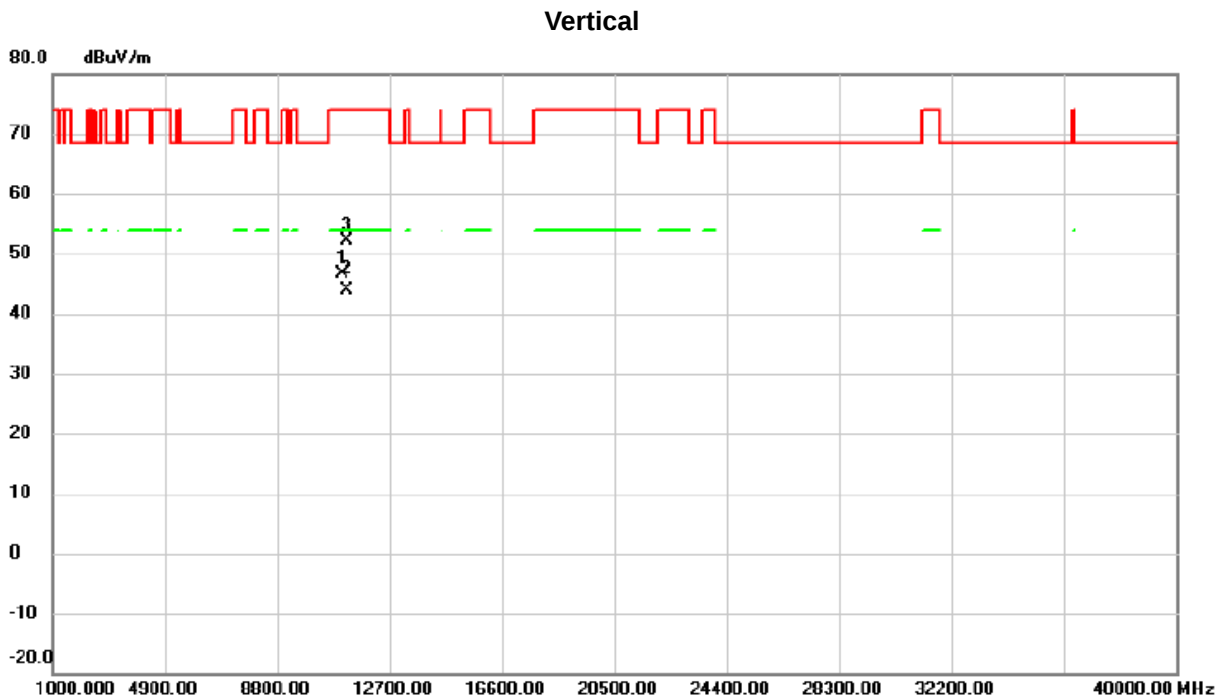


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	44.39	2.23	46.62	74.00	-27.38	peak	
2	*	11219.94	41.89	1.97	43.86	54.00	-10.14	AVG	
3		11219.95	50.09	1.97	52.06	74.00	-21.94	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AX(HEW80) Mode 5530+5610 MHz--ANT.1+2/3+4

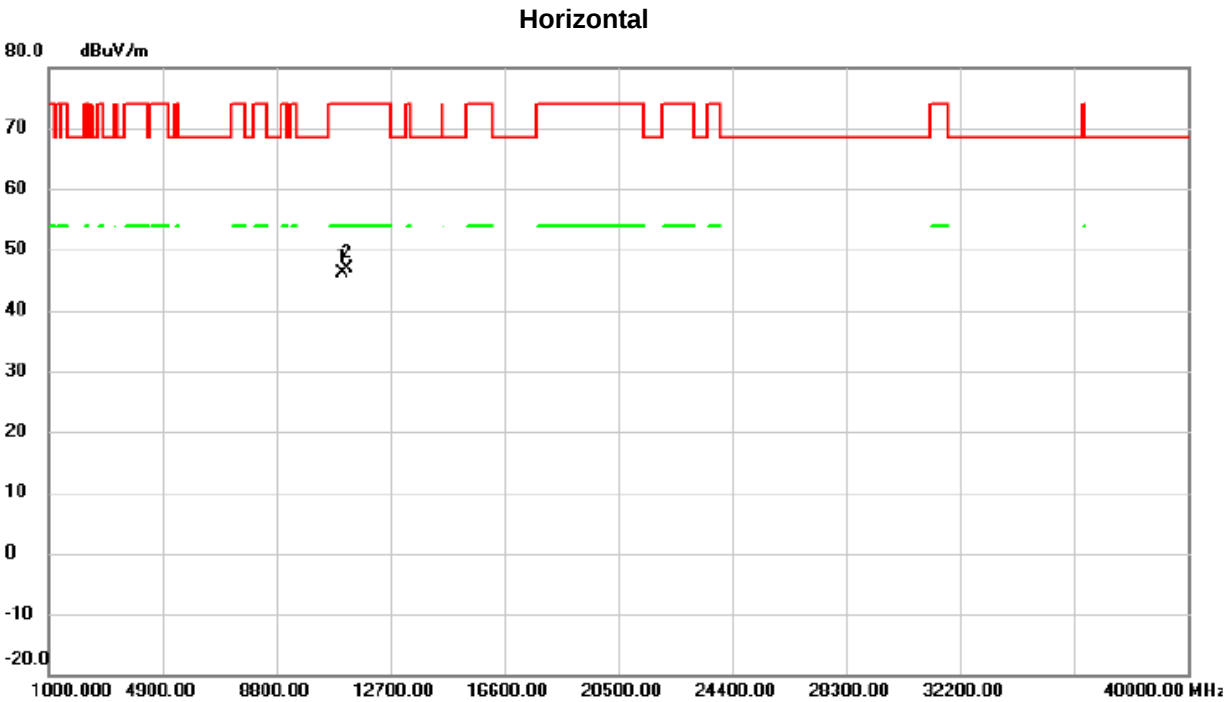

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	44.01	2.23	46.24	74.00	-27.76	peak	
2	*	11220.00	44.85	1.97	46.82	74.00	-27.18	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

CDD

Test Mode	TX AC (VHT80) 5210+5290 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42/58	5210	83.61	76.00
	5290	82.80	75.60
	5210+5290	166.41	151.60

CH42

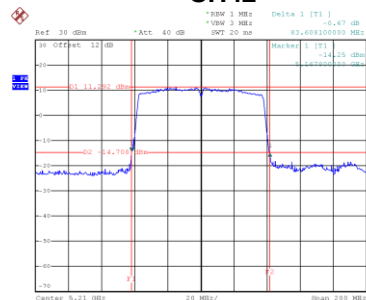

Date: 3.18.2020 19:12:40


CH58

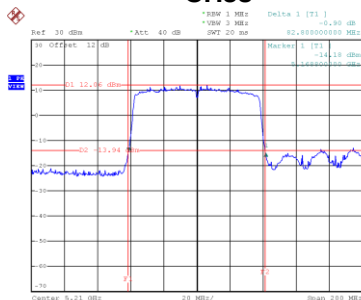

Date: 3.18.2020 19:15:10


99 % Emission Bandwidth

CH42

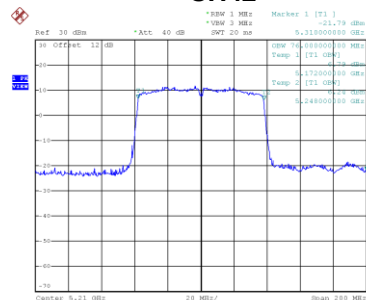

Date: 3.18.2020 19:12:01

CH58

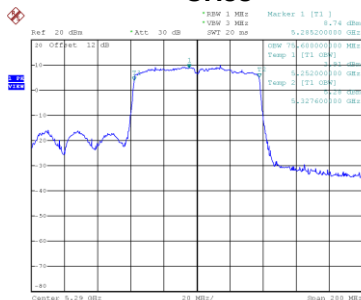


Date: 3.18.2020 19:19:28

Test Mode	TX AC (VHT80) 5210+5530 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42/106	5210	109.60	76.00
	5530	83.60	75.60
	5210+5530	193.20	151.60

CH42

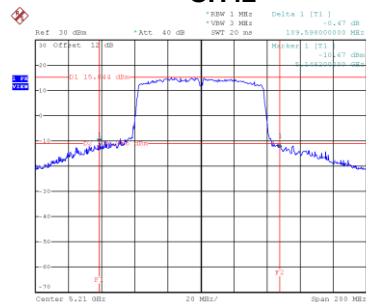

Date: 3.80V,2020 15:44:07


CH106

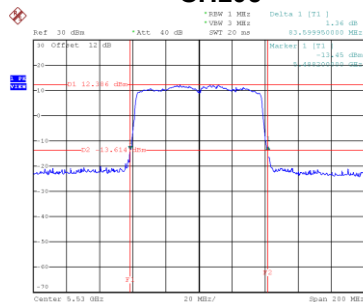

Date: 3.80V,2020 15:50:29


99 % Emission Bandwidth

CH42

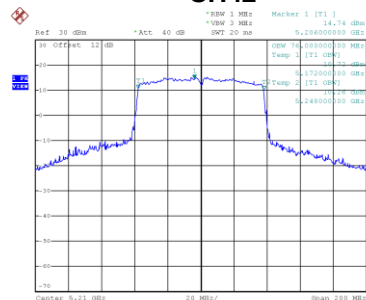

Date: 3.80V,2020 15:43:30

CH106

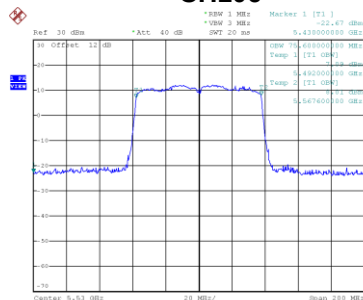


Date: 3.80V,2020 15:49:50

Test Mode	TX AC (VHT80) 5210+5610 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42/122	5210	94.20	76.00
	5610	83.21	75.60
	5210+5610	177.41	151.60

CH42

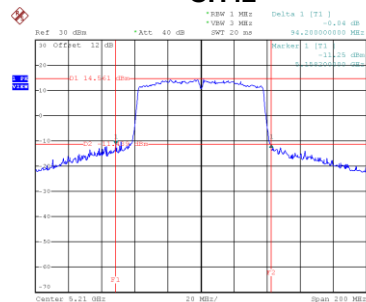

Date: 3.80V,2020 16130115


CH122

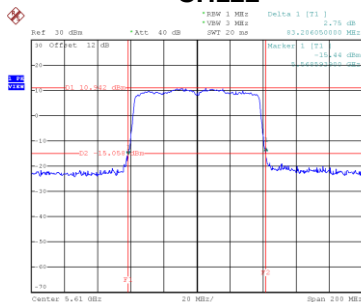

Date: 3.80V,2020 16123137


99 % Emission Bandwidth

CH42

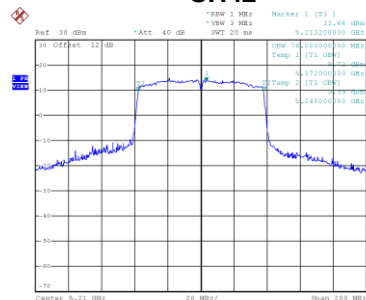

Date: 3.80V,2020 16129115


CH122

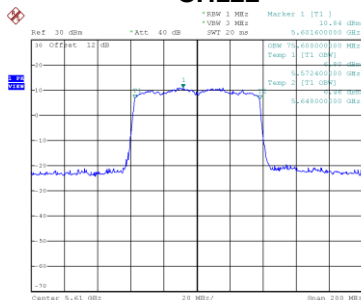


Date: 3.80V,2020 16122149

Test Mode	TX AC (VHT80) 5210+5775 Mode-- ANT.1+2/3+4
-----------	--

Channel	Frequency (MHz)	26 dB Bandwidth/6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42/155	5210	90.40	76.00
	5775	76.20	76.00
	5210+5775	166.60	152.00

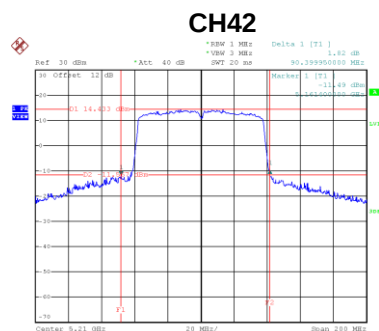


Date: 3.18.2020 16:13:21

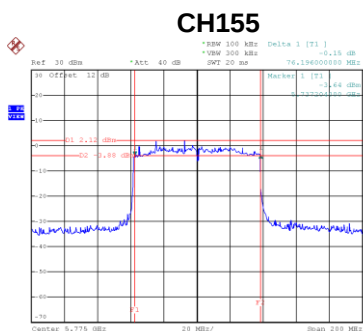


Date: 3.18.2020 16:41:27

99 % Emission Bandwidth

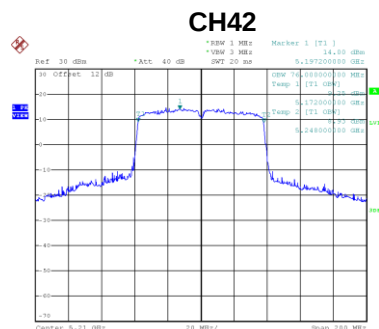

Date: 3.18.2020 16:13:18

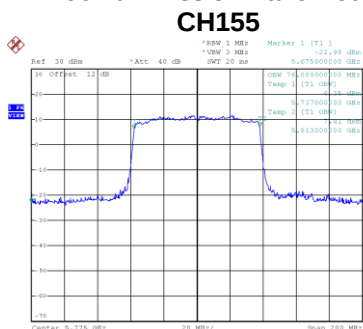


Date: 3.18.2020 16:40:45

Test Mode	TX AC (VHT80) 5290+5530 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
58/106	5290	93.00	76.00
	5530	82.80	75.60
	5290+5530	175.80	151.60

CH58

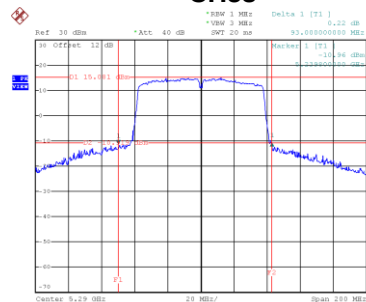

Date: 3.18.2020 17:10:139


CH106

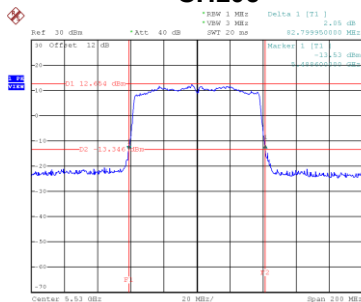

Date: 3.18.2020 16:15:115


99 % Emission Bandwidth

CH58

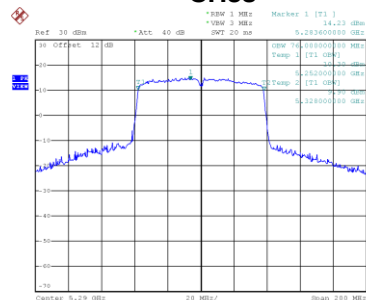

Date: 3.18.2020 17:10:100


CH106

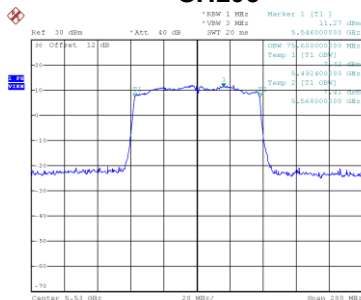


Date: 3.18.2020 16:15:134

Test Mode	TX AC (VHT80) 5290+5610 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
58/122	5290	95.40	76.00
	5610	83.40	75.60
	5290+5610	178.80	151.60

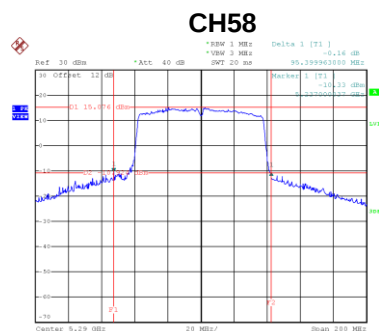


Date: 3.80V,2020 17:05:41

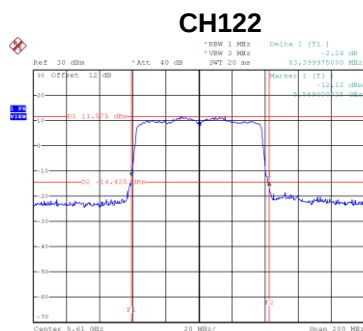

Date: 3.80V,2020 17:13:33

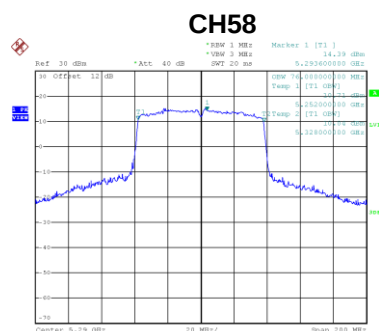


Date: 3.80V,2020 17:04:39

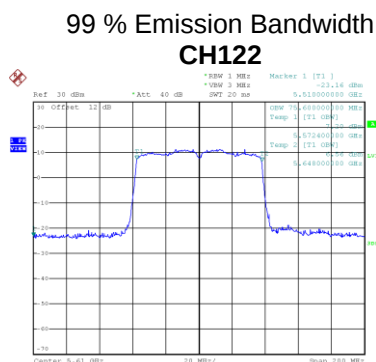


Date: 3.80V,2020 17:12:46

Test Mode	TX AC (VHT80) 5290+5775 Mode-- ANT.1+2/3+4
-----------	--

Channel	Frequency (MHz)	26 dB Bandwidth/6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
58/155	5290	92.80	76.00
	5775	77.20	76.00
	5290+5775	170.00	152.00

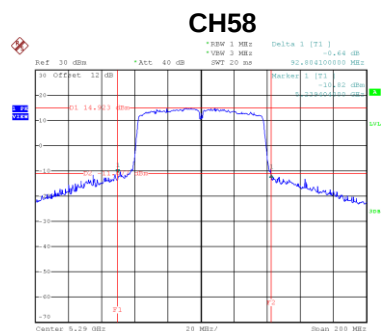


Date: 3.18.2020 17:13:21

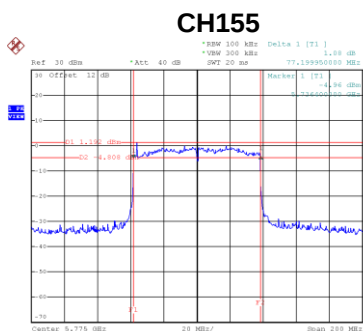


Date: 3.18.2020 17:13:29

99 % Emission Bandwidth

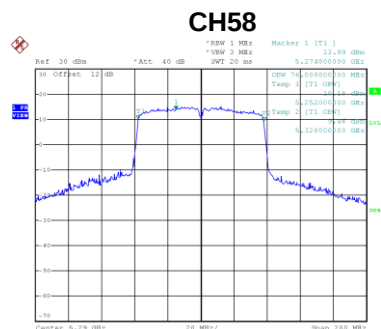


Date: 3.18.2020 17:12:130

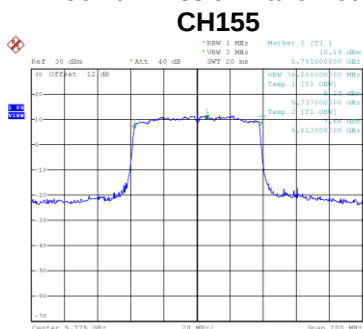


Date: 3.18.2020 17:12:148

Test Mode	TX AC (VHT80) 5530+5610 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
106/122	5530	83.40	75.60
	5610	82.80	76.80
	5530+5610	166.20	152.40

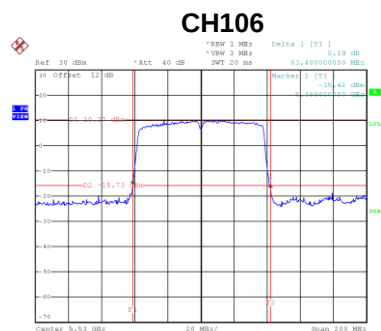


Date: 3.18.2020 19:15:10

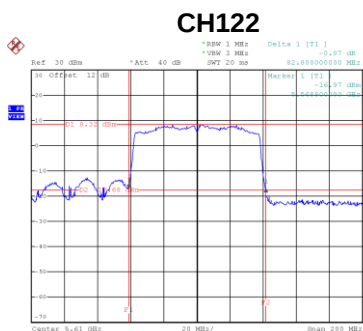

Date: 3.18.2020 20:00:55

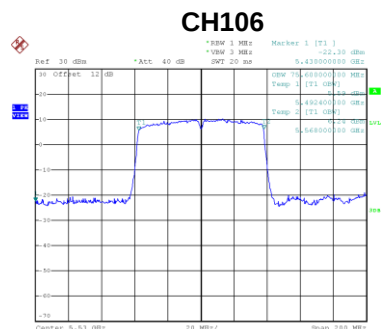


Date: 3.18.2020 19:15:15

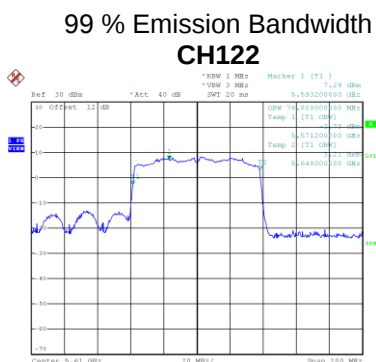


Date: 3.18.2020 19:15:13

Test Mode	TX AC (VHT80) 5530+5775 Mode-- ANT.1+2/3+4
-----------	--

Channel	Frequency (MHz)	26 dB Bandwidth/6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
106/155	5530	83.00	75.60
	5775	75.60	76.00
	5530+5775	158.60	151.60

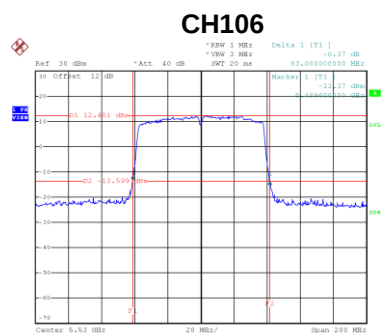


Date: 3.18.2020 17:13:13

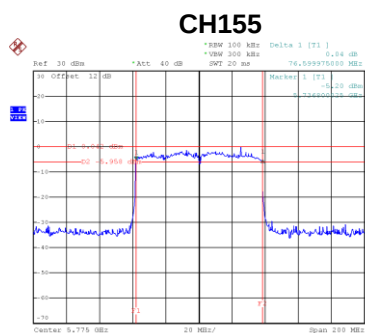


Date: 3.18.2020 17:13:05

99 % Emission Bandwidth

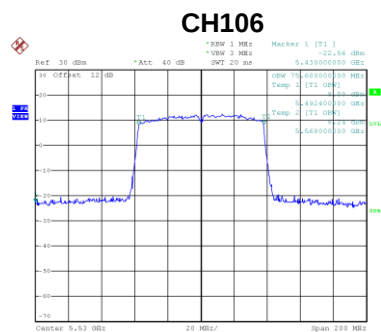


Date: 3.18.2020 17:13:12

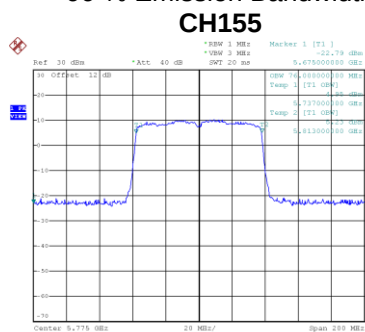


Date: 3.18.2020 17:13:22

Test Mode	TX AC (VHT80) 5610+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth/6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
122/155	5610	83.60	75.60
	5775	75.60	76.00
	5610+5775	159.20	151.60

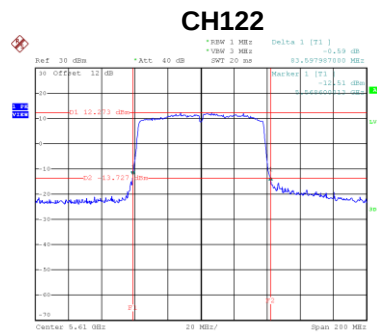


Date: 3.18.2020 17:15:129

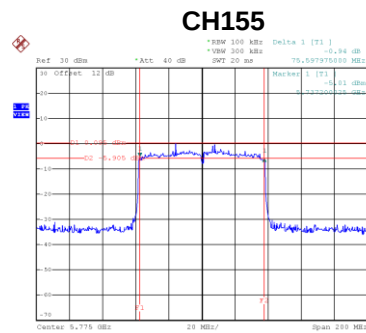

Date: 3.18.2020 17:14:111

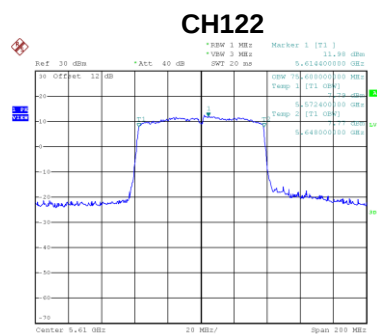

Date: 3.18.2020 17:15:146

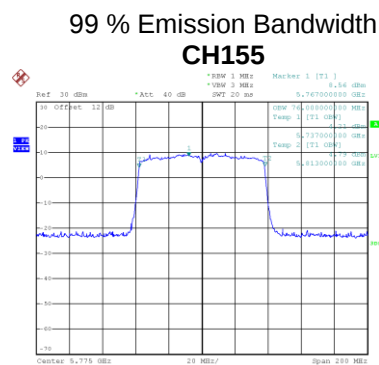


Date: 3.18.2020 17:14:127

Test Mode	TX AX (HEW80) 5210+5530 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42/106	5210	83.00	77.60
	5530	82.80	77.60
	5210+5530	165.20	155.20

CH42

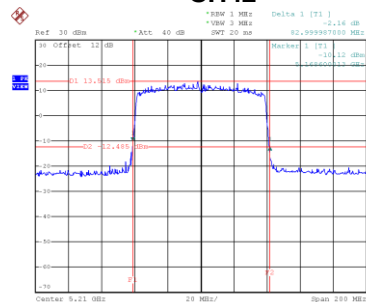

Date: 7.18.2020 12:10:15


CH106

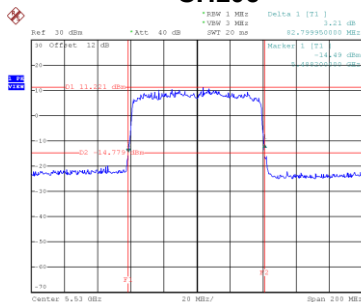

Date: 7.18.2020 12:12:59


99 % Emission Bandwidth

CH42

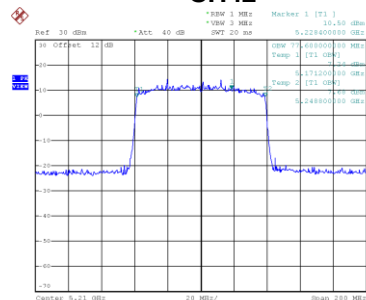

Date: 7.18.2020 12:10:15

CH106

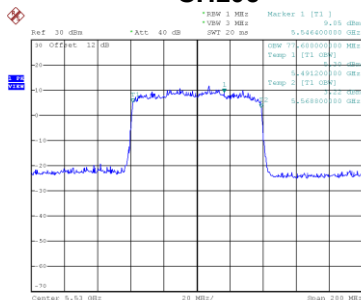


Date: 7.18.2020 12:12:59

Test Mode	TX AX (HEW80) 5210+5610 Mode-- ANT.1+2/3+4		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42/112	5210	83.20	77.60
	5610	83.00	77.60
	5210+5610	166.20	155.20




Test Mode	TX AX (HEW80) 5210+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth/6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42/155	5210	82.80	77.60
	5775	77.80	77.60
	5210+5775	166.60	155.20

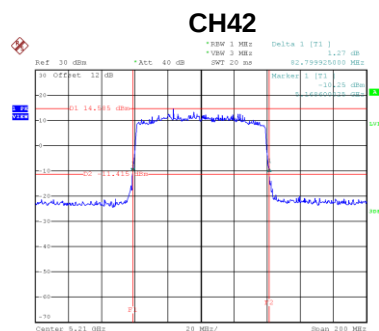


Date: 7.18.2020 13:14:16

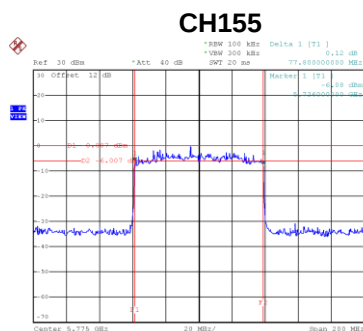

Date: 7.18.2020 13:14:05

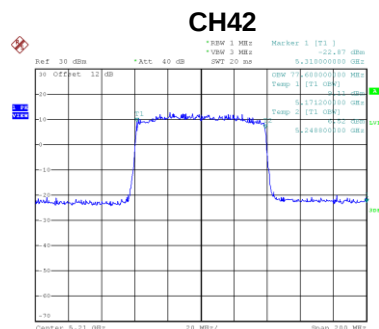


Date: 7.18.2020 13:13:34

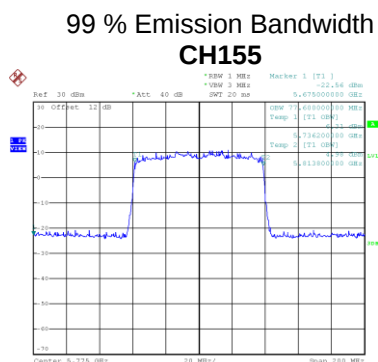


Date: 7.18.2020 13:14:25

Test Mode	TX AX (HEW80) 5290+5530 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
58/106	5290	83.60	77.60
	5530	83.40	77.60
	5290+5530	167.00	155.20

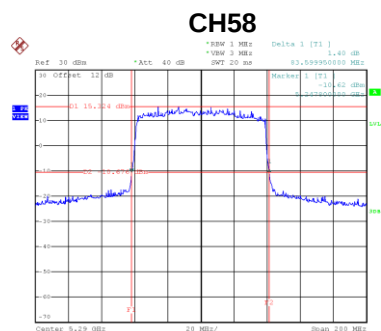


Date: 7.18.2020 13:15:16

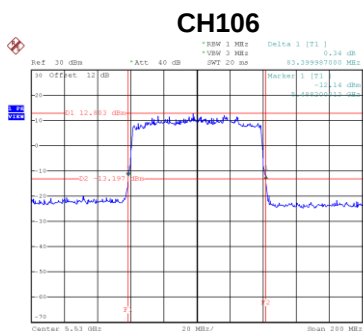

Date: 7.18.2020 13:15:32

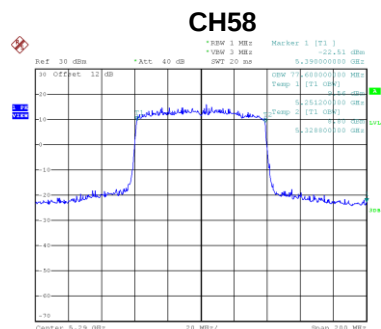


Date: 7.18.2020 13:15:13

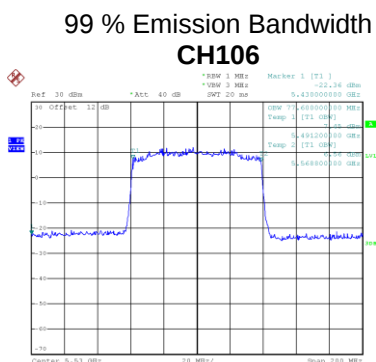


Date: 7.18.2020 13:15:51

Test Mode	TX AX (HEW80) 5290+5610 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
58/122	5290	83.59	77.60
	5610	83.20	77.60
	5290+5610	166.79	155.20

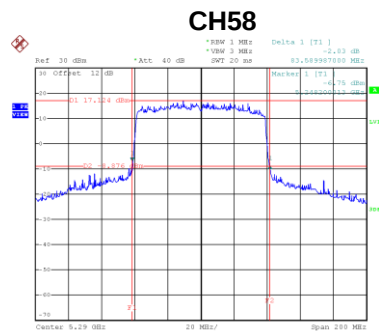


Date: 7.18.2020 14:03:51

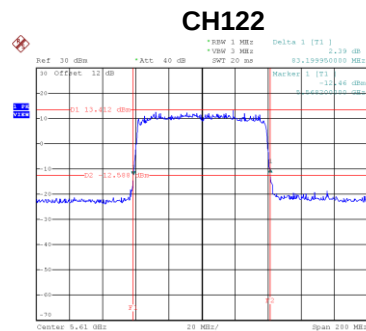

Date: 7.18.2020 14:09:17

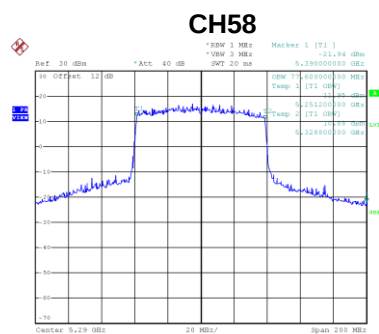


Date: 7.18.2020 14:03:07

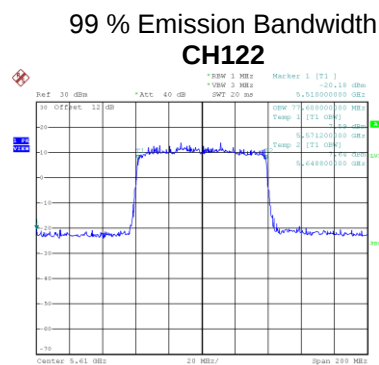


Date: 7.18.2020 14:08:34

Test Mode	TX AX (HEW80) 5290+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth/6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
58/155	5290	96.60	78.00
	5775	77.80	77.60
	5290+5775	174.40	155.60

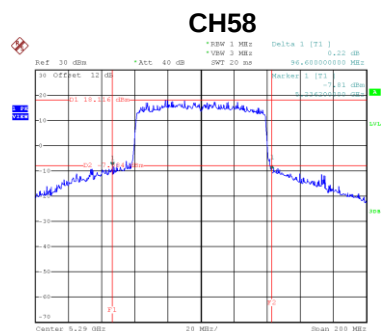


Date: 7.18.2020 14:25:16

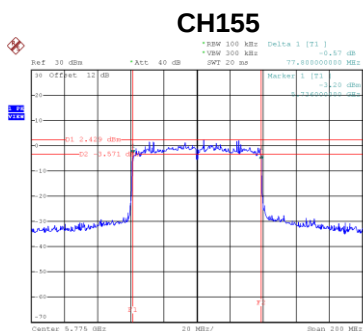

Date: 7.18.2020 14:20:55

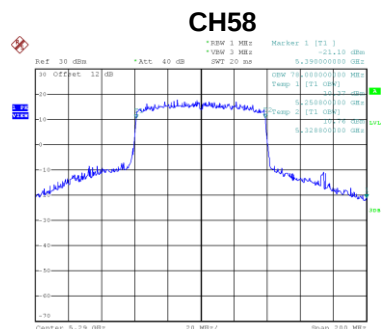


Date: 7.18.2020 14:25:18

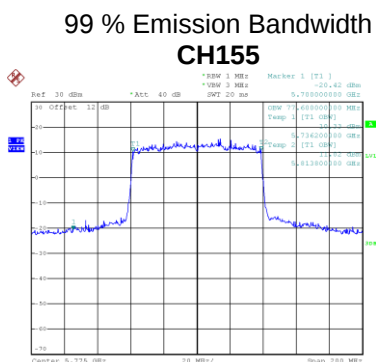


Date: 7.18.2020 14:20:14

Test Mode	TX AX (HEW80) 5530+5610 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
106/122	5530	82.60	77.20
	5610	83.60	77.60
	5530+5610	166.20	154.80

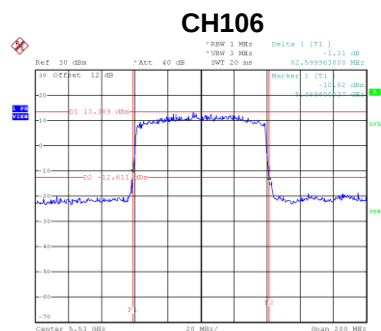


Date: 7.18OV.2020 15134126

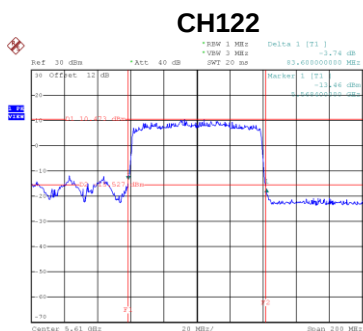

Date: 7.18OV.2020 15141445

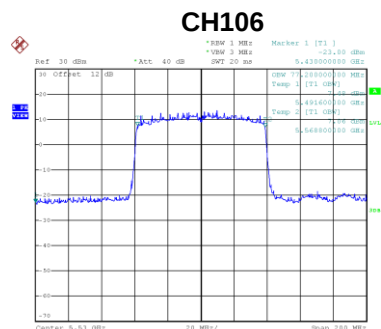


Date: 7.18OV.2020 15133141

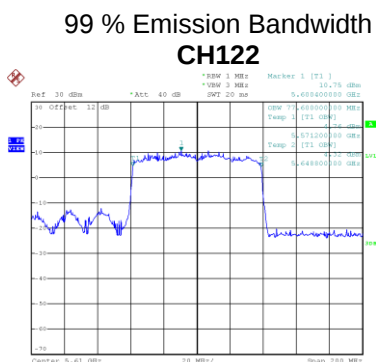


Date: 7.18OV.2020 15140148

Test Mode	TX AX (HEW80) 5530+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth/6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
106/155	5530	82.80	77.60
	5775	77.59	77.60
	5530+5775	160.39	155.20

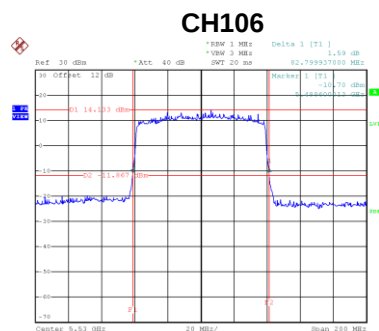


Date: 7.18.2020 14:45:27

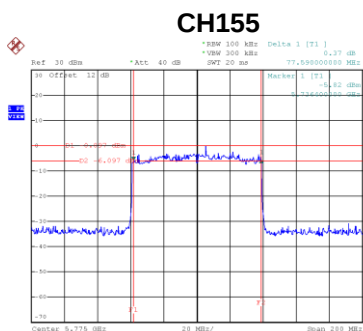

Date: 7.18.2020 15:09:31

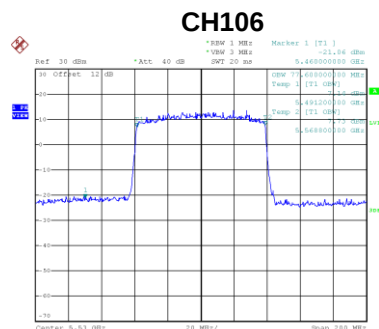


Date: 7.18.2020 14:44:46

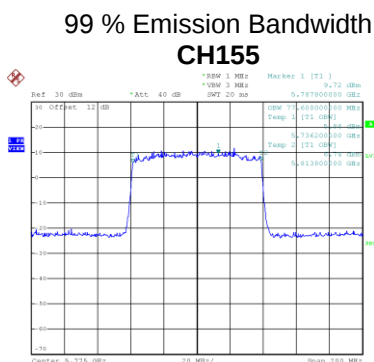


Date: 7.18.2020 15:08:48

Test Mode	TX AX (HEW80) 5610+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth/6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
122/155	5610	83.80	77.60
	5775	75.99	77.60
	5610+5775	159.79	155.20

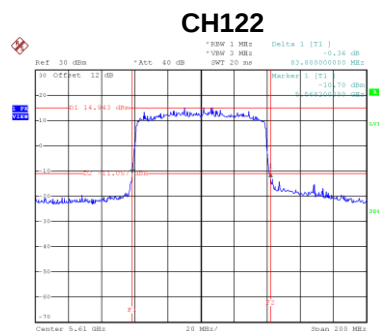


Date: 7.18.2020 14:55:27

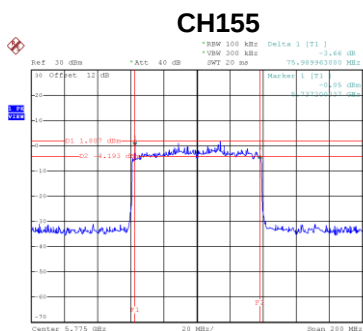

Date: 7.18.2020 15:02:57

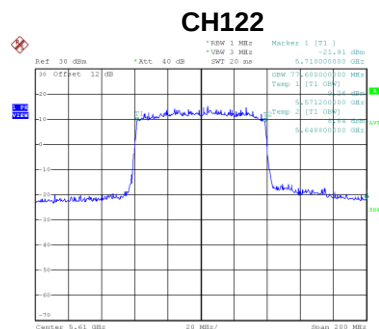

Date: 7.18.2020 14:54:45

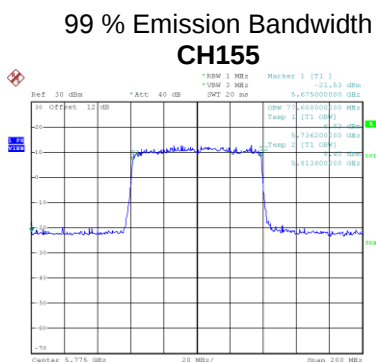

Date: 7.18.2020 15:02:07

APPENDIX E - CONDUCTED OUTPUT POWER

CDD

Test Mode	TX AC (VHT80) 80+80 Mode_Ant. 1+2
-----------	-----------------------------------

Frequency (MHz)		Conducted Output Power –ANT.1 (dBm)	Conducted Output Power –ANT.2 (dBm)	Total Conducted Output Power (dBm)	Duty Factor	Total Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
5210(1/2)+5530(3/4)	5210	18.39	17.78	21.11	0.17	21.28	30	1.00	Complies
5210(1/2)+5610(3/4)	5210	19.95	19.45	22.72	0.17	22.89	30	1.00	Complies
5210(1/2)+5775(3/4)	5210	19.55	18.95	22.27	0.17	22.44	30	1.00	Complies
5290(1/2)+5530(3/4)	5290	20.96	19.62	23.35	0.17	23.52	24	0.25	Complies
5290(1/2)+5610(3/4)	5290	20.91	19.52	23.28	0.17	23.45	24	0.25	Complies
5290(1/2)+5775(3/4)	5290	21.02	20.04	23.57	0.17	23.74	24	0.25	Complies
5530(1/2)+5775(3/4)	5530	19.59	17.99	21.87	0.17	22.04	24	0.25	Complies
5610(1/2)+5775(3/4)	5610	21.25	20.17	23.75	0.17	23.92	24	0.25	Complies
5210(1/2)+5290(3/4)	5210	20.03	19.58	22.82	0.17	22.99	30	1.00	Complies
5530(1/2)+5610(3/4)	5530	19.54	17.96	21.83	0.17	22.00	24	0.25	Complies

Test Mode	TX AC (VHT80) 80+80 Mode_Ant. 3+4
-----------	-----------------------------------

Frequency (MHz)		Conducted Output Power –ANT.3 (dBm)	Conducted Output Power –ANT.4 (dBm)	Total Conducted Output Power (dBm)	Duty Factor	Total Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
5210(1/2)+5530(3/4)	5530	15.89	15.75	18.83	0.17	19.00	24	0.25	Complies
5210(1/2)+5610(3/4)	5610	17.45	17.22	20.35	0.17	20.52	24	0.25	Complies
5210(1/2)+5775(3/4)	5775	17.18	17.02	20.11	0.17	20.28	30	1.00	Complies
5290(1/2)+5530(3/4)	5530	18.29	17.83	21.08	0.17	21.25	24	0.25	Complies
5290(1/2)+5610(3/4)	5610	19.55	19.35	22.46	0.17	22.63	24	0.25	Complies
5290(1/2)+5775(3/4)	5775	18.32	18.06	21.20	0.17	21.37	30	1.00	Complies
5530(1/2)+5775(3/4)	5775	17.06	17.07	20.08	0.17	20.25	30	1.00	Complies
5610(1/2)+5775(3/4)	5775	19.71	19.57	22.65	0.17	22.82	30	1.00	Complies
5210(1/2)+5290(3/4)	5290	17.83	17.52	20.69	0.17	20.86	24	0.25	Complies
5530(1/2)+5610(3/4)	5610	17.08	16.94	20.02	0.17	20.19	24	0.25	Complies

Test Mode	TX AX (HEW80) 80+80 Mode_Ant. 1+2
-----------	-----------------------------------

Frequency (MHz)		Conducted Output Power –ANT.1 (dBm)	Conducted Output Power –ANT.2 (dBm)	Total Conducted Output Power (dBm)	Duty Factor	Total Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
5210(1/2)+5530(3/4)	5210	19.91	18.75	22.38	0.43	22.81	30	1.00	Complies
5210(1/2)+5610(3/4)	5210	20.42	19.23	22.88	0.43	23.31	30	1.00	Complies
5210(1/2)+5775(3/4)	5210	19.32	19.28	22.31	0.43	22.74	30	1.00	Complies
5290(1/2)+5530(3/4)	5290	21.14	19.54	23.42	0.43	23.85	24	0.25	Complies
5290(1/2)+5610(3/4)	5290	22.67	20.94	24.90	0.43	25.33	24	0.25	Complies
5290(1/2)+5775(3/4)	5290	20.92	19.7	23.36	0.43	23.79	24	0.25	Complies
5530(1/2)+5775(3/4)	5530	19.81	17.87	21.96	0.43	22.39	24	0.25	Complies
5610(1/2)+5775(3/4)	5610	21.03	19.84	23.49	0.43	23.92	24	0.25	Complies
5210(1/2)+5290(3/4)	5210	19.47	18.23	21.90	0.43	22.33	30	1.00	Complies
5530(1/2)+5610(3/4)	5530	19.24	18.09	21.71	0.43	22.14	24	0.25	Complies

Test Mode	TX AX (HEW80) 80+80 Mode_Ant. 3+4
-----------	-----------------------------------

Frequency (MHz)		Conducted Output Power –ANT.3 (dBm)	Conducted Output Power –ANT.4 (dBm)	Total Conducted Output Power (dBm)	Duty Factor	Total Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
5210(1/2)+5530(3/4)	5530	17.42	17.25	20.35	0.43	20.78	24	0.25	Complies
5210(1/2)+5610(3/4)	5610	17.75	17.89	20.83	0.43	21.26	24	0.25	Complies
5210(1/2)+5775(3/4)	5775	17.31	17.25	20.29	0.43	20.72	30	1.00	Complies
5290(1/2)+5530(3/4)	5530	18.63	18.23	21.44	0.43	21.87	24	0.25	Complies
5290(1/2)+5610(3/4)	5610	19.81	19.62	22.73	0.43	23.16	24	0.25	Complies
5290(1/2)+5775(3/4)	5775	18.54	18.12	21.35	0.43	21.78	30	1.00	Complies
5530(1/2)+5775(3/4)	5775	17.53	17.36	20.46	0.43	20.89	30	1.00	Complies
5610(1/2)+5775(3/4)	5775	19.41	19.24	22.34	0.43	22.77	30	1.00	Complies
5210(1/2)+5290(3/4)	5290	17.08	16.76	19.93	0.43	20.36	24	0.25	Complies
5530(1/2)+5610(3/4)	5610	17.32	17.28	20.31	0.43	20.74	24	0.25	Complies

Beamforming

Test Mode	TX AC (VHT80) 80+80 Mode_Ant. 1+2
-----------	-----------------------------------

Frequency (MHz)		Conducted Output Power –ANT.1 (dBm)	Conducted Output Power –ANT.2 (dBm)	Total Conducted Output Power (dBm)	Duty Factor	Total Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
5210(1/2)+5530(3/4)	5210	18.24	17.63	20.96	0.17	21.13	29.20	0.8318	Complies
5210(1/2)+5610(3/4)	5210	19.80	19.30	22.57	0.17	22.74	29.20	0.8318	Complies
5210(1/2)+5775(3/4)	5210	19.40	18.85	22.14	0.17	22.31	29.20	0.8318	Complies
5290(1/2)+5530(3/4)	5290	19.84	19.48	22.22	0.17	22.39	22.64	0.1837	Complies
5290(1/2)+5610(3/4)	5290	19.83	18.41	22.19	0.17	22.36	22.64	0.1837	Complies
5290(1/2)+5775(3/4)	5290	19.53	18.39	22.01	0.17	22.18	22.64	0.1837	Complies
5530(1/2)+5775(3/4)	5530	19.48	17.84	21.75	0.17	21.92	22.64	0.1837	Complies
5610(1/2)+5775(3/4)	5610	19.95	18.86	22.45	0.17	22.62	22.64	0.1837	Complies
5210(1/2)+5290(3/4)	5210	19.90	19.45	22.69	0.17	22.86	29.20	0.8318	Complies
5530(1/2)+5610(3/4)	5530	19.41	17.84	21.71	0.17	21.88	22.64	0.1837	Complies

Test Mode	TX AC (VHT80) 80+80 Mode_Ant. 3+4
-----------	-----------------------------------

Frequency (MHz)		Conducted Output Power –ANT.3 (dBm)	Conducted Output Power –ANT.4 (dBm)	Total Conducted Output Power (dBm)	Duty Factor	Total Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
5210(1/2)+5530(3/4)	5530	15.76	15.63	18.71	0.17	18.88	22.64	0.1837	Complies
5210(1/2)+5610(3/4)	5610	17.34	17.07	20.22	0.17	20.39	22.64	0.1837	Complies
5210(1/2)+5775(3/4)	5775	17.04	16.92	19.99	0.17	20.16	29.20	0.8318	Complies
5290(1/2)+5530(3/4)	5530	17.18	16.70	19.96	0.17	20.13	22.64	0.1837	Complies
5290(1/2)+5610(3/4)	5610	19.41	19.22	22.33	0.17	22.50	22.64	0.1837	Complies
5290(1/2)+5775(3/4)	5775	16.03	16.08	19.07	0.17	19.24	29.20	0.8318	Complies
5530(1/2)+5775(3/4)	5775	16.91	16.97	19.95	0.17	20.12	29.20	0.8318	Complies
5610(1/2)+5775(3/4)	5775	19.52	19.23	22.39	0.17	22.56	29.20	0.8318	Complies
5210(1/2)+5290(3/4)	5290	17.71	17.39	20.56	0.17	20.73	22.64	0.1837	Complies
5530(1/2)+5610(3/4)	5610	16.95	16.80	19.89	0.17	20.06	22.64	0.1837	Complies

Test Mode	TX AX (HEW80) 80+80 Mode_Ant. 1+2
-----------	-----------------------------------

Frequency (MHz)		Conducted Output Power –ANT.1 (dBm)	Conducted Output Power –ANT.2 (dBm)	Total Conducted Output Power (dBm)	Duty Factor	Total Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
5210(1/2)+5530(3/4)	5210	19.80	18.63	22.26	0.43	22.69	29.20	0.8318	Complies
5210(1/2)+5610(3/4)	5210	20.29	19.13	22.76	0.43	23.19	29.20	0.8318	Complies
5210(1/2)+5775(3/4)	5210	19.21	19.16	22.20	0.43	22.63	29.20	0.8318	Complies
5290(1/2)+5530(3/4)	5290	19.52	17.90	21.80	0.43	22.23	22.64	0.1837	Complies
5290(1/2)+5610(3/4)	5290	22.02	20.33	24.27	0.43	24.70	22.64	0.1837	Complies
5290(1/2)+5775(3/4)	5290	19.28	18.08	21.73	0.43	22.16	22.64	0.1837	Complies
5530(1/2)+5775(3/4)	5530	19.70	17.77	21.85	0.43	22.28	22.64	0.1837	Complies
5610(1/2)+5775(3/4)	5610	19.32	18.22	21.82	0.43	22.25	22.64	0.1837	Complies
5210(1/2)+5290(3/4)	5210	19.35	18.13	21.79	0.43	22.22	29.20	0.8318	Complies
5530(1/2)+5610(3/4)	5530	19.12	17.99	21.60	0.43	22.03	22.64	0.1837	Complies

Test Mode	TX AX (HEW80) 80+80 Mode_Ant. 3+4
-----------	-----------------------------------

Frequency (MHz)		Conducted Output Power –ANT.3 (dBm)	Conducted Output Power –ANT.4 (dBm)	Total Conducted Output Power (dBm)	Duty Factor	Total Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
5210(1/2)+5530(3/4)	5530	17.28	17.14	20.22	0.43	20.65	22.64	0.1837	Complies
5210(1/2)+5610(3/4)	5610	17.64	17.74	20.70	0.43	21.13	22.64	0.1837	Complies
5210(1/2)+5775(3/4)	5775	17.20	17.12	20.17	0.43	20.60	29.20	0.8318	Complies
5290(1/2)+5530(3/4)	5530	17.01	16.58	19.81	0.43	20.24	22.64	0.1837	Complies
5290(1/2)+5610(3/4)	5610	19.04	18.74	21.90	0.43	22.33	22.64	0.1837	Complies
5290(1/2)+5775(3/4)	5775	16.62	16.21	19.43	0.43	19.86	29.20	0.8318	Complies
5530(1/2)+5775(3/4)	5775	17.39	17.24	20.33	0.43	20.76	29.20	0.8318	Complies
5610(1/2)+5775(3/4)	5775	18.62	18.51	21.58	0.43	22.01	29.20	0.8318	Complies
5210(1/2)+5290(3/4)	5290	16.97	16.64	19.82	0.43	20.25	22.64	0.1837	Complies
5530(1/2)+5610(3/4)	5610	17.17	17.16	20.18	0.43	20.61	22.64	0.1837	Complies


APPENDIX F - POWER SPECTRAL DENSITY

CDD

Test Mode	TX AC (VHT80) 5210+5290 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42/58	5210(1/2)+5290(3/4)	5210	1	2.06	0.17	4.95	16.20	Complies
			2	1.46	0.17			Complies
		5290	3	0.14	0.17	3.12	9.64	Complies
			4	-0.28	0.17			Complies

CH42-1

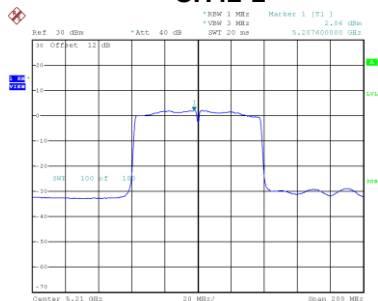


Date: 3.NOV.2020 19:27:00

CH42-2

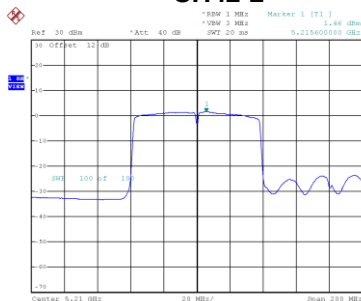


Date: 3.NOV.2020 19:28:13

CH58-3

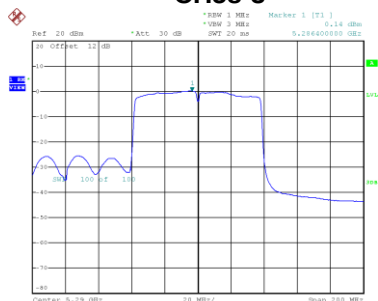

Date: 3.NOV.2020 19:39:48

CH58-4

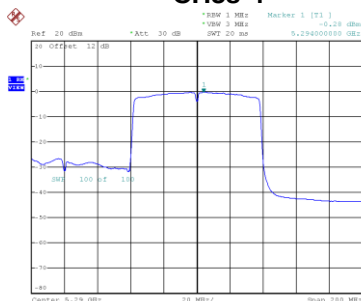


Date: 3.NOV.2020 19:40:35

Test Mode	TX AC (VHT80) 5210+5530 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42/106	5210(1/2)+5530(3/4)	5210	1	1.76	0.17	4.61	16.20	Complies
			2	1.08	0.17			Complies
		5530	3	-0.67	0.17	2.20	9.64	Complies
			4	-1.32	0.17			Complies

CH42-1

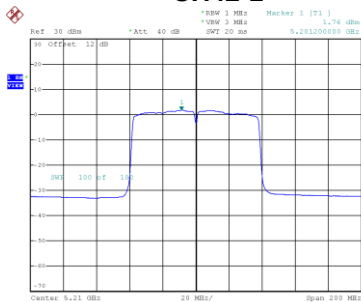


Date: 3.80V.2020 20114130

CH42-2

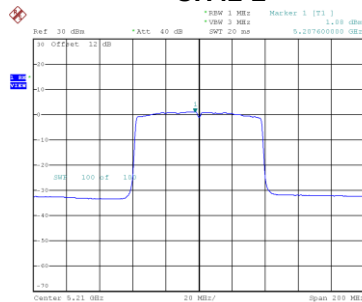


Date: 3.80V.2020 20115113

CH106-3

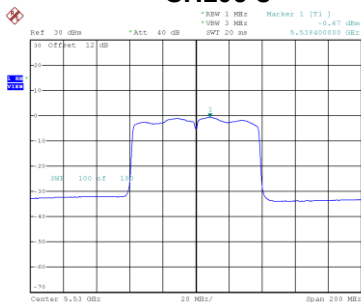

Date: 3.80V.2020 20116100

CH106-4

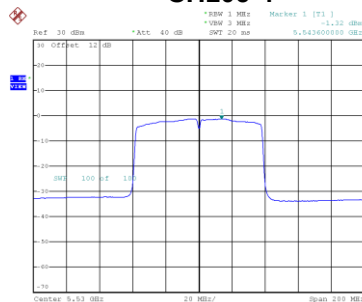


Date: 3.80V.2020 20116139

Test Mode	TX AC (VHT80) 5210+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42/155	5210(1/2)+5775(3/4)	5210	1	1.71	0.17	4.62	16.20	Complies
			2	1.16	0.17			Complies
		5775	3	-3.71	0.17	-0.77	28.64	Complies
			4	-4.20	0.17			Complies

CH42-1

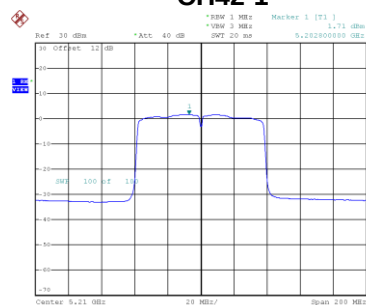


Date: 3.NOV.2020 20:21:23

CH42-2

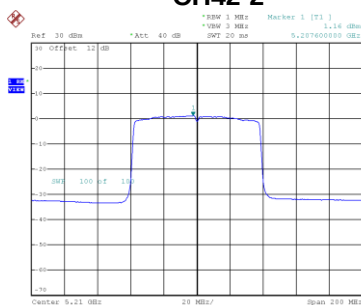


Date: 3.NOV.2020 20:22:00

CH155-3

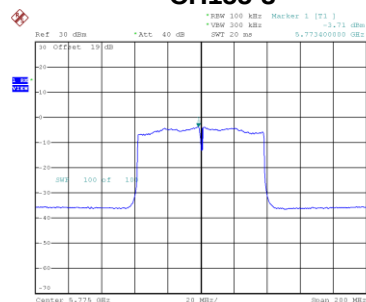

Date: 3.NOV.2020 20:22:47

CH155-4

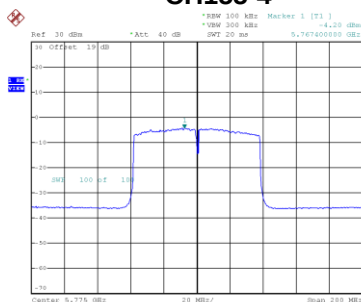


Date: 3.NOV.2020 20:23:28


Test Mode	TX AC (VHT80) 5290+5530 Mode-- ANT.1+2/3+4
-----------	--

Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58/106	5290(1/2)+5530(3/4)	5290	1	3.20	0.17	5.87	16.20	Complies
			2	2.11	0.17			Complies
		5530	3	0.57	0.17	3.38	9.64	Complies
			4	-0.20	0.17			Complies


CH58-1

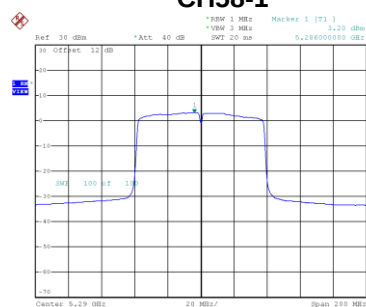


CH58-2

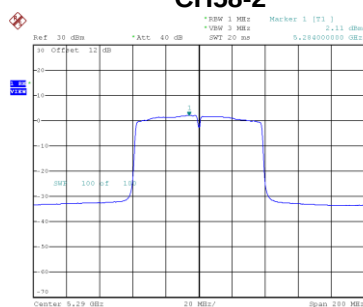

CH106-3

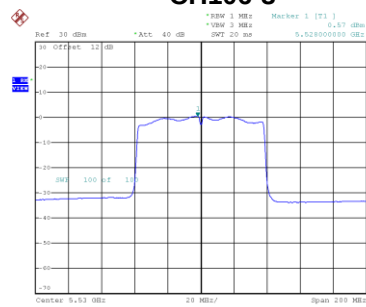


CH106-4

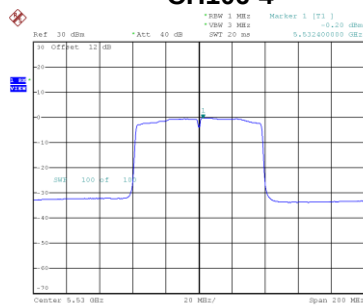

Test Mode	TX AC (VHT80) 5290+5610 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58/122	5290(1/2)+5610(3/4)	5290	1	4.74	0.17	7.30	16.20	Complies
			2	3.39	0.17			Complies
		5610	3	1.44	0.17	4.41	9.64	Complies
			4	1.01	0.17			Complies

CH58-1

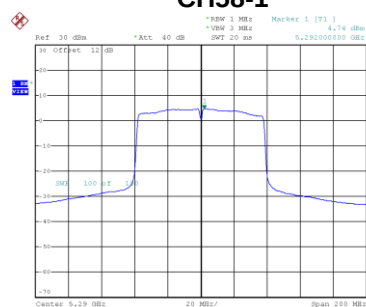


Date: 3.NOV.2020 20:29:37

CH58-2

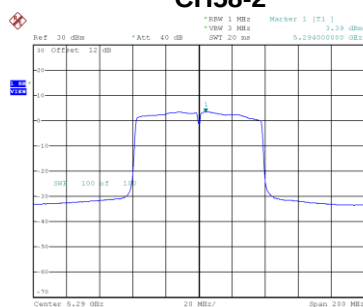


Date: 3.NOV.2020 20:30:15

CH122-3

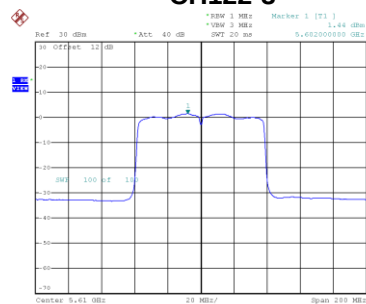

Date: 3.NOV.2020 20:31:10

CH122-4

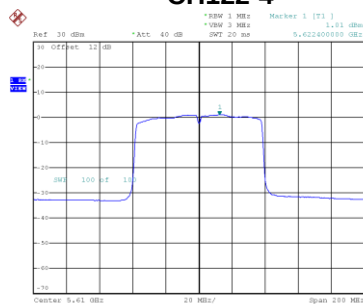


Date: 3.NOV.2020 20:31:53

Test Mode	TX AC (VHT80) 5290+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58/155	5290(1/2)+5775(3/4)	5290	1	5.78	0.17	8.38	9.64	Complies
			2	4.54	0.17			Complies
		5775	3	-0.70	0.17	2.34	28.64	Complies
			4	-0.99	0.17			Complies

CH58-1

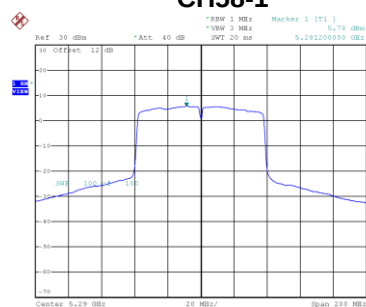


Date: 3.10.2020 17:13:41

CH58-2

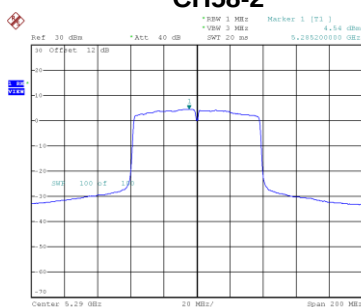


Date: 3.10.2020 17:12:05

CH155-3

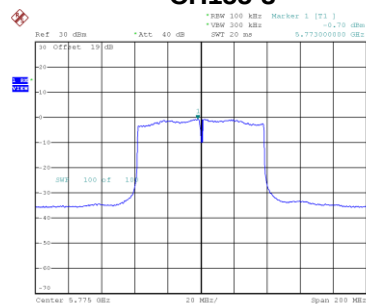

Date: 3.10.2020 17:12:148

CH155-4

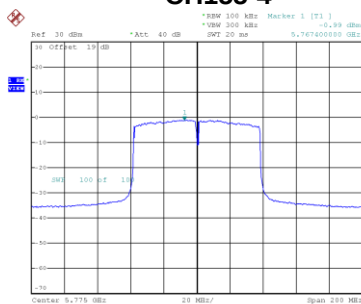


Date: 3.10.2020 17:12:156

Test Mode	TX AC (VHT80) 5530+5610 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
106/122	5530(1/2)+5610(3/4)	5530	1	1.30	0.17	3.75	9.64	Complies
			2	-0.32	0.17			Complies
		5610	3	-0.78	0.17	2.18	9.64	Complies
			4	-1.23	0.17			Complies

CH106-1

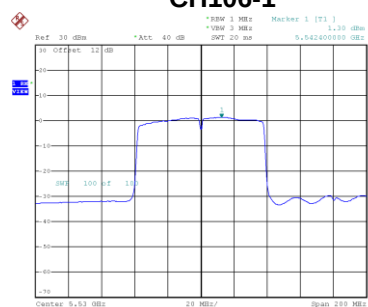


Date: 3.10.2020 19:53:50

CH106-2

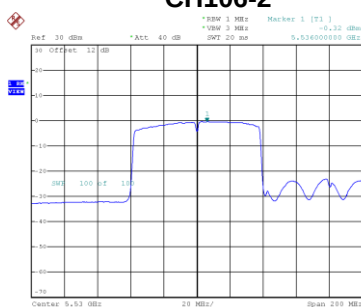


Date: 3.10.2020 19:53:06

CH122-3

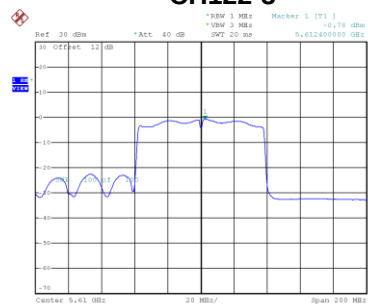

Date: 3.10.2020 19:55:27

CH122-4

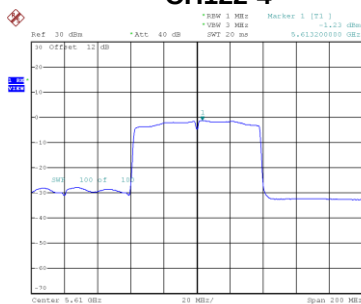


Date: 3.10.2020 19:56:55

Test Mode	TX AC (VHT80) 5530+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
106/155	5530(1/2)+5775(3/4)	5530	1	1.04	0.17	3.53	9.64	Complies
			2	-0.48	0.17			Complies
		5775	3	-4.10	0.17	-1.11	28.64	Complies
			4	-4.49	0.17			Complies

CH106-1

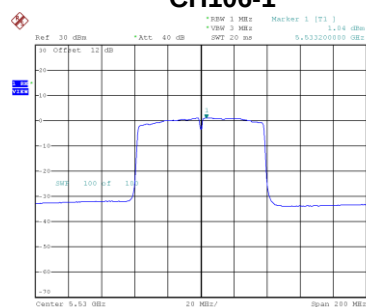


Date: 3.10.2020 20:13:124

CH106-2

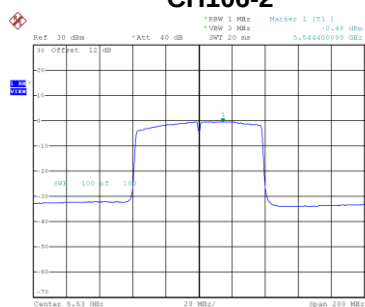


Date: 3.10.2020 20:13:129

CH155-3

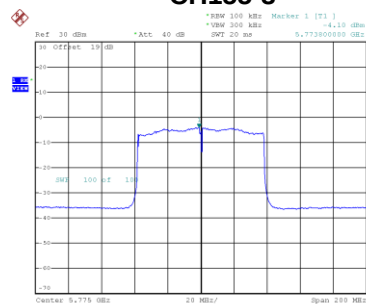

Date: 3.10.2020 20:13:125

CH155-4

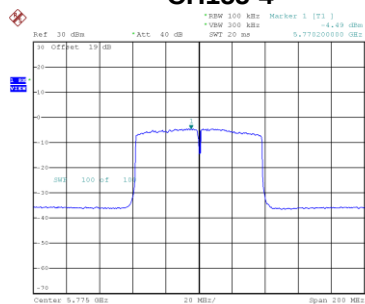


Date: 3.10.2020 20:13:106

Test Mode	TX AC (VHT80) 5610+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
122/155	5610(1/2)+5775(3/4)	5610	1	3.18	0.17	5.77	9.64	Complies
			2	1.90	0.17			Complies
		5775	3	-2.91	0.17	0.85	28.64	Complies
			4	-1.82	0.17			Complies

CH122-1

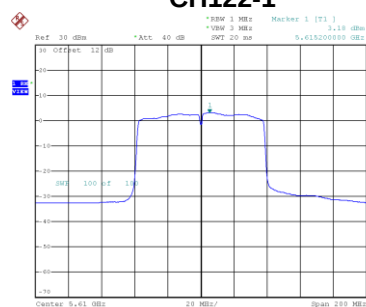


Date: 3.10.2020 17:53:49

CH122-2

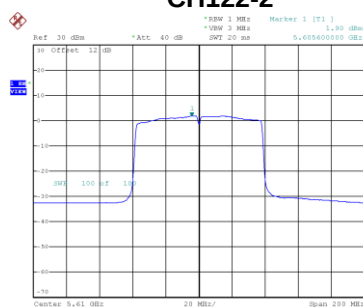


Date: 3.10.2020 17:51:39

CH155-3

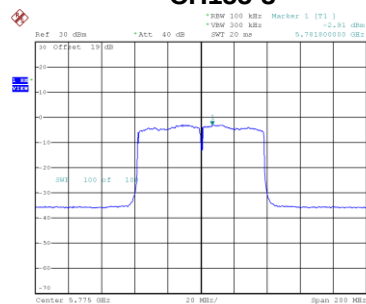

Date: 3.10.2020 17:49:31

CH155-4

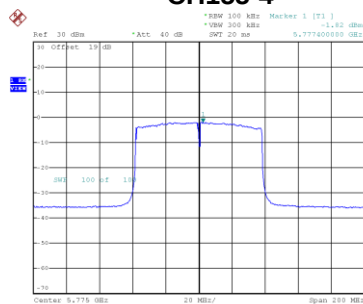


Date: 3.10.2020 17:46:59

Test Mode	TX AX (HEW80) 5210+5290 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42/58	5210(1/2)+5290(3/4)	5210	1	2.83	0.43	6.18	16.20	Complies
			2	2.65	0.43			Complies
		5290	3	1.16	0.43	4.27	9.64	Complies
			4	0.48	0.43			Complies

CH42-1

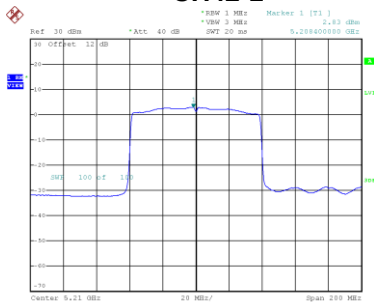


Date: 7.18.2020 15:15:43

CH42-2

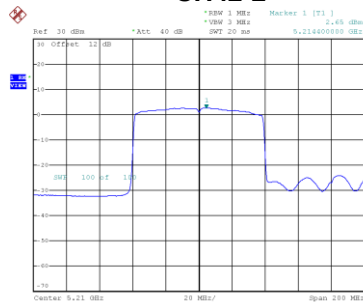


Date: 7.18.2020 15:18:30

CH58-3

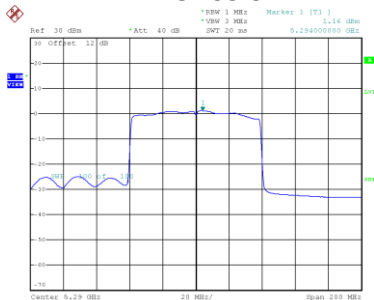

Date: 7.18.2020 15:22:54

CH58-4

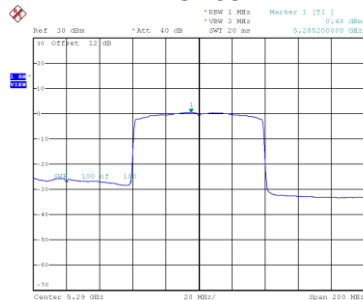


Date: 7.18.2020 15:26:34

Test Mode	TX AX (HEW80) 5210+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42/155	5210(1/2)+5775(3/4)	5210	1	2.45	0.43	5.30	16.20	Complies
			2	1.17	0.43			Complies
		5775	3	-3.41	0.43	-0.25	28.64	Complies
			4	-4.00	0.43			Complies

CH42-1

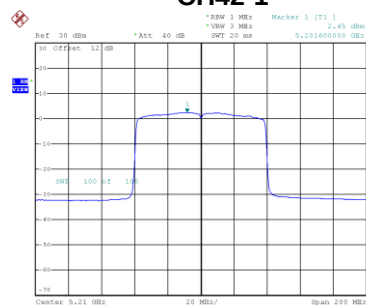


Date: 7.10.2020 13:40:36

CH42-2

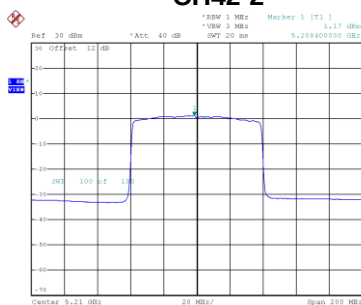


Date: 7.10.2020 13:42:31

CH155-3

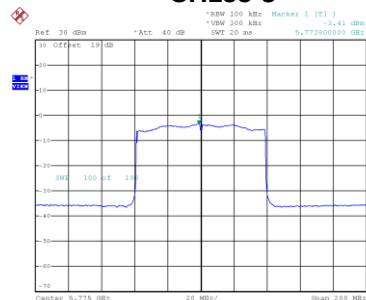

Date: 7.10.2020 13:44:25

CH155-4

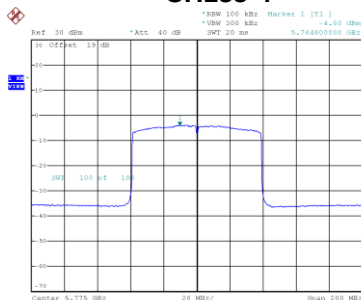


Date: 7.10.2020 13:47:46

Test Mode	TX AX (HEW80) 5290+5530 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
48/106	5290(1/2)+5530(3/4)	5290	1	3.81	0.43	6.57	9.64	Complies
			2	2.32	0.43			Complies
		5530	3	1.03	0.43	4.16	9.64	Complies
			4	0.39	0.43			Complies

CH48-1

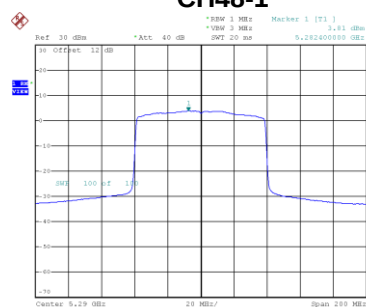


Date: 7.NOV.2020 13:51:15

CH48-2

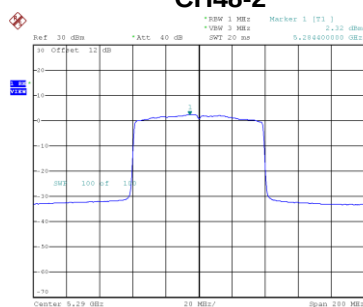


Date: 7.NOV.2020 13:55:01

CH106-3

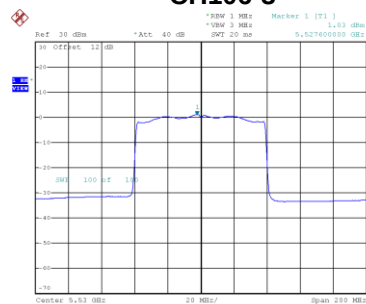

Date: 7.NOV.2020 13:57:52

CH106-4

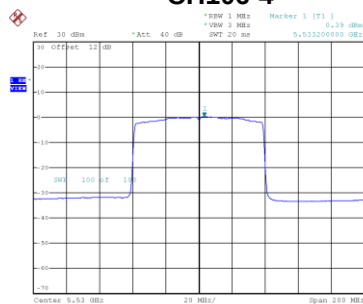


Date: 7.NOV.2020 14:00:31

Test Mode	TX AX (HEW80) 5290+5610 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58/122	5290(1/2)+5610(3/4)	5290	1	5.41	0.43	8.21	9.64	Complies
			2	4.03	0.43			Complies
		5610	3	2.01	0.43	5.29	9.64	Complies
			4	1.68	0.43			Complies

CH58-1

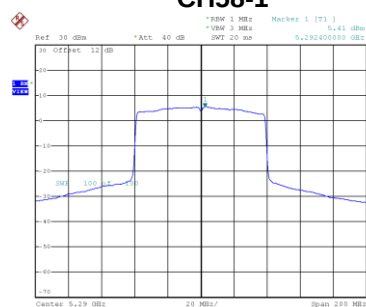


Date: 7.NOV.2020 14:04:11

CH58-2

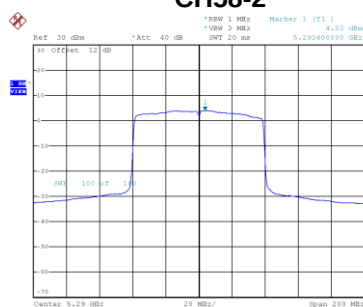


Date: 7.NOV.2020 14:06:08

CH122-3

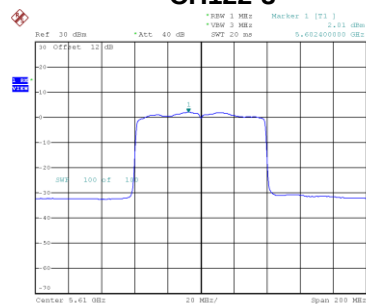

Date: 7.NOV.2020 14:09:37

CH122-4

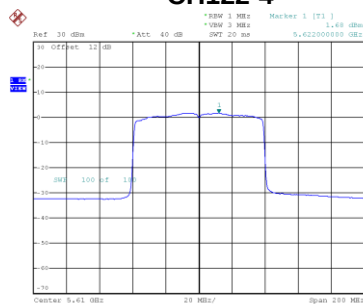


Date: 7.NOV.2020 14:11:15

Test Mode	TX AX (HEW80) 5290+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
48/155	5290(1/2)+5775(3/4)	5290	1	6.46	0.43	9.30	9.64	Complies
			2	5.17	0.43			Complies
		5775	3	0.04	0.43	3.45	28.64	Complies
			4	-0.03	0.43			Complies

CH58-1

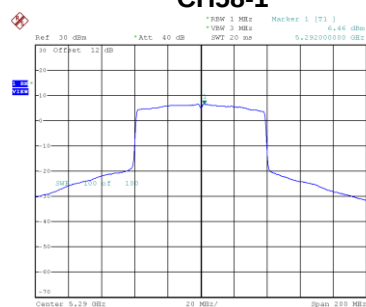


Date: 7.NOV.2020 14:26:16

CH58-2

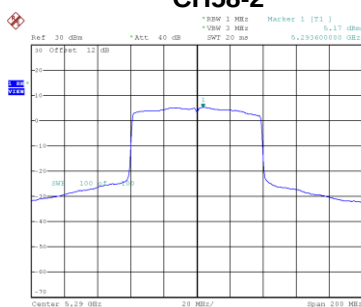


Date: 7.NOV.2020 14:28:47

CH155-3

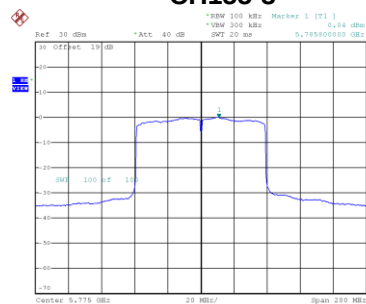

Date: 7.NOV.2020 14:31:15

CH155-4

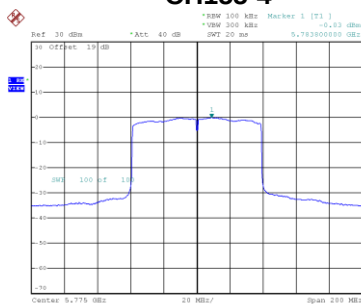


Date: 7.NOV.2020 14:33:18

Test Mode	TX AX (HEW80) 5530+5610 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
106/122	5530(1/2)+5610(3/4)	5530	1	1.86	0.43	4.63	9.64	Complies
			2	0.39	0.43			Complies
		5610	3	-0.72	0.43	2.60	9.64	Complies
			4	-0.96	0.43			Complies

CH106-1

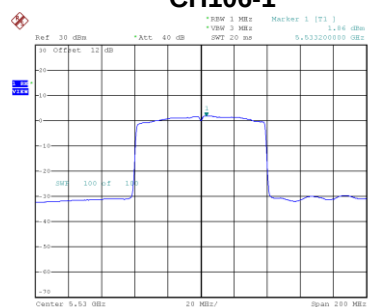


Date: 7.10.2020 15:13:47

CH106-2

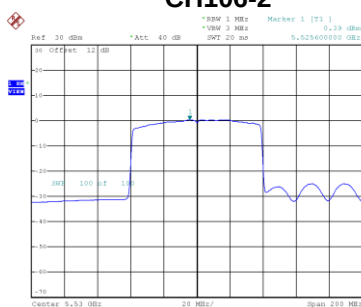


Date: 7.10.2020 15:13:47

CH122-3

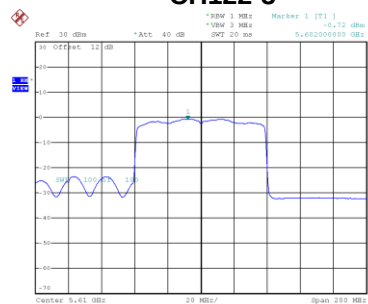

Date: 7.10.2020 15:14:13

CH122-4

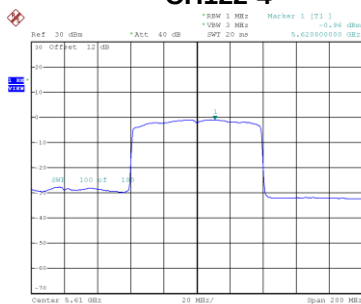


Date: 7.10.2020 15:14:14

Test Mode	TX AX (HEW80) 5610+5775 Mode-- ANT.1+2/3+4
-----------	--


Channel	Frequency (MHz)	Frequency (MHz)	ANT.	Power Spectral Density (dBm/MHz)	Duty Factor	Total Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
122/155	5610(1/2)+5775(3/4)	5610	1	3.62	0.43	6.40	9.64	Complies
			2	2.18	0.43			Complies
		5775	3	-1.34	0.43	1.85	28.64	Complies
			4	-1.85	0.43			Complies

CH122-1

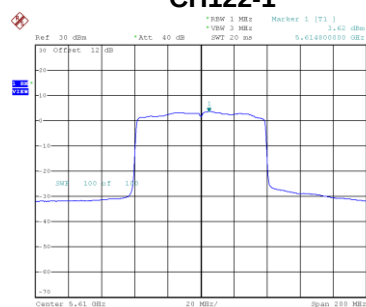


Date: 7.10.2020 14:55:47

CH122-2

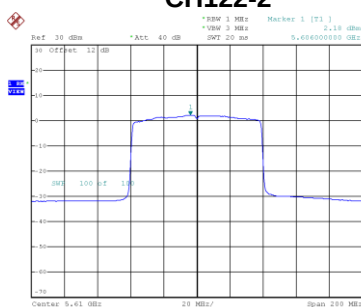


Date: 7.10.2020 14:58:35

CH155-3

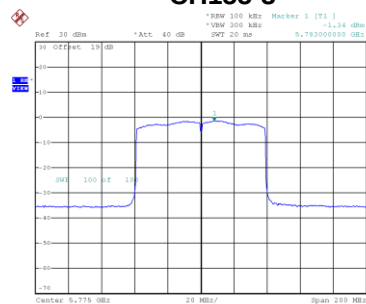

Date: 7.10.2020 15:03:17

CH155-4

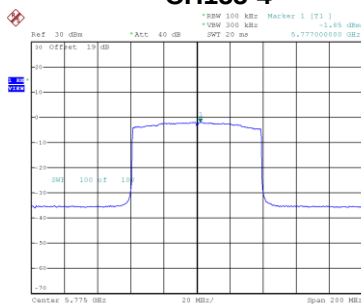

Date: 7.10.2020 15:05:08

End of Test Report